

Date: 2010-09-17 Page 1 of 15

No. : HM165707

Applicant (SUE004): SUPERSONICS ELECTRONICS COMPANY

PHASE II, BLOCK C, 4TH FLOOR, GEE CHANG IND. BLDG., 108 LOK SHAN ROAD, KOWLOON, HONG

KONG

Manufacturer: Supersonics Electronics Toys (Shenzhen) Co., Ltd.

Block 1 & 2, Xin Tian Village, Xin Feng Ind. Area, Guan

Lan, Bao an, Shenzhen, China

Description of Sample(s): Submitted Sample(s) said to be:

Product: WALKIE TALKIES

Brand Name: DISNEY Model Number: 21007 FCC ID: II621007

Date Sample(s) Received: 2010-09-07

Date Tested: 2010-09-13

Investigation Requested: Perform ElectroMagnetic Interference measurement in

accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2009 and ANSI C63.4:2003 for FCC Certification.

Conclusion(s): The submitted product <u>COMPLIED</u> with the requirements of

Federal Communications Commission [FCC] Rules and Regulations Part 15. The tests were performed in accordance with the standards described above and on Section 2.2 in this

Test Report.

Remark(s): For additional models details, see page 4.

Dr. LEE Kam Chuen, Authorized Signatory

ElectroMagnetic Compatibility Department For and on behalf of

The Hong Kong Standards and Testing Centre Ltd.



Date: 2010-09-17 Page 2 of 15

No. : HM165707

Appendix B

Photographs

CONTENT:

	Cover Content	Page 1 of 15 Page 2 of 15
1.0	General Details	
1.1	Test Laboratory	Page 3 of 15
1.2	Applicant Details Applicant Manufacturer	Page 3 of 15
1.3	Equipment Under Test [EUT] Description of EUT operation	Page 4 of 15
1.4	Date of Order	Page 4 of 15
1.5	Submitted Sample(s)	Page 4 of 15
1.6	Test Duration	Page 4 of 15
1.7	Country of Origin	Page 4 of 15
<u>2.0</u>	Technical Details	
2.1	Investigations Requested	Page 5 of 15
2.2	Test Standards and Results Summary	Page 5 of 15
<u>3.0</u>	Test Results	
3.1	Emission	Page 6-9 of 15
3.2	Bandwidth Measurement	Page 10-12 of 15
	Appendix A	
	List of Measurement Equipment	Page 13 of 15

Page 14-15 of 15

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



Date: 2010-09-17 Page 3 of 15

No. : HM165707

1.0 General Details

1.1 Test Laboratory

The Hong Kong Standards and Testing Centre Ltd. EMC Laboratory 10 Dai Wang Street, Taipo Industrial Estate New Territories, Hong Kong

Telephone: 852 2666 1888 Fax: 852 2664 4353

1.2 Applicant Details Applicant

SUPERSONICS ELECTRONICS COMPANY PHASE II, BLOCK C, 4^{TH} FLOOR, GEE CHANG IND. BLDG., 108 LOK SHAN ROAD, KOWLOON, HONG KONG

Manufacturer

Supersonics Electronics Toys (Shenzhen) Co., Ltd. Block 1 & 2, Xin Tian Village, Xin Feng Ind. Area, Guan Lan, Bao an, Shenzhen, China



Date: 2010-09-17 Page 4 of 15

No. : HM165707

1.3 Equipment Under Test [EUT] Description of Sample(s)

Submitted sample(s) said to be:

Product: WALKIE TALKIES

Manufacturer: Supersonics Electronics Toys (Shenzhen) Co., Ltd.

Brand Name: DISNEY
Model Number: 21007
Additional Model Number(s): 61205

Input Voltage: 9Vd.c. ("6F22" size battery x 1)

1.3.1 Description of EUT Operation

The Equipment Under Test (EUT) is a SUPERSONICS ELECTRONICS COMPANY, WALKIE TALKIES. The transmitter is a 2 buttons transmitter. The EUT continues to transmit while button is being pressed. Modulation by Microphone, and type is amplitude modulation.

1.4 Date of Order

2010-09-07

1.5 Submitted Sample(s):

2 Sample(s)

1.6 Test Duration

2010-09-13

1.7 Country of Origin

China



Date: 2010-09-17 Page 5 of 15

No. : HM165707

<u>2.0</u> Technical Details

2.1 Investigations Requested

Perform ElectroMagnetic Interference measurement in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15:2009 and ANSI C63.4:2003 for FCC Certification.

2.2 Test Standards and Results Summary Tables

EMISSION Results Summary							
Test Condition Test Requirement Test Method Class / Test Result							
	Severity	Pass	Failed				
Field Strength of Fundamental Emissions & Spurious Emissions	FCC 47CFR 15.235	ANSI C63.4:2003	N/A	\boxtimes			
Radiated Emissions, 30MHz to 1GHz	FCC 47CFR 15.209	ANSI C63.4:2003	N/A	\boxtimes			

Note: N/A - Not Applicable



Date : 2010-09-17 Page 6 of 15

No. : HM165707

3.0 Test Results

3.1 Emission

3.1.1 Radiated Emissions (30 – 1000MHz)


Test Requirement: FCC 47CFR 15.209
Test Method: ANSI C63.4:2003
Test Date: 2010-09-13
Mode of Operation: Tx mode

Test Method:

The sample was placed 0.8m above the ground plane on a standard radiated emission test site. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. In the frequency range of 9kHz to 30MHz, The center of the loop antenna shall be 1 meter above the ground and rotated loop axis for maximum reading. The emissions worst-case are shown in Test Results of the following pages.

*: Semi-anechoic chamber located on the G/F of The Hong Kong Standards and Testing Centre Ltd. with a metal ground plane filed with the FCC pursuant to section 2.948 of the FCC rules, with Registration Number: 607756.

Test Setup:

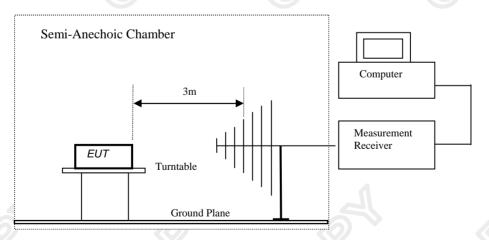



Date : 2010-09-17 Page 7 of 15

No. : HM165707

Limits for Field Strength of Fundamental Emissions [FCC 47CFR 15.235]:

Frequency Range of	Field Strength of	Field Strength of	
Fundamental	Fundamental Emission	Fundamental Emission	
	[Peak]	[Average]	
[MHz]	$[\mu V/m]$	$[\mu V/m]$	
49.82-49.90	100,000	10,000	

Results of Tx Mode: PASS

	Field Strength of Fundamental Emissions							
	Peak Value							
Frequency	Frequency Measured Correction Field Field Limit @3m E-Field							
Level @3m Factor Strength Strength Po								
MHz	$dB\mu V$	dB/m	dBμV/m	μV/m	μV/m	-		
49.86	39.7	8.6	48.3	260.0	100,000	Vertical		

	Field Strength of Fundamental Emissions						
	Avreage Value						
Frequency	Frequency Measured Correction Field Field Limit @3m E-Field						
Level @3m Factor Strength Strength						Polarity	
MHz	$dB\mu V$	dB/m	dBμV/m	μV/m	μV/m		
49.86	36.6	8.6	45.2	182.0	10,000	Vertical	

Remarks:

According to FCC 47CFR15.35, the limit on the radio frequency emissions as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.

For effective averaging, the bandwidth of the video filter must be greater than the resolution bandwidth. The higher the ratio of resolution bandwidth to video bandwidth, the greater the averaging will be recorded. Below setting for HP8572A EMI Receiver.

Resolution Bandwidth =100kHz Video Bandwidth =300kHz

No additional spurious emissions found between lowest internal used/generated frequency and 30 MHz. Correction Factor includes Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty: 30MHz to 1GHz 5.1dB



Date : 2010-09-17 Page 8 of 15

No. : HM165707

Limits for Radiated Emissions [FCC 47 CFR 15.209]:

Frequency Range [MHz]	Quasi-Peak Limits [μV/m]
30-88	100
88-216	150
216-960	200
Above960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Results of Tx Mode: PASS

Radiated Emissions Quasi-Peak								
Frequency	Measured	Correction	Field	Field	Limit @3m	E-Field		
	Level @3m	Factor	Strength	Strength		Polarity		
MHz	$dB\mu V$	dB/m	dΒμV	μV/m	μV/m			
99.7	17.6	9.1	26.7	21.6	150	Vertical		
149.6	22.5	8.7	31.2	36.3	150	Vertical		
199.4	< 1.0	11.7	< 12.7	< 4.3	150	Vertical		
249.3	< 1.0	13.9	< 14.9	< 5.6	200	Vertical		
299.2	< 1.0	13.9	< 14.9	< 5.6	200	Vertical		
349.0	< 1.0	17.2	< 18.2	< 8.1	200	Vertical		
398.9	< 1.0	18.8	< 19.8	< 9.8	200	Vertical		
448.7	< 1.0	19.1	< 20.1	< 10.1	200	Vertical		
498.6	< 1.0	20.6	< 21.6	< 12.0	200	Vertical		
570.2	0.1	21.4	21.5	11.9	200	Vertical		

Remarks:

No additional spurious emissions found between lowest internal used/generated frequency and 30 MHz Correction Factor includes Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty: 30MHz to 1GHz 5.1dB



Date: 2010-09-17 Page 9 of 15

No. : HM165707

Limits for Radiated Emissions [FCC 47 CFR 15.209]:

Frequency Range	Quasi-Peak Limits
[MHz]	$[\mu V/m]$
30-88	100
88-216	150
216-960	200
Above960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Results of Rx Mode: PASS

	Radiated Emissions							
			Quasi-Peak					
Frequency	Frequency Measured Correction Field Field Limit @3m E-Field							
Level @3m Factor Strength Strength Pola								
MHz	dΒμV	dB/m	$dB\mu V$	μV/m	μV/m			
49.9 17.6 8.6 26.2 20.4 100 Verti						Vertical		
99.7 2.6 9.1 11.7 3.8 100 Verti								
149.6	7.6	8.7	16.3	6.5	150	Vertical		

Remarks:

No additional spurious emissions found between lowest internal used/generated frequency and 30 MHz Correction Factor includes Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty: 30MHz to 1GHz 5.1dB



Date: 2010-09-17 Page 10 of 15

No. : HM165707

3.2 20dB Bandwidth of Fundamental Emission

Test Requirement: FCC 47 CFR 15.235

Test Method: ANSI C63.4:2003 (Section 13.1.7)

Test Date: 2010-09-13 Mode of Operation: On mode

Test Method:

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

Test Setup:

As Test Setup of clause 3.1.1 in this test report.



Date: 2010-09-17 Page 11 of 15

No. : HM165707

Limits for 20dB Bandwidth of Fundamental Emission:

Frequency Range	20dB Bandwidth	FCC Limits
[MHz]	[kHz]	[MHz]
49.86	16.6332	within 49.82-49.90


20dB Bandwidth of Fundamental Emission Marker 1 [T1 ndB] RBW 10 kHz Ref Lvl ndB 20.00 dB VBW 30 kHz 87 dBNV BW 47.69539078 kHz SWT 15 ms Unit dByV [T1] 72.83 dBy .06150301 MH: ndF 20.00 dB 7.69539078 kHz BW ∇_{T} 52.81 dBy [T1] 9.83705411 MHz 60 52.55 dBy hand whomphallich I2D 9.88474950 MHz Start 49.81 MHz 10 kHz/ Stop 49.91 MHz



Date: 2010-09-17 Page 12 of 15

No. : HM165707

At the band edge, there was 32.71dB attenuation (>26dB)

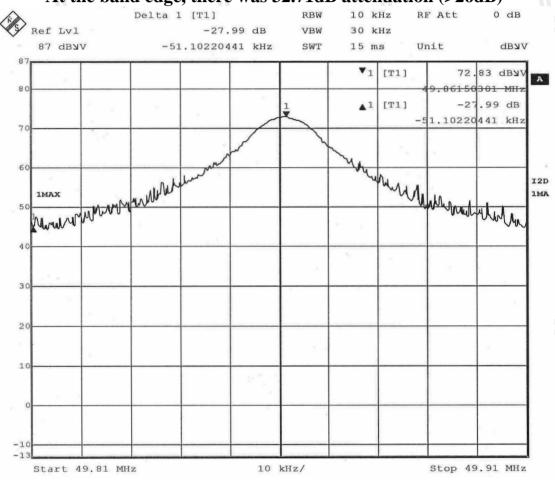



Date: 2010-09-17 Page 13 of 15

No. : HM165707

Appendix A

List of Measurement Equipment

Radiated Emission

EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL	DUE CAL
EM020	HORN ANTENNA	EMCO	3115	4032	2009/09/02	2011/09/02
EM215	MULTIDEVICE CONTROLLER	EMCO	2090	00024676	N/A	N/A
EM216	MINI MAST SYSTEM	EMCO	2075	00026842	N/A	N/A
EM217	ELECTRIC POWERED TURNTABLE	EMCO	2088	00029144	N/A	N/A
EM218	ANECHOIC CHAMBER	ETS-Linggren	FACT-3		2008/12/01	2011/12/01
EM174	BICONILOG ANTENNA	EMCO	3142B	1671	2010/02/09	2012/02/09
EM229	EMI Test Receiver	R&S	ESIB40	100248	2009/09/27	2010/09/27
EM181	EMI TEST RECEIVER	ROHDE & SCHWARZ	ESIB7	100072	2010/07/01	2011/07/01
EM022	LOOP ANTENNA	EMCO	6502	1189-2424	2009/07/26	2011/07/26

Remarks:-

CM Corrective Maintenance

N/A Not Applicable or Not Available

TBD To Be Determined



Date: 2010-09-17 Page 14 of 15

No. : HM165707

Appendix B

Photographs of EUT


Front View of the product



Rear View of the product



Inner Circuit Top View

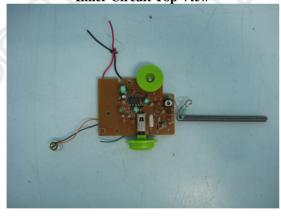

Inner Circuit Bottom View






Date: 2010-09-17 Page 15 of 15

No. : HM165707

Photographs of EUT

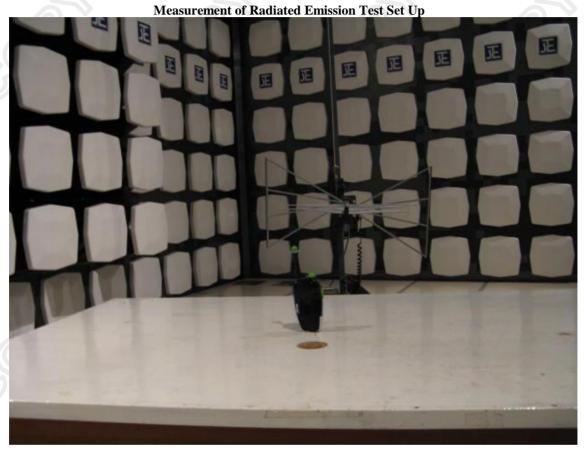

***** End of Test Report *****

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org