

Hong Kong Standards and Testing Centre

Date : 2005-07-09 **TEST REPORT** Page 1 of 17

No.: HM153860

Applicant: Supersonics Electronics Co

Block D 6th Floor, Gee Chang Industrial Bldg., 108 Lok Shan Road, Tokwawan, Kowloon

Hong Kong

Description of Samples: Model name: Flip Phone Walkie Talkie

Model no.: 22295
Brand name: N/A
FCC ID: II622295

Date Samples Received: 2005-04-07

Date Tested: 2005-05-05

Investigation Requested: FCC Part 15 Subpart C

Conclusions: The submitted product <u>COMPLIED</u> with the

requirements of Federal Communications Commission [FCC] Rules and Regulations Part 15. The tests were performed in accordance with the standards described above and on

Section 2.2 in this Test Report.

Remarks: For additional models details, see page 5.

K C Lee, EMD for Chief Executive

This report shall not be reproduced unless with prior written approval from the Hong Kong Standards and Testing Centre.



Hong Kong Standards and Testing Centre

Date : 2005-07-09 **TEST REPORT** Page 2 of 17

No.: HM153806

CONTENT:

	Cover Content	Page 1 of 17 Page 2-3 of 17
<u>1.0</u>	General Details	
1.1	Test Laboratory	Page 4 of 17
1.2	Applicant Details Applicant HKSTC Code Number for Applicant Manufacturer	Page 4 of 17
1.3	Equipment Under Test [EUT] Description of EUT operation	Page 5 of 17
1.4	Date of Order	Page 5 of 17
1.5	Submitted Samples	Page 5 of 17
1.6	Test Duration	Page 5 of 17
1.7	Country of Origin	Page 5 of 17
1.8	Additional Information of EUT	Page 6 of 17
2.0	Technical Details	
2.1	Investigations Requested	Page 7 of 17
2.2	Test Standards and Results Summary	Page 7 of 17
<u>3.0</u>	Test Results	
3.1	Emission	Page 8-12 of 17
3 2	Bandwidth Measurement	Page 13-14 of 17



Hong Kong Standards and Testing Centre

No.: HM153806

Appendix A

List of Measurement Equipment Page 15 of 17

Appendix B

Photographs Page 16-17 of 17

香港新界大埔工業村大宏街 10 號



Hong Kong Standards and Testing Centre

No.: HM153806

1.0 General Details

1.1 Test Laboratory

The Hong Kong Standards and Testing Centre Ltd. EMC Laboratory 10 Dai Wang Street, Taipo Industrial Estate New Territories, Hong Kong

Telephone: 852 2666 1888 Fax: 852 2664 4353

1.2 Applicant Details Applicant

Supersonics Electronics Co Block D 6th Floor, Gee Chang Industrial Bldg., 108 Lok Shan Road, Tokwawan, Kowloon Hong Kong

HKSTC Code Number for Applicant

SUE004

Manufacturer

Supersonics Electronics Toys (Shenzhen) Company Ltd. Block 1 & 2, Xin Tian Village, Xin Feng Industrial Area, Guan Lan, Bao An, Shenzhen, China



Hong Kong Standards and Testing Centre

Date : 2005-07-09 **TEST REPORT** Page 5 of 17

No.: HM153806

1.3 Equipment Under Test [EUT] Description of Sample

Model Name: Flip Phone Walkie Talkie

Manufacturer: Supersonics Electronics Toys (Shenzhen) Company Ltd.

Brand Name: N/A Model Number: 22295 Additional Model Number: 22296

Input Voltage: 9Vd.c ("6F22" size battery x 1)

1.3.1 Description of EUT Operation

The Equipment Under Test (EUT) is a Supersonics Electronics Co., Walkie Talkie With Carry Case. The transmitter is a 3 buttons transmitter. The EUT continues to transmit while button is being pressed. It is voice transmission, Modulation by microphone, and type is amplitude modulation.

1.4 Date of Order

2005-04-07

1.5 Submitted Sample(s):

2 Samples per model

1.6 Test Duration

2005-05-05

1.7 Country of Origin

China



Hong Kong Standards and Testing Centre

No.: HM153806

1.8 Additional Information of EUT

	Submitted	Not Available
User Manual		
Part List		
Circuit Diagram		
Printed Circuit Board [PCB] Layout		
Block diagram		
FCC ID Label	\boxtimes	

香港新界大埔工業村大宏街 10 號



Hong Kong Standards and Testing Centre

Date : 2005-07-09 **TEST REPORT** Page 7 of 17

No.: HM153806

2.0 Technical Details

2.1 Investigations Requested

Perform ElectroMagnetic Interference measurement in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15 and ANSI C63.4:2003 for FCC Certification.

2.2 Test Standards and Results Summary Tables

	EMISSION								
Results Summary									
Test Condition	Test Requirement	Test Method	Class /	Te	est Resul	t			
			Severity	Pass	Failed	N/A			
Field Strength of Fundamental Emissions & Spurious Emissions	FCC 47CFR 15.235	ANSI C63.4:2003	N/A	\boxtimes					
Radiated Emissions, 30MHz to 1GHz	FCC 47CFR 15.209	ANSI C63.4:2003	Class B	\boxtimes) 10			
Conducted Emissions on AC, 0.15MHz to 30MHz	FCC 47CFR 15.207	ANSI C63.4:2003	Class B						

Note: N/A - Not Applicable



Hong Kong Standards and Testing Centre

Date: 2005-07-09 **TEST REPORT** Page 8 of 17

No.: HM153806

3.0 Test Results

3.1 Emission

3.1.1 Radiated Emissions (30 - 1000MHz)


Test Requirement: FCC 47CFR 15.109
Test Method: ANSI C63.4:2003
Test Date: 2005-05-05
Mode of Operation: On mode

Test Method:

The sample was placed 0.8m above the ground plane on the OATS *. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

*: OATS [Open Area Test Site] located at HKSTC with a metal ground plane filed with the FCC pursuant to section 2.948 of the FCC rules, with Registration Number: 607756.

Test Setup:

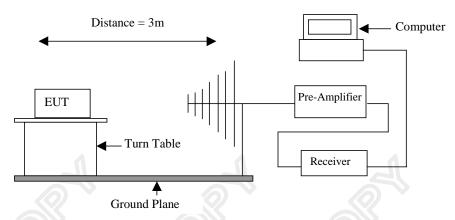



Hong Kong Standards and Testing Centre

No.: HM153806

Limits for Field Strength of Fundamental Emissions [FCC 47CFR 15.235]:

Frequency Range of	Field Strength of	Field Strength of
Fundamental	Fundamental Emission	Fundamental Emission
	[Peak]	[Average]
[MHz]	[μV/m]	[μV/m]
49.82-49.90	100.000	10.000

Results of Transmitter: PASS

	Field Strength of Fundamental Emissions								
	Peak Value								
Frequency	Frequency Measured Correction Field Field Limit @3m E-Field								
	Level @3m	Factor	Strength	Strength		Polarity			
MHz	dBμV/m	dBμV/m	dBμV/m	μV/m	μV/m				
49.86	43.3	10.2	53.5	473.2	100,000	Vertical			

Field Strength of Fundamental Emissions Average							
Frequency	Measured	Correction	Field	Field	Limit @3m	E-Field	
	Level @3m	Factor	Strength	Strength		Polarity	
MHz	dBμV/m	dBμV/m	dBµV/m	μV/m	μV/m		
49.86	43.2	10.2	53.4	467.7	10,000	Vertical	

Remarks:

According to FCC 47CFR15.35, the limit on the radio frequency emissions as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.

For effective averaging, the bandwidth of the video filter must be smaller than the resolution bandwidth. The higher the ratio of resolution bandwidth to video bandwidth, the greater the averaging will be recorded. Below setting for HP8572A EMI Receiver.

Resolution Bandwidth =3MHz Video Bandwidth =1Hz

Correction Factor included Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty : 30MHz to 1GHz ±4.1dB



Hong Kong Standards and Testing Centre

No.: HM153806

Limits for Radiated Emissions [FCC 47 CFR 15.209 Class B]:

Frequency Range [MHz]	Quasi-Peak Limits [μV/m]
30-88	100
88-216	150
216-960	200
Above960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasipeak detector and above 1000MHz are based on measurements employing an average detector.

Results of Transmitter: PASS

	Radiated Emissions								
	Quasi-Peak								
Frequency	Me	asured	Correction		Field		Field	Limit @3m	E-Field
	Lev	el @3m	Factor	S	trength	S	trength		Polarity
MHz	dE	βµV/m	dBμV/m	d	BµV/m		μV/m	μV/m	
99.72	<	1.0	11.0	<	12.0	<	4.0	150	Vertical
149.58	<	1.0	11.3	<	12.3	<	4.1	150	Vertical
199.44	<	1.0	11.5	<	12.5	<	4.2	150	Vertical
249.30	<	1.0	15.9	<	16.9	<	7.0	200	Vertical
299.16	<	1.0	16.9	<	17.9	<	7.9	200	Vertical
349.02	<	1.0	17.2	<	18.2	<	8.1	200	Vertical
398.88	<	1.0	18.8	<	19.8	<	9.8	200	Vertical
448.74	<	1.0	19.7	<	20.7	<	10.8	200	Vertical
498.60	<	1.0	20.6	<	21.6	<	12.0	200	Vertical

Remarks:

Correction Factor included Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty : 30MHz to 1GHz ±4.1dB



Hong Kong Standards and Testing Centre

Date : 2005-07-09 **TEST REPORT** Page 11 of 17

No.: HM153806

Limits for Radiated Emissions [FCC 47 CFR 15.109 Class B]:

Frequency Range [MHz]	Quasi-Peak Limits [μV/m]
30-88	100
88-216	150
216-960	200
Above960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasipeak detector and above 1000MHz are based on measurements employing an average detector.

Results of Receiver: PASS

	Radiated Emissions Quasi-Peak								
Frequency	Measured	Correction	Field	Field	Limit @3m	E-Field			
	Level @3m	Factor	Strength	Strength		Polarity			
MHz	dBμV/m	dΒμV/m	dBµV/m	μV/m	μV/m				
49.86	18.6	10.2	28.8	27.5	100	Vertical			
99.72	< 1.0	12.5	< 13.5	< 4.7	150	Vertical			
149.58	< 1.0	9.8	< 10.8	< 3.5	150	Vertical			
199.44	< 1.0	11.5	< 12.5	< 4.2	150	Vertical			
249.30	< 1.0	15.9	< 16.9	< 7.0	200	Vertical			
299.16	< 1.0	17.4	< 18.4	< 8.3	200	Vertical			
349.02	< 1.0	17.2	< 18.2	< 8.1	200	Vertical			
398.88	< 1.0	18.8	< 19.8	< 9.8	200	Vertical			
448.74	< 1.0	19.7	< 20.7	< 10.8	200	Vertical			
498.60	< 1.0	20.6	< 21.6	< 12.0	200	Vertical			

Calculated measurement uncertainty : 30MHz to 1GHz ±4.1dB



Hong Kong Standards and Testing Centre

Date : 2005-07-09 **TEST REPORT** Page 12 of 17

No.: HM153806

3.1.1 Conducted Emissions (0.15MHz to 30MHz)

Test Requirement: FCC 47CFR 15.207
Test Method: ANSI C63.4:2003

Test Date: N/A
Mode of Operation: N/A

Results: N/A

The EUT is operated by a single source of internal battery power [located in the battery compartment], therefore power line conducted emission was deemed unnecessary.

香港新界大埔工業村大宏街 10 號



Hong Kong Standards and Testing Centre

Date : 2005-07-09 **TEST REPORT** Page 13 of 17

No.: HM153806

3.2 26dB Bandwidth of Fundamental Emission

Test Requirement: FCC 47 CFR 15.235

Test Method: ANSI C63.4:2003 (Section 13.1.7)

Test Date: 2005-05-05 Mode of Operation: On mode

Test Method:

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

Test Setup:

As Test Setup of clause 3.1.1 in this test report.




Hong Kong Standards and Testing Centre

Date : 2005-07-09 **TEST REPORT** Page 14 of 17

No.: HM153806

Limits for 26dB Bandwidth of Fundamental Emission:

Frequency Range	26dB Bandwidth	FCC Limits
[MHz]	[KHz]	[MHz]
49.86	18.0	within 49.82-49.90

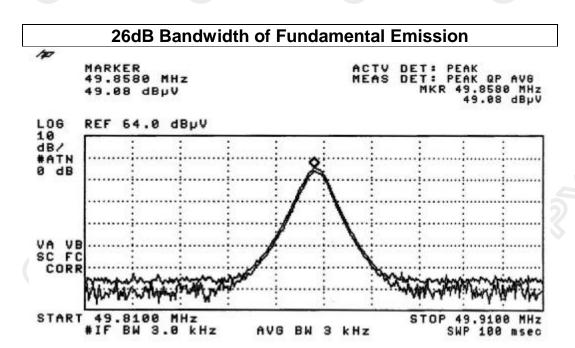



Hong Kong Standards and Testing Centre

Date : 2005-07-09 **TEST REPORT** Page 15 of 17

No.: HM153806

Appendix A

List of Measurement Equipment

Radiated Emission

EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL
EM007	SPECTRUM ANALYZER	HEWLETT PACKARD	HP85660B	3144A21192	15/06/04
EM008	SPECTRUM ANALYZER DISPLAY	HEWLETT PACKARD	HP85662A	3144A20514	15/06/04
EM009	QUASI PEAK ADAPTOR	HEWLETT PACKARD	HP85650A	3303A01702	15/06/04
EM010	RF PRESELECTOR	HEWLETT PACKARD	HP85685A	3221A01410	15/06/04
EM011	ATTENUATOR/SWITCH	HEWLETT PACKARD	HP11713A	2508A10595	15/06/04
EM012	PRE-AMPLIFIER	HEWLETT PACKARD	HP8449B	3008A00262	15/06/04
EM020	HORN ANTENNA	ETS-Linggren	3115	4032	30/07/03
EM022	LOOP ANTENNA	ETS-Linggren	6502	1189-2424	19/09/03
EM072	SIGNAL GENERATOR	HEWLETT PACKARD	8640B	1948A11892	N/A
EM083	OPEN AREA TEST SITE	HKSTC	N/A	N/A	08/02/03
EM131	EMC ANALYZER	HEWLETT PACKARD	8595EM	3710A00155	13/01/04
EM145	EMI TEST RECEIVER	ROHDE & SCHWARZ	ESCS 30	830245/021	04/10/04
EM195	ANTENNA POSITIONING MAST	ETS-Linggren	2075	2368	N/A
EM196	MULTI-DEVICE CONTROLLER	ETS-Linggren	2090	1662	N/A
EM215	MULTIDEVICE CONTROLER	ETS-Linggren	2090	00024676	N/A
EM216	MINI MAST SYSTEM	ETS-Linggren	2075	00026842	N/A
EM217	ELECTRIC POWERED TURNTABLE	ETS-Linggren	2088	00029144	N/A
EM218	ANECHOIC CHAMBER	ETS-Linggren	FACT-3		19/03/04
EM219	BICONILOG ANTENNA	ETS-Linggren	3142C	00029071	28/10/03
EM218	ETS ANECHOIC CHAMBER	EMCO	Fact-3	N/A	15/03/04
EM215	MULTI-DEVICE CONTROLLER	EMCO	2090	00024676	N/A
EM216	ANTENNA POSITIONING MAST	EMCO	2070	00024727	N/A

Line Conducted

EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL
EM078	VARIAC	SHANGHAI VOLTAGE	TDGC-3/0.5	N/A	CM
EM081	SMALL SCREENED ROOM	MIKO INST HK	N/A	N/A	27/01/05
EM119	LISN	ROHDE & SCHWARZ	ESH3-Z5	0831.5518.52	14/10/04
EM127	ISOLATION TRANSFORMER 220 TO 300V	WING SUN	N/A	N/A	CM
EM142	PULSE LIMITER	ROHDE & SCHWARZ	ESH3Z2	357.8810.52	04/08/04
EM181	EMI TEST RECEIVER	ROHDE & SCHWARZ	ESIB7	100072	06/01/04
EM154	SHIELDING ROOM	SIEMENA MATSUSHITA COMPONENTS	N/A	803-740-057- 99A	27/01/05
EM197	LISN	ETS-Linggren	4825/2	1193	05/06/04
EM213	DIGITAL POWER METER	VICNOBL	VIP120	00277	14/09/04

Remarks:-

CM Corrective Maintenance N/A Not Applicable or Not Available

TBD To Be Determined



Hong Kong Standards and Testing Centre

Date : 2005-07-09 **TEST REPORT** Page 16 of 17

No.: HM153806

Appendix B

Photographs of EUT

Front View of the product





Inner Circuit Top View



Inner Circuit Bottom View





Hong Kong Standards and Testing Centre

Date : 2005-07-09 **TEST REPORT** Page 17 of 17

No.: HM153806

Photographs of EUT

Measurement of Radiated Emission Test Set Up

***** End of Test Report *****