

Brand / Model : CWR-854  
 Remark : Tx Mode , 11g Ch01 , Power Set 90  
 Tested by : Wen

Location: Open Site C

Date: 2004/5/5


Time: 上午 12:12

Approved by: 鍾昆宏

Temperature (C): 28.0

Humidity (%): 60

Polarity: Horizontal

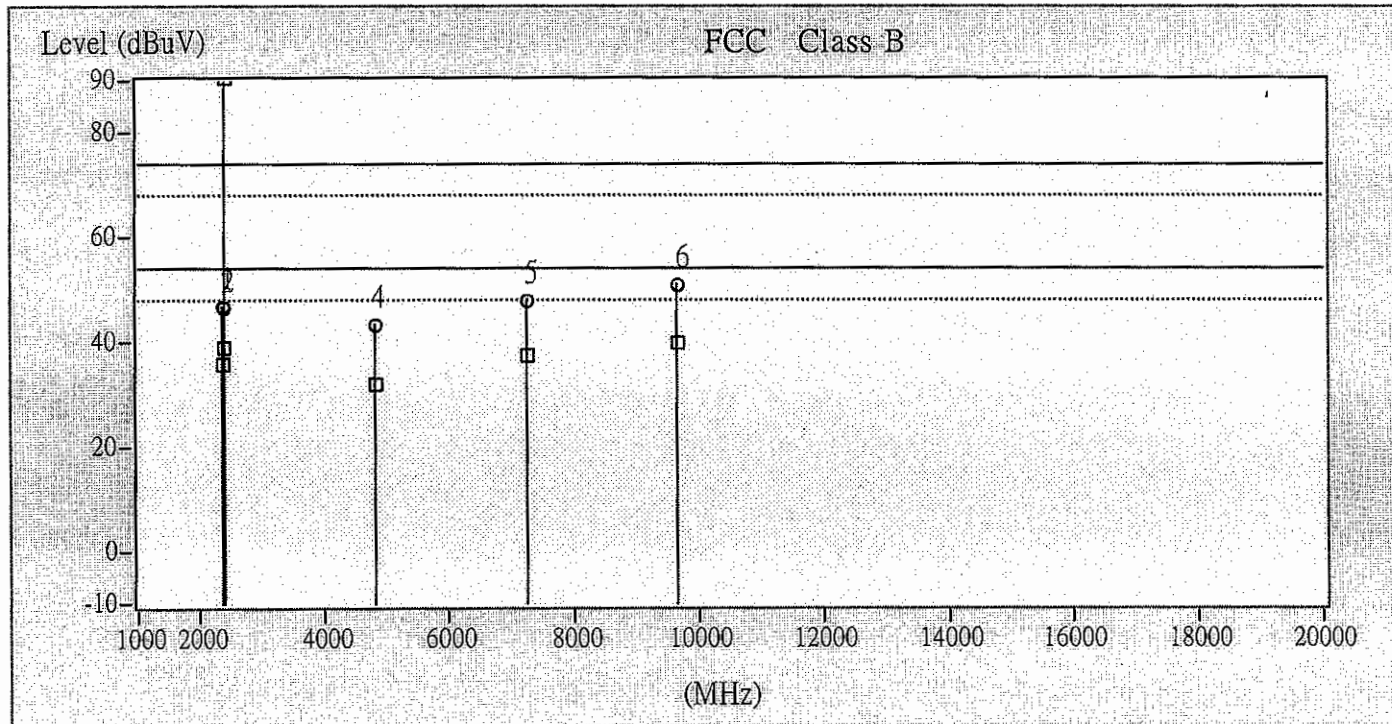

This data is for evaluation purposes only. It cannot be used for EMC approvals unless it contains the approved signature.

If you have any questions regarding the test data, you can write your comments to [service@mail.adt.com.tw](mailto:service@mail.adt.com.tw)

No.	Freq. MHz	C.F. dB	Reading		Emission		Limit		Margin		Ant./Table	
			PK	AV	PK	AV	PK	AV	PK	AV	cm	deg
1	2376.00	30.7	16.2	5.3	46.9	36.0	74.0	54.0	-27.1	-18.0	120	40
2	2390.00	33.8	12.9	5.4	46.7	39.2	74.0	54.0	-27.3	-14.8	116	31
F 3	2412.00	29.9	68.2	60.8	98.1	90.7	74.0	54.0	24.1	36.7	116	31
4	4824.00	36.2	7.2	-4.1	43.4	32.1	74.0	54.0	-30.6	-21.9	119	17
5	7236.00	41.7	6.3	-4.1	48.0	37.6	74.0	54.0	-26.0	-16.4	108	35
6	9648.00	44.9	6.1	-4.9	51.0	40.0	74.0	54.0	-23.0	-14.0	104	78

Linkou EMC Lab: 47 14th Lin, Chiapao Tsuen, Linkou, Taipei, Taiwan, R.O.C. Tel (02) 2605-2180 Fax (02) 2605-2943  
 Hsinchu EMC Lab: 81-1 Lullaokeng, 9th Lin, Wulung Tsuen, Chiunglin, Hsinchu, Taiwan, R.O.C. Tel (03) 593-5343 Fax (03) 593-5342

Brand / Model : CWR-854  
 Remark : Tx Mode , 11g Ch01 , Power Set 90  
 Tested by : Wen

Location: Open Site C

Date: 2004/5/4


Time: 下午 10:18

Approved by: 鍾昆宏

Temperature (C): 28.0

Humidity (%): 60

Polarity: Vertical

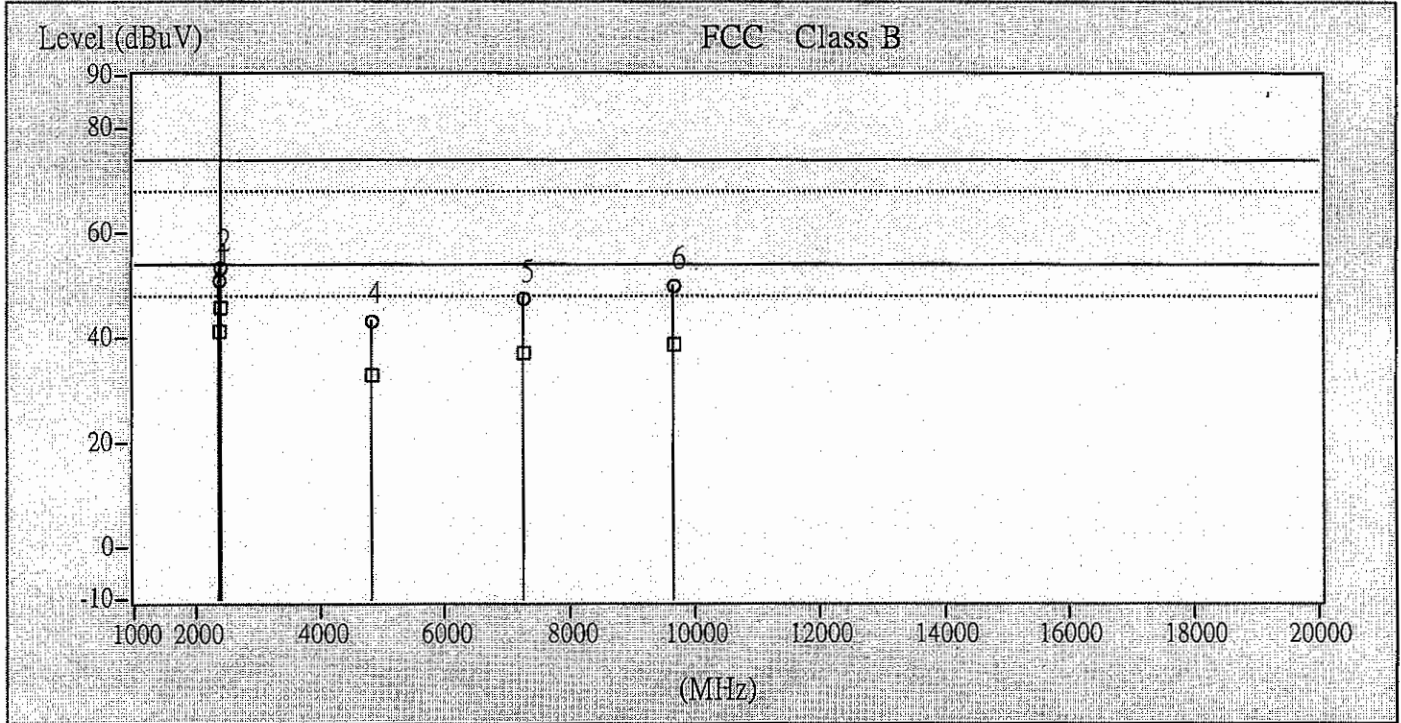

This data is for evaluation purposes only. It cannot be used for EMC approvals unless it contains the approved signature.

If you have any questions regarding the test data, you can write your comments to [service@mail.adt.com.tw](mailto:service@mail.adt.com.tw)

No.	Freq. MHz	C.F. dB	Reading		Emission		Limit		Margin		Ant./Table	
			PK	AV	PK	AV	PK	AV	PK	AV	cm	deg
1	2376.00	30.7	20.4	10.8	51.1	41.5	74.0	54.0	-22.9	-12.5	120	1
2	2390.00	33.8	19.7	12.2	53.5	46.0	74.0	54.0	-20.5	-8.0	116	338
*F 3	2412.00	29.9	75.1	67.6	105.0	97.5	74.0	54.0	31.0	43.5	116	338
4	4824.00	36.2	7.1	-3.1	43.4	33.1	74.0	54.0	-30.6	-20.9	138	336
5	7236.00	41.7	6.0	-4.4	47.7	37.3	74.0	54.0	-26.3	-16.7	121	194
6	9648.00	44.9	5.1	-6.0	50.0	39.0	74.0	54.0	-24.0	-15.0	111	111







