



EMC

TEST REPORT

REPORT NO. : F89080502

MODEL NO. : 558X

DATE OF TEST : Aug. 17, 2000

PREPARED FOR: PROVIEW ELECTRONICS (TAIWAN) CO. LTD.

ADDRESS : 6F, NO. 1, PAU-SHENG RD., YUNG-HO CITY,
TAIPEI HSIEN, TAIWAN, R.O.C.

PREPARED BY: ADVANCE DATA TECHNOLOGY CORPORATION



Accredited Laboratory

11F, NO.1, SEC.4, NAN-KING EAST RD.,
TAIPEI, TAIWAN, R.O.C.

This test report consists of 15 pages in total. It may be duplicated completely for legal use with the allowance of the applicant. It shall not be reproduced except in full, without the written approval of our laboratory. It should not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. government. The test result in the report only applies to the tested sample.



TABLE OF CONTENTS

1. CERTIFICATION	3
2. GENERAL INFORMATION.....	4
2.1 GENERAL DESCRIPTION OF EUT	4
2.2 DESCRIPTION OF SUPPORT UNITS	5
2.3 TEST METHODOLOGY AND CONFIGURATION	5
3. TEST INSTRUMENTS	6
3.1 TEST INSTRUMENTS (EMISSION)	6
3.2 LIMITS OF CONDUCTED AND RADIATED EMISSION.....	7
4. TEST RESULTS (EMISSION).....	8
4.1 RADIO DISTURBANCE	8
4.2 EUT OPERATION CONDITION.....	8
4.3 TEST DATA OF CONDUCTED EMISSION	9
4.4 TEST DATA OF RADIATED EMISSION	11
5. PHOTOGRAPHS OF THE TEST CONFIGURATION WITH MINIMUM MARGIN	13
6. APPENDIX - INFORMATION OF THE TESTING LABORATORY.....	15


**1. CERTIFICATION**


Issue Date: Aug. 24, 2000


Product : COLOR MONITOR
Trade Name : PROVIEW
Model No. : 558X
Applicant : PROVIEW ELECTRONICS (TAIWAN) CO. LTD.
Standard : FCC Part 15, Subpart B, Class B
CISPR 22: 1993+A1: 1995+A2: 1996, Class B
ANSI C63.4-1992

We hereby certify that one sample of the designation has been tested in our facility on Aug. 17, 2000. The test record, data evaluation and Equipment Under Test (EUT) configurations represent herein are true and accurate representation of the measurements of the sample's EMC characteristics under the conditions herein specified.

The test results show that the EUT as described in this report is in compliance with the Class B limits of conducted and radiated emission of applicable standards.

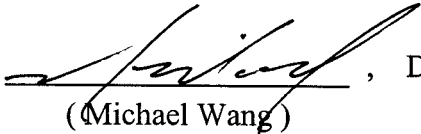TESTED BY : , DATE: 8/24/2000
(Michael Wang)

CHECKED BY : , DATE: 8/24/2000
(Yemmy Soong)

APPROVED BY : , DATE: 8/24/2000
(Mike Su)

ADVANCE DATA TECHNOLOGY CORPORATION**NVLAP[®]**

Accredited Laboratory



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Product	:	COLOR MONITOR
Model No.	:	558X
Power Supply Type	:	Switching
Power Cord of monitor	:	Nonshielded (1.8m)
Data Cable of monitor	:	Shielded (1.5m)
Power Cord of speaker	:	Nonshielded (0.2m)
Audio cable to PC	:	Nonshielded (1.8m)
Audio cable to monitor	:	Nonshielded 2x (0.2m)

Note: The EUT is a 15" COLOR MONITOR with a set of external speaker. The EUT has a resolution up to 1024 x 768.

The "X" in model: 558X could be defined as A~Z, 0~9 or blank according to different customer's requirement.

There is a ferrite core on the video cable outside the monitor.

For more detailed features description, please refer to manufacturer's specification or User's Manual.



2.2 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories are used to form representative test configuration during the tests.

No.	Product	Brand	Model No.	Serial No.	FCC ID.
1	PERSONAL COMPUTER	NTI	PIII450MT	P201146	FCC DoC APPROVED
2	PRINTER	HP	2225C+	3208S05355	DSI6XU2225
3	PS/2 KEYBOARD	FORWARD	FDA-104GA	FDKB8110119	F4ZDA-104G
4	MODEM	ACEEX	1414	980020510	IFAXDM1414
5	MOUSE	LOGITECH	M-S43	LZE000703132	DZL211106
6	SPEAKER	Audio-Technica	AT-SP25	96-M-15357-T	NA
7	EARPHONE	KOKA	ST-8	H201039	NA
8	VGA CARD	CARDEX	CD-GX2A44T	GHF11905	ICUVGA-GW710

No.	Signal cable description
1	NA
2	1.2m braid shielded wire, terminated with DB25 and Centronic connector via metallic frame, w/o core.
3	1.5 m foil shielded wire, terminated with PS/2 connector via metallic frame, w/o core.
4	1.2 m braid shielded wire, terminated with DB25 and DB9 connector via metallic frame, w/o core.
5	1.5 m foil shielded wire, terminated with PS2 connector via drain wire, w/o core.
6	1.5 m wrapped shielded wire, terminated via drain wire, with 3.5 mm phone plug , w/o core.
7	1.8 m wrapped shielded wire, terminated with 3.5mm phone plug via drain wire, w/o core.
8	NA

Note: 1. All power cords of the above support units are non-shielded (1.8m).

2. A microphone cable (1.8m) was connected between the EUT and PC.

2.3 TEST METHODOLOGY AND CONFIGURATION

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4: 1992. Radiated testing was performed at an antenna to EUT distance of 10 m on an open area test site.

Please refer to the photos of test configuration in Item 5.



3. TEST INSTRUMENTS

3.1 TEST INSTRUMENTS (EMISSION)

CONDUCTED EMISSION MEASUREMENT

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
ROHDE & SCHWARZ Test Receiver	ESHS30	828109/007	July 6, 2001
ROHDE & SCHWARZ Artificial Mains Network	ESH3-Z5	839135/006	July 9, 2001
ROHDE & SCHWARZ 4-wire ISN	ENY41	835154/007	Apr. 26, 2001
EMCO-L.I.S.N.	3825/2	9204-1964	July 9, 2001
Shielded Room	Site 2	ADT-C02	NA

- Note: 1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

RADIATED EMISSION MEASUREMENT

Description & Manufacturer	Model No.	Serial No.	Calibrated until
HP Spectrum Analyzer	8590L	3544A00941	Dec. 05, 2000
HP Pre-Amplifier	8447D	2944A08312	Sept. 7, 2000
HP Preamplifier	8347A	3307A01088	Aug. 30, 2000
HP Preamplifier	8449B	3008A01201	Dec. 14, 2000
R&S Receiver	ESVS10	844594/010	Sept. 29, 2000
SCHWARZBECK Tunable Dipole Antenna	VHA 9103 UHA 9105	E101051 E101055	Nov. 23, 2000
ROHDE & SCHWARZ TEST RECEIVER	ESMI	839013/007 839379/002	Aug. 30, 2000
CHASE BILOG Antenna	CBL6111A	1500	Aug. 30, 2000
EMCO Double Ridged Guide Antenna	3115	9312-4192	March 29, 2001
EMCO Turn Table	1060-04	1196	NA
EMCO Tower	1051	1264	NA
Open Field Test Site	Site 1	ADT-R01	Aug. 27, 2000

- Note: 1. The measurement uncertainty is less than +/- 3.0dB, which is calculated as per NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.



3.2 LIMITS OF CONDUCTED AND RADIATED EMISSION

LIMIT OF RADIATED EMISSION OF CISPR 22

FREQUENCY (MHz)	Class A (at 10m) *	Class B (at 10m) *
	dBuV/m	dBuV/m
30 - 230	40	30
230 - 1000	47	37

* Detector Function: Quasi-Peak

LIMIT OF RADIATED EMISSION OF FCC PART 15, SUBPART B FOR FREQUENCY ABOVE 1000 MHz

FREQUENCY (MHz)	Class A (dBuV/m) (at 3m)		Class B (dBuV/m) (at 3m)	
	Peak	Average	Peak	Average
Above 1000	80.0	60.0	74.0	54.0

Note: (1) The lower limit shall apply at the transition frequencies.

(2) Emission level (dBuV/m) = 20 log Emission level (uV/m).

(3) All emanation from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

LIMIT OF CONDUCTED EMISSION OF CISPR 22

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 - 56	56 - 46
0.50 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

Note: (1) The lower limit shall apply at the transition frequencies.

(2) The limit decreases linearly with the logarithm of the frequency in the range 0.15 to 0.50 MHz

(3) All emanation from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.



4. TEST RESULTS (EMISSION)

4.1 RADIO DISTURBANCE

Frequency Range	:	0.15 - 30 MHz (Conducted Emission) 30 - 1000 MHz (Radiated Emission)
Input Voltage	:	120 Vac, 60 Hz
Temperature	:	26 degree C
Humidity	:	65 %
Atmospheric Pressure	:	999 mbar

TEST RESULT	Remarks
PASS	Minimum passing margin of conducted emission: -6.7 dB at 0.192 MHz Minimum passing margin of radiated emission: -3.1 dB at 61.61 MHz

Note: The EUT was pre-tested under the following resolution & horizontal synchronization speed mode:

- ♦ 1024x768 (48 kHz)
- ♦ 800x600 (54 kHz)
- ♦ 640x480 (31.5 kHz)

The worst emission levels were found under 1024x768 (48 kHz) and therefore test data of this mode is recorded.

4.2 EUT OPERATION CONDITION

1. Turn on the power of all equipment.
2. PC runs a test program to enable all functions.
3. PC reads and writes messages from FDD and HDD.
4. PC sends "H" messages to monitor (EUT) and monitor displays "H" patterns on screen.
5. PC sends "H" messages to modem.
6. PC sends "H" messages to printer, and the printer prints them on paper.
7. PC sends audio messages to speakers or earphone.
8. Repeat steps 3-8.



4.3 TEST DATA OF CONDUCTED EMISSION

EUT: COLOR MONITORMODEL: 558XMODE: 1024x768 (48 kHz)6 dB Bandwidth: 10 kHzPHASE: LINE (L)

Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
[MHz]	Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
0.192	0.2	53.7	47.0	53.9	47.2	63.9	53.9	-10.0	-6.7
0.243	0.2	40.9	-	41.1	-	62.0	52.0	-20.9	-
0.822	0.2	36.3	-	36.5	-	56.0	46.0	-19.5	-
1.452	0.2	34.4	-	34.6	-	56.0	46.0	-21.4	-
8.048	0.6	36.4	-	37.0	-	60.0	50.0	-23.0	-
18.321	1.1	37.2	-	38.3	-	60.0	50.0	-21.7	-

- Remarks:
1. "*": Undetectable
 2. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 3. "-": The Quasi-peak emission level also meets average limit and measurement with the average detector is unnecessary.
 4. The emission levels of other frequencies were very low against the limit.
 5. Margin value = Emission level - Limit value
 6. Emission Level = Correction Factor + Reading Value.



TEST DATA OF CONDUCTED EMISSION

EUT: COLOR MONITORMODEL: 558XMODE: 1024x768 (48 kHz)6 dB Bandwidth: 10 kHzPHASE: NEUTRAL (N)

Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
[MHz]	Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
0.192	0.2	53.5	46.4	53.7	46.6	63.9	53.9	-10.2	-7.3
0.243	0.2	38.9	-	39.1	-	62.0	52.0	-22.9	-
0.822	0.2	37.0	-	37.2	-	56.0	46.0	-18.8	-
1.452	0.2	33.3	-	33.5	-	56.0	46.0	-22.5	-
8.048	0.5	35.7	-	36.2	-	60.0	50.0	-23.8	-
18.321	1.0	33.4	-	34.4	-	60.0	50.0	-25.6	-

- Remarks:
1. "*": Undetectable
 2. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 3. "-": The Quasi-peak emission level also meets average limit and measurement with the average detector is unnecessary.
 4. The emission levels of other frequencies were very low against the limit.
 5. Margin value = Emission level - Limit value
 6. Emission Level = Correction Factor + Reading Value.



4.4 TEST DATA OF RADIATED EMISSION

EUT: COLOR MONITORMODEL: 558XMODE: 1024x768 (48 kHz)ANT. POLARITY: HorizontalDETECTOR FUNCTION: Quasi-peak6 dB BANDWIDTH: 120 kHzFREQUENCY RANGE: 30-1000 MHzMEASURED DISTANCE: 10 M

Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
75.79	7.6	15.7	23.3	30.0	-6.7	400	125
149.95	12.4	4.4	16.8	30.0	-13.2	400	156
188.95	10.3	7.7	18.0	30.0	-12.0	400	265
195.35	10.1	7.7	17.8	30.0	-12.2	400	246
208.26	10.5	6.2	16.7	30.0	-13.3	400	274
214.97	11.0	7.7	18.7	30.0	-11.3	400	88

- REMARKS:
1. Emission level (dBuV/m) = Correction Factor (dB)
+ Reading value (dBuV).
 2. Correction Factor (dB) = Ant. Factor (dB)+Cable loss (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level - Limit value



TEST DATA OF RADIATED EMISSION

EUT: COLOR MONITORMODEL: 558XMODE: 1024x768 (48 kHz)ANT. POLARITY: VerticalDETECTOR FUNCTION: Quasi-peak6 dB BANDWIDTH: 120 kHzFREQUENCY RANGE: 30-1000 MHzMEASURED DISTANCE: 10 M

Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
61.61	6.8	20.1	26.9	30.0	-3.1	100	281
76.91	7.9	15.6	23.5	30.0	-6.5	100	300
82.78	8.9	17.2	26.1	30.0	-3.9	126	254
133.42	13.0	6.1	19.1	30.0	-10.9	100	52
195.39	10.1	10.0	20.1	30.0	-9.9	100	188
208.50	10.5	8.1	18.6	30.0	-11.4	100	175
215.00	11.0	7.8	18.8	30.0	-11.2	100	148
221.49	11.5	6.3	17.8	30.0	-12.2	100	154

- REMARKS:
1. Emission level (dBuV/m) = Correction Factor (dB)
+ Reading value (dBuV).
 2. Correction Factor (dB) = Ant. Factor (dB)+Cable loss (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level - Limit value




5. PHOTOGRAPHS OF THE TEST CONFIGURATION WITH MINIMUM MARGIN

CONDUCTED EMISSION TEST



RADIATED EMISSION TEST

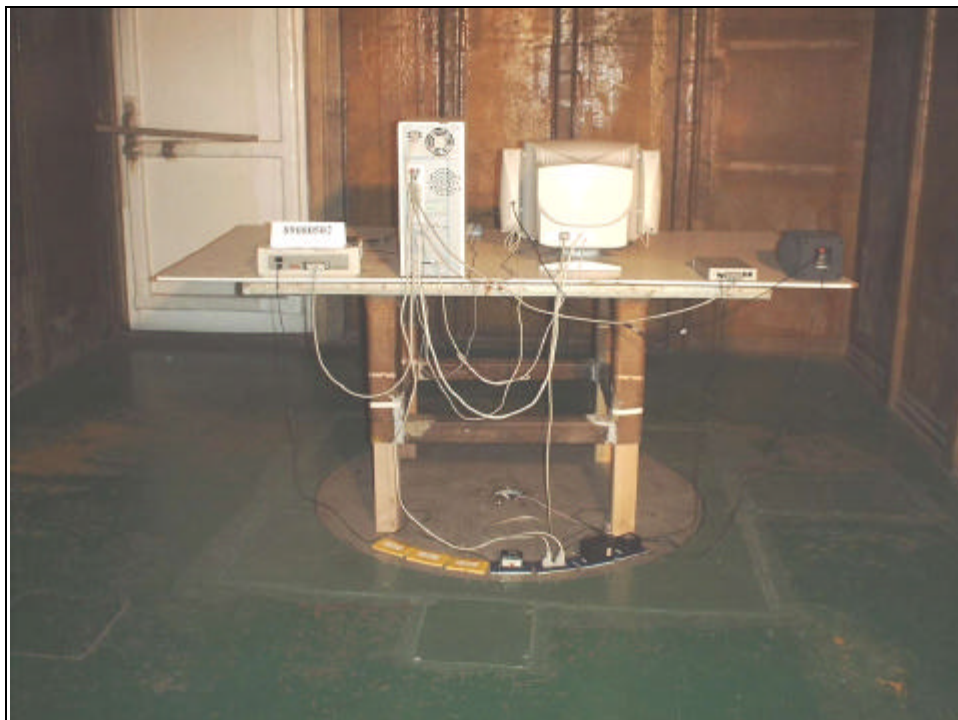



6. APPENDIX - INFORMATION OF THE TESTING LABORATORY

Information of the testing laboratory

We, ADT Corp., are founded in 1988, to provide our best service in EMC and Safety consultation. Our laboratory is accredited by the following approval agencies according to ISO/IEC Guide 25 or EN 45001:

- | | |
|---------------|--------------------------------------|
| ● USA | FCC, UL, NVLAP |
| ● Germany | TUV Rheinland
TUV Product Service |
| ● Japan | VCCI |
| ● New Zealand | RFS |
| ● Norway | NEMKO, DNV |
| ● U.K. | INCHCAPE |
| ● R.O.C. | BSMI |

Enclosed please find some certificates of our laboratory obtained from approval agencies. If you have any comments, please feel free to contact us with the following:

Lin Kou EMC Lab.:
Tel: 886-2-26032180
Fax: 886-2-26022943

Hsin Chu EMC Lab:
Tel: 886-35-935343
Fax: 886-35-935342

Lin Kou Safety Lab.:
Tel: 886-2-26093195
Fax: 886-2-26093184

Design Center:
Tel: 886-2-26093195
Fax: 886-2-26093184

E-mail: service@mail.adt.com.tw
<http://www.adt.com.tw>