



NVLAP LAB CODE 200707-0



FCC PART 15.247

EMI MEASUREMENT AND TEST REPORT

For

Scosche Industries, Inc.

P.O. Box 2901 Oxnard, CA 93034

FCC ID: IKQBTRNS03

This Report Concerns: <input checked="" type="checkbox"/> Original Report	Equipment Type: Bottom Dock Bluetooth Transmitter for iPod
Test Engineer: Lisa Zhu <i>Lisa Zhu</i> Henry Yang <i>Henry Yang</i>	
Report No.: R0611156	
Test Date: 2006-12-04 to 2007-02-15	
Report Date: 2007-02-15	
Reviewed By: Bonni Baniqued: EMC Manager <i>Bonni Baniqued</i>	
Prepared By: Bay Area Compliance Laboratory Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008	

Note: This test report is for the customer shown above and their specific product only. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratory Corp. (Shenzhen). This report **must not** be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the U.S. Government.

TABLE OF CONTENTS

GENERAL INFORMATION.....4

 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)4

 OBJECTIVE4

 RELATED SUBMITTAL(S)/GRANT(S).....4

 TEST METHODOLOGY4

 TEST FACILITY4

 HOST SYSTEM CONFIGURATION LIST AND DETAILS5

 LOCAL SUPPORT EQUIPMENT LIST AND DETAILS5

 EXTERNAL I/O CABLE.....5

SYSTEM TEST CONFIGURATION.....6

 DESCRIPTION OF TEST CONFIGURATION6

 EUT EXERCISE SOFTWARE6

 SPECIAL ACCESSORIES6

 EQUIPMENT MODIFICATIONS6

 CONFIGURATION OF TEST SETUP7

 BLOCK DIAGRAM OF TEST SETUP7

SUMMARY OF TEST RESULTS8

§15.247(b) - RF EXPOSURE9

 LIMIT9

§15.203 - ANTENNA REQUIREMENT.....10

 STANDARD APPLICABLE10

 ANTENNA CONNECTOR CONSTRUCTION10

§15.207 (a) - CONDUCTED EMISSIONS.....11

 MEASUREMENT UNCERTAINTY11

 EUT SETUP11

 EMI TEST RECEIVER SETUP12

 TEST EQUIPMENT LIST AND DETAILS12

 TEST PROCEDURE12

 TEST RESULTS SUMMARY12

 TEST DATA13

 PLOT(S) OF TEST DATA13

§15.205, §15.209, §15.247 - RADIATED EMISSIONS.....16

 APPLICABLE STANDARD16

 MEASUREMENT UNCERTAINTY16

 EUT SETUP16

 EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP17

 TEST EQUIPMENT LIST AND DETAILS17

 TEST PROCEDURE17

 CORRECTED AMPLITUDE & MARGIN CALCULATION17

 TEST RESULTS SUMMARY18

 TEST DATA18

§15.247(a) (1)-CHANNEL SEPARATION TEST21

 APPLICABLE STANDARD21

 TEST EQUIPMENT LIST AND DETAILS21

 TEST PROCEDURE21

 TEST DATA21

§15.247(a) (1) –20dB BANDWIDTH TESTING25

 APPLICABLE STANDARD25

 TEST EQUIPMENT LIST AND DETAILS25

 TEST PROCEDURE25

 TEST DATA25

§15.247(a) (1) (iii)-NUMBER OF HOPPING CHANNEL TEST.....29
APPLICABLE STANDARD29
TEST EQUIPMENT LIST AND DETAILS.....29
TEST PROCEDURE29
TEST DATA29

§15.247(a) (1) (iii) -TIME OF OCCUPANCY (DWELL TIME).....31
APPLICABLE STANDARD31
TEST EQUIPMENT LIST AND DETAILS.....31
TEST PROCEDURE31
TEST DATA31

§15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT.....38
APPLICABLE STANDARD38
TEST EQUIPMENT LIST AND DETAILS.....38
TEST PROCEDURE38
TEST DATA38

§15.247(d) - BAND EDGES TESTING.....43
APPLICABLE STANDARD43
TEST EQUIPMENT LIST AND DETAILS.....43
TEST PROCEDURE43
TEST DATA44

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *Scosche Industries, Inc.*'s product, model number: *IPBTT* or the "EUT" as referred to in this report is a Bottom Dock Bluetooth Transmitter for iPod, which measures approximately: 4.0 cm L x 2.8 cm W x 1.2 cm H, rated input voltage: 3.7V Battery.

** The test data gathered are from production sample, serial number: 061115. Provided by the manufacturer, we receive the EUT on 2006-11-15.*

Objective

This Type approval report is prepared on behalf of *Scosche Industries, Inc.* in accordance with Part 2, Subpart J, Part 15, Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

No related submittal(s).

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed and Bay Area Compliance Laboratory Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Test Facility

The Test site used by Bay Area Compliance Laboratory Corp. (Shenzhen) to collect radiated and conducted emission measurement data is located in the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratory Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on November 04, 2004. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179 and Industrial Canada registration test site No.: 5500A. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratory Corp. (Shenzhen) is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program (Lab Code 200707-0). The current scope of accreditations can be found at <http://ts.nist.gov/ts/htdocs/210/214/scopes/2007070.htm>

Host System Configuration List and Details

Manufacturer	Description	Model	Serial Number	FCC ID
DELL	Motherboard	OWC297	CN-OWC297-70821-564-00NI	DoC
DELL	Power	NPS-250KB D	CN-0H2678-17972-56E-80BM	DoC
Seagate	Hard Disk	ST340014A	5JXK3GXE	DoC
DELL	3.5' Floppy	NA	CN-0N8893-69802-54Q-02P0	DoC
Lite-ON	CD-Rom	LTN-489S	NA	DoC
Intel	Ethernet	PRO 10/100 VE	NA	DoC

Local Support Equipment List and Details

Manufacturer	Description	Model	Serial Number	FCC ID
DELL	PC	DELL 170L	CN-0TC670-70821-560-F4Q6	DoC
DELL	Keyboard	SK-8110	CN07N244-71616-56A-1B1E	DoC
DELL	Mouse	M071KC	520027907	DoC
DELL	LCD Monitor	1505FP	Y4287-7168-571-GBSH	DoC
ProMOS	Memory	V826632K24SATG-C0	0525-K1933700	DoC
Intel	CPU	Celeron D-2533	NA	DoC

External I/O Cable

Cable Description	Length (m)	From/Port	To
Shielded Detachable Keyboard Cable	1.50	Keyboard Port / Host	Keyboard
Shielded Detachable Mouse Cable	1.50	PS/2 Port / Host	Mouse
Shielded Detachable data Cable	0.23	EUT	Control Unit

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing with additional control unit as shown on the configuration of test setup on page 7.

EUT Exercise Software

The exercise software is available.


Special Accessories

The special Accessories were provided by Bay Area Compliance Laboratory Corp. (Shenzhen).
The control unit was provided by manufacturer.


Equipment Modifications

Bay Area Compliance Laboratory Corp. (Shenzhen) has not done any modification on the EUT.

Configuration of Test Setup

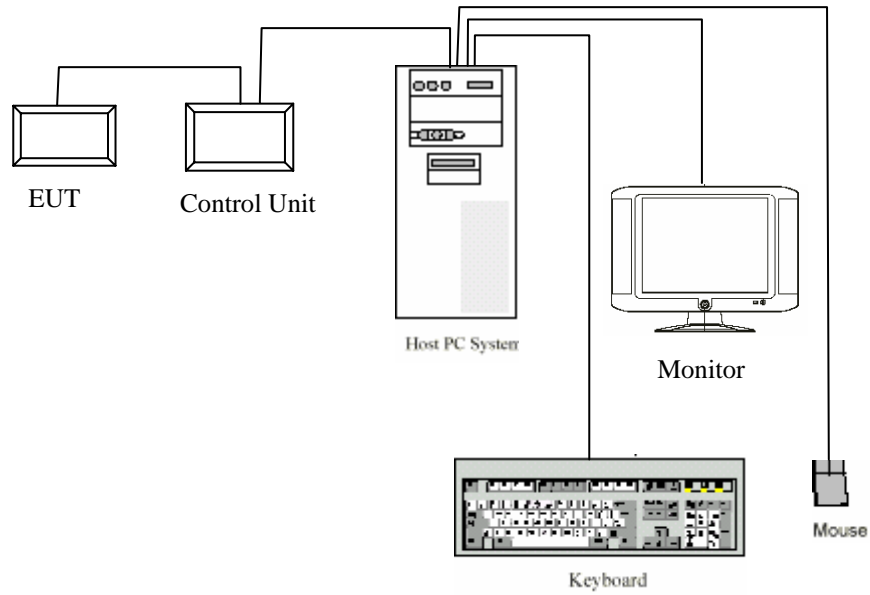

Block Diagram of Test Setup

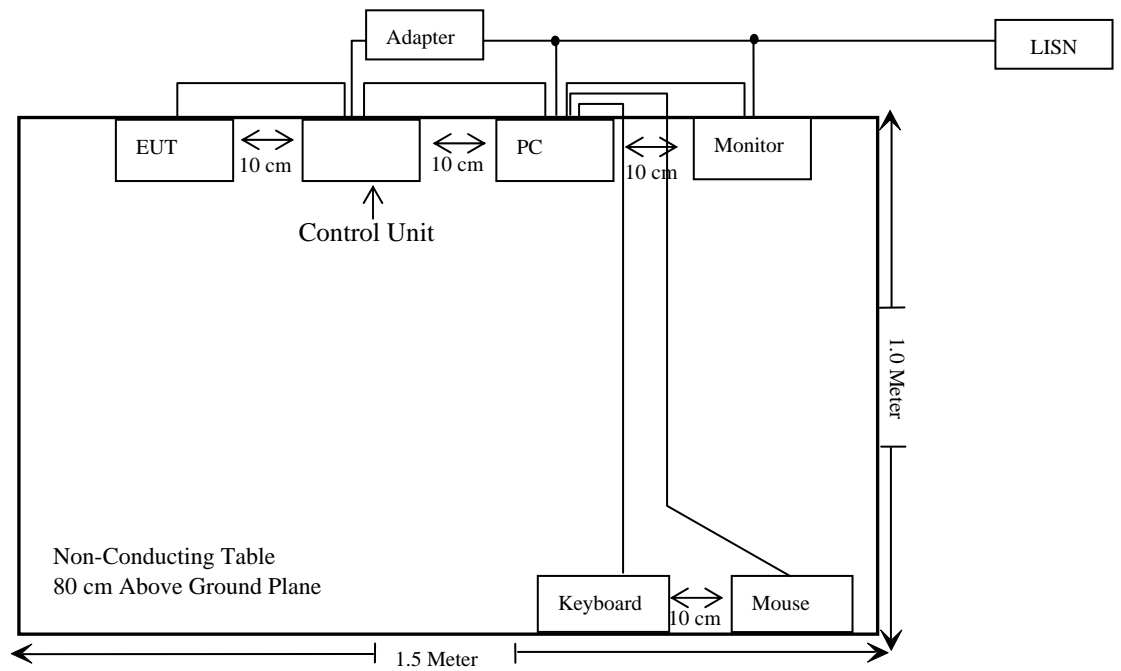

SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.207 (a)	Conducted Emission	Compliant
§15.247 (b)	RF Exposure	Compliant
§15.203	Antenna Requirement	Compliant
§15.205	Restricted Band	Compliant
§15.205, §15.209, §15.247(d)	Radiated Emission	Compliant
§15.247 (a)(1)	20 dB Bandwidth	Compliant
§15.247(a)(1)	Channel Separation Test	Compliant
§15.247(a)(1)(iii)	Time of occupancy (Dwell Time)	Compliant
§15.247(a)(1)(iii)	Number of hopping channel	Compliant
§15.247(b)(1)	Peak Output Power Measurement	Compliant
§15.247(d)	Band edges testing	Compliant

§15.247(b) - RF EXPOSURE

Limit

According to §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Since the output power of this device was so low (0.00128 Watts), it met the RF Exposure Requirement.

§15.203 - ANTENNA REQUIREMENT

Standard Applicable

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Connector Construction

The EUT has an integral antenna which, in accordance to the above sections, is considered sufficient to comply with the provisions of these sections. Please see EUT photo for details.


§15.207 (a) - CONDUCTED EMISSIONS

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, and LISN.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement at Bay Area Compliance Laboratory Corp. (Shenzhen) is ± 2.4 dB.

EUT Setup

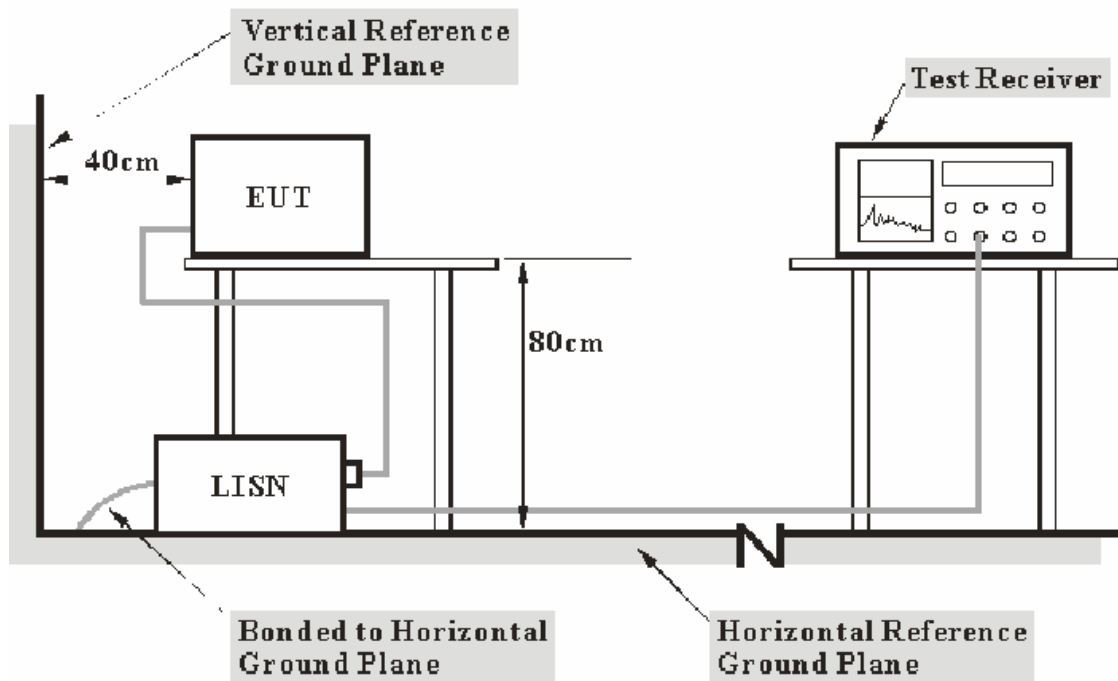

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15 Class B limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

<i>Frequency Range</i>	<i>IF B/W</i>
150 kHz – 30 MHz	9 kHz

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100028	2005-08-17	2006-08-17
Rohde & Schwarz	L.I.S.N.	ESH2-Z5	892107/021	2006-03-01	2007-03-01

* Com-Power's LISN were used as the supporting equipment.

* **Statement of Traceability:** Bay Area Compliance Laboratory Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

During the conducted emission test, the adapter connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, with the worst margin reading of:

3.50 dB at 2.175 MHz in the **Neutral** conductor mode.

Test Data**Environmental Conditions**

Temperature:	22 ° C
Relative Humidity:	55%
ATM Pressure:	1000mbar

The testing was performed by Henry Yang on 2007-02-15.

Test Mode: Charging


LINE CONDUCTED EMISSIONS				FCC PART 15 CLASS B	
Frequency (MHz)	Amplitude (dB μ V)	Detector QP/AV	Phase Live/Neutral	Limit (dB μ V)	Margin (dB)
2.175	42.50	AV	Neutral	46.00	3.50
2.570	42.20	AV	Neutral	46.00	3.80
2.965	40.80	AV	Neutral	46.00	5.20
2.075	39.70	AV	Neutral	46.00	6.30
1.780	38.80	AV	Neutral	46.00	7.20
1.780	38.80	AV	Live	46.00	7.20
1.875	38.20	AV	Live	46.00	7.80
1.875	37.50	AV	Neutral	46.00	8.50
2.175	37.30	AV	Live	46.00	8.70
2.075	34.90	AV	Live	46.00	11.10
2.270	34.90	AV	Live	46.00	11.10
2.175	44.20	QP	Neutral	56.00	11.80
2.570	44.20	QP	Neutral	56.00	11.80
1.780	43.90	QP	Live	56.00	12.10
2.965	42.80	QP	Neutral	56.00	13.20
2.075	42.60	QP	Neutral	56.00	13.40
1.365	32.60	AV	Live	46.00	13.40
1.780	42.40	QP	Neutral	56.00	13.60
1.875	42.10	QP	Neutral	56.00	13.90
1.875	41.40	QP	Live	56.00	14.60
2.075	39.80	QP	Live	56.00	16.20
2.175	39.80	QP	Live	56.00	16.20
1.365	39.40	QP	Live	56.00	16.60
2.270	37.50	QP	Live	56.00	18.50

Plot(s) of Test Data

Plot(s) of Test Data is presented hereinafter as reference.


Conduction Disturbance Test FCC Part 15

EUT: Ipod Bluetooth Transmitter
Manuf: Scosche
Op Cond: Charging
Operator: Henry-yang
Test Spec: AC 120V/60Hz N
Comment: Temp:25°C Humi:56%
Date: 15. Feb 07 13:33

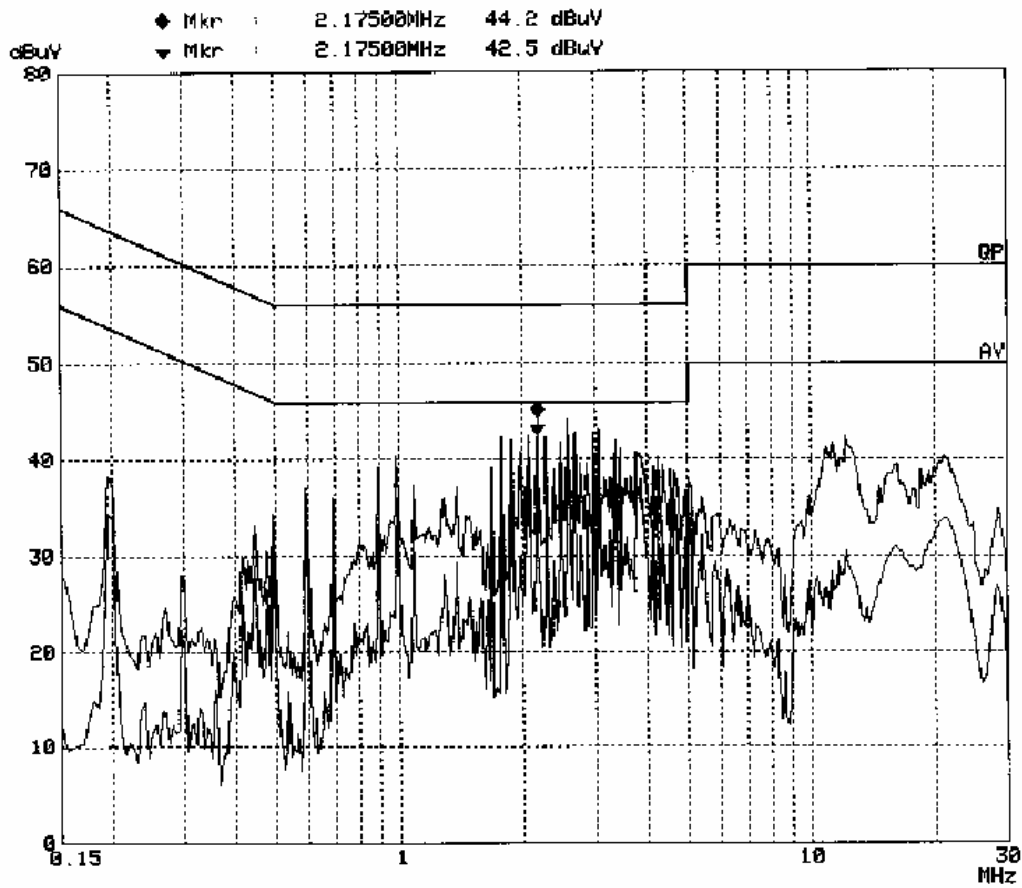

Conduction Disturbance Test FCC Part 15

EUT: Ipod Bluetooth Transmitter
Manuf: Scosche
Op Cond: Charging
Operator: Henry.yang
Test Spec: AC 120V/60Hz L
Comment: Temp: 25°C Humi: 56%
Date: 15. Feb 07 13:06

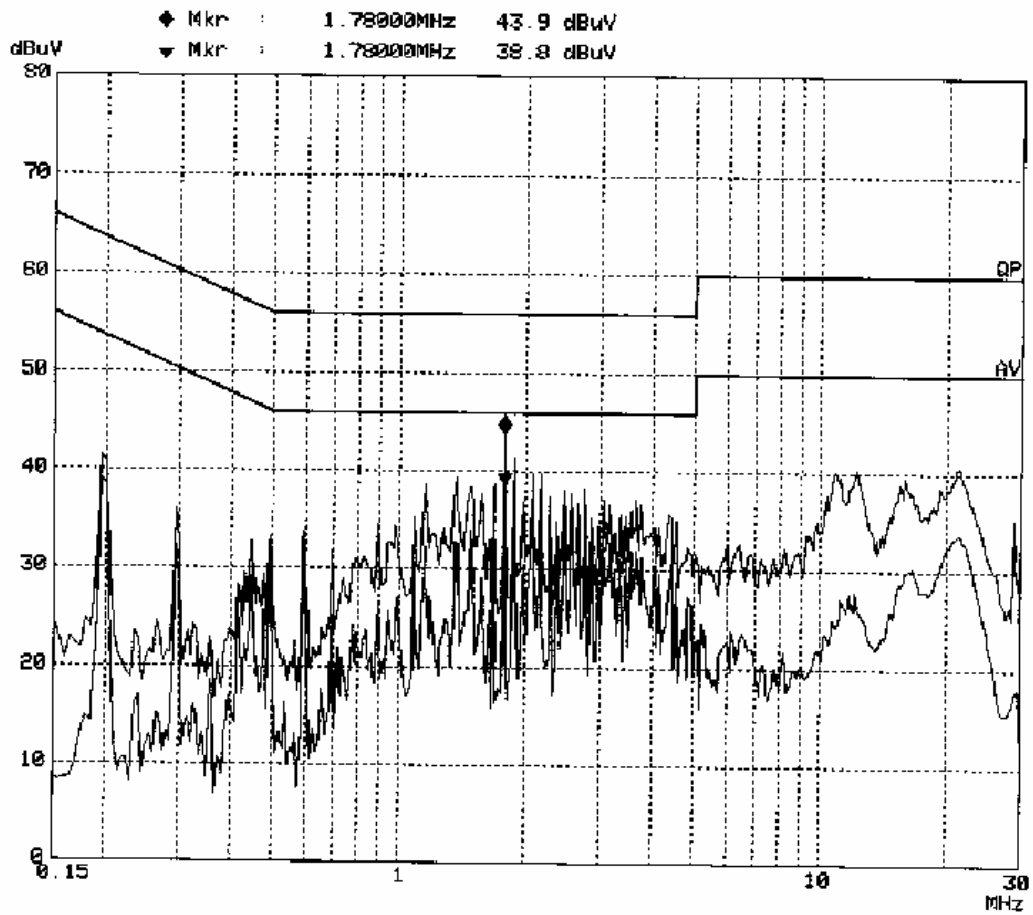

§15.205, §15.209, §15.247 - RADIATED EMISSIONS

Applicable Standard


According to FCC §15.247 (d)

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at Bay Area Compliance Laboratory Corp. (Shenzhen) is ± 4.0 dB.

EUT Setup

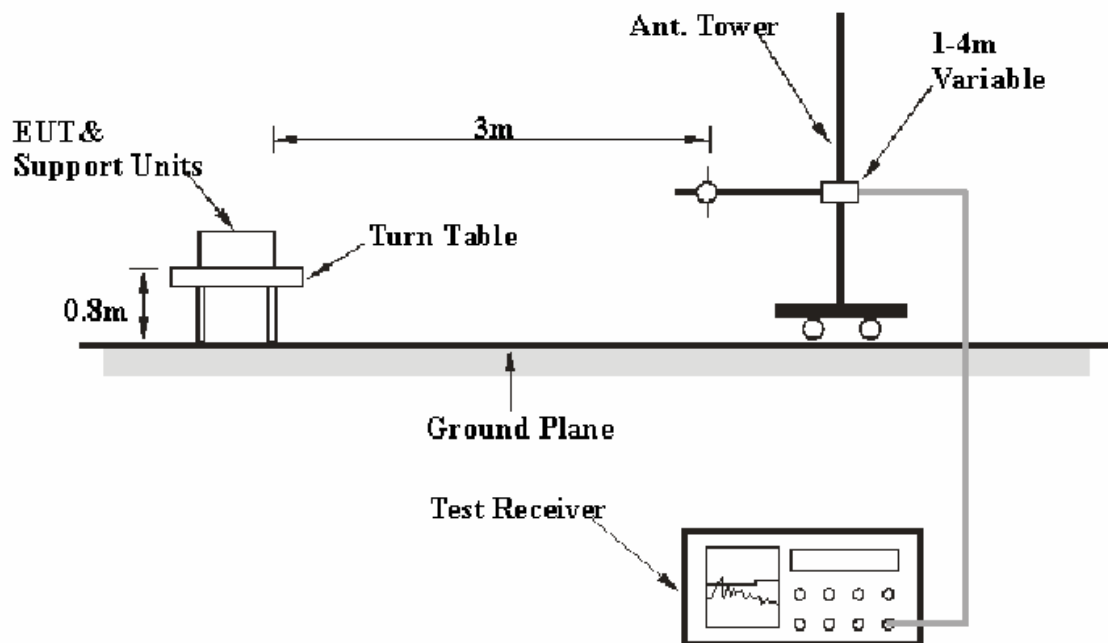

The radiated emission tests were performed in the 3-meter Chamber, using the setup accordance with the ANSI C63.4-2003. The specification used was the FCC 15.209 and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

<i>Frequency Range</i>	<i>RBW</i>	<i>Video B/W</i>
30MHz – 1000 MHz	100 kHz	300 kHz
1000 MHz – 25 GHz	1 MHz	3 MHz

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Amplifier	HP8447D	2944A09795	2006-11-15	2007-11-15
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2006-09-29	2007-09-29
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2006-08-14	2007-08-14
HP	Amplifier	8449B	3008A00277	2006-09-29	2007-09-29
Sunol Sciences	Horn Antenna	DRH-118	A052604	2006-09-25	2007-09-25
Agilent	Spectrum Analyzer	8564E	3943A01781	2006-11-22	2007-11-22

* **Statement of Traceability:** Bay Area Compliance Laboratory Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

For the radiated emissions test, the adapter was connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All data was recorded in the PK&AV detection mode.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Loss and Cable Loss, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Meter Reading} + \text{Antenna Loss} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corr. Ampl.}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15 Subpart C, section 15.205, 15.209, and 15.247, with the worst margin reading of:

- 8.14 dB** at **7206 MHz** in the **Horizontal** polarization, for Low Channel (Above 1 GHz)
- 6.94 dB** at **7323 MHz** in the **Horizontal** polarization, for Middle Channel (Above 1 GHz)
- 7.54 dB** at **7440 MHz** in the **Horizontal** polarization, for High Channel (Above 1 GHz)
- 6.20 dB** at **42.843150MHz** in the **Vertical** polarization for FCC 15.209

Test Data

Environmental Conditions

Temperature:	25 ° C
Relative Humidity:	52%
ATM Pressure:	1009mbar

The testing was performed by Lisa Zhu on 2006-12-04.

Test Mode: Transmitting (Above 1GHz)

Low Channel:

Frequency (MHz)	Meter Reading (dBuV)	Detector PK/QP/AV	Direction Degree	Height (m)	Polar H / V	Antenna Factor (dB/m)	Cable loss (dB)	Amplifier Gain (dB)	Corr. Ampl. (dBuV/m)	FCC Part 15.247		
										Limit (dBuV/m)	Margin (dB)	Remarks
2402	96.83	PK	20.0	1.2	H	30..6	3.61	35.0	96.04			fundamental
2402	96.23	AV	263.0	1.4	H	30.6	3.61	35.0	95.44			fundamental
2402	95.14	PK	18.0	1.6	V	30..6	3.61	35.0	94.35			fundamental
2402	94.38	AV	45.0	1.0	V	30.6	3.61	35.0	93.59			fundamental
7206	35.95	AV	261.0	1.0	H	39.1	4.51	33.7	45.86	54	8.14	harmonic
7206	35.11	AV	90.0	1.2	V	37.8	4.51	33.7	43.72	54	10.28	harmonic
4804	33.55	AV	270.0	1.6	H	36.0	4.64	33.4	40.79	54	13.21	harmonic
4804	32.15	AV	180.0	1.6	V	35.0	4.64	33.4	38.39	54	15.61	harmonic
7206	46.33	PK	180.0	1.3	H	39.1	4.51	33.7	56.24	74	17.76	harmonic
7206	45.83	PK	180.0	1.0	V	37.8	4.51	33.7	54.44	74	19.56	harmonic
4804	44.83	PK	49.0	1.2	H	36.0	4.64	33.4	52.07	74	21.93	harmonic
4804	43.83	PK	250.0	1.0	V	35.0	4.64	33.4	50.07	74	23.93	harmonic

Middle Channel:


Frequency (MHz)	Meter Reading (dBuV)	Detector PK/QP/AV	Direction Degree	Height (m)	Polar H / V	Antenna Factor (dB/m)	Cable loss (dB)	Amplifier Gain (dB)	Corr. Ampl. (dBuV/m)	FCC Part 15.247		
										Limit (dBuV/m)	Margin (dB)	Remarks
2441	94.17	PK	197	1.6	H	30.6	3.61	35	93.38			fundamenta
2441	93.17	AV	197	1.6	H	30.6	3.61	35	92.38			fundamenta
2441	93.47	PK	182	1.2	V	30.6	3.61	35	92.68			fundamenta
2441	92.83	AV	182	1.2	V	30.6	3.61	35	92.04			fundamenta
7323	37.15	AV	45	1.0	H	39.1	4.51	33.7	47.06	54	6.94	harmonic
7323	36.91	AV	90	1.2	V	37.8	4.51	33.7	45.52	54	8.48	harmonic
4882	35.10	AV	109	1.2	H	36.0	4.64	33.4	42.34	54	11.66	harmonic
4882	34.26	AV	180	1.6	V	35.0	4.64	33.4	40.5	54	13.50	harmonic
7323	48.50	PK	180	1.0	H	39.1	4.51	33.7	58.41	74	15.59	harmonic
7323	48.33	PK	90	1.2	V	37.8	4.51	33.7	56.94	74	17.06	harmonic
4882	44.50	PK	109	1.2	H	36.0	4.64	33.4	51.74	74	22.26	harmonic
4882	44.83	PK	45	1.0	V	35.0	4.64	33.4	51.07	74	22.93	harmonic

High Channel:

Frequency (MHz)	Meter Reading (dBuV)	Detector PK/QP/AV	Direction Degree	Height (m)	Polar H / V	Antenna Factor (dB/m)	Cable loss (dB)	Amplifier Gain (dB)	Corr. Ampl. (dBuV/m)	FCC Part 15.247		
										Limit (dBuV/m)	Margin (dB)	Remarks
2480	98.33	PK	197	1.6	H	30..6	3.61	35	97.54			fundamental
2480	97.91	AV	197	1.6	H	30.6	3.61	35	97.12			fundamental
2480	99.33	PK	182	1.2	V	30..6	3.61	35	98.54			fundamental
2480	98.01	AV	182	1.2	V	30.6	3.61	35	98.22			fundamental
7440	36.55	AV	45	1.0	H	39.1	4.51	33.7	46.46	54	7.54	harmonic
7440	36.45	AV	90	1.2	V	37.8	4.51	33.7	45.06	54	8.94	harmonic
4960	34.11	AV	180	1.6	V	35.0	4.64	33.4	40.35	54	13.65	harmonic
4960	32.11	AV	109	1.2	H	36.0	4.64	33.4	39.35	54	14.65	harmonic
7440	47.17	PK	180	1.0	H	39.1	4.51	33.7	57.08	74	16.92	harmonic
7440	47.83	PK	90	1.2	V	37.8	4.51	33.7	56.44	74	17.56	harmonic
4960	43.00	PK	109	1.2	H	36.0	4.64	33.4	50.24	74	23.76	harmonic
4960	43.17	PK	45	1.0	V	35.0	4.64	33.4	49.41	74	24.59	harmonic

Test Mode: Transmitting

Auto Test (FCC Part 15.209)

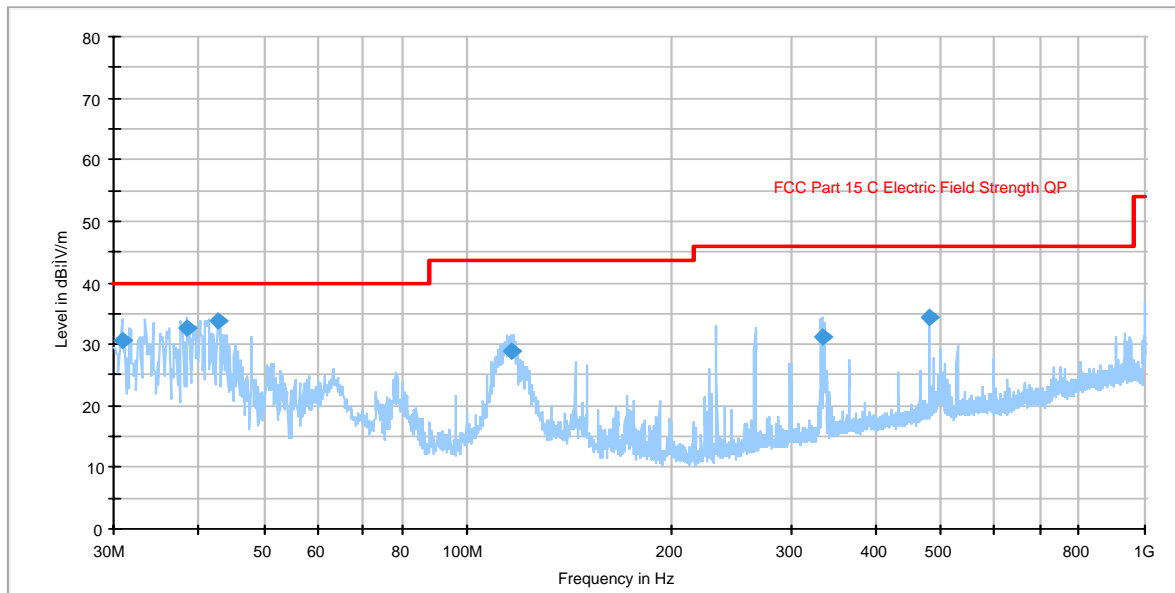

Frequency (MHz)	Quasi Peak (dBµV/m)	Antenna Height (cm)	Polarity	Turntable position (deg)	Corr. (dB)	Limit (dBµV/m)	Margin (dB)
42.843150	33.8	99.0	V	336.0	-14.0	40.0	6.2
38.586500	32.6	123.0	V	223.0	-10.9	40.0	7.4
30.930875	30.7	124.0	V	123.0	-5.5	40.0	9.3
480.039425	34.3	97.0	H	176.0	-5.8	46.0	11.7
115.795050	29.0	126.0	V	60.0	-12.3	43.5	14.5
333.070550	31.3	99.0	H	8.0	-8.5	46.0	14.7

§15.247(a) (1)-CHANNEL SEPARATION TEST

Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde&Schwarz	EMI Test Receiver	ESCI	100035	2006-09-29	2007-09-29

* **Statement of Traceability:** Bay Area Compliance Laboratory Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Set the EUT in transmitting mode, spectrum Bandwidth was set at 100 kHz, maxhold the channel.
2. Set the adjacent channel of the EUT maxhold another truce
3. Measure the channel separation.

Limit

FCC Part 15, Subpart C Section 15.247(a)(1). Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB Bandwidth of the hopping channel, whichever is greater.

FREQUENCY RANGE (MHz)	Limit (kHz)
902-928	>25kHz or the 20dB bandwidth
2400-2483.5	>25kHz or two-thirds of the 20dB bandwidth
5725-5850	>25kHz or the 20dB bandwidth

Test Data

Environmental Conditions

Temperature:	27 °C
Relative Humidity:	50 %
ATM Pressure:	1009 mbar


The testing was performed by Lisa Zhu on 2006-12-13.

Test Result: Pass

Test mode: Transmitting

Channel	Channel Frequency (MHz)	Channel Separation (KHz)	Limit (kHz)	Result
Low Channel	2402	1001.00	182.67	Pass
Adjacency Channel	2403			
Mid Channel	2441	998.50	182.67	Pass
Adjacency Channel	2442			
High Channel	2480	1002.75	185.33	Pass
Adjacency Channel	2479			

Low channel:

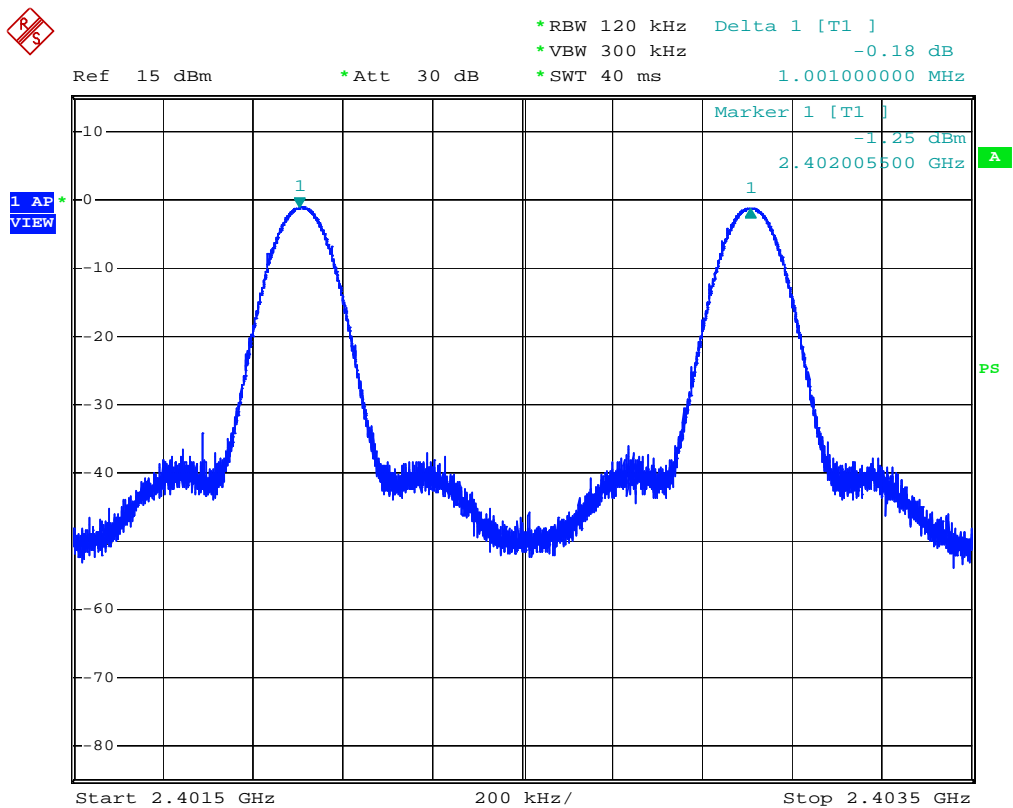

CHANNEL SEPARATION LOW CHANNEL

Date: 13.DEC.2006 19:02:06

Middle channel




*RBW 120 kHz Delta 1 [T1]
*VBW 300 kHz 0.17 dB
*SWT 40 ms 998.500000000 kHz

Ref 15 dBm

*Att 30 dB

1 AP
VIEW

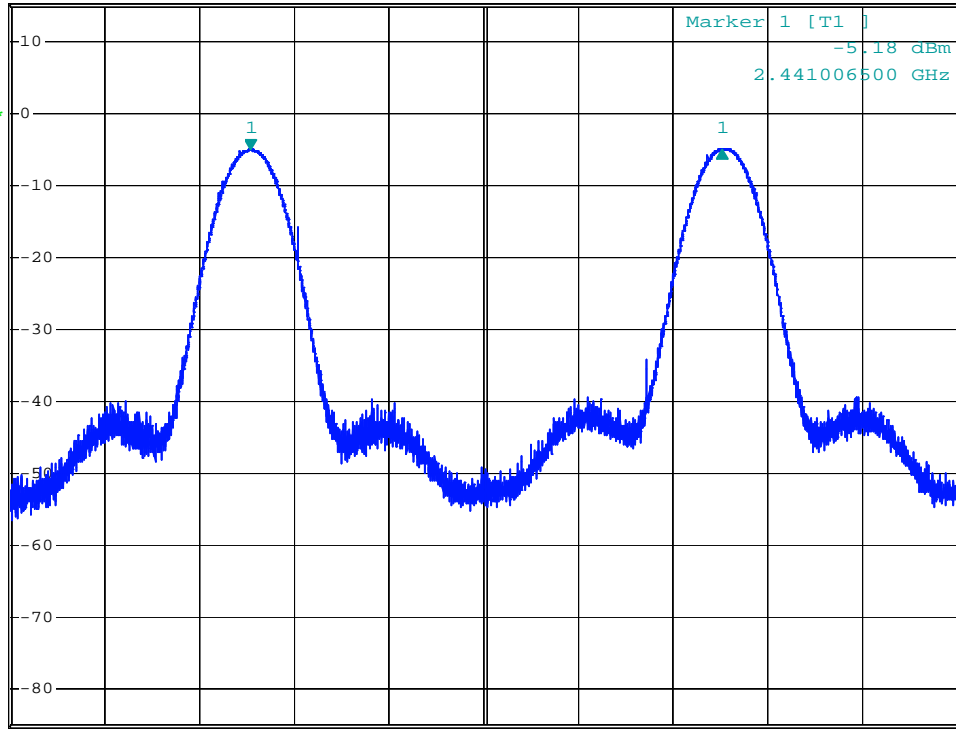

Marker 1 [T1]
-5.18 dBm
2.441006500 GHz

Start 2.4405 GHz 200 kHz/ Stop 2.4425 GHz

CHANNEL SEPARATION MIDDLE CHANNEL

Date: 13.DEC.2006 19:07:21

High channel




*RBW 120 kHz Delta 1 [T1]
*VBW 300 kHz 0.27 dB
*SWT 40 ms 1.002750000 MHz

Ref 15 dBm

*Att 30 dB

1 AP
VIEW

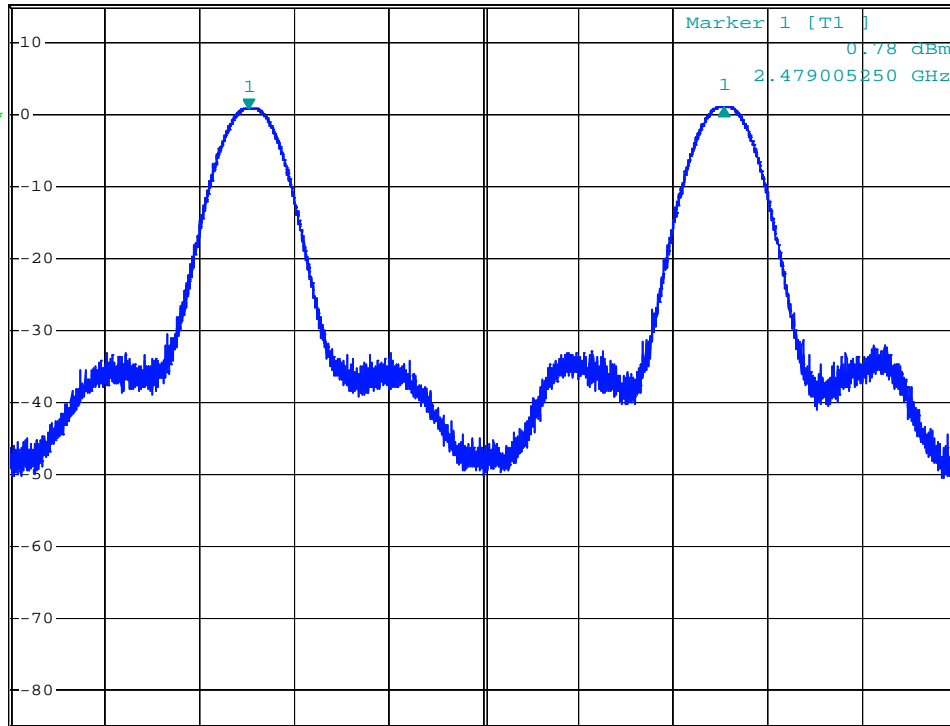

Start 2.4785 GHz

200 kHz/

Stop 2.4805 GHz

CHANNEL SEPARATION HIGH CHANNEL

Date: 13.DEC.2006 19:09:05

§15.247(a) (1) –20dB BANDWIDTH TESTING

Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20dB Bandwidth of the hopping channel, whichever is greater.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde&Schwarz	EMI Test Receiver	ESCI	100035	2006-09-29	2007-09-29

* **Statement of Traceability:** Bay Area Compliance Laboratory Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Data

Environmental Conditions

Temperature:	25 ° C
Relative Humidity:	53%
ATM Pressure:	1009mbar

The testing was performed by Lisa Zhu on 2006-12-13.


Test Mode: Transmitting

Channel	Frequency (MHz)	20dB Bandwidth (kHz)
Low Channel	2402	274
Mid Channel	2441	274
High Channel	2480	278

Low channel




1 PK
VIEW

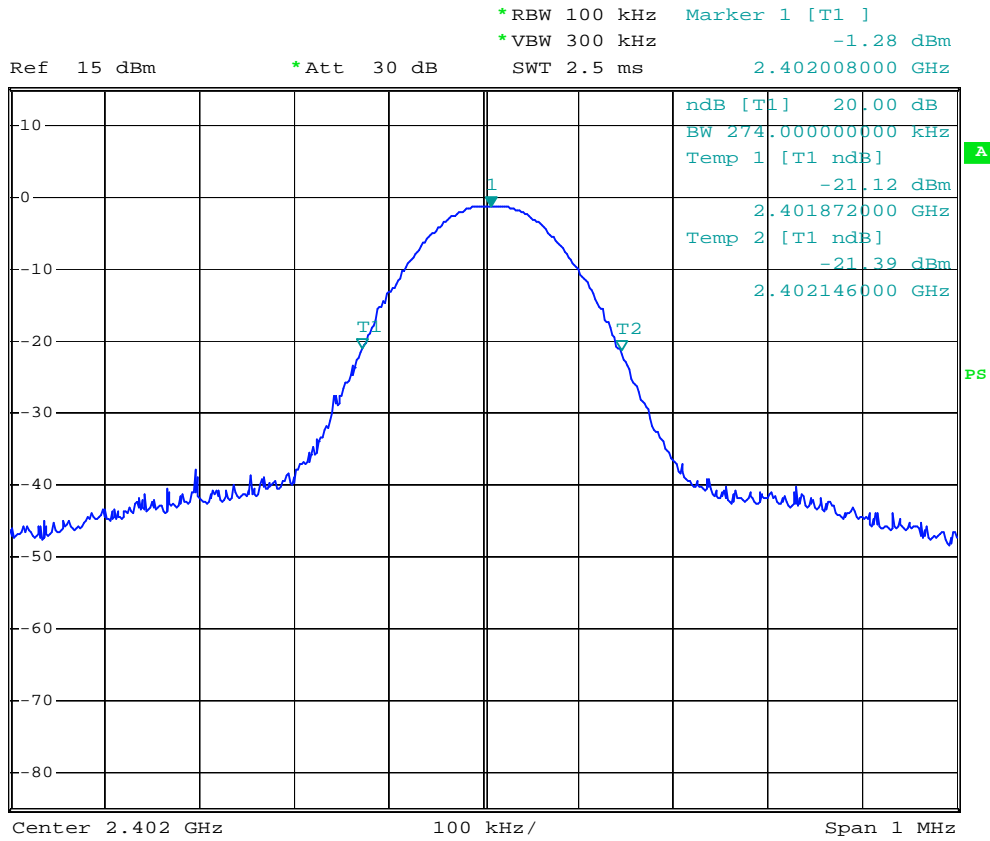

20 dB Bandwidth Low channel

Date: 13.DEC.2006 17:19:20

Middle channel

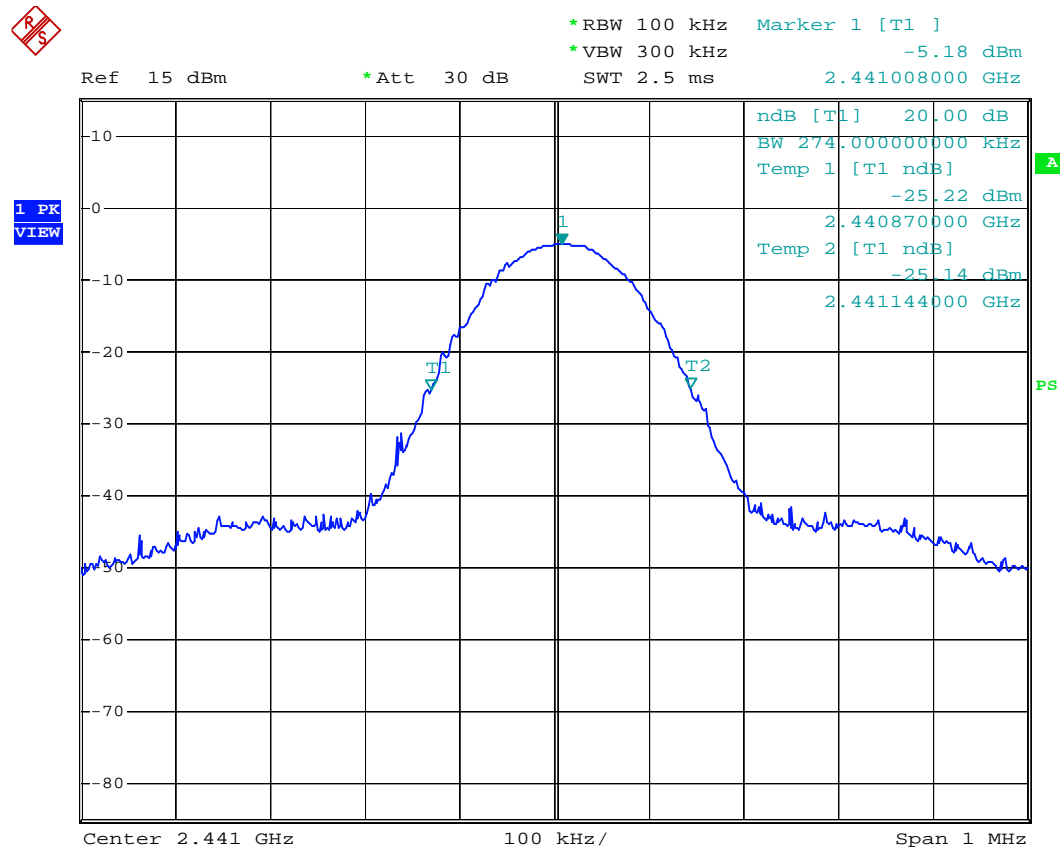

20 dB Bandwidth Middle channel


Date: 13.DEC.2006 17:18:05

High channel



1 PK VIEW

*RBW 100 kHz Marker 1 [T1]
*VBW 300 kHz 1.00 dBm
Ref 15 dBm *Att 30 dB SWT 2.5 ms 2.480008000 GHz

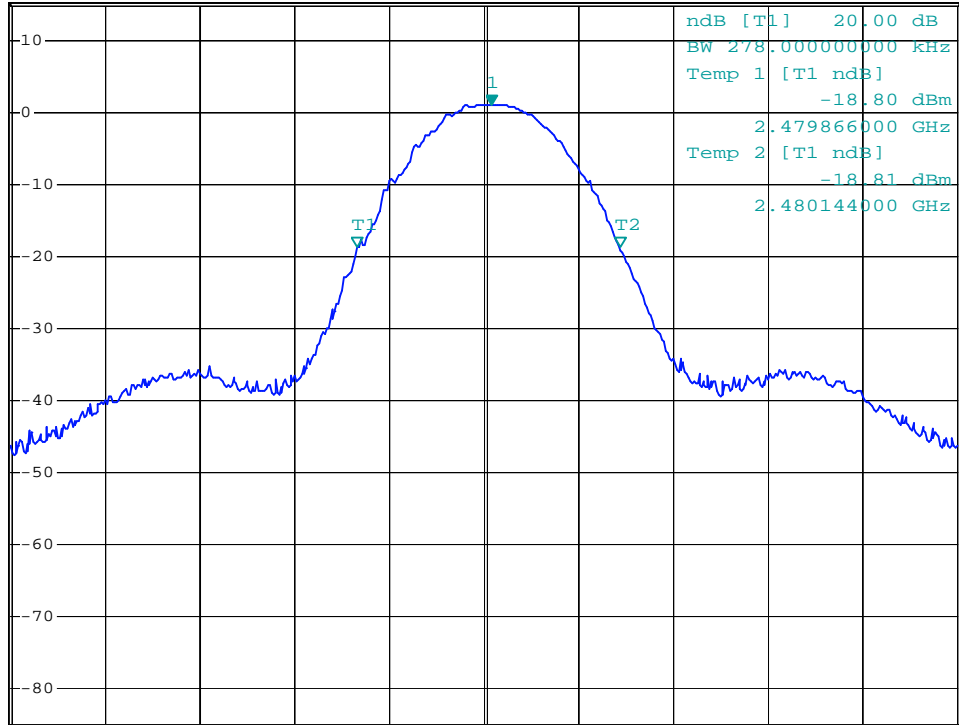

Center 2.48 GHz 100 kHz/ Span 1 MHz

20 dB Bandwidth High channel

Date: 13.DEC.2006 17:15:38

§15.247(a) (1) (iii)-NUMBER OF HOPPING CHANNEL TEST

Applicable Standard

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde&Schwarz	EMI Test Receiver	ESCI	100035	2006-09-29	2007-09-29

* **Statement of Traceability:** Bay Area Compliance Laboratory Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in transmitting mode from first channel to last.
3. By using the Max-Hold function record the Quantity of the channel.

Limit

FCC Part 15, Subpart C Section 15.247

Frequency Range	Number of Hopping Channel (CH)	Limit (CH)
2402-2480	79	>15

Test Data

Environmental Conditions

Temperature:	27 °C
Relative Humidity:	50 %
ATM Pressure:	1009 mbar

The testing was performed by Lisa Zhu on 2006-12-13.

Test mode: Transmitting

Test Result: 79 channels, Pass




*RBW 120 kHz Delta 1 [T1]
*VBW 300 kHz 2.69 dB
*SWT 40 ms 77.978562500 MHz

Ref 15 dBm

*Att 30 dB

1 AP
VIEW

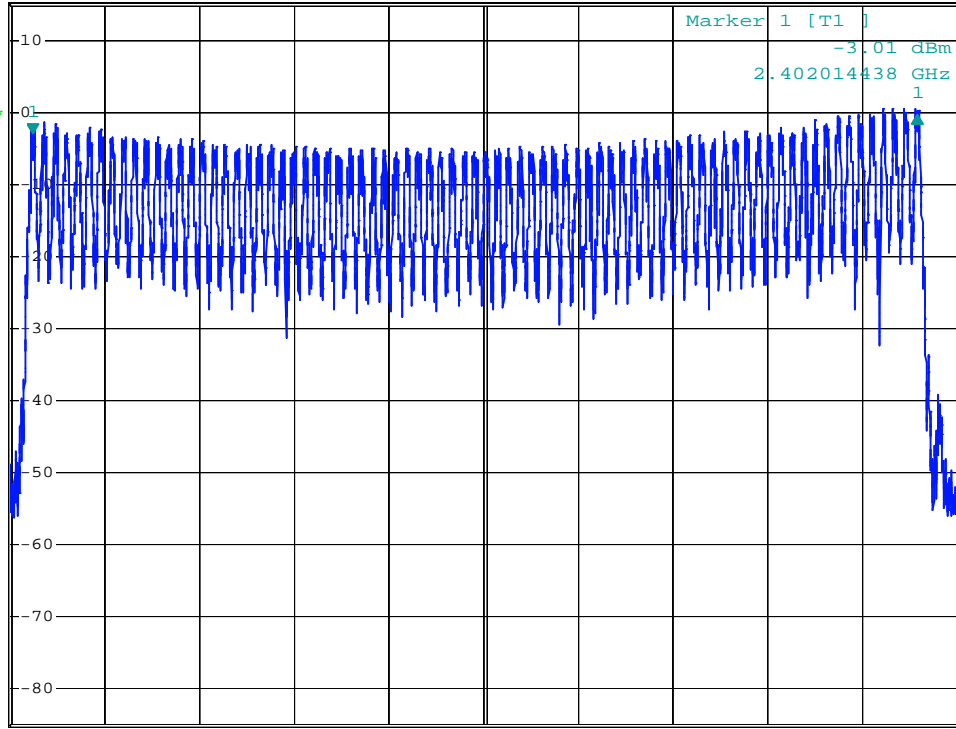

Start 2.4 GHz 8.35 MHz/ Stop 2.4835 GHz

hopping channels

Date: 13.DEC.2006 18:47:44

§15.247(a) (1) (iii) -TIME OF OCCUPANCY (DWELL TIME)

Applicable Standard

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde&Schwarz	EMI Test Receiver	ESCI	100035	2006-09-29	2007-09-29

* **Statement of Traceability:** Bay Area Compliance Laboratory Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

The EUT was worked in channel hopping; Spectrum SPAN was set as 0. Sweep was set as 0.4 X channel no.(s), The quantity of False was get from single sweep. In addition, the time of single Pluses was tested.

Limit

FCC Part 15, Subpart C Section 15.247.

FREQUENCY RANGE (MHz)	LIMIT (ms)		
	20dB bandwidth <250kHz (50 Channel)	20dB bandwidth >250kHz (50 Channel)	20dB bandwidth <1 MHz (79 Channel)
902-928	NA	NA	NA
2400-2483.5	NA	NA	31.6s
5725-5850	NA	NA	NA

Dwell Time= Pulse width (ms) * number of hopping pulses in 31.6 seconds.

Test Data

Environmental Conditions

Temperature:	27 °C
Relative Humidity:	50 %
ATM Pressure:	1009 mbar


The testing was performed by Lisa Zhu on 2006-12-13.

Test mode: Transmitting

Test Result: Pass

Channel	Pulse wide (msec)	Number of Hopping Pulses in 31.6sec	Dwell time (sec)	Limit (sec)	Result
Low Channel	0.432	320	0.13824	0.4	PASS
Mid Channel	0.430	320	0.13760	0.4	PASS
High Channel	0.430	320	0.13760	0.4	PASS

Low channel

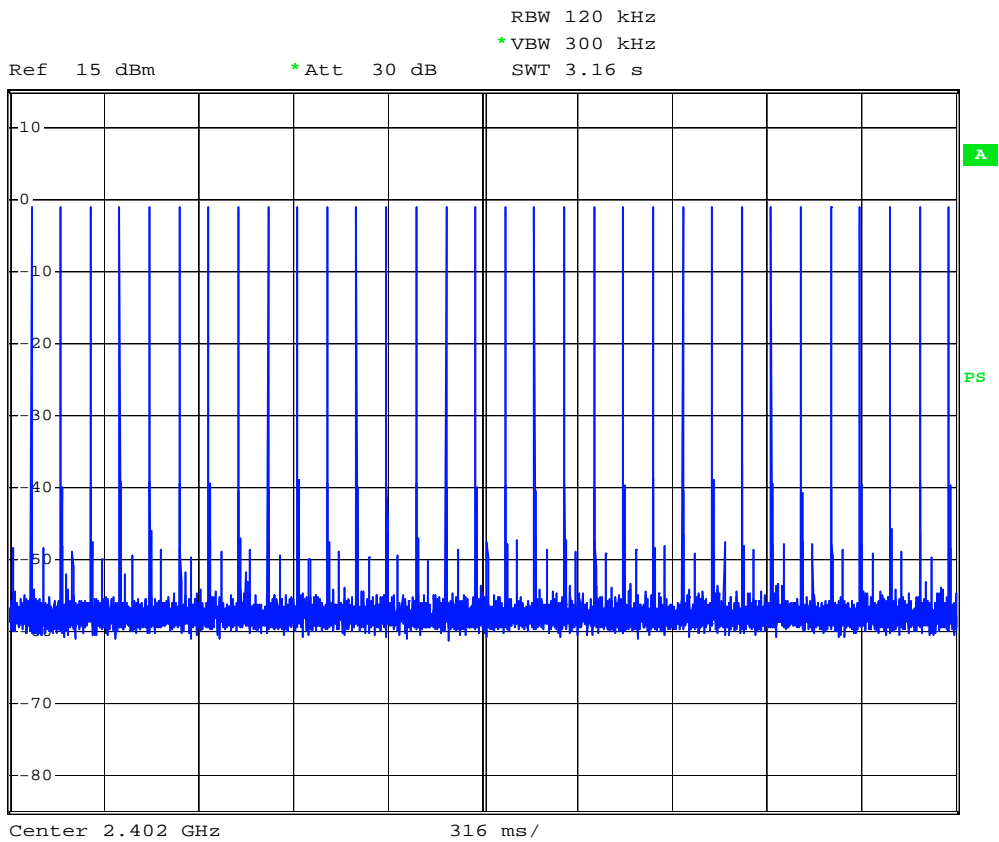


Number of low channel

Date: 13.DEC.2006 17:49:54




RBW 120 kHz Delta 1 [T1]
*VBW 300 kHz 13.88 dB
Ref 15 dBm *Att 30 dB SWT 2.7 ms 432.000000 μ s

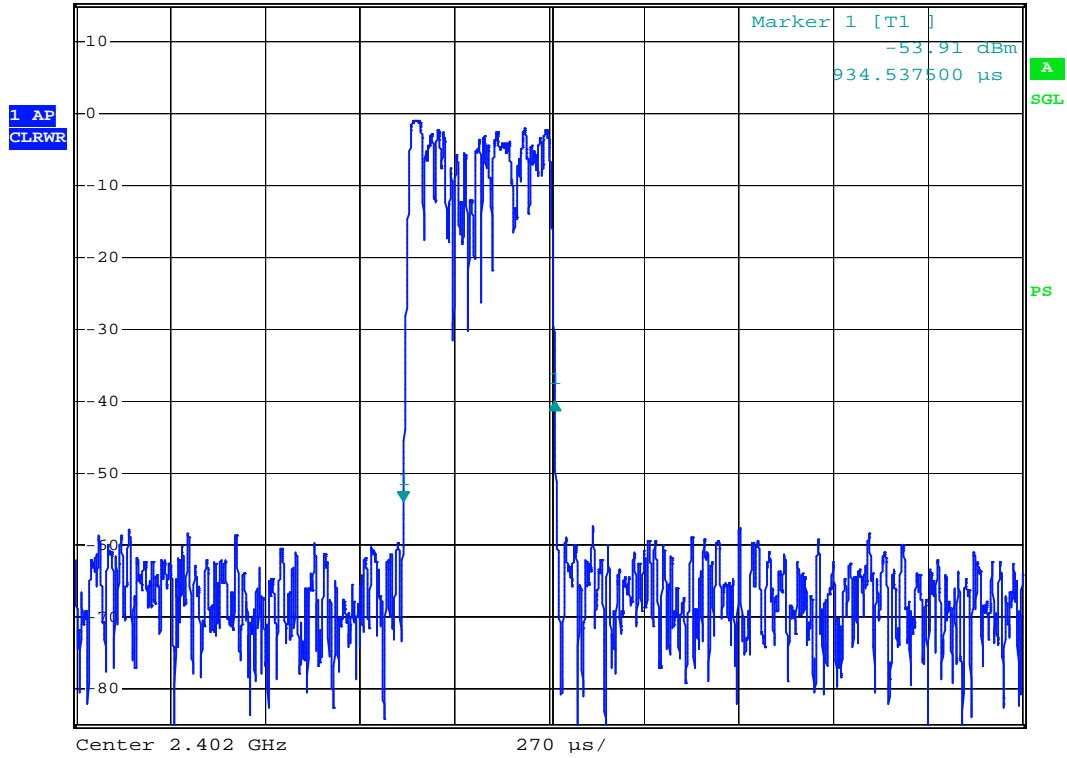

Pulse width of low channel
Date: 13.DEC.2006 18:09:21

Middle channel

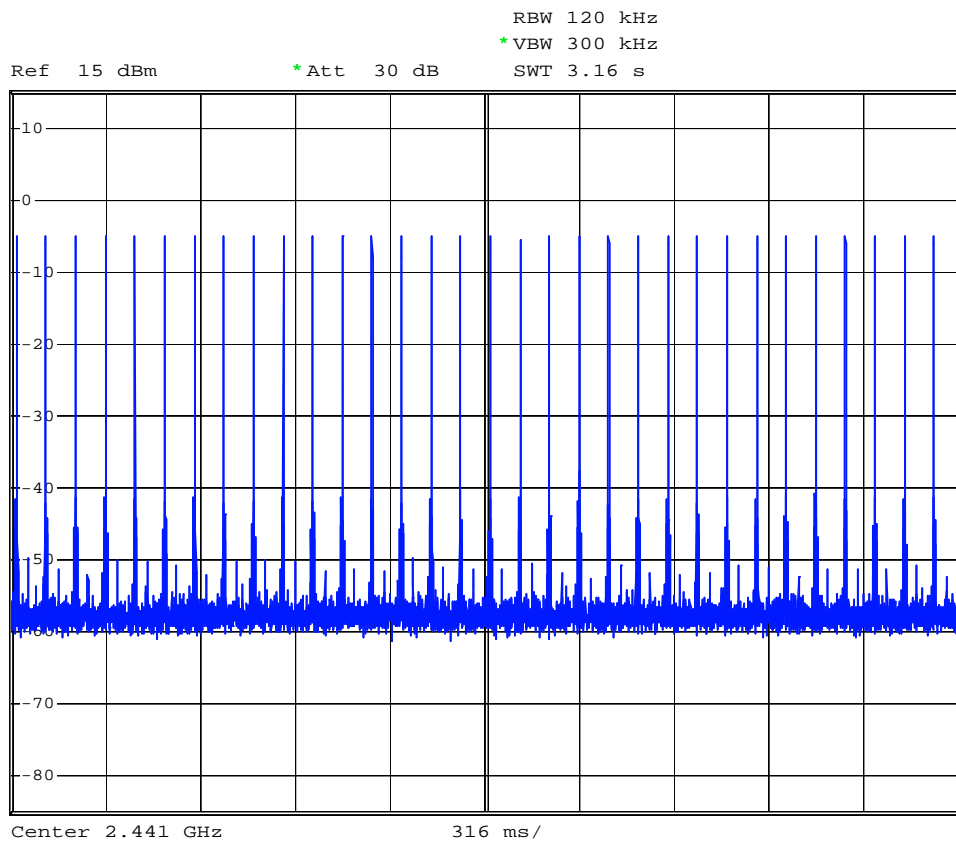


Number of middle channel

Date: 13.DEC.2006 17:48:56



Ref 15 dBm *Att 30 dB RBW 120 kHz Delta 1 [T1]
*VBW 300 kHz 32.46 dB
SWT 2.5 ms 430.000000 μs


1 AP
CLRWR

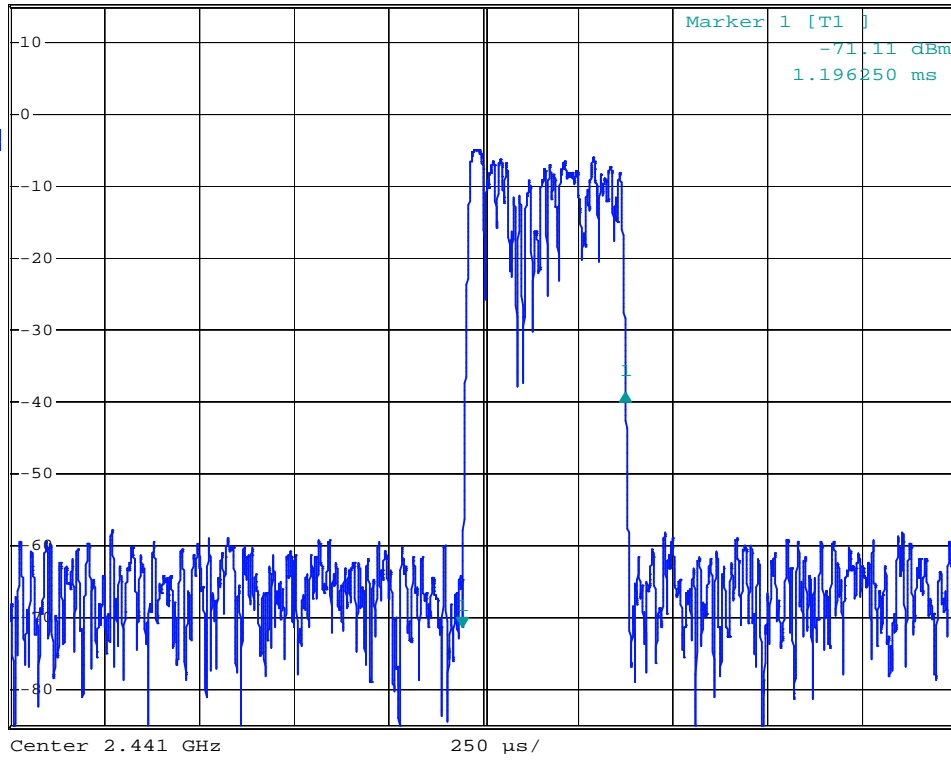

Pulse width of middle channel

Date: 13.DEC.2006 18:01:21


High channel

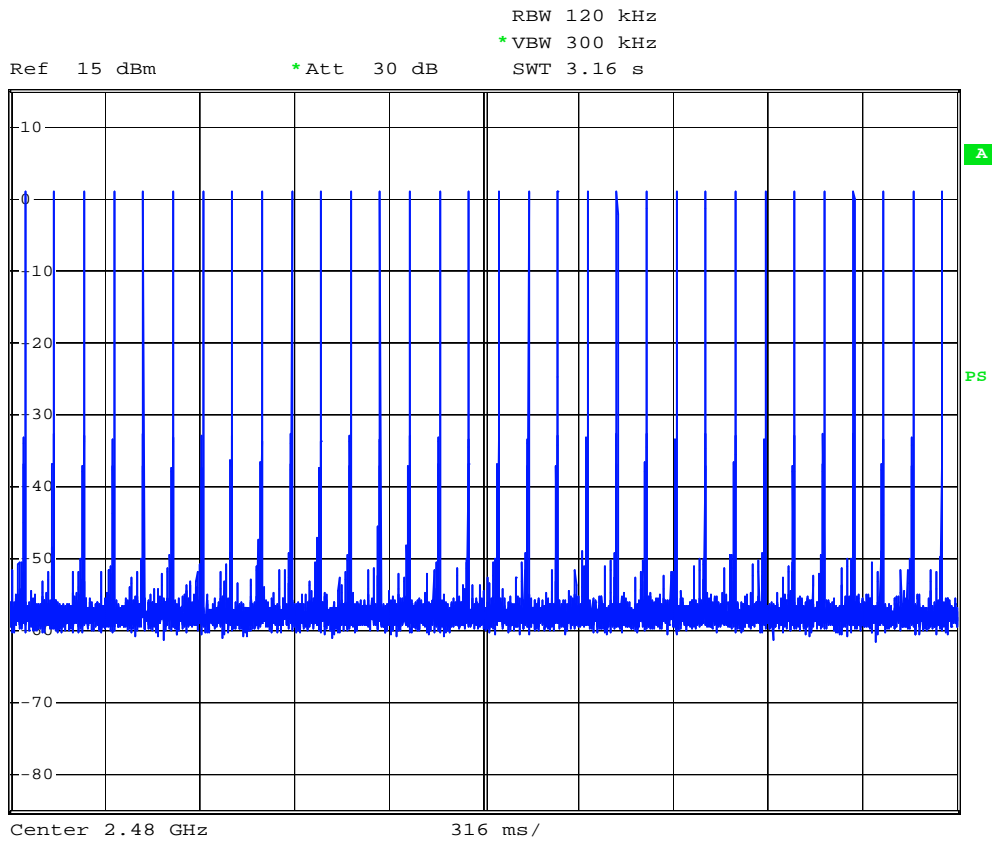

Pulse width of low channel
Date: 13.DEC.2006 17:53:36



RBW 120 kHz Delta 1 [T1]
*VBW 300 kHz 37.35 dB
Ref 15 dBm *Att 30 dB SWT 2.5 ms 430.000000 μs

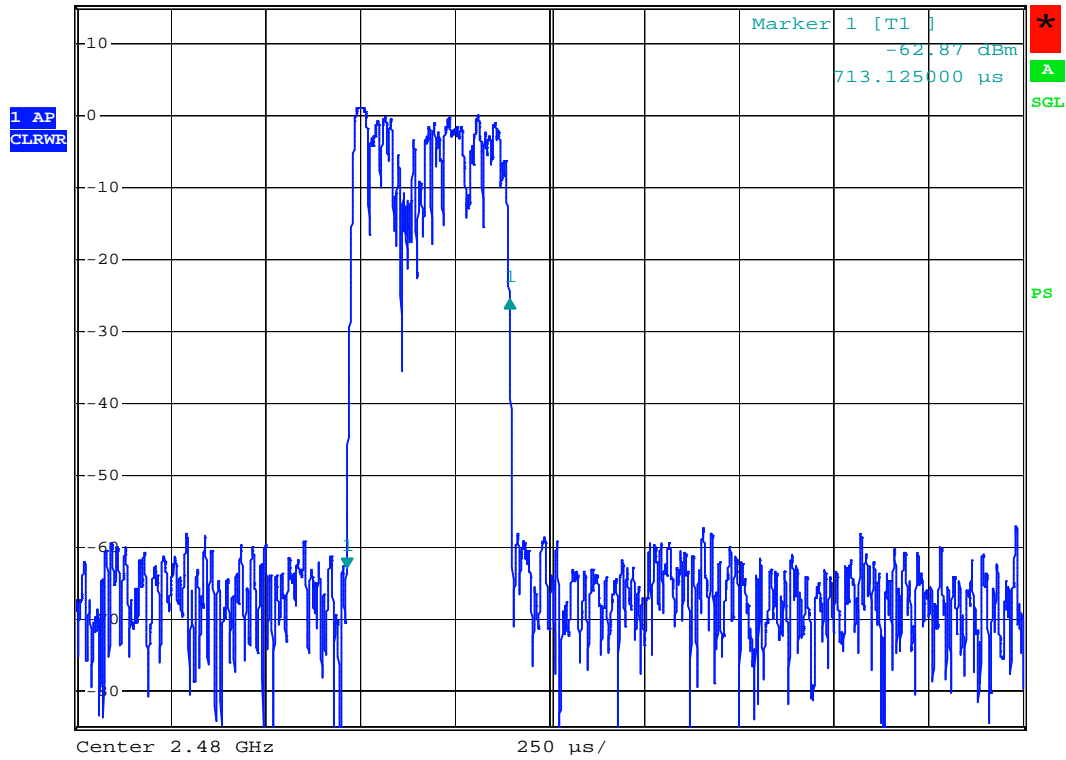

Pulse width of high channel

Date: 13.DEC.2006 17:57:52

§15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.


Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde&Schwarz	EMI Test Receiver	ESCI	100035	2006-09-29	2007-09-29

* **Statement of Traceability:** Bay Area Compliance Laboratory Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to an EMI Test Receiver.
3. Add a correction factor to the display.



Test Data

Environmental Conditions

Temperature:	25 ° C
Relative Humidity:	53%
ATM Pressure:	1009mbar

The testing was performed by Lisa Zhu on 2006-12-12.


Test mode: Transmitting

Channel	Channel Frequency (MHz)	Power Output		Limit (w)
		(dBm)	(w)	
Low	2402	-1.20	0.00076	1
Mid	2441	-5.12	0.00031	1
High	2480	1.07	0.00128	1

Test Result: Pass

Please refer to the following plots.


Low channel

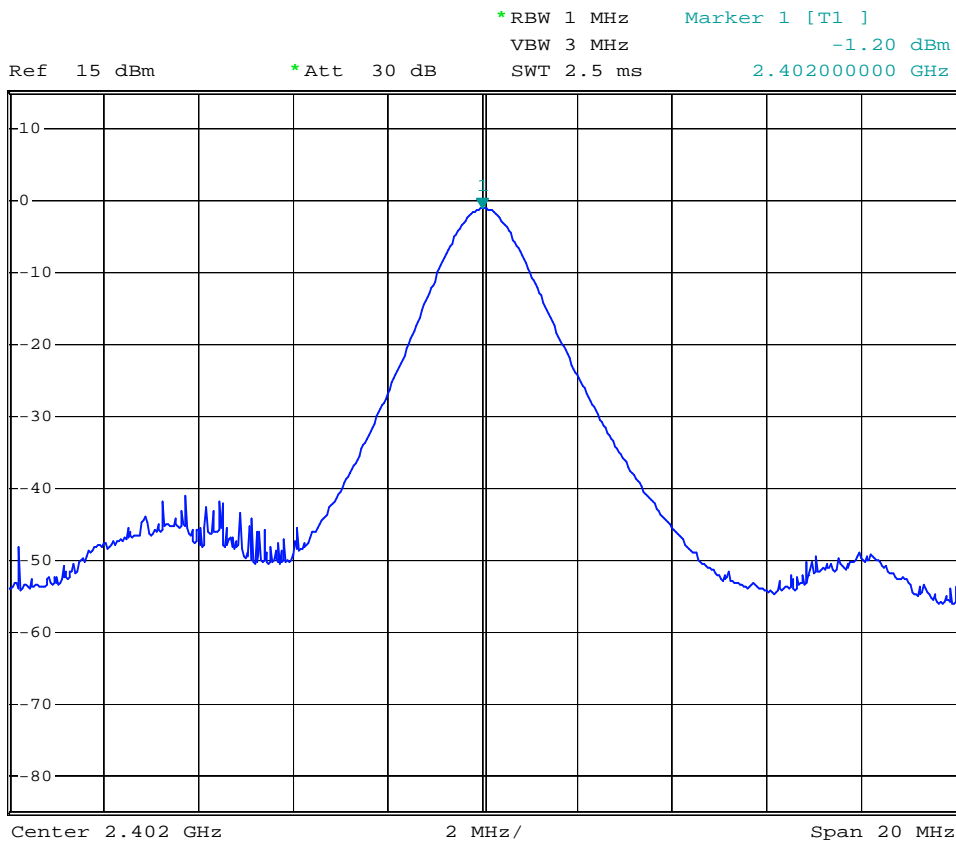

peak output power Low channel

Date: 13.DEC.2006 16:47:17

Middle channel

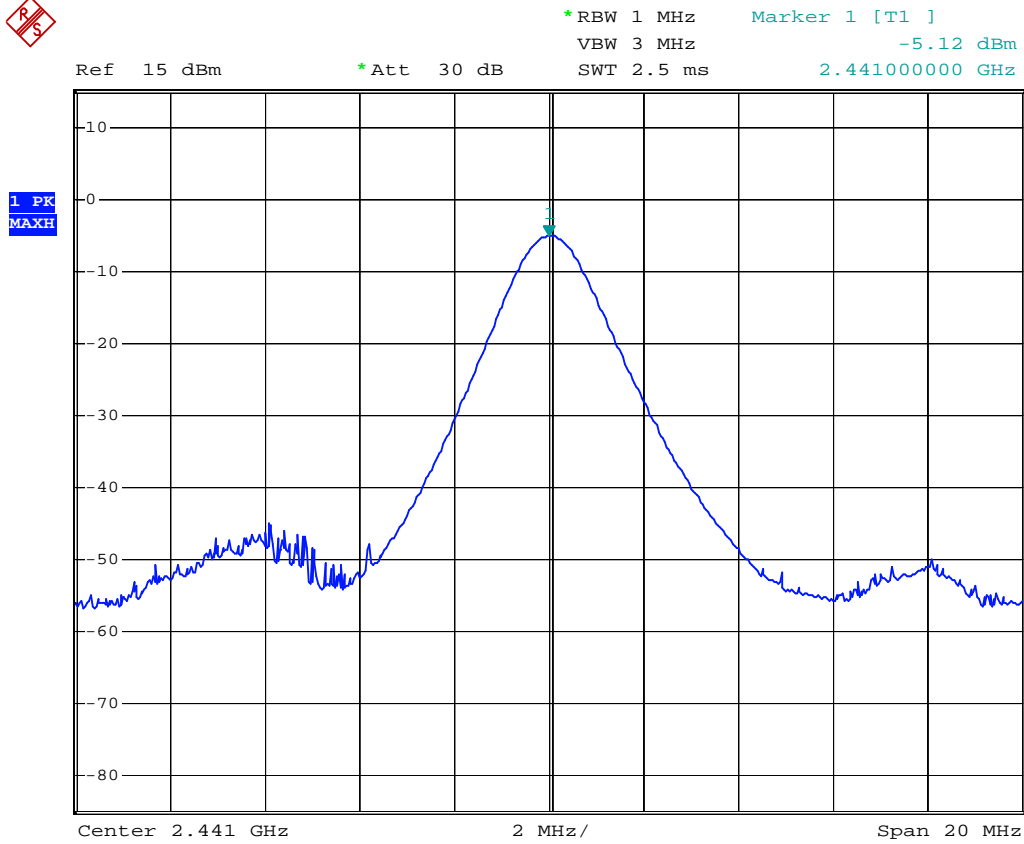

peak output power Middle channel

Date: 13.DEC.2006 16:45:03

High channel




*RBW 1 MHz Marker 1 [T1]
VBW 3 MHz 1.07 dBm
SWT 2.5 ms 2.48000000 GHz

Ref 15 dBm

*Att 30 dB

1 PK
MAXH

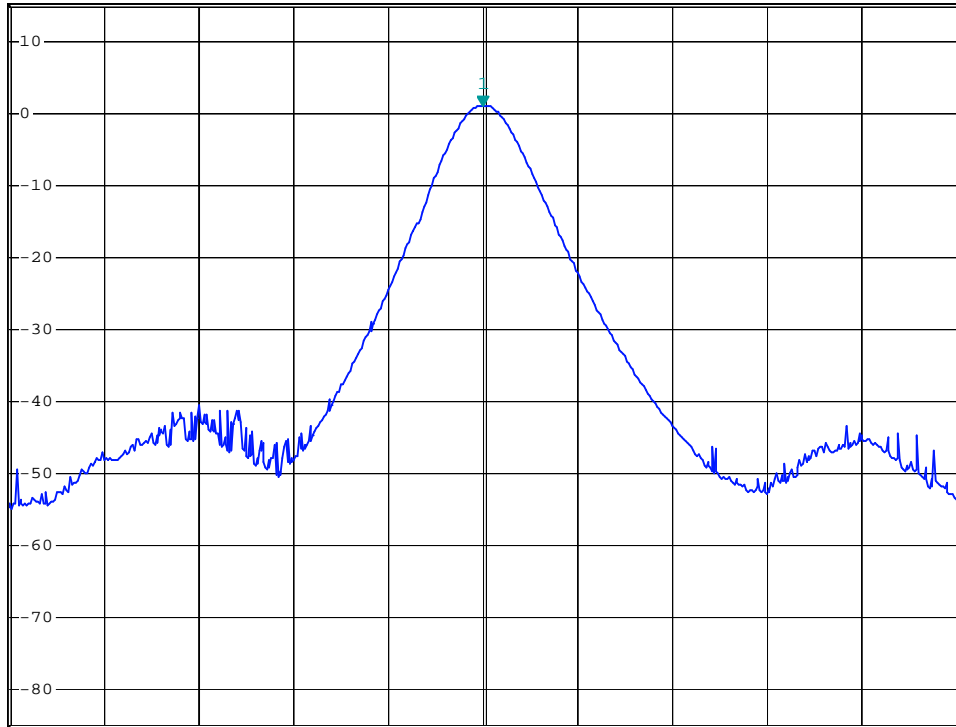

Center 2.48 GHz

2 MHz/

Span 20 MHz

peak output power High channel

Date: 13.DEC.2006 16:48:46

§15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde&Schwarz	EMI Test Receiver	ESCI	100035	2006-09-29	2007-09-29

* **Statement of Traceability:** Bay Area Compliance Laboratory Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Data**Environmental Conditions**

Temperature:	18 °C
Relative Humidity:	53 %
ATM Pressure:	1009mbar

The testing was performed by Lisa Zhu on 2006-12-8.

Test Mode: Transmitting

Frequency (MHz)	Emission (dBuV/m)	Limit (§15.209) (dBuV/m)
2399.9	38.1	54
2483.6	39.2	54

Test Result: Pass