



Prüfbericht - Nr.: 16022405 001		Seite 1 von 18 <i>Page 1 of 18</i>	
<i>Test Report No.:</i>			
Auftraggeber: <i>Client:</i>	Scosche Industries Inc. 1550 Pacific Ave, Oxnard, CA 93033, United States		
Gegenstand der Prüfung: <i>Test item:</i>	FM Transmitter		
Bezeichnung: <i>Identification:</i>	AT005	FCC ID: <i>FCC ID</i>	IKQFMT4
Wareneingangs-Nr.: <i>Receipt No.:</i>	173051257	Eingangsdatum: <i>Date of receipt:</i>	Mar. 04, 2010
Prüfort: <i>Testing location:</i>	TÜV Rheinland (Guangdong) Ltd. EMC Laboratory Guangzhou Auto Market, Yuan Gang Section of Guangshan Road, Guangzhou 510650, P. R. China		Listed test laboratory according to FCC rules section 2.948 for measuring devices under Parts 15
Prüfgrundlage: <i>Test specification:</i>	ANSI C63.4: 2009 FCC Part 15: July 10, 2008 Subpart C section 15.207 and 15.239		
Prüfergebnis: <i>Test Result:</i>	Der Prüfgegenstand entspricht oben genannter Prüfgrundlage(n). <i>The test item passed the test specification(s).</i>		
Prüflaboratorium: <i>Testing Laboratory:</i>	TÜV Rheinland (Guangdong) Ltd.		
geprüft/ tested by:	kontrolliert/ reviewed by:		
<i>Mar. 24, 2010</i> Ken Kuang Project Engineer 	<i>Mar. 25, 2010</i> Ricky Liu Project Manager 		
Datum <i>Date</i>	Name/Stellung <i>Name/Position</i>	Unterschrift <i>Signature</i>	Datum <i>Date</i>
			Name/Stellung <i>Name/Position</i>
			Unterschrift <i>Signature</i>
Sonstiges/ Other Aspects:			
Abkürzungen: P(ass) = entspricht Prüfgrundlage F(ail) = entspricht nicht Prüfgrundlage N/A = nicht anwendbar N/T = nicht getestet			
Abbreviations: P(ass) = passed F(ail) = failed N/A = not applicable N/T = not tested			
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any safety mark on this or similar products.</i>			

Prüfbericht - Nr.:
Test Report No.:

16022405 001

Seite 2 von 18
Page 2 of 18

Test Summary

FCC Rules		Test items	Result
Paragraph	Released Date		
Part 15 Per Section 15.239(c)	July 10, 2008	Radiated Spurious Emission	Pass
Part 15 Per Section 15.239(b)	July 10, 2008	Inband Radiated Emission	Pass
Part 15 Per Section 15.239(a)	July 10, 2008	26dB Bandwidth	Pass

Contents

1	GENERAL REMARKS.....	4
1.1	COMPLEMENTARY MATERIALS.....	4
2	TEST SITES.....	4
2.1	TEST FACILITIES.....	4
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS.....	5
2.3	TRACEABILITY.....	5
2.4	CALIBRATION.....	6
2.5	MEASUREMENT UNCERTAINTY.....	6
2.6	LOCATION OF ORIGINAL DATA.....	6
2.7	STATUS OF FACILITY USED FOR TESTING.....	6
3	GENERAL PRODUCT INFORMATION.....	7
3.1	PRODUCT FUNCTION AND INTENDED USE.....	7
3.2	RATINGS AND SYSTEM DETAILS.....	7
3.3	INDEPENDENT OPERATION MODES.....	8
3.4	SUBMITTED DOCUMENTS.....	8
4	TEST SET-UP AND OPERATION MODE.....	9
4.1	PRINCIPLE OF CONFIGURATION SELECTION.....	9
4.2	TEST OPERATION AND TEST SOFTWARE.....	9
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT.....	9
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE.....	9
4.5	TEST SET-UP.....	10
5	TEST RESULTS EMISSION.....	11
5.1	RADIATED SPURIOUS EMISSION.....	11
5.2	INBAND RADIATED EMISSION.....	14
5.3	26dB BANDWIDTH.....	16
6	PHOTOGRAPHS OF THE TEST SET-UP.....	17
7	LIST OF TABLES.....	18
8	LIST OF PHOTOGRAPHS.....	18

Prüfbericht - Nr.:
Test Report No.:

16022405 001

Seite 4 von 18
Page 4 of 18

1 General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix 1: Test result

2 Test Sites

2.1 Test Facilities

TÜV Rheinland (Guangdong) Ltd. EMC Laboratory

Guangzhou Auto Market, Yuan Gang Section of Guangshan Road
Guangzhou 510650

P. R. China

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Kind of Equipment	Type	Manufacturer	S/N	Calibrated until	Calibrated Interval
EMI Test Receiver	ESCI-3	Rohde & Schwarz	100216	16.Mar.2011	1 year
Spectrum Analyzer	FSP30	Rohde & Schwarz	100286	16.Mar.2011	1 year
Spectrum Analyzer	E4404B	Agilent	MY4144 0753	16.Mar.2011	1 year
Trilog-Broadband Antenna	VULB9168 (30MHz-1GHz)	SCHWARZBECK MESSELEKTRONIK	209	21.Aug.2011	2 years
Loop antenna	HFH2-Z2	Rohde & Schwarz	100111	16.Mar.2011	1 year
Double-Ridged Waveguide Horn Antenna	HF906 (1-18GHz)	Rohde & Schwarz	100385	24.Aug.2011	2 years
Pre-amplifier	AFS42-00101800- 25-S-42	MITEQ	1101599	16.Mar.2011	1 years
3m Anechoic Chamber	N/A	Albatross Project GmbH	N/A	10.Feb.2011	1 year
Audio generator	TAG-101	LWDQGS	358033	16.Mar.2011	2 years

2.3 Traceability

All measurement equipment calibrations are traceable to NIST or where calibration is performed outside the United States, to equivalent nationally recognized standards organizations.

Prüfbericht - Nr.:
Test Report No.:

16022405 001

Seite 6 von 18
Page 6 of 18

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications.

2.5 Measurement Uncertainty

Uncertainty for conducted emissions measurements is $\pm 2.68\text{dB}$.

Uncertainty for radiated emissions measurements is $\pm 4.94\text{dB}$ (30M-1GHz) and $\pm 4.88\text{dB}$ (> 1GHz)

The reported expanded uncertainty is based on a standard uncertainty multiply by a coverage factor $k=2$, providing a level of confidence of approximately 95%.

2.6 Location of original data

The original copies of test data taken during actual testing were attached at Appendix 1 of this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Guangdong) file for certification follow-up purposes.

2.7 Status of facility used for testing

TÜV Rheinland (Guangdong) Ltd. EMC Laboratory; Guangzhou Auto Market, Yuan Gang Section of Guangshan Road, Guangzhou 510650, P. R. China is listed on the US Federal Communications Commission list of facilities approved to perform measurements, the register no. 833845

Prüfbericht - Nr.: 16022405 001
Test Report No.:

Seite 7 von 18
Page 7 of 18

3 General Product Information

Brief description of the test sample:

The submitted sample is a FM transmitter powered by 2×AAA batteries.
Audio signal input from 3.5mm line-in port is modulated to FM radio signal and transmitted to FM receiver.

3.1 Product Function and Intended Use

Refer to the Technical Documentation and user manual.

3.2 Ratings and System Details

Frequency range	:	88.1 MHz -107.9 MHz
Number of channels	:	20
Channels frequency (MHz)	:	88.1, 88.3, 88.5, 88.7, 88.9, 90.1, 90.3, 90.5, 90.7, 90.9, 106.1, 106.3, 106.5, 106.7, 106.9, 107.1, 107.3, 107.5, 107.7, 107.9
Channel Bandwidth	:	200kHz
Type of antenna	:	Integral antenna
Power supply	:	DC 3V (2×AAA batteries)
Ports	:	Audio input
RF Power level	:	<50nW
Protection Class	:	III
Size	:	62mm×37mm×18mm

Refer to the Technical Documentation for further information

Prüfbericht - Nr.:
Test Report No.:

16022405 001

Seite 8 von 18
Page 8 of 18

3.3 Independent Operation Modes

1. FM: RF Transmitting

For further information refer to User Manual

3.4 Submitted Documents

Block Diagram
Schematics
Operation Description
Components List
FCC label and location
User Manual
Internal Photos
External Photos
Application form

4 Test Set-up and Operation Mode

4.1 Principle of Configuration Selection

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Refer to test set-up in chapter 5.

4.3 Special Accessories and Auxiliary Equipment


None.

4.4 Countermeasures to achieve EMC Compliance

The test sample, which has been tested, contained the noise suppression parts as described in the technical document. No additional measures were employed to achieve compliance.

4.5 Test set-up

Diagram 1 of Configuration for Testing Radiated Emission

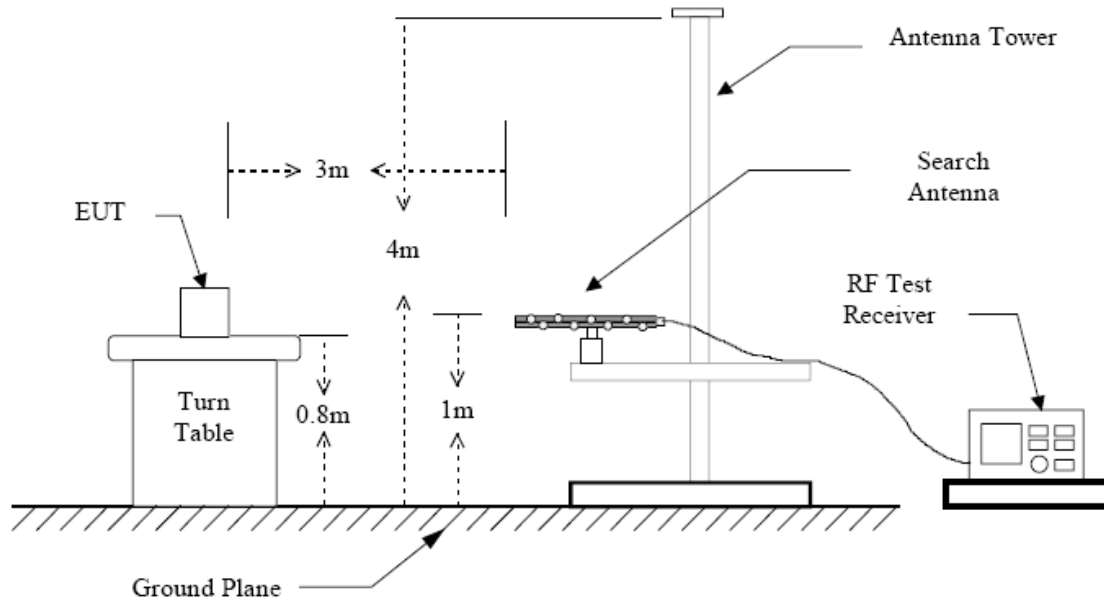

5 Test Results EMISSION

5.1 Radiated Spurious Emission

RESULT:

Pass

Date of testing	:	Mar. 19, 2010
Test specification	:	FCC Part 15 Per Section 15.239(c)
Limits	:	FCC Part 15 Per Section 15.209(a)
Test procedure	:	Procedure specified in ANSI C63.4
Deviations from Standard Test procedures	:	None
Kind of test site	:	3m Semi-anechoic chamber
Operation mode	:	FM RF transmitting at fix channel (High, Low, Mid)
Power supply	:	DC 3V
Temperature	:	23°C
Humidity	:	50%

Test procedure:

1. The EUT was placed on the top of a rotatable table 0.8 meters above the ground with 3-orthogonal direction and be kept close enough to the receiving antenna. The table was rotated 360 degrees to determine the suspected emission frequency and the position of the worst radiation case with both horizontal and vertical antenna polarization.
2. The EUT was then set 3 meters away from the receiving antenna, which was mounted on a variable-height antenna tower.
3. For each suspected emission frequency recorded in step 1, the EUT was arranged to its worst case that the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to read the maximum emission.

Prüfbericht - Nr.: 16022405 001
Test Report No.:

Seite 12 von 18
Page 12 of 18

Table 2: Radiated Spurious Emission (Transmitting at 88.1MHz)

Frequency	QP	AV	PK	Polarity	Limit		
					QP	AV	PK
[MHz]	[dB μ V/m]			(H/V)	[dB μ V/m]		
176.2	30.2	N/A	N/A	H	43.5	N/A	N/A
264.3	32.1	N/A	N/A	H	46.0	N/A	N/A
352.4	41.9	N/A	N/A	H	46.0	N/A	N/A
440.5	31.4	N/A	N/A	H	46.0	N/A	N/A
176.2	32.6	N/A	N/A	V	43.5	N/A	N/A
264.3	25.4	N/A	N/A	V	46.0	N/A	N/A
352.4	30.7	N/A	N/A	V	46.0	N/A	N/A
528.6	34.2	N/A	N/A	V	46.0	N/A	N/A
*)---							

Table 3: Radiated Spurious Emission (Transmitting at 90.9MHz)

Frequency	QP	AV	PK	Polarity	Limit		
					QP	AV	PK
[MHz]	[dB μ V/m]			(H/V)	[dB μ V/m]		
272.7	28.7	N/A	N/A	H	46.0	N/A	N/A
363.6	35.2	N/A	N/A	H	46.0	N/A	N/A
454.5	30.4	N/A	N/A	H	46.0	N/A	N/A
181.8	23.5	N/A	N/A	V	43.5	N/A	N/A
363.6	33.4	N/A	N/A	V	46.0	N/A	N/A
545.4	30.4	N/A	N/A	V	46.0	N/A	N/A
*)---							

Table 4: Radiated Spurious Emission (Transmitting at 107.9MHz)

Frequency	QP	AV	PK	Polarity	Limit		
					QP	AV	PK
[MHz]	[dB μ V/m]			(H/V)	[dB μ V/m]		
215.8	34.5	N/A	N/A	H	43.5	N/A	N/A
323.7	33.5	N/A	N/A	H	46.0	N/A	N/A
647.4	31.7	N/A	N/A	H	46.0	N/A	N/A
215.8	40.1	N/A	N/A	V	43.5	N/A	N/A
323.7	28.3	N/A	N/A	V	46.0	N/A	N/A
540.1	30.8	N/A	N/A	V	46.0	N/A	N/A
648.4	34.9	N/A	N/A	V	46.0	N/A	N/A
*)---							

*) Note: Measurement is made from 9 kHz to 1080 MHz with following resolution bandwidth. Disturbances other than those mentioned above are small or not detectable.

	Bandwidth
Frequencies up to 150 kHz:	200 Hz
Frequencies from 150 kHz to 30 MHz:	9 kHz
Frequencies from 30 MHz to 1 GHz:	120 kHz
Frequencies above 1GHz:	1 MHz

Prüfbericht - Nr.:
Test Report No.:

16022405 001

Seite 14 von 18
Page 14 of 18

5.2 Inband Radiated Emission

RESULT:

Pass

Date of testing	:	Mar. 19, 2010
Test specification	:	FCC Part 15 Per Section 15.239(b)
Limits	:	FCC Part 15 Per Section 15.239(b)
Test procedure	:	Procedure specified in ANSI C63.4
Deviations from Standard Test procedures	:	None
Kind of test site	:	3m Semi-anechoic chamber
Operation mode	:	FM RF transmitting at fix channel (High, Low, Mid)
Power supply	:	DC 3V
Temperature	:	23°C
Humidity	:	50%

Test procedure:

1. The EUT was placed on the top of a rotatable table 0.8 meters above the ground with 3-orthogonal direction and be kept close enough to the receiving antenna. The table was rotated 360 degrees to determine the suspected emission frequency and the position of the worst radiation case with both horizontal and vertical antenna polarization.
2. The EUT was then set 3 meters away from the receiving antenna, which was mounted on a variable-height antenna tower.
3. For each suspected emission frequency recorded in step 1, the EUT was arranged to its worst case that the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to read the maximum emission.

Table 5: Radiated Inband Emission (Transmitting at 88.1MHz)

Frequency	QP	AV	PK	Polarity	Limit		
					QP	AV	PK
[MHz]	[dB μ V/m]			(H/V)	[dB μ V/m]		
88.100	N/A	42.2	43.8	V	N/A	48	68
88.100	N/A	34.2	35.8	H	N/A	48	68
*)---							

Table 6: Radiated Inband Emission (Transmitting at 90.9MHz)

Frequency	QP	AV	PK	Polarity	Limit		
					QP	AV	PK
[MHz]	[dB μ V/m]			(H/V)	[dB μ V/m]		
90.900	N/A	43.7	45.0	V	N/A	48	68
90.900	N/A	32.8	34.9	H	N/A	48	68
*)---							

Table 7: Radiated Inband Emission (Transmitting at 107.9MHz)

Frequency	QP	AV	PK	Polarity	Limit		
					QP	AV	PK
[MHz]	[dB μ V/m]			(H/V)	[dB μ V/m]		
107.900	N/A	40.0	41.2	V	N/A	48	68
107.900	N/A	35.0	36.4	H	N/A	48	68
*)---							

*) Note:

The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz at frequency below 1GHz.

Measurement is made from carrier frequency-100 kHz to carrier frequency+100 kHz and maximum reading among the range is listed.

Prüfbericht - Nr.:
Test Report No.:

16022405 001

Seite 16 von 18
Page 16 of 18

5.3 26dB Bandwidth

RESULT:

Pass

Date of testing : Mar. 23, 2010
 Test specification : FCC Part 15 Per Section 15.239(a)
 Limits : 200kHz, FCC Part 15 Per Section 15.239(a)
 Deviations from Standard Test procedures : None
 Test procedure : Procedure specified in ANSI C63.4
 Operation mode : FM continuously transmitting on the measured channel with maximum volume specified by the applicant.
 Kind of test site : Shielded room
 Power supply : DC 3V
 Temperature : 23°C
 Humidity : 50%

Test procedure:

1. Set the EUT to proper test channel.
2. Spectrum analyzer setting: Centered Frequency= measured channel, RBW=10kHz, VBW=10kHz.
3. Mark the peak power frequency point and the -26dB upper and lower frequency points.
4. Read the frequency delta value between the -26dB upper and lower frequency points.
5. Repeat step 1 to 4 until all the channels required are finished.

Table 8: 26dB Bandwidth

Channel	Lowest Frequency (MHz)	Highest Frequency (MHz)	Test Result (kHz)
Lowest 88.100MHz	88.0150	88.1825	167.5
Middle 90.900MHz	90.8125	90.9925	180.0
Highest 107.900MHz	107.8025	108.0000	197.5

Refer to appendix 1 for test data.

6 Photographs of the Test Set-Up

Photograph 1: Set-up for Radiated Emission



7 List of Tables

Table 1: List of Test and Measurement Equipment	5
Table 2: Radiated Spurious Emission (Transmitting at 88.1MHz)	12
Table 3: Radiated Spurious Emission (Transmitting at 90.9MHz)	12
Table 4: Radiated Spurious Emission (Transmitting at 107.9MHz)	13
Table 5: Radiated Inband Emission (Transmitting at 88.1MHz)	15
Table 6: Radiated Inband Emission (Transmitting at 90.9MHz)	15
Table 7: Radiated Inband Emission (Transmitting at 107.9MHz)	15
Table 8: 26dB Bandwidth	16

8 List of Photographs

Photograph 1: Set-up for Radiated Emission	17
--	----



Prüfbericht - Nr.:

16022405 001

Seite 1 von 2

Page 1 of 2

Test Report no.

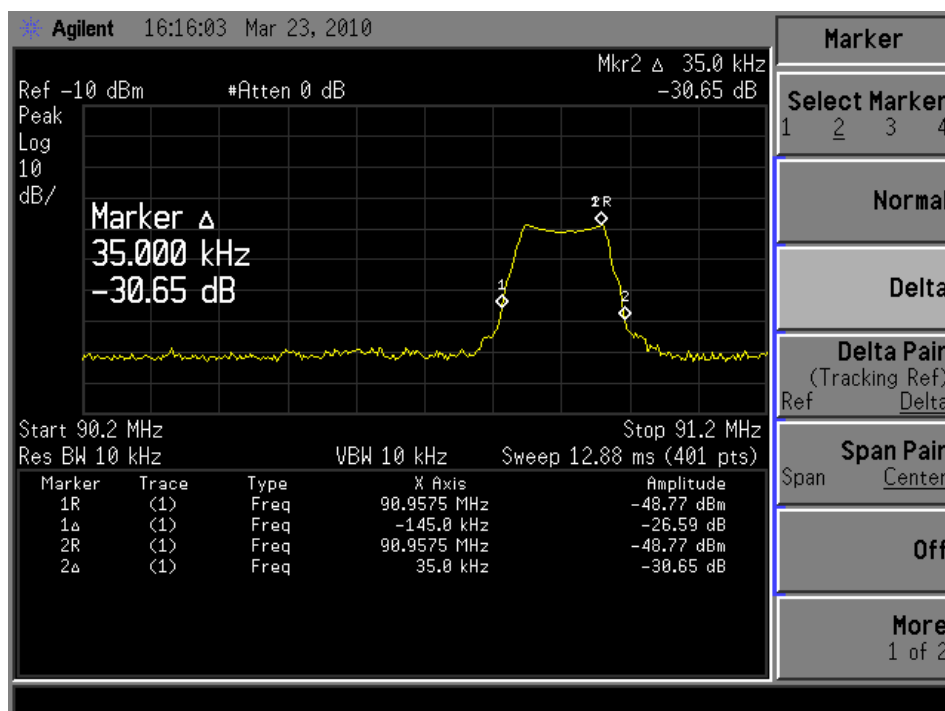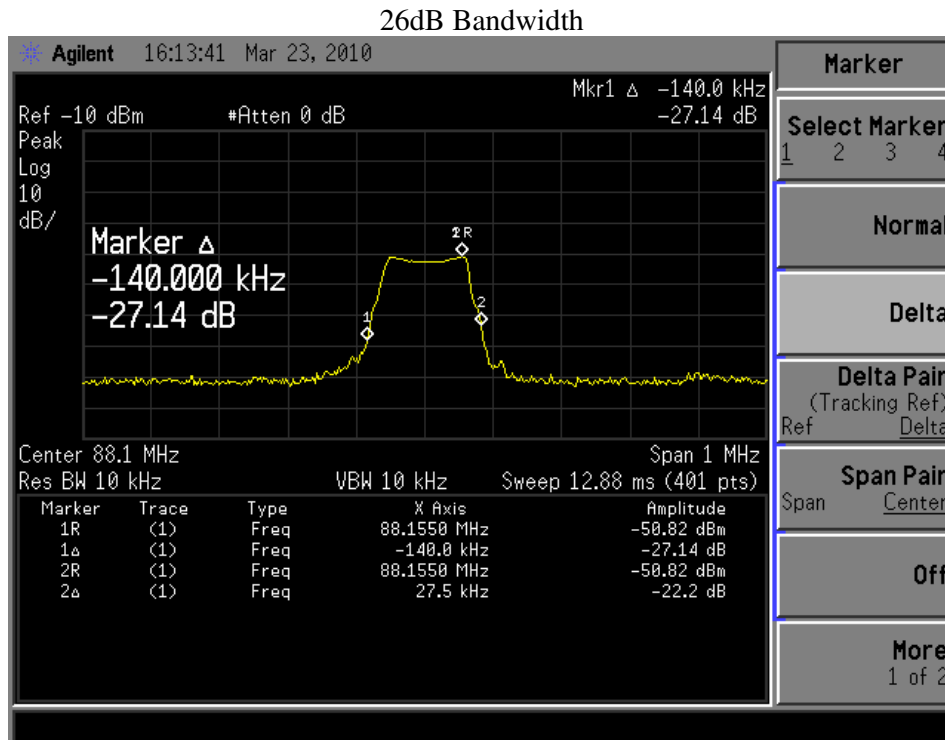

Prüfbericht - Nr.:

16022405 001

Seite 2 von 2

Page 2 of 2

Test Report no.

