



## Test Report

Product Name : USB Dongle  
Model No. : HZ10-T  
FCC ID. : IKQHZ10T

Applicant : Scosche Industries Inc.  
Address : 1550 Pacific Ave. Oxnard, CA 93033 U.S.A

Date of Receipt : June. 18, 2008  
Issued Date : Jan. 15, 2010  
Report No. : 101296R-RFUSP44V01  
Report Version : V1.0

The Test Results relate only to the samples tested.  
The test report shall not be reproduced except in full without the written approval of Quietek Corporation.  
This report must not be used to claim product endorsement by NVLAP any agency of the U.S. Government

# Test Report Certification

Issued Date: Jan. 15, 2010

Report No. : 101296R-RFUSP44V01



Product Name : USB Dongle  
 Applicant : Scosche Industries Inc.  
 Address : 1550 Pacific Ave. Oxnard, CA 93033 U.S.A  
 Manufacturer : Scosche Industries Inc.  
 Model No. : HZ10-T  
 FCC ID. : IKQHZ10T  
 EUT Rated Voltage : 120V/60Hz  
 EUT Test Voltage : DC 5V(Power by PC)  
 Trade Name : SCOSCHE  
 Applicable Standard : FCC CFR Title 47 Part 15 Subpart C: 2007  
 ANSI C63.4: 2003

Test Result : Complied



The Test Results relate only to the samples tested.

The test report shall not be reproduced except in full without the written approval of Quietek Corporation.

This report must not be used to claim product endorsement by NVLAP any agency of the U.S. Government

Documented By : Genie Chang  
 ( Senior Adm. Specialist / Genie Chang )



Tested By : Tom Hsieh  
 ( Engineering Vice Supervisor /  
 Tom Hsieh )



Approved By : Vincent Lin  
 ( Manager / Vincent Lin )

## TABLE OF CONTENTS

Description	Page
<b>1. GENERAL INFORMATION.....</b>	<b>4</b>
1.1. EUT Description.....	4
1.2. Operation Description.....	6
1.3. Tested System Details.....	7
1.4. Configuration of Test System.....	7
1.5. EUT Exercise Software.....	7
1.6. Test Facility.....	8
<b>2. Conducted Emission.....</b>	<b>9</b>
2.1. Test Equipment.....	9
2.2. Test Setup.....	9
2.3. Limits.....	9
2.4. Test Procedure.....	10
2.5. Uncertainty.....	10
2.6. Test Result of Conducted Emission.....	11
<b>3. Radiated Emission.....</b>	<b>13</b>
3.1. Test Equipment.....	13
3.2. Test Setup.....	14
3.3. Limits.....	15
3.4. Test Procedure.....	16
3.5. Uncertainty.....	16
3.6. Test Result of Radiated Emission.....	17
<b>4. Band Edge.....</b>	<b>24</b>
4.1. Test Equipment.....	24
4.2. Test Setup.....	25
4.3. Limit.....	25
4.4. Test Procedure.....	26
4.5. Uncertainty.....	26
4.6. Test Result of Band Edge.....	27
<b>5. EMI Reduction Method During Compliance Testing.....</b>	<b>31</b>
Attachment 1: EUT Test Photographs	
Attachment 2: EUT Detailed Photographs	

## 1. GENERAL INFORMATION

### 1.1. EUT Description

Product Name	: USB Dongle
Trade Name	: SCOSCHE
FCC ID.	: IKQHZ10T
Model No.	: HZ10-T
Frequency Range	: 2405 – 2477MHz
Type of Modulation	: $\pi/4$ DQPSK (Differential Quadrature Phase Shift Keying)
Number of Channels	: 37
Channel Control	: Auto
Antenna Type	: Printed on PCB
Antenna Gain	: Refer to the table “Antenna List”

#### Antenna List

No.	Manufacturer	Part No.	Peak Gain
1	TATUNG	N/A	2.0 dBi for 2.4 GHz

#### Center Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 2:	2405 MHz	Channel 3:	2407 MHz	Channel 4:	2409 MHz
Channel 5:	2411 MHz	Channel 6:	2413 MHz	Channel 7:	2415 MHz
Channel 8:	2417 MHz	Channel 9:	2419 MHz	Channel 10:	2421 MHz
Channel 11:	2423 MHz	Channel 12:	2425 MHz	Channel 13:	2427 MHz
Channel 14:	2429 MHz	Channel 15:	2431 MHz	Channel 16:	2433 MHz
Channel 17:	2435 MHz	Channel 18:	2437 MHz	Channel 19:	2439 MHz
Channel 20:	2441 MHz	Channel 21:	2443 MHz	Channel 22:	2445 MHz
Channel 23:	2447 MHz	Channel 24:	2449 MHz	Channel 25:	2451 MHz
Channel 26:	2453 MHz	Channel 27:	2455 MHz	Channel 28:	2457 MHz
Channel 29:	2459 MHz	Channel 30:	2461 MHz	Channel 31:	2463 MHz
Channel 32:	2465 MHz	Channel 33:	2467 MHz	Channel 34:	2469 MHz
Channel 35:	2471 MHz	Channel 36:	2473 MHz	Channel 37:	2475 MHz
Channel 38:	2477 MHz				

## Note:

1. The EUT is a USB Dongle with a built-in 2.4GHz transceiver
2. These tests are conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15 Subpart C Paragraph 15.249.
3. Regarding to the operation frequency, the lowest, middle and highest frequency are selected to perform the test.
4. The radiation measurements are performed in X, Y, Z axis positioning. Only the worst case is shown in the report.

EMI Test Mode	Mode 1: Transmitter
---------------	---------------------

## 1.2. Operation Description

The EUT is a USB Dongle with a built-in 2.4GHz transceiver. The EUT operation frequency is 2.405GHz-2.477GHz. The signals modulated by  $\pi/4$  DQPSK (Differential Quadrature Phase Shift Keying) are transmitted from the Printed on the PCB of the EUT.


### 1.3. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

	Product	Manufacturer	Model No.	Serial No.	FCC ID	Power Cord
1.	Notebook PC	ASUS	L4000L	37NP067733	DoC	Non-Shielded, 1.8m

	Signal Cable Type	Signal Cable Description
A.	USB Cable	Shielded, 1.5m
B.	Controller Cable	Non-Shielded, 0.3m
C.	USB Cable	Shielded, 1.5m

### 1.4. Configuration of Test System

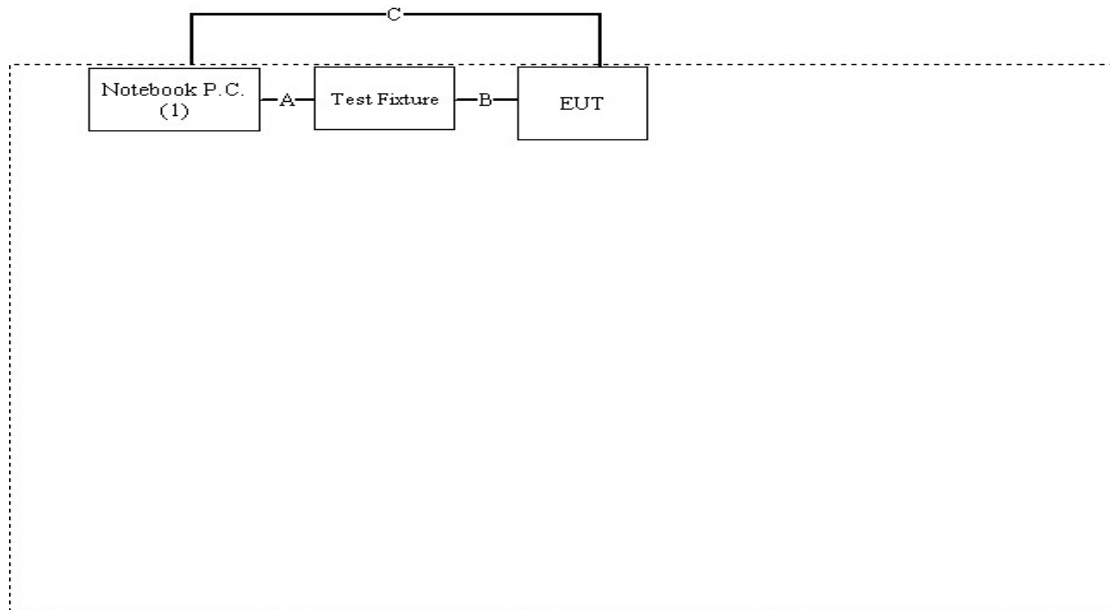

### 1.5. EUT Exercise Software

- (1) Setup the EUT as shown in section 1.4.
- (2) Connect the EUT to a notebook via a USB.
- (3) Execute Avnera Wireless.exe on the notebook.
- (4) Double-click “Audio Suite Ver1.67” and select USB as a primary connection interface.
- (5) Setup the test channel.
- (6) Presses “Apply” to start the continuous transmit.
- (7) Verify that the EUT works correctly.

**1.6. Test Facility**

Ambient conditions in the laboratory:

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	20-35
Humidity (%RH)	25-75	50-65
Barometric pressure (mbar)	860-1060	950-1000

Site Description: File on  
 Federal Communications Commission  
 FCC Engineering Laboratory  
 7435 Oakland Mills Road  
 Columbia, MD 21046  
 Registration Number: 92195



Accreditation on NVLAP  
 NVLAP Lab Code: 200533-0



Site Name: Quietek Corporation

Site Address: No. 5-22, Ruei-Shu Valley, Ruei-Ping Tsuen,  
 Lin-Kou Shiang, Taipei,  
 Taiwan, R.O.C.  
 TEL: 886-2-8601-3788 / FAX : 886-2-8601-3789  
 E-Mail : [service@quietek.com](mailto:service@quietek.com)

FCC Accreditation Number: TW1014





## 2. Conducted Emission


### 2.1. Test Equipment

The following test equipment are used during the conducted emission test:

Item	Instrument	Manufacturer	Type No./Serial No	Last Cal.	Remark
1	Test Receiver	R & S	ESCS 30/825442/17	May, 2009	
2	L.I.S.N.	R & S	ESH3-Z5/825016/6	May, 2009	EUT
3	L.I.S.N.	Kyoritsu	KNW-407/8-1420-3	May, 2009	Peripherals
4	Pulse Limiter	R & S	ESH3-Z2	May, 2009	
5	No.1 Shielded Room			N/A	

Note: All instruments are calibrated every one year.

### 2.2. Test Setup

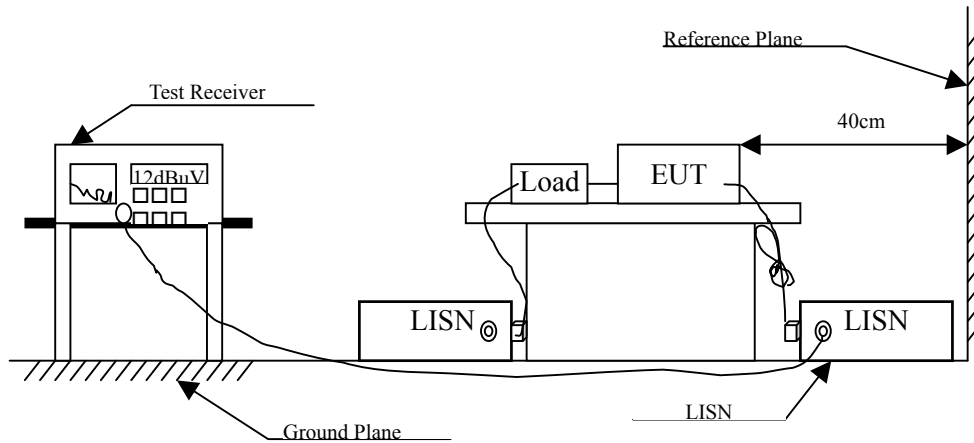

### 2.3. Limits

FCC Part 15 Subpart C Paragraph 15.207 (dBuV) Limit		
Frequency MHz	Limits	
	QP	AV
0.15 - 0.50	66-56	56-46
0.50-5.0	56	46
5.0 - 30	60	50

Remarks: In the above table, the tighter limit applies at the band edges.

## 2.4. Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm /50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2003 on conducted measurement.

Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

## 2.5. Uncertainty

$\pm 2.26$  dB

## 2.6. Test Result of Conducted Emission

Product : USB Dongle  
 Test Item : Conducted Emission Test  
 Power Line : Line 1  
 Test Mode : Mode 1: Transmitter (2441MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV	Margin dB	Limit dBuV
<b>LINE 1</b>					
<b>Quasi-Peak</b>					
0.177	9.816	43.360	53.176	-12.053	65.229
0.193	9.821	41.090	50.911	-13.860	64.771
0.212	9.828	37.340	47.168	-17.061	64.229
0.263	9.830	34.520	44.350	-18.421	62.771
0.302	9.830	33.970	43.800	-17.857	61.657
0.599	9.827	30.420	40.247	-15.753	56.000
<b>Average</b>					
0.177	9.816	33.990	43.806	-11.423	55.229
0.193	9.821	30.320	40.141	-14.630	54.771
0.212	9.828	24.580	34.408	-19.821	54.229
0.263	9.830	31.060	40.890	-11.881	52.771
0.302	9.830	32.160	41.990	-9.667	51.657
0.599	9.827	26.120	35.947	-10.053	46.000

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. "■" means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Product : USB Dongle  
 Test Item : Conducted Emission Test  
 Power Line : Line 2  
 Test Mode : Mode 1: Transmitter (2441MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV	Margin dB	Limit dBuV
<b>LINE 2</b>					
<b>Quasi-Peak</b>					
0.158	9.871	46.400	56.271	-9.500	65.771
0.178	9.864	43.460	53.324	-11.876	65.200
0.198	9.860	40.120	49.980	-14.649	64.629
0.258	9.857	34.320	44.177	-18.737	62.914
0.298	9.850	35.350	45.200	-16.571	61.771
0.418	9.840	32.310	42.150	-16.193	58.343
<b>Average</b>					
0.158	9.871	35.640	45.511	-10.260	55.771
0.178	9.864	33.540	43.404	-11.796	55.200
0.198	9.860	29.180	39.040	-15.589	54.629
0.258	9.857	30.230	40.087	-12.827	52.914
0.298	9.850	34.230	44.080	-7.691	51.771
0.418	9.840	16.530	26.370	-21.973	48.343

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. "█" means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

### 3. Radiated Emission

#### 3.1. Test Equipment


The following test equipment are used during the radiated emission test:

Test Site		Equipment	Manufacturer	Model No./Serial No.	Last Cal.
<input type="checkbox"/> Site # 1		Test Receiver	R & S	ESVS 10 / 834468/003	May, 2009
		Spectrum Analyzer	Advantest	R3162/ 00803480	May, 2009
		Pre-Amplifier	Advantest	BB525C/ 3307A01812	May, 2009
		Bilog Antenna	SCHAFFNER	CBL6112B / 2697	Sep., 2009
<input type="checkbox"/> Site # 2		Test Receiver	R & S	ESCS 30 / 836858 / 022	May, 2009
		Spectrum Analyzer	Advantest	R3162 / 100803466	May, 2009
		Pre-Amplifier	Advantest	BB525C/3307A01814	May, 2009
		Bilog Antenna	SCHAFFNER	CBL6112B / 2705	May, 2009
		Horn Antenna	ETS	3115 / 0005-6160	Sep., 2009
		Pre-Amplifier	QTK	QTK-AMP-01/ 0001	May, 2009
<input checked="" type="checkbox"/> Site # 3	X	Test Receiver	R & S	ESI 26 / 838786/004	May, 2009
	X	Spectrum Analyzer	Agilent	E4407B / US39440758	May, 2009
	X	Bilog Antenna	SCHAFFNER	CBL6112B / 2697	May, 2009
	X	Horn Antenna	Schwarzbeck	BBHA9120D / 305, 306	July, 2009
	X	Horn Antenna	Schwarzbeck	BBHA9170 / 208, 209	July, 2009
	X	Pre-Amplifier	QTK	QTK-AMP-01 / 0001	July, 2009
	X	Pre-Amplifier	QTK	QTK-AMP-03 / 0003	May, 2009
	X	Pre-Amplifier	HP	8449B / 3008A01123	July, 2009


- Note:
1. All equipments are calibrated every one year.
  2. Test equipments marked by "X" are used to measure the final test results.

### 3.2. Test Setup

Below 1GHz

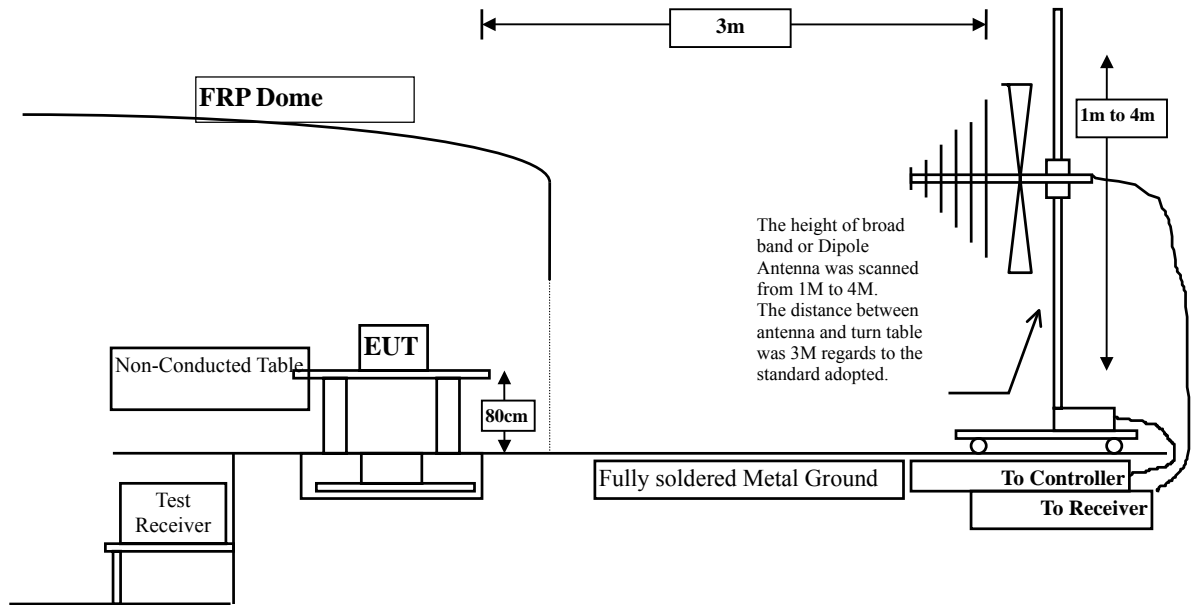

Above 1GHz

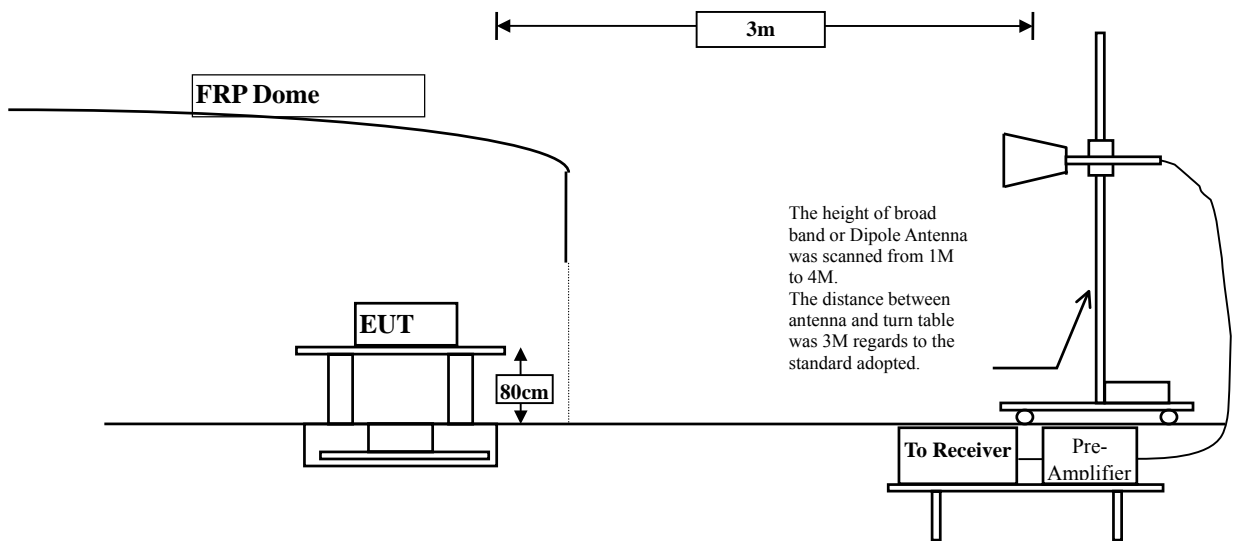

### 3.3. Limits

#### ➤ Fundamental and Harmonics Emission Limits

<b>FCC Part 15 Subpart C Paragraph 15.249 Limits</b>				
Frequency MHz	Field Strength of Fundamental		Field Strength of Harmonics	
	(mV/m @3m)	(dBuV/m @3m)	(uV/m @3m)	(dBuV/m @3m)
902-928	50	94	500	54
2400-2483.5	50	94	500	54
5725-5875	50	94	500	54

- Remarks :
1. RF Voltage (dBuV/m) = 20 log RF Voltage (uV/m)
  2. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

#### ➤ General Radiated Emission Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

<b>FCC Part 15 Subpart C Paragraph 15.209 Limits</b>		
Frequency MHz	uV/m @3m	dBuV/m@3m
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

- Remarks :
1. RF Voltage (dBuV/m) = 20 log RF Voltage (uV/m)
  2. In the Above Table, the tighter limit applies at the band edges.
  3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

### 3.4. Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.4: 2003 on radiated measurement.

The resolution bandwidth below 1GHz setting on the field strength meter is 120 kHz and above 1GHz is 1MHz.

Radiated emission measurements below 1GHz are made using broadband Bilog antenna and above 1GHz are made using Horn Antennas.

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with the measurement antenna kept pointed at the source of the emission both in azimuth and elevation, with the polarization of the antenna oriented for maximum response. The antenna is pointed at an angle towards the source of the emission, and the EUT is rotated in both height and polarization to maximize the measured emission. The emission is kept within the illumination area of the 3 dB beamwidth of the antenna.

The worst radiated emission is measured on the Final Measurement.

The frequency range from 30MHz to 10th harmonics is checked.

### 3.5. Uncertainty

± 3.9 dB above 1GHz

± 3.8 dB below 1GHz



### 3.6. Test Result of Radiated Emission

Product : USB Dongle  
 Test Item : Fundamental Radiated Emission  
 Test Site : No.3OATS  
 Test Mode : Mode 1: Transmitter (2405 MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
<b>Horizontal</b>					
<b>Peak Detector</b>					
Channel 02					
2405.000	-2.303	90.860	88.557	-25.443	114.000
<b>Average Detector</b>					
Channel 02					
2405.000	-2.303	79.800	77.497	-16.503	94.000
<b>Vertical</b>					
<b>Peak Detector</b>					
Channel 02					
2405.000	-2.303	89.750	87.447	-26.553	114.000
<b>Average Detector</b>					
Channel 02					
2405.000	-2.303	78.600	76.297	-17.703	94.000

Note:

1. Measurement Level = Reading Level + Correct Factor.
2. Correct Factor = Antenna Factor + Cable Loss – PreAMP.

Product : USB Dongle  
 Test Item : Fundamental Radiated Emission  
 Test Site : No.3OATS  
 Test Mode : Mode 1: Transmitter (2441 MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
<b>Horizontal</b>					
<b>Average Detector</b>					
Channel 20					
2441.000	-2.128	88.350	86.221	-27.779	114.000
<b>Average Detector</b>					
Channel 20					
2441.000	-2.128	79.320	77.191	-16.809	94.000
<b>Vertical</b>					
<b>Peak Detector</b>					
Channel 20					
2441.000	-2.128	89.380	87.251	-26.749	114.000
<b>Average Detector</b>					
Channel 20					
2441.000	-2.128	78.230	76.101	-17.899	94.000

Note:

1. Measurement Level = Reading Level + Correct Factor.
2. Correct Factor = Antenna Factor + Cable Loss – PreAMP.

Product : USB Dongle  
 Test Item : Fundamental Radiated Emission  
 Test Site : No.3OATS  
 Test Mode : Mode 1: Transmitter (2477 MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
<b>Horizontal</b>					
<b>Average Detector</b>					
Channel 38					
2477.000	-1.966	88.540	86.575	-27.425	114.000
<b>Average Detector</b>					
Channel 38					
2477.000	-1.966	78.490	76.525	-17.475	94.000
<b>Vertical</b>					
<b>Peak Detector</b>					
Channel 38					
2477.000	-1.966	88.250	86.285	-27.715	114.000
<b>Average Detector</b>					
Channel 38					
2477.000	-1.966	77.630	75.665	-18.335	94.000

Note:

1. Measurement Level = Reading Level + Correct Factor.
2. Correct Factor = Antenna Factor + Cable Loss – PreAMP.

Product : USB Dongle  
 Test Item : Harmonic Radiated Emission Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmitter (2405 MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Peak Limit dBuV/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
4810.000	3.681	42.390	46.071	-27.899	74.000
7215.000	9.381	43.150	52.531	-21.439	74.000
9620.000	11.834	36.360	48.194	-25.776	74.000
<b>Average Detector</b>					
--					
<b>Vertical</b>					
<b>Peak Detector:</b>					
4810.000	3.681	42.650	46.331	-27.639	74.000
7215.000	9.381	41.390	50.771	-23.199	74.000
9620.000	11.834	36.640	48.474	-25.496	74.000
<b>Average Detector</b>					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Receiver setting (Peak Detector) : RBW:1MHz; VBW:1MHz; Span:100MHz ◦
3. Receiver setting (AVG Detector) : RBW:1MHz; VBW:30Hz; Span:20MHz ◦
4. Emission Level = Reading Level + Correct Factor.
5. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Product : USB Dongle  
 Test Item : Harmonic Radiated Emission Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmitter (2441 MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Peak Limit dBuV/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
4882.000	3.921	40.040	43.961	-30.009	74.000
7323.000	9.657	39.100	48.757	-25.213	74.000
9764.000	11.798	36.380	48.178	-25.792	74.000
<b>Average Detector</b>					
--					
<b>Vertical</b>					
<b>Peak Detector:</b>					
4882.000	3.921	40.460	44.381	-29.589	74.000
7323.000	9.657	40.270	49.927	-24.043	74.000
9764.000	11.798	36.160	47.958	-26.012	74.000
<b>Average Detector</b>					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Receiver setting (Peak Detector) : RBW:1MHz; VBW:1MHz; Span:100MHz ◦
3. Receiver setting (AVG Detector) : RBW:1MHz; VBW:30Hz; Span:20MHz ◦
4. Emission Level = Reading Level + Correct Factor.
5. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Product : USB Dongle  
 Test Item : Harmonic Radiated Emission Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmitter (2477 MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Peak Limit dBuV/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
4954.000	4.176	39.910	44.086	-29.884	74.000
7431.000	9.933	39.040	48.973	-24.997	74.000
9908.000	11.851	36.090	47.942	-26.028	74.000
<b>Average Detector</b>					
--					
<b>Vertical</b>					
<b>Peak Detector:</b>					
4954.000	4.176	41.020	45.196	-28.774	74.000
7431.000	9.933	39.300	49.233	-24.737	74.000
9908.000	11.851	36.060	47.912	-26.058	74.000
<b>Average Detector</b>					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Receiver setting (Peak Detector) : RBW:1MHz; VBW:1MHz; Span:100MHz ◦
3. Receiver setting (AVG Detector) : RBW:1MHz; VBW:30Hz; Span:20MHz ◦
4. Emission Level = Reading Level + Correct Factor.
5. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Product : USB Dongle  
 Test Item : General Radiated Emission Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmitter (2441 MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
	Factor	Level	Level		
MHz	dB	dBuV	dBuV/m	dB	dBuV/m
<b>Horizontal</b>					
431.580	17.742	17.208	34.950	-11.050	46.000
495.600	18.480	17.058	35.538	-10.462	46.000
592.600	20.032	15.564	35.596	-10.404	46.000
656.620	20.708	13.211	33.919	-12.081	46.000
815.700	21.623	11.519	33.142	-12.858	46.000
916.580	22.644	10.936	33.580	-12.420	46.000
<b>Vertical</b>					
480.080	18.459	11.220	29.679	-16.321	46.000
528.580	18.993	15.137	34.130	-11.870	46.000
623.640	21.210	11.608	32.818	-13.182	46.000
710.940	21.452	8.716	30.168	-15.832	46.000
817.640	21.453	9.244	30.697	-15.303	46.000
918.520	24.157	7.551	31.708	-14.292	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. "■" means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

## 4. Band Edge

### 4.1. Test Equipment

The following test equipments are used during the band edge tests:

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X	Test Receiver	R & S	ESI 26 / 838786/004	May, 2009
X	Spectrum Analyzer	Agilent	E4407B / US39440758	May, 2009
X	Bilog Antenna	SCHAFFNER	CBL6112B / 2697	May, 2009
X	Horn Antenna	Schwarzbeck	BBHA9120D / 305, 306	July, 2009
X	Horn Antenna	Schwarzbeck	BBHA9170 / 208, 209	July, 2009
X	Pre-Amplifier	QTK	QTK-AMP-01 / 0001	July, 2009
X	Pre-Amplifier	QTK	QTK-AMP-03 / 0003	May, 2009
X	Pre-Amplifier	HP	8449B / 3008A01123	July, 2009

OATS No.3


- Note:
1. All equipments are calibrated every one year.
  2. The test equipments marked by "X" are used to measure the final test results.



**4.2. Test Setup**

**RF Radiated Measurement:**

Above 1GHz

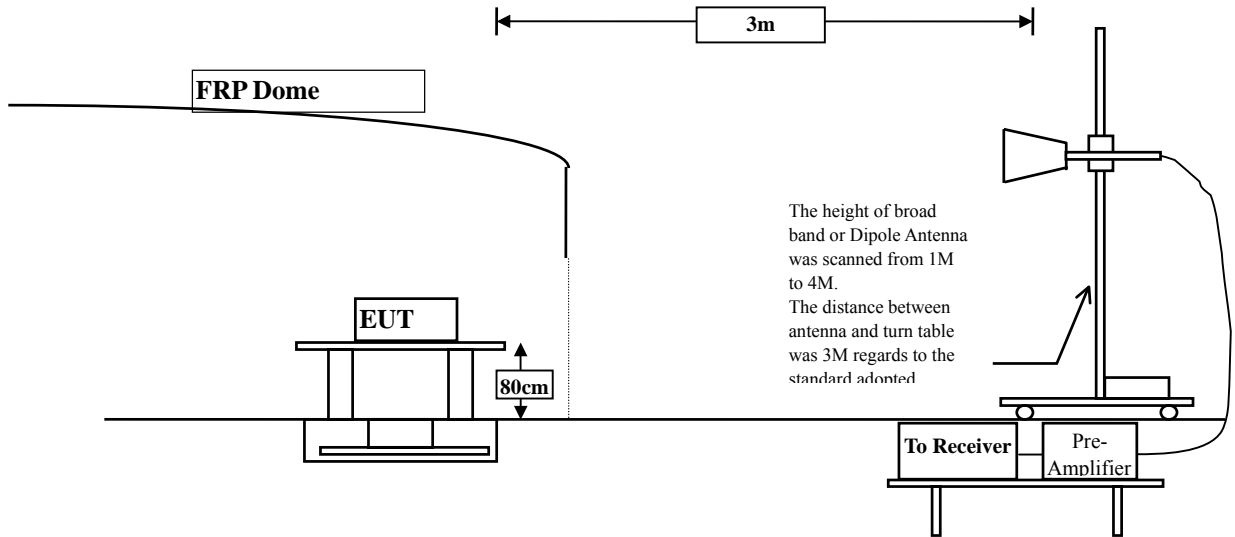

**4.3. Limit**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 50 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

#### 4.4. Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.4:2003 on radiated measurement.

The bandwidth below 1GHz setting on the field strength meter (R&S Test Receiver ESCS 30 )is 120 kHz, above 1GHz are 1 MHz.

#### 4.5. Uncertainty

Conducted is  $\pm 1.27$  dB

Radiated is  $\pm 3.9$  dB.


#### 4.6. Test Result of Band Edge

Product : USB Dongle  
 Test Item : Band Edge Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmitter (2405 MHz)

#### RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
02(Peak)	2389.600	-2.379	42.332	39.953	74.000	54.000	Pass
02(Average)	--	--	--	--	74.000	54.000	Pass

**Figure Channel 02: Horizontal (Peak)**

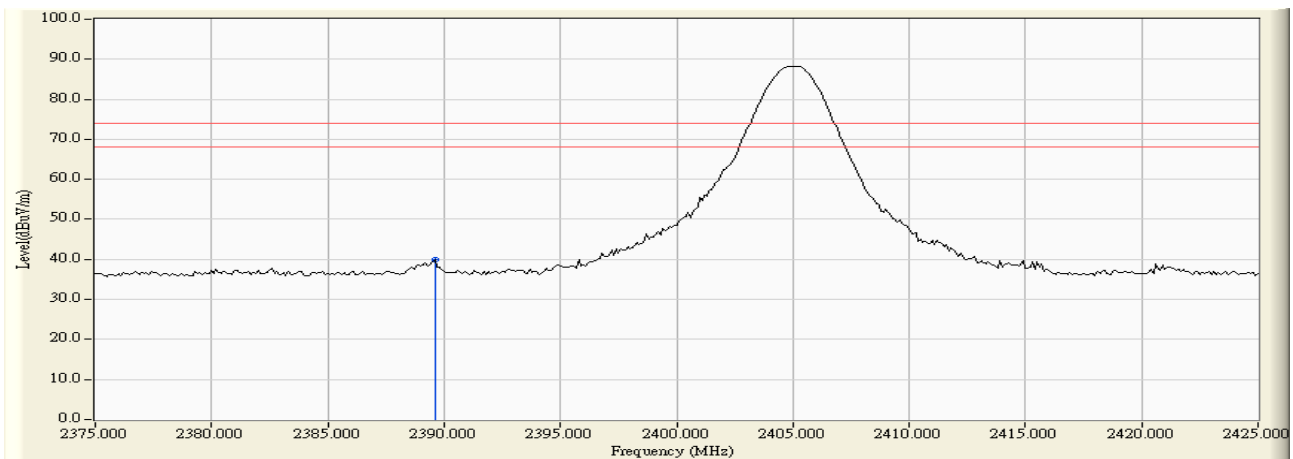

Note:


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : USB Dongle  
 Test Item : Band Edge Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmitter (2405 MHz)

**RF Radiated Measurement (Vertical):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
02(Peak)	2389.700	-2.379	41.924	39.545	74.000	54.000	Pass
02(Average)	--	--	--	--	74.000	54.000	Pass

**Figure Channel 02: Vertical (Peak)**

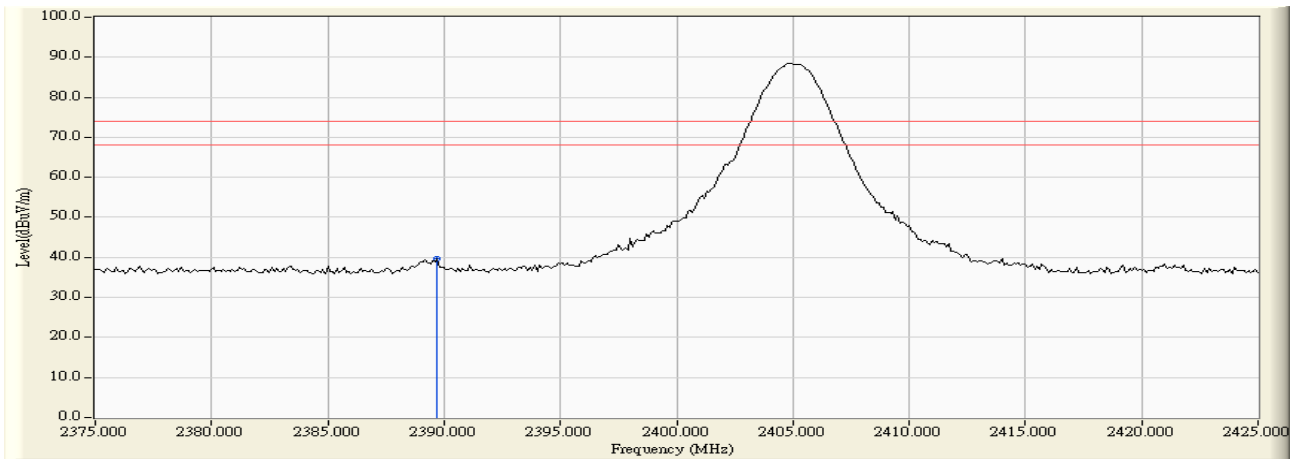

Note:


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : USB Dongle  
 Test Item : Band Edge Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmitter (2477 MHz)

**RF Radiated Measurement (Horizontal):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
38(Peak)	2483.500	-1.937	44.471	42.534	74.000	54.000	Pass
38(Average)	--	--	--	--	74.000	54.000	Pass

**Figure Channel 38: Horizontal (Peak)**

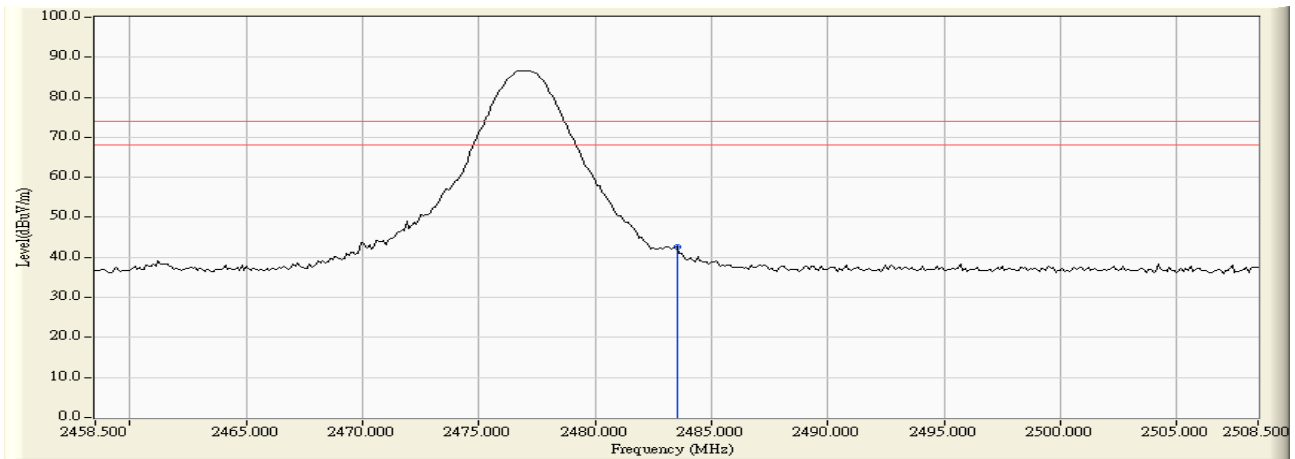

Note:


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : USB Dongle  
 Test Item : Band Edge Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmitter (2477 MHz)

**RF Radiated Measurement (Vertical):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
38(Peak)	2490.200	-1.917	44.853	42.937	74.000	54.000	Pass
38(Average)	--	--	--	--	74.000	54.000	Pass

**Figure Channel 38: Vertical (Peak)**

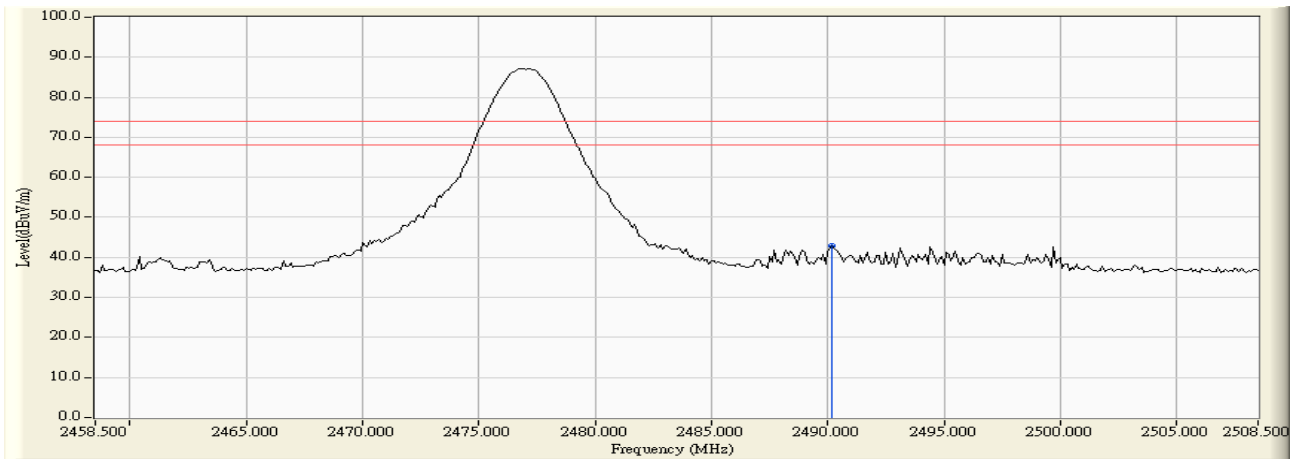

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

## 5. EMI Reduction Method During Compliance Testing

No modification was made during testing.