



FCC 47 CFR PART 15 SUBPART C

TEST REPORT

For

Wireless Bluetooth® Microphone

Model: IBTMC

Brand: SCOSCHE

Test Report Number:

SZ111014B01-RP

Prepared for

Scosche Industries Inc

1550 Pacific Ave, Oxnard, CA 93033, USA

Prepared by

COMPLIANCE CERTIFICATION SERVICES (SHENZHEN) INC.

**No.10-1, Mingkeda Logistics Park, No.18, Huanguan South Rd.,
Guan Lan Town, Baoan District, Shenzhen, China**

TEL: 86-755-28055000

FAX: 86-755-28055221

Issued Date: November 4, 2011



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, A2LA, NVLAP, NIST or any government agencies. The test result of this report relate only to the tested sample identified in this report.



Revision History

Rev.	Issue No.	Revisions	Effect Page	Revised By
00	SZ111014B01-RP	Initial Issue	ALL	Ziva Zhang



TABLE OF CONTENTS

1. TEST RESULT CERTIFICATION	4
2. EUT DESCRIPTION.....	5
3. TEST METHODOLOGY	6
3.1 DESCRIPTION OF TEST MODES	6
4. FACILITIES AND ACCREDITATIONS	7
4.1 FACILITIES.....	7
4.2 ACCREDITATIONS	7
4.3 MEASUREMENT UNCERTAINTY	7
5. SETUP OF EQUIPMENT UNDER TEST	8
5.1 SETUP CONFIGURATION OF EUT	8
5.2 SUPPORT EQUIPMENT	8
6. FCC PART 15.247 REQUIREMENTS	9
6.1 20DB BANDWIDTH.....	9
6.2 PEAK POWER	14
6.3 PEAK POWER SPECTRAL DENSITY.....	16
6.4 BAND EDGES MEASUREMENT	17
6.5 FREQUENCY SEPARATION	27
6.6 NUMBER OF HOPPING FREQUENCY.....	30
6.7 TIME OF OCCUPANCY (DWELL TIME)	33
6.8 SPURIOUS EMISSIONS.....	40
6.9 POWERLINE CONDUCTED EMISSIONS	59



1. TEST RESULT CERTIFICATION

Product: Wireless Bluetooth® Microphone
Model: IBTMC
Brand: SCOSCHE
Tested: October 20, 2011~November 4, 2011
Applicant: **Scosche Industries Inc**
1550 Pacific Ave, Oxnard, CA 93033, USA
Manufacturer: **Sunitec Enterprise Co., Ltd**
No.2, Qilin Road 2, RunTang Ind, Dan-Keng Village Fu Min Community,
Guan-Lan Town, BaoAn District, Shenzhen Guangdong China

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C	No non-compliance noted

We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4:2009 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.207, 15.209 and 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:

Tom Gan
Supervisor of EMC Dept.
Compliance Certification Service Inc.

Reviewed by:

Aven Zhou
Supervisor of Report Dept.
Compliance Certification Service Inc.



2. EUT DESCRIPTION

Product	Wireless Bluetooth® Microphone
Model Number	IBTMC
Brand	SCOSCHE
Model Discrepancy	N/A
Identify Number	SZ111014B01-RP
Power Supply	DC3.7V
Received Date	October 14, 2011
Frequency Range	2402 ~ 2480 MHz
Transmit Power	GFSK :9.73dBm 8DPSK :8.95dBm
Modulation Technique	FHSS (GFSK for 1Mbps, $\pi/4$ -DQPSK for 2Mbps, 8DPSK for 3Mbps)
Number of Channels	79 Channels
Antenna Specification	3216 Ceramic Chip Antenna with 0 dBi gain(Max)
Temperature Range	-20°C ~ +70°C

Note: This submittal(s) (test report) is intended for FCC ID: IKQIBTMC filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.



3. TEST METHODOLOGY

3.1 DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition.

Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

The following test mode(s) were scanned during the preliminary test below 1G:

Test Item	Test mode	Worse mode
Conducted Emission	Mode 1: Charging	<input checked="" type="checkbox"/>
Radiated Emission	Mode 1: Normal Link	<input checked="" type="checkbox"/>

Above 1G, Channel Low (2402MHz) 、Mid (2441MHz) and High (2480MHz) were chosen for full testing for GFSK.



4. FACILITIES AND ACCREDITATIONS

4.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

☒ **No.10-1, Mingkeda Logistics Park, No.18, Huanguan South Rd.,
Guan Lan Town, Baoan District, Shenzhen, China**

The sites are constructed in conformance with the requirements of ANSI C63.4:2009, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

4.2 ACCREDITATIONS

Our laboratories are accredited and approved by the following accreditation body according to ISO/IEC 17025.

USA	A2LA
Taiwan	TAF

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

USA	FCC
Japan	VCCI(C-3478, R-3135, T-625)
Canada	INDUSTRY CANADA
Taiwan	BSMI
Norway	Nemko

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.ccsrf.com>

4.3 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Uncertainty
Conducted emissions	9kHz~30MHz	+/- 3.18dB
Radiated emissions	30MHz ~ 200MHz	+/- 3.79dB
	200MHz ~1000MHz	+/- 3.62dB
	Above 1000MHz	+/- 5.04dB
Band Edges	+/-0.182 dB	

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

The measured result is above (below) the specification limit by a margin less than the measurement uncertainty; it is therefore not possible to state compliance based on the 95% level of confidence. However, the result indicates that compliance (non-compliance) is more probable than non-compliance) with the specification limit.



5. SETUP OF EQUIPMENT UNDER TEST

5.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

5.2 SUPPORT EQUIPMENT

No.	Equipment	Model No.	Serial No.	FCC ID	Brand	Data Cable	Power Cord
1	Notebook	Studio 1435	5315448686549	N/A	DELL	Shielded 1.50m	Unshielded 1.80m

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.



6. FCC PART 15.247 REQUIREMENTS

6.1 20DB BANDWIDTH


None; for reporting purpose only.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	E4446A	US44300399	03/19/2011	03/19/2012

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST CONFIGURATION

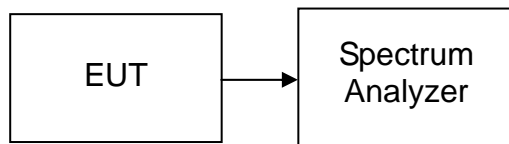

TEST PROCEDURE

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT, then connect a low loss RF cable from antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW=30kHz, VBW=30kHz, Span=3MHz, Sweep = auto.
4. Mark the peak frequency and 20dB (upper and lower) frequency.
5. Repeat until all the test channels are investigated.

TEST RESULTS

No non-compliance noted




Test plot (GFSK)

20dB Bandwidth (CH Low)

Agilent 07:47:35 Oct 20, 2011

R T

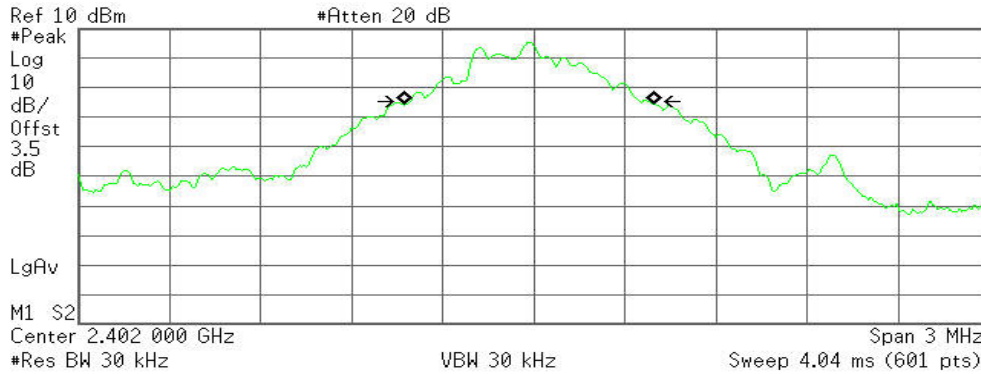

Occupied Bandwidth
819.5506 kHz


Occ BW % Pwr 99.00 %
x dB -20.00 dB

Transmit Freq Error -16.616 kHz
x dB Bandwidth 787.102 kHz

20dB Bandwidth (CH Mid)

Agilent 07:48:17 Oct 20, 2011

R T

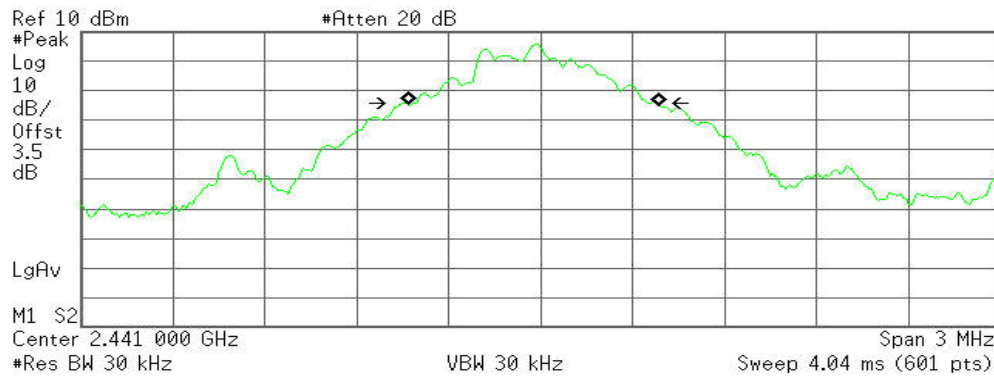

Occupied Bandwidth
816.4632 kHz

Occ BW % Pwr 99.00 %
x dB -20.00 dB


Transmit Freq Error -20.872 kHz
x dB Bandwidth 832.590 kHz



20dB Bandwidth (CH High)

Agilent 07:49:12 Oct 20, 2011

R T

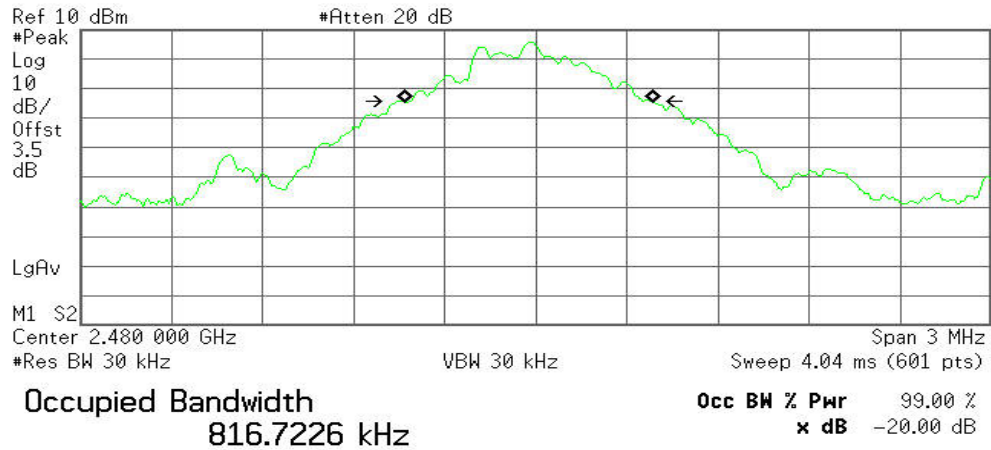

Transmit Freq Error -21.257 kHz
x dB Bandwidth 838.006 kHz




Test plot (8DPSK)

20dB Bandwidth (CH Low)

Agilent 07:52:35 Oct 20, 2011

R T

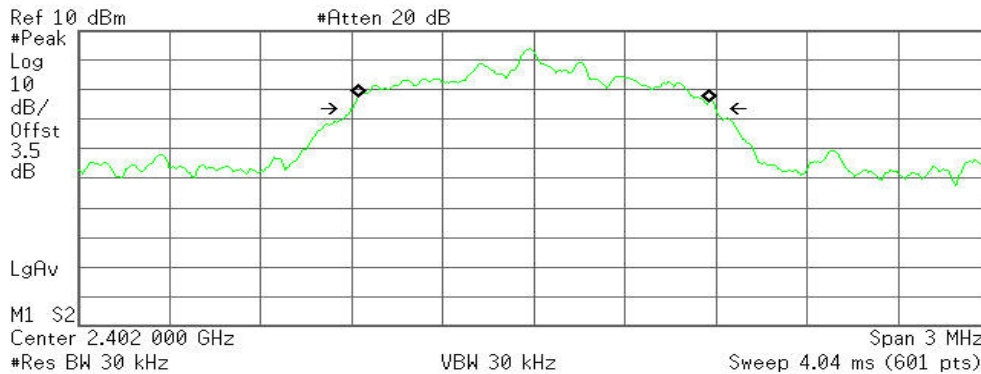

Occupied Bandwidth
1.1486 MHz


Occ BW % Pwr 99.00 %
x dB -20.00 dB

Transmit Freq Error -1.534 kHz
x dB Bandwidth 1.197 MHz

20dB Bandwidth (CH Mid)

Agilent 07:52:06 Oct 20, 2011

R T

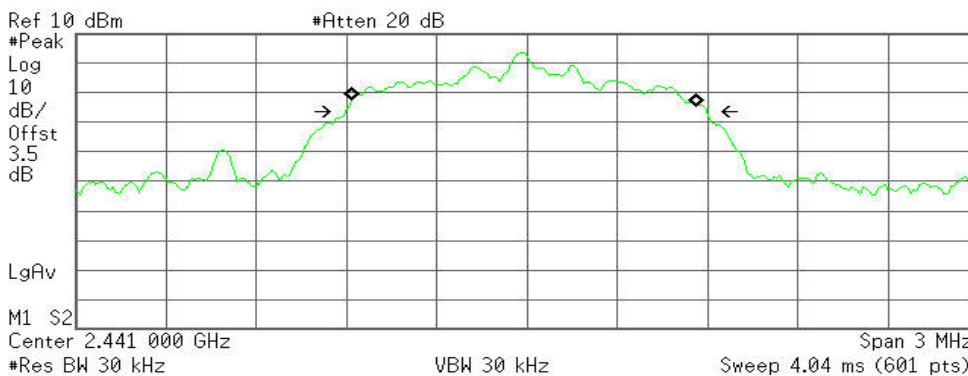

Occupied Bandwidth
1.1391 MHz

Occ BW % Pwr 99.00 %
x dB -20.00 dB


Transmit Freq Error -10.151 kHz
x dB Bandwidth 1.202 MHz



20dB Bandwidth (CH High)

Agilent 07:51:37 Oct 20, 2011

R T

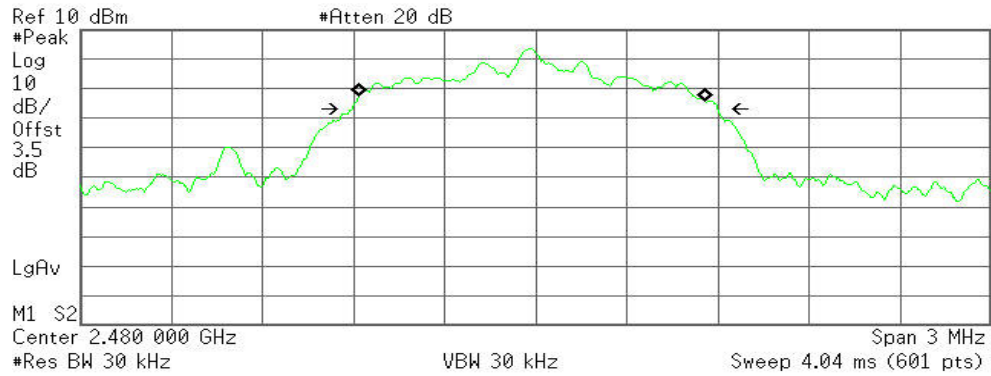

Occupied Bandwidth
1.1358 MHz

Occ BW % Pwr 99.00 %
x dB -20.00 dB

Transmit Freq Error -11.259 kHz
x dB Bandwidth 1.206 MHz



6.2 PEAK POWER

LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:


1. For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.
2. Except as shown in paragraphs (b)(3) (i), (ii) and (iii) of this section, if transmitting antennas of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6dBi.
3. The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Power Meter	Anritsu	ML2487A	6K00001491	03/19/2011	03/19/2012
Spectrum Analyzer	Agilent	E4446A	US44300399	03/19/2011	03/19/2012

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration

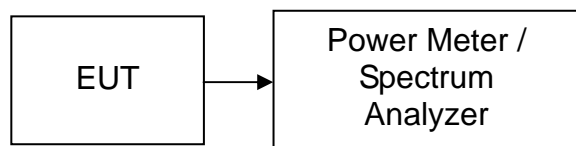

TEST PROCEDURE

The transmitter output is connected to the RF Power Meter. The RF Power Meter is set to the peak power detection.

**TEST RESULTS***No non-compliance noted***Test Data****GFSK**

Channel	Frequency (MHz)	Reading Power (dBm)	Factor (dB)	Output Power (dBm)	Output Power (W)	Limit (mW)	Result
Low	2402	5.47	3.50	8.97	0.00789	125	PASS
Md	2441	6.02	3.50	9.52	0.00895		PASS
Hgh	2480	6.23	3.50	9.73	0.00940		PASS

8DPSK

Channel	Frequency (MHz)	Reading Power (dBm)	Factor (dB)	Output Power (dBm)	Output Power (W)	Limit (mW)	Result
Low	2402	5.45	3.50	8.95	0.00785	125	PASS
Md	2441	5.20	3.50	8.70	0.00741		PASS
Hgh	2480	4.61	3.50	8.11	0.00647		PASS



6.3 PEAK POWER SPECTRAL DENSITY

LIMIT


1. For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.
2. The direct sequence operating of the hybrid system, with the frequency hopping operation turned off, shall comply with the power density requirements of paragraph (d) of this section.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	E4446A	US44300399	03/19/2011	03/19/2012

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration

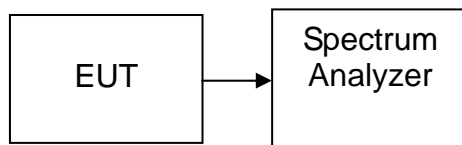

TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = 3kHz, VBW = 10kHz, Span = 300kHz, Sweep=100s
4. Record the max. reading.
5. Repeat the above procedure until the measurements for all frequencies are completed.

TEST RESULTS

Not applicable. Since EUT is the Bluetooth device.



6.4 BAND EDGES MEASUREMENT


LIMIT

According to §15.247(c), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

MEASUREMENT EQUIPMENT USED

Radiated Emission Test Site 966 (2)						
Name of Equipment		Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
PSA	Series Spectrum Analyzer	Agilent	E4446A	US44300399	03/19/2011	03/19/2012
	Amplifier	MITEQ	AM-1604-3000	1411843	03/18/2011	03/18/2012
	Turn Table	EMCO	2081-1.21	N/A	N.C.R	N.C.R
	Controller	CT	N/A	N/A	N.C.R	N.C.R
	High Noise Amplifier	Agilent	8449B	3008A01838	03/18/2011	03/18/2012
	Bilog Antenna	SCHAFFNER	CBL6143	5082	06/03/2011	06/03/2012
	Horn Antenna	SCHWARZBECK	BBHA9120D	D286	03/19/2011	03/19/2012
	Loop Antenna	A、R、A	PLA-1030/B	1029	03/19/2011	03/19/2012
	Temp. / Humidity Meter	VICTOR	VC230	N/A	03/31/2011	03/31/2012
	Antenna Tower	SUNOL	TLT2	N/A	N.C.R	N.C.R
	Test S/W	FARAD	LZ-RF / CCS-SZ-3A2			

Test Configuration

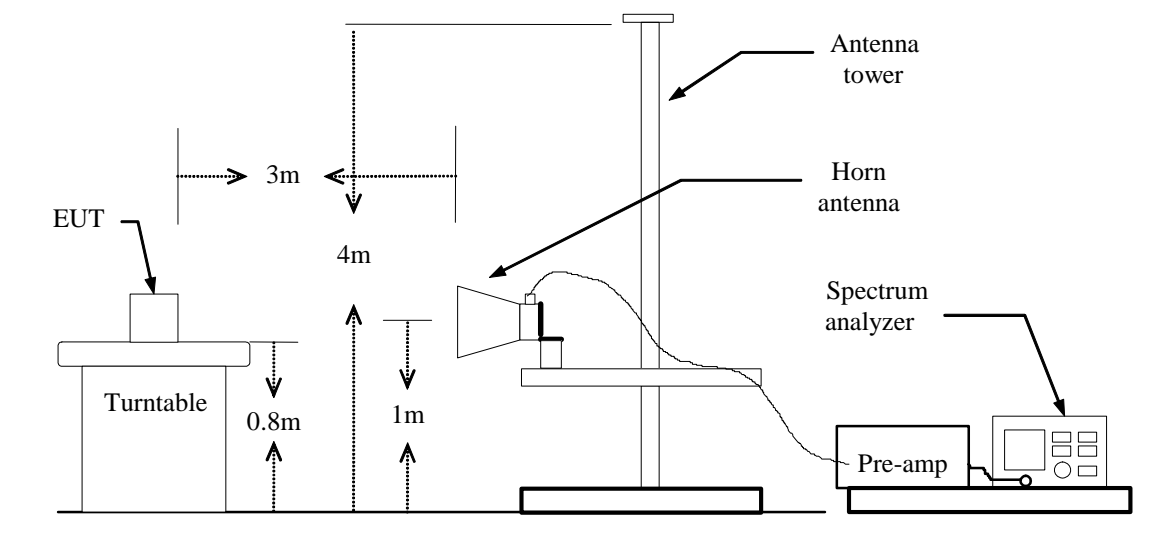



TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

TEST RESULTS

Refer to attach spectrum analyzer data chart.



Test Data (GFSK)


Band Edges (CH-Low)

Detector mode: Peak

Polarity: Vertical

Agilent 15:16:08 Nov 2, 2011

R T

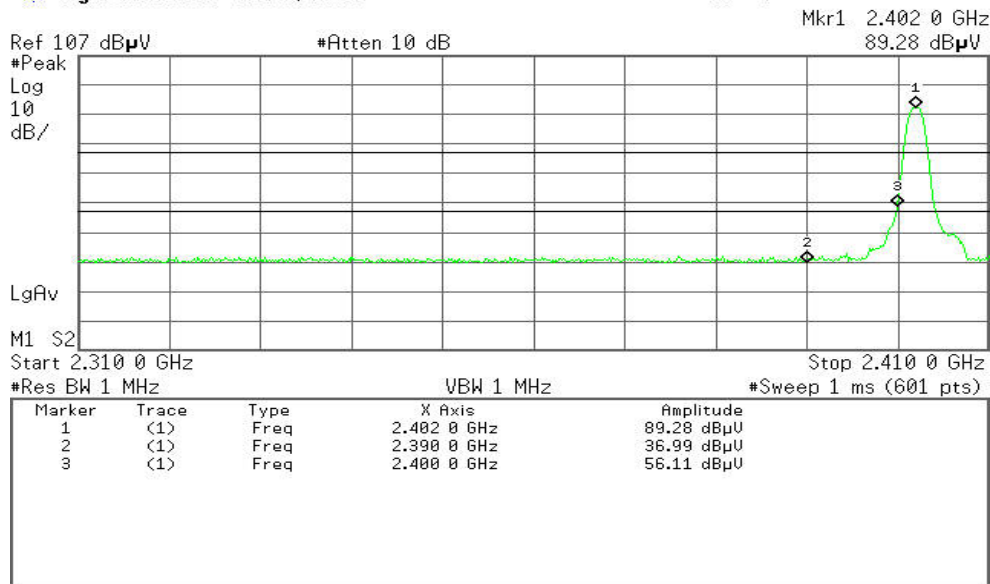


Detector mode: Average

Polarity: Vertical

Agilent 15:16:43 Nov 2, 2011

R T

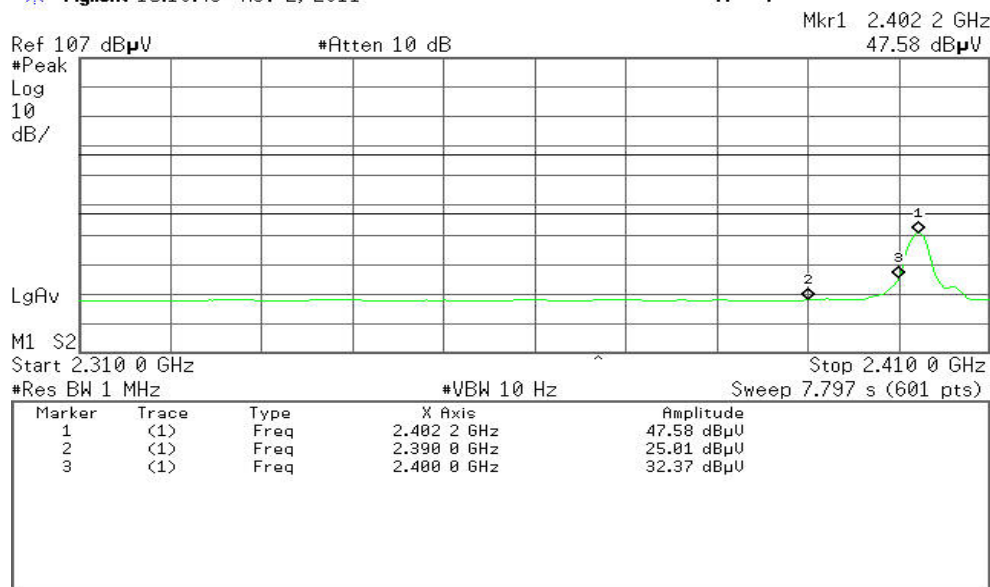




Detector mode: Peak

Polarity: Horizontal

Agilent 15:12:49 Nov 2, 2011

R T

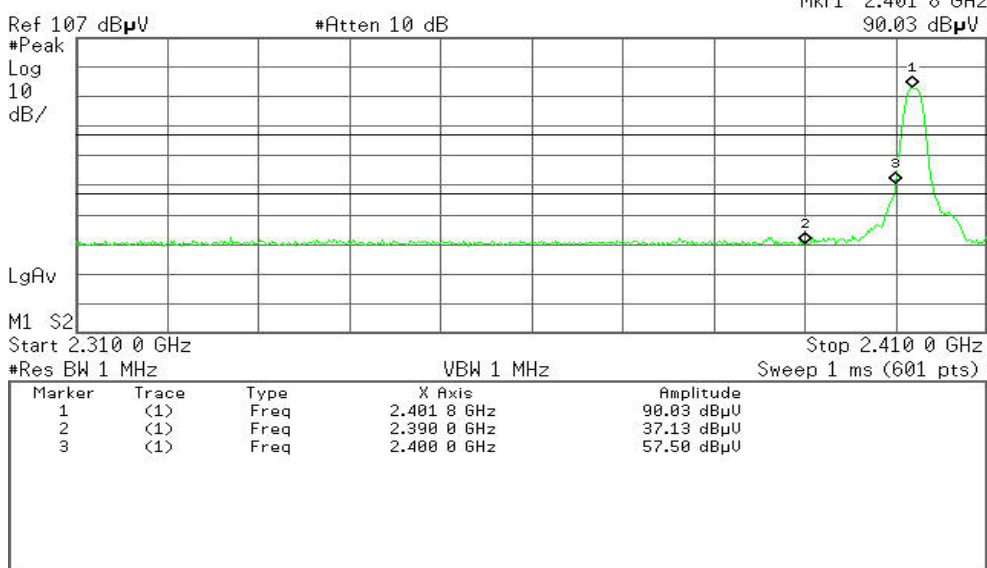


Detector mode: Average

Polarity: Horizontal

Agilent 15:13:19 Nov 2, 2011

R T

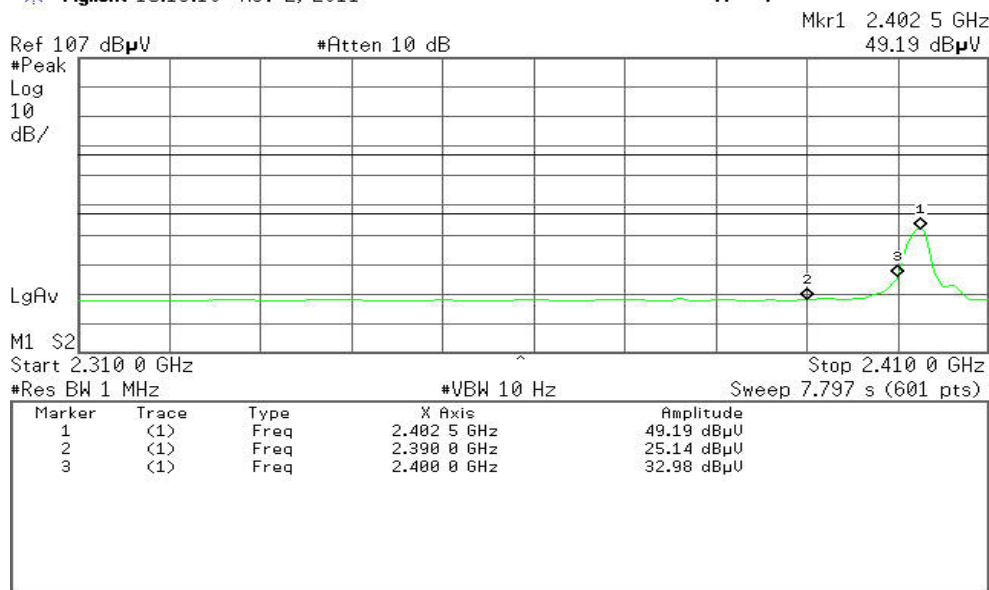



Band Edges (CH-High)


Detector mode: Peak

Polarity: Vertical

Agilent 14:32:35 Nov 2, 2011

R T

Mkr1 2.479 95 GHz
85.02 dBμV

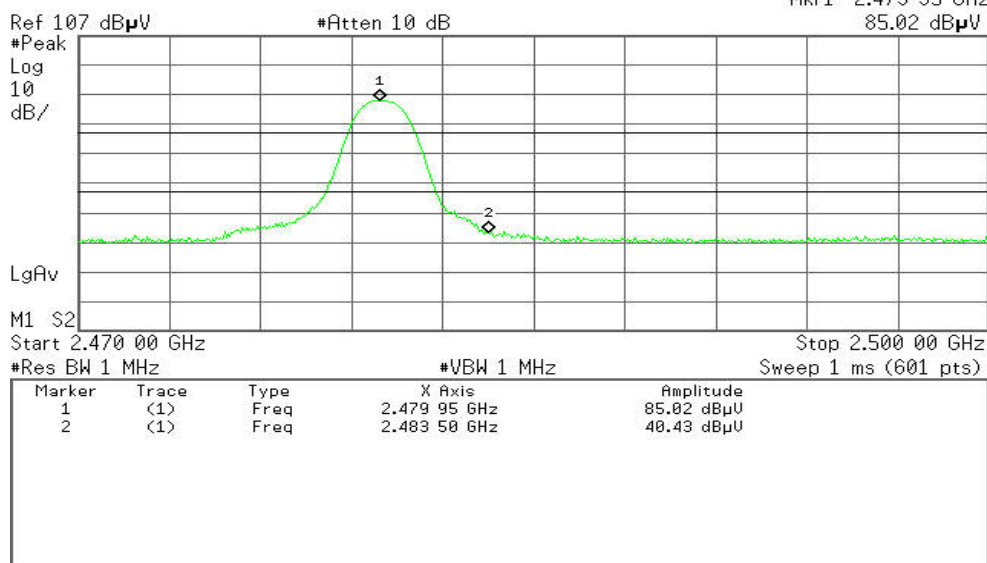


Detector mode: Average

Polarity: Vertical

Agilent 14:34:53 Nov 2, 2011

R T

Mkr1 2.479 45 GHz
47.57 dBμV

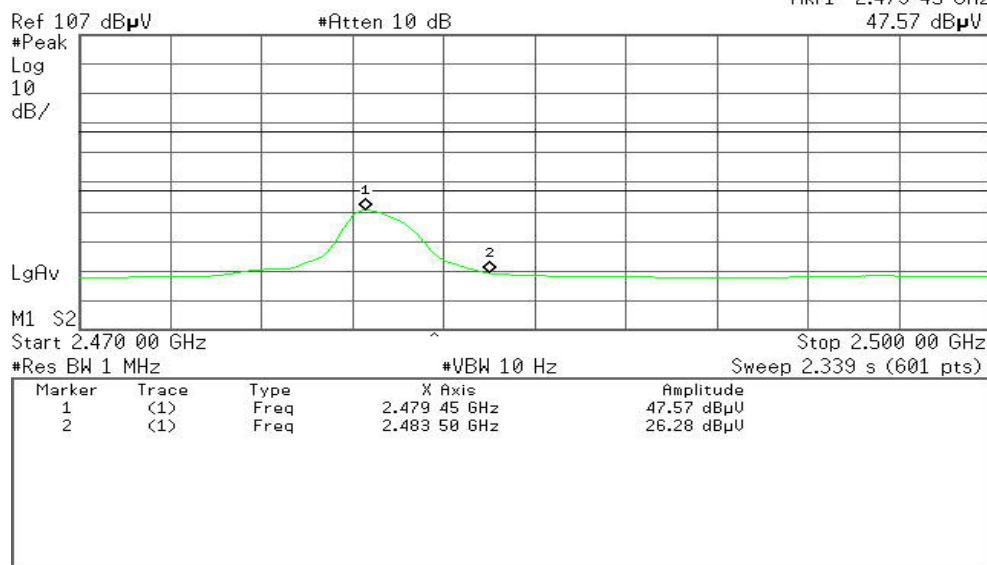




Detector mode: Peak

Polarity: Horizontal

Agilent 14:38:34 Nov 2, 2011

R T

Mkr1 2.480 05 GHz
86.76 dBμV

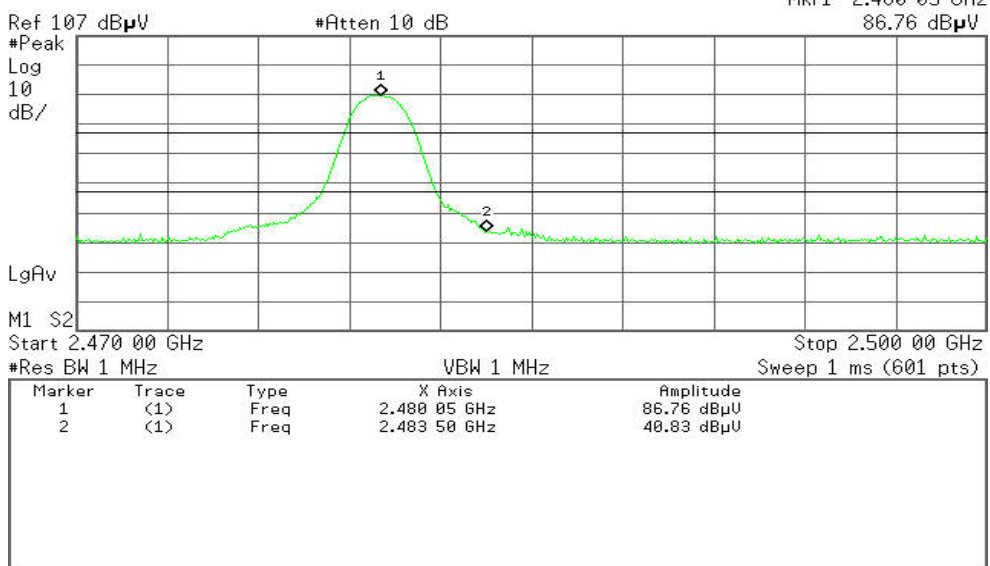


Detector mode: Average

Polarity: Horizontal

Agilent 14:39:01 Nov 2, 2011

R T

Mkr1 2.479 40 GHz
49.31 dBμV

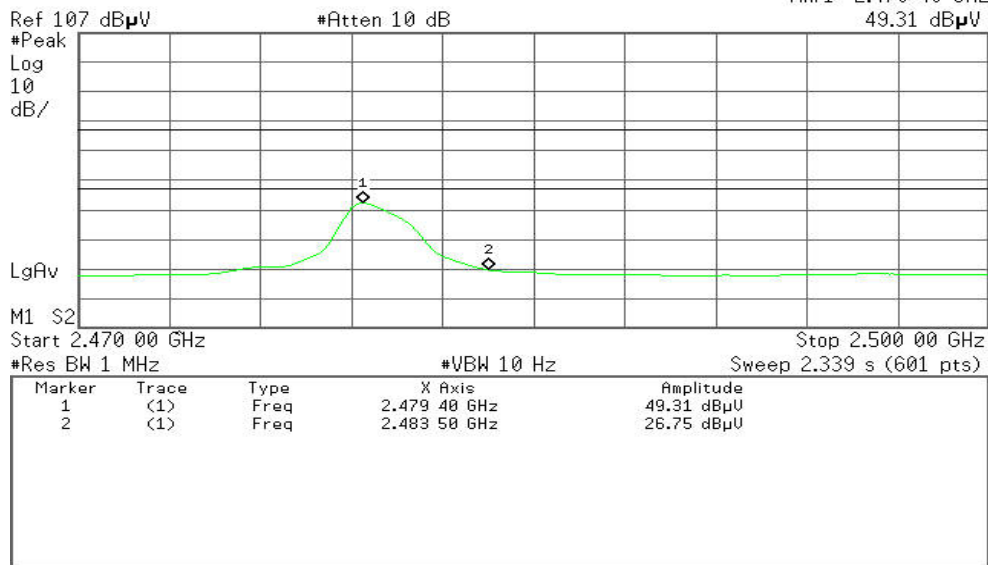



Test Data (8DPSK)


Band Edges (CH-Low)

Detector mode: Peak

Polarity: Vertical

Agilent 14:52:16 Nov 2, 2011

R T

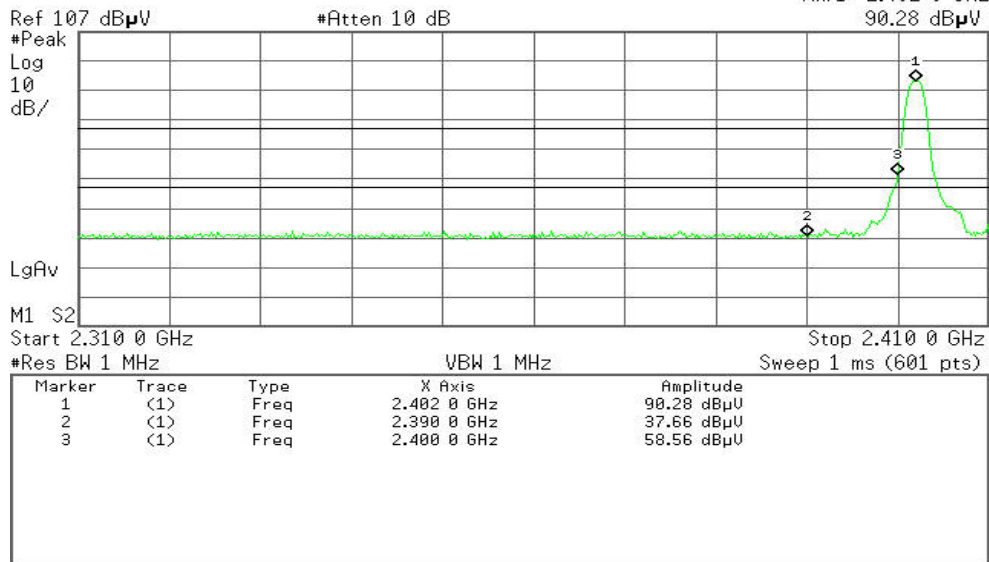


Detector mode: Average

Polarity: Vertical

Agilent 14:52:48 Nov 2, 2011

R T

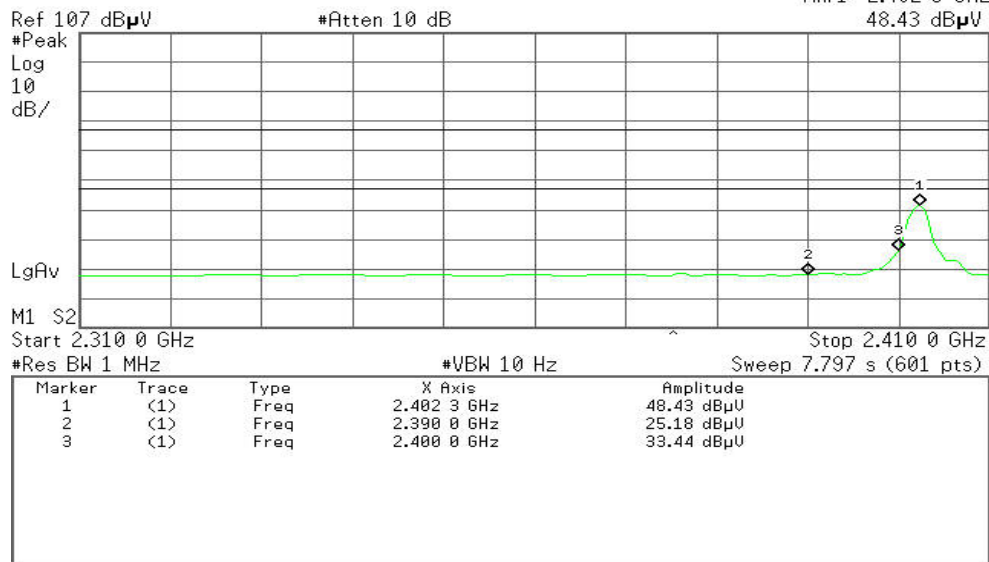




Detector mode: Peak

Polarity: Horizontal

Agilent 14:55:56 Nov 2, 2011

R T

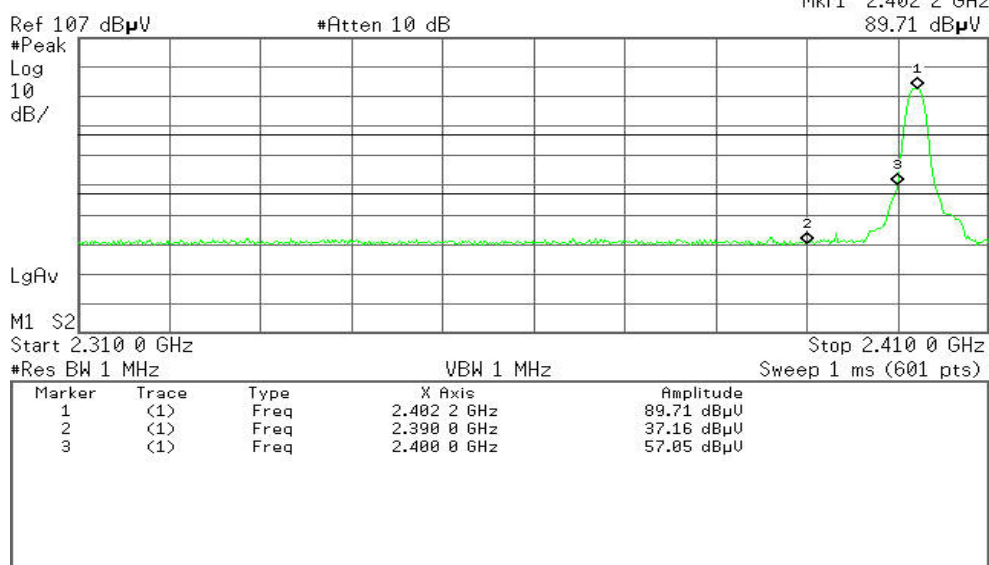


Detector mode: Average

Polarity: Horizontal

Agilent 14:56:55 Nov 2, 2011

R T

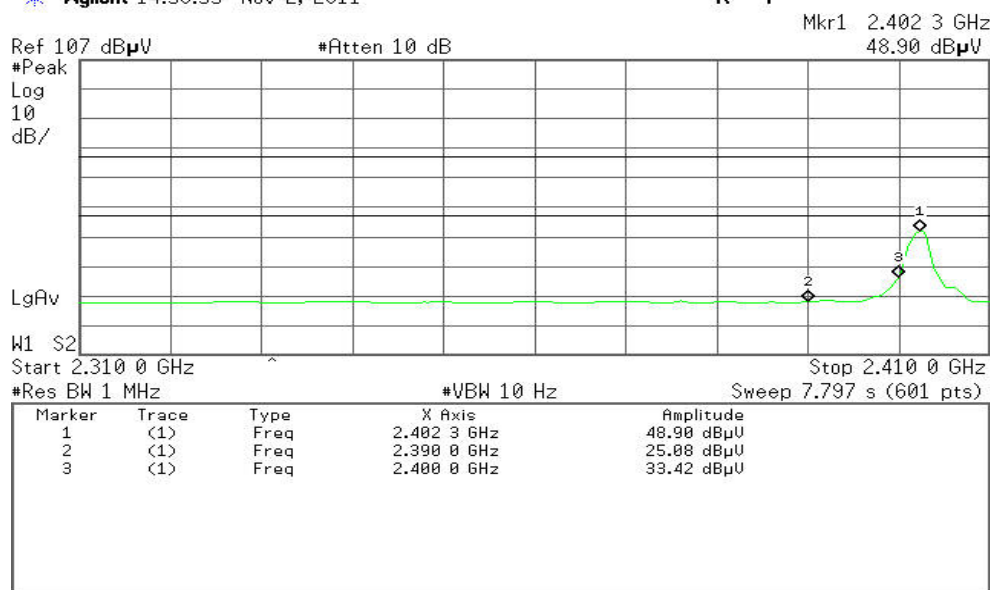



Band Edges (CH-High)


Detector mode: Peak

Polarity: Vertical

Agilent 14:46:27 Nov 2, 2011

R T

Mkr1 2.480 05 GHz
83.19 dBμV

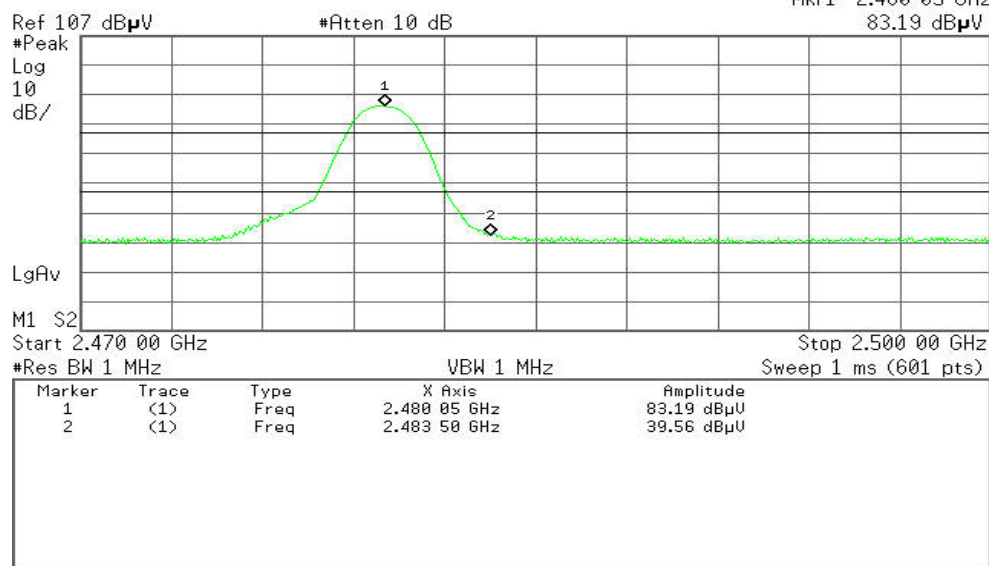


Detector mode: Average

Polarity: Vertical

Agilent 14:47:02 Nov 2, 2011

R T

Mkr1 2.479 65 GHz
45.99 dBμV

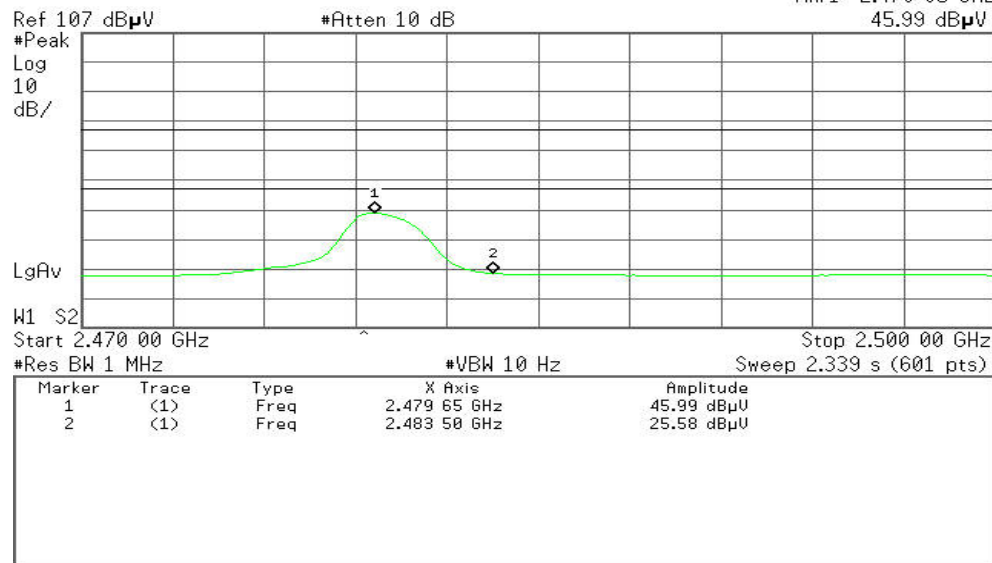




Detector mode: Peak

Polarity: Horizontal

Agilent 14:43:33 Nov 2, 2011

R T

Mkr1 2.480 10 GHz
85.88 dBμV

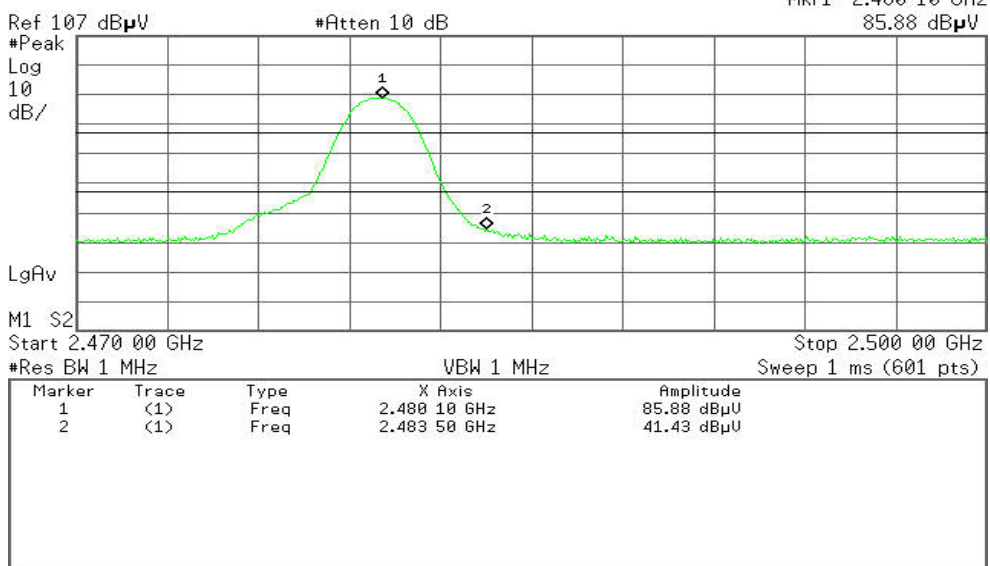


Detector mode: Average

Polarity: Horizontal

Agilent 14:44:00 Nov 2, 2011

R T

Mkr1 2.479 35 GHz
48.73 dBμV

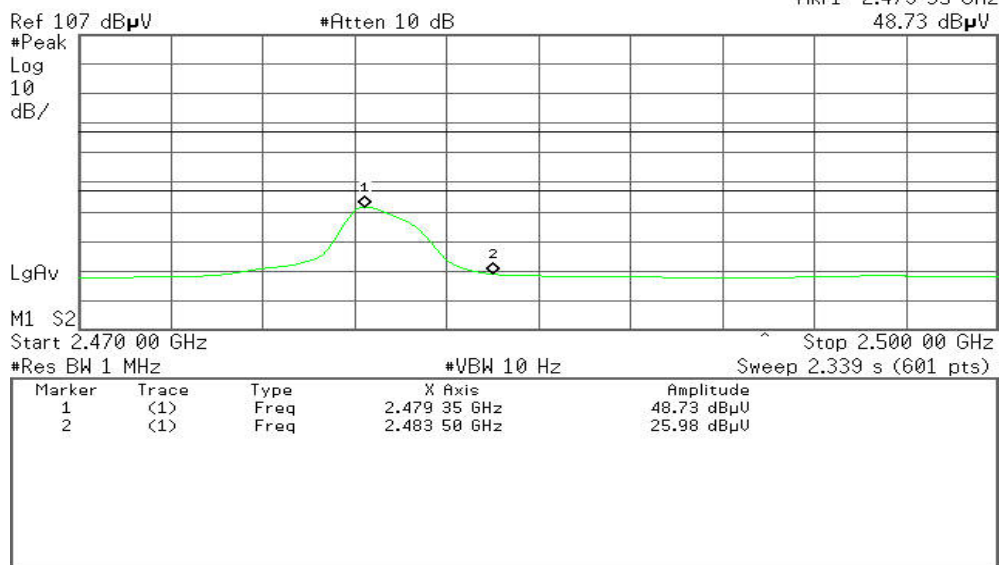



6.5 FREQUENCY SEPARATION

LIMIT


According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	E4446A	US44300399	03/19/2011	03/19/2012
Spectrum Analyzer	R&S	FSP30	1093.4495.30	07/22/2011	07/22/2011

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration

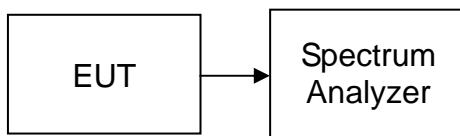

TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = middle of hopping channel.
4. Set the spectrum analyzer as RBW=30kHz, VBW=30kHz, Adjust Span to 4 MHz, Sweep = auto.
5. Max hold. Mark 3 Peaks of hopping channel and record the 3 peaks frequency.

TEST RESULTS

No non-compliance noted

Test Data

GFSK

Channel Separation (MHz)	Two-thirds of the 20 dB Bandwidth (kHz)	Channel Separation Limit	Result
1.000	558.671	> Two-thirds of the 20 dB Bandwidth	Pass

8DPSK


Channel Separation (MHz)	Two-thirds of the 20 dB Bandwidth (kHz)	Channel Separation Limit	Result
1.000	804.000	> Two-thirds of the 20 dB Bandwidth	Pass




GFSK

Test Plot

Measurement of Channel Separation

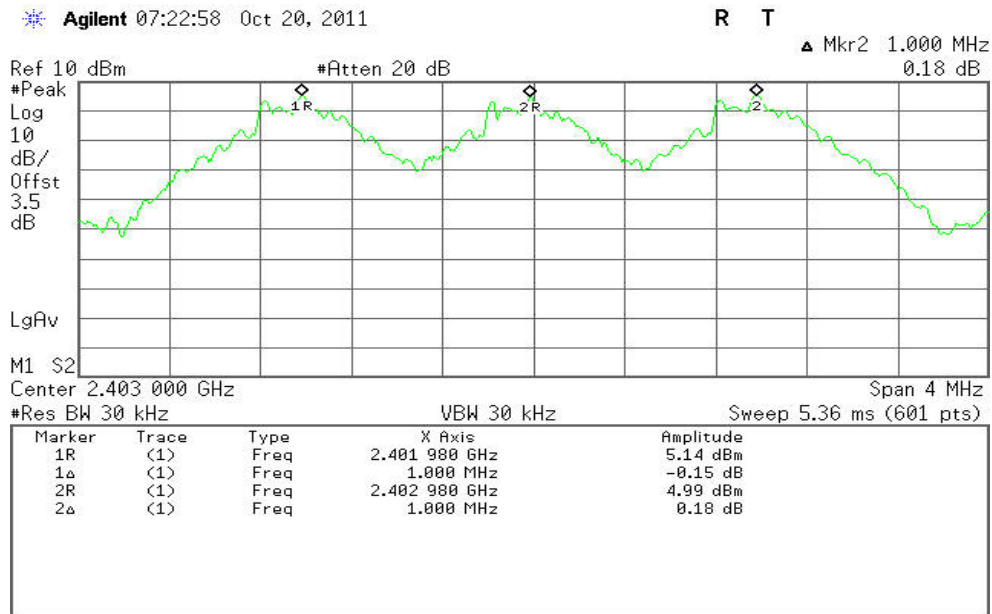

20 dB bandwidth(CH High)

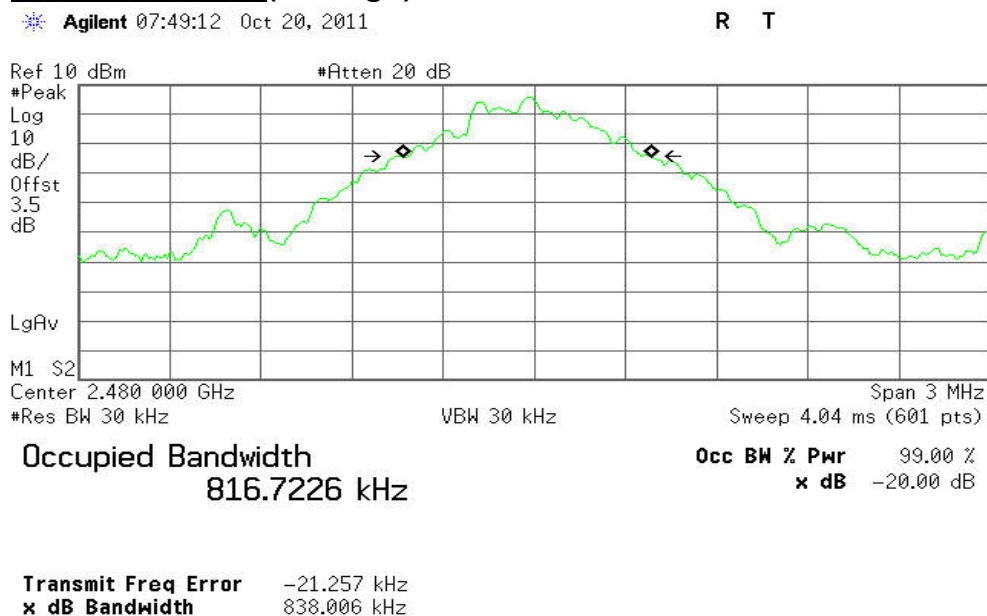





8DPSK

Test Plot

Measurement of Channel Separation

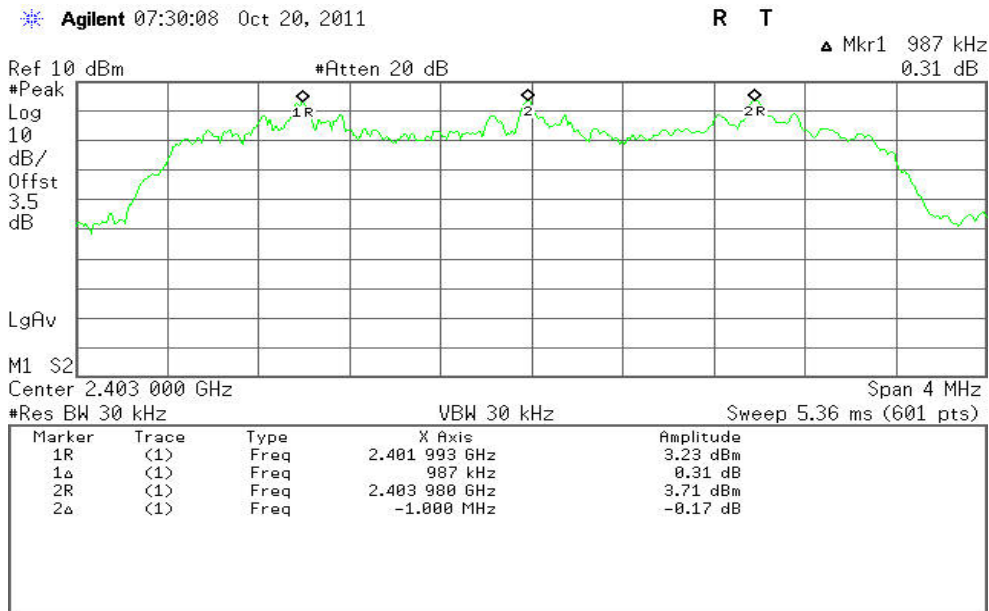

20 dB bandwidth(CH High)

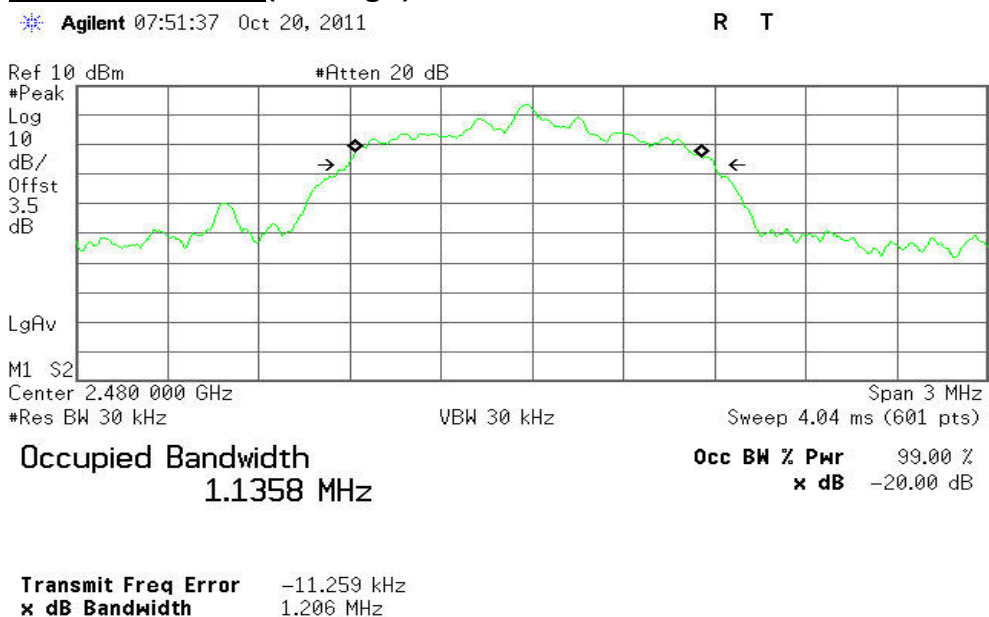



6.6 NUMBER OF HOPPING FREQUENCY

LIMIT


According to §15.247(a)(1)(ii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands shall use at least 15 hopping frequencies.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	E4446A	US44300399	03/19/2011	03/19/2012

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration

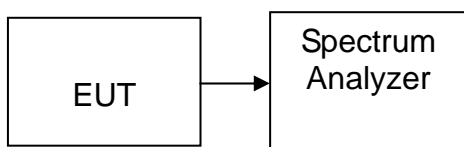

TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set spectrum analyzer Start=2402MHz, Stop = 2441MHz, Sweep = 1ms and Start=2441MHz, Stop = 2483.5MHz, Sweep = 1ms.
4. Set the spectrum analyzer as RBW, VBW=300kHz,
5. Max hold, view and count how many channel in the band.

TEST RESULTS

No non-compliance noted

Test Data

Result (No. of CH)	Limit (No. of CH)	Result
79	>15	PASS




Test Plot (GFSK)

Channel Number

2.402 GHz – 2.441 GHz

Agilent 07:40:27 Oct 20, 2011


R T

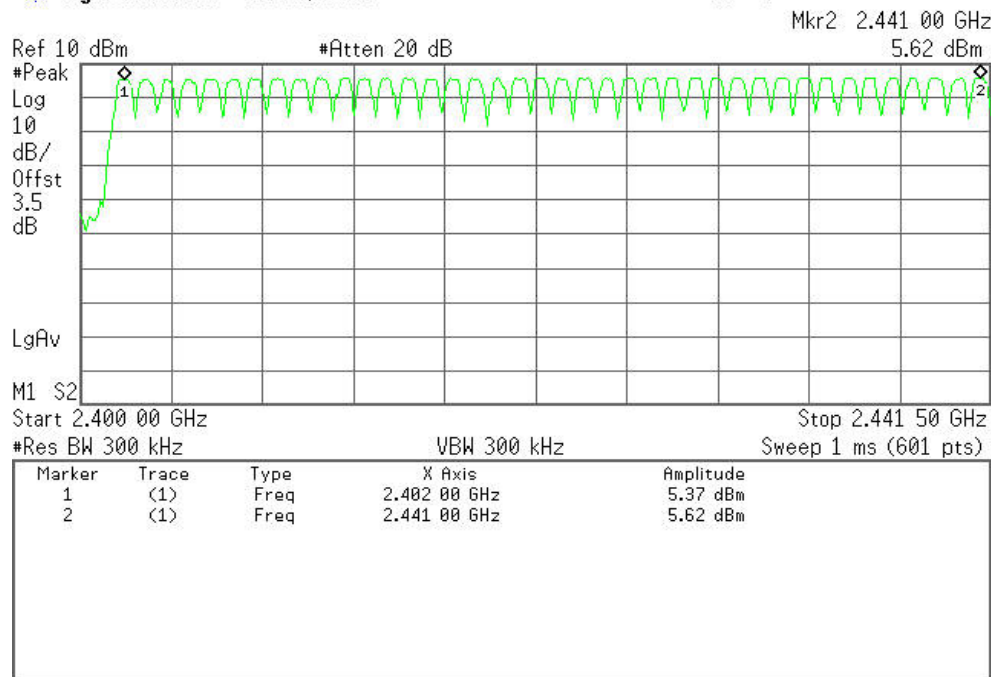

2.441 GHz – 2.4835 GHz

Agilent 07:38:54 Oct 20, 2011

R T

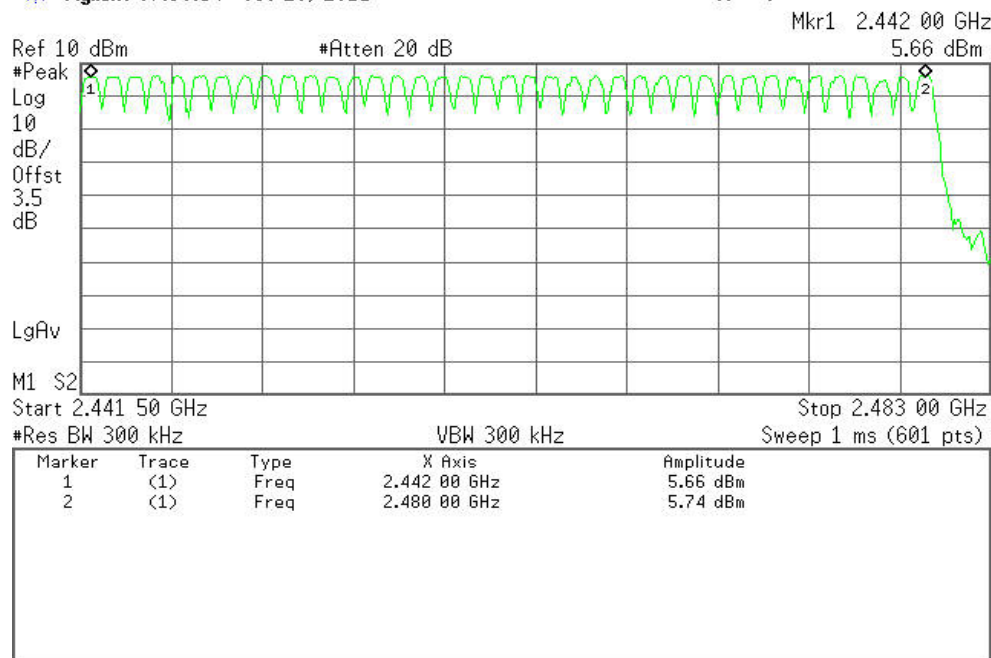





Test Plot (8DPSK)

Channel Number

2.402 GHz – 2.441 GHz

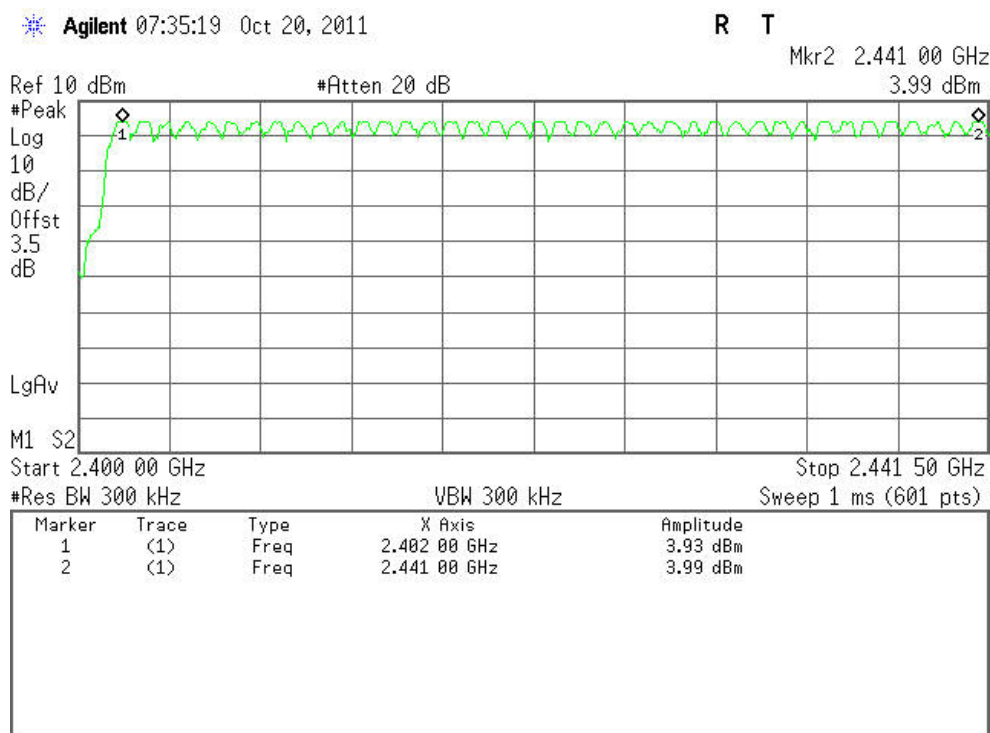

2.441 GHz –2.4835 GHz

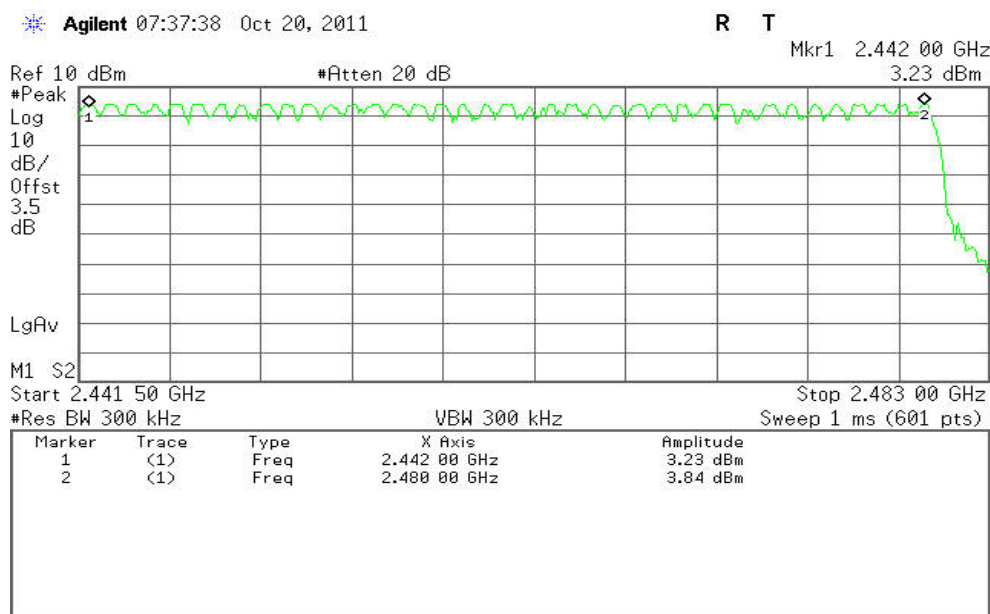



6.7 TIME OF OCCUPANCY (DWELL TIME)

LIMIT


According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands. The average time of occupancy on any channels shall not greater than 0.4 s within a period 0.4 s multiplied by the number of hopping channels employed.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	E4446A	US44300399	03/19/2011	03/19/2012

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration

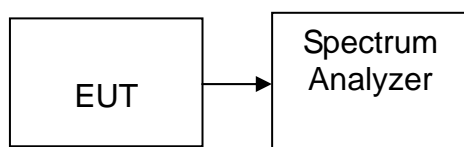

TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = operating frequency.
4. Set the spectrum analyzer as RBW, VBW=1MHz, Span = 0Hz, Sweep = auto.
5. Repeat above procedures until all frequency measured were complete.

**TEST RESULTS**

No non-compliance noted

Test Data**GFSK****DH 1**

CH Mid: $0.512 * (1600/2)/79 * 31.6 = 163.744$ (ms)

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	0.512	163.744	31.60	400.00	PASS

DH 3

CH Mid: $1.755 * (1600/4)/79 * 31.6 = 280.800$ (ms)

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	1.755	280.800	31.60	400.00	PASS

DH 5

CH Mid: $3.007 * (1600/6)/79 * 31.6 = 320.747$ (ms)

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	3.007	320.747	31.60	400.00	PASS

**Test Data****8DPSK****DH 1**CH Mid: $0.513 * (1600/2)/79 * 31.6 = 164.064$ (ms)

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	0.513	164.064	31.60	400.00	PASS

DH 3CH Mid: $1.665 * (1600/4)/79 * 31.6 = 266.400$ (ms)

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	1.665	266.400	31.60	400.00	PASS

DH 5CH Mid: $3.020 * (1600/6)/79 * 31.6 = 322.133$ (ms)

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	3.020	322.133	31.60	400.00	PASS



Test Plot


GFSK

DH 1

(CH Mid)

Agilent 07:11:19 Oct 20, 2011

R T

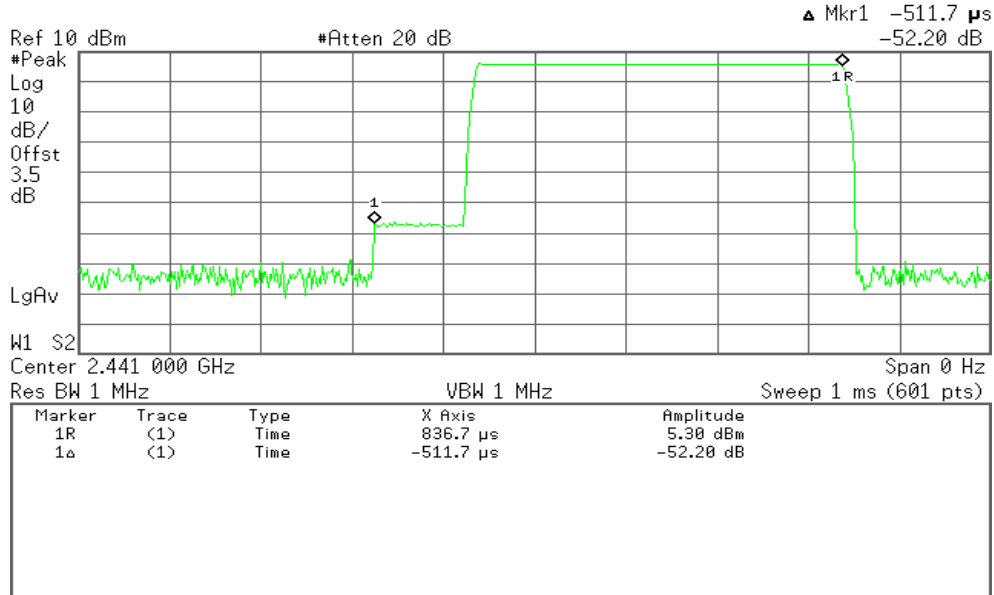


DH 3

(CH Mid)

Agilent 07:12:29 Oct 20, 2011

R T

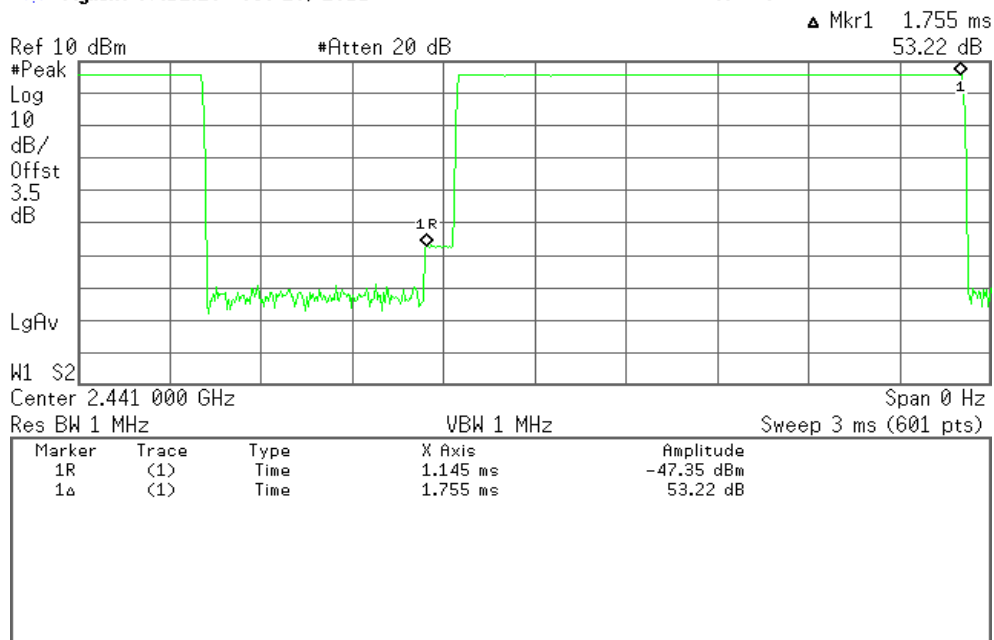




DH 5

(CH Mid)

Agilent 07:13:19 Oct 20, 2011

R T

Mkr1 -3.007 ms
-52.92 dB

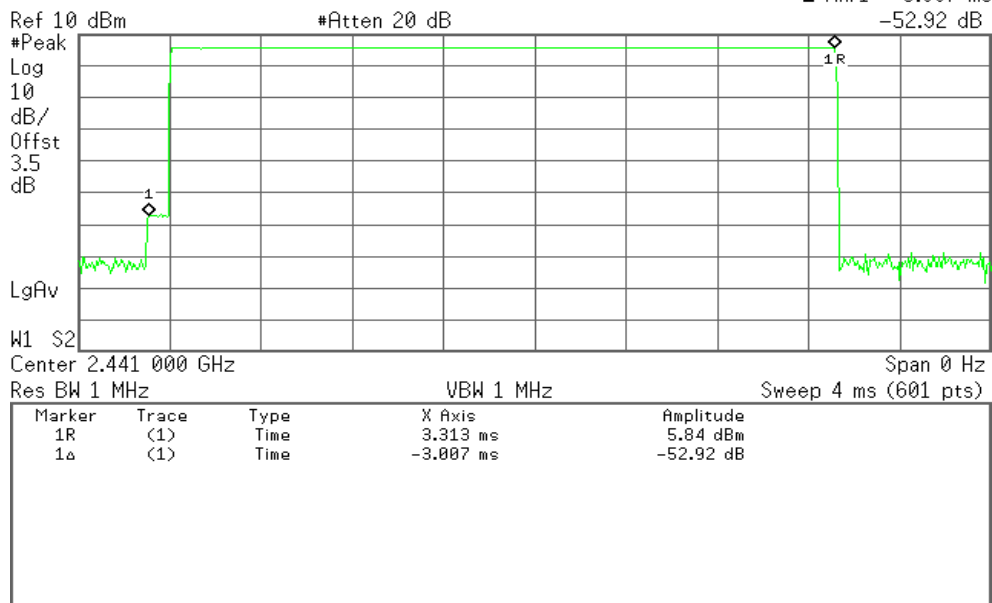




Test Plot 8DPSK


DH 1

(CH Mid)

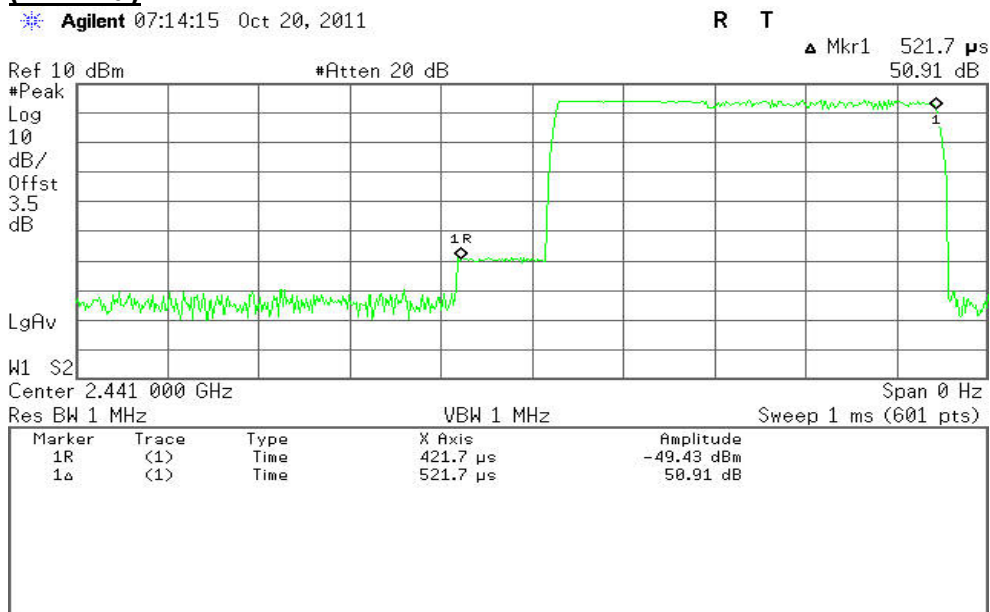

DH 3

(CH Mid)

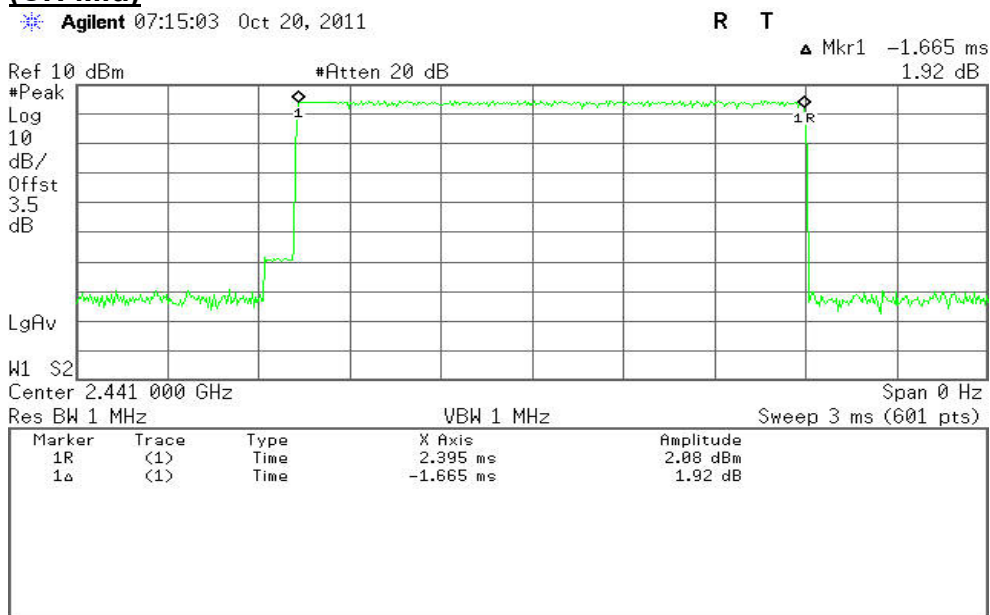



DH 5

(CH Mid)

Agilent 07:15:46 Oct 20, 2011

R T

Mkr1 3.02 ms

51.66 dB

Ref 10 dBm

#Atten 20 dB

#Peak

Log

10

dB/

Offst

3.5

dB

LgAv

W1 S2

Center 2.441 000 GHz

Span 0 Hz

Res BW 1 MHz

VBW 1 MHz

Sweep 4 ms (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1R	(1)	Time	746.7 μ s	-49.65 dBm
1a	(1)	Time	3.02 ms	51.66 dB



6.8 SPURIOUS EMISSIONS

6.8.1. Conducted Measurement

LIMIT


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	E4446A	US44300399	03/19/2011	03/19/2012

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration

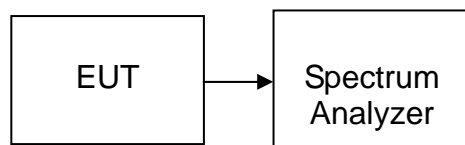

TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.

Measurements are made over the 30MHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels.

TEST RESULTS

No non-compliance noted




Test Plot (GFSK)

CH Low

30MHz ~2.9GHz

Agilent 08:57:47 Oct 20, 2011


R T

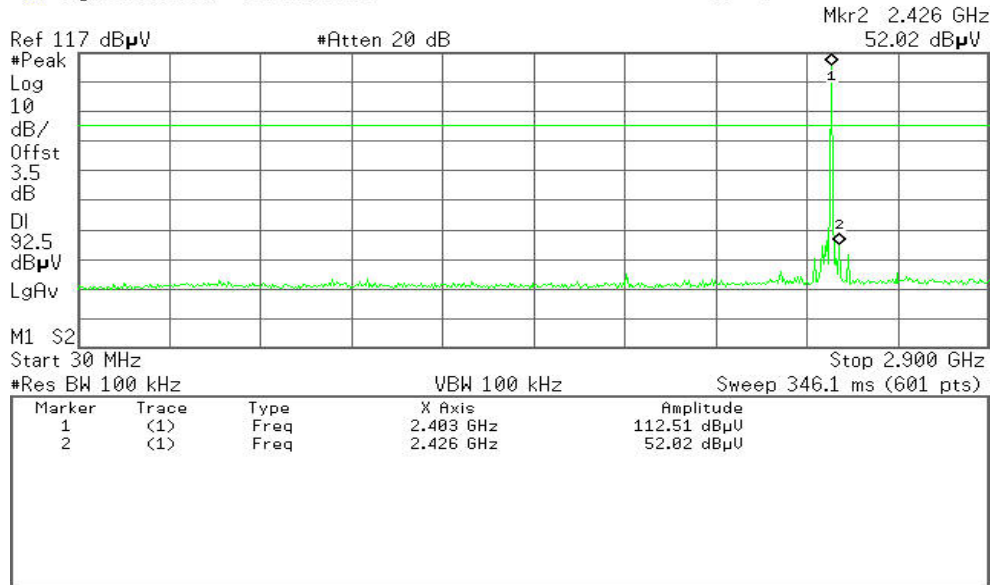

2.9MHz ~26.5GHz

Agilent 08:58:15 Oct 20, 2011

R T

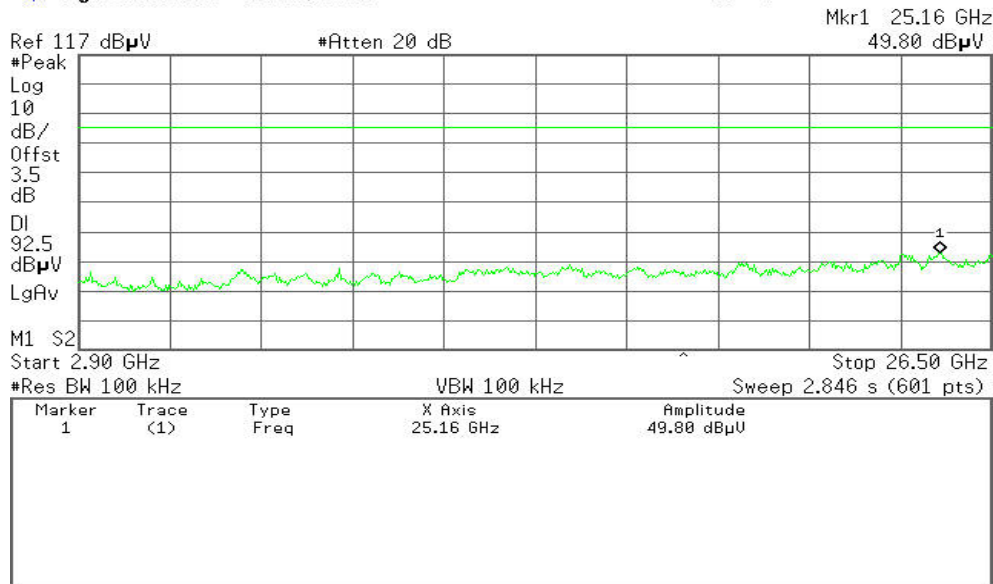




CH Mid

30MHz ~ 2.9GHz

Agilent 08:59:31 Oct 20, 2011


R T

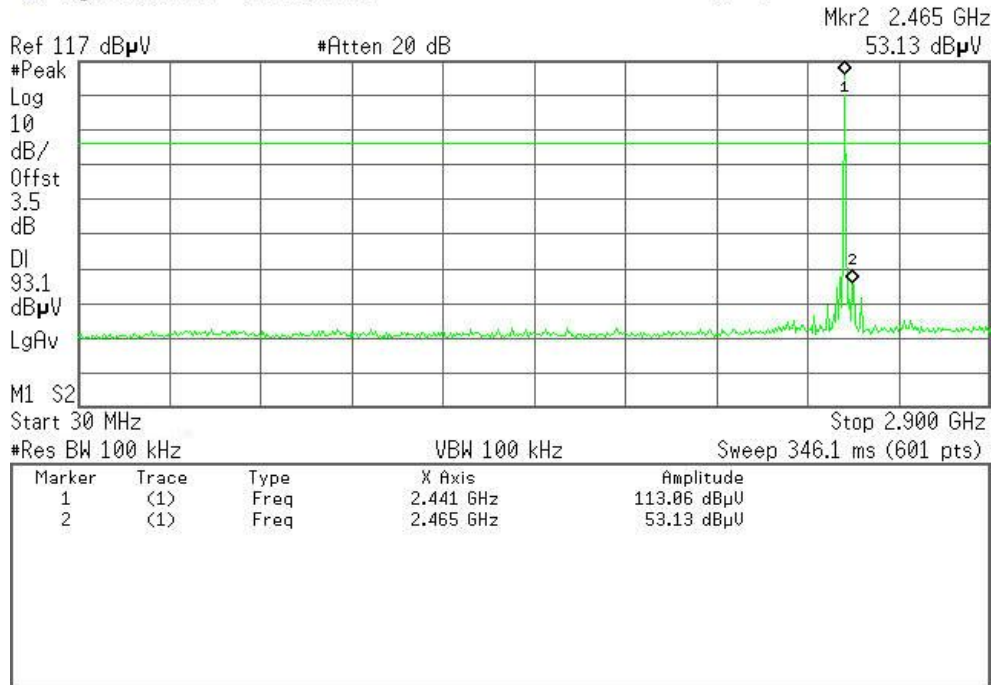

2.9GHz ~ 26.5GHz

Agilent 08:59:59 Oct 20, 2011

R T

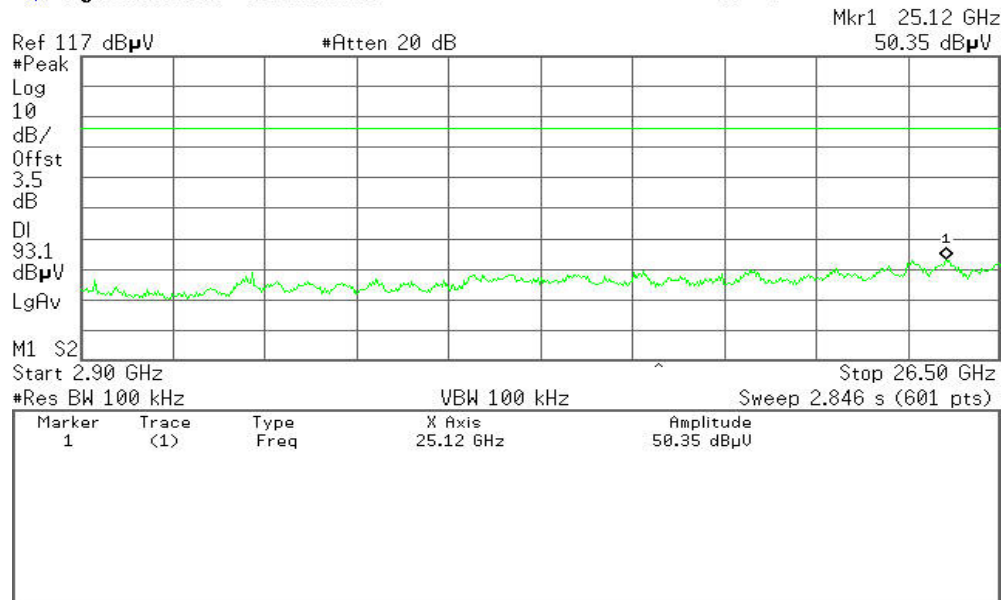




CH High

30MHz ~ 2.9GHz

Agilent 09:00:50 Oct 20, 2011


R T

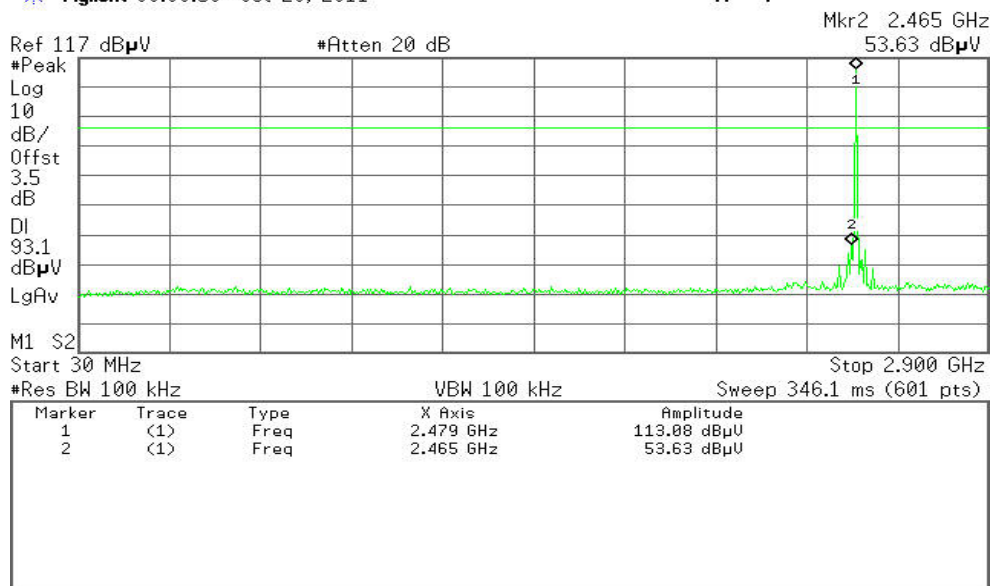

2.9GHz ~ 26.5GHz

Agilent 09:01:37 Oct 20, 2011

R T

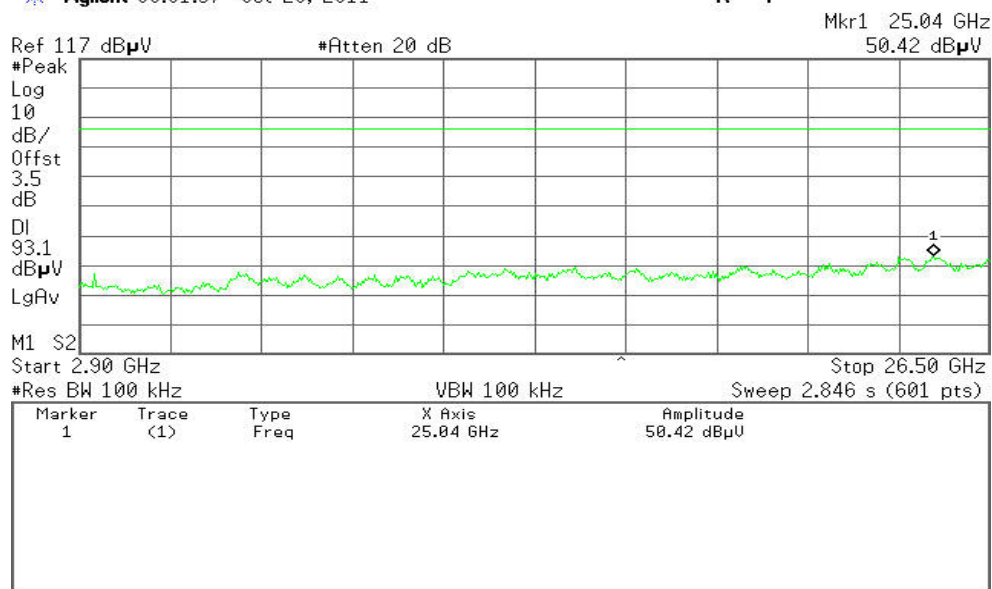




Test Plot (8DPSK)

CH Low

30MHz ~2.9GHz

Agilent 09:02:55 Oct 20, 2011


R T

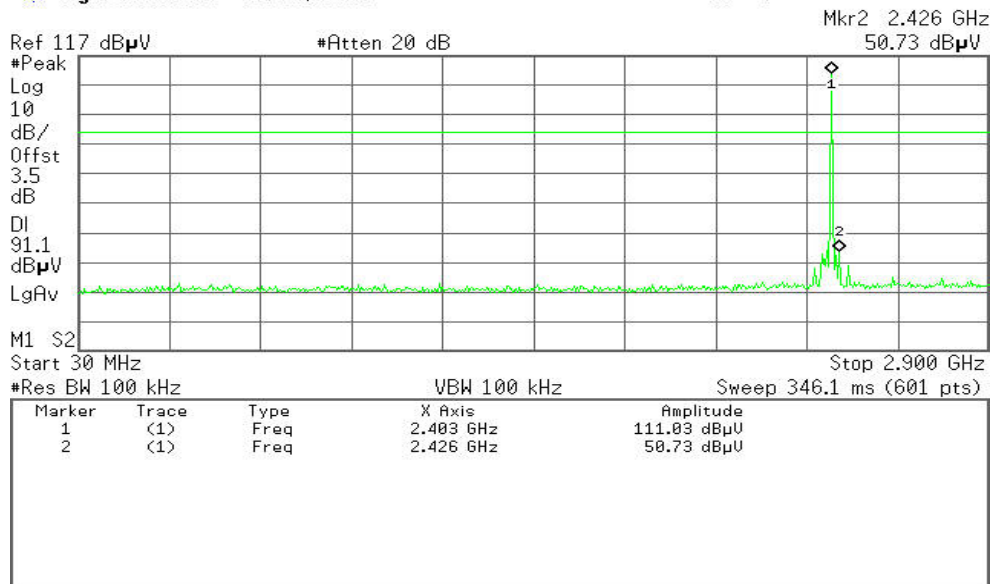

2.9MHz ~26.5GHz

Agilent 09:03:24 Oct 20, 2011

R T

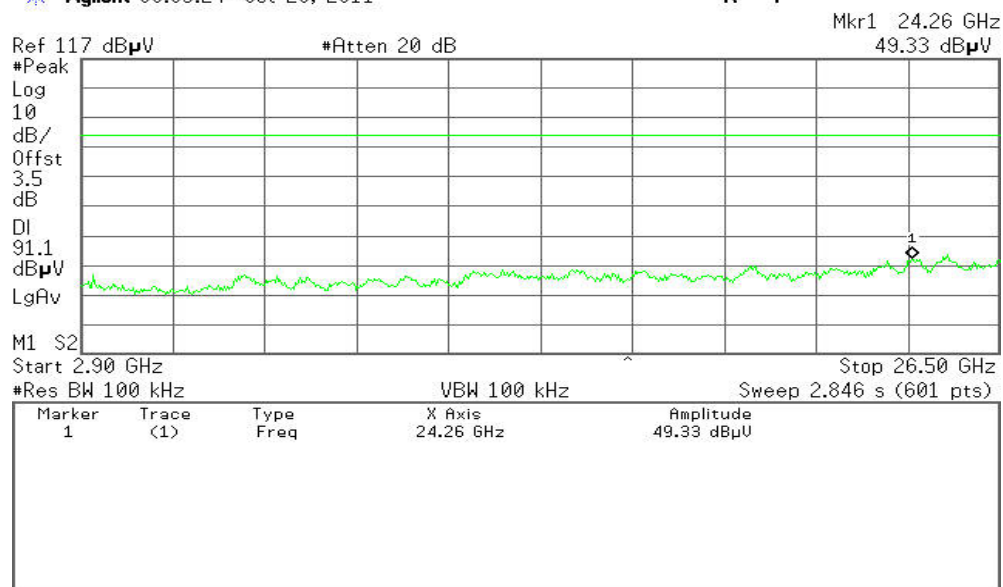




CH Mid

30MHz ~ 2.9GHz

Agilent 09:04:11 Oct 20, 2011


R T

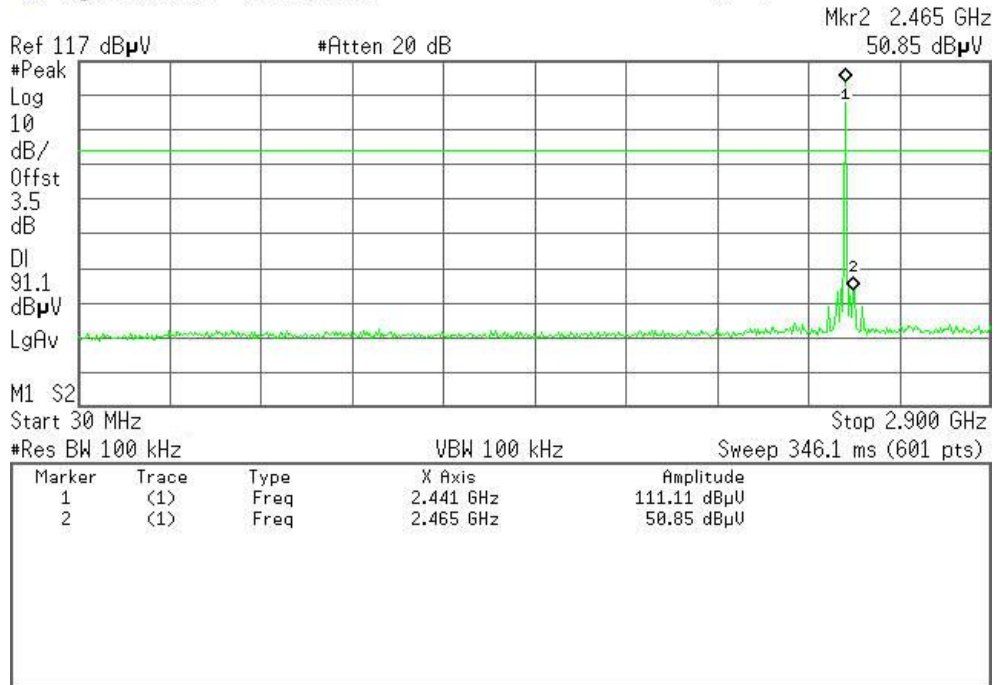

2.9GHz ~ 26.5GHz

Agilent 09:04:42 Oct 20, 2011

R T

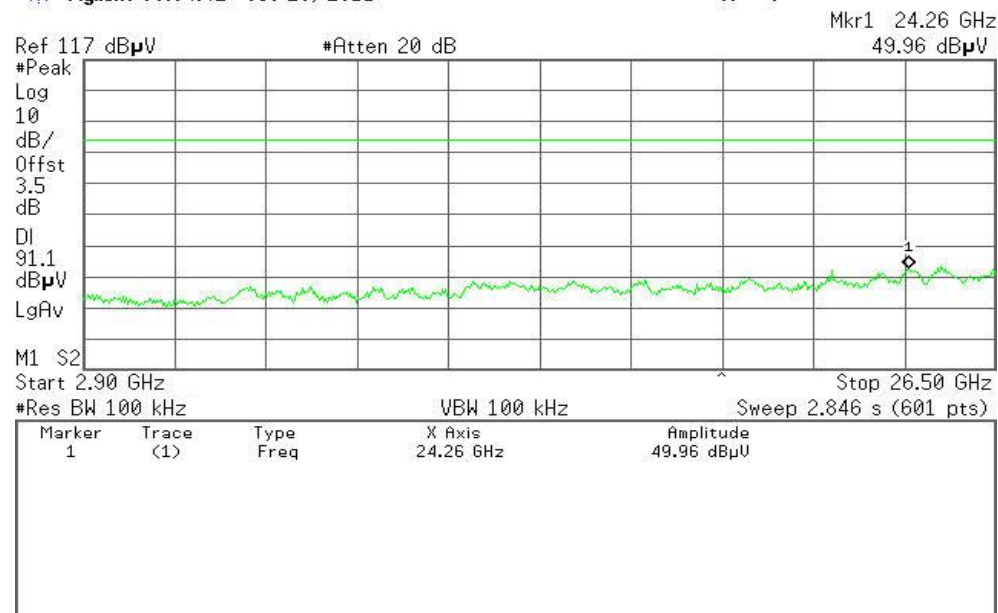




CH High

30MHz ~ 2.9GHz

Agilent 09:06:14 Oct 20, 2011


R T

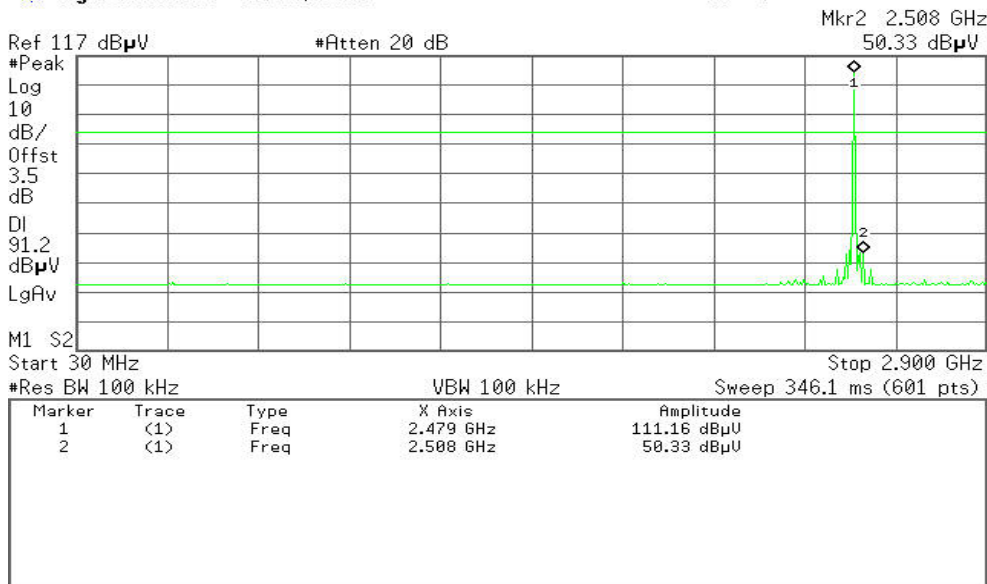

2.9GHz ~ 26.5GHz

Agilent 09:06:52 Oct 20, 2011

R T

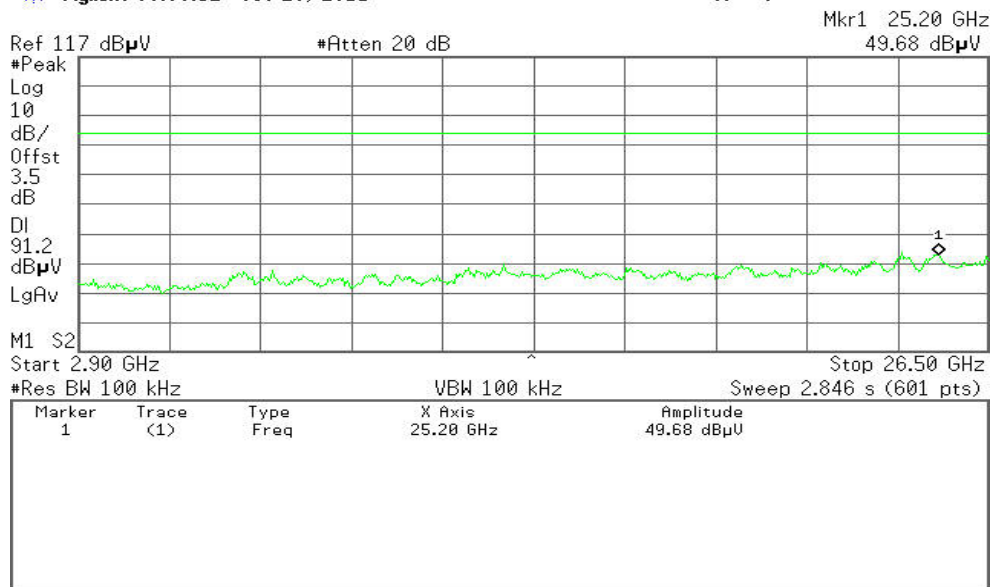

**6.8.2. Radiated Emissions****LIMIT**

1. Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (mV/m)	Measurement Distance (m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3

Note: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

2. In the above emission table, the tighter limit applies at the band edges.

Frequency (Hz)	Field Strength (μ V/m at 3-meter)	Field Strength (dB μ V/m at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

**MEASUREMENT EQUIPMENT USED**


Radiated Emission Test Site 966 (2)					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
PSA Series Spectrum Analyzer	Agilent	E4446A	US44300399	03/19/2011	03/19/2012
Amplifier	MITEQ	AM-1604-3000	1411843	03/18/2011	03/18/2012
Turn Table	EMCO	2081-1.21	N/A	N.C.R	N.C.R
Controller	CT	N/A	N/A	N.C.R	N.C.R
High Noise Amplifier	Agilent	8449B	3008A01838	03/18/2011	03/18/2012
Bilog Antenna	SCHAFFNER	CBL6143	5082	06/03/2011	06/03/2012
Horn Antenna	SCHWARZBECK	BBHA9120D	D286	03/19/2011	03/19/2012
Loop Antenna	A、R、A	PLA-1030/B	1029	03/19/2011	03/19/2012
Temp. / Humidity Meter	VICTOR	VC230	N/A	03/31/2011	03/31/2012
Antenna Tower	SUNOL	TLT2	N/A	N.C.R	N.C.R
Test S/W	FARAD	LZ-RF / CCS-SZ-3A2			

Remark: Each piece of equipment is scheduled for calibration once a year.




Test Configuration

Below 1 GHz

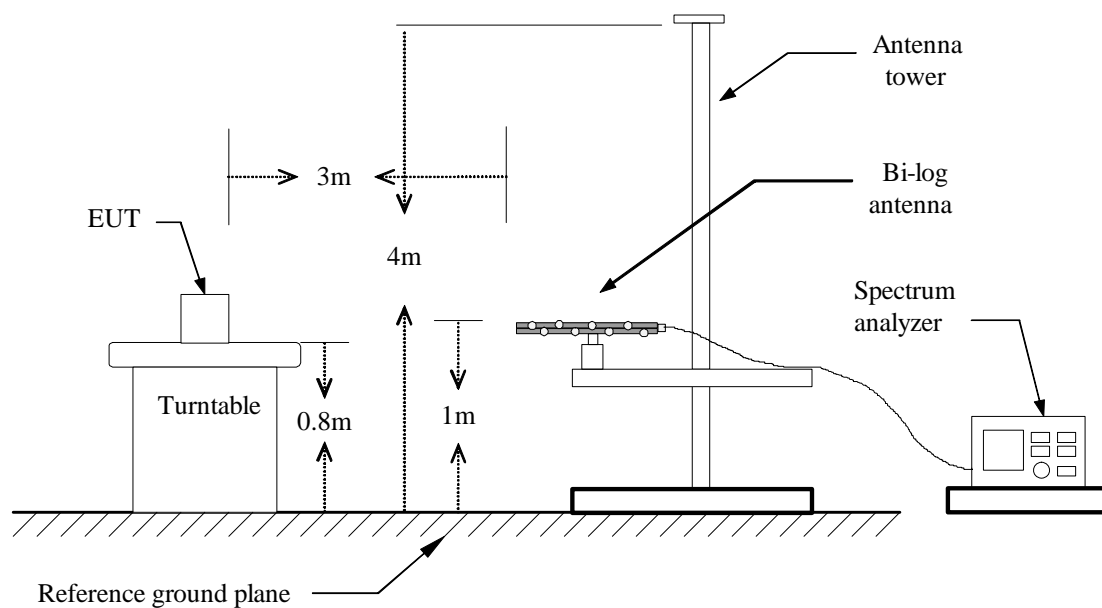

Above 1 GHz

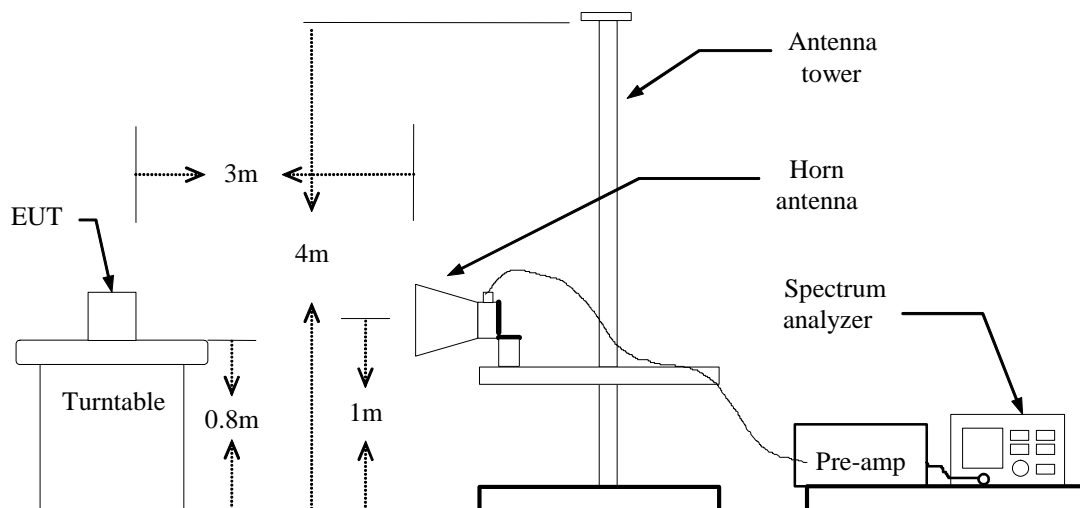



TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.

**TEST RESULTS****Below 1 GHz****Operation Mode:** Normal Link**Test Date:** November 2, 2011**Temperature:** 24°C**Tested by:** Sunday Hu**Humidity:** 52% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBμV)	Correction Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
33.2333	36.92	-13.06	23.86	40.00	-16.14	V	QP
122.1500	45.14	-20.42	24.72	43.50	-18.78	V	QP
185.2000	40.60	-22.02	18.58	43.50	-24.92	V	QP
576.4333	37.24	-12.48	24.76	46.00	-21.24	V	QP
639.4833	40.89	-12.13	28.76	46.00	-17.24	V	QP
860.9667	33.33	-9.31	24.02	46.00	-21.98	V	QP
34.8500	46.51	-13.92	32.59	40.00	-7.41	H	QP
99.5167	54.27	-23.10	31.17	43.50	-12.33	H	QP
416.3833	39.47	-15.36	24.11	46.00	-21.89	H	QP
639.4833	46.71	-12.13	34.58	46.00	-11.42	H	QP
791.4500	42.63	-10.30	32.33	46.00	-13.67	H	QP
856.1167	41.13	-9.36	31.77	46.00	-14.23	H	QP

****Remark:** No emission found between lowest internal used/generated frequency to 30MHz.**Notes:**

- Measuring frequencies from 9kHz to the 1GHz.
- Radiated emissions measured in frequency range from 30MHz to 1GHz were made with an instrument using Peak/Quasi-peak detector mode.
- Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- The IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.
- | | |
|-------------------------|--|
| Frequency (MHz) | = Emission frequency in MHz |
| Reading (dBuV) | = Receiver reading |
| Correction Factor(dB/m) | = Antenna factor + Cable loss – Amplifier gain |
| Actual FS (dBuV/m) | = Reading (dBuV) + Corr. Factor (dB/m) |
| Limit (dBuV/m) | = Limit stated in standard |
| Margin(dB) | = Measured (dBuV/m) – Limits (dBuV/m) |
| Antenna Pole(V/H) | = Current carrying line of reading |

**Above 1 GHz****GFSK****Operation Mode:**

TX(CH Low)

Test Date: November 2, 2011**Temperature:** 24°C**Tested by:** Sunday Hu**Humidity:** 52% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBμV)	Correction Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1600.0000	65.06	-10.31	54.75	74.00	-19.25	V	Peak
1600.0000	61.13	-10.31	50.82	54.00	-3.18	V	AVG
3985.0000	47.07	-3.59	43.48	74.00	-30.52	V	Peak
4810.0000	48.13	-0.62	47.51	74.00	-26.49	V	Peak
5410.0000	47.15	1.03	48.18	74.00	-25.82	V	Peak
6145.0000	46.06	3.58	49.64	74.00	-24.36	V	Peak
7210.0000	51.01	5.00	56.01	74.00	-17.99	V	Peak
7210.0000	37.92	5.00	42.92	54.00	-11.08	V	AVG
1600.0000	63.98	-10.31	53.67	74.00	-20.33	H	Peak
1600.0000	60.50	-10.31	50.19	54.00	-3.81	H	AVG
2950.0000	48.30	-6.30	42.00	74.00	-32.00	H	Peak
3925.0000	46.66	-3.69	42.97	74.00	-31.03	H	Peak
4810.0000	46.21	-0.62	45.59	74.00	-28.41	H	Peak
6175.0000	45.97	3.71	49.68	74.00	-24.32	H	Peak
7585.0000	45.67	5.78	51.45	74.00	-22.55	H	Peak

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
 - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms.
5. Frequency (MHz) = Emission frequency in MHz
 Reading (dBμV/m) = Uncorrected Analyzer / Receiver Reading
 Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain
 Limit (dBμV/m) = Limit stated in standard
 Margin (dB) = Result (dBμV/m) - Limit (dBμV/m)
 Pk = Peak Reading
 AV. = Average Reading



Remark

= Mark Peak Reading or Average Reading



Operation Mode: TX(CH Mid)

Test Date: November 2, 2011

Temperature: 24°C

Tested by: Sunday Hu

Humidity: 52% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (dBμV)	Correction Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1630.0000	64.78	-10.28	54.50	74.00	-19.50	V	Peak
1630.0000	61.35	-10.28	51.07	54.00	-2.93	V	AVG
3730.0000	46.96	-3.85	43.11	74.00	-30.89	V	Peak
4240.0000	47.23	-2.80	44.43	74.00	-29.57	V	Peak
4885.0000	48.57	-0.38	48.19	74.00	-25.81	V	Peak
6250.0000	45.79	3.79	49.58	74.00	-24.42	V	Peak
7330.0000	50.28	5.29	55.57	74.00	-18.43	V	Peak
7330.0000	34.84	5.29	40.13	54.00	-13.87	V	AVG
1630.0000	63.30	-10.28	53.02	74.00	-20.98	H	Peak
1630.0000	61.07	-10.28	50.79	54.00	-3.21	H	AVG
3730.0000	46.21	-3.85	42.36	74.00	-31.64	H	Peak
4870.0000	45.40	-0.43	44.97	74.00	-29.03	H	Peak
5260.0000	45.99	0.72	46.71	74.00	-27.29	H	Peak
6460.0000	45.78	3.83	49.61	74.00	-24.39	H	Peak
6970.0000	46.29	4.39	50.68	74.00	-23.32	H	Peak

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
 - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms.
5. Frequency (MHz) = Emission frequency in MHz
 Reading (dBμV/m) = Uncorrected Analyzer / Receiver Reading
 Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain
 Limit (dBμV/m) = Limit stated in standard
 Margin (dB) = Result (dBμV/m)- Limit (dBμV/m)
 Pk = Peak Reading
 AV = Average Reading
 Remark = Mark Peak Reading or Average Reading



Operation Mode: TX(CH High)

Test Date: November 2, 2011

Temperature: 24 °C

Tested by: Sunday Hu

Humidity: 52% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (dBμV)	Correction Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1660.0000	65.01	-10.26	54.75	74.00	-19.25	V	Peak
1660.0000	61.27	-10.26	51.01	54.00	-2.99	V	AVG
2935.0000	48.72	-6.40	42.32	74.00	-31.68	V	Peak
3550.0000	46.57	-4.12	42.45	74.00	-31.55	V	Peak
4960.0000	48.04	-0.14	47.90	74.00	-26.10	V	Peak
6565.0000	46.12	4.10	50.22	74.00	-23.78	V	Peak
7435.0000	50.96	5.53	56.49	74.00	-17.51	V	Peak
7435.0000	36.94	5.53	42.47	54.00	-11.53	V	AVG
1660.0000	62.23	-10.26	51.97	74.00	-22.03	H	Peak
3040.0000	47.55	-5.87	41.68	74.00	-32.32	H	Peak
4420.0000	46.05	-2.21	43.84	74.00	-30.16	H	Peak
5170.0000	45.86	0.50	46.36	74.00	-27.64	H	Peak
6220.0000	45.31	3.81	49.12	74.00	-24.88	H	Peak
6760.0000	46.03	4.28	50.31	74.00	-23.69	H	Peak

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
 - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms.
5. Frequency (MHz) = Emission frequency in MHz
 Reading (dBμV/m) = Uncorrected Analyzer / Receiver Reading
 Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain
 Limit (dBμV/m) = Limit stated in standard
 Margin (dB) = Result (dBμV/m)- Limit (dBμV/m)
 Pk = Peak Reading
 AV = Average Reading
 Remark = Mark Peak Reading or Average Reading



8DPSK

Operation Mode:

TX(CH Low)

Test Date: November 4, 2011

Temperature: 24°C

Tested by: Sunday Hu

Humidity: 52% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (dBμV)	Correction Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1600.0000	61.50	-10.31	51.19	74.00	-22.81	V	Peak
3730.0000	46.69	-3.85	42.84	74.00	-31.16	V	Peak
4240.0000	46.43	-2.80	43.63	74.00	-30.37	V	Peak
4825.0000	46.44	-0.57	45.87	74.00	-28.13	V	Peak
5815.0000	46.87	2.62	49.49	74.00	-24.51	V	Peak
6940.0000	46.33	4.37	50.70	74.00	-23.30	V	Peak
1600.0000	61.94	-10.31	51.63	74.00	-22.37	H	Peak
3805.0000	46.64	-3.87	42.77	74.00	-31.23	H	Peak
4750.0000	45.57	-0.93	44.64	74.00	-29.36	H	Peak
5365.0000	45.38	0.94	46.32	74.00	-27.68	H	Peak
5680.0000	46.16	1.94	48.10	74.00	-25.90	H	Peak
6175.0000	45.73	3.71	49.44	74.00	-24.56	H	Peak

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
 - b. AV Setting 1GH z- 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms.
5. Frequency (MHz) = Emission frequency in MHz
 Reading (dBμV/m) =Uncorrected Analyzer / Receiver Reading
 Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain
 Limit (dBμV/m) = Limit stated in standard
 Margin (dB) = Result (dBμV/m)- Limit (dBμV/m)
 Pk = Peak Reading
 AV. = Average Reading
 Remark = Mark Peak Reading or Average Reading



Operation Mode: TX(CH Mid)

Test Date: November 4, 2011

Temperature: 24°C

Tested by: Sunday Hu

Humidity: 52% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (dBμV)	Correction Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1630.0000	62.87	-10.28	52.59	74.00	-21.41	V	Peak
1630.0000	60.10	-10.28	49.82	54.00	-4.18	V	AVG
3490.0000	47.03	-4.50	42.53	74.00	-31.47	V	Peak
4885.0000	47.04	-0.38	46.66	74.00	-27.34	V	Peak
5695.0000	45.87	2.02	47.89	74.00	-26.11	V	Peak
6190.0000	46.36	3.78	50.14	74.00	-23.86	V	Peak
7330.0000	51.06	5.29	56.35	74.00	-17.65	V	Peak
7330.0000	36.66	5.29	41.95	54.00	-12.05	V	AVG
1630.0000	62.12	-10.28	51.84	74.00	-22.16	H	Peak
3700.0000	46.50	-3.84	42.66	74.00	-31.34	H	Peak
4255.0000	46.81	-2.75	44.06	74.00	-29.94	H	Peak
5215.0000	45.99	0.62	46.61	74.00	-27.39	H	Peak
6580.0000	45.49	4.14	49.63	74.00	-24.37	H	Peak
6955.0000	47.21	4.38	51.59	74.00	-22.41	H	Peak

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
 - b. AV Setting 1GH z- 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms.
5. Frequency (MHz) = Emission frequency in MHz
 Reading (dBμV/m) =Uncorrected Analyzer / Receiver Reading
 Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain
 Limit (dBμV/m) = Limit stated in standard
 Margin (dB) = Result (dBμV/m)- Limit (dBμV/m)
 Pk = Peak Reading
 AV. = Average Reading
 Remark = Mark Peak Reading or Average Reading



Operation Mode: TX(CH High)

Test Date: November 4, 2011

Temperature: 24 °C

Tested by: Sunday Hu

Humidity: 52% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (dBμV)	Correction Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1660.0000	62.89	-10.26	52.63	74.00	-21.37	V	Peak
1660.0000	60.43	-10.26	50.17	54.00	-3.83	V	AVG
3460.0000	47.79	-4.69	43.10	74.00	-30.90	V	Peak
4960.0000	48.50	-0.14	48.36	74.00	-25.64	V	Peak
5560.0000	46.45	1.40	47.85	74.00	-26.15	V	Peak
6175.0000	46.10	3.71	49.81	74.00	-24.19	V	Peak
7435.0000	49.99	5.53	55.52	74.00	-18.48	V	Peak
7435.0000	34.32	5.53	39.85	54.00	-14.15	V	AVG
1660.0000	61.50	-10.26	51.24	74.00	-22.76	H	Peak
3610.0000	46.63	-3.80	42.83	74.00	-31.17	H	Peak
4960.0000	46.73	-0.14	46.59	74.00	-27.41	H	Peak
5770.0000	45.62	2.43	48.05	74.00	-25.95	H	Peak
6220.0000	45.33	3.81	49.14	74.00	-24.86	H	Peak
7435.0000	47.70	5.53	53.23	74.00	-20.77	H	Peak
7435.0000	34.25	5.53	39.78	54.00	-14.22	H	AVG

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
 - b. AV Setting 1GH z- 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms.
5. Frequency (MHz) = Emission frequency in MHz
 Reading (dBμV/m) =Uncorrected Analyzer / Receiver Reading
 Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain
 Limit (dBμV/m) = Limit stated in standard
 Margin (dB) = Result (dBμV/m)- Limit (dBμV/m)
 Pk = Peak Reading
 AV. = Average Reading
 Remark = Mark Peak Reading or Average Reading



6.9 POWERLINE CONDUCTED EMISSIONS

LIMIT

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dBμV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.


MEASUREMENT EQUIPMENT USED

Conducted Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
ESCI EMI TEST RECEIVE.ESCI	ROHDE&SCHWARZ	ESCI	100783	03/19/2011	03/19/2012
LISN	SCHAFFNER	NNB42	2001/001	05/26/2011	05/26/2012
LISN	EMCO	3825/2	8901-1459	03/19/2011	03/19/2012
Temp. / Humidity Meter	VICTOR	VC230	N/A	03/31/2011	03/31/2012
Test S/W	FARAD	EZ-EMC/ CCS-3A1-CE			

Remark: Each piece of equipment is scheduled for calibration once a year.



Test Configuration

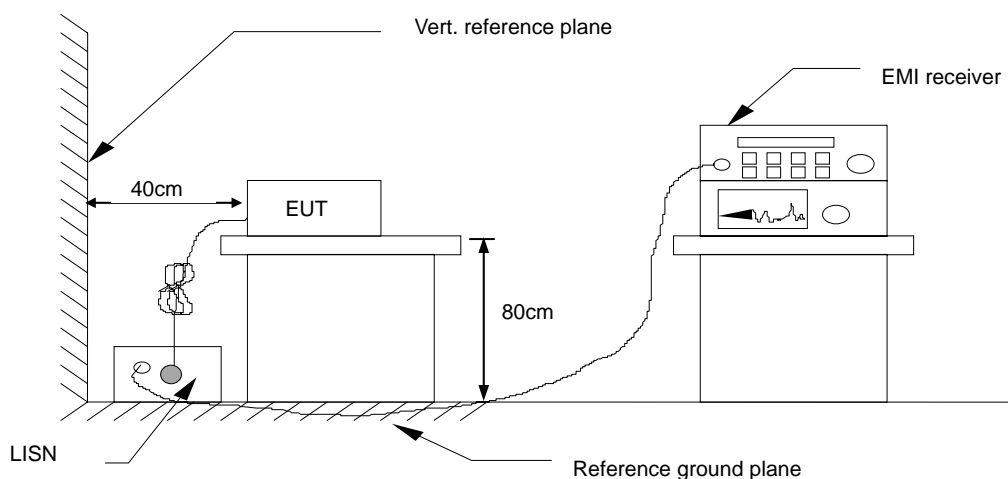

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

**Test Data**

Model No.	IBTMC	RBW,VBW	9 kHz
Environmental Conditions	26°C, 60% RH	Test Mode	Mode 1
Tested by	Leevin Li		

(The chart below shows the highest readings taken from the final data.)

Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)
0.1500	29.42	19.81	11.52	40.94	31.33	65.99	56.00	-25.05	-24.67	Pass
0.1900	23.17	21.47	11.52	34.69	32.99	64.03	54.04	-29.34	-21.05	Pass
0.2660	21.53	19.50	11.52	33.05	31.02	61.24	51.24	-28.19	-20.22	Pass
0.3820	21.01	9.78	11.51	32.52	21.29	58.23	48.24	-25.71	-26.95	Pass
2.1860	13.91	4.03	11.57	25.48	15.60	56.00	46.00	-30.52	-30.40	Pass
14.4260	17.21	2.26	12.34	29.55	14.60	60.00	50.00	-30.45	-35.40	Pass
0.1539	27.11	14.32	11.52	38.63	25.84	65.78	55.79	-27.15	-29.95	Pass
0.2644	19.12	17.36	11.53	30.65	28.89	61.29	51.29	-30.64	-22.40	Pass
1.5580	24.15	5.37	11.54	35.69	16.91	56.00	46.00	-20.31	-29.09	Pass
3.0300	19.84	4.11	11.60	31.44	15.71	56.00	46.00	-24.56	-30.29	Pass
6.8420	21.85	4.75	11.78	33.63	16.53	60.00	50.00	-26.37	-33.47	Pass
13.6740	20.75	2.40	12.21	32.96	14.61	60.00	50.00	-27.04	-35.39	Pass

NOTE: 1. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line).

2. Those frequencies only show peak emission level because that was below the Average limit, so no need to check average anymore.