



FCC/MELLO<sup>2</sup> DEC 11 1998

# FCC TEST REPORT

for

## PART 15, SUBPART B CLASS B

EQUIPMENT : 3D graphics

MODEL NO. : Vulcan 2

F C C I D : ILL152

FILING TYPE : ORIGINAL, CERTIFICATION

APPLICANT : **BRITEK ELECTRONICS CO., LTD.**  
8F-2, No. 146, Sung Chiang Road,  
Taipei, Taiwan, R.O.C.

- The test result refers exclusively to the test presented test model / sample.
- Without the written authorization of the test lab., the Test Report may not be copied.

**SPORTON INTERNATIONAL INC.**

6F, No. 106, Hsin Tai Wu Rd., Sec. 1, Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

EXHIBIT B

**TABLE OF CONTENT**

<b>SECTION TITLE</b>	<b>PAGE</b>
<b>CERTIFICATE OF COMPLIANCE .....</b>	<b>3</b>
<b>1. GENERAL DESCRIPTION OF EQUIPMENT UNDER TEST .....</b>	<b>4</b>
1.1. APPLICANT .....	4
1.2. MANUFACTURER : .....	4
1.3. BASIC DESCRIPTION OF EQUIPMENT UNDER TEST .....	4
1.4. FEATURE OF EQUIPMENT UNDER TEST .....	4
<b>2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST .....</b>	<b>5</b>
2.1. TEST MANNER .....	5
2.2. DESCRIPTION OF TEST SYSTEM .....	5
2.3. CONNECTION DIAGRAM OF TEST SYSTEM .....	7
<b>3. TEST SOFTWARE .....</b>	<b>8</b>
<b>4. GENERAL INFORMATION OF TEST .....</b>	<b>9</b>
4.1. TEST FACILITY .....	9
4.2. STANDARD FOR METHODS OF MEASUREMENT .....	9
4.3. TEST IN COMPLIANCE WITH .....	9
4.4. FREQUENCY RANGE INVESTIGATED .....	9
4.5. TEST DISTANCE .....	9
<b>5. TEST OF CONDUCTED POWERLINE .....</b>	<b>10</b>
5.1. MAJOR MEASURING INSTRUMENTS .....	10
5.2. TEST PROCEDURES .....	11
5.3. TYPICAL TEST SETUP LAYOUT OF CONDUCTED POWERLINE .....	12
5.4. TEST RESULT OF AC POWERLINE CONDUCTED EMISSION .....	13
5.4.1. TEST RESULT OF AC POWERLINE CONDUCTED EMISSION .....	14
5.5. PHOTOGRAPHS OF CONDUCTED POWERLINE TEST CONFIGURATION .....	15
5.5.1. PHOTOGRAPHS OF CONDUCTED POWERLINE TEST CONFIGURATION .....	17
<b>6. TEST OF RADIATED EMISSION .....</b>	<b>19</b>
6.1. MAJOR MEASURING INSTRUMENTS .....	19
6.2. TEST PROCEDURES .....	20
6.3. TYPICAL TEST SETUP LAYOUT OF RADIATED EMISSION .....	21
6.4. TEST RESULT OF RADIATED EMISSION .....	22
6.4.1. TEST RESULT OF RADIATED EMISSION .....	23
6.5. PHOTOGRAPHS OF RADIATED EMISSION TEST CONFIGURATION .....	24
6.5.1. PHOTOGRAPHS OF RADIATED EMISSION TEST CONFIGURATION .....	25
<b>7. ANTENNA FACTOR AND CABLE LOSS .....</b>	<b>26</b>
<b>8. LIST OF MEASURING EQUIPMENT USED .....</b>	<b>27</b>

## CERTIFICATE OF COMPLIANCE

for

### FCC PART 15, SUBPART B CLASS B

EQUIPMENT : 3D graphics


MODEL NO. : Vulcan 2

FCC ID : ILL152

APPLICANT : **BRITEK ELECTRONICS CO., LTD.**  
8F-2, No. 146, Sung Chiang Road,  
Taipei, Taiwan, R.O.C.

### I HEREBY CERTIFY THAT :

The measurement shown in this report were made in accordance with the procedures given in **ANSI C63.4 -1992** and the energy emitted by this equipment was **passed** both radiated and conducted emissions **Class B** limits. Testing was carried out on **June 19, 1998** at **SPORTON International Inc.**

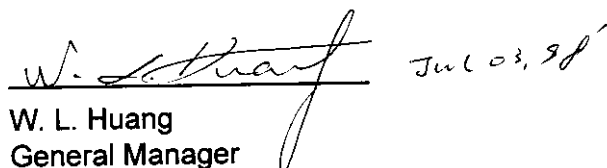  
W. L. Huang  
General Manager

**SPORTON INTERNATIONAL INC.**

6F, No. 106, Hsin Tai Wu Rd., Sec. 1, Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

## **1. GENERAL DESCRIPTION OF EQUIPMENT UNDER TEST**

### **1.1. APPLICANT**

**BRITEK ELECTRONICS CO., LTD.**  
8F-2, No. 146, Sung Chiang Road,  
Taipei, Taiwan, R.O.C.

### **1.2. MANUFACTURER :**

Same as 1.1.

### **1.3. BASIC DESCRIPTION OF EQUIPMENT UNDER TEST**

EQUIPMENT : 3D graphics  
MODEL NO. : Vulcan 2  
FCC ID : ILL152  
TRADE NAME : **BRITEK**  
VGA CABLE : Shielded  
VOODOO TO VGA CARD CABLE : Shielded  
POWER SUPPLY TYPE : N/A  
POWER CORD : N/A

### **1.4. FEATURE OF EQUIPMENT UNDER TEST**

- **Perspective correct texture mapping**
- **Bi-linear and tri-linear texture filtering**
- **Level-of-detail ( LOD ) MIP mapping**
- **Multiple texture formats including 8-bit compressed and 8-bit paletted formats**
- **Full bi-linear blending of paletted and compressed textures**
- **Support for PCI 2.0 and 2.1 spec slots ( newer 2.0 slots )**

## **2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST**

### **2.1. TEST MANNER**

- a. The EUT has been associated with personal computer and peripherals pursuant to ANSI C63.4-1992 and configuration operated in a manner which tended to maximize its emission characteristics in a typical application.
- b. The HITACHI monitor, DELL keyboard, ACEEX modem, HP printer, PRIMAX mouse and EUT were connected to the F.I.C P.C. for EMI test.
- c. The following display resolution were investigated during the compliance test :
  1. Horizontal frequency ( 640×480 to 1600×1200, 31.5KHz to 94KHz )
  2. Vertical frequency ( 60Hz to 85Hz )
  3. 3D MODE.
- d. According to the above tests, we listed the flowing display modes as the worst cases :
  1. 3D MODE.
  2. 1600×1200, 75Hz / 94KHz.
- e. During the test, the monitor AC power cord was plugged into the P.C. computer-mounted AC outlet and a floor-mounted AC outlet to search the maximum emission.
- f. Frequency range investigated: Conduction 450 KHz to 30 MHz, Radiation 30 MHz to 2000 MHz.

### **2.2. DESCRIPTION OF TEST SYSTEM**

Support Device 1. --- P.C. (FIC)

FCC ID : N/A  
Model No. : P2L97  
Serial No. : SP1005  
Data Cable : Shielded  
Power Cord : Non-hielded  
Power Supply Type : Switching

( Remark : This support device was tested to comply with FCC standards and authorized under a declaration of conformity.)

**Support Device 2. --- KEYBOARD (DELL)**

FCC ID : GYUM92SK  
Model No. : AT101 (DE8M)  
Serial No. : SP1009  
Data Cable : Shielded, 360 degree via metal backshells, 1.9m

**Support Device 3. -- PS/2 MOUSE (PRIMAX)**

FCC ID : EMJMUSJQ  
Model No. : MUS9J  
Serial No. : SP1012  
Data Cable : Shielded, 1.7m

**Support Device 4. -- MODEM (ACEEX)**

FCC ID : IFAXDM1414  
Model No. : DM1414  
Power Supply Type : Linear, AC Adapter  
Power Cord : Non-shielded  
Serial No. : SP1019  
Data Cable : Shielded, 1.15m


**Support Device 5. --- PRINTER (HP)**

FCC ID : B94C2642X  
Model No. : DESK JET 400  
Serial No. : SP0037  
Data Cable : Shielded, 360 degree via metal backshells, 1.35m  
Power Supply Type : Linear

**Support Device 6. --- MONITOR (HITACHI)**

FCC ID : M9U9705C97BMD  
Model No. : CM-803ET  
Serial No. : SP1043  
Data Cable : Shielded, 360 degree via metal backshells, 1.7m  
Power Supply Type : Switching  
Power Cord : Non-shielded

2.3. CONNECTION DIAGRAM OF TEST SYSTEM

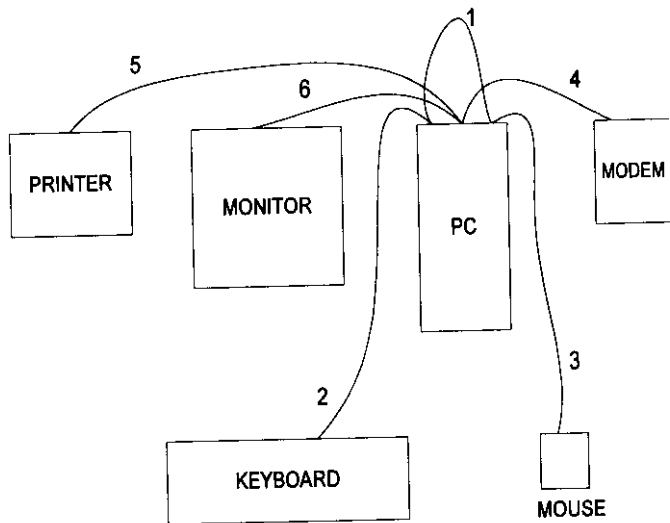

1. The Voodoo cable is connected from the VGA-in port of EUT to the VGA Card.
2. The I/O cable is connected to the support device 2.
3. The I/O cable is connected to the support device 3.
4. The I/O cable is connected to the support device 4.
5. The I/O cable is connected to the support device 5.
6. The I/O cable is connected from the EUT to the support device 6.

### 3. TEST SOFTWARE

An executive program, WINFCC.EXE, 3DMAZE under WIN98, which generates a complete line of continuously repeating " H " pattern was used as the test software.

The program was executed as follows :

- a. Turn on the power of all equipment.
- b. The PC reads the test program from the floppy disk drive and runs it.
- c. The PC sends " H " messages to the monitor, and the monitor displays " H " patterns on the screen.
- d. The PC sends " VIDEO MOTION " messages to the monitor, and the monitor displays "VIDEO MOTION " patterns on the screen.
- e. The PC sends " H " messages to the printer, then the printer prints them on the paper.
- f. The PC sends " H " messages to the modem.
- g. The PC sends " H " messages to the internal Hard Disk, and the Hard Disk reads and writes the message.
- h. Repeat the steps from b to g.



## **4. GENERAL INFORMATION OF TEST**

### **4.1. TEST FACILITY**

This test was carried out by SPORTON INTERNATIONAL INC. in an openarea test site.

Openarea Test Site Location : No. 30-1, Lin 6, Diing-Fwu Tsuen, Lin-Kou-Hsiang,  
Taipei Hsien, Taiwan, R.O.C.

TEL : 886-2-2601-1640,

FAX : 886-2-2601-1695

### **4.2. STANDARD FOR METHODS OF MEASUREMENT**

ANSI C63.4-1992

### **4.3 .TEST IN COMPLIANCE WITH**

FCC PART 15, SUBPART B CLASS B

### **4.4. FREQUENCY RANGE INVESTIGATED**

- a. Conduction : from 450 KHz to 30 MHz
- b. Radiation : from 30 MHz to 2000 MHz.

### **4.5. TEST DISTANCE**

The test distance of radiated emission from antenna to EUT is 3M.

## 5. TEST OF CONDUCTED POWERLINE

Conducted Emissions were measured from 450 KHz to 30 MHz with a bandwidth of 9 KHz on the 115 VAC power and return leads of the EUT according to the methods defined in ANSI C63.4-1992 Section 3.1. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane as shown in Figure 5-3. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.


### 5.1. MAJOR MEASURING INSTRUMENTS

• Test Receiver	( HP 85462A )
Attenuation	0 dB
Start Frequency	0.45 MHz
Stop Frequency	30 MHz
Step MHz	0.007 MHz
IF Bandwidth	9 KHz

**5.2. TEST PROCEDURES**

- a. The EUT was placed 0.4 meter from the conducting wall of the shielding room and was kept at least 80 centimeters from any other grounded conducting surface.
- b. Connect EUT to the power mains through a line impedance stabilization network ( LISN ).
- c. All the support units are connect to the other LISN.
- d. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- e. The FCC states that a 50 ohm , 50 microhenry LISN should be used.
- f. Both sides of AC line were checked for maximum conducted interference.
- g. The frequency range from 450 KHz to 30 MHz was searched.
- h. Set the test-receiver system ( HP receiver 85462A ) to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- i. If the emission level of the EUT in peak mode was 6 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported otherwise the emissions which do not have 6 dB margin will be retested on by one using the quasi-peak method and reported.

5.3. TYPICAL TEST SETUP LAYOUT OF CONDUCTED POWERLINE

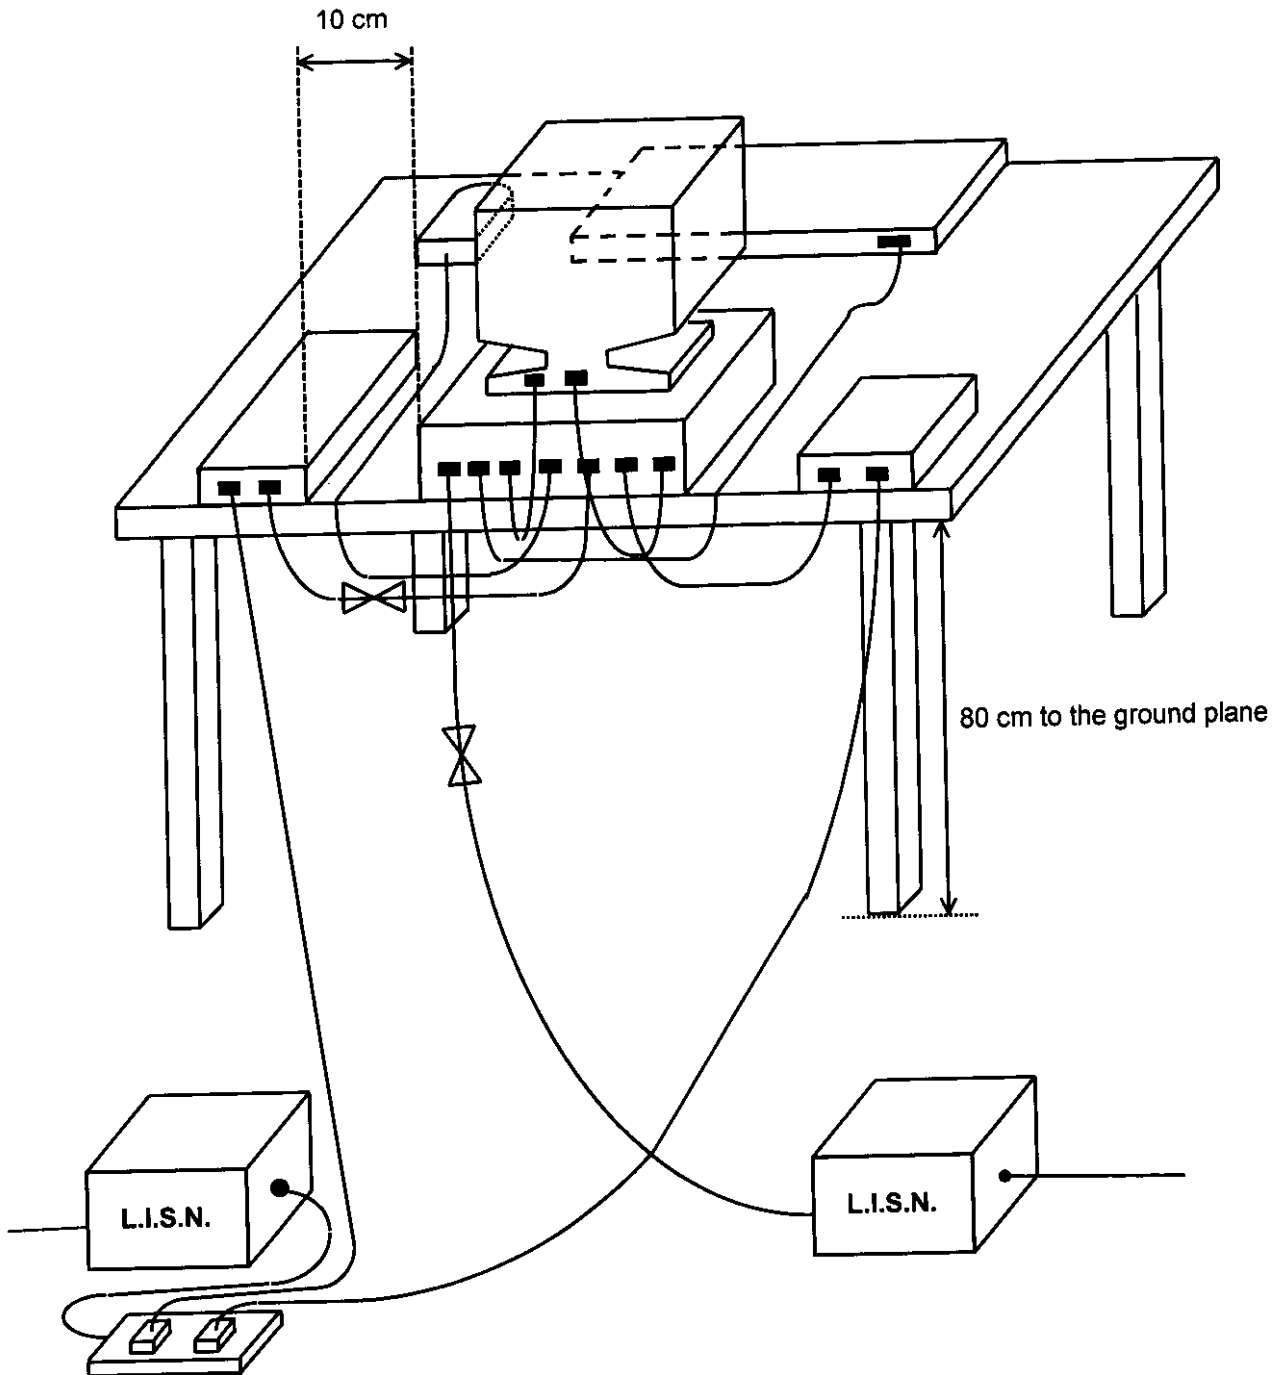

**5.4. TEST RESULT OF AC POWERLINE CONDUCTED EMISSION**

- Frequency Range of Test : from 0.45 MHz to 30 Mhz
- All emissions not reported here are more than 10 dB below the prescribed limit.
- Temperature : 25°C
- Relative Humidity : 65 % RH
- Test Mode : 1600×1200 / 75Hz / 90K
- Test Date : June 19, 1998

**The Conducted Emission test was passed at Line 9.78 MHz/ 33.30 dBuV.**

Frequency ( MHz )	Line / Neutral	Meter Reading		Limits		Margin
		( dBuV )	( uV )	( dBuV )	( uV )	( dB )
9.78	L	33.30	46.24	48.00	251.19	-14.70
22.57	L	28.70	27.23	48.00	251.19	-19.30
0.48	N	31.50	37.58	48.00	251.19	-16.50
0.57	N	28.30	26.00	48.00	251.19	-19.70
9.79	N	29.60	30.20	48.00	251.19	-18.40
22.57	N	28.20	25.70	48.00	251.19	-19.80

Test Engineer : *Alex Wu*  
 ALEX WU

**5.4.1. TEST RESULT OF AC POWERLINE CONDUCTED EMISSION**

- Frequency Range of Test : from 0.45 MHz to 30 Mhz
- All emissions not reported here are more than 10 dB below the prescribed limit.
- Temperature : 25°C
- Relative Humidity : 65 % RH
- Test Mode : 3D MODE
- Test Date : June 18, 1998

**The Conducted Emission test was passed at Neutral 0.47 MHz/ 29.40 dBuV.**

Frequency ( MHz )	Line / Neutral	Meter Reading		Limits		Margin
		( dBuV )	( uV )	( dBuV )	( uV )	( dB )
11.01	L	26.80	21.88	48.00	251.19	-21.20
18.70	L	26.50	21.13	48.00	251.19	-21.50
23.71	L	25.70	19.28	48.00	251.19	-22.30
0.47	N	29.40	29.51	48.00	251.19	-18.60
11.01	N	25.50	18.84	48.00	251.19	-22.50
18.66	N	26.70	21.63	48.00	251.19	-21.30

Test Engineer : *Alex Wu*  
 ALEX WU

**6. TEST OF RADIATED EMISSION**

Radiated emissions from 30 MHz to 2000 MHz were measured with a bandwidth of 120 KHz according to the methods defines in ANSI C63.4-1992. The EUT was placed on a nonmetallic stand in the open-field site, 0.8 meter above the ground plane, as shown in Figure 6-3. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions.

**6.1. MAJOR MEASURING INSTRUMENTS**


- RF Preselector
  - Attenuation 0 dB
  - RF Gain 20 dB
  - Signal Input Input 2 ( for 20 MHz to 2 GHz )
  
- Spectrum Analyzer 8568B/ 8594A
  - Attenuation 0 dB
  - Start Frequency 30 MHz
  - Stop Frequency 2000 MHz
  - Resolution Bandwidth 1 MHz
  - Video Bandwidth 1 MHz
  - Signal Input Input 1 ( for 9 KHz to 2.9 GHz )
  
- Quasi-Peak Adapter
  - Resolution Bandwidth 120 KHz
  - Frequency Band 30 MHz to 1 GHz
  - Quasi-Peak Detector ON for Quasi-Peak Mode
  - OFF for Peak Mode

**6.2. TEST PROCEDURES**

- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a half wave dipole and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower ( from 1 M to 4 M ) and turn table ( from 0 degree to 360 degrees ) to find the maximum reading.
- f. Set the test-receiver system ( HP 8568B ) to Peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 6 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported otherwise the emissions which do not have 6 dB margin will be repeated one by one using the quasi-peak method and reported.



6.3. TYPICAL TEST SETUP LAYOUT OF RADIATED EMISSION

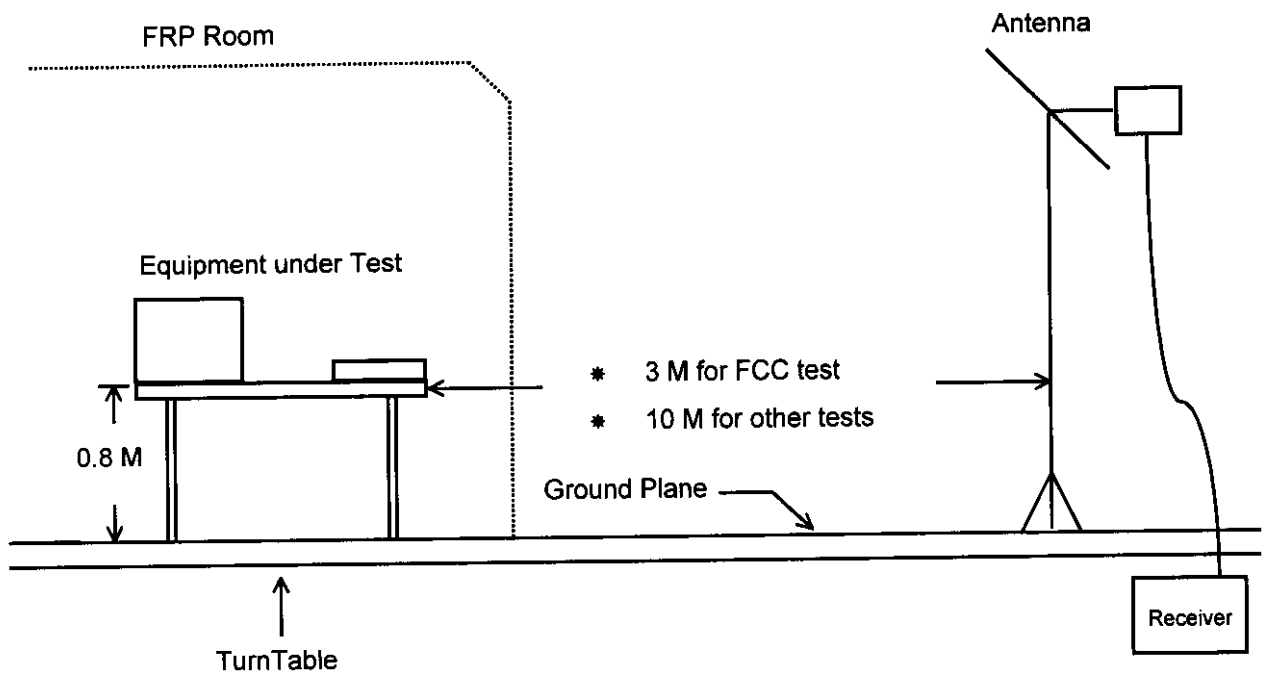

**6.4. TEST RESULT OF RADIATED EMISSION**

- Equipment meets the technical specifications of 15.109
- Frequency Range of Test : from 30 MHz to 2000 MHz
- Test Distance : 3 M
- Temperature : 31°C
- Relative Humidity : 71 % RH
- Test Mode : 1600 × 1200 / 75Hz / 94K
- Test Date : June 15, 1998
- Emission level ( dBuV/m ) = 20 log Emission level ( uV/m )
- Sample Calculation at 312.00 MHz  
Corrected Reading = 18.06 + 3.10 + 21.67 = 42.83 (dBuV/m)

**The Radiated Emission test was passed at**

**Vertical 312.00 MHz / 42.83 dBuV**

**Antenna Height 1.0 Meter , Turntable Degree 82 °.**

Frequency ( MHz )	Polarity	Antenna Factor ( dB )	Cable Loss ( dB )	Reading ( dBuV )	Limits ( dBuV )	( uV )	Emission Level ( dBuV )	( uV )	Margin ( dB )
312.00	V	18.06	3.10	21.67	46.00	200	42.83	138.52	-3.17
72.80	V	5.88	1.26	27.10	40.00	100	34.24	51.52	-5.76
39.40	V	0.36	0.93	31.58	40.00	100	32.87	44.00	-7.13
112.80	H	10.19	1.63	21.08	43.50	150	32.90	44.16	-10.60
36.00	H	-0.46	0.84	33.62	40.00	100	34.01	50.18	-5.99
146.60	H	11.74	1.98	17.13	43.50	150	30.85	34.87	-12.65

Test Engineer : *William Lee*  
WILLIAM LEE

**6.4.1. TEST RESULT OF RADIATED EMISSION**

- Equipment meets the technical specifications of 15.109
- Frequency Range of Test : from 30 MHz to 2000 MHz
- Test Distance : 3 M
- Temperature : 31°C
- Relative Humidity : 71 % RH
- Test Mode : 3D MODE
- Test Date : June 15, 1998
- Emission level ( dBuV/m ) = 20 log Emission level ( uV/m )
- Sample Calculation at 35.80 MHz  
Corrected Reading = (-0.51) + 0.84 + 34.38 = 34.71 (dBuV/m)

**The Radiated Emission test was passed at**

**Horizontal 35.80 MHz / 34.71 dBuV**

**Antenna Height 3.0 Meter , Turntable Degree 276 °.**

Frequency ( MHz )	Antenna Polarity	Cable Factor ( dB )	Reading Loss ( dB )	Reading ( dBuV )	Limits ( dBuV )	Emission ( uV )	Level ( dBuV )	Margin ( uV )	( dB )
35.80	H	-0.51	0.84	34.38	40.00	100	34.71	54.39	-5.29
34.30	V	-0.91	0.82	34.69	40.00	100	34.60	53.70	-5.40
401.60	V	22.29	3.61	15.34	46.00	200	41.24	115.35	-4.76
50.00	V	2.39	1.00	20.34	40.00	100	23.73	15.36	-16.27
312.00	V	18.06	3.10	18.86	46.00	200	40.02	100.23	-5.98
221.60	V	14.37	2.41	15.99	46.00	200	32.77	43.50	-13.23

Test Engineer : *William Lee*

WILLIAM LEE

**7. ANTENNA FACTOR AND CABLE LOSS**

Frequency ( MHz )	Antenna Factor ( dB )	Cable Loss ( dB )
30	-1.91	0.90
35	-0.50	0.92
40	0.61	1.04
45	1.40	1.28
50	2.39	1.10
55	3.54	1.11
60	4.40	1.30
65	4.84	1.40
70	5.59	1.37
75	6.21	1.24
80	7.60	1.51
85	7.73	1.60
90	8.22	1.60
95	8.90	1.70
100	9.36	1.70
110	10.01	1.70
120	10.41	1.90
130	10.84	1.90
140	11.42	1.91
150	11.91	2.01
160	12.25	2.11
170	12.72	2.21
180	13.02	2.30
190	13.50	2.30
200	14.05	2.40
220	15.11	2.50
240	16.81	2.60
260	17.51	2.71
280	17.70	2.90
300	17.89	2.91
320	18.00	3.10
340	18.33	3.20
360	19.44	3.30
380	20.31	3.40
400	21.19	3.50
450	21.10	3.70
500	22.21	4.10
550	23.42	4.30
600	24.01	4.50
650	25.11	4.70
700	26.00	4.90
750	26.41	5.11
800	27.10	5.50
850	27.51	5.60
900	27.90	5.80
950	28.01	5.90

## 8. LIST OF MEASURING EQUIPMENT USED

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Receiver RF section (site 1)	HP	85462A	3325A00108	9 KHz - 6.5 GHz	Oct. 22, 1997	Conduction
RF Filter section (site 1)	HP	85460A	3308A00104	9 KHz - 6.5 GHz	Oct. 22, 1997	Conduction
LISN (EUT) (site 1)	EMCO	3850/2	1035	50 ohm / 50 uH	Oct. 27, 1997	Conduction
LISN (Support Unit) (site 1)	KYORITSU	KNW-407	8-693-10	50 ohm / 50 uH	Oct. 04, 1997	Conduction
EMI Filter (site 1)	CORCOM	MRI-2030	N/A	480 VAC / 30 A	N/A	Conduction
Amplifier (Site 1)	HP	8447D	2944A08291	0.1MHz -1.3GHz	Nov. 12, 1997	Radiation
Quasi-Peak Adapter (site 1)	HP	85650A	2811A01116	9KHz - 1000KHz	Jun. 17, 1998	Radiation
Spectrum Analyzer (site 1)	HP	8568B	2732A04100	100Hz - 1500KHz	Jun. 17, 1998	Radiation
Bilog Antenna (Site 1)	CHASE	CBL6111	1378	30MHz -1 GHz	Aug. 11, 1997	Radiation
Half-wave dipole antenna (site 1)	EMCO	3121C	9705-1285	28 M - 1GHz	May 19, 1998	Radiation
Turn Table (site 1)	EMCO	1060-1.211	9507-1805	0 ~ 360 degree	N/A	Radiation
Antenna Mast (site 1)	EMCO	1051-1.2	9502-1868	1 m - 4 m	N/A	Radiation