


# ENGINEERING TEST REPORT



## Analog Multiband RF Module

Model:T6

FCC ID:IMA-T6

IC:120A-T6

*Applicant:*

### Technisonic Industries Limited

240 Traders Blvd. E.  
Mississauga, Ontario  
Canada L4Z 1W7

*Tested in Accordance With*

**Federal Communications Commission (FCC)  
47 CFR, Parts 2 and 90 (Subpart I) &  
ISED RSS-119, Issue 12**

**UltraTech's File No.: 22TIL129-F90**

This Test report is Issued under the Authority of  
Tri M. Luu  
Vice President of Engineering  
UltraTech Group of Labs

Date: September 29, 2022

Report Prepared by: Santhosh Fernandez

Tested by: Nimisha Desai and Angus Au

Issued Date: September 29, 2022

Test Dates: August 17- Sep 21, 2022

- The results in this Test Report apply only to the sample(s) tested, and the sample tested is randomly selected.
- This report must not be used by the client to claim product endorsement by any agency of the US Government.
- This test report shall not be reproduced, except in full, without a written approval from UltraTech

## UltraTech

3000 Bristol Circle, Oakville, Ontario, Canada, L6H 6G4

Tel.: (905) 829-1570 Fax.: (905) 829-8050

Website: [www.ultratech-labs.com](http://www.ultratech-labs.com), Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Email: [tri@ultratech-labs.com](mailto:tri@ultratech-labs.com)



#0685



APEC  
TEL#CA0001



1309



CA0001/2049



AT-1945



SL2-IN-E-  
1119R



Korea  
KCC-  
RRR

CA000  
1

## TABLE OF CONTENTS

|                                                                                                                  |          |
|------------------------------------------------------------------------------------------------------------------|----------|
| <b>EXHIBIT 1. INTRODUCTION .....</b>                                                                             | <b>1</b> |
| 1.1. SCOPE.....                                                                                                  | 1        |
| 1.2. RELATED SUBMITTAL(S)/GRANT(S).....                                                                          | 1        |
| 1.3. NORMATIVE REFERENCES .....                                                                                  | 1        |
| 1.4.....                                                                                                         | 1        |
| <b>EXHIBIT 2. PERFORMANCE ASSESSMENT .....</b>                                                                   | <b>2</b> |
| 2.1. CLIENT INFORMATION .....                                                                                    | 2        |
| 2.2. EQUIPMENT UNDER TEST (EUT) INFORMATION.....                                                                 | 2        |
| 2.3. EUT'S TECHNICAL SPECIFICATIONS .....                                                                        | 3        |
| 2.4. LIST OF EUT'S PORTS .....                                                                                   | 3        |
| 2.5. ANCILLARY EQUIPMENT .....                                                                                   | 3        |
| <b>EXHIBIT 3. EUT OPERATING CONDITIONS AND CONFIGURATIONS DURING TESTS .....</b>                                 | <b>4</b> |
| 3.1. CLIMATE TEST CONDITIONS .....                                                                               | 4        |
| 3.2. OPERATIONAL TEST CONDITIONS & ARRANGEMENT FOR TEST SIGNALS .....                                            | 4        |
| <b>EXHIBIT 4. SUMMARY OF TEST RESULTS .....</b>                                                                  | <b>5</b> |
| 4.1. LOCATION OF TESTS .....                                                                                     | 5        |
| 4.2. APPLICABILITY & SUMMARY OF EMISSION TEST RESULTS.....                                                       | 5        |
| 4.3. MODIFICATIONS INCORPORATED IN THE EUT FOR COMPLIANCE PURPOSES.....                                          | 6        |
| 4.4. DEVIATION OF STANDARD TEST PROCEDURES .....                                                                 | 6        |
| <b>EXHIBIT 5. MEASUREMENTS, EXAMINATIONS &amp; TEST DATA FOR EMC EMISSIONS.....</b>                              | <b>7</b> |
| 5.1. TEST PROCEDURES.....                                                                                        | 7        |
| 5.2. MEASUREMENT UNCERTAINTIES.....                                                                              | 7        |
| 5.3. MEASUREMENT EQUIPMENT USED .....                                                                            | 7        |
| 5.4. ESSENTIAL/PRIMARY FUNCTIONS AS DECLARED BY THE MANUFACTURER .....                                           | 7        |
| 5.5. RF POWER OUTPUT [§§ 2.1046 & 90.205] [RSS-GEN § 4.8 & RSS-119 § 5.4] .....                                  | 8        |
| 5.5.1. Limits .....                                                                                              | 8        |
| 5.5.2. Method of Measurements.....                                                                               | 8        |
| 5.5.3. Test Data .....                                                                                           | 8        |
| 5.6. FREQUENCY STABILITY [§§ 2.1055 & 90.213] [RSS-119 § 5.3].....                                               | 9        |
| 5.6.1. Limits .....                                                                                              | 9        |
| 5.6.2. Method of Measurements.....                                                                               | 9        |
| 5.6.3. Test Data .....                                                                                           | 10       |
| 5.7. AUDIO FREQUENCY RESPONSE [§ 2.1047(A)].....                                                                 | 11       |
| 5.7.1. Limits .....                                                                                              | 11       |
| 5.7.2. Method of Measurements.....                                                                               | 11       |
| 5.7.3. Test Data .....                                                                                           | 12       |
| 5.8. MODULATION LIMITING [§§ 2.1047(B) & 90.210].....                                                            | 14       |
| 5.8.1. Limits .....                                                                                              | 14       |
| 5.8.2. Method of Measurements.....                                                                               | 14       |
| 5.8.3. Test Data .....                                                                                           | 14       |
| 5.9. OCCUPIED BANDWIDTH & EMISSION MASK [§§ 2.1049, 90.209 & 90.210] [RSS-119 § 5.5 & 5.8].....                  | 16       |
| 5.9.1. Limits .....                                                                                              | 16       |
| 5.9.2. Method of Measurements.....                                                                               | 16       |
| 5.9.3. Test Data .....                                                                                           | 16       |
| 5.10. TRANSMITTER ANTENNA POWER SPURIOUS/HARMONIC CONDUCTED EMISSIONS [§§ 2.1051 & 90.210] [RSS-119 § 5.8] ..... | 26       |

---

### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 22TIL129-F90  
September 29, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

|                   |                                                                                                          |           |
|-------------------|----------------------------------------------------------------------------------------------------------|-----------|
| 5.10.1.           | Limits .....                                                                                             | 26        |
| 5.10.2.           | Method of Measurements.....                                                                              | 26        |
| 5.10.3.           | Test Data .....                                                                                          | 27        |
| 5.11.             | TRANSMITTER SPURIOUS/HARMONIC RADIATED EMISSIONS [§§ 2.1053 & 90.210] [RSS-119, § 5.5 & 5.8] .....       | 39        |
| 5.11.1.           | Limits .....                                                                                             | 39        |
| 5.11.2.           | Method of Measurements.....                                                                              | 39        |
| 5.11.3.           | Test Data .....                                                                                          | 39        |
| 5.12.             | RF EXPOSURE REQUIRMENTS [§§ 1.1310 & 2.1091] [RSS GEN SEC 5.6 & RSS-102] .....                           | 40        |
| 5.12.1.           | Method of Measurements.....                                                                              | 40        |
| 5.12.2.           | RF Evaluation.....                                                                                       | 42        |
| 5.13.             | RECEIVER ANTENNA POWER SPURIOUS/HARMONIC CONDUCTED EMISSIONS [RSS-119 § 5.11, RSS-GEN §§ 4.10 & 6] ..... | 43        |
| 5.13.1.           | Limits .....                                                                                             | 43        |
| 5.13.2.           | Method of Measurements.....                                                                              | 43        |
| 5.13.3.           | Test Data .....                                                                                          | 43        |
| 5.14.             | RECEIVER SPURIOUS EMISSIONS (RADIATED) [RSS-119 § 5.11, RSS-GEN §§ 4.10 & 6] .....                       | 49        |
| 5.14.1.           | Limits .....                                                                                             | 49        |
| 5.14.2.           | Method of Measurements.....                                                                              | 49        |
| 5.14.3.           | Test Data .....                                                                                          | 49        |
| 5.15.             | POWER LINE CONDUCTED EMISSIONS [ICES-003, RSS-GEN § 7.2.2] .....                                         | 50        |
| 5.15.1.           | Limit(s) .....                                                                                           | 50        |
| 5.15.2.           | Method of Measurements.....                                                                              | 50        |
| 5.15.3.           | Test Data .....                                                                                          | 50        |
| 5.16.             | RADIATED EMISSIONS FROM UNINTENTIONAL RADIATORS [ICES-003] .....                                         | 52        |
| 5.16.1.           | Limits .....                                                                                             | 52        |
| 5.16.2.           | Method of Measurements.....                                                                              | 52        |
| 5.16.3.           | Test Data .....                                                                                          | 52        |
| <b>EXHIBIT 6.</b> | <b>TEST SETUP AND EQUIPMENT LIST .....</b>                                                               | <b>53</b> |
| 6.1.              | CONDUCTED POWER .....                                                                                    | 53        |
| 6.2.              | MODULATION LIMIT.....                                                                                    | 54        |
| 6.3.              | AUDIO FREQUENCY RESPONSE.....                                                                            | 55        |
| 6.4.              | 99% OBW AND MASK .....                                                                                   | 56        |
| 6.5.              | TX CONDUCTED EMISSION .....                                                                              | 57        |
| 6.6.              | RX CONDUCTED EMISSION .....                                                                              | 58        |
| 6.7.              | TX RADIATED .....                                                                                        | 59        |
| 6.8.              | RX RADIATED, UNINTENTIONAL RADIATED.....                                                                 | 60        |
| 6.9.              | FREQUENCY STABILITY .....                                                                                | 61        |
| <b>EXHIBIT 7.</b> | <b>MEASUREMENT UNCERTAINTY.....</b>                                                                      | <b>62</b> |
| <b>EXHIBIT 8.</b> | <b>MEASUREMENT METHODS .....</b>                                                                         | <b>63</b> |
| 8.1.              | CONDUCTED POWER MEASUREMENTS.....                                                                        | 63        |
| 8.2.              | RADIATED POWER MEASUREMENTS (ERP & EIRP) USING SUBSTITUTION METHOD .....                                 | 64        |
| 8.2.1.            | MAXIMIZING RF EMISSION LEVEL (E-FIELD).....                                                              | 64        |
| 8.2.2.            | Measuring the EIRP of Spurious/Harmonic Emissions using Substitution Method .....                        | 65        |
| 8.3.              | FREQUENCY STABILITY .....                                                                                | 67        |
| 8.4.              | EMISSION MASK.....                                                                                       | 68        |
| 8.5.              | SPURIOUS EMISSIONS (CONDUCTED).....                                                                      | 68        |
| 8.6.              | TRANSIENT FREQUENCY BEHAVIOR.....                                                                        | 69        |

## EXHIBIT 1. INTRODUCTION

### 1.1. SCOPE

|                         |                                                                                                                                                                                                         |
|-------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Reference:</b>       | FCC Parts 2 and 90, RSS-119                                                                                                                                                                             |
| <b>Title:</b>           | Code of Federal Regulations (CFR), Title 47 Telecommunication – Parts 2 & 90 Land Mobile and Fixed Radio Transmitters and Receivers Operating in the Frequency Range 27.41-960 MHz and RSS -119         |
| <b>Purpose of Test:</b> | To obtain FCC Certification Authorization for Radio operating in the Frequency Band 30-50 MHz and RSS -119                                                                                              |
| <b>Test Procedures:</b> | Both conducted and radiated emissions measurements were conducted in accordance with TIA/EIA Standard, TIA-603-E – Land Mobile FM or PM Communications Equipment Measurement and performance Standards. |

### 1.2. RELATED SUBMITTAL(S)/GRANT(S)

None.

### 1.3. NORMATIVE REFERENCES

#### 1.4.

| Publication                | Year | Title                                                                                                                                                               |
|----------------------------|------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| FCC CFR Parts 0-19, 80-End | 2022 | Code of Federal Regulations – Telecommunication                                                                                                                     |
| ANSI C63.4                 | 2014 | American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz |
| ANSI/TIA-603-E             | 2016 | Land Mobile FM or PM Communications Equipment Measurement and Performance Standards                                                                                 |
| ANSI C63.26                | 2015 | American National Standard for Compliance Testing of Transmitters used in Licensed Radio Services                                                                   |
| RSS-119, Issue 12          | 2015 | Land Mobile and Fixed Transmitters and Receivers, 27.41-960 MHz                                                                                                     |
| RSS-Gen, Issue 5           | 2018 | General Requirements for Compliance of Radio Apparatus                                                                                                              |
| ICES-003, ISSUE 7          | 2020 | Information Technology Equipment (Including Digital Apparatus) — Limits and Methods of Measurement                                                                  |

## EXHIBIT 2. PERFORMANCE ASSESSMENT

### 2.1. CLIENT INFORMATION

| APPLICANT              |                                                                                                            |
|------------------------|------------------------------------------------------------------------------------------------------------|
| <b>Name:</b>           | Technisonic Industries Ltd.                                                                                |
| <b>Address:</b>        | 240 Traders Blvd. E.<br>Mississauga, Ontario<br>Canada L4Z 1W7                                             |
| <b>Contact Person:</b> | Mr. Steve McIntosh<br>Phone #: 905-890-2113 ext 205<br>Fax #: 905-890-5338<br>Email Address: stevem@til.ca |

| MANUFACTURER           |                                                                                                            |
|------------------------|------------------------------------------------------------------------------------------------------------|
| <b>Name:</b>           | Technisonic Industries Ltd.                                                                                |
| <b>Address:</b>        | 240 Traders Blvd. E.<br>Mississauga, Ontario<br>Canada L4Z 1W7                                             |
| <b>Contact Person:</b> | Mr. Steve McIntosh<br>Phone #: 905-890-2113 ext 205<br>Fax #: 905-890-5338<br>Email Address: stevem@til.ca |

### 2.2. EQUIPMENT UNDER TEST (EUT) INFORMATION

The following information (with the exception of the Date of Receipt) has been supplied by the applicant.

|                                             |                                            |
|---------------------------------------------|--------------------------------------------|
| <b>Brand Name:</b>                          | Technisonic Industries Limited             |
| <b>Product Name:</b>                        | Analog Multiband RF Module                 |
| <b>Model Name or Number:</b>                | T6                                         |
| <b>Serial Number:</b>                       | FTD10001                                   |
| <b>Type of Equipment:</b>                   | Licensed Non-Broadcast Station Transmitter |
| <b>External Power Supply:</b>               | 28 VDC nominal                             |
| <b>Transmitting/Receiving Antenna Type:</b> | Non-integral                               |
| <b>Primary User Functions of EUT:</b>       | RF Transceiver in multiple bands           |

#### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 22TIL129-F90  
September 29, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## 2.3. EUT'S TECHNICAL SPECIFICATIONS

| TRANSMITTER                     |                                    |
|---------------------------------|------------------------------------|
| Equipment Type:                 | Mobile                             |
| Intended Operating Environment: | Commercial, Industrial or Business |
| Power Supply Requirement:       | 28.0 VDC nominal                   |
| RF Output Power Rating:         | 1 to 10 Watts                      |
| Operating Frequency Range:      | 30-50 MHz                          |
| RF Output Impedance:            | 50 $\Omega$                        |
| Channel Spacing:                | 25 kHz                             |
| Occupied Bandwidth (99%):       | 15.45kHz                           |
| Emission Designation*:          | 16K0F3E                            |
| Oscillator Frequency(ies):      | VCO up to 490 MHz                  |
| Antenna Connector Type:         | BNC                                |

\* For an average case of commercial telephony, the necessary bandwidth is calculated as follows:

$$B_n = 2M + 2DK$$

Channel Spacing = 20 kHz, D = 5 kHz, K = 1, M = 3 kHz

$$B_n = 2M + 2DK = 2(3) + 2(5)(1) = 16 \text{ kHz}$$

Designation of emission: 16K0F3E

## 2.4. LIST OF EUT'S PORTS

| Port Number | EUT's Port Description | Number of Identical Ports | Connector Type | Shielded/Non-shielded |
|-------------|------------------------|---------------------------|----------------|-----------------------|
| 1           | Power                  | 1                         | 8 pin header   | Non-shielded          |
| 2           | Audio / Data           | 1                         | 10 pin header  | Non-shielded          |
| 3           | Antenna                | 1                         | BNC            | Shielded              |

## 2.5. Ancillary Equipment

| Ancillary Equipment # 1                     |                                              |
|---------------------------------------------|----------------------------------------------|
| Equipment Make and Name:                    | Technisonic Industries Limited / Transceiver |
| Model Name or Number:                       | TDFM-9100                                    |
| Serial Number:                              | FTD10001                                     |
| Cable Type:                                 | Shielded                                     |
| Connected to EUT's Port #:(See above table) | 1 and 2                                      |

| Ancillary Equipment # 2                     |                                                       |
|---------------------------------------------|-------------------------------------------------------|
| Equipment Make and Name:                    | Technisonic Industries Limited / Transceiver test box |
| Model Name or Number:                       | TDFM-9000 Radio Test Jig                              |
| Cable Type:                                 | 25 pin D sub                                          |
| Connected to EUT's Port #:(See above table) | None (connects to ancillary equipment #1 only)        |

### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 22TIL129-F90  
September 29, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## EXHIBIT 3. EUT OPERATING CONDITIONS AND CONFIGURATIONS DURING TESTS

### 3.1. CLIMATE TEST CONDITIONS

The climate conditions of the test environment are as follows:

|                     |                |
|---------------------|----------------|
| Temperature:        | 21°C           |
| Humidity:           | 51%            |
| Pressure:           | 102 kPa        |
| Power Input Source: | 28 VDC Nominal |

### 3.2. OPERATIONAL TEST CONDITIONS & ARRANGEMENT FOR TEST SIGNALS

|                                  |                                                                                                                          |
|----------------------------------|--------------------------------------------------------------------------------------------------------------------------|
| <b>Operating Modes:</b>          | The transmitter was operated in a continuous transmission mode with the carrier modulated as specified in the Test Data. |
| <b>Special Test Software:</b>    | N/A                                                                                                                      |
| <b>Special Hardware Used:</b>    | N/A                                                                                                                      |
| <b>Transmitter Test Antenna:</b> | The EUT is tested with the antenna port terminated to a 50 $\Omega$ RF Load.                                             |

| Transmitter Test Signals                                                                                                                                                 |                                                    |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------|
| <b>Frequency Band(s):</b>                                                                                                                                                | 30-50 MHz                                          |
| <b>Test Frequencies:</b><br>(Near lowest, near middle & near highest frequencies in the frequency range of operation.)                                                   | 30.6 MHz, 40 MHz, 49.6 MHz                         |
| <b>Transmitter Wanted Output Test Signals:</b><br><br>Transmitter Power (measured maximum output power):<br><br>Normal Test Modulation:<br><br>Modulating signal source: | <br><br>10.23 Watts High<br><br>FM<br><br>External |

## EXHIBIT 4. SUMMARY OF TEST RESULTS

### 4.1. LOCATION OF TESTS

All of the measurements described in this report were performed at Ultratech Group of Labs located in the city of Oakville, Province of Ontario, Canada.

Radiated Emissions were performed at the Ultratech's 3-10 TDK Semi-Anechoic Chamber situated in the Town of Oakville, province of Ontario. This test site been calibrated in accordance with ANSI C63.4, and found to be in compliance with the requirements of Sec. 2.948 of the FCC Rules. The descriptions and site measurement data of the Oakville 3-10 TDK Semi-Anechoic Chamber has been filed with ANAB File No.: AT-1945.

### 4.2. APPLICABILITY & SUMMARY OF EMISSION TEST RESULTS

| FCC/RSS Section(s)                                                           | Test Requirements                                           | Applicability (Yes/No)                                                                         |
|------------------------------------------------------------------------------|-------------------------------------------------------------|------------------------------------------------------------------------------------------------|
| 1.1307, 1.1310, 2.1091 & 2.1093<br>RSS-Gen, §3.4 & RSS-102                   | RF Exposure Limit                                           | Yes                                                                                            |
| 2.1046, 22.565, 74.461, 80.215 &<br>90.205<br>RSS-119 § 5.4                  | RF Power Output                                             | Yes                                                                                            |
| 2.1047(a), 80.213(e) & 90.242(b)(8)                                          | Audio Frequency Response                                    | Not applicable to new standard.<br>However, tests are conducted<br>under FCC's recommendation. |
| 2.1047(b), 74.463, 80.213 & 90.210                                           | Modulation Limiting                                         | Yes                                                                                            |
| 2.1049, 74.462, 80.211(f), 90.209 &<br>90.210<br>RSS-Gen § 6.7 RSS-119 § 5.5 | Emission Limitation & Emission Mask                         | Yes                                                                                            |
| 2.1051, 2.1057, 80.211(f)(3), &<br>90.210<br>RSS-119 § 5.8                   | Emission Limits - Spurious<br>Emissions at Antenna Terminal | Yes                                                                                            |
| 2.1053, 2.1057, 22.359,<br>80.211(f)(3), & 90.210<br>RSS-119 § 5.8           | Emission Limits - Field Strength of<br>Spurious Emissions   | Yes                                                                                            |
| 2.1055, 22.355, 74.464 80.209 &<br>90.213<br>RSS-119 § 5.3                   | Frequency Stability                                         | N/A                                                                                            |
| 74.462(c) & 90.214<br>RSS-119 § 5.9                                          | Transient Frequency Behavior                                | Yes                                                                                            |
| ICES-003                                                                     | Radiated Emissions from Digital<br>Apparatus – Radiated     | Yes                                                                                            |
| RSS-Gen § 8.8<br>ICES-003                                                    | Power Line Conducted Emissions<br>from Digital Apparatus    | Yes                                                                                            |
| RSS-119 § 5.11<br>RSS-Gen, Section 7.3                                       | Receiver Spurious Emissions<br>(Radiated)                   | Yes                                                                                            |
| RSS-119 § 5.11<br>RSS-Gen, Section 7.4                                       | Receiver Spurious Emissions<br>(Antenna Conducted)          | Yes                                                                                            |

#### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 22TIL129-F90  
September 29, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Model No.: T6, by Technisonic Industries Limited has also been tested and found to comply with FCC Part 15, Subpart B - Radio Receivers and Digital Devices. The engineering test report has been documented and kept on file and it is available upon request.

#### **4.3. MODIFICATIONS INCORPORATED IN THE EUT FOR COMPLIANCE PURPOSES**

None

#### **4.4. DEVIATION OF STANDARD TEST PROCEDURES**

None.

---

**ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

**File #: 22TIL129-F90**  
September 29, 2022

*All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)*

## **EXHIBIT 5. MEASUREMENTS, EXAMINATIONS & TEST DATA FOR EMC EMISSIONS**

### **5.1. TEST PROCEDURES**

This section contains test results only. Details of test methods and procedures can be found in Exhibit 8 of this report

### **5.2. MEASUREMENT UNCERTAINTIES**

The measurement uncertainties stated were calculated in accordance with requirements of UKAS Document NIS 81 with a confidence level of 95%. Please refer to Exhibit 7 for Measurement Uncertainties.

### **5.3. MEASUREMENT EQUIPMENT USED**

The measurement equipment used complied with the requirements of the Standards referenced in the Methods & Procedures ANSI C63.4 and CISPR 16-1-1.

### **5.4. ESSENTIAL/PRIMARY FUNCTIONS AS DECLARED BY THE MANUFACTURER**

Multiband RF Module

## 5.5. RF POWER OUTPUT [§§ 2.1046 & 90.205] [RSS-Gen § 4.8 & RSS-119 § 5.4]

### 5.5.1. Limits

Please refer to FCC 47 CFR 90.205 for specification details.

RSS-119 The output power shall be within + 1.0 dB of the manufacturer's rated power and RSS 119 Section 5.4 table 2

### 5.5.2. Method of Measurements

Refer to Exhibit 8, Section 8.1 (Conducted) and 8.2 (Radiated) of this report for measurement details

### 5.5.3. Test Data

| Channel                    | Frequencies<br>MHz | Power<br>Rating<br>Watts | Power<br>Rating<br>dBm | Actual<br>Power<br>dBm | Actual Power<br>Watts |
|----------------------------|--------------------|--------------------------|------------------------|------------------------|-----------------------|
| High Power Level, 10 Watts |                    |                          |                        |                        |                       |
| 20                         | 30.600             | 10.0                     | 40.00                  | 40.04                  | 10.09                 |
| 21                         | 40.000             | 10.0                     | 40.00                  | 40.08                  | 10.19                 |
| 22                         | 49.600             | 10.0                     | 40.00                  | 40.10                  | 10.23                 |
| Low Power Level, 1 Watt    |                    |                          |                        |                        |                       |
| 20                         | 30.600             | 1.0                      | 30.00                  | 30.44                  | 1.11                  |
| 21                         | 40.000             | 1.0                      | 30.00                  | 30.41                  | 1.10                  |
| 22                         | 49.600             | 1.0                      | 30.00                  | 30.42                  | 1.10                  |

## 5.6. FREQUENCY STABILITY [§§ 2.1055 & 90.213] [RSS-119 § 5.3]

### 5.6.1. Limits

Refer to FCC 47 CFR 90.213 for specification details.

| Frequency Range (MHz) | Frequency Tolerance (ppm) |                 |       |
|-----------------------|---------------------------|-----------------|-------|
|                       | Fixed and Base Stations   | Mobile Stations |       |
|                       |                           | > 2 W           | ≤ 2 W |
| 25-50 MHz             | 20                        | 20              | 50    |

### [RSS-119 § 5.3]

The carrier frequency shall not depart from the reference frequency in excess of the values given in Table 1.

**Table 1 - Transmitter Frequency Stability**

| Frequency Band (MHz) | Channel Bandwidth (kHz) | Frequency Stability (ppm) |                |           |
|----------------------|-------------------------|---------------------------|----------------|-----------|
|                      |                         | Base/Fixed                | Mobile Station |           |
|                      |                         |                           | >2 watts       | ≤ 2 watts |
| 27.41-28 and 29.7-50 | 20                      | 20                        | 20             | 50        |

### 5.6.2. Method of Measurements

Refer to Exhibit 8, Section 8.3 of this report for measurement details

### 5.6.3. Test Data

|                                           |                                                    |
|-------------------------------------------|----------------------------------------------------|
| <b>Center Frequency:</b>                  | 30.6 MHz                                           |
| <b>Full Power Level:</b>                  | 10.09W                                             |
| <b>Frequency Tolerance Limit:</b>         | $\pm 2.5$ ppm or $\pm 76.5$ Hz (from manufacturer) |
| <b>Max. Frequency Tolerance Measured:</b> | -21 Hz or 0.69 ppm                                 |
| <b>Input Voltage Rating:</b>              | 28 VDC (nominal)                                   |

| Ambient Temperature (°C) | Frequency Drift (Hz)               |                                             |                                              |
|--------------------------|------------------------------------|---------------------------------------------|----------------------------------------------|
|                          | Supply Voltage (Nominal)<br>28 Vdc | Supply Voltage (85% of nominal)<br>23.8 Vdc | Supply Voltage (115% of nominal)<br>32.2 Vdc |
| -30                      | -21                                | --                                          | --                                           |
| -20                      | -16                                | --                                          | --                                           |
| -10                      | -11                                | --                                          | --                                           |
| 0                        | -7                                 | --                                          | --                                           |
| 10                       | -6                                 | --                                          | --                                           |
| 20                       | -7                                 | -6                                          | -6                                           |
| 30                       | -6                                 | --                                          | --                                           |
| 40                       | -7                                 | --                                          | --                                           |
| 50                       | -8                                 | --                                          | --                                           |
| 60                       | -9                                 | --                                          | --                                           |

### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 22TIL129-F90  
September 29, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## 5.7. AUDIO FREQUENCY RESPONSE [§ 2.1047(a)]

### 5.7.1. Limits

Recommended audio filter attenuation characteristics are given below:

| Audio band  | Minimum Attenuation Rel. to 1 kHz Attenuation |
|-------------|-----------------------------------------------|
| 3 - 20 KHz  | $60 \log_{10}(f/3)$ dB where f is in KHz      |
| 20 - 30 KHz | 50dB                                          |

### 5.7.2. Method of Measurements

The rated audio input signal was applied to the input of the audio low-pass filter (or of all modulation stages) using an audio oscillator, this input signal level and its corresponding output signal were then measured and recorded using the FFT Digital Spectrum Analyzer. Tests were repeated at different audio signal frequencies from 0 to 50 KHz.

### 5.7.3. Test Data

**Remark:** Due to the difficulty of measuring the Frequency Response of the internal low-pass filter, the Frequency Response of All Modulation States is performed to show the roll off at 3 kHz in comparison with the recommended audio filter attenuation.


| Frequency (kHz) | Audio In (dBV) | Audio Out (dBV) | Attenuation (Out - In) (dB) | Attenuation Rel. to 1 kHz (dB) | Recommended Attenuation (dB) |
|-----------------|----------------|-----------------|-----------------------------|--------------------------------|------------------------------|
| 0.1             | -10.75         | -22.75          | -12.0                       | -28.7                          | --                           |
| 0.2             | -10.75         | -12.61          | -1.9                        | -18.6                          | --                           |
| 0.4             | -10.75         | -3.24           | 7.5                         | -9.2                           | --                           |
| 0.6             | -10.75         | 1.15            | 11.9                        | -4.8                           | --                           |
| 0.8             | -10.75         | 3.95            | 14.7                        | -2.0                           | --                           |
| 1.0             | -10.75         | 5.96            | 16.7                        | 0.0                            | --                           |
| 1.5             | -10.75         | 8.62            | 19.4                        | 2.7                            | --                           |
| 2.0             | -10.75         | 9.22            | 20.0                        | 3.3                            | --                           |
| 2.5             | -10.75         | 9.38            | 20.1                        | 3.4                            | --                           |
| 3.0             | -10.75         | 9.46            | 20.2                        | 3.5                            | 0                            |
| 3.5             | -10.75         | 9.64            | 20.4                        | 3.7                            | -4                           |
| 4.0             | -10.75         | 9.59            | 20.3                        | 3.6                            | -7                           |
| 4.5             | -10.75         | 9.22            | 20.0                        | 3.3                            | -11                          |
| 5.0             | -10.75         | 7.87            | 18.6                        | 1.9                            | -13                          |
| 6.0             | -10.75         | 0.48            | 11.2                        | -5.5                           | -18                          |
| 7.0             | -10.75         | -6.59           | 4.2                         | -12.6                          | -22                          |
| 8.0             | -10.75         | -13.24          | -2.5                        | -19.2                          | -26                          |
| 9.0             | -10.75         | -18.94          | -8.2                        | -24.9                          | -29                          |
| 10.0            | -10.75         | -70.00          | -59.3                       | -76.0                          | -31                          |
| 12.0            | -10.75         | -70.00          | -59.3                       | -76.0                          | -36                          |
| 14.0            | -10.75         | -70.00          | -59.3                       | -76.0                          | -40                          |
| 16.0            | -10.75         | -70.00          | -59.3                       | -76.0                          | -44                          |
| 18.0            | -10.75         | -70.00          | -59.3                       | -76.0                          | -47                          |
| 20.0            | -10.75         | -70.00          | -59.3                       | -76.0                          | -50                          |
| 25.0            | -10.75         | -70.00          | -59.3                       | -76.0                          | -50                          |
| 30.0            | -10.75         | -70.00          | -59.3                       | -76.0                          | -50                          |
| 35.0            | -10.75         | -70.00          | -59.3                       | -76.0                          | -50                          |
| 40.0            | -10.75         | -70.00          | -59.3                       | -76.0                          | -50                          |
| 45.0            | -10.75         | -70.00          | -59.3                       | -76.0                          | -50                          |
| 50.0            | -10.75         | -70.00          | -59.3                       | -76.0                          | -50                          |

#### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 22TIL129-F90  
September 29, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

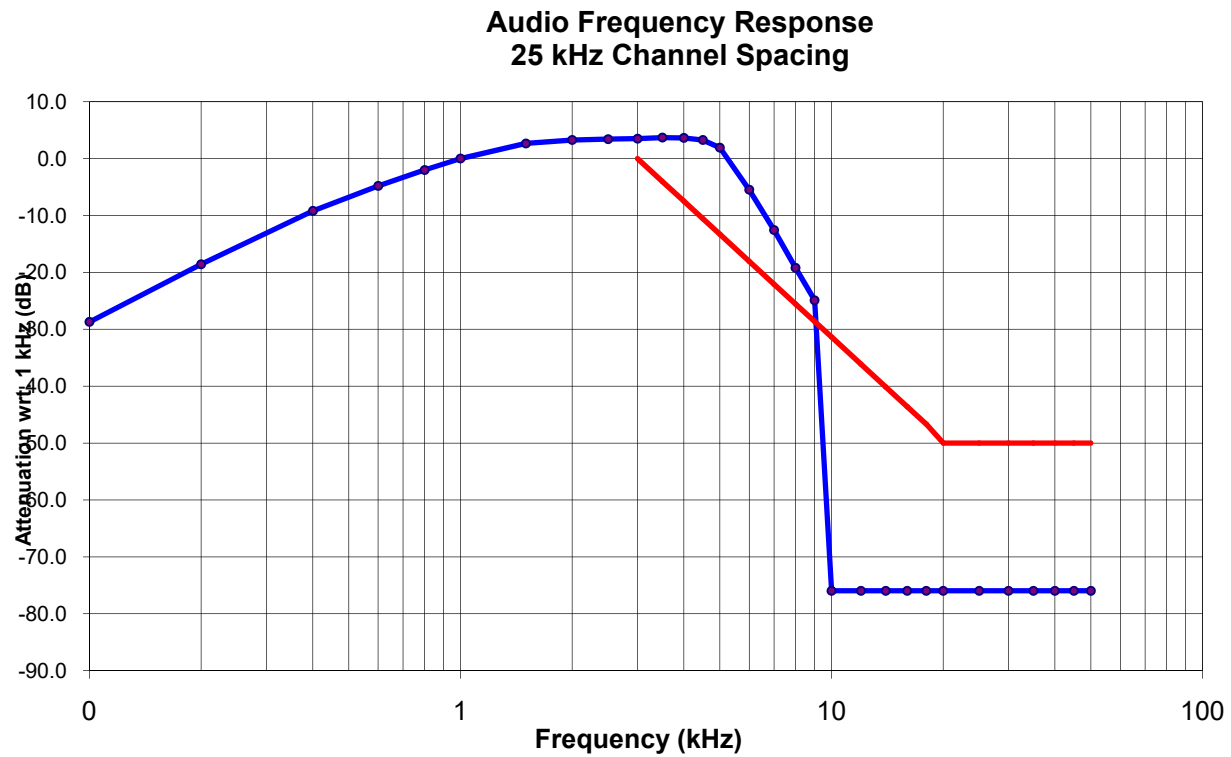

## 5.8. MODULATION LIMITING [§§ 2.1047(b) & 90.210]

### 5.8.1. Limits

Recommended frequency deviation characteristics are given below:  $\pm 5$  kHz

### 5.8.2. Method of Measurements

**For Audio Transmitter:** The carrier frequency deviation was measured with the tone input signal level varied from 0 Vp to audio input rating level plus 16 dB at frequencies 0.1, 0.5, 1.0, 3.0 and 5.0 kHz. The maximum deviation was recorded at each test condition.

**For Data Transmitter with Maximum Frequency Deviation set by Factory:** The EUT was set at maximum frequency deviation, and its peak frequency deviation was then measured using EUT's internal random data source.

### 5.8.3. Test Data

#### 5.8.3.1. Voice Modulation Limiting

| Modulating<br>Signal Level<br>(mVrms) | Peak Frequency Deviation (kHz)<br>at the following modulating frequency: |         |         |         |         | Maximum<br>Limit<br>(kHz) |
|---------------------------------------|--------------------------------------------------------------------------|---------|---------|---------|---------|---------------------------|
|                                       | 0.1 kHz                                                                  | 0.5 kHz | 1.0 kHz | 3.0 kHz | 5.0 kHz |                           |
| 50                                    | 0.04                                                                     | 0.264   | 0.55    | 1.23    | 0.72    | 5.0                       |
| 60                                    | 0.03                                                                     | 0.30    | 0.65    | 1.46    | 0.85    | 5.0                       |
| 70                                    | 0.04                                                                     | 0.35    | 0.76    | 1.70    | 0.98    | 5.0                       |
| 80                                    | 0.05                                                                     | 0.42    | 0.88    | 1.98    | 1.14    | 5.0                       |
| 90                                    | 0.05                                                                     | 0.44    | 0.96    | 2.14    | 1.23    | 5.0                       |
| 100                                   | 0.05                                                                     | 0.49    | 1.07    | 2.40    | 1.37    | 5.0                       |
| 150                                   | 0.07                                                                     | 0.72    | 1.59    | 3.57    | 2.01    | 5.0                       |
| 200                                   | 0.09                                                                     | 0.98    | 2.15    | 4.15    | 2.68    | 5.0                       |
| 250                                   | 0.11                                                                     | 1.22    | 2.67    | 4.23    | 3.29    | 5.0                       |
| 300                                   | 0.13                                                                     | 1.46    | 3.20    | 4.31    | 3.81    | 5.0                       |
| 350                                   | 0.15                                                                     | 1.77    | 3.84    | 4.36    | 3.99    | 5.0                       |
| 400                                   | 0.17                                                                     | 1.92    | 4.01    | 4.42    | 4.13    | 5.0                       |
| 450                                   | 0.19                                                                     | 2.23    | 4.05    | 4.47    | 4.25    | 5.0                       |
| 500                                   | 0.20                                                                     | 2.53    | 4.08    | 4.48    | 4.36    | 5.0                       |
| 600                                   | 0.24                                                                     | 3.13    | 4.12    | 4.51    | 4.56    | 5.0                       |
| 700                                   | 0.28                                                                     | 3.67    | 4.15    | 4.52    | 4.60    | 5.0                       |
| 800                                   | 0.33                                                                     | 4.00    | 4.17    | 4.53    | 4.60    | 5.0                       |
| 900                                   | 0.36                                                                     | 4.03    | 4.19    | 4.53    | 4.61    | 5.0                       |
| 1000                                  | 0.40                                                                     | 4.06    | 4.20    | 4.54    | 4.61    | 5.0                       |
| 1100                                  | 0.47                                                                     | 4.08    | 4.22    | 4.53    | 4.61    | 5.0                       |
| 1200                                  | 0.53                                                                     | 4.10    | 4.23    | 4.54    | 4.61    | 5.0                       |
| 1300                                  | 0.59                                                                     | 4.12    | 4.24    | 4.54    | 4.61    | 5.0                       |
| 1400                                  | 0.66                                                                     | 4.14    | 4.25    | 4.54    | 4.61    | 5.0                       |
| 1500                                  | 0.70                                                                     | 4.14    | 4.25    | 4.54    | 4.61    | 5.0                       |

Voice Signal Input Level = STD MOD Level + 16 dB  
= 65.25 dB(mVrms)  
= 1829.78 mVrms

| Modulation Frequency<br>(kHz) | Peak Deviation<br>(kHz) | Maximum Limit<br>(kHz) |
|-------------------------------|-------------------------|------------------------|
| 0.1                           | 0.86                    | 5.0                    |
| 0.3                           | 2.63                    | 5.0                    |
| 0.4                           | 3.73                    | 5.0                    |
| 0.6                           | 3.81                    | 5.0                    |
| 0.8                           | 3.85                    | 5.0                    |
| 1.0                           | 3.87                    | 5.0                    |
| 1.2                           | 3.88                    | 5.0                    |
| 1.4                           | 3.87                    | 5.0                    |
| 1.6                           | 3.89                    | 5.0                    |
| 1.8                           | 3.92                    | 5.0                    |
| 2.0                           | 3.96                    | 5.0                    |
| 2.5                           | 4.07                    | 5.0                    |
| 3.0                           | 4.13                    | 5.0                    |
| 3.5                           | 4.28                    | 5.0                    |
| 4.0                           | 4.46                    | 5.0                    |
| 4.5                           | 4.60                    | 5.0                    |
| 5.0                           | 4.61                    | 5.0                    |
| 6.0                           | 4.15                    | 5.0                    |
| 7.0                           | 2.31                    | 5.0                    |
| 8.0                           | 1.31                    | 5.0                    |
| 9.0                           | 0.78                    | 5.0                    |
| 10.0                          | 0.48                    | 5.0                    |

**ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

**File #: 22TIL129-F90**

September 29, 2022

*All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)*

## 5.9. OCCUPIED BANDWIDTH & EMISSION MASK [§§ 2.1049, 90.209 & 90.210] [RSS-119 § 5.5 & 5.8]

### 5.9.1. Limits

Emissions shall be attenuated below the mean output power of the transmitter as follows:

| Frequency Band (MHz) | Channel Spacing (kHz) | Authorized Bandwidth (kHz) | Mask for equipment with Audio low pass filter | Mask for equipment Without audio low pass filter |
|----------------------|-----------------------|----------------------------|-----------------------------------------------|--------------------------------------------------|
| 25-50                | 20                    | 20                         | B                                             | C                                                |

### RSS119

Table 3 - Channel Spacing, Authorized Bandwidths and Applicable Spectrum Masks

| Frequency Band (MHz)     | Related SRSP for Channelling Plan and e.r.p. | Channel Spacing (kHz) | Authorized Bandwidth (kHz) | Spectrum Masks with Audio Filter | Spectrum Masks Without Audio Filter |
|--------------------------|----------------------------------------------|-----------------------|----------------------------|----------------------------------|-------------------------------------|
| 27.41-28.0 and 29.7-50.0 | N/A                                          | 20                    | 20                         | B                                | C                                   |

### 5.9.2. Method of Measurements

Refer to Exhibit 8, Section 8.4 of this report for measurement details and TIA-603-C.

### 5.9.3. Test Data

#### 5.9.3.1. 99% Occupied Bandwidth

| Frequency (MHz) | *Measured 99% OBW at Maximum Freq. Deviation (kHz) | Maximum Authorized Bandwidth (kHz) |
|-----------------|----------------------------------------------------|------------------------------------|
| 30.6            | 15.45                                              | 20                                 |
| 40              | 15.45                                              | 20                                 |
| 49.6            | 15.45                                              | 20                                 |

**Note:** 99% Occupied Bandwidth measurements were done using the built-in auto function of the spectrum analyzer.

\*Refer to the following test data plots for details.

### ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 22TIL129-F90  
September 29, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

### 5.9.3.2. Configuration: 99% OBW, 30.6MHz, 25 KHz, Analog, High power

OBW: 15.448 KHz

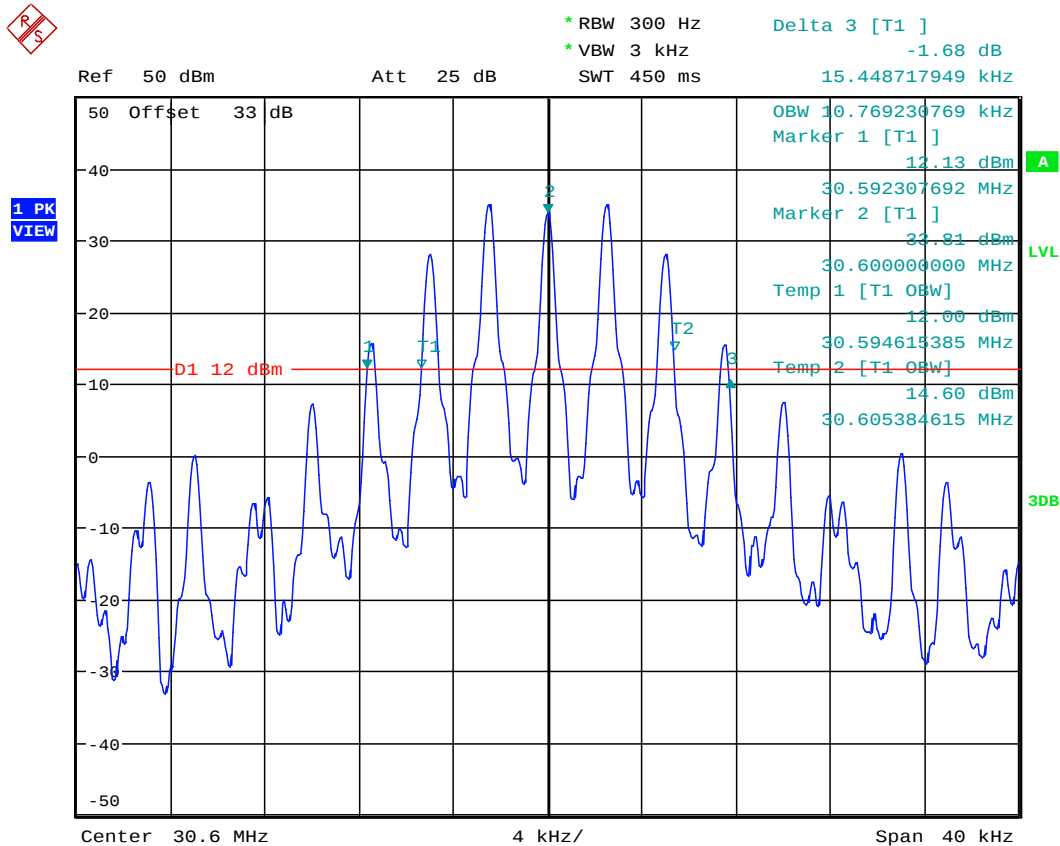

Date: 24.AUG.2022 10:36:40

### ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 22TIL129-F90  
September29, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

### 5.9.3.3. Configuration: 99% OBW, 40MHz, 25 KHz, Analog, High power

OBW: 15.448 KHz

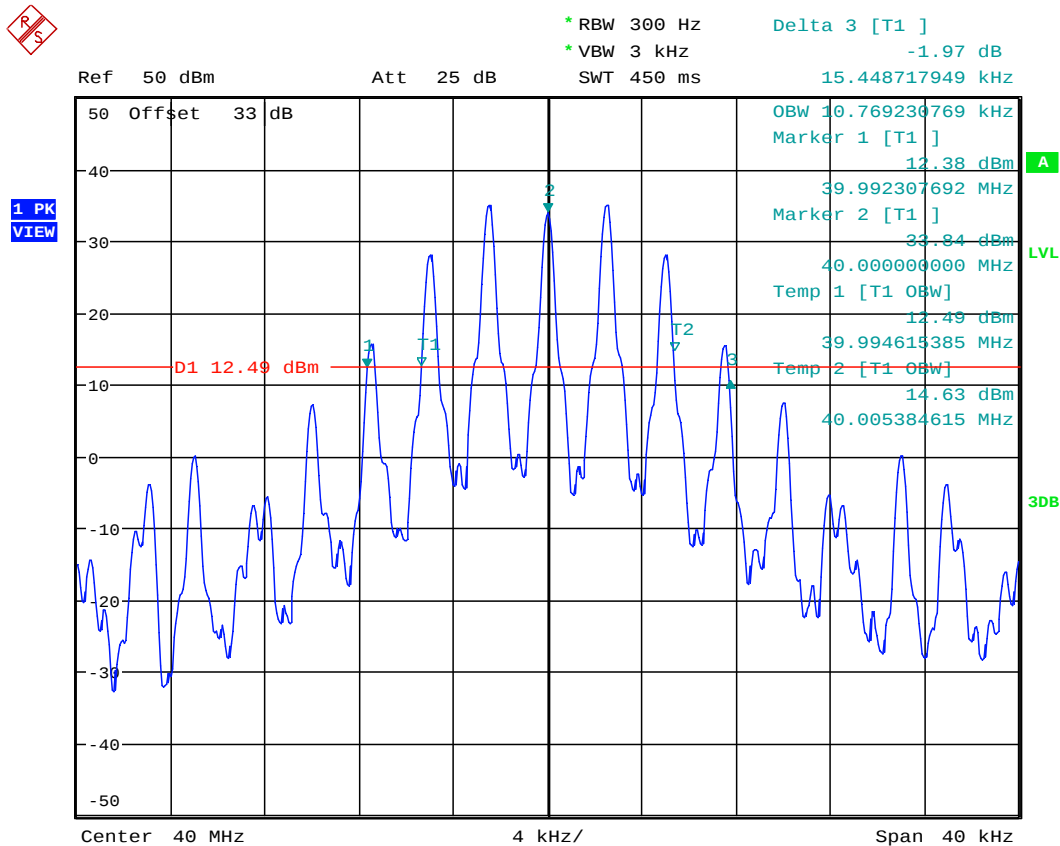

Date: 24.AUG.2022 10:43:10

## ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 22TIL129-F90  
September29, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

#### 5.9.3.4. Configuration: 99% OBW, 49.6MHz, 25 KHz, Analog, High power

OBW: 15.448 KHz

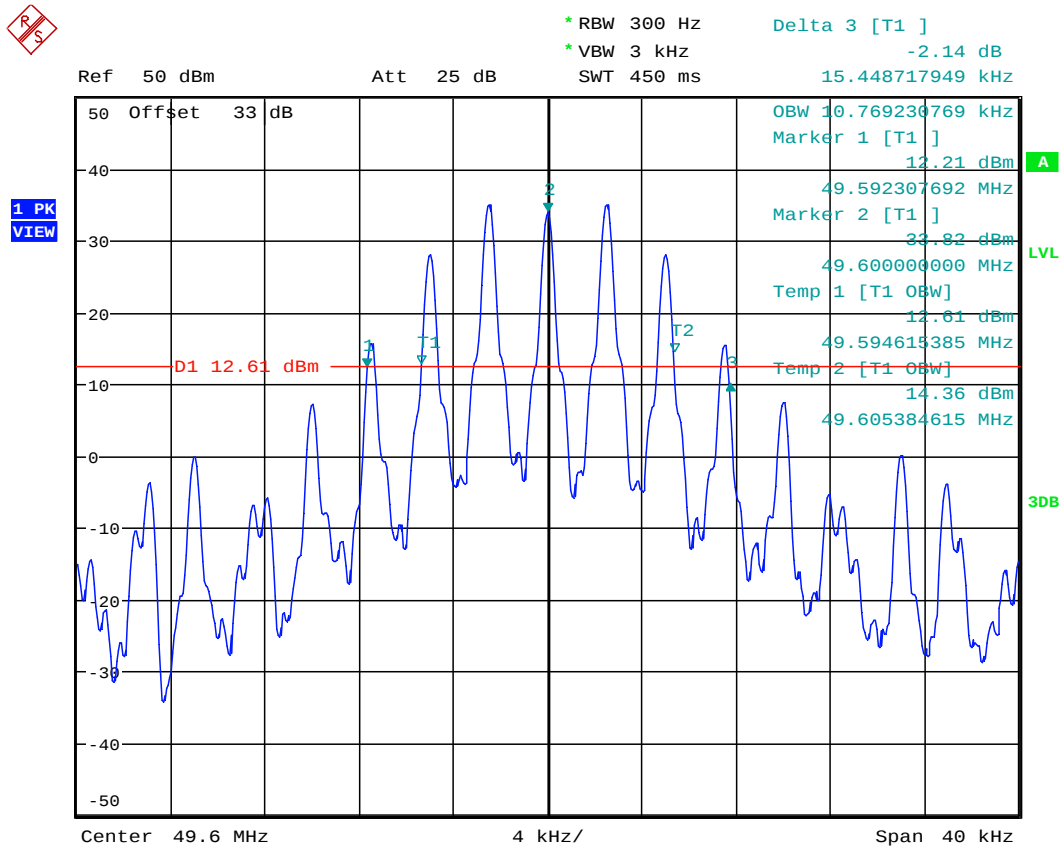

Date: 24.AUG.2022 10:44:33

#### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>


File #: 22TIL129-F90  
September 29, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

### 5.9.3.5. Emission Masks

## High Power

#### 5.9.3.5.1. Configuration: Mask B, 30.6MHz, 25 KHz, Analog, High power

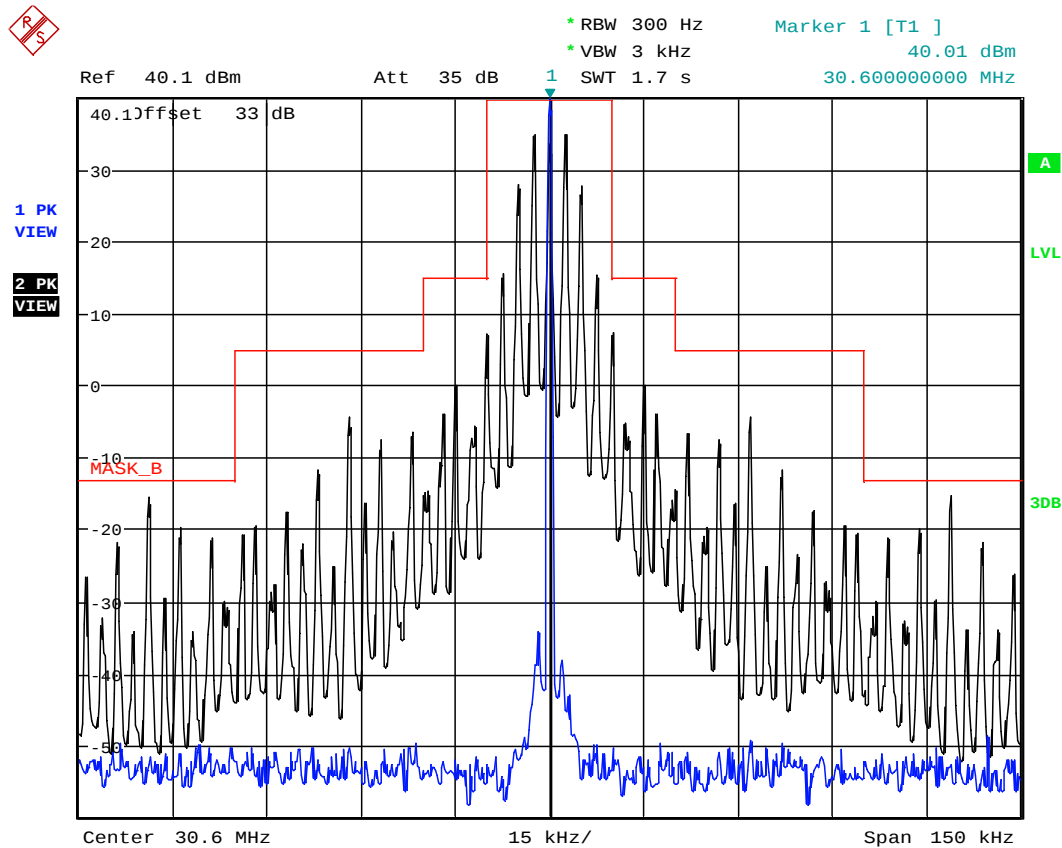

Date: 24.AUG.2022 10:48:32


### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 22TIL129-F90  
September 29, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.9.3.5.2. Configuration: Mask B, 40MHz, 25 KHz, Analog, High power

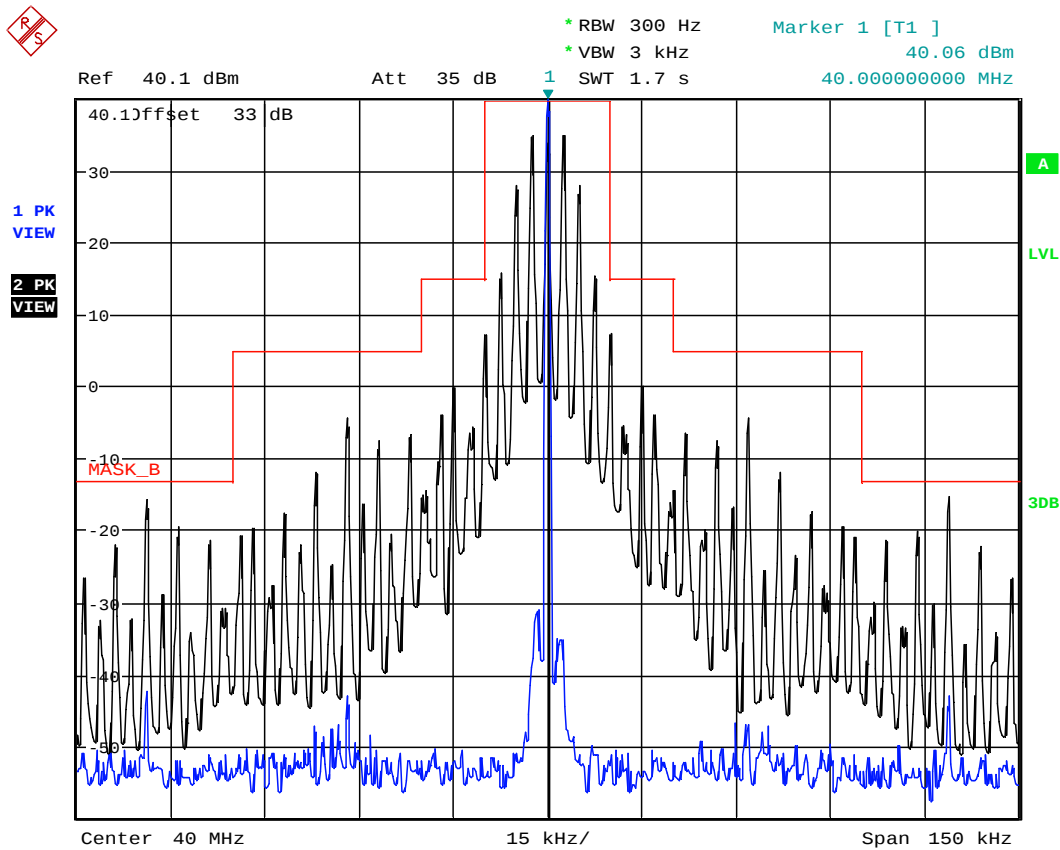

Date: 24.AUG.2022 10:50:38


**ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 22TIL129-F90  
September 29, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.9.3.5.3. Configuration: Mask B, 49.6MHz, 25 KHz, Analog, High power

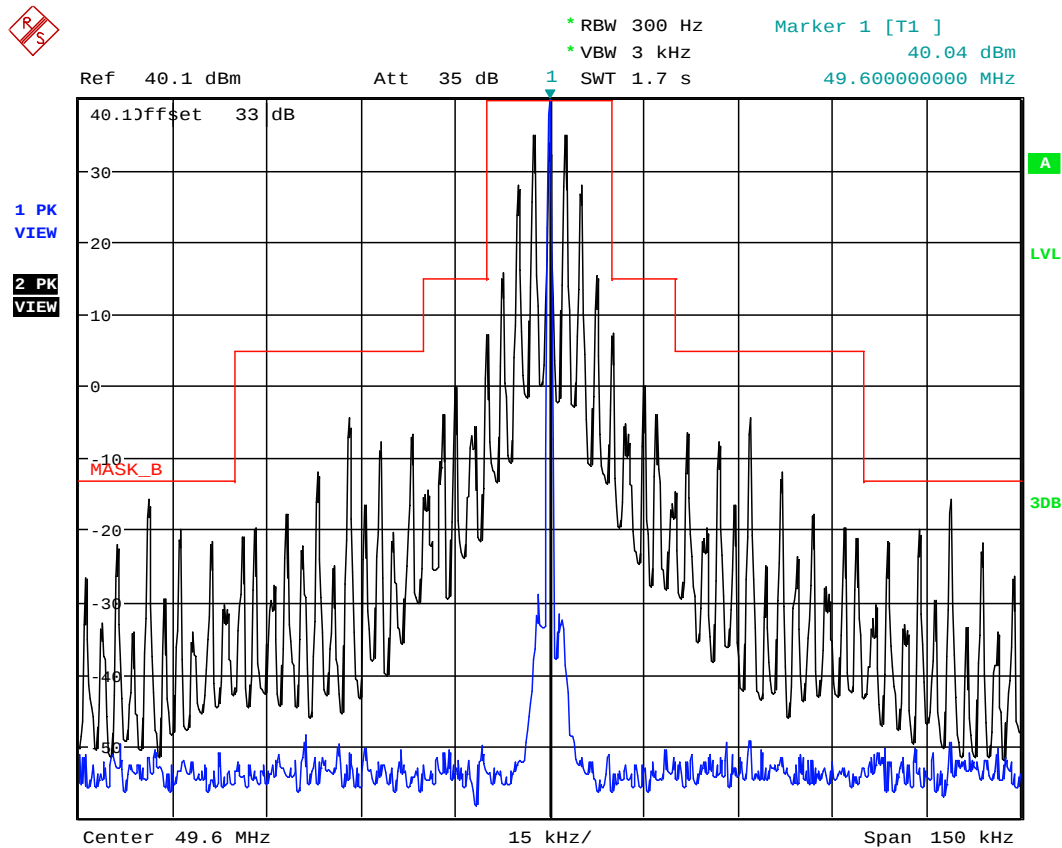

Date: 24.AUG.2022 10:53:08

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 22TIL129-F90  
September 29, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## Low Power

### 5.9.3.5.4. Configuration: Mask B, 30.6MHz, 25 KHz, Analog, Low power

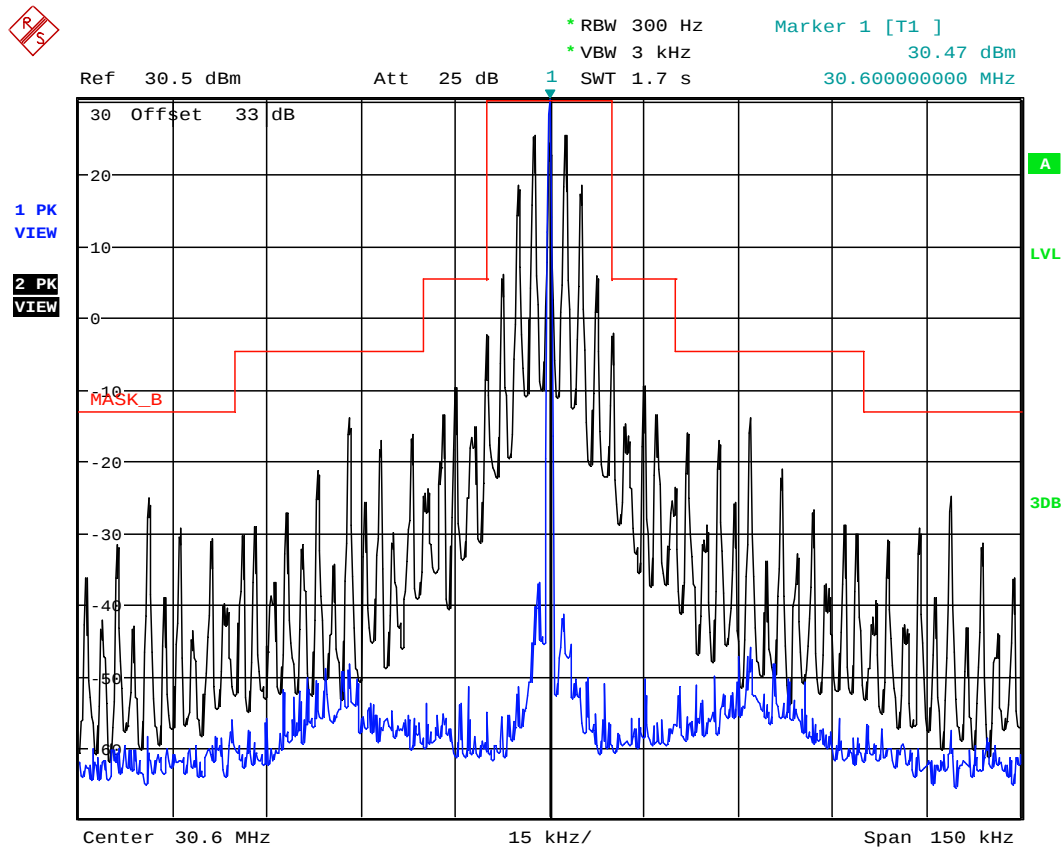

Date: 24.AUG.2022 10:55:55


## ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 22TIL129-F90  
September 29, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.9.3.5.5. Configuration: Mask B, 40MHz, 25 KHz, Analog, Low power

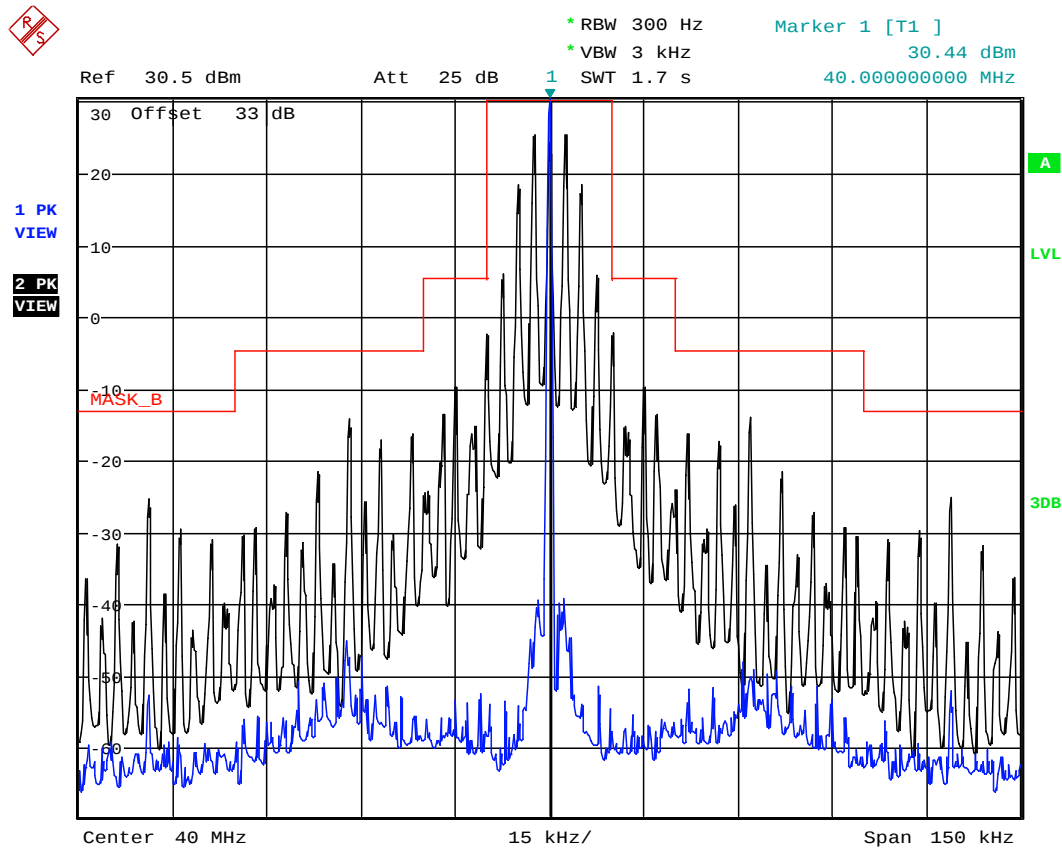

Date: 24.AUG.2022 10:58:22


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 22TIL129-F90  
September 29, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.9.3.5.6. Configuration: Mask B, 49.6MHz, 25 KHz, Analog, Low power

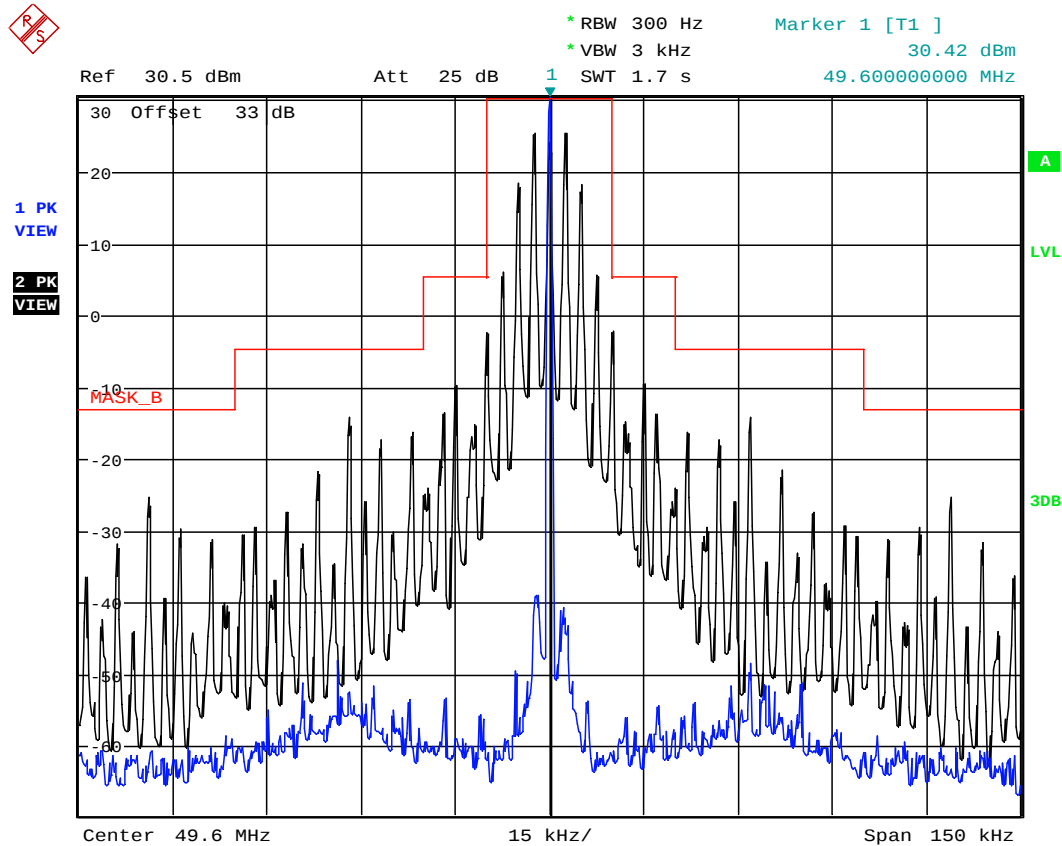

Date: 24.AUG.2022 11:00:22

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 22TIL129-F90  
September 29, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## 5.10. TRANSMITTER ANTENNA POWER SPURIOUS/HARMONIC CONDUCTED EMISSIONS [§§ 2.1051 & 90.210] [RSS-119 § 5.8]

### 5.10.1. Limits

The power of any emission must be attenuated below the unmodulated carrier power (P) as follows:

| FCC Rules | Frequency Range                                                                                                                                             | Attenuation Limit (dBc)               |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|
| 90.210(b) | From the lowest radio frequency signal generated in the device to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower. | At least $43 + 10 \log(P)$ or -13 dBm |


### 5.10.2. Method of Measurements

Refer to Exhibit 8 Section 8.5 of this report for measurement details

### 5.10.3. Test Data

#### High Power

##### 5.10.3.1. Configuration: Tx Conducted, 30.6MHz, 25 KHz, Analog, High power

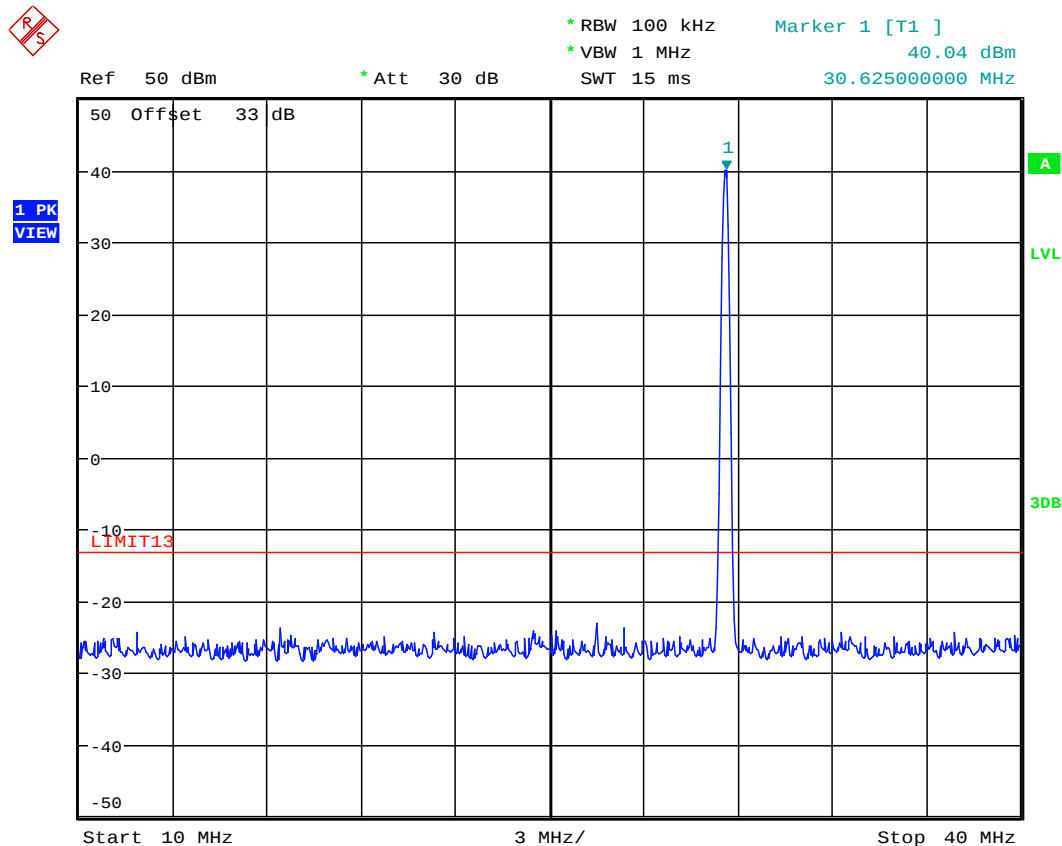


Date: 24.AUG.2022 13:14:55

#### ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 22TIL129-F90  
September 29, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

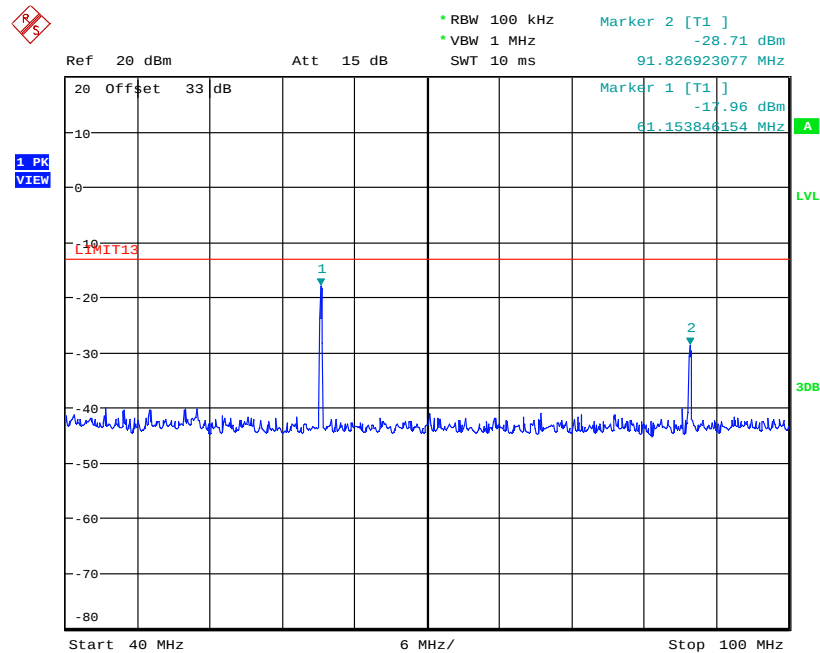

Date: 24.AUG.2022 14:00:00

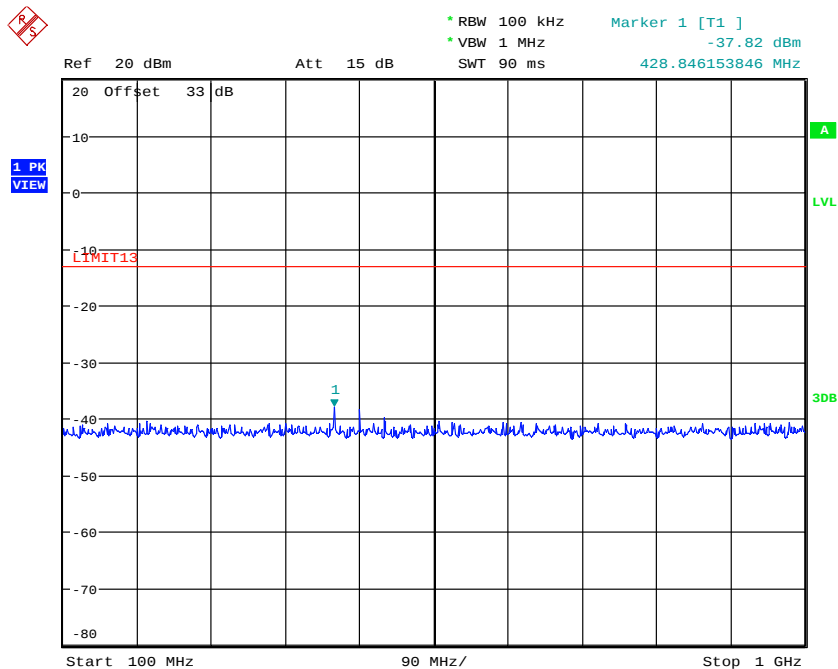

Date: 24.AUG.2022 14:17:01


## ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 22TIL129-F90  
September 29, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

### 5.10.3.2. Configuration: Tx Conducted, 40MHz, 25 KHz, Analog, High power

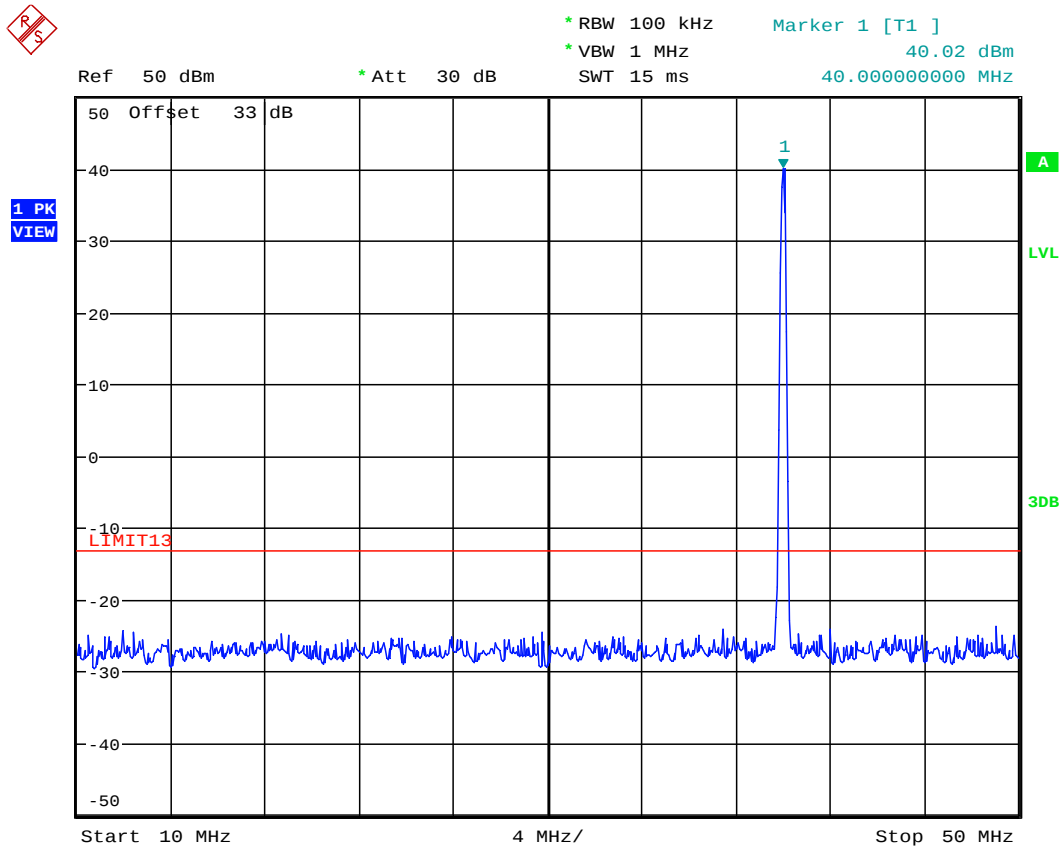


Date: 24.AUG.2022 13:16:42

#### ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 22TIL129-F90  
September 29, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

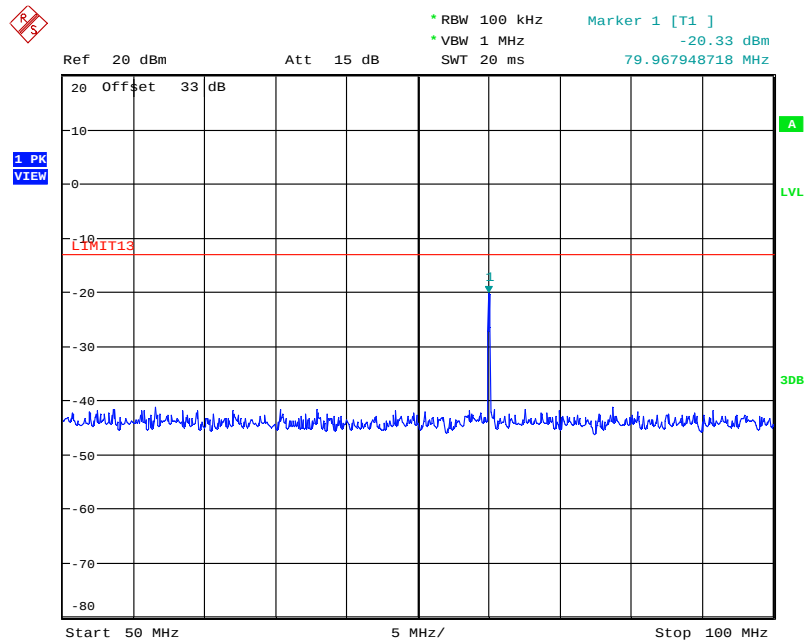

Date: 24.AUG.2022 14:03:17

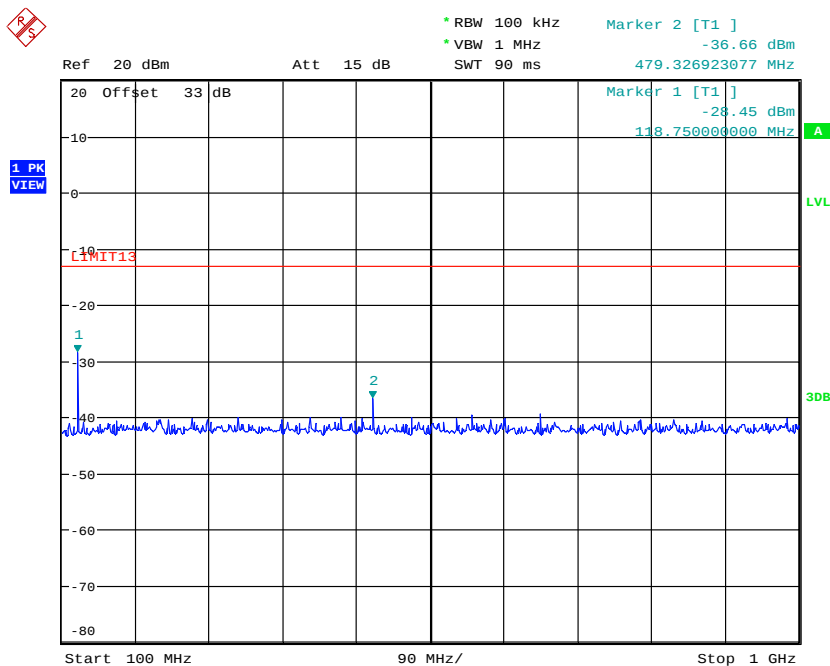

Date: 24.AUG.2022 14:35:11


# ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 22TIL129-F90  
September 29, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

### 5.10.3.3. Configuration: Tx Conducted, 49.6MHz, 25 KHz, Analog, High power

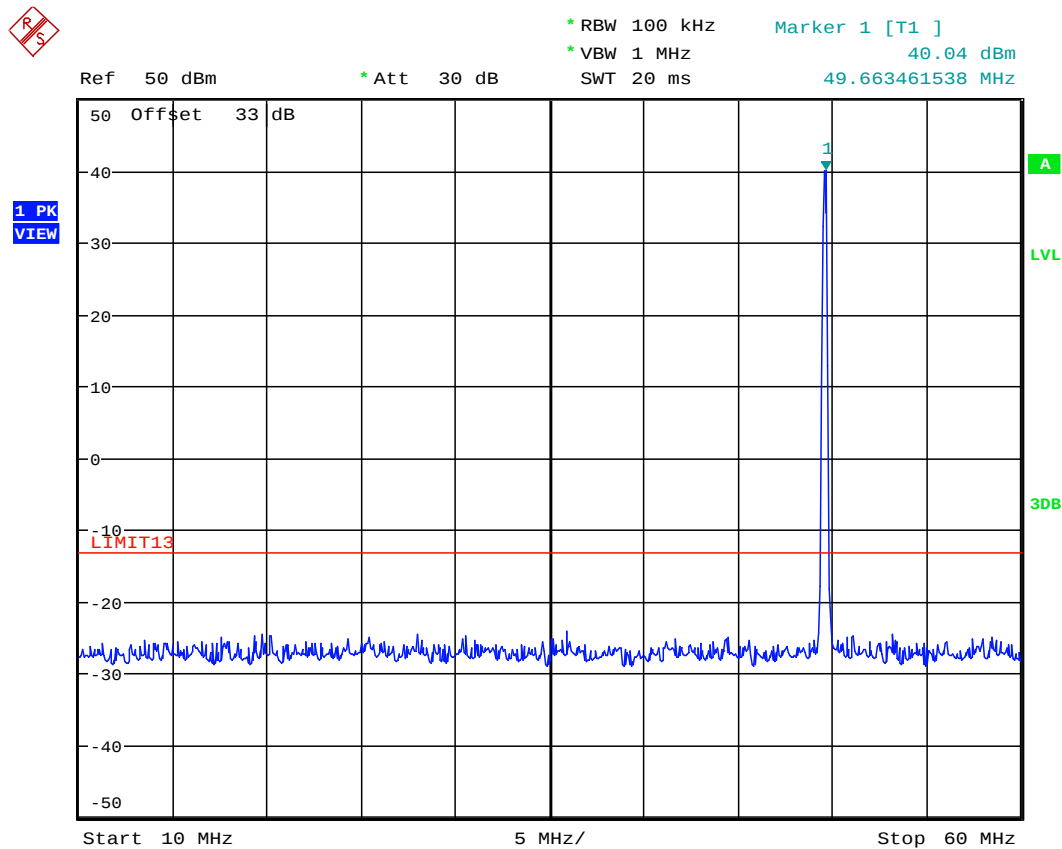

Date: 24.AUG.2022 13:18:30


#### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>


File #: 22TIL129-F90

September 29, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

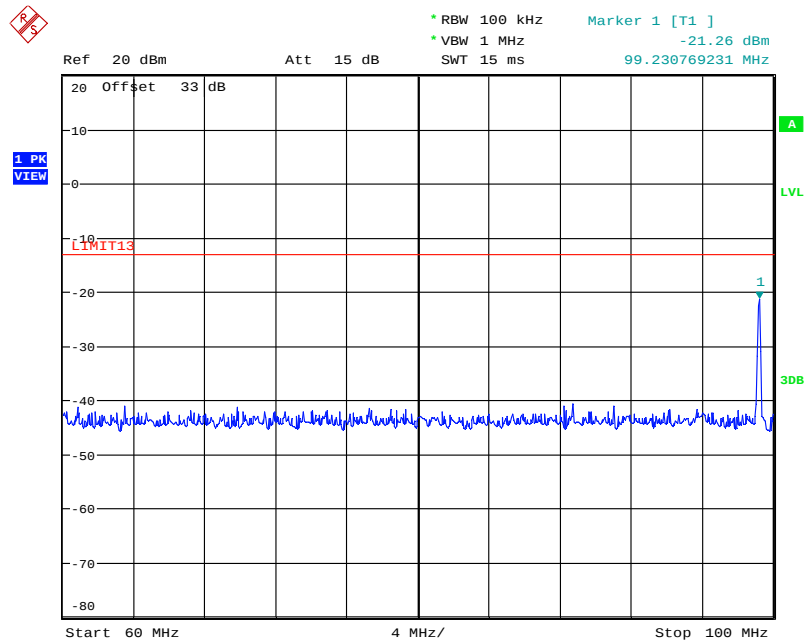

Date: 24.AUG.2022 14:08:31

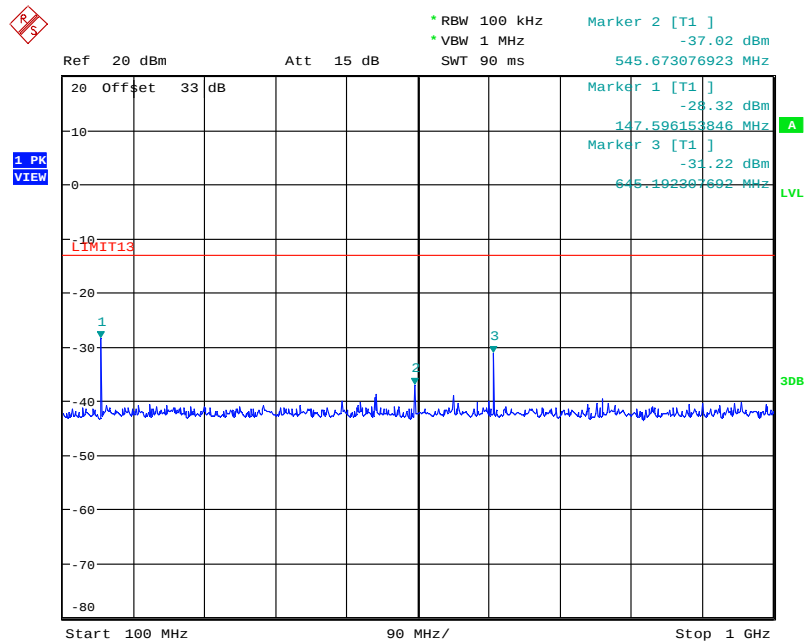

Date: 24.AUG.2022 14:23:38

## ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 22TIL129-F90  
September 29, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## Low Power

### 5.10.3.4. Configuration: Tx Conducted, 30.6MHz, 25 KHz, Analog, Low power

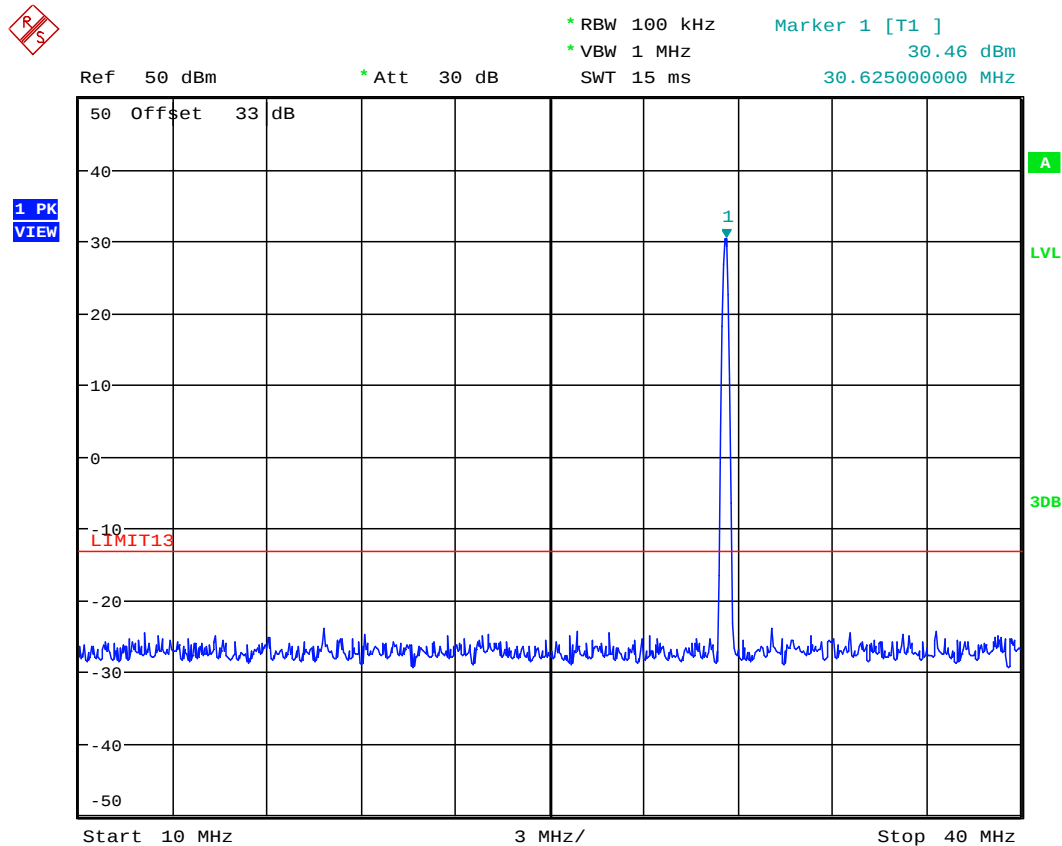


Date: 24.AUG.2022 13:15:50

## ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 22TIL129-F90  
September 29, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

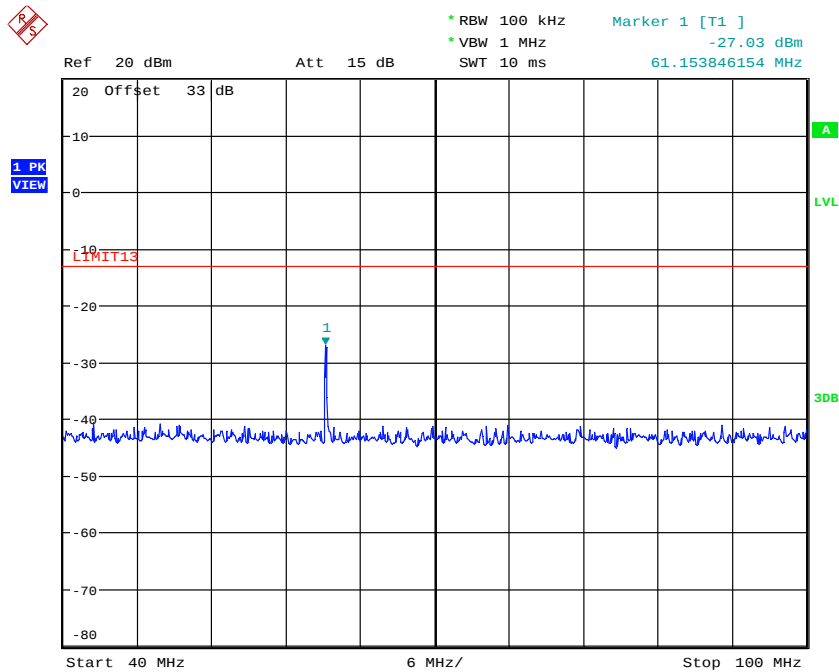

Date: 24.AUG.2022 14:01:00

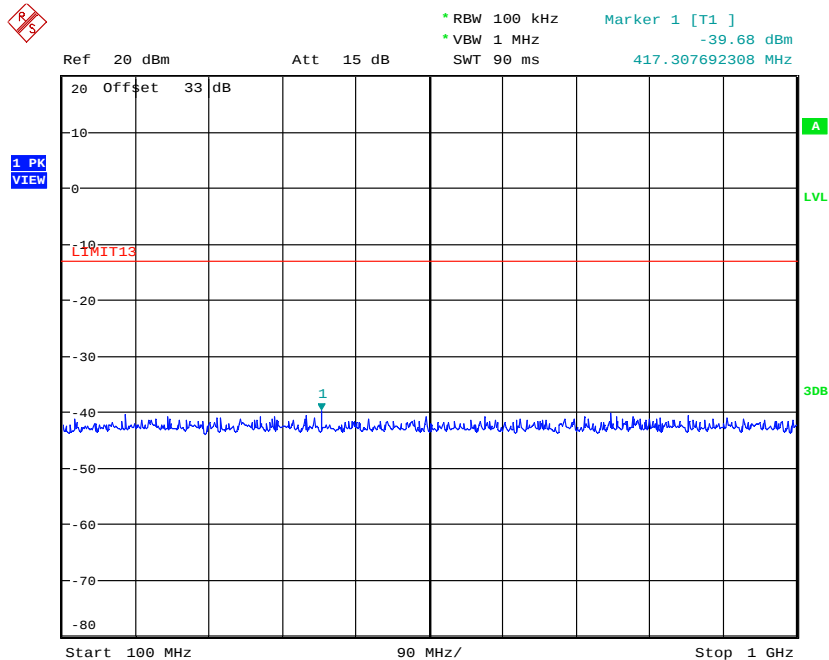

Date: 24.AUG.2022 14:17:55


# ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 22TIL129-F90  
September29, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.10.3.5. Configuration: Tx Conducted, 40MHz, 25 KHz, Analog, Low power

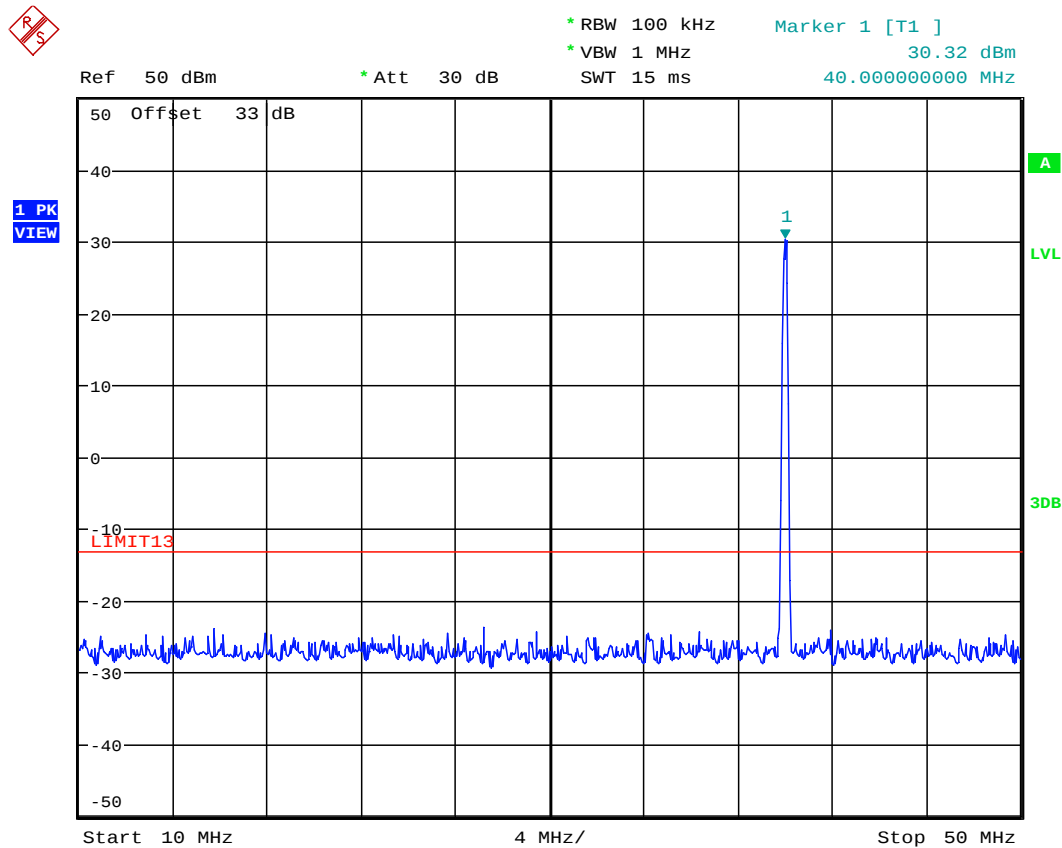


Date: 24.AUG.2022 13:17:28

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 22TIL129-F90  
September29, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

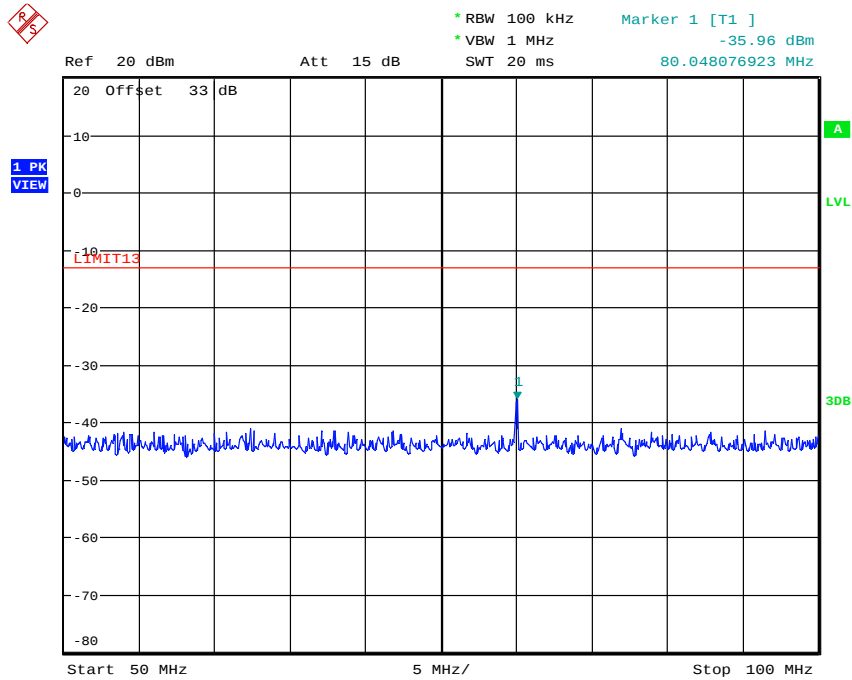

Date: 24.AUG.2022 14:06:19

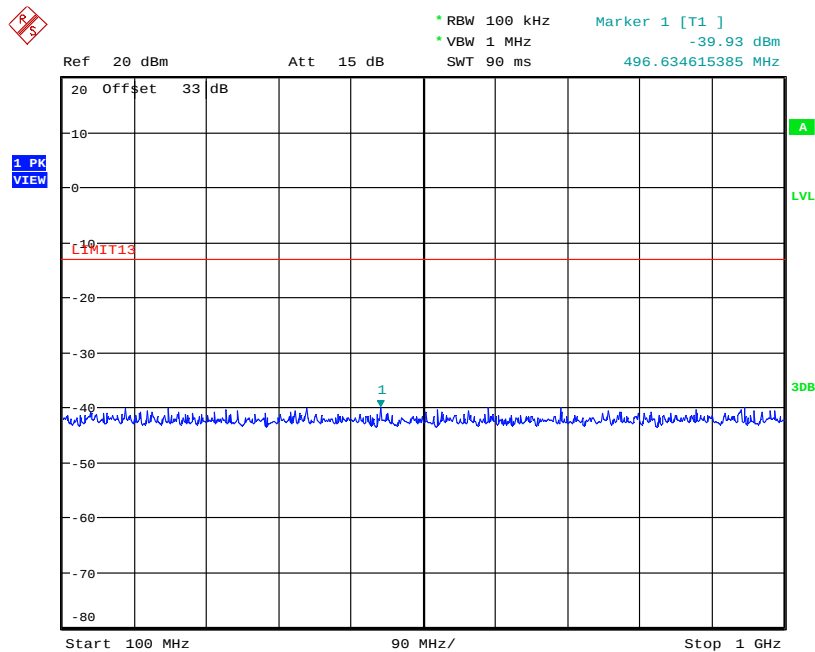

Date: 24.AUG.2022 14:21:09


# ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 22TIL129-F90  
September29, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.10.3.6. Configuration: Tx Conducted, 49.6MHz, 25 KHz, Analog, Low power

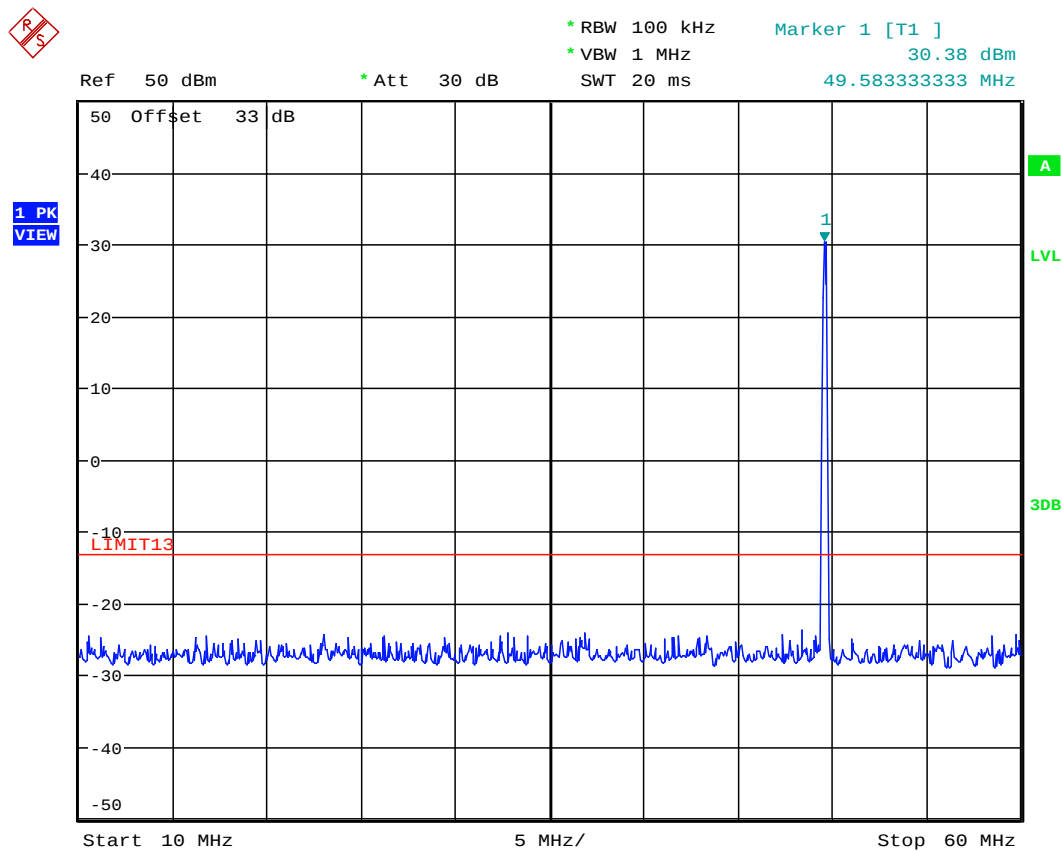


Date: 24.AUG.2022 13:19:04

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 22TIL129-F90  
September 29, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

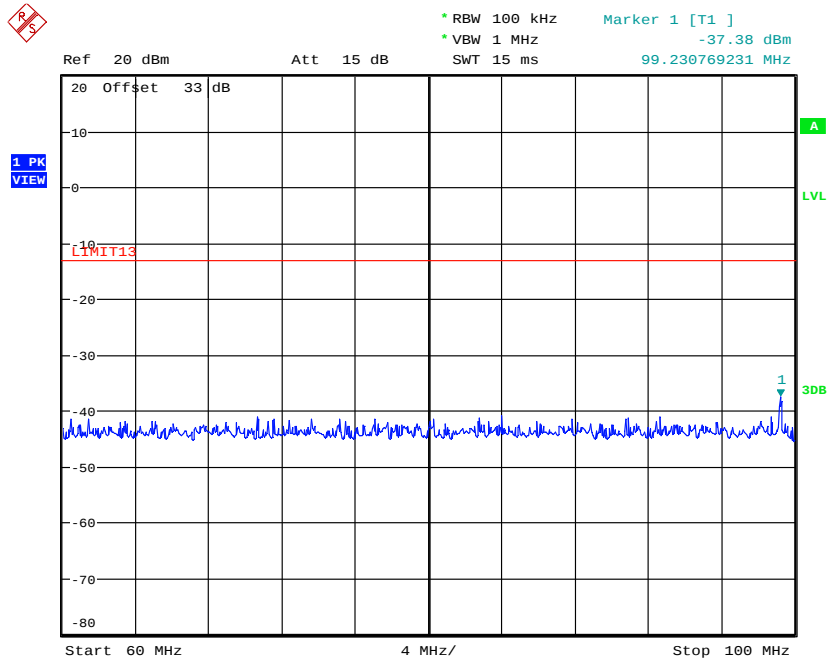

Date: 24.AUG.2022 14:09:33

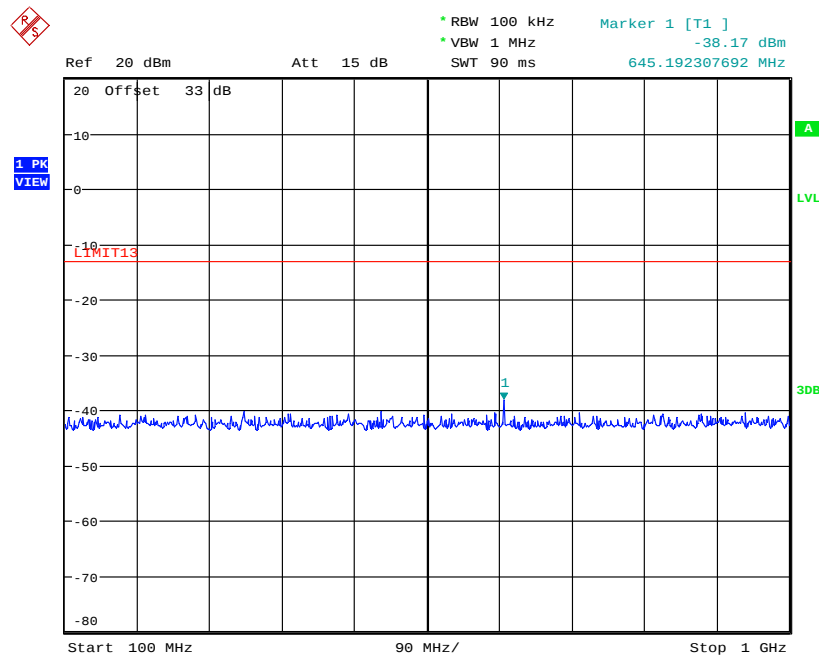

Date: 24.AUG.2022 14:24:47

# ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 22TIL129-F90  
September29, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## 5.11. TRANSMITTER SPURIOUS/HARMONIC RADIATED EMISSIONS [§§ 2.1053 & 90.210] [RSS-119, § 5.5 & 5.8]

### 5.11.1. Limits

The power of any emission must be attenuated below the unmodulated carrier power (P) as follows:

| FCC Rules | Frequency Range                                                                                                                                             | Attenuation Limit (dB)                |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|
| 90.210(b) | From the lowest radio frequency signal generated in the device to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower. | At least $43 + 10 \log(P)$ or -13 dBm |

### 5.11.2. Method of Measurements

Refer to Exhibit 8 Section 8.2 of this report for measurement details.

### 5.11.3. Test Data

- The radiated emissions were performed with high power setting (10 Watts) at 3 m distance to represents the worst-case test configuration.
- The emissions were scanned from 30 MHz to 1 GHz; all significant emissions were recorded.

#### 5.11.3.1. Near Lowest Frequency (30.6 MHz)

|                                                                      |      |
|----------------------------------------------------------------------|------|
| Carrier Frequency (MHz):                                             | 30.6 |
| Power :                                                              | High |
| Limit (dBm):                                                         | -13  |
| No significant spurious emissions were found with 20dB of the limits |      |

#### 5.11.3.2. Near Middle Frequency (40 MHz)

|                                                                      |      |
|----------------------------------------------------------------------|------|
| Carrier Frequency (MHz):                                             | 40   |
| Power :                                                              | High |
| Limit (dBm):                                                         | -13  |
| No significant spurious emissions were found with 20dB of the limits |      |

#### 5.11.3.3. Near Highest Frequency (49.6MHz)

|                                                                      |      |
|----------------------------------------------------------------------|------|
| Carrier Frequency (MHz):                                             | 49.6 |
| Power :                                                              | High |
| Limit (dBm):                                                         | -13  |
| No significant spurious emissions were found with 20dB of the limits |      |

## 5.12. RF EXPOSURE REQUIRMENTS [§§ 1.1310 & 2.1091] [RSS Gen Sec 5.6 & RSS-102]

The criteria listed in the following table shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation.

### FCC 47 CFR § 1.1310:

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

| Frequency range<br>(MHz)                                       | Electric field<br>strength<br>(V/m) | Magnetic field<br>strength<br>(A/m) | Power density<br>(mW/cm <sup>2</sup> ) | Averaging time<br>(minutes) |
|----------------------------------------------------------------|-------------------------------------|-------------------------------------|----------------------------------------|-----------------------------|
| <b>(A) Limits for Occupational/Controlled Exposures</b>        |                                     |                                     |                                        |                             |
| 0.3–3.0 .....                                                  | 614                                 | 1.63                                | *(100)                                 | 6                           |
| 3.0–30 .....                                                   | 1842/f                              | 4.89/f                              | *(900/f <sup>2</sup> )                 | 6                           |
| 30–300 .....                                                   | 61.4                                | 0.163                               | 1.0                                    | 6                           |
| 300–1500 .....                                                 | .....                               | .....                               | f/300                                  | 6                           |
| 1500–100,000 .....                                             | .....                               | .....                               | 5                                      | 6                           |
| <b>(B) Limits for General Population/Uncontrolled Exposure</b> |                                     |                                     |                                        |                             |
| 0.3–1.34 .....                                                 | 614                                 | 1.63                                | *(100)                                 | 30                          |
| 1.34–30 .....                                                  | 824/f                               | 2.19/f                              | *(180/f <sup>2</sup> )                 | 30                          |
| 30–300 .....                                                   | 27.5                                | 0.073                               | 0.2                                    | 30                          |
| 300–1500 .....                                                 | .....                               | .....                               | f/1500                                 | 30                          |
| 1500–100,000 .....                                             | .....                               | .....                               | 1.0                                    | 30                          |

f = frequency in MHz

\* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

### 5.12.1. Method of Measurements

Refer to Sections 1.1310, 2.1091

In order to demonstrate compliance with MPE requirements (see Section 2.1091), the following information is typically needed:

- (1) Calculation that estimates the minimum separation distance (20 cm or more) between an antenna and persons required to satisfy power density limits defined for free space.
- (2) Antenna installation and device operating instructions for installers (professional/unskilled users), and the parties responsible for ensuring compliance with the RF exposure requirement
- (3) Any caution statements and/or warning labels that are necessary in order to comply with the exposure limits
- (4) Any other RF exposure related issues that may affect MPE compliance

**RSS Gen Sec 5.6 & RSS-102]**

**Table 4: RF Field Strength Limits for Devices Used by the General Public (Uncontrolled Environment)**

| Frequency Range (MHz)                                                                                                     | Electric Field (V/m rms) | Magnetic Field (A/m rms)          | Power Density (W/m <sup>2</sup> ) | Reference Period (minutes) |
|---------------------------------------------------------------------------------------------------------------------------|--------------------------|-----------------------------------|-----------------------------------|----------------------------|
| 0.003-10 <sup>21</sup>                                                                                                    | 83                       | 90                                | -                                 | Instantaneous*             |
| 0.1-10                                                                                                                    | -                        | 0.73/ $f$                         | -                                 | 6**                        |
| 1.1-10                                                                                                                    | 87/ $f^{0.5}$            | -                                 | -                                 | 6**                        |
| 10-20                                                                                                                     | 27.46                    | 0.0728                            | 2                                 | 6                          |
| 20-48                                                                                                                     | 58.07/ $f^{0.25}$        | 0.1540/ $f^{0.25}$                | 8.944/ $f^{0.5}$                  | 6                          |
| 48-300                                                                                                                    | 22.06                    | 0.05852                           | 1.291                             | 6                          |
| 300-6000                                                                                                                  | 3.142 $f^{0.3417}$       | 0.008335 $f^{0.3417}$             | 0.02619 $f^{0.6834}$              | 6                          |
| 6000-15000                                                                                                                | 61.4                     | 0.163                             | 10                                | 6                          |
| 15000-150000                                                                                                              | 61.4                     | 0.163                             | 10                                | 616000/ $f^{1.2}$          |
| 150000-300000                                                                                                             | 0.158 $f^{0.5}$          | 4.21 x 10 <sup>-4</sup> $f^{0.5}$ | 6.67 x 10 <sup>-5</sup> $f$       | 616000/ $f^{1.2}$          |
| <b>Note:</b> $f$ is frequency in MHz.<br>*Based on nerve stimulation (NS).<br>** Based on specific absorption rate (SAR). |                          |                                   |                                   |                            |

Note 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

Note 2: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or cannot exercise control over their exposure.

**ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

**File #: 22TIL129-F90**  
September 29, 2022

*All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)*

### Calculation Method of RF Safety Distance:

$$S = \frac{P \cdot G}{4 \cdot \pi \cdot r^2} = \frac{EIRP}{4 \cdot \pi \cdot r^2}$$

Where:

- P: power input to the antenna in mW
- EIRP: Equivalent (effective) isotropic radiated power
- S: power density mW/cm<sup>2</sup>
- G: numeric gain of antenna relative to isotropic radiator
- r: distance to centre of radiation in cm

### 5.12.2. RF Evaluation

|                                                              |       |
|--------------------------------------------------------------|-------|
| Maximum RF Power conducted, <b>P<sub>conducted</sub>[W]:</b> | 10.23 |
| Maximum Antenna Gain, <b>G[dBi]:</b>                         | 3     |
| Maximum EIRP, <b>P<sub>EIRP</sub>[W]:</b>                    | 20.42 |

| MPE Environment                          | FCC Power Density limit, S (mW/m <sup>2</sup> ) | FCC Minimum Distance (Cm) | Distance In user's manual (Cm) | Power Density at user's manual distance, S (mW/m <sup>2</sup> ) |
|------------------------------------------|-------------------------------------------------|---------------------------|--------------------------------|-----------------------------------------------------------------|
| General Population/Uncontrolled Exposure | 0.2                                             | 91                        | 113                            | 0.127                                                           |

| MPE Environment                          | ISED Power Density limit, S (mW/m <sup>2</sup> ) | ISED Minimum Distance (Cm) | Distance In user's manual (Cm) | Power Density at user's manual distance, S (mW/m <sup>2</sup> ) |
|------------------------------------------|--------------------------------------------------|----------------------------|--------------------------------|-----------------------------------------------------------------|
| General Population/Uncontrolled Exposure | 0.1291                                           | 113                        | 113                            | 0.127                                                           |

## 5.13. RECEIVER ANTENNA POWER SPURIOUS/HARMONIC CONDUCTED EMISSIONS [RSS-119 § 5.11, RSS-Gen §§ 4.10 & 6]

### 5.13.1. Limits


No spurious output signals appearing at the antenna terminals shall exceed 2 nanowatts per any 4 kHz spurious frequency in the band 30-1000 MHz, or 5 nanowatts above 1 GHz.

### 5.13.2. Method of Measurements

Refer to Industry Canada RSS-119, Issue 9 and ANSI C63.4.

### 5.13.3. Test Data

#### 5.13.3.1. Configuration: Rx Conducted, 30.6MHz

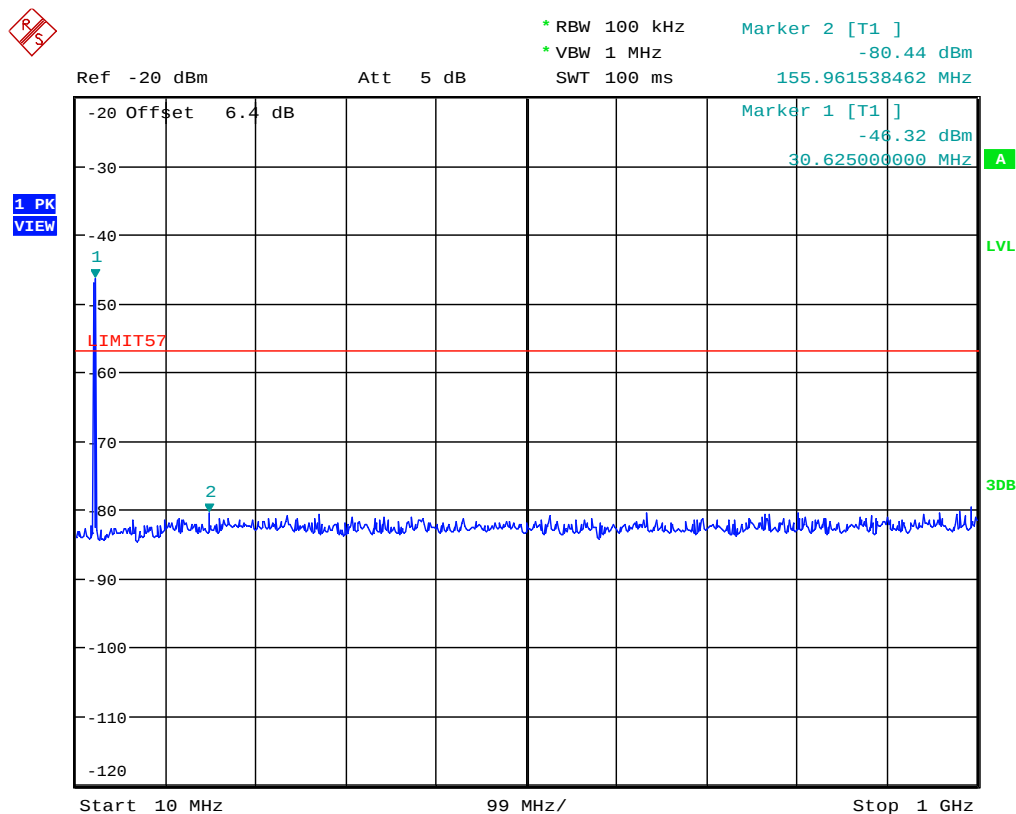

Date: 25.AUG.2022 10:27:28


Highest peak is Rx Signal input (1mV rms)

### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 22TIL129-F90  
September 29, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

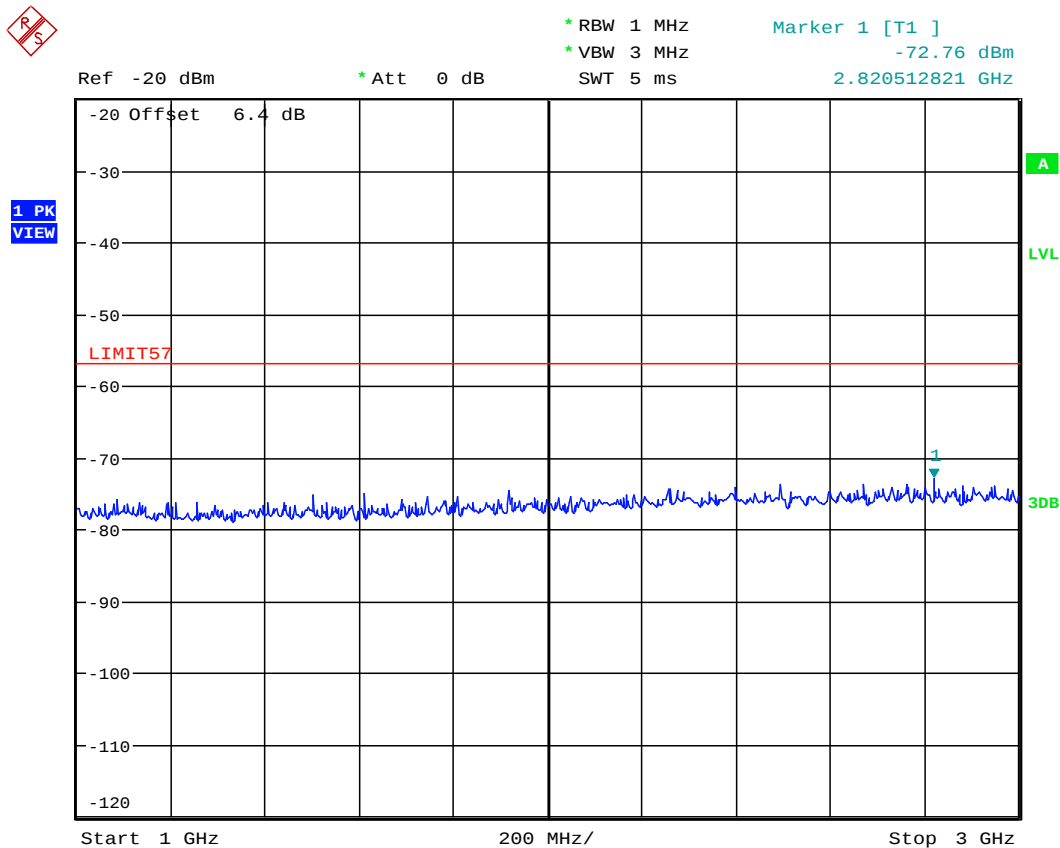

Date: 25.AUG.2022 10:32:58


**ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 22TIL129-F90  
September 29, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

### 5.13.3.2. Configuration: Rx Conducted, 40MHz

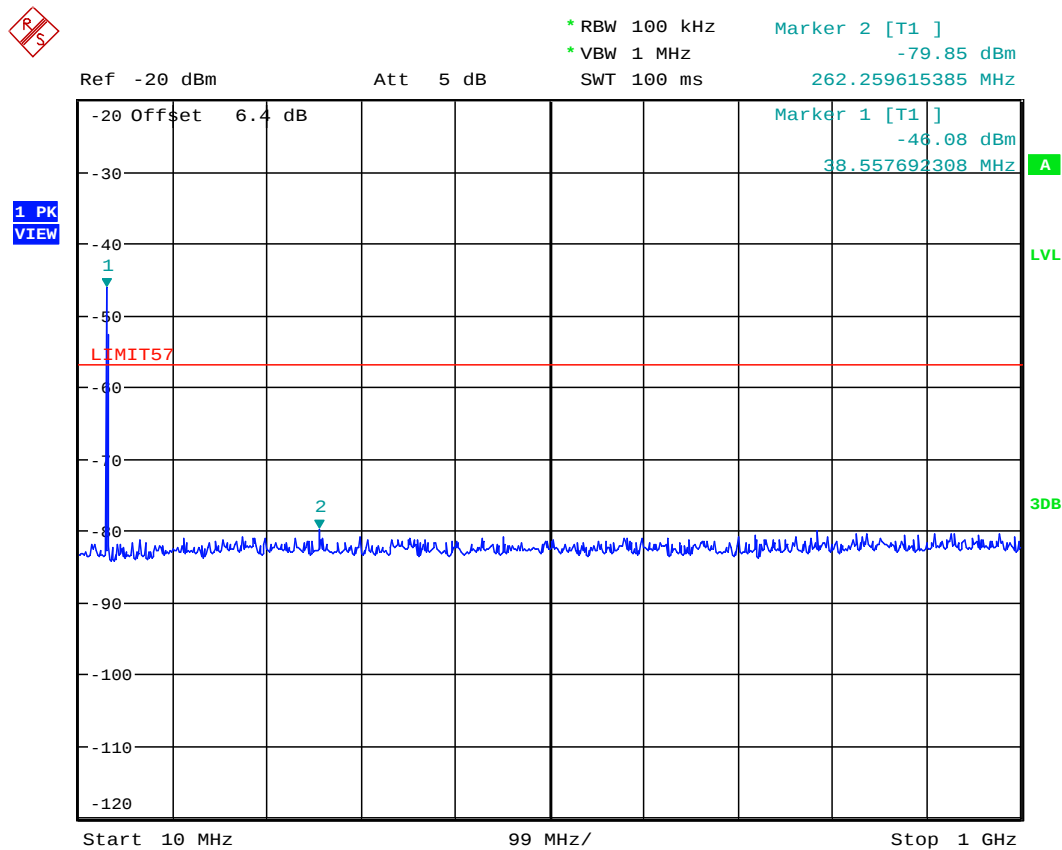

Date: 25.AUG.2022 10:28:58

Highest peak is Rx Signal input (1mV rms)


#### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 22TIL129-F90

September 29, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

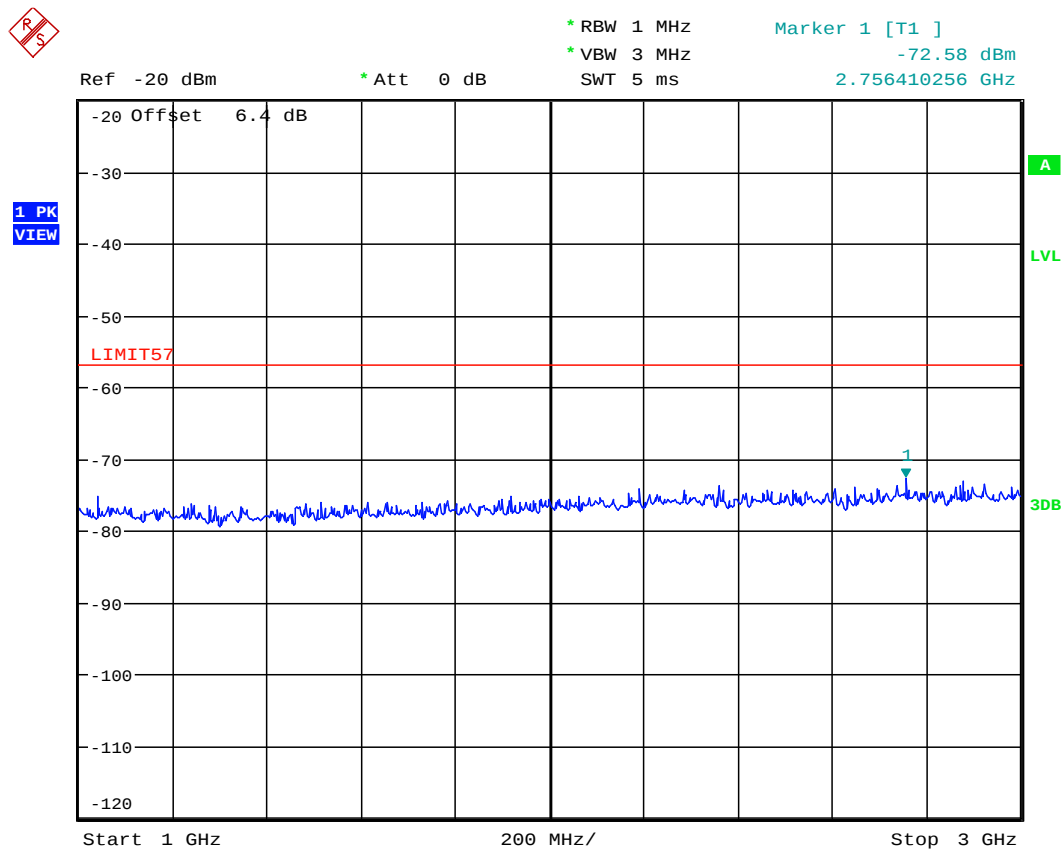

Date: 25.AUG.2022 10:32:04

**ULTRATECH GROUP OF LABS**


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

**File #: 22TIL129-F90**

September 29, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

### 5.13.3.3. Configuration: Rx Conducted, 49.6MHz

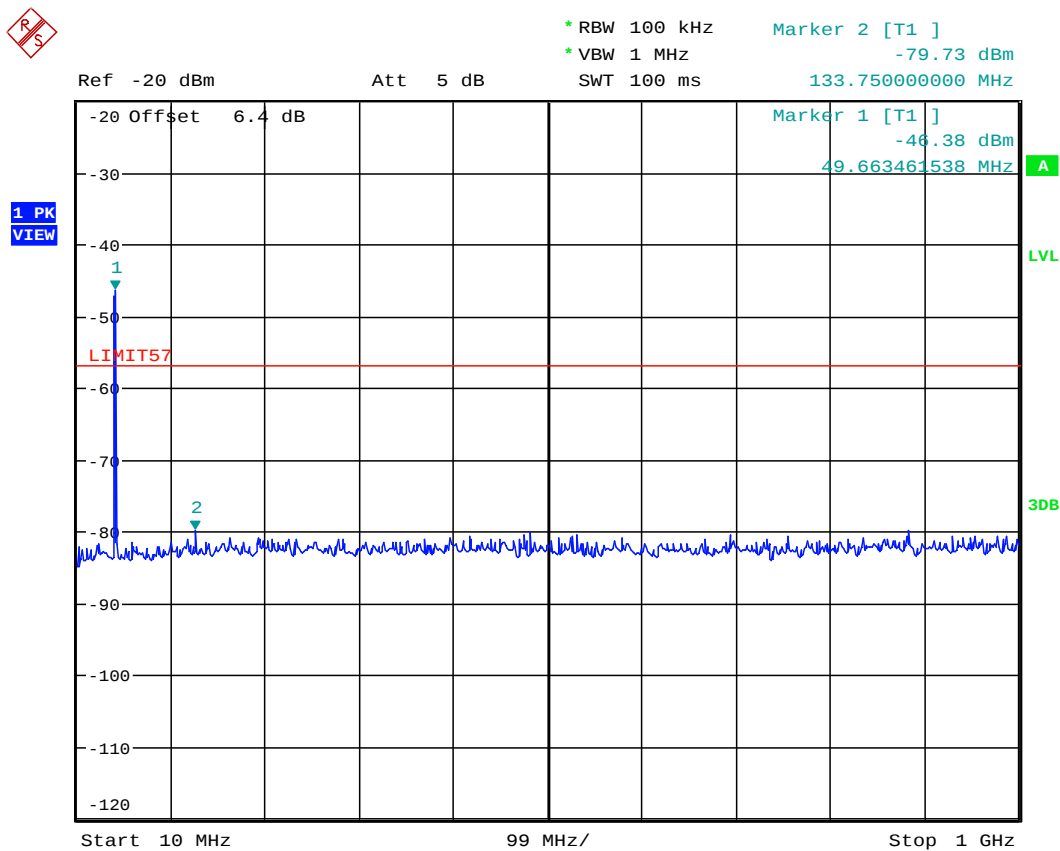

Date: 25.AUG.2022 10:30:14


Highest peak is Rx Signal input (1mV rms)

#### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 22TIL129-F90  
September29, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

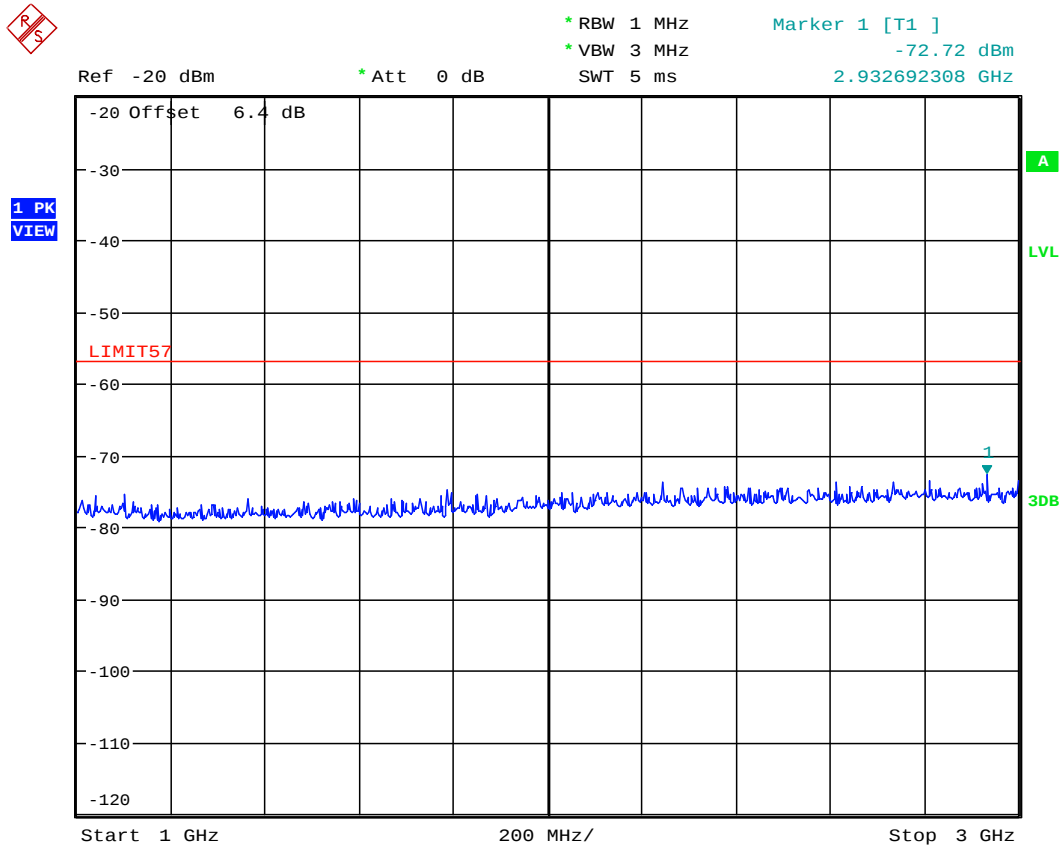

Date: 25.AUG.2022 10:31:13

**ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 22TIL129-F90  
September 29, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## 5.14. RECEIVER SPURIOUS EMISSIONS (RADIATED) [RSS-119 § 5.11, RSS-Gen §§ 4.10 & 6]

### 5.14.1. Limits

The equipment shall meet the limits of the following table:

| Spurious Frequency<br>(MHz) | Field Strength at 3 meters |                |
|-----------------------------|----------------------------|----------------|
|                             | ( $\mu$ V/m)               | (dB $\mu$ V/m) |
| 30 – 88                     | 100                        | 40.0           |
| 88 – 216                    | 150                        | 43.5           |
| 216 – 960                   | 200                        | 46.0           |
| Above 960                   | 500                        | 54.0           |

### 5.14.2. Method of Measurements

RSS-Gen and ANSI C63.4

### 5.14.3. Test Data

The emissions were scanned from 30 MHz to 1.0 GHz at 3 Meters distance and all emissions less than 20 dB below the limits were recorded.

(IF=45 MHz)

| Rx Test Frequency | Result                                                           |
|-------------------|------------------------------------------------------------------|
| 30.6 MHz          | All emissions were observed to be less than 20dB below the limit |
| 40 MHz            | All emissions were observed to be less than 20dB below the limit |
| 49.6 MHz          | All emissions were observed to be less than 20dB below the limit |

## 5.15. POWER LINE CONDUCTED EMISSIONS [ICES-003, RSS-Gen § 7.2.2]

### 5.15.1. Limit(s)

The equipment shall meet the limits of the following table:


| Frequency of emission (MHz) | Conducted Limits (dBμV) |           |
|-----------------------------|-------------------------|-----------|
|                             | Quasi-peak              | Average   |
| 0.15–0.5 .....              | 66 to 56*               | 56 to 46* |
| 0.5–5 .....                 | 56 .....                | 46        |
| 5–30 .....                  | 60 .....                | 50        |

\*Decreases with the logarithm of the frequency

### 5.15.2. Method of Measurements

Refer to Ultratech Test Procedures ULTR-P001-2004 & ANSI C63.4 for method of measurements.

### 5.15.3. Test Data

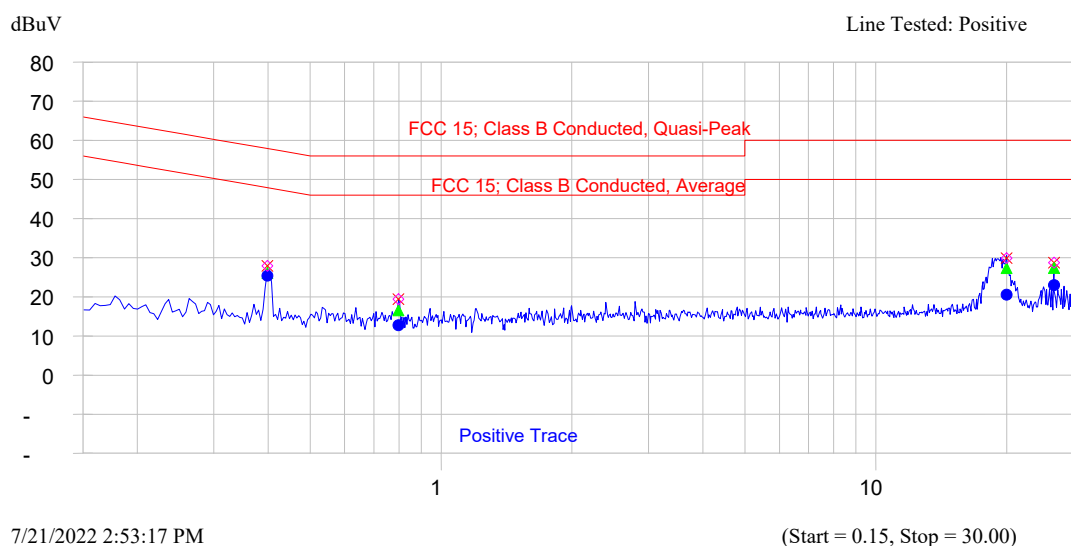


| Frequency MHz | Peak dBuV | QP dBuV | QP-QP Limit dB | Avg dBuV | Avg-Avg Limit dB | Trace Name    |
|---------------|-----------|---------|----------------|----------|------------------|---------------|
| 0.399         | 27.9      | 26.1    | -31.8          | 25.4     | -22.5            | Positive Trac |

## ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 22TIL129-F90  
September 29, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

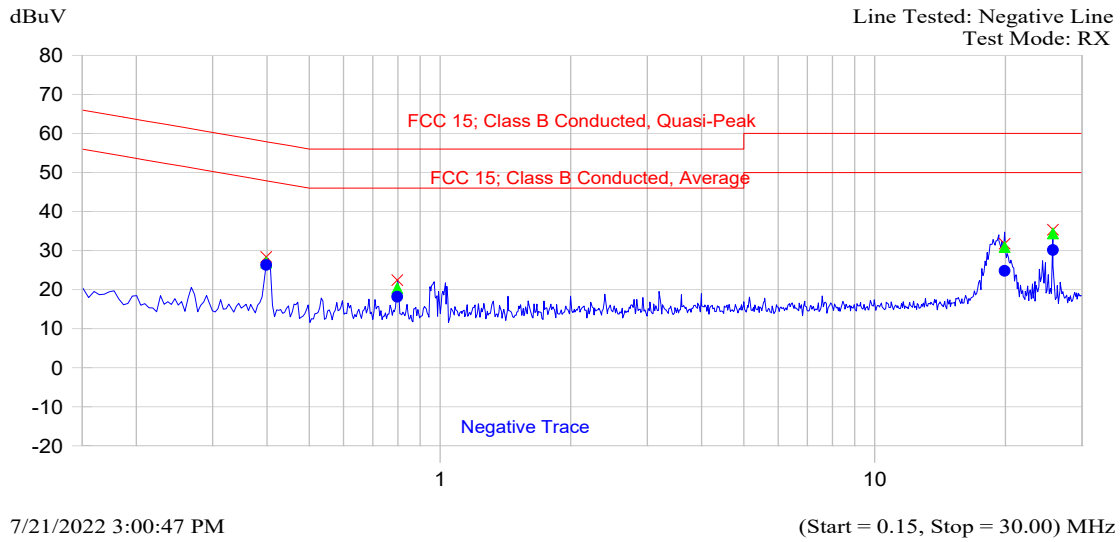

| Frequency<br>MHz | Peak<br>dBuV | QP<br>dBuV | QP-QP Limit<br>dB | Avg<br>dBuV | Avg-Avg Limit<br>dB | Trace Name     |
|------------------|--------------|------------|-------------------|-------------|---------------------|----------------|
| 25.714           | 35.4         | 34.4       | -25.6             | 30.1        | -19.9               | Negative Trace |

# ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 22TIL129-F90  
September29, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## 5.16. RADIATED EMISSIONS FROM UNINTENTIONAL RADIATORS [ICES-003]

### 5.16.1. Limits

The equipment shall meet the limits of the following table:

| Frequency of emission (MHz) | Class B Limits        |                        |
|-----------------------------|-----------------------|------------------------|
|                             | (dB $\mu$ V/m at 3 m) | (dB $\mu$ V/m at 10 m) |
| 30 – 88                     | 40.0                  | 29.5                   |
| 88 – 216                    | 43.5                  | 33.1                   |
| 216 – 960                   | 46.0                  | 35.6                   |
| Above 960                   | 54.0                  | 43.5                   |

### 5.16.2. Method of Measurements

Refer to Ultratech Test Procedures ULTR-P001-2004 & ANSI C63.4 for method of measurements.

### 5.16.3. Test Data

The emissions were scanned from 30 MHz to 3.0 GHz at 3m. All emissions found above than 20 dB below the permissible limits were recorded

| FREQUENCY (MHz) | RF LEVEL (dBuV/m) | DETECTOR USED (PEAK/QP) | ANTENNA PLANE (H/V) | LIMIT (dBuV/m) | MARGIN (dB) | PASS/ FAIL |
|-----------------|-------------------|-------------------------|---------------------|----------------|-------------|------------|
| 34.63           | 25.98             | PEAK                    | V                   | 40             | -14.02      | PASS       |
| 34.63           | 25.86             | PEAK                    | H                   | 40             | -14.14      | PASS       |
| 47.71           | 31.55             | PEAK                    | V                   | 40             | -8.45       | PASS       |
| 82.85           | 25.21             | PEAK                    | H                   | 40             | -14.79      | PASS       |
| 102.74          | 24.64             | PEAK                    | H                   | 43.5           | -18.86      | PASS       |
| 102.74          | 31.41             | PEAK                    | V                   | 43.5           | -12.09      | PASS       |
| 122.36          | 24.53             | PEAK                    | H                   | 43.5           | -18.97      | PASS       |
| 122.36          | 30.48             | PEAK                    | V                   | 43.5           | -13.02      | PASS       |
| 144.42          | 29.52             | PEAK                    | H                   | 43.5           | -13.98      | PASS       |
| 144.42          | 27.57             | PEAK                    | V                   | 43.5           | -15.93      | PASS       |
| 162.13          | 32.36             | PEAK                    | V                   | 43.5           | -11.14      | PASS       |
| 233.64          | 28.29             | PEAK                    | H                   | 46             | -17.71      | PASS       |
| 1467.95         | 36.02             | PEAK                    | H                   | 54             | -17.98      | PASS       |
| 1791.67         | 39.42             | PEAK                    | V                   | 54             | -14.58      | PASS       |
| 1791.67         | 37.78             | PEAK                    | H                   | 54             | -16.22      | PASS       |
| 2118.59         | 41.19             | PEAK                    | V                   | 54             | -12.81      | PASS       |
| 2118.59         | 40.9              | PEAK                    | H                   | 54             | -13.1       | PASS       |
| 2301.49         | 40.14             | PEAK                    | V                   | 54             | -13.86      | PASS       |
| 2301.49         | 37.64             | PEAK                    | H                   | 54             | -16.36      | PASS       |

#### ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 22TIL129-F90  
September 29, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## EXHIBIT 6. TEST SETUP AND EQUIPMENT LIST

### 6.1. Conducted Power

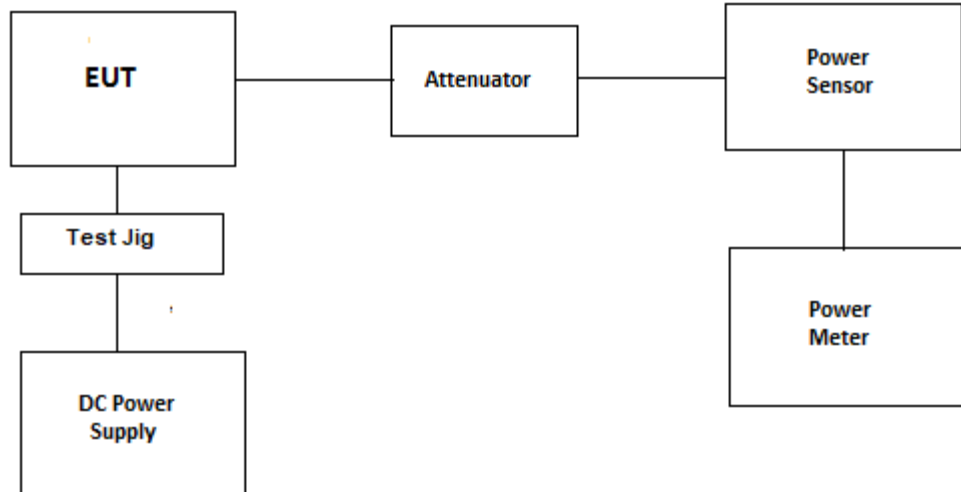

Test Date: Aug 17, 2022

| Test Instrument | Manufacturer       | Model No            | Serial No        | Frequency Range         | Cal Due date |
|-----------------|--------------------|---------------------|------------------|-------------------------|--------------|
| Power Meter     | HP                 | 436A                | 2016A07747       | 100KHz-sensor dependant | 22 Oct 2023  |
| Power Sensor    | HP                 | 8482A               | MY44175182       | 0.1MHz-4.2GHz           | 21 Jan 2023  |
| Attenuator      | Aeroflex\Weinschel | 46-30-34<br>23-3-34 | BR9127<br>AM2548 | DC-18GHz                | Cal on use   |
| Power Supply    | HQ Power           | PS613U              | -                | 1-30V, DC 3A            | ----         |
| Multimeter      | Fluke              | 8842A               | 4142058          | ---                     | 01 Oct 2022  |


#### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 22TIL129-F90  
September 29, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## 6.2. Modulation Limit

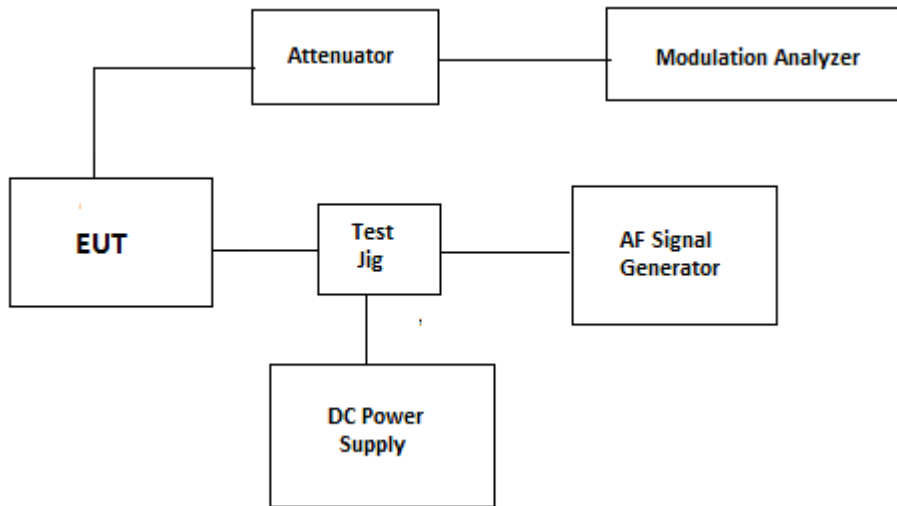

Test Date: Aug 18, 2022

| Test Instrument     | Manufacturer       | Model No            | Serial No        | Frequency Range | Cal Due date |
|---------------------|--------------------|---------------------|------------------|-----------------|--------------|
| Modulation Analyzer | HP                 | HP-8901B            | 3226A04606       | 150KHz-1300MHz  | 29 Mar 2024  |
| AF Signal Generator | HP                 | HP-8920B            | US39064699       | 30MHz-1GHz      | 29 Mar 2024  |
| Digital Voltmeter   | HP                 | 3456A               | 2015A04523       | --              | 08 Feb 2024  |
| Attenuator          | Aeroflex\Weinschel | 46-30-34<br>23-3-34 | BR9127<br>AM2548 | DC-18GHz        | Cal on use   |
| Power Supply        | HQ Power           | PS613U              | -                | 1-30V, DC 3A    | ----         |
| Multimeter          | Fluke              | 8842A               | 4142058          | ---             | 01 Oct 2022  |


### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 22TIL129-F90  
September 29, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

### 6.3. Audio Frequency Response

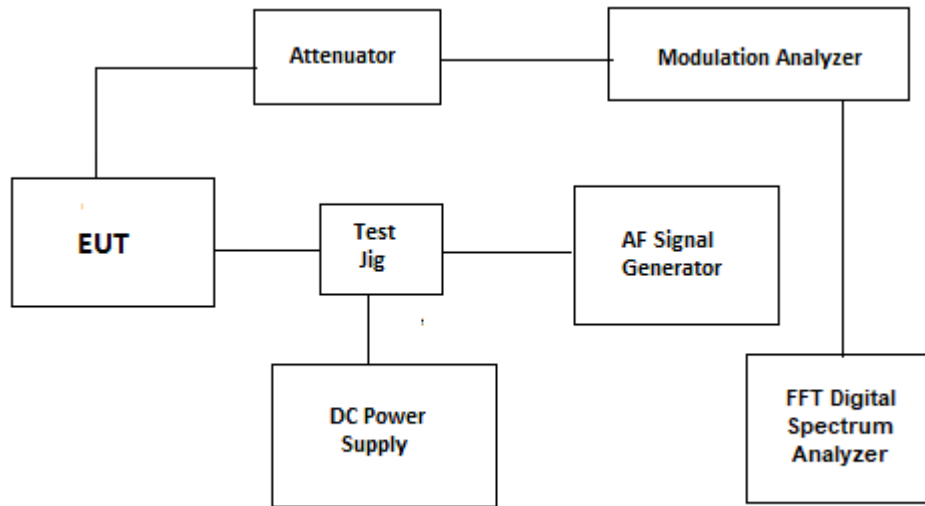

Test Date: Aug 18, 2022

| Test Instrument               | Manufacturer       | Model No            | Serial No        | Frequency Range | Cal Due date |
|-------------------------------|--------------------|---------------------|------------------|-----------------|--------------|
| Modulation Analyzer           | HP                 | HP-8901B            | 3226A04606       | 150KHz-1300MHz  | 29 Mar 2024  |
| AF Signal Generator           | HP                 | HP-8920B            | US39064699       | 30MHz-1GHz      | 29 Mar 2024  |
| Digital Voltmeter             | HP                 | 3456A               | 2015A04523       | --              | 08 Feb 2024  |
| FFT Digital Spectrum Analyzer | Advantest          | R9211E              | 8202336          | 10MHz-100KHz    | 02 Nov 2022  |
| Attenuator                    | Aeroflex\Weinschel | 46-30-34<br>23-3-34 | BR9127<br>AM2548 | DC-18GHz        | Cal on use   |
| Power Supply                  | HQ Power           | PS613U              | -                | 1-30V, DC 3A    | ----         |
| Multimeter                    | Fluke              | 8842A               | 4142058          | ---             | 01 Oct 2022  |


#### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 22TIL129-F90  
September 29, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

#### 6.4. 99% OBW and Mask

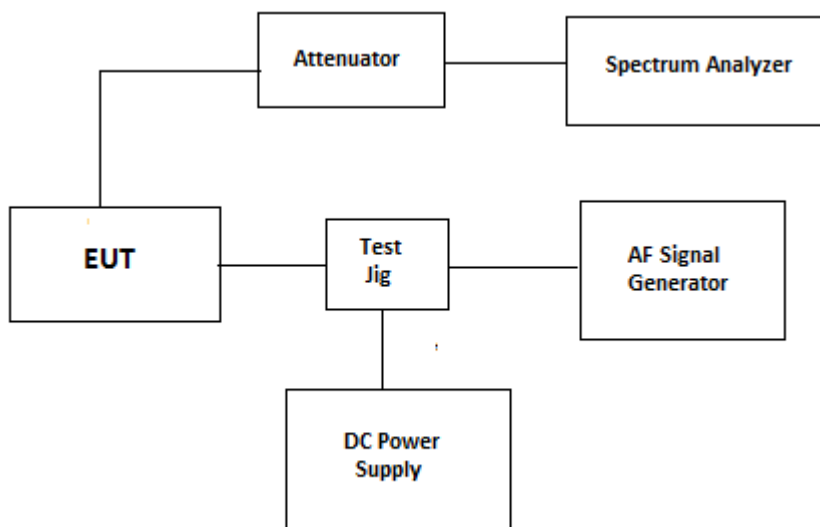

Test Date: Aug 24, 2022

| Test Instrument     | Manufacturer       | Model No            | Serial No        | Frequency Range | Cal Due date |
|---------------------|--------------------|---------------------|------------------|-----------------|--------------|
| Spectrum Analyzer   | Rohde & Schwarz    | FSU                 | 100398           | 20Hz-26.5GHz    | 20 Sep 2023  |
| AF Signal Generator | HP                 | HP-8920B            | US39064699       | 30MHz-1GHz      | 29 Mar 2024  |
| Digital Voltmeter   | HP                 | 3456A               | 2015A04523       | ---             | 08 Feb 2024  |
| Attenuator          | Aeroflex\Weinschel | 46-30-34<br>23-3-34 | BR9127<br>AM2548 | DC-18GHz        | Cal on use   |
| Power Supply        | HQ Power           | PS613U              | -                | 1-30V, DC 3A    | ----         |
| Multimeter          | Fluke              | 8842A               | 4142058          | ---             | 01 Oct 2022  |


#### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 22TIL129-F90  
September 29, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## 6.5. Tx Conducted Emission

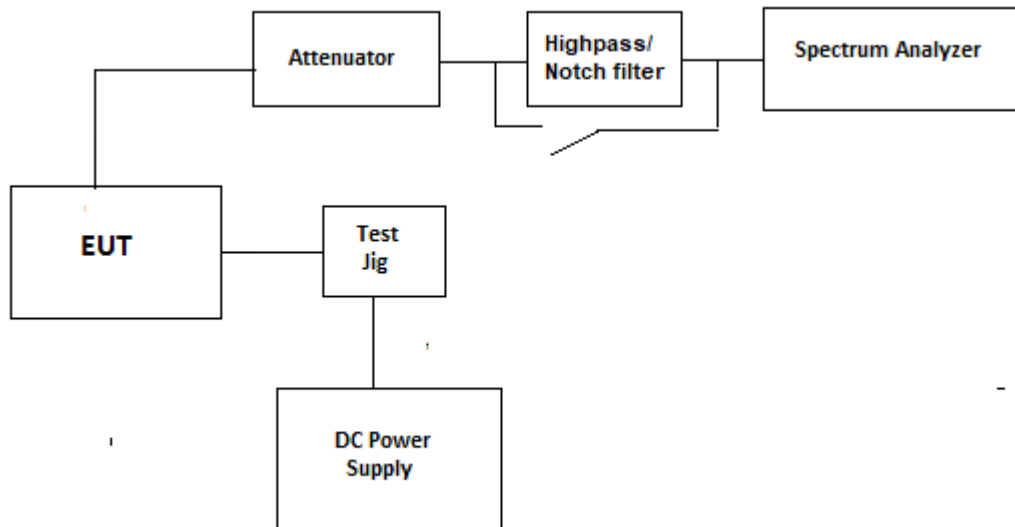

Test Date: Aug 25, 2022

| Test Instrument     | Manufacturer       | Model No            | Serial No        | Frequency Range | Cal Due date |
|---------------------|--------------------|---------------------|------------------|-----------------|--------------|
| Spectrum Analyzer   | Rohde & Schwarz    | FSU                 | 100398           | 20Hz-26.5GHz    | 20 Sep 2023  |
| AF Signal Generator | HP                 | HP-8920B            | US39064699       | 30MHz-1GHz      | 29 Mar 2024  |
| Notch filter        | K & L              | 3TNF-30/76-N/N      | 36               | 30-76MHz        | Cal on use   |
| Hi-pass filter      | Mini-Circuit       | BHP-100             | --               | Cut off 90MHz   | Cal on use   |
| Attenuator          | Aeroflex\Weinschel | 46-30-34<br>23-3-34 | BR9127<br>AM2548 | DC-18GHz        | Cal on use   |
| Power Supply        | HQ Power           | PS613U              | -                | 1-30V, DC 3A    | ----         |
| Multimeter          | Fluke              | 8842A               | 4142058          | ---             | 01 Oct 2022  |


### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 22TIL129-F90  
September 29, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## 6.6. Rx Conducted Emission

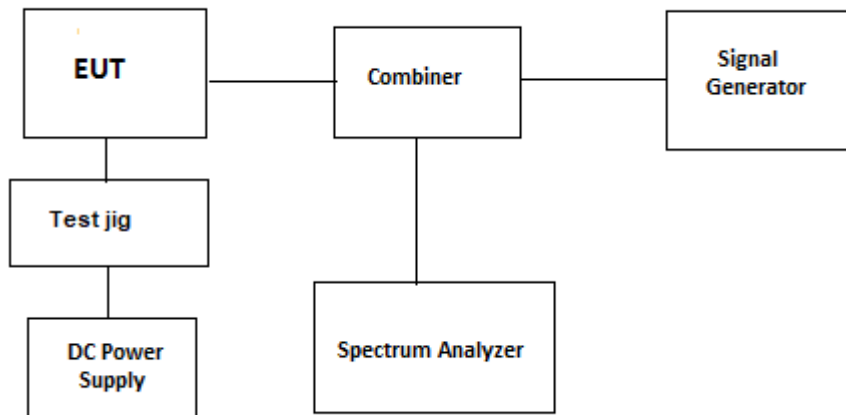

Test Date: Aug 26, 2022

| Test Instrument   | Manufacturer    | Model No | Serial No  | Frequency Range | Cal Due date |
|-------------------|-----------------|----------|------------|-----------------|--------------|
| Spectrum Analyzer | Rohde & Schwarz | FSU      | 100398     | 20Hz-26.5GHz    | 20 Sep 2023  |
| Signal Generator  | IFR             | 2025     | 202304/141 | 9KHz-2.5GHz     | 02 Dec 2023  |
| Combiner          | Weinschel 93458 | 1515     | PS119      | DC-18GHz        | Cal on use   |
| Power Supply      | HQ Power        | PS613U   | -          | 1-30V, DC 3A    | ----         |
| Multimeter        | Fluke           | 8842A    | 4142058    | ---             | 01 Oct 2022  |


### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 22TIL129-F90  
September 29, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## 6.7. TX Radiated

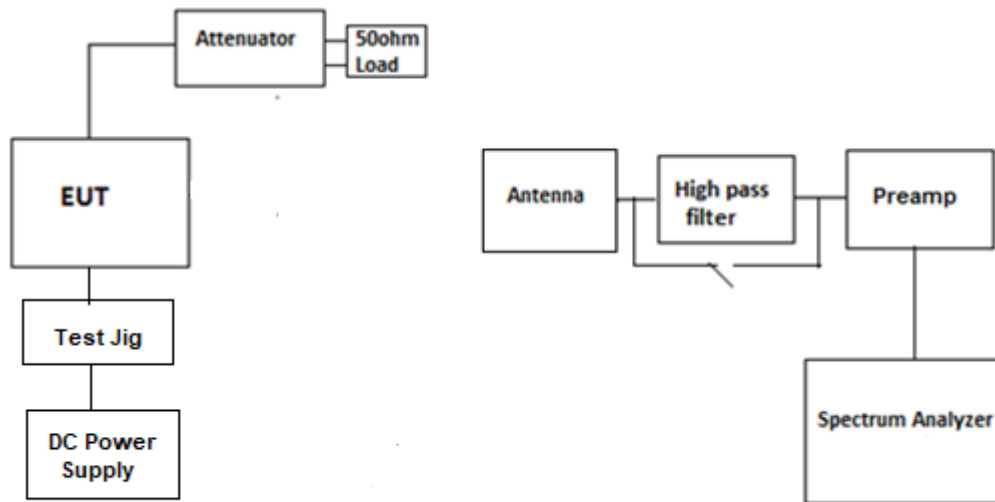

Test Date: Aug 26, 2022

| Test Instrument      | Manufacturer       | Model No | Serial No | Frequency Range | Cal Due date |
|----------------------|--------------------|----------|-----------|-----------------|--------------|
| Spectrum Analyzer    | Rohde & Schwarz    | FSU      | 100398    | 20Hz-26.5GHz    | 20 Sep 2023  |
| Spectrum Analyzer    | Rohde & Schwarz    | ESU40    | 100037    | 20Hz-40GHz      | 01 Sep 2022  |
| Biconilog Antenna    | EMCO               | 3142C    | 00026873  | 26-2000MHz      | 16 Dec 2023  |
| Log Periodic Antenna | ETS                | 3148     | 00023845  | 200-2000MHz     | 14 Apr 2023  |
| Horn Antenna         | ETS                | 3115     | 5955      | 1-18GHz         | 12 Oct 2022  |
| Horn Antenna         | ETS                | 3117     | 00119425  | 1-18GHz         | 20 Jan 2024  |
| Preamplifier         | Com-Power          | PAM-118A | 551016    | 500MHz-18GHz    | 04 Mar 2023  |
| Preamplifier         | Com-Power          | PA-103   | 161040    | 1-1000MHz       | 04 Mar 2023  |
| Hi-pass filter       | Mini-Circuit       | BHP-100  | --        | Cut off 90MHz   | Cal on use   |
| Attenuator           | Aeroflex\Weinschel | 46-30-34 | BR9127    | DC-18GHz        | Cal on use   |
| Load(50ohm)          | Mini-Circuits      | KARN-50+ | --        | DC-18GHz        | Cal on use   |
| Power Supply         | HQ Power           | PS613U   | -         | 1-30V, DC 3A    | ----         |
| Multimeter           | Fluke              | 8842A    | 4142058   | ---             | 01 Oct 2022  |


### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 22TIL129-F90  
September 29, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## 6.8. Rx Radiated, Unintentional Radiated

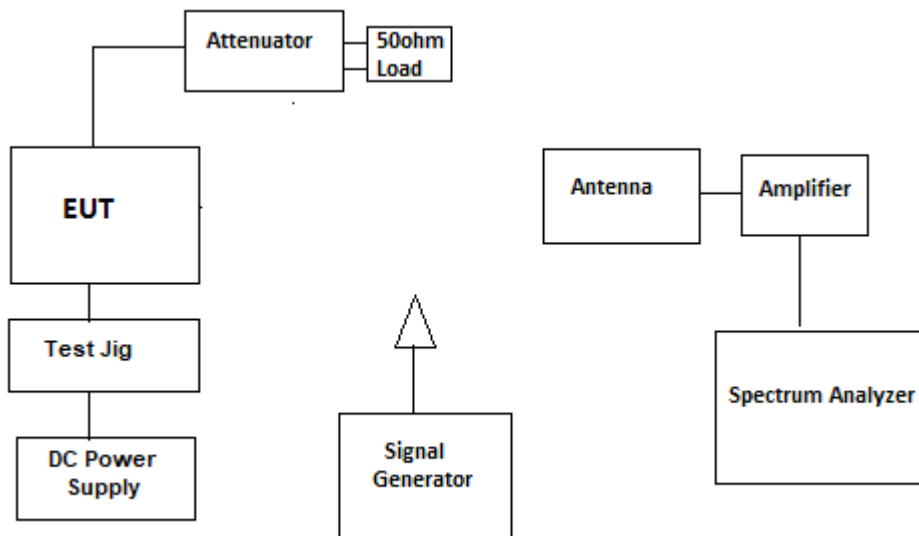

Test Date: Aug 26, 2022, Unintentional: Sep 21, 2022

| Test Instrument      | Manufacturer       | Model No | Serial No  | Frequency Range | Cal Due date |
|----------------------|--------------------|----------|------------|-----------------|--------------|
| Spectrum Analyzer    | Rohde & Schwarz    | FSU      | 100398     | 20Hz-26.5GHz    | 20 Sep 2023  |
| Spectrum Analyzer    | Rohde & Schwarz    | ESU40    | 100037     | 20Hz-40GHz      | 27 Sep 2022  |
| Biconilog Antenna    | EMCO               | 3142C    | 00026873   | 26-2000MHz      | 16 Dec 2023  |
| Log Periodic Antenna | ETS                | 3148     | 00023845   | 200-2000MHz     | 14 Apr 2023  |
| Horn Antenna         | ETS                | 3115     | 5955       | 1-18GHz         | 12 Oct 2022  |
| Horn Antenna         | ETS                | 3117     | 00119425   | 1-18GHz         | 20 Jan 2024  |
| Preamplifier         | Com-Power          | PAM-118A | 551016     | 500MHz-18GHz    | 04 Mar 2023  |
| Preamplifier         | Com-Power          | PA-103   | 161040     | 1-1000MHz       | 04 Mar 2023  |
| Signal Generator     | IFR                | 2025     | 202304/141 | 9KHz-2.5GHz     | 02 Dec 2023  |
| Attenuator(30dB)     | Aeroflex\Weinschel | 46-30-34 | BR9127     | DC-18GHz        | Cal on use   |
| Load(50ohm)          | Mini-Circuits      | KARN-50+ | --         | DC-18GHz        | Cal on use   |
| Power Supply         | HQ Power           | PS613U   | -          | 1-30V, DC 3A    | ----         |
| Multimeter           | Fluke              | 8842A    | 4142058    | ---             | 01 Oct 2022  |


### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 22TIL129-F90  
September 29, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## 6.9. Frequency Stability

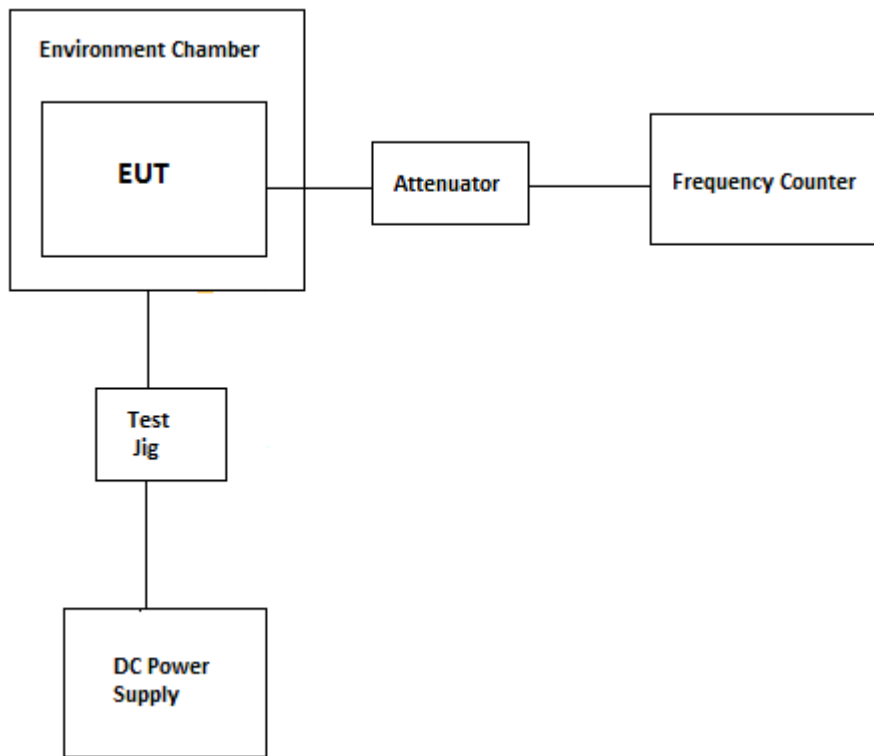

Test Date: Sep 12~14, 2022

| Test Instrument       | Manufacturer       | Model No | Serial No        | Frequency Range | Cal Due date |
|-----------------------|--------------------|----------|------------------|-----------------|--------------|
| Environmental Chamber | Envirotronics      | SSH32C   | 11994847-S-11059 | -60 to 177° C   | 25 Aug 2023  |
| Frequency Counter     | EIP                | 545A     | 2683             | 10MHz-1GHz      | 06 Sep 2024  |
| Attenuator(20dB)      | Aeroflex\Weinschel | 34-20-34 | BP6023           | DC-18GHz        | Cal on use   |
| Attenuator(20dB)      | Narda              | 26298    | A577             | DC-1GHz         | Cal on use   |
| Power Supply          | BK Precision       | 1740     | 1550497          | 0-60V, DC 4 A   | --           |
| Multimeter            | Fluke              | 8842A    | 4142058          | ---             | 01 Oct 2022  |

### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 22TIL129-F90  
September 29, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## EXHIBIT 7. MEASUREMENT UNCERTAINTY

| Test description                         |             | Uncertainty |
|------------------------------------------|-------------|-------------|
| Conducted Output Power                   |             | +/- 0.62 dB |
| Occupied bandwidth                       |             | +/-0.2Hz    |
| Emission Mask                            | Amplitude   | +/- 0.63 dB |
|                                          | Frequency   | +/-0.2Hz    |
| Conducted Out of Band/Spurious Emissions |             | +/- 0.72 dB |
| Radiated Out of Band/Spurious Emissions  | <30 MHz     | +/-2.69dB   |
|                                          | 30-1000 MHz | +/-4.20dB   |
|                                          | >1 GHz      | +/-2.70dB   |
| Frequency Stability                      |             | +/-1.2 Hz   |
| Transient Frequency Behavior             |             | +/- 0.05%   |
| Power Line Conducted Emission            |             | + 2.62dB    |

All uncertainty values are expanded standard uncertainty to give a confidence level of 95%, based on coverage factor k=2

---

### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 22TIL129-F90  
September 29, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## EXHIBIT 8. MEASUREMENT METHODS

### 8.1. CONDUCTED POWER MEASUREMENTS

- The following shall be applied to the combination(s) of the radio device and its intended antenna(e).
- If the RF level is user adjustable, all measurements shall be made with the highest power level available to the user for that combination.
- The following method of measurement shall apply to both conducted and radiated measurements.
- The radiated measurements are performed at the Ultratech Calibrated Open Field Test Site.
- The measurement shall be performed using normal operation of the equipment with modulation.

Test procedure shall be as follows:

**Step 1:** Duty Cycle measurements if the transmitter's transmission is transient

- Using a EMI Receiver with the frequency span set to 0 Hz and the sweep time set at a suitable value to capture the envelope peaks and the duty cycle of the transmitter output signal;
- The duty cycle of the transmitter,  $x = \text{Tx on} / (\text{Tx on} + \text{Tx off})$  with  $0 < x < 1$ , is measure and recorded in the test report. For the purpose of testing, the equipment shall be operated with a duty cycle that is equal or more than 0.1.


**Step 2:** Calculation of Average EIRP. See Figure 1

- The average output power of the transmitter shall be determined using a wideband, calibrated RF average power meter with the power sensor with an integration period that exceeds the repetition period of the transmitter by a factor 5 or more. The observed value shall be recorded as "A" (in dBm);
- The e.i.r.p. shall be calculated from the above measured power output "A", the observed duty cycle x, and the applicable antenna assembly gain "G" in dBi, according to the formula:

$$\text{EIRP} = A + G + 10\log(1/x)$$

{X = 1 for continuous transmission =>  $10\log(1/x) = 0$  dB}

**Figure 1.**

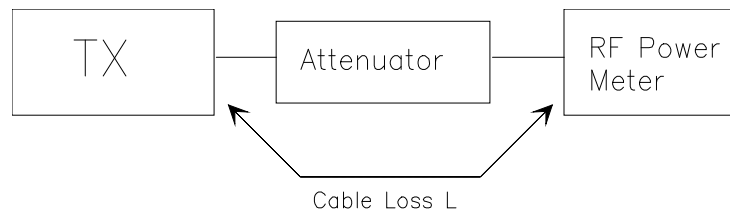

## 8.2. RADIATED POWER MEASUREMENTS (ERP & EIRP) USING SUBSTITUTION METHOD

### 8.2.1. MAXIMIZING RF EMISSION LEVEL (E-FIELD)

- (a) The measurements were performed with full rf output power and modulation.
- (b) Test was performed at listed 3m open area test site (listed with FCC, IC, ITI, NVLAP, ACA & VCCI).
- (c) The transmitter under test was placed at the specified height on a non-conducting turntable (80 cm height)
- (d) The BICONILOG antenna (20 MHz to 1 GHz) or HORN antenna (1 GHz to 18 GHz) was used for measuring.
- (e) Load an appropriate correction factors file in EMI Receiver for correcting the field strength reading level

Total Correction Factor recorded in the EMI Receiver = Cable Loss + Antenna Factor  
 $E \text{ (dB}\mu\text{V/m)} = \text{Reading (dB}\mu\text{V)} + \text{Total Correction Factor (dB/m)}$

- (f) Set the EMI Receiver and #2 as follows:

Center Frequency: test frequency  
Resolution BW: 100 KHz  
Video BW: same  
Detector Mode: positive  
Average: off  
Span: 3 x the signal bandwidth

- (g) The test antenna was lowered or raised from 1 to 4 meters until the maximum signal level was detected.
- (h) The transmitter was rotated through  $360^\circ$  about a vertical axis until a higher maximum signal was received.
- (i) The test antenna was lowered or raised again from 1 to 4 meters until a maximum was obtained. This level was recorded.
- (j) The recorded reading was corrected to the true field strength level by adding the antenna factor, cable loss and subtracting the pre-amplifier gain.
- (k) The above steps were repeated with both transmitters' antenna and test receiving antenna placed in vertical and horizontal polarization. Both readings with the antennas placed in vertical and horizontal polarization shall be recorded.
- (l) Repeat for all different test signal frequencies.

### 8.2.2. Measuring the EIRP of Spurious/Harmonic Emissions using Substitution Method

- (a) Set the EMI Receiver (for measuring E-Field) and Receiver #2 (for measuring EIRP) as follows:

Center Frequency: equal to the signal source  
Resolution BW: 100 KHz  
Video BW: VBW > RBW  
Detector Mode: positive  
Average: off  
Span: 3 x the signal bandwidth

- (b) Load an appropriate correction factors file in EMI Receiver for correcting the field strength reading level

Total Correction Factor recorded in the EMI Receiver = Cable Loss + Antenna Factor  
 $E \text{ (dBuV/m)} = \text{Reading (dBuV)} + \text{Total Correction Factor (dB/m)}$

- (c) Select the frequency and E-field levels obtained in the Section 8.2.1 for ERP/EIRP measurements.  
(d) Substitute the EUT by a signal generator and one of the following transmitting antenna (substitution antenna):  
    ♦ DIPOLE antenna for frequency from 30-1000 MHz or  
    ♦ HORN antenna for frequency above 1 GHz }.  
(e) Mount the transmitting antenna at 1.5 meter high from the ground plane.  
(f) Use one of the following antenna as a receiving antenna:  
    ♦ DIPOLE antenna for frequency from 30-1000 MHz or  
    ♦ HORN antenna for frequency above 1 GHz }.  
(g) If the DIPOLE antenna is used, tune it's elements to the frequency as specified in the calibration manual.  
(h) Adjust both transmitting and receiving antenna in a VERTICAL polarization.  
(i) Tune the EMI Receivers to the test frequency.  
(j) Lower or raise the test antenna from 1 to 4 meters until the maximum signal level was detected.  
(k) The transmitter was rotated through 360° about a vertical axis until a higher maximum signal was received.  
(l) Lower or raise the test antenna from 1 to 4 meters until the maximum signal level was detected.  
(m) Adjust input signal to the substitution antenna until an equal or a known related level to that detected from the transmitter was obtained in the test receiver.  
(n) Record the power level read from the Average Power Meter and calculate the ERP/EIRP as follows:

$$P = P1 - L1 = (P2 + L2) - L1 = P3 + A + L2 - L1$$

$$\text{EIRP} = P + G1 = P3 + L2 - L1 + A + G1$$

$$\text{ERP} = \text{EIRP} - 2.15 \text{ dB}$$

$$\text{Total Correction factor in EMI Receiver \# 2} = L2 - L1 + G1$$

Where: P: Actual RF Power fed into the substitution antenna port after corrected.  
P1: Power output from the signal generator  
P2: Power measured at attenuator A input  
P3: Power reading on the Average Power Meter  
EIRP: EIRP after correction  
ERP: ERP after correction

- (o) Adjust both transmitting and receiving antenna in a HORIZONTAL polarization, then repeat step (k) to (o)  
(p) Repeat step (d) to (o) for different test frequency  
(q) Repeat steps (c) to (j) with the substitution antenna oriented in horizontal polarization.  
(r) Actual gain of the EUT's antenna is the difference of the measured EIRP and measured RF power at the RF port. Correct the antenna gain if necessary.

Figure 2


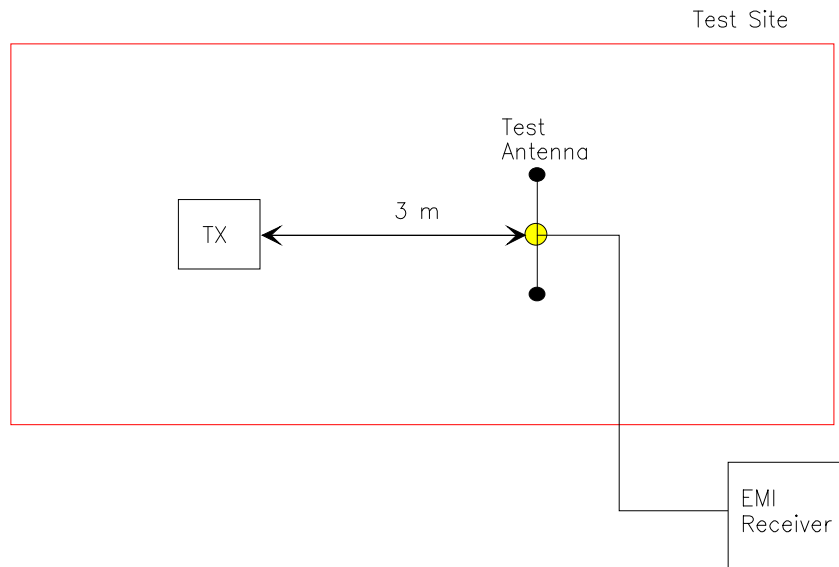


Figure 3

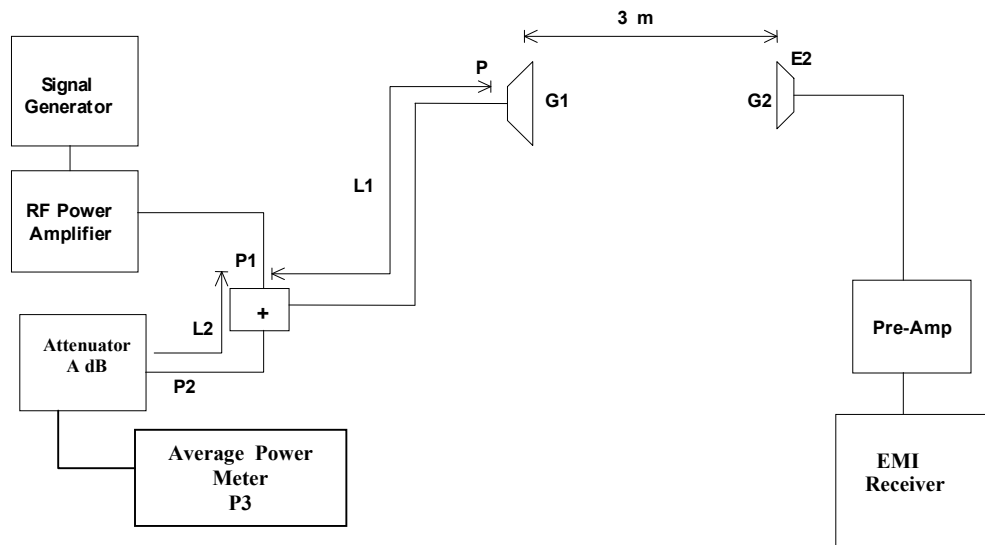

### 8.3. FREQUENCY STABILITY

Refer to FCC @ 2.1055.

- (a) The frequency stability shall be measured with variation of ambient temperature as follows: From -30 to +50 centigrade except that specified in subparagraph (2) & (3) of this paragraph.
- (b) Frequency measurements shall be made at extremes of the specified temperature range and at intervals of not more than 10 centigrade through the range. A period of time sufficient to stabilize all of the components of the oscillator circuit at each temperature level shall be allowed prior to frequency measurement. The short-term transient effects on the frequency of the transmitter due to keying (except for broadcast transmitters) and any heating element cycling normally occurring at each ambient temperature level also shall be shown. Only the portion or portions of the transmitter containing the frequency determining and stability circuitry need be subjected to the temperature variation test.
- (d) The frequency stability supply shall be measured with variation of primary supply voltage as follows:
  - (1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.
  - (2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.
  - (3) The supply voltage shall be measured at the input to the cable normally provide with the equipment, or at the power supply terminals if cables are not normally provided. Effects on frequency of transmitter keying (except for broadcast transmitters) and any heating element cycling at the nominal supply voltage and at each extreme also shall be shown.
- (e) When deemed necessary, the Commission may require tests of frequency stability under conditions in addition to those specifically set out in paragraphs (a), (b), (c) and (d) of this section. (For example, measurements showing the effect of proximity to large metal objects, or of various types of antennas, may be required for portable equipment).

## 8.4. EMISSION MASK

**Voice or Digital Modulation Through a Voice Input Port @ 2.1049(c)(i):** The transmitter was modulated by a 2.5 KHz tone signal at an input level 16 dB greater than that required to produce 50% modulation (e.g.:  $\pm 2.5$  KHz peak deviation at 1 KHz modulating frequency). The input level was established at the frequency of maximum response of the audio modulating circuit.

**Digital Modulation Through a Data Input Port @ 2.1049(h):** Transmitters employing digital modulation techniques - when modulated by an input signal such that its amplitude and symbol rate represent the maximum rated conditions under which the equipment will be operated. The signal shall be applied through any filter networks, pseudo-random generators or other devices required in normal service. Additionally, the Emission Masks shall be shown for operation with any devices used for modifying the spectrum when such devices are operational at the discretion of the user.

The following EMI Receiver bandwidth shall be used for measurement of Emission Mask/Out-of-Band Emission Measurements:

- (1) For 25 KHz Channel Spacing: RBW = 300 Hz
- (2) For 12.5 KHz or 6.25 KHz Channel Spacings: RBW = 100 Hz

The all cases the Video Bandwidth shall be equal or greater than the measuring bandwidth.

## 8.5. SPURIOUS EMISSIONS (CONDUCTED)

With transmitter modulation characteristics described in Out-of-Band Emissions measurements @ 2.1049, the transmitter spurious and harmonic emissions were scanned. The spurious and harmonic emissions were measured with the EMI Receiver controls set as RBW = 30 KHz minimum, VBW  $\geq$  RBW and SWEEP TIME = AUTO). The transmitter was operated at a full rated power output, and modulated as follows:

**FCC 47 CFR 2.1057 - Frequency spectrum to be investigated:** The spectrum was investigated from the lowest radio generated in the equipment up to at least the 10<sup>th</sup> harmonic of the carrier frequency or to the highest frequency practicable in the present state of the art of measuring techniques, whichever is lower. Particular attention should be paid to harmonics and subharmonics of the carrier frequency. Radiation at the frequencies of multiplier stages should be checked. The amplitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be reported.

**FCC 47 CFR 2.1051 - Spurious Emissions at Antenna Terminal:** The radio frequency voltage or powers generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of the harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in 2.1049 as appropriate. The magnitude of spurious emissions, which are attenuated more than 20 dB below the permissible value, need not be specified.

## 8.6. TRANSIENT FREQUENCY BEHAVIOR

1. Connect the transmitter under tests as shown in the above block diagram
2. Set the signal generator to the assigned frequency and modulate with a 1 KHz tone at  $\pm 12.5$  KHz deviation and its output level to be 50 dB below the transmitter rf output at the test receiver end.
3. Set the horizontal sweep rate on the storage scope to 10 milliseconds per division and adjust the display to continuously view the 1000 Hz tone from the Demodulator Output Port (DOP) of the Test Receiver. Adjust the vertical scale amplitude control of the scope to display the 1000 Hz at  $\pm 4$  divisions vertical Center at the display.
4. Adjust the scope so it will trigger on an increasing magnitude from the RF trigger signal of the transmitter under test when the transmitter was turned on. Set the controls to store the display.
5. The output at the DOP, due to the change in the ratio of the power between the signal generator input power and transmitter output power will, because of the capture effect of the test receiver, produce a change in display: For the first part of the sweep it will show the 1 KHz test signal. Then once the receiver's demodulator has been captured by the transmitter power, the display will show the frequency difference from the assigned frequency to the actual transmitter frequency versus time. The instant when the 1 KHz test signal is completely suppressed (including any capture time due to phasing) is considered to be  $t_{on}$ . The trace should be maintained within the allowed divisions during the period  $t_1$  and  $t_2$ .
6. During the time from the end of  $t_2$  to the beginning of  $t_3$  the frequency difference should not exceed the limits set by the FCC in Part 90.214 and the outlined in the Carrier Frequency Stability sections. The allowed limit is equal to FCC frequency tolerance limits specified in FCC 90.213.
7. Repeat the above steps when the transmitter was turned off for measuring  $t_3$ .

\*\*\*END OF REPORT\*\*\*