


FCC/MELLON

FEB 08 1999

# ENGINEERING TEST REPORT



**VHF/UHF FM MOBILE TRANSCEIVER  
MODEL NO.: TFM-500**

**FCC ID: IMATFM-500**

**FCC PART 2 & PART 90, SUBPART I  
RADIO SERVICES FOR COMMERCIAL/INDUSTRIAL USES**

**UltraTech's FILE NO.: TIL10FT**

**Tested for:**

**TECHNISONIC INDUSTRIES LIMITED**

250 Watline Avenue  
Mississauga, Ontario  
Canada, L4Z 1P4

**Tested by:**

**UltraTech - Group of Labs**

4181 Sladeview Crescent, Unit 33  
Mississauga, Ontario  
Canada L5L 5R2

**Report Prepared by: Dan Huynh**

**DATE: Jan. 25, 1999**

## UltraTech

33-4181 Sladeview Crescent, Mississauga, Ontario, Canada, L5L 5R2

Telephone (905) 569-2550 Facsimile (905) 569-2480

Web Site: [www.ultratech-labs.com](http://www.ultratech-labs.com) Email: [vhk.ultratech@sympatico.ca](mailto:vhk.ultratech@sympatico.ca)

## TABLE OF CONTENTS

<b>1. EXHIBIT 1 – SUMMARY OF TEST RESULTS &amp; GENERAL STATEMENT OF CERTIFICATION .....</b>	<b>3</b>
<b>2. EXHIBIT 2 - GENERAL INFORMATION.....</b>	<b>5</b>
2.1. APPLICANT .....	5
2.2. MANUFACTURER .....	5
2.3. DESCRIPTION OF EQUIPMENT UNDER TESTS.....	5
2.4. RELATED SUBMITTALS)/GRANT .....	7
2.5. TEST METHODOLOGY.....	7
2.6. TEST FACILITY .....	7
2.7. UNITS OF MEASUREMENTS.....	7
<b>3. EXHIBIT 3 - SYSTEM TEST CONFIGURATION.....</b>	<b>8</b>
3.1. TEST SYSTEM DETAILS.....	8
3.2. BLOCK DIAGRAMS OF TEST SET-UP .....	9
3.3. PHOTOGRAPHS FOR TEST SETUP AT OFTS FOR RADIATED EMISSIONS MEASUREMENTS.....	10
3.4. JUSTIFICATION.....	11
3.5. EUT OPERATING CONDITION .....	11
3.6. SPECIAL ACCESSORIES .....	11
3.7. EQUIPMENT MODIFICATIONS.....	11
<b>4. EXHIBIT 4 - TEST DATA.....</b>	<b>12</b>
4.1. POWER AND ANTENNA HEIGHT @ FCC 90.205 .....	12
4.2. FREQUENCY STABILITY @ FCC 90.213 .....	14
4.3. AUDIO FREQUENCY RESPONSE @ FCC 2.987(A) & 90.242(B)(8) .....	24
4.4. MODULATION LIMITING @ FCC 90.210 .....	33
4.5. EMISSION MASKS @ FCC 90.210 .....	42
4.6. TRANSMITTER ANTENNA POWER SPURIOUS/HARMONIC CONDUCTED EMISSIONS @ FCC 90.210.....	44
4.7. TRANSMITTER SPURIOUS/HARMONIC RADIATED EMISSIONS @ FCC 90.210 .....	49
4.8. TRANSIENT FREQUENCY BEHAVIOR.....	58
<b>5. EXHIBIT 5 - GENERAL TEST PROCEDURES.....</b>	<b>64</b>
5.1. AC POWERLINE CONDUCTED EMISSIONS MEASUREMENTS - GENERAL TEST METHOD.....	64
5.2. ELECTRICAL FIELD RADIATED EMISSIONS MEASUREMENTS - GENERAL TEST METHOD .....	65
<b>6. EXHIBIT 6 - INFORMATION RELATED TO EQUIPMENT UNDER TESTS.....</b>	<b>68</b>
6.1. FCC ID LABELLING AND SKETCH OF FCC LABEL LOCATION .....	68
6.2. PHOTOGRAPHS OF EQUIPMENT UNDER TEST .....	68
6.3. SYSTEM BLOCK DIAGRAM(S).....	68
6.4. SCHEMATIC DIAGRAMS.....	68
6.5. USER'S MANUAL WITH "FCC INFORMATION TO USER STATEMENTS" .....	68

### ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: TIL10FT  
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## 1. EXHIBIT 1 – SUMMARY OF TEST RESULTS & GENERAL STATEMENT OF CERTIFICATION

FCC PARAGRAPH.	TEST REQUIREMENTS	COMPLIANCE (YES/NO)
90.205 & 2.985	RF Power Output	Yes
90.213 & 2.995	Frequency Stability	Yes
90.242(b)(8) & 2.987(a)	Audio Frequency Response	Not applicable to new standard. However, tests are attempted to be done due to FCC's recommendation.
90.210 & 2.987(b)	Modulation Limiting	Yes
90.210 & 2.989	Emission Masks	Yes
90.210, 2.997 & 2.991	Emission Limits - Spurious Emissions at Antenna Terminal	Yes
90.210, 2.997 & 2.993	Emission Limits - Field Strength of Spurious Emissions	Yes
90.214	Transient Frequency Behavior	Yes

VHF/UHF FM MOBILE TRANSCEIVER, Model No.: TFM-500, by TECHNISONIC INDUSTRIES LIMITED has also been tested and found to comply with **FCC Part 15, Subpart B - Radio Receivers and Class A Digital Devices**. The engineering test report has been documented and kept in file and it is available anytime upon FCC request.

### ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: [vhk.ultratech@sympatico.ca](mailto:vhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: TIL10FT  
Jan. 25, 1999


- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## **TESTIMONIAL AND STATEMENT OF CERTIFICATION**

*THIS IS TO CERTIFY:*

- 1) *THAT the application was prepared either by, or under the direct supervision of the undersigned.*
- 2) *THAT the measurement data supplied with the application was taken under my direction and supervision.*
- 3) *THAT the data was obtained on representative production units, representative.*
- 4) *THAT, to the best of my knowledge and belief, the facts set forth in the application and accompanying technical data are true and correct.*

**Certified by:**

A circular professional engineer seal for the Province of Ontario. The outer ring contains the text "PROFESSIONAL ENGINEER" at the top and "PROVINCE OF ONTARIO" at the bottom. The center of the seal features a stylized globe with a grid of latitude and longitude lines. Overlaid on the seal is a signature and the text "Tri Minh Luu, P. Eng. V.P., Engineering".

**Tri Minh Luu, P. Eng.  
V.P., Engineering**

**DATE: Jan. 25, 1999**

### **ULTRATECH GROUP OF LABS**

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2

Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

**File #: TIL10FT  
Jan. 25, 1999**

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## 2. EXHIBIT 2 - GENERAL INFORMATION

### 2.1. APPLICANT

TECHNISONIC INDUSTRIES LIMITED  
250 Watline Avenue  
Mississauga, Ontario  
Canada, L4Z 1P4

Applicant's Representative: Mr. Steve McIntosh

### 2.2. MANUFACTURER

TECHNISONIC INDUSTRIES LIMITED  
250 Watline Avenue  
Mississauga, Ontario  
Canada, L4Z 1P4

### 2.3. DESCRIPTION OF EQUIPMENT UNDER TESTS

PRODUCT NAME:	VHF/UHF FM MOBILE TRANSCEIVER
MODEL NO.:	TFM-500
SERIAL NUMBER:	Pre-production
TYPE OF EQUIPMENT:	Radio Services Transmitters
SERVICES AREAS:	Commercial/Industrial
OPERATING FREQ.:	138-174 MHz and 403-512 MHz
CHANNEL SPACINGS	12.5 kHz and 25 kHz
POWER RATING:	10 Watts max.
OUTPUT IMPEDANCE:	50 Ohms
DUTY CYCLE:	Continuous
99% BANDWIDTH:	13.8 kHz (for 25 kHz Channeling) and 9.8 kHz (12.5 kHz Channeling)
EMISSION DESIGNATION:	9K8F3E and 13K8F3E

---

#### ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-669-2550, Fax. #: 905-669-2480, Email: [vhk.ultratech@sympatico.ca](mailto:vhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: TIL10FT  
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

(i) For FM Voice Modulation:

- Channel Spacing = 12.5 kHz and 25 kHz, D = 1.9 KHz max. measured, K = 1, M = 3 KHz  
 $B_n = 2M + 2DK = 2(3) + 2(1.9)(1) = \underline{9.8 \text{ KHz}}$   
emission designation: 9K8F3E
- Channel Spacing = 25 kHz and 25 kHz, D = 3.9 KHz max. measured, K = 1, M = 3 KHz  
 $B_n = 2M + 2DK = 2(3) + 2(3.9)(1) = \underline{13.8 \text{ KHz}}$   
emission designation: 13K8F3E

INPUT SUPPLY: 28 Vdc

ASSOCIATED DEVICES: N/A

FCC ID: IMATFM-500

INTERFACE PORTS: (1) UHF RF IN/OUT (BNC)  
(2) VHF RF IN/OUT (BNC)  
(3) DB9 Port

#### ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2

Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: TIL10FT

Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## 2.4. RELATED SUBMITTALS)/GRANT

Not applicable

## 2.5. TEST METHODOLOGY

These tests were conducted on a sample of the equipment for the purpose of certification compliance with Code of Federal Regulations, Parts 2 & 90, Subpart I, Radio Services Operating in the Frequency Bands 138-174 MHz and 403-512 MHz.

Both conducted and radiated emissions measurements were conducted in accordance with American National Standards Institute ANSI C63.4 - American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.

## 2.6. TEST FACILITY

AC Powerline Conducted Emissions were performed in UltraTech's shielded room, 16'(L) by 12'(W) by 12'(H).

Radiated Emissions were performed at the Ultratech's 3 Meter Open Field Test Site (OFTS) situated in the Town of Oakville, province of Ontario.

The above sites have been calibrated in accordance with ANSI C63.4, and found to be in compliance with the requirements of Sec. 2.948 of the FCC Rules. The descriptions and site measurement data of the Oakville Open Field Test Site has been filed with FCC office (FCC File No.: 31040/SIT 1300B3) and Industry Canada office (Industry Canada File No.: IC2049). Last Date of Site Calibration: September 20, 1998.

The above test site is also filed with Interference Technology International Ltd (ITI - An EC Directive on EMC).

## 2.7. UNITS OF MEASUREMENTS

Measurements of conducted emissions are reported in units of dB referenced to one microvolt [dB(uV)].

Measurements of radiated emissions are reported in units of dB referenced to one microvolt per meter [dB(uV)/m] at the distance specified in the report, wherever it is applicable.

---

### ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: TIL10FT  
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

### 3. EXHIBIT 3 - SYSTEM TEST CONFIGURATION

#### 3.1. TEST SYSTEM DETAILS

The following peripherals, FCC identifiers and types interconnecting cables were used with the EUT for testing:

- (1) **EUT:** TECHNISONIC INDUSTRIES LIMITED, VHF/UHF FM MOBILE TRANSCEIVER, Model : TFM-500,  
RF Cable: Shielded  
Power Supply Cable: Non-shielded
- (2) **TEST JIG:** Technisonic Test Jig for Voice Radio Transmitter and Receivers

---

#### ULTRATECH GROUP OF LABS


4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: TIL10FT  
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



### 3.2. BLOCK DIAGRAMS OF TEST SET-UP

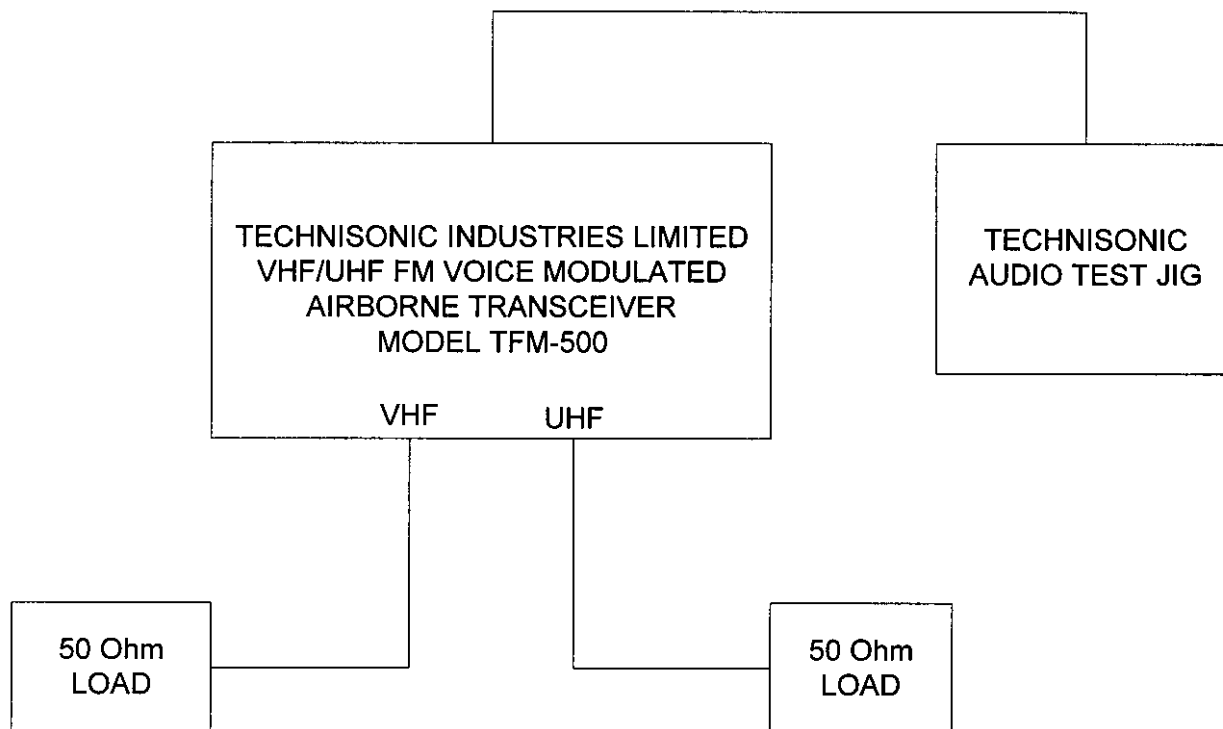

#### ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2

Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: [vhk.ultratech@sympatico.ca](mailto:vhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: TIL10FT

Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

### 3.4. JUSTIFICATION

No deviation, in both configuration and operation manners, different from normal operation were required.

### 3.5. EUT OPERATING CONDITION

Transmitter was turned on continuously for testing. The transmitter's carrier was modulated with modulating signal as mentioned in the test data.

### 3.6. SPECIAL ACCESSORIES

No special accessories were required.

### 3.7. EQUIPMENT MODIFICATIONS

Not required.

---

#### ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: TIL10FT  
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## 4. EXHIBIT 4 - TEST DATA

### 4.1. POWER AND ANTENNA HEIGHT @ FCC 90.205

**PRODUCT NAME:** VHF/UHF FM MOBILE TRANSCEIVER,  
Model No.: TFM-500

**FCC REQUIREMENTS:**

FCC Part 90, Para. 90.205:- Please refer to FCC CFR 47, Part 80 to End, Para. 90.205 for specification details.

**CLIMATE CONDITION:**

Standard Temperature and Humidity:

- Ambient temperature: 21 °C
- Relative humidity: 43%

**POWER INPUT:**

28 Vdc.

**TEST EQUIPMENT:**


- Advantest Spectrum Analyzer, Model R3271, S/N: 15050203
- Bird Attenuator, 50 Ohm IN/OUT

**METHOD OF MEASUREMENTS:**

Refer to FCC @ 2.985

- (a) For transmitter other than single sideband, independent sideband and controlled carrier radiotelephone, power rf output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of the current and voltage on the circuit elements specified in 2.983(d)(5). The electrical characteristics of the radio frequency load attached to the output terminals when this test is made shall be stated.

**TEST ARRANGEMENT**



**TEST RESULTS:** Conforms.

**TESTED PERSONNEL:** Hung Trinh, RFI Technician

**DATE:** January 12, 1999

**ULTRATECH GROUP OF LABS**

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: [vhk.ultratech@sympatico.ca](mailto:vhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: TIL10FT  
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## MEASUREMENT DATA

### PEAK POWER MEASUREMENT AT THE ANTENNA TERMINAL

#### TEST CONFIGURATION

- The transmitter terminal was coupled to the Spectrum Analyzer through a 30 dB attenuator
- Power of the transmitter channel near the lowest, middle and highest of each frequency block/band were measured using the power meter, and the reading was corrected by added the calibrated attenuator's attenuation value and cable loss.
- The RF Output was turned on with no modulation.

TRANSMITTER CHANNEL OUTPUT	FUNDAMENTAL FREQUENCY (MHz)	MEASURED PEAK POWER (Watts)	PEAK POWER RATING (Watts)
--	138.000	10	10
--	150.000	10	10
--	174.000	10	10
--	406.125	10	10
--	450.000	10	10
--	470.000	10	10

**ERP Measurements:** -Appropriate antenna type, and adjustment of power output for effective radiated power (ERP) to meet FCC limits will be performed by the manufacturer at location of installation.

#### **ULTRATECH GROUP OF LABS**

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: TIL10FT  
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## 4.2. FREQUENCY STABILITY @ FCC 90.213

**PRODUCT NAME:** VHF/UHF FM MOBILE TRANSCEIVER,  
Model No.: TFM-500

### FCC REQUIREMENTS:

FCC Part 90, Sub. I, Para. 90.213

The carrier frequency of each transmitter shall be maintained within the following tolerances from the assigned frequencies.

FREQUENCY RANGE (MHz)	FIXED & BASE STATIONS (ppm)			MOBILE STATIONS (ppm)					
				> 2 W			≤ 2 W		
	6.25 kHz	12.5 kHz	25 kHz	6.25 kHz	12.5 kHz	25 kHz	6.25 kHz	12.5 kHz	25 kHz
150 – 174 MHz	1.0	2.5	5.0	2.0	5.0	5.0	2.0	5.0	*50.0
403 – 512 MHz	0.5	1.5	2.5	1.0	2.5	5.0	1.0	2.5	5.0

\* Stations operating in the 154.45 to 154.49 MHz or the 173.2 to 173.4 MHz bands must have a frequency stability of 5ppm.

### CLIMATE CONDITION:

Standard Temperature and Humidity: Please refer to Measurement Data

### POWER INPUT:

28 Vdc.

### TEST EQUIPMENT:

- Advantest Spectrum Analyzer, Model R3271, S/N: 15050203
- Tenney Temp. & Humidity Chamber, Model T5, S/N: 9723B
- Bird Attenuator, 50 Ohm IN/OUT

### ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: TIL10FT  
Jan. 25, 1999


- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

**METHOD OF MEASUREMENTS:**

Refer to FCC @ 2.995

- (a) The frequency stability shall be measured with variation of ambient temperature as follows:
- From -30 to +50 centigrade except that specified in subparagraph (2) & (3) of this paragraph.
- (b) Frequency measurements shall be made at extremes of the specified temperature range and at intervals of not more than 10 centigrade through the range. A period of time sufficient to stabilize all of the components of the oscillator circuit at each temperature level shall be allowed prior to frequency measurement. The short term transient effects on the frequency of the transmitter due to keying (except for broadcast transmitters) and any heating element cycling normally occurring at each ambient temperature level also shall be shown. Only the portion or portions of the transmitter containing the frequency determining and stability circuitry need be subjected to the temperature variation test.
- (d) The frequency stability supply shall be measured with variation of primary supply voltage as follows:
- (1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.
  - (2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.
  - (3) The supply voltage shall be measured at the input to the cable normally provide with the equipment, or at the power supply terminals if cables are not normally provided. Effects on frequency of transmitter keying (except for broadcast transmitters) and any heating element cycling at the nominal supply voltage and at each extreme also shall be shown.
- (e) When deemed necessary, the Commission may require tests of frequency stability under conditions in addition to those specifically set out in paragraphs (a), (b), (c) and (d) of this section. (For example, measurements showing the effect of proximity to large metal objects, or of various types of antennas, may be required for portable equipment).

**TEST ARRANGEMENT**

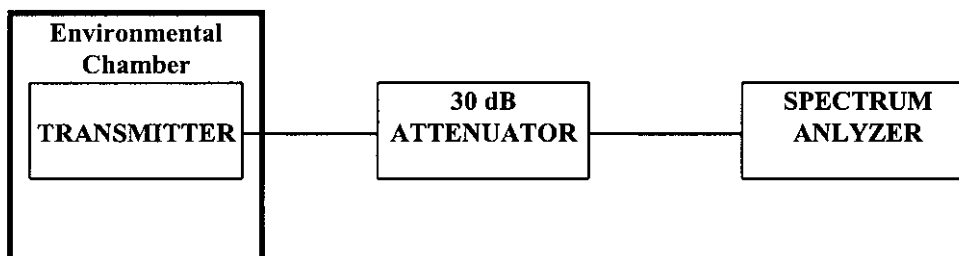

**TEST RESULTS:** Conforms.

**TESTED PERSONNEL:** Hung Trinh, RFI Technician

**DATE:** January 18, 1999

**ULTRATECH GROUP OF LABS**

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: TIL10FT  
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## MEASUREMENT DATA

### FREQUENCY STABILITY

#### TEST CONFIGURATION

- The transmitter was placed inside the environmental chamber, and its output terminal was coupled to the Spectrum Analyzer through a 30 dB attenuator.
- One transmitter channel frequency was tested.
- The DUT was supplied by a variable power supply.
- The environmental chamber was cycled down to -30° C. When the chamber reaches -30° C, the EUT was powered on with the nominal voltage level, with the transmitter keyed off. The terminal remained in the chamber at -30° C for a period of 1 hour. After 1 hour the transmitter was continuously keyed on, at full power. The transmitter frequency of the terminal was measured from the spectrum analyzer every minute for a period of 10 minutes.
- After 10 minutes the variable power supply was adjusted to supply the EUT with voltage of 85% nominal voltage level and measurement was repeated.
- After 10 minutes the variable power supply was adjusted to supply the EUT with voltage of 115% nominal voltage level and measurement was repeated.
- When the measurement complete, the transmitter was keyed off and the chamber was cycled up to 10° C steps. The EUT remained powered up (unkeyed) at -20° C for a minimum period of 1 hour, after which the measurements will be made as outlined above.
- The above was repeated for -10, 0, 20, 30, 40 and 50 degrees Celsius.

Product Name	VHF/UHF FM MOBILE TRANSCEIVER
Model No.	TFM-500
Center Frequency	138 MHz
Full Power Level	10 Watts
Frequency Tolerance Limit	690 Hz or 0.0005 % @ 138 MHz
Max. Frequency Tolerance Measured	217 Hz or 0.00016% @ 138 MHz
Base/Mobile/Portable	-30 to +50 degree C, 85% to 115%

AMBIENT TEMP. (°C)	KEYED-ON TIME (Minutes)	CENTRE FREQUENCY & RF POWER OUTPUT VARIATION					
		Supply Voltage (Nominal) 28 Volts dc		Supply Voltage (85% of Nominal) 23.8 Volts dc		Supply Voltage (115% of Nominal) 32.2 Volts dc	
		Hz	dB	Hz	dB	Hz	dB
-30	0	-106	N/A	N/A	N/A	N/A	N/A
	1	-99	N/A	N/A	N/A	N/A	N/A
	2	-113	N/A	N/A	N/A	N/A	N/A
	3	-99	N/A	N/A	N/A	N/A	N/A
	4	-106	N/A	N/A	N/A	N/A	N/A
	5	-99	N/A	N/A	N/A	N/A	N/A
	6	-92	N/A	N/A	N/A	N/A	N/A
	7	-106	N/A	N/A	N/A	N/A	N/A
	8	-99	N/A	N/A	N/A	N/A	N/A
	9	-106	N/A	N/A	N/A	N/A	N/A
	10	-99	N/A	N/A	N/A	N/A	N/A

Continued..

#### ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: [vhk.ultratech@sympatico.ca](mailto:vhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: TIL10FT  
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

AMBIENT TEMP. (°C)	KEYED-ON TIME (Minutes)	CENTRE FREQUENCY & RF POWER OUTPUT VARIATION					
		Supply Voltage (Nominal) 28 Volts dc		Supply Voltage (85% of Nominal) 23.8 Volts dc		Supply Voltage (115% of Nominal) 32.2 Volts dc	
		Hz	dB	Hz	dB	Hz	dB
-20	0	-49	N/A	N/A	N/A	N/A	N/A
	1	-42	N/A	N/A	N/A	N/A	N/A
	2	-56	N/A	N/A	N/A	N/A	N/A
	3	-49	N/A	N/A	N/A	N/A	N/A
	4	-42	N/A	N/A	N/A	N/A	N/A
	5	-56	N/A	N/A	N/A	N/A	N/A
	6	-42	N/A	N/A	N/A	N/A	N/A
	7	-35	N/A	N/A	N/A	N/A	N/A
	8	-35	N/A	N/A	N/A	N/A	N/A
	9	-42	N/A	N/A	N/A	N/A	N/A
	10	-27	N/A	N/A	N/A	N/A	N/A
-10	0	151	N/A	N/A	N/A	N/A	N/A
	1	137	N/A	N/A	N/A	N/A	N/A
	2	158	N/A	N/A	N/A	N/A	N/A
	3	151	N/A	N/A	N/A	N/A	N/A
	4	151	N/A	N/A	N/A	N/A	N/A
	5	144	N/A	N/A	N/A	N/A	N/A
	6	151	N/A	N/A	N/A	N/A	N/A
	7	144	N/A	N/A	N/A	N/A	N/A
	8	158	N/A	N/A	N/A	N/A	N/A
	9	151	N/A	N/A	N/A	N/A	N/A
	10	144	N/A	N/A	N/A	N/A	N/A
0	0	151	N/A	N/A	N/A	N/A	N/A
	1	165	N/A	N/A	N/A	N/A	N/A
	2	151	N/A	N/A	N/A	N/A	N/A
	3	158	N/A	N/A	N/A	N/A	N/A
	4	165	N/A	N/A	N/A	N/A	N/A
	5	151	N/A	N/A	N/A	N/A	N/A
	6	158	N/A	N/A	N/A	N/A	N/A
	7	165	N/A	N/A	N/A	N/A	N/A
	8	173	N/A	N/A	N/A	N/A	N/A
	9	158	N/A	N/A	N/A	N/A	N/A
	10	173	N/A	N/A	N/A	N/A	N/A

Continued..

# ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: [vhk.ultratech@sympatico.ca](mailto:vhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: TIL10FT  
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



AMBIENT TEMP. (°C)	KEYED-ON TIME (Minutes)	CENTRE FREQUENCY & RF POWER OUTPUT VARIATION					
		Supply Voltage (Nominal) 28 Volts dc		Supply Voltage (85% of Nominal) 23.8 Volts dc		Supply Voltage (115% of Nominal) 32.2 Volts dc	
		Hz	dB	Hz	dB	Hz	dB
+10	0	201	N/A	N/A	N/A	N/A	N/A
	1	187	N/A	N/A	N/A	N/A	N/A
	2	201	N/A	N/A	N/A	N/A	N/A
	3	208	N/A	N/A	N/A	N/A	N/A
	4	201	N/A	N/A	N/A	N/A	N/A
	5	194	N/A	N/A	N/A	N/A	N/A
	6	208	N/A	N/A	N/A	N/A	N/A
	7	201	N/A	N/A	N/A	N/A	N/A
	8	194	N/A	N/A	N/A	N/A	N/A
	9	187	N/A	N/A	N/A	N/A	N/A
	10	208	N/A	N/A	N/A	N/A	N/A
+25	0	0	0	134	-3.4	137	-0.9
	1	0	0	144	-3.4	137	-0.9
	2	0	0	151	-3.4	144	-0.9
	3	-17	0	137	-3.4	123	-0.9
	4	-5	0	144	-3.4	130	-0.9
	5	-8	0	151	-3.4	123	-0.9
	6	-5	0	144	-3.4	130	-0.9
	7	-8	0	151	-3.4	115	-0.9
	8	-11	0	144	-3.4	108	-0.9
	9	-5	0	158	-3.4	101	-0.9
	10	-8	0	151	-3.4	101	-0.9
+30	0	51	N/A	N/A	N/A	N/A	N/A
	1	43	N/A	N/A	N/A	N/A	N/A
	2	46	N/A	N/A	N/A	N/A	N/A
	3	51	N/A	N/A	N/A	N/A	N/A
	4	43	N/A	N/A	N/A	N/A	N/A
	5	46	N/A	N/A	N/A	N/A	N/A
	6	34	N/A	N/A	N/A	N/A	N/A
	7	31	N/A	N/A	N/A	N/A	N/A
	8	29	N/A	N/A	N/A	N/A	N/A
	9	37	N/A	N/A	N/A	N/A	N/A
	10	26	N/A	N/A	N/A	N/A	N/A

Continued..

# ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: TIL10FT  
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

AMBIENT TEMP. (°C)	KEYED-ON TIME (Minutes)	CENTRE FREQUENCY & RF POWER OUTPUT VARIATION					
		Supply Voltage (Nominal) 28 Volts dc		Supply Voltage (85% of Nominal) 23.8 Volts dc		Supply Voltage (115% of Nominal) 32.2 Volts dc	
		Hz	dB	Hz	dB	Hz	dB
+40	0	-29	N/A	N/A	N/A	N/A	N/A
	1	-34	N/A	N/A	N/A	N/A	N/A
	2	-40	N/A	N/A	N/A	N/A	N/A
	3	-40	N/A	N/A	N/A	N/A	N/A
	4	-31	N/A	N/A	N/A	N/A	N/A
	5	-43	N/A	N/A	N/A	N/A	N/A
	6	-57	N/A	N/A	N/A	N/A	N/A
	7	-49	N/A	N/A	N/A	N/A	N/A
	8	-43	N/A	N/A	N/A	N/A	N/A
	9	-51	N/A	N/A	N/A	N/A	N/A
	10	-63	N/A	N/A	N/A	N/A	N/A
+50	0	-180	N/A	N/A	N/A	N/A	N/A
	1	-186	N/A	N/A	N/A	N/A	N/A
	2	-180	N/A	N/A	N/A	N/A	N/A
	3	-194	N/A	N/A	N/A	N/A	N/A
	4	-197	N/A	N/A	N/A	N/A	N/A
	5	-200	N/A	N/A	N/A	N/A	N/A
	6	-197	N/A	N/A	N/A	N/A	N/A
	7	-211	N/A	N/A	N/A	N/A	N/A
	8	-217	N/A	N/A	N/A	N/A	N/A
	9	-211	N/A	N/A	N/A	N/A	N/A
	10	-217	N/A	N/A	N/A	N/A	N/A

# ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: TIL10FT

Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

<b>Product Name</b>	<b>VHF/UHF FM MOBILE TRANSCEIVER</b>
<b>Model No.</b>	<b>MODEL NO.: TFM-500</b>
<b>Centre Frequency</b>	406.125 MHz
<b>Full Power Level</b>	10 Watts
<b>Frequency Tolerance Limit</b>	1015 Hz or 0.00025% @ 406.125 MHz
<b>Max. Frequency Tolerance Measured</b>	842 Hz or 0.00021% @ 406.125 MHz
<b>Base/Mobile/Portable</b>	-30 to +50 degree C, 85% to 115%

		CENTRE FREQUENCY & RF POWER OUTPUT VARIATION					
AMBIENT TEMP. (°C)	KEYED-ON TIME (Minutes)	Supply Voltage (Nominal) 28 Volts dc		Supply Voltage (85% of Nominal) 23.8 Volts dc		Supply Voltage (115% of Nominal) 32.2 Volts dc	
		Hz	dB	Hz	dB	Hz	dB
-30	0	-834	N/A	N/A	N/A	N/A	N/A
	1	-832	N/A	N/A	N/A	N/A	N/A
	2	-834	N/A	N/A	N/A	N/A	N/A
	3	-827	N/A	N/A	N/A	N/A	N/A
	4	-820	N/A	N/A	N/A	N/A	N/A
	5	-834	N/A	N/A	N/A	N/A	N/A
	6	-842	N/A	N/A	N/A	N/A	N/A
	7	-842	N/A	N/A	N/A	N/A	N/A
	8	-834	N/A	N/A	N/A	N/A	N/A
	9	-827	N/A	N/A	N/A	N/A	N/A
	10	-842	N/A	N/A	N/A	N/A	N/A
-20	0	-499	N/A	N/A	N/A	N/A	N/A
	1	-492	N/A	N/A	N/A	N/A	N/A
	2	-482	N/A	N/A	N/A	N/A	N/A
	3	-484	N/A	N/A	N/A	N/A	N/A
	4	-499	N/A	N/A	N/A	N/A	N/A
	5	-477	N/A	N/A	N/A	N/A	N/A
	6	-470	N/A	N/A	N/A	N/A	N/A
	7	-463	N/A	N/A	N/A	N/A	N/A
	8	-463	N/A	N/A	N/A	N/A	N/A
	9	-442	N/A	N/A	N/A	N/A	N/A
	10	-442	N/A	N/A	N/A	N/A	N/A

Continued..

**ULTRATECH GROUP OF LABS**

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: [vhk.ultratech@sympatico.ca](mailto:vhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: TIL10FT

Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

AMBIENT TEMP. (°C)	KEYED-ON TIME (Minutes)	CENTRE FREQUENCY & RF POWER OUTPUT VARIATION					
		Supply Voltage (Nominal) Volts		Supply Voltage (85% of Nominal) Volts		Supply Voltage (115% of Nominal) Volts	
		Hz	dB	Hz	dB	Hz	dB
-10	0	15	N/A	N/A	N/A	N/A	N/A
	1	8	N/A	N/A	N/A	N/A	N/A
	2	15	N/A	N/A	N/A	N/A	N/A
	3	23	N/A	N/A	N/A	N/A	N/A
	4	-6	N/A	N/A	N/A	N/A	N/A
	5	30	N/A	N/A	N/A	N/A	N/A
	6	23	N/A	N/A	N/A	N/A	N/A
	7	30	N/A	N/A	N/A	N/A	N/A
	8	23	N/A	N/A	N/A	N/A	N/A
	9	30	N/A	N/A	N/A	N/A	N/A
	10	44	N/A	N/A	N/A	N/A	N/A
0	0	237	N/A	N/A	N/A	N/A	N/A
	1	244	N/A	N/A	N/A	N/A	N/A
	2	250	N/A	N/A	N/A	N/A	N/A
	3	244	N/A	N/A	N/A	N/A	N/A
	4	230	N/A	N/A	N/A	N/A	N/A
	5	230	N/A	N/A	N/A	N/A	N/A
	6	244	N/A	N/A	N/A	N/A	N/A
	7	237	N/A	N/A	N/A	N/A	N/A
	8	244	N/A	N/A	N/A	N/A	N/A
	9	230	N/A	N/A	N/A	N/A	N/A
	10	237	N/A	N/A	N/A	N/A	N/A
+10	0	237	N/A	N/A	N/A	N/A	N/A
	1	208	N/A	N/A	N/A	N/A	N/A
	2	215	N/A	N/A	N/A	N/A	N/A
	3	230	N/A	N/A	N/A	N/A	N/A
	4	208	N/A	N/A	N/A	N/A	N/A
	5	223	N/A	N/A	N/A	N/A	N/A
	6	230	N/A	N/A	N/A	N/A	N/A
	7	244	N/A	N/A	N/A	N/A	N/A
	8	251	N/A	N/A	N/A	N/A	N/A
	9	258	N/A	N/A	N/A	N/A	N/A
	10	244	N/A	N/A	N/A	N/A	N/A

Continued..

#### ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: [vhk.ultratech@sympatico.ca](mailto:vhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: TIL10FT  
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

AMBIENT TEMP. (°C)	KEYED-ON TIME (Minutes)	CENTRE FREQUENCY & RF POWER OUTPUT VARIATION					
		Supply Voltage (Nominal) 28 Volts dc		Supply Voltage (85% of Nominal) 23.8 Volts dc		Supply Voltage (115% of Nominal) 32.2 Volts dc	
		Hz	dB	Hz	dB	Hz	dB
+25	0	0	-0.2	-13	-0.8	273	-0.8
	1	-11	-0.2	-20	-0.8	265	-0.8
	2	-26	-0.3	8	-0.8	258	-0.8
	3	-34	-0.3	65	-0.8	265	-0.8
	4	-29	-0.3	80	-0.8	258	-0.8
	5	-37	-0.3	87	-0.8	265	-0.8
	6	-31	-0.3	94	-0.8	258	-0.8
	7	-37	-0.3	108	-0.8	251	-0.8
	8	-34	-0.3	123	-0.8	258	-0.8
	9	-40	-0.3	137	-0.8	251	-0.8
	10	-43	-0.3	144	-0.8	244	-0.8
+30	0	60	N/A	N/A	N/A	N/A	N/A
	1	57	N/A	N/A	N/A	N/A	N/A
	2	49	N/A	N/A	N/A	N/A	N/A
	3	46	N/A	N/A	N/A	N/A	N/A
	4	43	N/A	N/A	N/A	N/A	N/A
	5	37	N/A	N/A	N/A	N/A	N/A
	6	31	N/A	N/A	N/A	N/A	N/A
	7	26	N/A	N/A	N/A	N/A	N/A
	8	23	N/A	N/A	N/A	N/A	N/A
	9	17	N/A	N/A	N/A	N/A	N/A
	10	3	N/A	N/A	N/A	N/A	N/A
+40	0	-157	N/A	N/A	N/A	N/A	N/A
	1	-163	N/A	N/A	N/A	N/A	N/A
	2	-167	N/A	N/A	N/A	N/A	N/A
	3	-166	N/A	N/A	N/A	N/A	N/A
	4	-160	N/A	N/A	N/A	N/A	N/A
	5	-163	N/A	N/A	N/A	N/A	N/A
	6	-166	N/A	N/A	N/A	N/A	N/A
	7	-177	N/A	N/A	N/A	N/A	N/A
	8	-183	N/A	N/A	N/A	N/A	N/A
	9	-186	N/A	N/A	N/A	N/A	N/A
	10	-189	N/A	N/A	N/A	N/A	N/A

Continued..

# ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: TIL10FT  
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

AMBIENT TEMP. (°C)	KEYED-ON TIME (Minutes)	CENTRE FREQUENCY & RF POWER OUTPUT VARIATION					
		Supply Voltage (Nominal) 28 Volts dc		Supply Voltage (85% of Nominal) 23.8 Volts dc		Supply Voltage (115% of Nominal) 32.2 Volts dc	
		Hz	dB	Hz	dB	Hz	dB
+50	0	-369	N/A	N/A	N/A	N/A	N/A
	1	-377	N/A	N/A	N/A	N/A	N/A
	2	-371	N/A	N/A	N/A	N/A	N/A
	3	-380	N/A	N/A	N/A	N/A	N/A
	4	-403	N/A	N/A	N/A	N/A	N/A
	5	-409	N/A	N/A	N/A	N/A	N/A
	6	-414	N/A	N/A	N/A	N/A	N/A
	7	-423	N/A	N/A	N/A	N/A	N/A
	8	-426	N/A	N/A	N/A	N/A	N/A
	9	-431	N/A	N/A	N/A	N/A	N/A
	10	-443	N/A	N/A	N/A	N/A	N/A

# ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2

Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: TIL10FT

Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

### 4.3. AUDIO FREQUENCY RESPONSE @ FCC 2.987(A) & 90.242(B)(8)

**PRODUCT NAME:** VHF/UHF FM MOBILE TRANSCEIVER,  
Model No.: TFM-500

#### FCC REQUIREMENTS:

FCC Part 2, Sub. J, Para. 2.987(a) & 90.242(b)(8)

No longer required by FCC. However, FCC recommends the Audio Frequency Response to be tested to observe the roll-off curve at 3 kHz.

The attenuation of lowpass filter between the frequencies of 3 KHz and 20 KHz shall be greater than the attenuation at 1KHz by at least:  $60\text{Log}_{10}(f/3)$  decibels where "f" is the frequency in KHz. At frequency above 20 KHz, the attenuation shall be 50 dB greater than the attenuation at 1 KHz.

#### CLIMATE CONDITION:

Standard Temperature and Humidity:

- Ambient temperature: 21 °C
- Relative humidity: 43%

#### POWER INPUT:

28 Vdc.


#### TEST EQUIPMENT:

- Audio Oscillator, HP, Model 204C, OUT FREQ.: 0-1.2 MHz, S/N: 0989A08798
- FFT (Audio) Spectrum Analyzer, Advantest, Model R9211E, Input Impedance: 1M-Ohms, Freq. Range: 10 mHz - 100 kHz.

#### METHOD OF MEASUREMENTS:

The rated audio input signal was applied to the input of the audio lowpass filter (or of all modulation stages) using an audio oscillator, this input signal level and its corresponding output signal of audio lowpass filter (or of all modulation stages) were then measured and recorded using the FFT (Audio) spectrum analyzer. Tests were repeated at different audio signal frequencies from 0 to 50 kHz.

#### TEST ARRANGEMENT

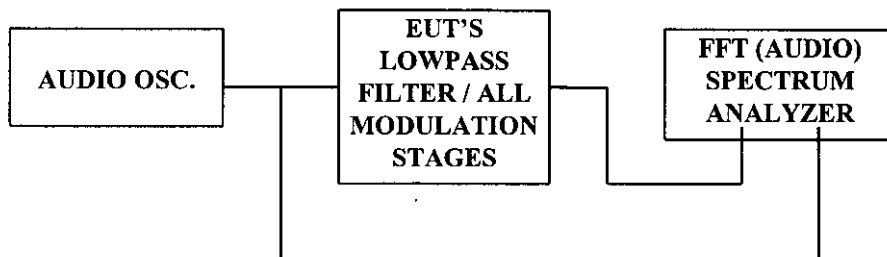

#### **ULTRATECH GROUP OF LABS**

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: [vhk.ultratech@sympatico.ca](mailto:vhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: TIL10FT  
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

**TEST RESULTS:** Conforms.

**TESTED PERSONNEL:** Hung Trinh, RFI Technician

**DATE:** January 20, 1999

**MEASUREMENT DATA**

**AUDIO FREQUENCY RESPONSE OF ALL MODULATION STATES**

Carrier Frequency: 138 MHz

Channel Spacing: 12.5 kHz

FREQUENCY (kHz)	AUDIO IN (dBV)	AUDIO OUT (dBV)	ATTEN. (OUT - IN) (dB)	ATTEN. Wrt. 1kHz (dB)	RSS-119, ISSUE 5, SEC. 6.6 TABLE 4 LIMIT (dB)	PASS/ FAIL
0.10	-16.0	<-50.0	<-34.0	<-35.0	0.0	NO LIMIT
0.20	-16.2	-57.0	-40.8	-41.8	0.0	NO LIMIT
0.40	-16.2	-50.0	-33.8	-34.8	0.0	NO LIMIT
0.60	-16.3	-47.0	-30.7	-31.7	0.0	NO LIMIT
0.80	-16.2	-44.5	-28.3	-29.3	0.0	NO LIMIT
1.00	-16.6	-42.9	-26.3	-27.3	0.0	NO LIMIT
2.00	-16.3	-37.5	-21.2	-22.2	0.0	NO LIMIT
3.00	-16.2	-37.2	-21.0	-22.0	0.0	NO LIMIT
3.50	-16.9	-38.6	-21.7	-22.7	-6.7	NO LIMIT
4.00	-16.2	-39.4	-23.2	-24.2	-12.5	NO LIMIT
4.50	-16.9	-42.1	-25.2	-26.2	-17.6	NO LIMIT
5.00	-16.9	-43.4	-26.5	-27.5	-22.2	NO LIMIT
6.00	-16.9	-46.8	-29.9	-30.9	-30.1	NO LIMIT
7.00	-16.5	-49.5	-33.0	-34.0	-36.8	NO LIMIT
8.00	-16.9	-52.9	-36.0	-37.0	-42.6	NO LIMIT
9.00	-16.3	-55.3	-39.0	-40.0	-47.7	NO LIMIT
10.00	-16.3	-57.8	-41.5	-42.5	-52.3	NO LIMIT
12.00	-16.6	-63.1	-46.5	-47.5	-60.2	NO LIMIT
14.00	-16.9	-100.0	-100.0	-100.0	-66.9	NO LIMIT
16.00	-16.9	-100.0	-100.0	-100.0	-72.7	NO LIMIT
18.00	-16.5	-100.0	-100.0	-100.0	-77.8	NO LIMIT
20.00	-16.5	-100.0	-100.0	-100.0	-82.4	NO LIMIT
25.00	-16.3	-100.0	-100.0	-100.0	-82.4	NO LIMIT
30.00	-16.7	-100.0	-100.0	-100.0	-82.4	NO LIMIT
35.00	-16.7	-100.0	-100.0	-100.0	-82.4	NO LIMIT
40.00	-16.6	-100.0	-100.0	-100.0	-82.4	NO LIMIT
45.00	-16.4	-100.0	-100.0	-100.0	-82.4	NO LIMIT
50.00	-16.9	-100.0	-100.0	-100.0	-82.4	NO LIMIT

**ULTRATECH GROUP OF LABS**


4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: TIL10FT  
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



**AUDIO FREQUENCY RESPONSE**  
(12.5 kHz Channel Spacing)  
**TECHNISONIC TFM-500 VHF TRANSCEIVER**  
Carrier Frequency: 138 MHz

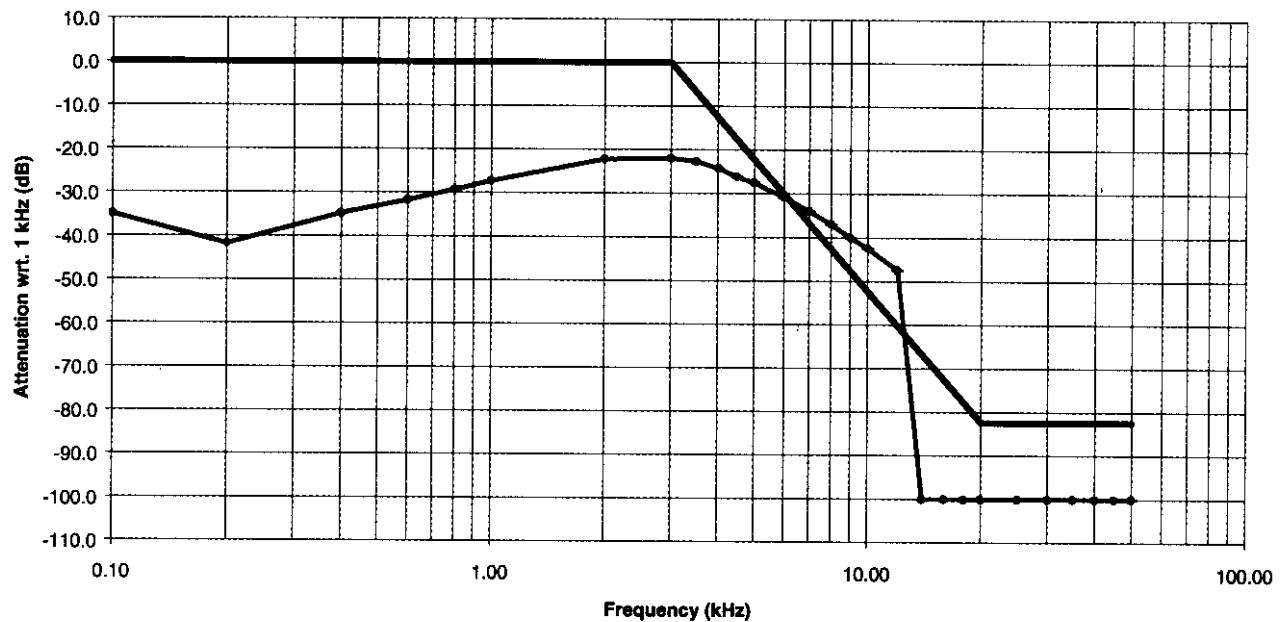

**ULTRATECH GROUP OF LABS**

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2

Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: TIL10FT

Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

**Carrier Frequency: 138 MHz**  
**Channel Spacing: 25 kHz**

FREQUENCY (kHz)	AUDIO IN (dBV)	AUDIO OUT (dBV)	ATTEN. (OUT - IN) (dB)	ATTEN. Wrt. 1kHz (dB)	RSS-119, ISSUE 5, SEC. 6.6 TABLE 3 LIMIT (dB)	PASS/ FAIL
0.10	-13.1	-18.0	-4.9	-5.9	0.0	NO LIMIT
0.20	-13.3	-8.5	4.8	3.8	0.0	NO LIMIT
0.40	-13.3	-1.9	11.4	10.4	0.0	NO LIMIT
0.60	-13.3	1.6	14.9	13.9	0.0	NO LIMIT
0.80	-13.5	3.9	17.4	16.4	0.0	NO LIMIT
1.00	-13.5	5.9	19.4	18.4	0.0	NO LIMIT
2.00	-13.6	9.3	22.9	21.9	0.0	NO LIMIT
3.00	-13.8	8.5	22.3	21.3	0.0	NO LIMIT
3.50	-13.3	8.2	21.5	20.5	-2.7	NO LIMIT
4.00	-13.4	6.8	20.2	19.2	-5.0	NO LIMIT
4.50	-13.5	5.0	18.5	17.5	-7.0	NO LIMIT
5.00	-13.5	3.1	16.6	15.6	-8.9	NO LIMIT
6.00	-13.4	-0.1	13.3	12.3	-12.0	NO LIMIT
7.00	-13.4	-2.8	10.6	9.6	-14.7	NO LIMIT
8.00	-14.0	-5.9	8.1	7.1	-17.0	NO LIMIT
9.00	-13.3	-7.8	5.5	4.5	-19.1	NO LIMIT
10.00	-13.3	-9.9	3.4	2.4	-20.9	NO LIMIT
12.00	-13.5	-14.6	-1.1	-2.1	-24.1	NO LIMIT
14.00	-13.4	-19.3	-5.9	-6.9	-26.8	NO LIMIT
16.00	-13.4	-23.5	-10.1	-11.1	-28.0	NO LIMIT
18.00	-14.1	-28.1	-14.0	-15.0	-28.0	NO LIMIT
20.00	-13.8	-27.5	-13.7	-14.7	-28.0	NO LIMIT
25.00	-13.4	-37.8	-24.4	-25.4	-28.0	NO LIMIT
30.00	-13.6	-43.0	-29.4	-30.4	-28.0	NO LIMIT
35.00	-13.4	-100.0	-100.0	-100.0	-28.0	NO LIMIT
40.00	-13.7	-100.0	-100.0	-100.0	-28.0	NO LIMIT
45.00	-13.5	-100.0	-100.0	-100.0	-28.0	NO LIMIT
50.00	-13.5	-100.0	-100.0	-100.0	-28.0	NO LIMIT

**ULTRATECH GROUP OF LABS**

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2


Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: TIL10FT

Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

AUDIO FREQUENCY REPSONSE  
(25 kHz Channel Spacing)  
TECHNISONIC TFM-500 VHF TRANSCEIVER  
Carrier Frequency: 138 MHz

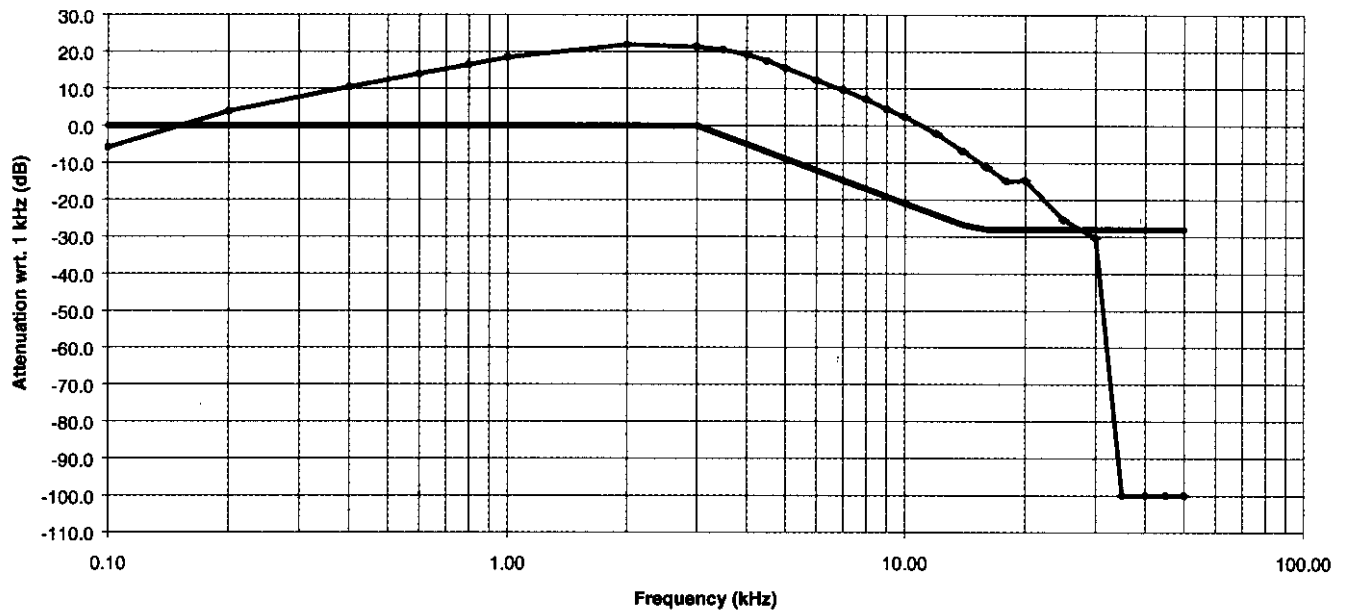

ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: [vhk@ultratech.com](mailto:vhk@ultratech.com), Website: <http://www.ultratech-labs.com>

File #: TIL10FT  
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## Carrier Frequency: 406.125 MHz

## Channel Spacing: 12.5 kHz

FREQUENCY (kHz)	AUDIO IN (dBV)	AUDIO OUT (dBV)	ATTEN. (OUT - IN) (dB)	ATTEN. Wrt. 1kHz (dB)	RSS-119, ISSUE 5, SEC. 6.6 TABLE 4 LIMIT (dB)	PASS/ FAIL
0.10	-18.1	<-50.0	<-31.9	<-32.9	0.0	NO LIMIT
0.20	-18.1	<-50.0	<-31.9	<-32.9	0.0	NO LIMIT
0.40	-18.3	-63.2	-44.9	-45.9	0.0	NO LIMIT
0.60	-18.4	-59.5	-41.1	-42.1	0.0	NO LIMIT
0.80	-18.3	-56.8	-38.5	-39.5	0.0	NO LIMIT
1.00	-18.5	-55.3	-36.8	-37.8	0.0	NO LIMIT
2.00	-18.9	-49.9	-31.0	-32.0	0.0	NO LIMIT
3.00	-18.8	-48.9	-30.1	-31.1	0.0	NO LIMIT
3.50	-18.5	-49.5	-31.0	-32.0	-6.7	NO LIMIT
4.00	-18.7	-51.4	-32.7	-33.7	-12.5	NO LIMIT
4.50	-18.5	-53.3	-34.8	-35.8	-17.6	NO LIMIT
5.00	-19.1	-55.5	-36.4	-37.4	-22.2	NO LIMIT
6.00	-19.0	-59.0	-40.0	-41.0	-30.1	NO LIMIT
7.00	-18.4	-61.7	-43.3	-44.3	-36.8	NO LIMIT
8.00	-18.9	-65.5	-46.6	-47.6	-42.6	NO LIMIT
9.00	-18.6	-68.4	-49.8	-50.8	-47.7	NO LIMIT
10.00	-18.9	-50.1	-31.2	-32.2	-52.3	NO LIMIT
12.00	-18.5	-54.1	-35.6	-36.6	-60.2	NO LIMIT
14.00	-18.4	-58.0	-39.6	-40.6	-66.9	NO LIMIT
16.00	-18.9	-100.0	-100.0	-100.0	-72.7	NO LIMIT
18.00	-19.0	-100.0	-100.0	-100.0	-77.8	NO LIMIT
20.00	-18.5	-100.0	-100.0	-100.0	-82.4	NO LIMIT
25.00	-18.8	-100.0	-100.0	-100.0	-82.4	NO LIMIT
30.00	-18.6	-100.0	-100.0	-100.0	-82.4	NO LIMIT
35.00	-18.8	-100.0	-100.0	-100.0	-82.4	NO LIMIT
40.00	-18.8	-100.0	-100.0	-100.0	-82.4	NO LIMIT
45.00	-19.2	-100.0	-100.0	-100.0	-82.4	NO LIMIT
50.00	-20.2	-100.0	-100.0	-100.0	-82.4	NO LIMIT

## ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2


Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: [vhk.ultratech@sympatico.ca](mailto:vhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: TIL10FT

Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

AUDIO FREQUENCY REPSONSE  
(12.5 kHz Channel Spacing)  
TECHNISONIC TFM-500 VHF TRANSCEIVER  
Carrier Frequency: 406.125 MHz

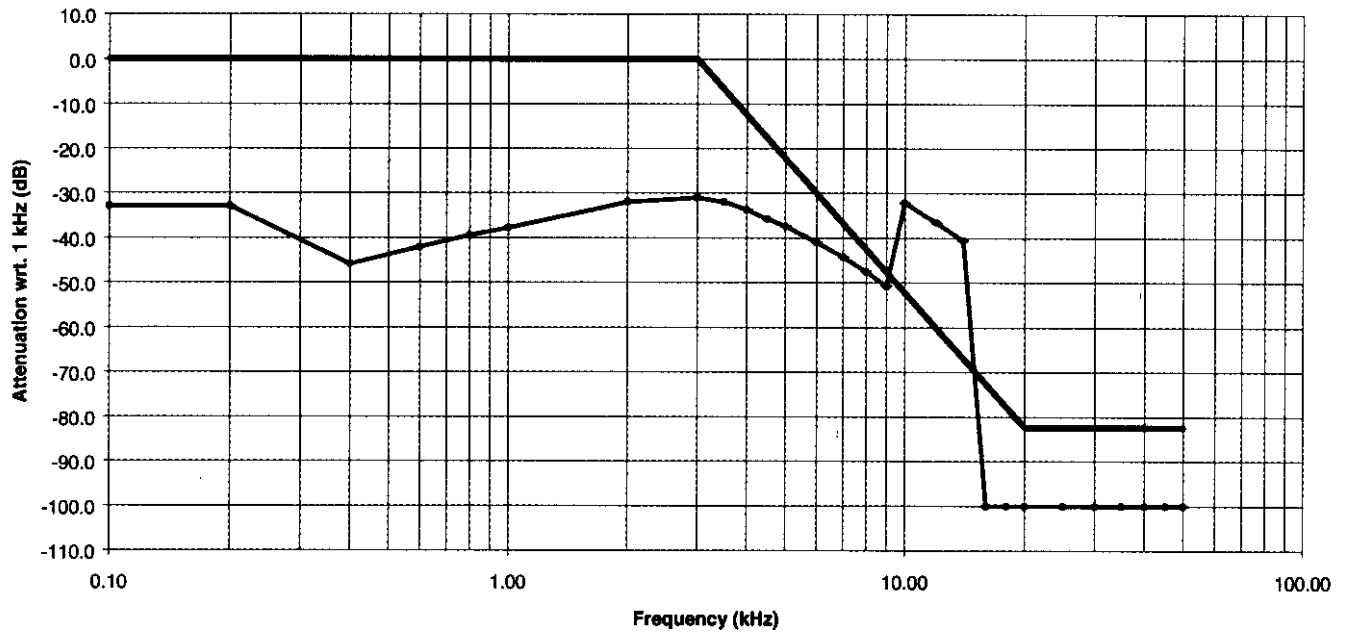

ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: [vhk.ultratech@sympatico.ca](mailto:vhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: TIL10FT  
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

**Carrier Frequency: 406.125 MHz**  
**Channel Spacing: 25 kHz**

FREQUENCY (kHz)	AUDIO IN (dBV)	AUDIO OUT (dBV)	ATTEN. (OUT - IN) (dB)	ATTEN. Wrt. 1 kHz (dB)	RSS-119, ISSUE 5, SEC. 6.6 TABLE 3 LIMIT (dB)	PASS/ FAIL
0.10	-13.1	-54.4	-41.3	-42.3	0.0	NO LIMIT
0.20	-13.2	-39.9	-26.7	-27.7	0.0	NO LIMIT
0.40	-13.3	-30.6	-17.3	-18.3	0.0	NO LIMIT
0.60	-13.3	1.3	14.6	13.6	0.0	NO LIMIT
0.80	-13.3	3.7	17.0	16.0	0.0	NO LIMIT
1.00	-13.5	5.7	19.2	18.2	0.0	NO LIMIT
2.00	-13.3	8.8	22.1	21.1	0.0	NO LIMIT
3.00	-13.3	8.4	21.7	20.7	0.0	NO LIMIT
3.50	-13.4	7.4	20.8	19.8	-4.0	NO LIMIT
4.00	-13.3	6.0	19.3	18.3	-7.5	NO LIMIT
4.50	-13.4	4.3	17.7	16.7	-10.6	NO LIMIT
5.00	-13.3	2.3	15.6	14.6	-13.3	NO LIMIT
6.00	-13.3	-0.9	12.4	11.4	-18.1	NO LIMIT
7.00	-13.7	-4.1	9.6	8.6	-22.1	NO LIMIT
8.00	-13.5	-6.6	6.9	5.9	-25.6	NO LIMIT
9.00	-13.3	-8.9	4.4	3.4	-28.6	NO LIMIT
10.00	-13.3	-11.6	1.7	0.7	-31.4	NO LIMIT
12.00	-13.5	-15.6	-2.1	-3.1	-36.1	NO LIMIT
14.00	-13.5	-20.1	-6.6	-7.6	-40.1	NO LIMIT
16.00	-13.3	-24.1	-10.8	-11.8	-43.6	NO LIMIT
18.00	-13.5	-28.1	-14.6	-15.6	-46.7	NO LIMIT
20.00	-13.7	-30.3	-16.6	-17.6	-49.4	NO LIMIT
25.00	-13.9	-100.0	-100.0	-100.0	-50.0	NO LIMIT
30.00	-14.1	-100.0	-100.0	-100.0	-50.0	NO LIMIT
35.00	-13.4	-100.0	-100.0	-100.0	-50.0	NO LIMIT
40.00	-13.4	-100.0	-100.0	-100.0	-50.0	NO LIMIT
45.00	-14.2	-100.0	-100.0	-100.0	-50.0	NO LIMIT
50.00	-13.6	-100.0	-100.0	-100.0	-50.0	NO LIMIT

**ULTRATECH GROUP OF LABS**

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2


Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: [vhk.ultratech@sympatico.ca](mailto:vhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: TIL10FT

Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

**AUDIO FREQUENCY RESPONSE**  
(25 kHz Channel Spacing)  
**TECHNISONIC TFM-500 VHF TRANSCEIVER**  
Carrier Frequency: 406.125 MHz

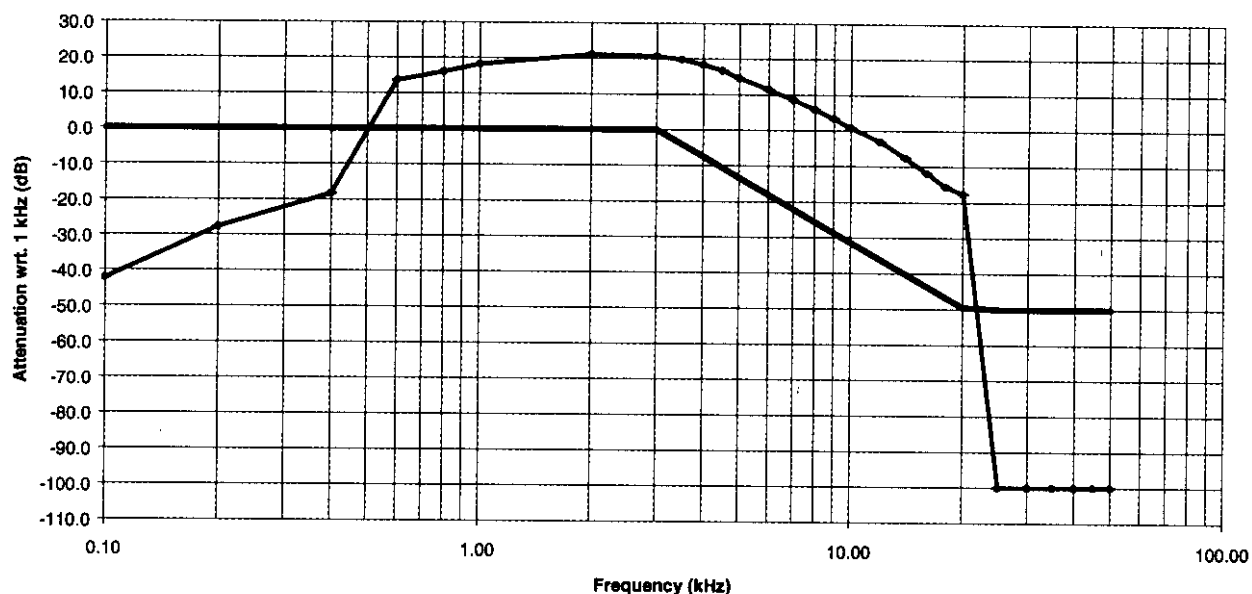

**ULTRATECH GROUP OF LABS**

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2

Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: [vhk.ultratech@sympatico.ca](mailto:vhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: TIL10FT  
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

#### 4.4. MODULATION LIMITING @ FCC 90.210

**PRODUCT NAME:** VHF/UHF FM MOBILE TRANSCEIVER,  
Model No.: TFM-500

##### FCC REQUIREMENTS:

FCC Part 2, Sub. J, Para. 2.987(b) & FCC Part 90, Subpart I, Para. 90.210

The EUT shall be installed with a modulation limiter which limits the deviation of the FM carrier less than manufacturer's setting provided that the rf output spectrum must meet the required MASK (recommended: 1.25 kHz for 6.25 kHz Channel Spacing System, 2.5 kHz for 12.5 kHz and 25 kHz Channel Spacing, and 5 kHz for 25 kHz Channel Spacing System).

##### CLIMATE CONDITION:

Standard Temperature and Humidity:

- Ambient temperature: 21 °C
- Relative humidity: 43%

##### POWER INPUT:

28 Vdc.

##### TEST EQUIPMENT:


- Communication Analyzer, Rohde & Schawrz, Model SMFO2, S/N: 879988/057, 0.4 - 1000 MHz including AF & RF Signal Generators, SINAD, DISTORTION, DEVIATION meters and etc...

##### METHOD OF MEASUREMENTS:

**For Audio Transmitter:-** The carrier frequency deviation was measured with the tone input signal level varied from 0 Vp to audio input rating level plus 16 dB at frequencies 0.1, 0.5, 1.0, 3.0 and 5.0 kHz. The maximum deviation was recorded at each test condition.

**For Data Transmitter with Maximum Frequency Deviation set by Factory:-** The EUT was set at maximum frequency deviation, and its peak frequency deviation was then measured using EUT's internal random data source.

##### TEST ARRANGEMENT

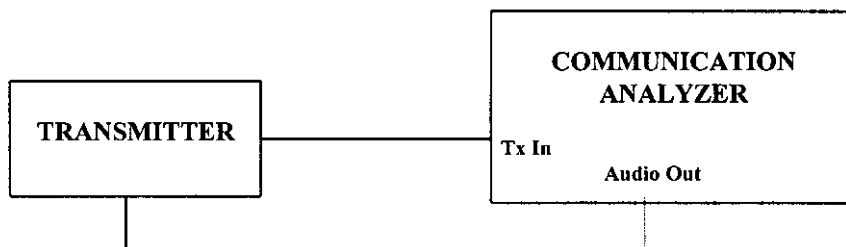

##### ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: [vhk.ultratech@sympatico.ca](mailto:vhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: TIL10FT  
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



**TEST RESULTS:** Conforms.

**TESTED PERSONNEL:** Hung Trinh, RFI Technician

**DATE:** January 19, 1999

**MEASUREMENT DATA**

**MODULATION LIMITING FOR AN AUDIO TRANSMITTER**

Carrier Frequency: 138 MHz

Channel Spacing: 12.5 kHz

MODULATING SIGNAL LEVEL (Vrms)	PEAK FREQUENCY DEVIATION (kHz) at the following modulating frequency:					SUGGESTED LIMIT (KHz)
	0.1 KHz	0.5 KHz	1.0 KHz	3.0 KHz	5.0 KHz	
0.01	0.1	0.1	0.2	0.3	0.2	2.5
0.02	0.1	0.2	0.2	0.4	0.2	2.5
0.04	0.1	0.2	0.3	0.7	0.4	2.5
0.06	0.1	0.3	0.5	0.9	0.5	2.5
0.08	0.2	0.3	0.6	1.2	0.7	2.5
0.10	0.2	0.4	0.7	1.5	0.8	2.5
0.20	0.2	0.7	1.4	1.7	1.1	2.5
0.30	0.2	1.0	1.7	1.7	1.1	2.5
0.40	0.2	1.4	1.8	1.7	1.1	2.5
0.50	0.3	1.7	1.8	1.7	1.1	2.5
0.60	0.4	1.8	1.8	1.8	1.1	2.5
0.70	0.4	1.8	1.8	1.8	1.1	2.5
0.80	0.5	1.8	1.8	1.8	1.2	2.5
0.90	0.6	1.8	1.8	1.8	1.2	2.5
1.00	0.7	1.8	1.8	1.8	1.2	2.5
1.20	0.9	1.8	1.9	1.8	1.2	2.5

**ULTRATECH GROUP OF LABS**

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: [vhk.ultratech@sympatico.ca](mailto:vhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: TIL10FT  
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Carrier Frequency: 138 MHz  
Channel Spacing: 12.5 kHz

MODULATING FREQUENCY (KHz)	PEAK FREQUENCY DEVIATION (KHz)	SUGGESTED LIMIT (KHz)
0.1	0.2	2.5
0.2	0.3	2.5
0.4	0.6	2.5
0.6	0.8	2.5
0.8	1.1	2.5
1.0	1.3	2.5
1.2	1.6	2.5
1.4	1.7	2.5
1.6	1.8	2.5
1.8	1.8	2.5
2.0	1.8	2.5
2.5	1.8	2.5
3.0	1.8	2.5
3.5	1.7	2.5
4.0	1.6	2.5
4.5	1.3	2.5
5.0	1.1	2.5
6.0	0.7	2.5
7.0	0.6	2.5
8.0	0.4	2.5
9.0	0.4	2.5
10.0	0.3	2.5

# ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: [vhk.ultratech@sympatico.ca](mailto:vhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: TIL10FT  
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Carrier Frequency: 138 MHz  
Channel Spacing: 25 kHz

MODULATING SIGNAL LEVEL (Vrms)	PEAK FREQUENCY DEVIATION (kHz) at the following modulating frequency:					MAXIMUM LIMIT (KHz)
	0.1 KHz	0.5 KHz	1.0 KHz	3.0 KHz	5.0 KHz	
0.01	0.1	0.2	0.2	0.4	0.3	5.0
0.02	0.1	0.2	0.4	0.7	0.4	5.0
0.04	0.1	0.4	0.6	1.3	0.7	5.0
0.06	0.2	0.5	0.9	1.9	1.0	5.0
0.08	0.2	0.6	1.2	2.5	1.3	5.0
0.10	0.2	0.8	1.5	3.1	1.6	5.0
0.20	0.3	1.4	2.9	3.7	2.2	5.0
0.30	0.3	2.1	3.7	3.7	2.3	5.0
0.40	0.4	2.9	3.8	3.7	2.3	5.0
0.50	0.5	3.7	3.8	3.7	2.3	5.0
0.60	0.7	3.8	3.8	3.7	2.4	5.0
0.70	0.9	3.8	3.8	3.7	2.4	5.0
0.80	1.0	3.8	3.9	3.7	2.4	5.0
0.90	1.2	3.8	3.9	3.8	2.4	5.0
1.00	1.4	3.8	3.9	3.8	2.4	5.0
1.20	1.8	3.8	3.9	3.8	2.4	5.0

# ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: TIL10FT  
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Carrier Frequency: 138 MHz

Channel Spacing: 25 kHz

MODULATING FREQUENCY (KHz)	PEAK FREQUENCY DEVIATION (KHz)	MAXIMUM LIMIT (KHz)
0.1	0.3	5.0
0.2	0.6	5.0
0.4	1.2	5.0
0.6	1.7	5.0
0.8	2.3	5.0
1.0	2.8	5.0
1.2	3.4	5.0
1.4	3.7	5.0
1.6	3.7	5.0
1.8	3.7	5.0
2.0	3.7	5.0
2.5	3.8	5.0
3.0	3.7	5.0
3.5	3.6	5.0
4.0	3.3	5.0
4.5	2.7	5.0
5.0	2.2	5.0
6.0	1.5	5.0
7.0	1.1	5.0
8.0	0.8	5.0
9.0	0.6	5.0
10.0	0.6	5.0

#### ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2

Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: [vhk.ultratech@sympatico.ca](mailto:vhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: TIL10FT

Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Carrier Frequency: 406.125 MHz  
Channel Spacing: 12.5 kHz

MODULATING SIGNAL LEVEL (Vrms)	PEAK FREQUENCY DEVIATION (kHz) at the following modulating frequency:					MAXIMUM LIMIT (KHz)
	0.1 KHz	0.5 KHz	1.0 KHz	3.0 KHz	5.0 KHz	
0.01	0.3	0.4	0.4	0.4	0.4	2.5
0.02	0.3	0.4	0.4	0.6	0.4	2.5
0.04	0.3	0.4	0.5	0.8	0.5	2.5
0.06	0.4	0.5	0.6	1.0	0.7	2.5
0.08	0.4	0.5	0.8	1.3	0.8	2.5
0.10	0.4	0.6	0.9	1.6	0.9	2.5
0.20	0.4	0.9	1.5	1.8	1.1	2.5
0.30	0.4	1.2	1.8	1.8	1.2	2.5
0.40	0.4	1.5	1.9	1.8	1.2	2.5
0.50	0.5	1.8	1.9	1.8	1.2	2.5
0.60	0.5	1.9	1.9	1.8	1.2	2.5
0.70	0.6	1.9	1.9	1.9	1.2	2.5
0.80	0.7	1.9	1.9	1.9	1.2	2.5
0.90	0.7	1.9	1.9	1.9	1.2	2.5
1.00	0.8	1.9	1.9	1.9	1.2	2.5
1.20	1.0	1.9	1.9	1.9	1.2	2.5

# ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: TIL10FT  
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Carrier Frequency: 406.125 MHz

Channel Spacing: 12.5 kHz

MODULATING FREQUENCY (KHz)	PEAK FREQUENCY DEVIATION (KHz)	MAXIMUM LIMIT (KHz)
0.1	0.4	2.5
0.2	0.5	2.5
0.4	0.8	2.5
0.6	1.0	2.5
0.8	1.3	2.5
1.0	1.5	2.5
1.2	1.8	2.5
1.4	1.8	2.5
1.6	1.9	2.5
1.8	1.9	2.5
2.0	1.9	2.5
2.5	1.9	2.5
3.0	1.8	2.5
3.5	1.8	2.5
4.0	1.6	2.5
4.5	1.3	2.5
5.0	1.1	2.5
6.0	0.8	2.5
7.0	0.6	2.5
8.0	0.6	2.5
9.0	0.5	2.5
10.0	0.5	2.5

**ULTRATECH GROUP OF LABS**

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2

Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: [vhk.ultratech@sympatico.ca](mailto:vhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: TIL10FT

Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Carrier Frequency: 406.125 MHz

Channel Spacing: 25 kHz

MODULATING SIGNAL LEVEL (Vrms)	PEAK FREQUENCY DEVIATION (kHz) at the following modulating frequency:					MAXIMUM LIMIT (KHz)
	0.1 KHz	0.5 KHz	1.0 KHz	3.0 KHz	5.0 KHz	
0.01	0.3	0.4	0.4	0.6	0.4	5.0
0.02	0.3	0.4	0.5	0.9	0.6	5.0
0.04	0.3	0.5	0.8	1.5	0.8	5.0
0.06	0.4	0.6	1.0	2.0	1.1	5.0
0.08	0.4	0.8	1.3	2.6	1.4	5.0
0.10	0.4	0.9	1.6	3.2	1.6	5.0
0.20	0.4	1.6	2.9	3.5	2.1	5.0
0.30	0.5	2.2	3.5	3.5	2.2	5.0
0.40	0.6	3.1	3.6	3.5	2.2	5.0
0.50	0.7	3.5	3.6	3.5	2.2	5.0
0.60	0.8	3.6	3.7	3.5	2.2	5.0
0.70	1.0	3.6	3.7	3.6	2.2	5.0
0.80	1.2	3.6	3.7	3.6	2.2	5.0
0.90	1.3	3.6	3.7	3.6	2.2	5.0
1.00	1.6	3.6	3.7	3.6	2.2	5.0
1.20	1.9	3.6	3.8	3.6	2.2	5.0

**ULTRATECH GROUP OF LABS**

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: TIL10FT

Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Carrier Frequency: 406.125 MHz

Channel Spacing: 25 kHz

MODULATING FREQUENCY (KHz)	PEAK FREQUENCY DEVIATION (KHz)	MAXIMUM LIMIT (KHz)
0.1	0.4	5.0
0.2	0.7	5.0
0.4	1.3	5.0
0.6	1.8	5.0
0.8	2.4	5.0
1.0	2.9	5.0
1.2	3.4	5.0
1.4	3.5	5.0
1.6	3.6	5.0
1.8	3.6	5.0
2.0	3.6	5.0
2.5	3.6	5.0
3.0	3.5	5.0
3.5	3.5	5.0
4.0	3.1	5.0
4.5	2.6	5.0
5.0	2.1	5.0
6.0	1.5	5.0
7.0	1.1	5.0
8.0	0.9	5.0
9.0	0.8	5.0
10.0	0.7	5.0

#### ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2

Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: TIL10FT

Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



## 4.5. EMISSION MASKS @ FCC 90.210

**PRODUCT NAME:** VHF/UHF FM MOBILE TRANSCEIVER,  
Model No.: TFM-500

### FCC REQUIREMENTS:

FCC Part 90, Sub. I, Para. 90.210

Emissions shall be attenuated below the mean output power of the transmitter as follows:

FREQUENCY RANGE (MHz)	Recommended OBW (KHz)	CHANNEL SPACING (KHz)	Recommended FREQ. DEVIATION (KHz)	FCC APPLICABLE MASK
150-174 / 403-512	20	25.0	5.0	90.210(b): Mask B – Audio & Voice
150-174 / 403-512	10	12.5	2.5	90.210(d): Mask D – Audio & Voice

FCC RULES	FREQUENCY RANGE	ATTENUATION LIMIT (dBc)
90.210(d): Mask D – Voice	> Fc – 5.625 kHz - < FC + 5.625 kHz Fc ± 5.625 kHz - Fc ± 12.5 kHz > Fc – 12.5 kHz - < Fc + 12.5 kHz	0 7.27(f <sub>d</sub> -2.88 kHz) 50 + 10log <sub>10</sub> (P) or 70 dB whichever is less.

### CLIMATE CONDITION:

Standard Temperature and Humidity:

- Ambient temperature: 21 °C
- Relative humidity: 43%

### POWER INPUT:

28 Vdc.

### TEST EQUIPMENT:

- Advantest Spectrum Analyzer, Model R3271, S/N: 15050203
- Bird Attenuator, 50 Ohm IN/OUT
- Audio Oscillator, HP, Model 204C, SN: 0989A08798, Output: 0-1.2 MHz, 5 Vrms.

### ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: [vhk.ultratech@sympatico.ca](mailto:vhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: TIL10FT  
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

### **METHOD OF MEASUREMENTS:**


#### **FCC CFR 47, Para. 2.989 - Out-of-Band Emissions:**

The Emission Masks was measured with the Spectrum Analyzer controls set as shown on the test results (RBW  $\geq$  300 Hz, VBW  $\geq$  300 Hz and SWEEP TIME = AUTO). The transmitter was operated at a full rated power output, and modulated as follows:

**Voice or Digital Modulation Through a Voice Input Port @ 2.989(c)(1):**- The transmitter was modulated by a 2.5 KHz tone signal at an input level 16 dB greater than that required to produce 50% modulation (e.g.:  $\pm 2.5$  KHz peak deviation at 1 KHz modulating frequency). The input level was established at the frequency of maximum response of the audio modulating circuit.

**Digital Modulation Through a Data Input Port @ 2.989(h):**- Transmitters employing digital modulation techniques - when modulated by an input signal such that its amplitude and symbol rate represent the maximum rated conditions under which the equipment will be operated. The signal shall be applied through any filter networks, pseudo-random generators or other devices required in normal service. Additionally, the Emission Masks shall be shown for operation with any devices used for modifying the spectrum when such devices are operational at the discretion of the user.

### **TEST ARRANGEMENT**



**TEST RESULTS:** Conforms.

**TESTED PERSONNEL:** Hung Trinh, RFI Technician

**DATE:** January 12 & 20 1999

### **MEASUREMENT DATA**

*Please see attached plots for detailed measurements.*

### **ULTRATECH GROUP OF LABS**

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: [vhk.ultratech@sympatico.ca](mailto:vhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: TIL10FT  
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



TECHNISONIC INDUSTRIES LTD.

VHF/UHF AIRBORNE TRANSCIVER, MODEL TFM-500

Frequency: 138 MHz, Power Rating: 100 W, Channel Spacing: 25 kHz

Modulation: FM modulation with 2.5 kHz Sine Wave Signal

Date: Jan. 24, 1999  
Tested by: Hung Trinh

hp

09: 11: 24 JAN 16, 1995

ACTV DET: PEAK

No user

MEAS DET: PEAK QP AVG

Menu

MKR 138.0000 MHz

39.04 dBm

REF OFFST 30.0 dB

REF 40.0 dBm

MASK B


LOG

10

dB/

ATN

20 dB

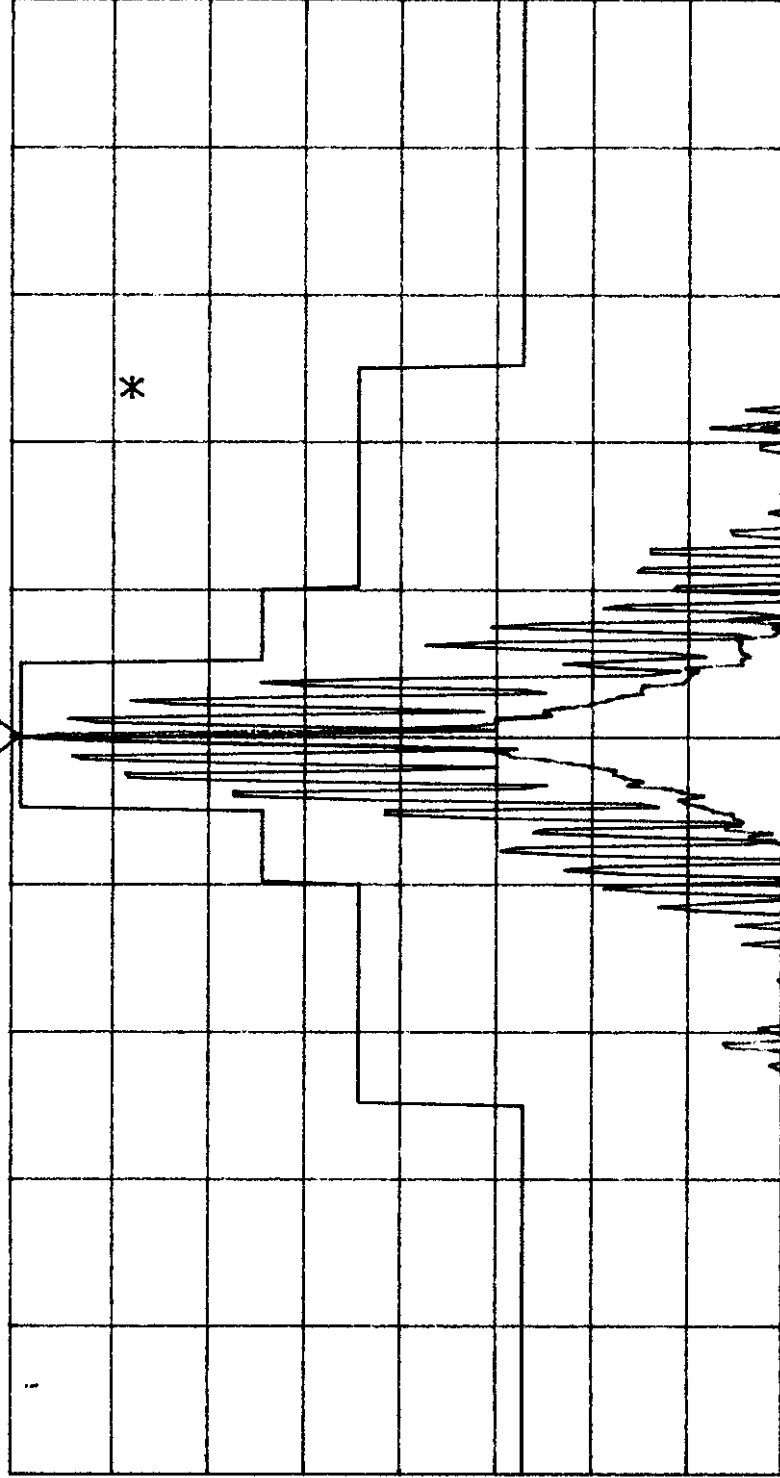

VA VB

SC FC

CORR

CENTER 138.0000 MHz

SPAN 200.0 kHz

#IF BW 300 Hz

AVG BW 300 Hz

SWP 6.67

sec



UltraTech  
Engineering Labs Inc.

TECHNISONIC INDUSTRIES LTD.

VHF/UHF AIRBORNE TRANSCEIVER, MODEL TFM-500

Frequency: 150 MHz, Power Rating: 10.0 W, Channel Spacing: 25 kHz  
Modulation: FM modulation with 2.5 kHz Sine Wave Signal

Date: Jan. 14, 1999  
Tested by: Hung Trinh

hp

09: 11: 24 JAN 16. 1995

ACTV DET: PEAK

No user

MEAS DET: PEAK QP AVG

Menu


MKR 150.0000 MHz

38.84 dBm

REF OFFST 30.0 dB MASK B

REF 40.0 dBm

LOG  
10  
dB/  
ATN  
20 dB

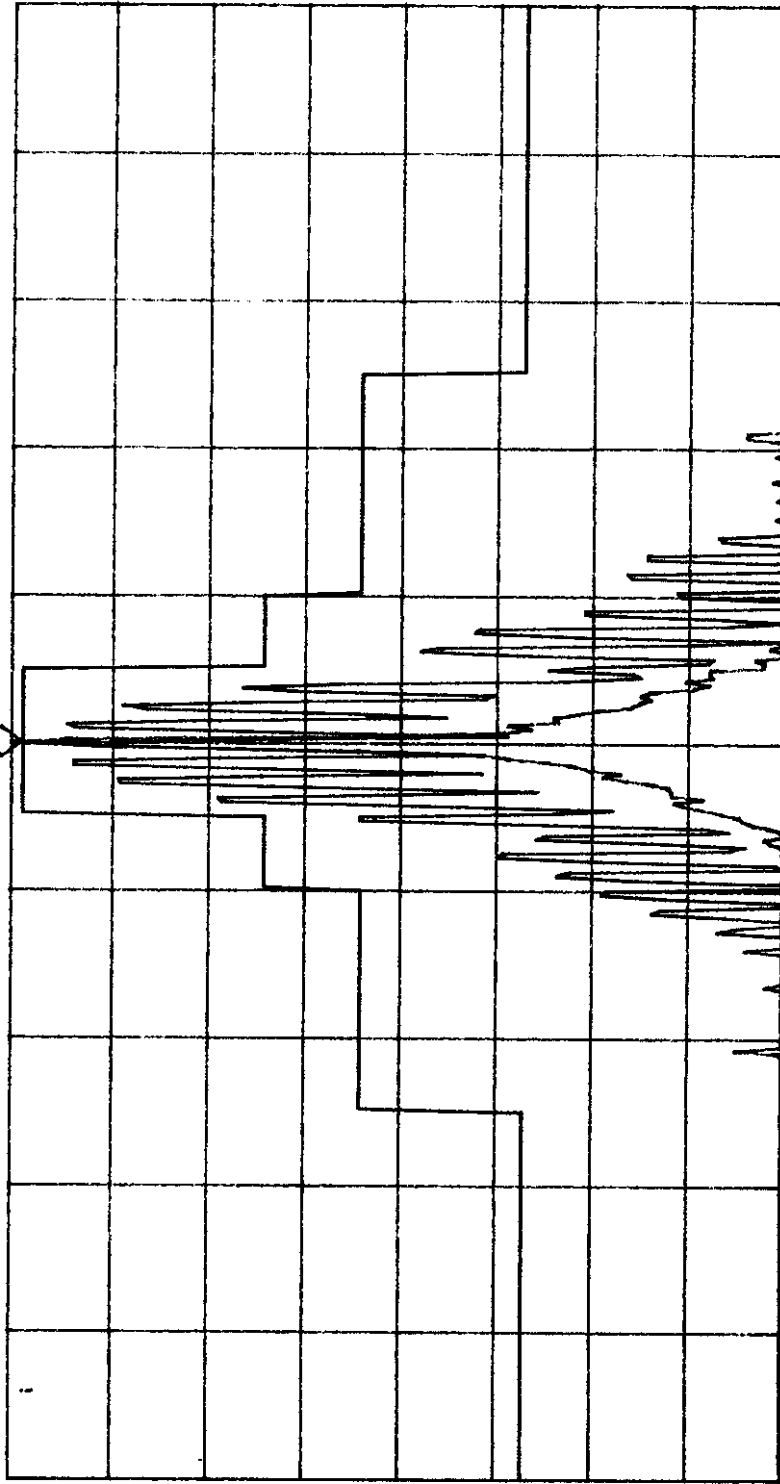

CENTER 150.0000 MHz

#IF BW 300 Hz

AVG BW 300 Hz

SPAN 200.0 kHz

SWP 6.67 sec



**UltraTech**  
Engineering Labs Inc.

**TECHNISONIC INDUSTRIES LTD.**

VHF/UHF AIRBORNE TRANSCEIVER, MODEL TFM-500

Frequency: 174 MHz, Power Rating: 10.0 W, Channel Spacing: 25 kHz

Modulation: FM modulation with 2.5 kHz Sine Wave Signal

Date: Jan. 14, 1999  
Tested by: Hung Trinh

*hp*

SPAN

200.0 kHz

ACTV DET: PEAK

No user

MEAS DET: PEAK QP AVG

Menu

MKR 174.0000 MHz

39.13 dBm

REF OFFST 30.0 dB

REF 40.3 dBm

MASK B

LOG

10

dB/


ATN

30 dB

VA VB

SC FC

CORR

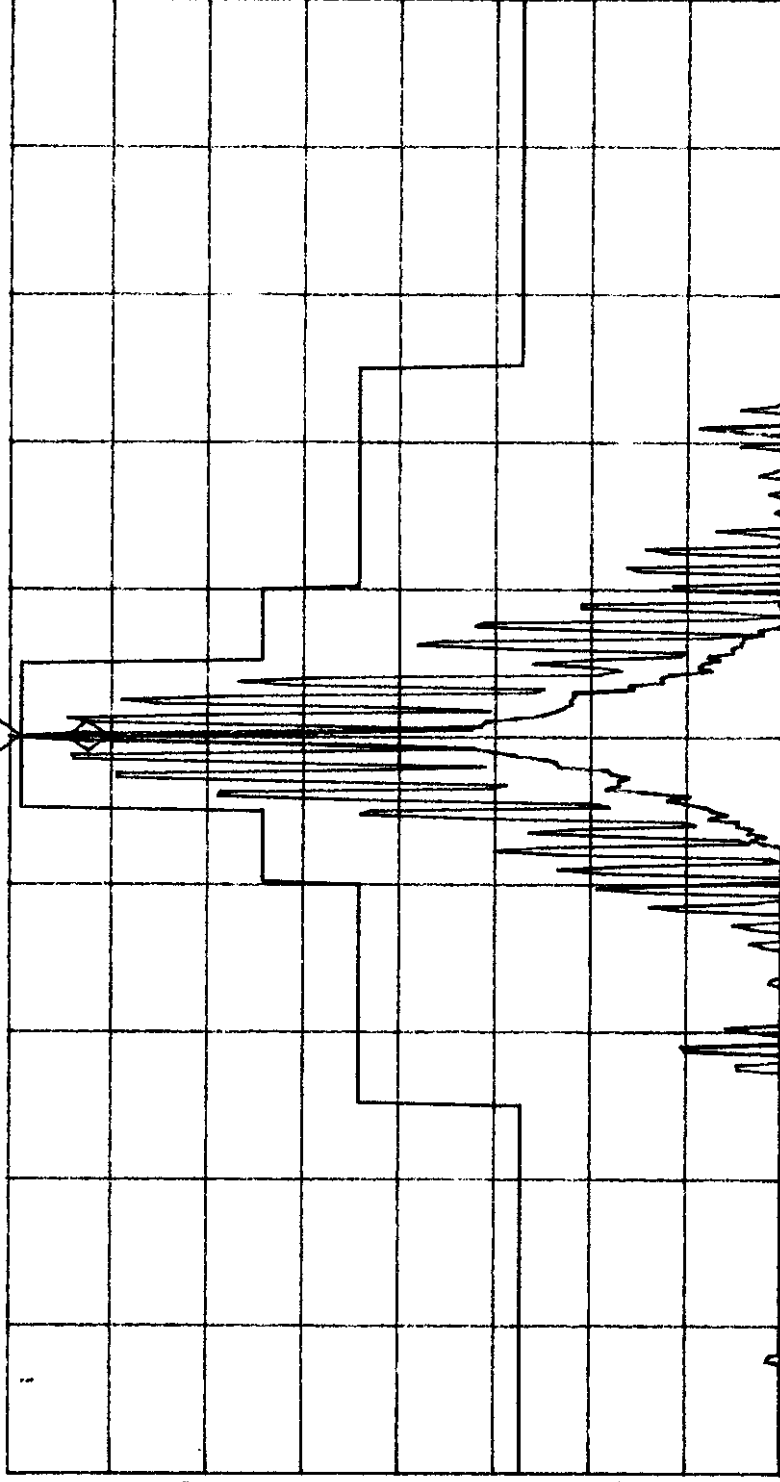

CENTER 174.0000 MHz

#IF BW 300 Hz

AVG BW 300 Hz

SPAN 200.0 kHz

SWP 6.67 sec



UltraTech  
Engineering Labs Inc.

hp

TECHNISONIC INDUSTRIES LTD.

VHF/UHF AIRBORNE TRANSCIVER, MODEL TFM-500

Frequency: 406.125 MHz, Power Rating: 10.0 W, Channel Spacing: 25 kHz

Modulation: FM modulation with 2.5 kHz Sine Wave Signal

Date: Jan. 14, 1999  
Tested by: Hung Trinh

REF LEVEL  
39.9 dBm

ACTV DET: PEAK

MEAS DET: PEAK QP AVG

MKR 406.1250 MHz

38.77 dBm

No user  
Menu

REF OFFST 30.0 dB

REF 39.9 dBm

MASK B


LOG

10

dB/

ATN

20 dB

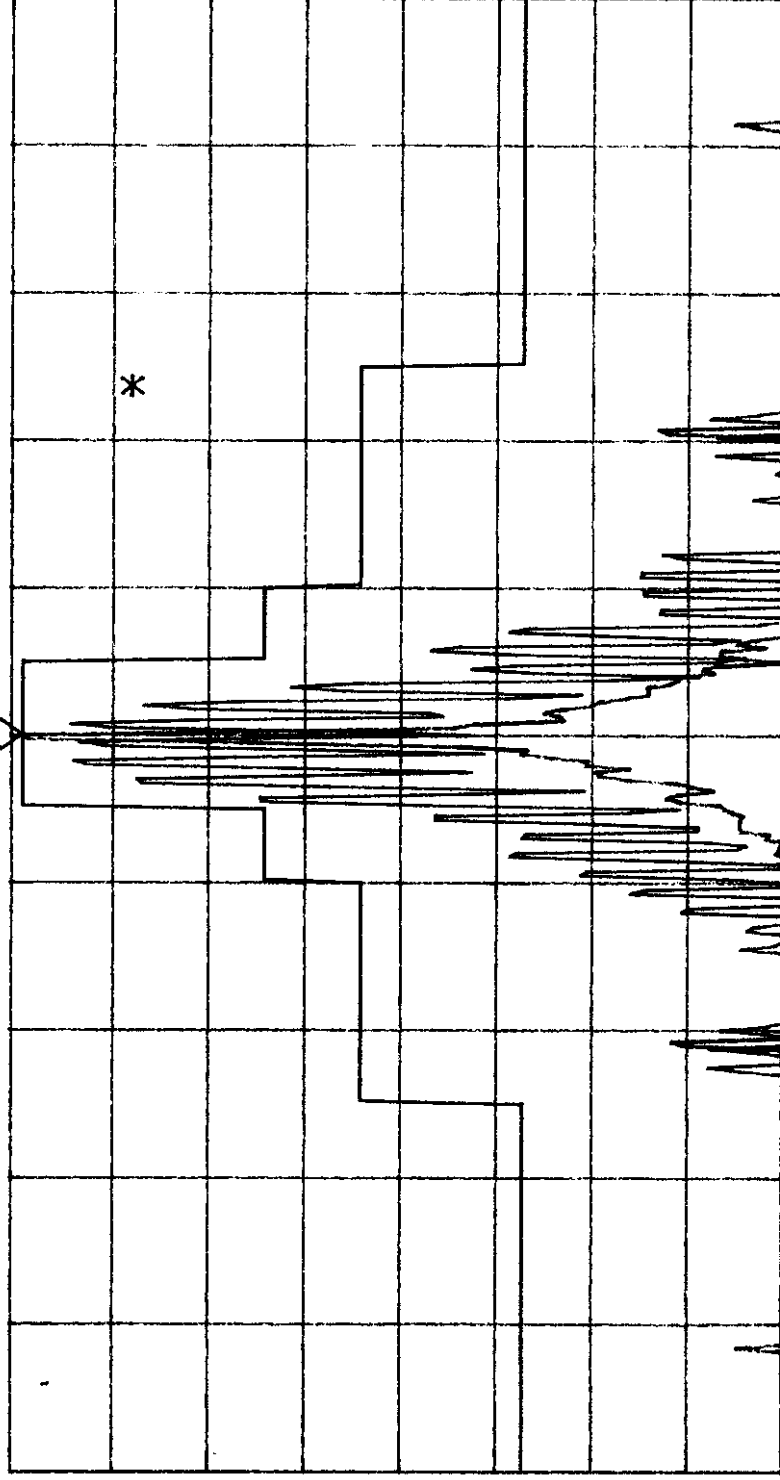

VA VB

SC FC

CORR

CENTER 406.1250 MHz

#IF BW 300 Hz

AVG BW 300 Hz

SPAN 200.0 kHz

SWP 6.67 sec



UltraTech  
Engineering Labs Inc.

hp

TECHNISONIC INDUSTRIES LTD.

VHF/UHF AIRBORNE TRANSCIVER, MODEL TFM-500

Frequency: 449.0 MHz, Power Rating: 10.0 W, Channel Spacing: 25 kHz

Modulation: FM modulation with 2.5 kHz Sine Wave Signal

Date: Jan. 14, 1999  
Tested by: Hung Trinh

REF LEVEL  
39.8 dBm

ACTV DET: PEAK

No user  
Menu

MEAS DET: PEAK QP AVG

MKR 449.9995 MHz

38.70 dBm

REF OFFST 30.0 dB

REF 39.8 dBm

MASK B

LOG

10

dB/


ATN

20 dB

VA VB

SC FC

CORR

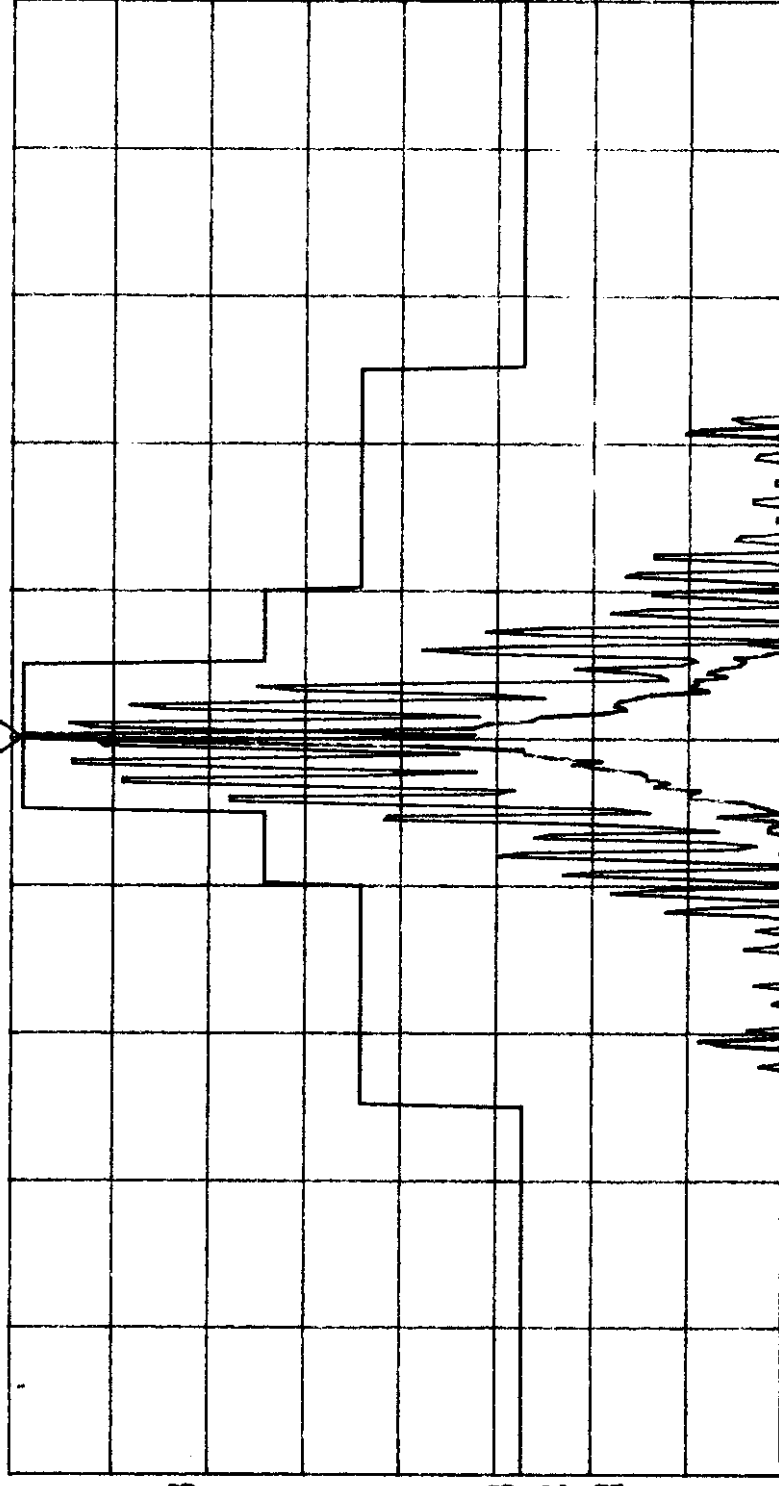

CENTER 449.9995 MHz

SPAN 200.0 KHZ

#IF BW 300 Hz

AVG BW 300 Hz

SWP 6.67 sec



UltraTech  
Engineering Labs Inc.

hp

TECHNISONIC INDUSTRIES LTD.

VHF/UHF AIRBORNE TRANSCIVER, MODEL TFM-500

Frequency: 470 MHz, Power Rating: 10.0 W, Channel Spacing: 25 kHz

Modulation: FM modulation with 2.5 kHz Sine Wave Signal

Date: Jan. 14, 1999  
Tested by: Hung Trinh

REF LEVEL  
39.9 dBm

ACTV DET: PEAK

No user  
Menu

MEAS DET: PEAK QP AVG

MKR 470.0000 MHz

38.72 dBm

REF OFFST 30.0 dB

REF 39.9 dBm

MASK B

LOG

10

dB/


ATN

20 dB

VA VB

SC FC

CORR

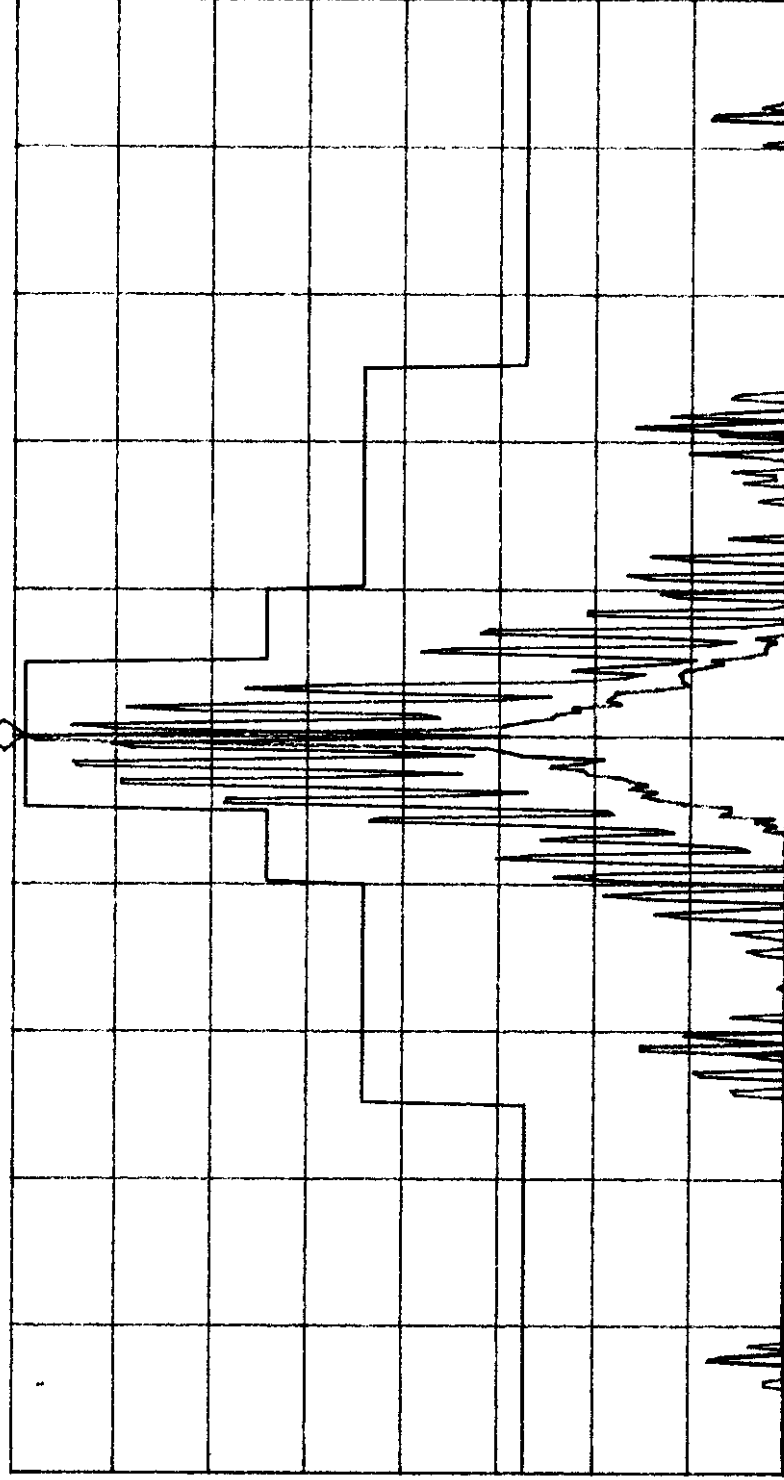

CENTER 470.0000 MHz

#IF BW 300 Hz

AVG BW 300 Hz

SPAN 200.0 kHz

SWP 6.67 sec





h7

TECHNISONIC INDUSTRIES LTD.

VHF/UHF AIRBORNE TRANSCIVER, MODEL TFM-500

Frequency: 138 MHz, Power Rating: 0.0 W, Channel Spacing: 12.5 kHz

Modulation: FM modulation with 2.5 kHz Sine Wave Signal

Date: Jan. 20, 1999  
Tested by: Hung Trinh


MARKER  $\Delta$   
9.25 kHz  
- .95 dB

ACTV DET: PEAK  
MEAS DET: PEAK QP AVG  
MKR 9.25 kHz  
- .95 dB

No user  
Menu

REF OFFST 30.0 dB  
REF 40.0 dBm

LOG 10 dB/ ATN 20 dB

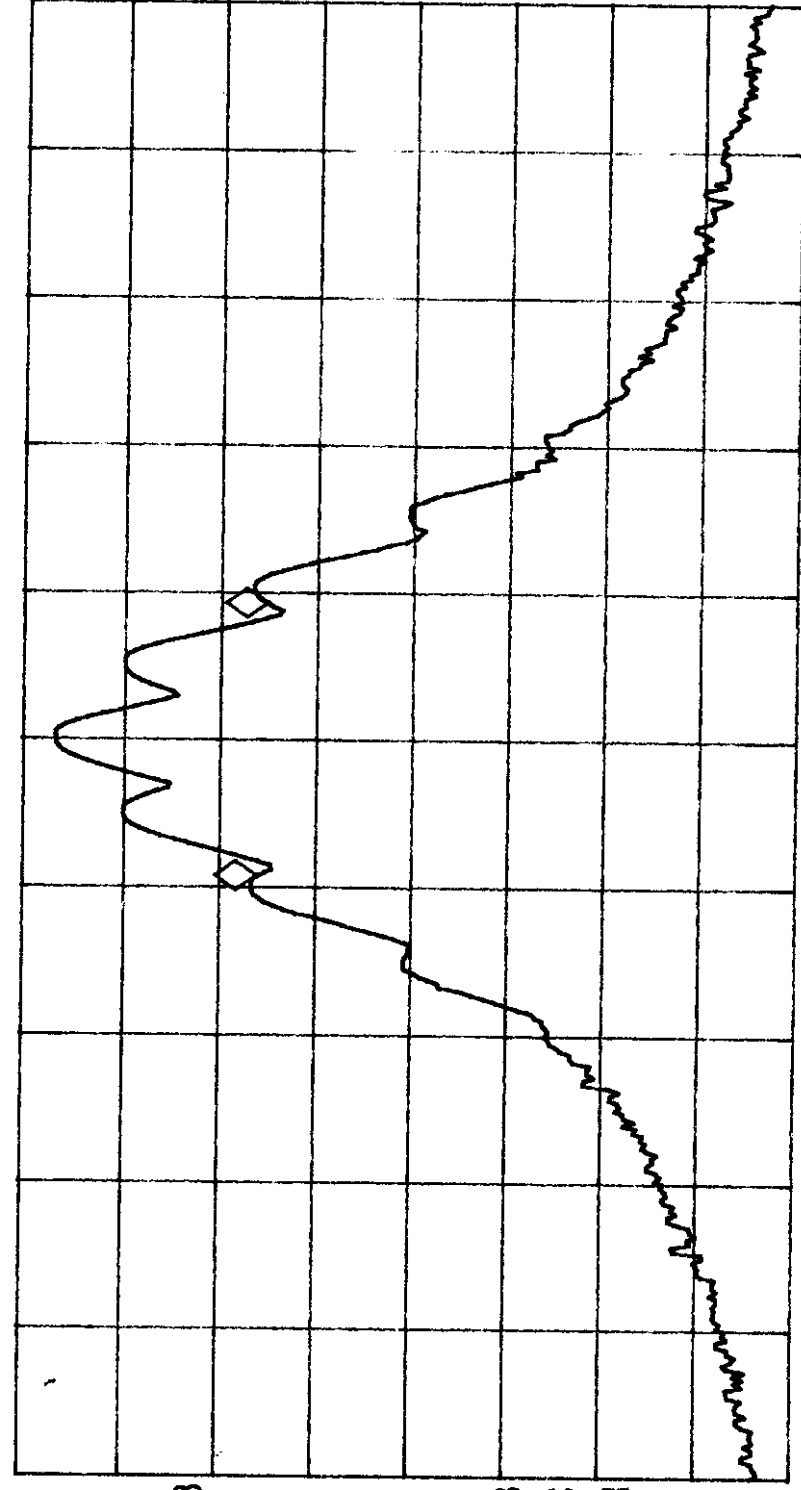

MA SB  
SC FC  
CORR

CENTER 138.00000 MHz  
#IF BW 1.0 kHz  
#AVG BW 1 kHz  
SPAN 50.00 kHz  
SWP 300 msec



TECHNISONIC INDUSTRIES LTD.

VHF/UHF AIRBORNE TRANSCEIVER, MODEL TFM-500

Frequency: 138 MHz, Power Rating: 10.0 W, Channel Spacing: 25 kHz  
Modulation: 1.5 M modulation with 2.5 kHz Sine Wave Signal

Date: Jan.       , 1999  
Tested by: Hung Trinh


MARKER  $\Delta$   
13.69 kHz  
- .42 dB

ACTV DET: PEAK  
MEAS DET: PEAK QP AVG  
MKR 13.69 kHz  
- .42 dB

No user  
Menu

REF OFFST 30.0 dB  
REF 40.0 dBm

LOG  
10  
dB/  
ATN  
20 dB

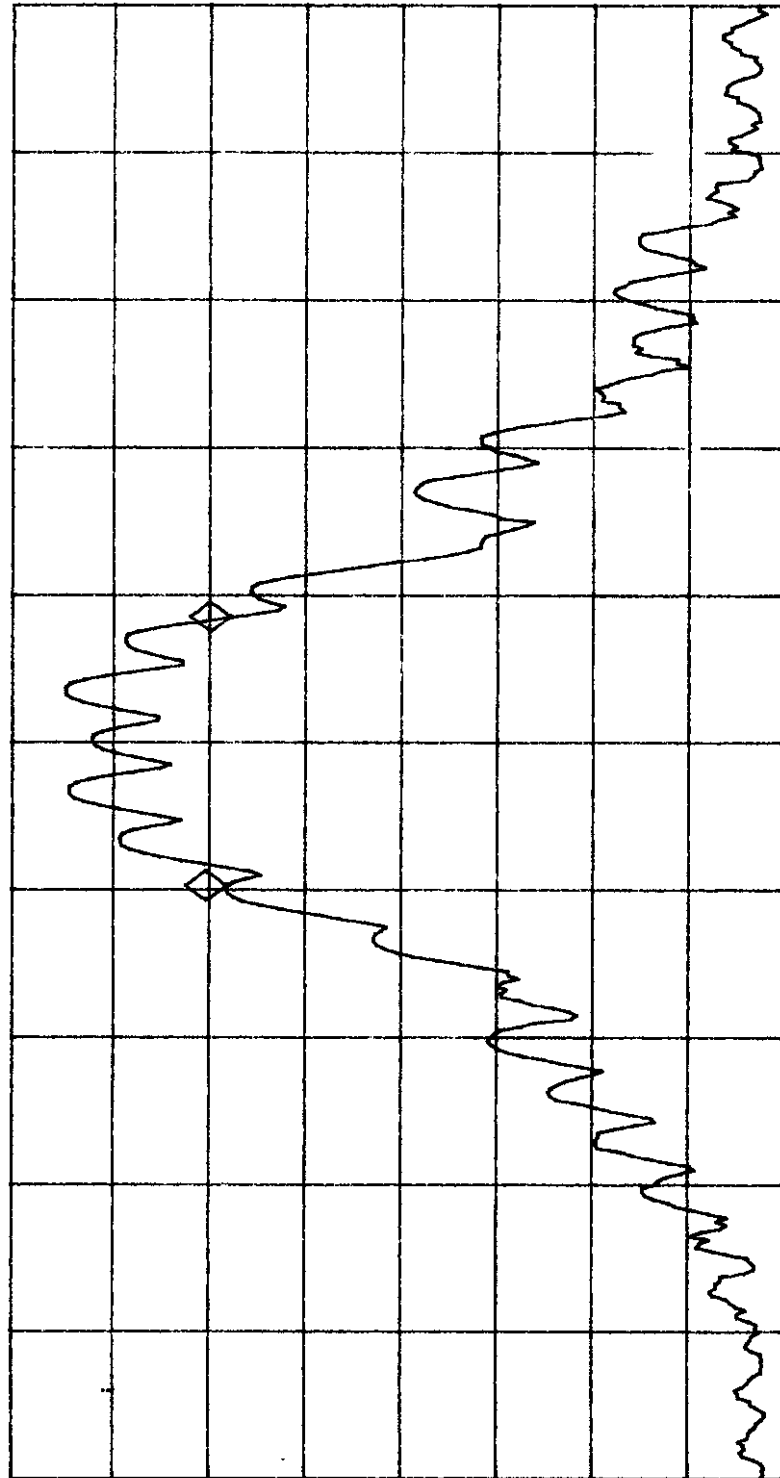

VA SB  
SC FC  
CORR

CENTER 138.00000 MHz  
#IF BW 1.0 kHz

AVG BW 1 kHz

SPAN 75.00 kHz  
SWP 300 msec



UltraTech  
Engineering Labs Inc.

# TECHNISONIC INDUSTRIES LTD.

VHF/UHF AIRBORNE TRANSCIVER, MODEL TFM-500


Frequency: 138 MHz, Power Rating: 0.0 W, Channel Spacing: 12.5 kHz  
Modulation: FM modulation with 2.5 kHz Sine Wave Signal

Date: Jan. 20, 1999  
Tested by: Hung Trinh

hp

ACTV DET: PEAK  
MEAS DET: PEAK QP AVG  
MKR 138.00000 MHz  
38.74 dBm

No user  
Menu

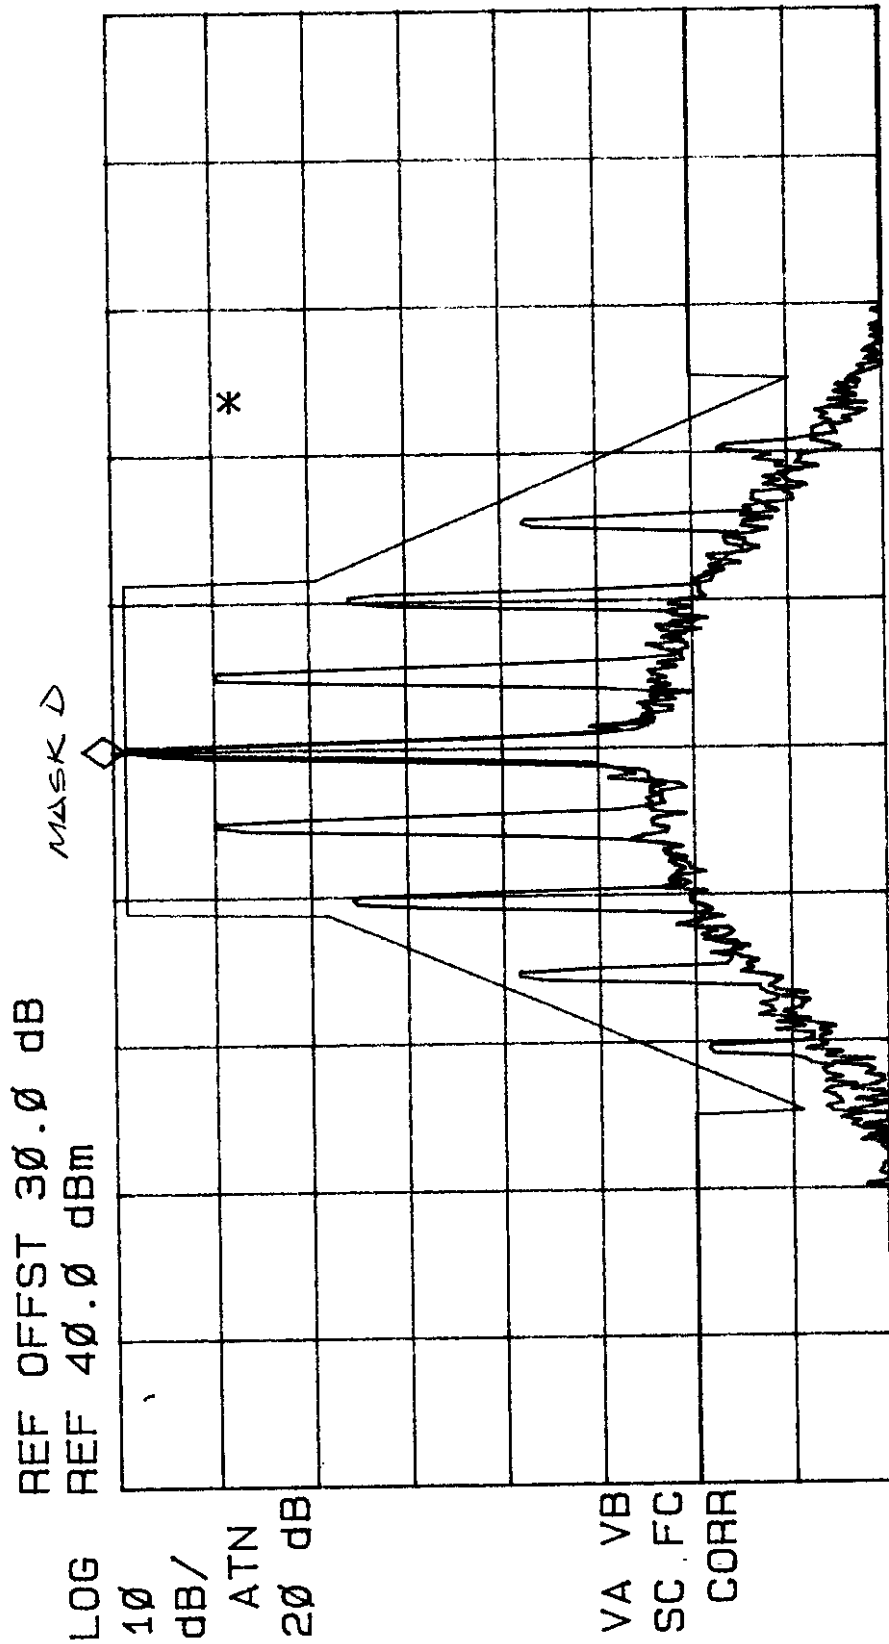

CENTER 138.00000 MHz  
#IF BW 100 Hz #AVG BW 100 Hz SPAN 50.00 kHz SWP 15.0 sec

REF LEVEL  
39.5 dBm

ACTV DET: PEAK

No user  
Menu


MEAS DET: PEAK QP AVG

MKR 150.00000 MHz  
38.28 dBm

REF OFFST 30.0 dB  
REF 39.5 dBm

LOG 10  
dB/  
ATN  
20 dB

MASK D

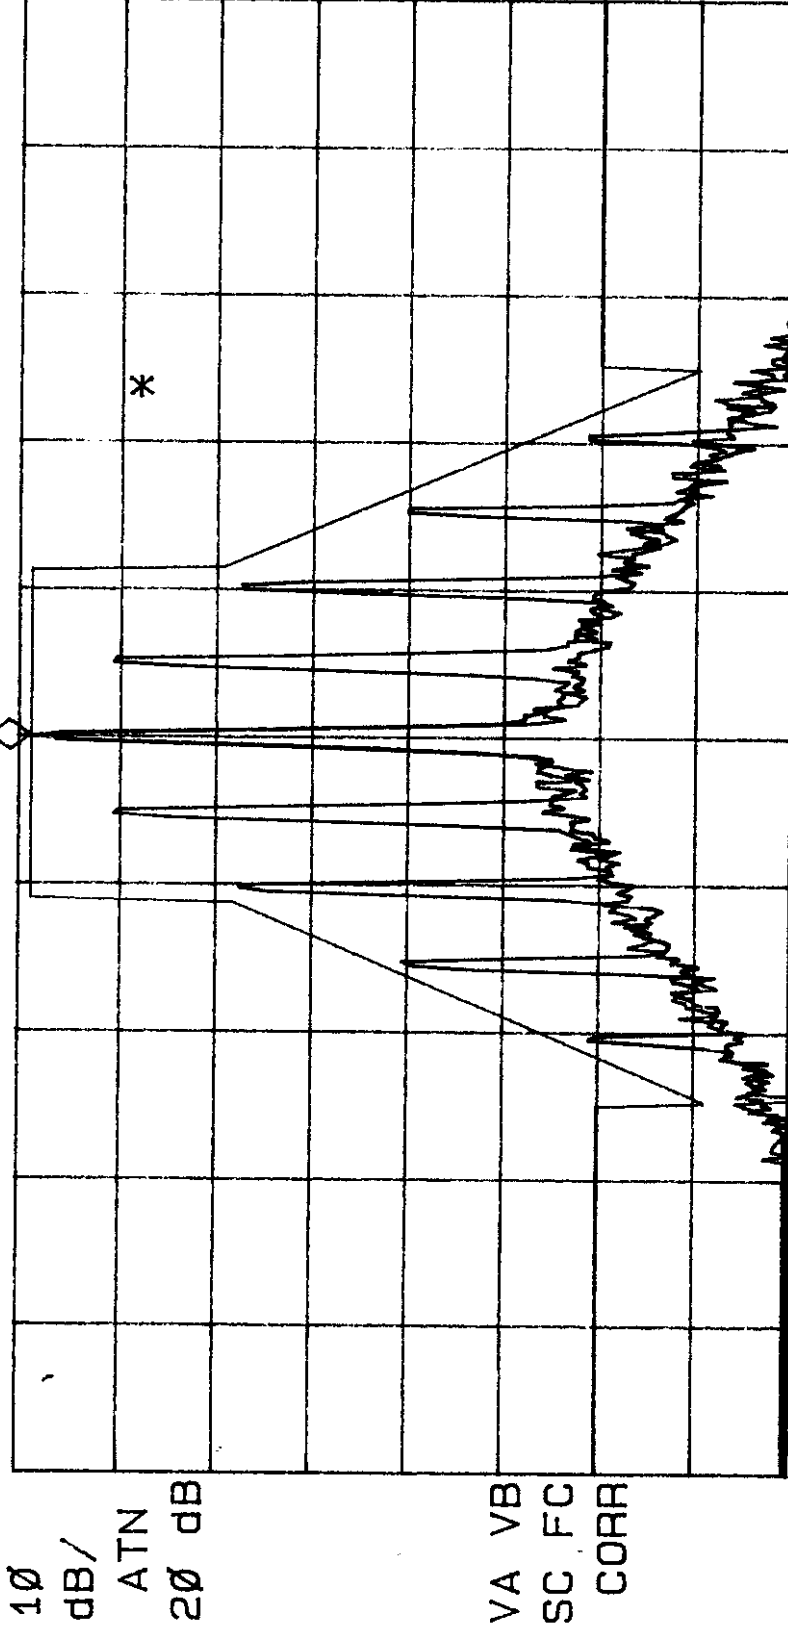

VA VB  
SC FC  
CORR

CENTER 150.00000 MHz

SPAN 50.00 kHz

#IF BW 100 Hz

#AVG BW 100 Hz

SWP 15.0 sec




Date: Jan. 20, 1999  
Tested by: Ilung Trinh

TECHNISONIC INDUSTRIES LTD.  
VHF/UHF AIRBORNE TRANSCIVER, MODEL TFM-500  
Frequency: 124.4 MHz, Power Rating: 10.0 W, Channel Spacing: 12.5 kHz  
Modulation: FM modulation with 2.5 kHz Sine Wave Signal

REF LEVEL  
39.9 dBm

ACTV DET: PEAK  
MEAS DET: PEAK QP AVG  
MKR 174.00000 MHz  
38.59 dBm

No user  
Menu

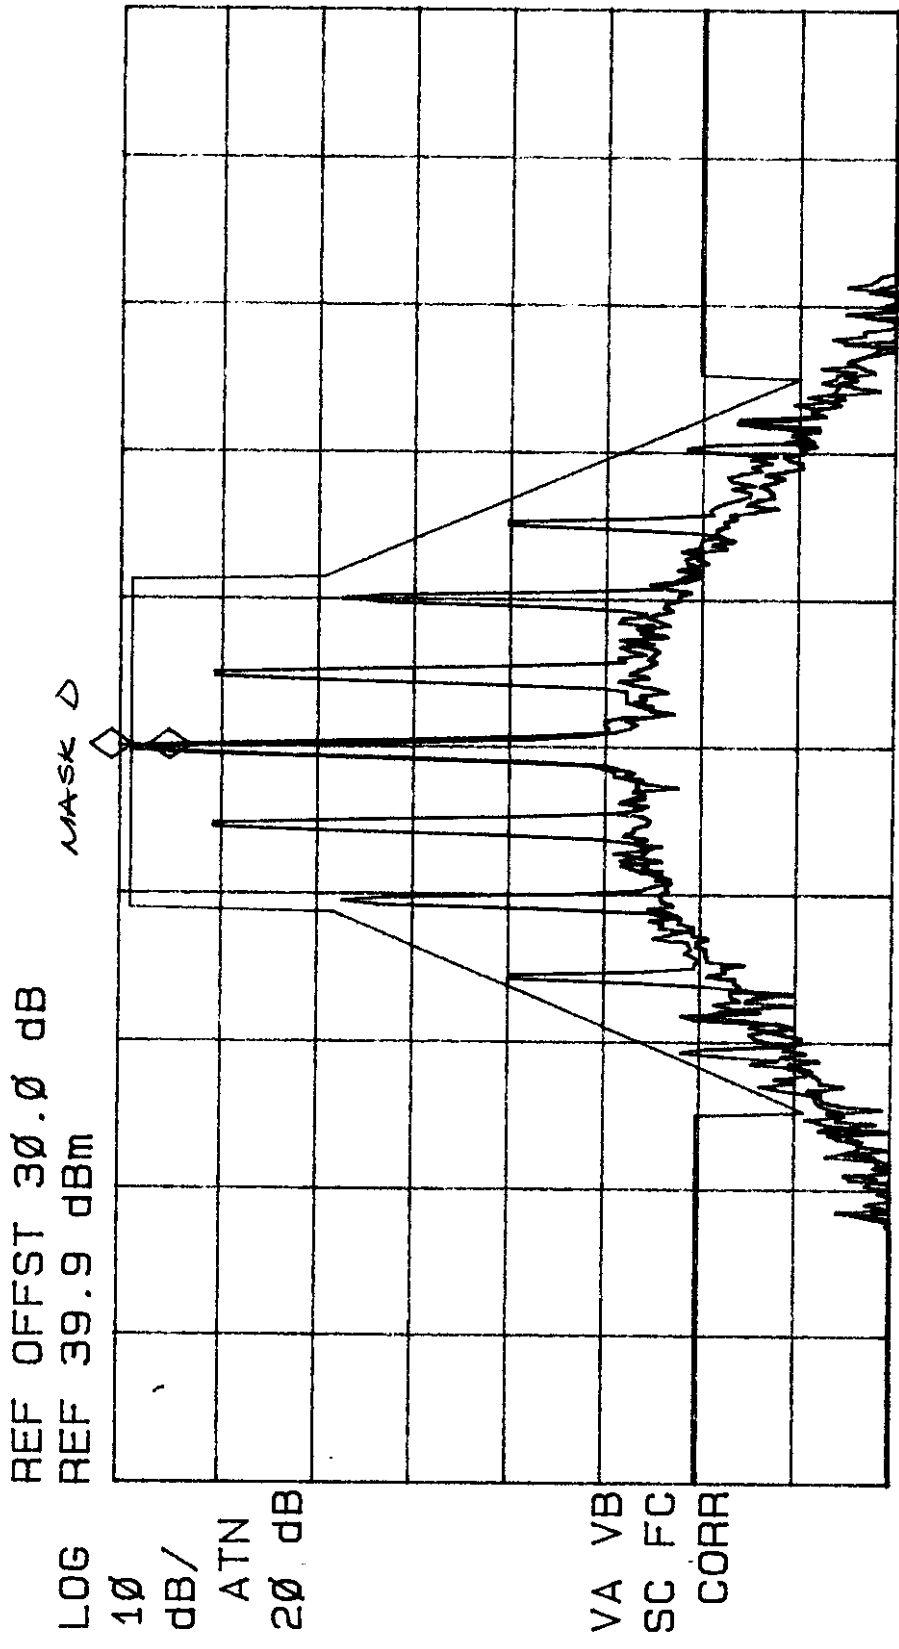

CENTER 174.00000 MHz  
#IF BW 100 Hz  
#AVG BW 100 Hz  
SPAN 50.00 kHz  
SWP 15.0 sec



UltraTech  
Engineering Labs Inc.

hp

# TECHNISONIC INDUSTRIES LTD.

VHF/UHF AIRBORNE TRANSCIVER, MODEL TFM-500

Frequency: 406.125 MHz, Power Rating: 10.0 W, Channel Spacing: 12.5 kHz  
Modulation: FM modulation with 2.5 kHz Sine Wave Signal

Date: Jan. 20, 1999  
Tested by: Hung Trinh

REF LEVEL  
39.6 dBm

ACTV DET: PEAK

MEAS DET: PEAK QP AVG

MKR 406.12450 MHz  
38.04 dBm

No user  
Menu

REF OFFST 30.0 dB  
REF 39.6 dBm

MASK D

LOG

10

dB/


ATN

20 dB

VA VB

SC FC

CORR

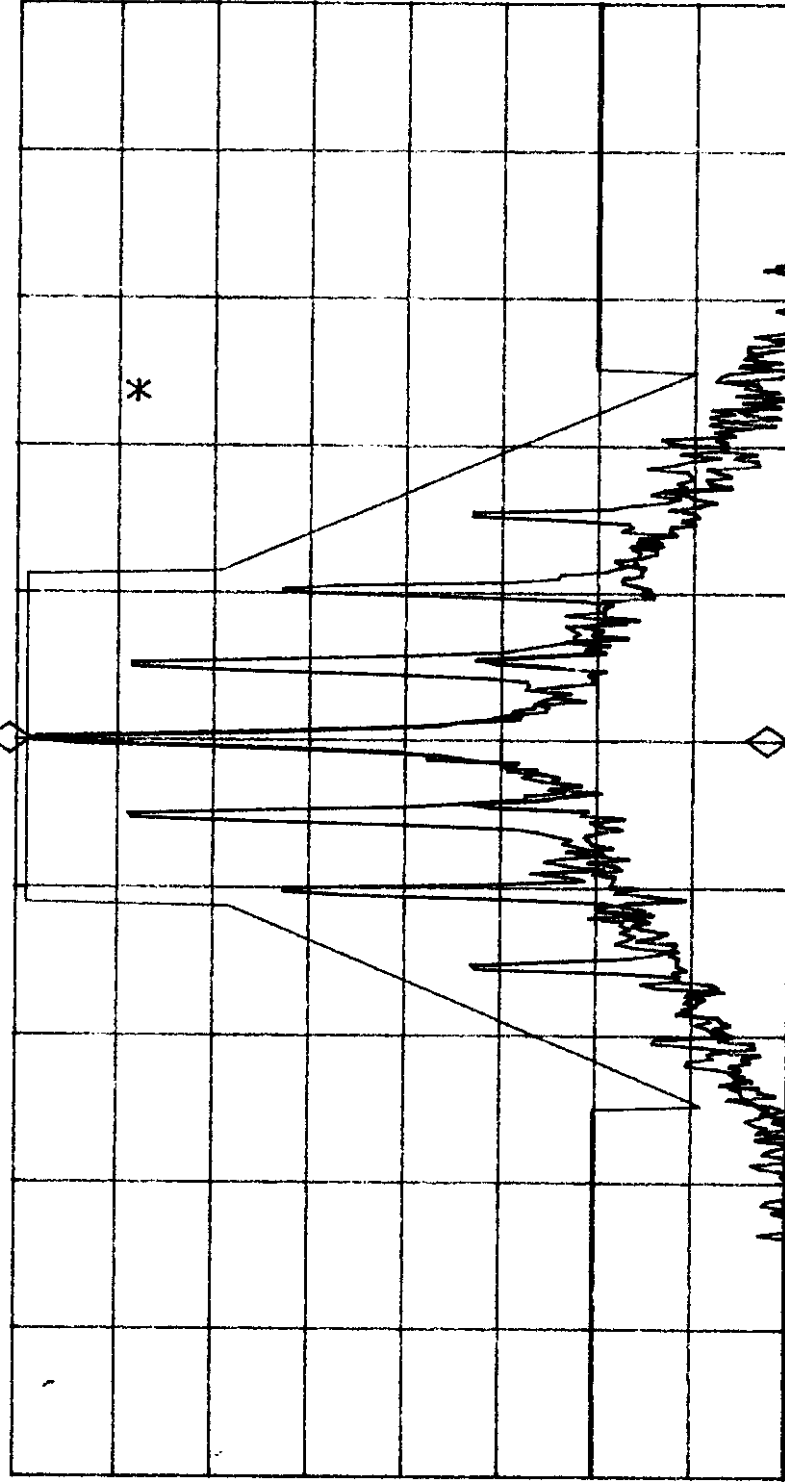

CENTER 406.12450 MHz

#IF BW 100 Hz

#AVG BW 100 Hz

SPAN 50.00 KHz

SWP 15.0 sec



UltraTech  
Engineering Labs Inc.

TECHNISONIC INDUSTRIES LTD.

VHF/UHF AIRBORNE TRANSCIVER, MODEL TFM-500

Frequency: 450 MHz, Power Rating: 10.0 W, Channel Spacing: 12.5 kHz  
Modulation: FM modulation with 2.5 kHz Sine Wave Signal

Date: Jan, 20, 1999  
Tested by: Hung Trinh

REF LEVEL  
39.2 dBm


ACTV DET: PEAK  
MEAS DET: PEAK QP AVG  
MKR 449.99950 MHz  
37.50 dBm

No user  
Menu

REF OFFST 30.0 dB  
REF 39.2 dBm

LOG 10  
dB/  
ATN  
20 dB

MASK D

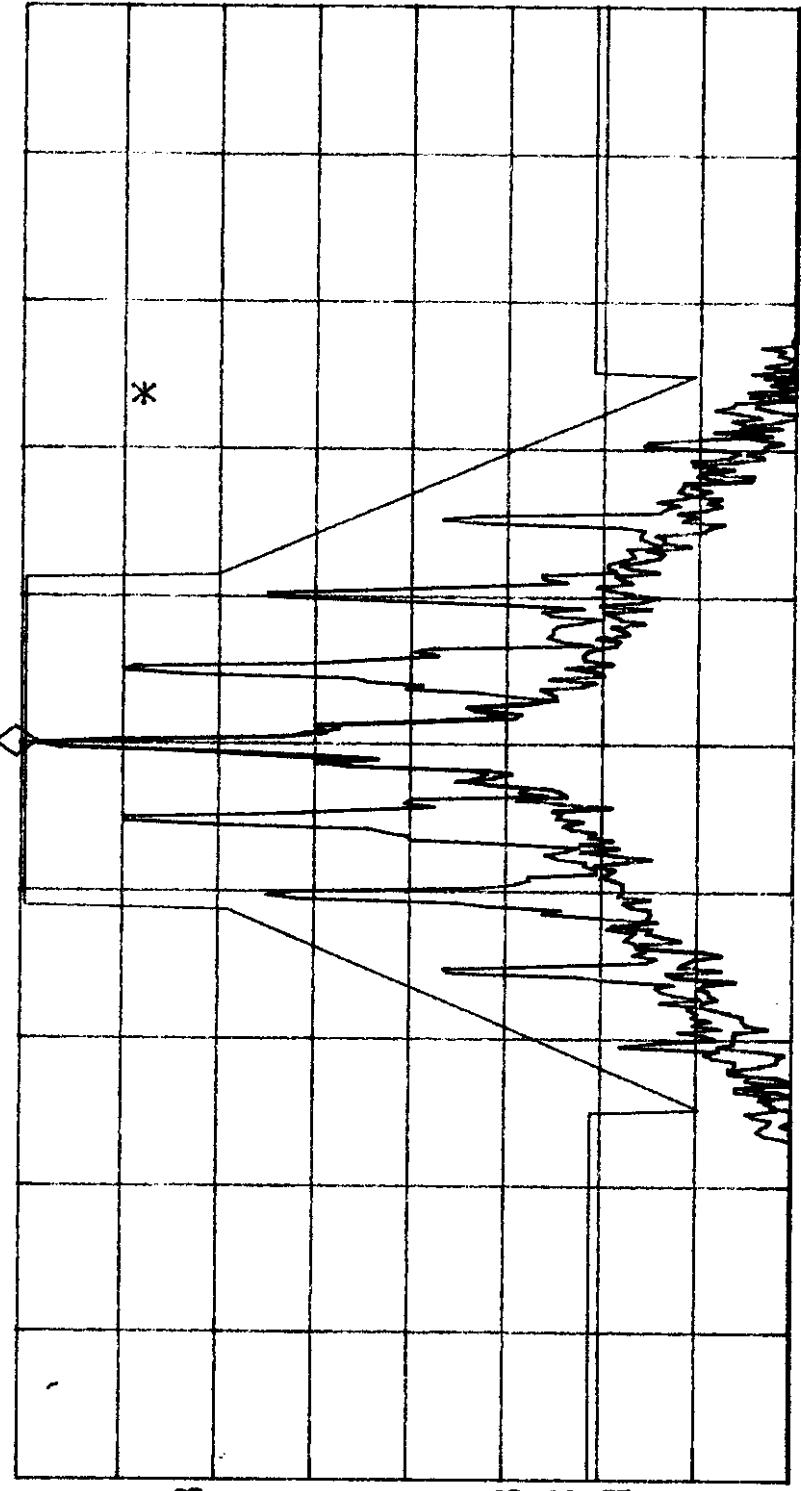

VA VB  
SC FC  
CORR

CENTER 449.99950 MHz  
#IF BW 100 Hz

#AVG BW 100 Hz

SPAN 50.00 kHz  
SWP 15.0 sec

**TECHNISONIC INDUSTRIES LTD.**  
VHF/UHF AIRBORNE TRANSCEIVER, MODEL TFM-500  
Frequency: 470 MHz, Power Rating: 100 W, Channel Spacing: 12.5 kHz  
Modulation: FM modulation with 2.5 kHz Sine Wave Signal

REF LEVEL  
39.4 dBm


ACTV DET: PEAK  
MEAS DET: PEAK QP AVG  
MKR 469.99963 MHz  
38.32 dBm

No user  
Menu

REF OFFST 30.0 dB  
REF 39.4 dBm

MASK

LOG 10 dB/ ATN 20 dB

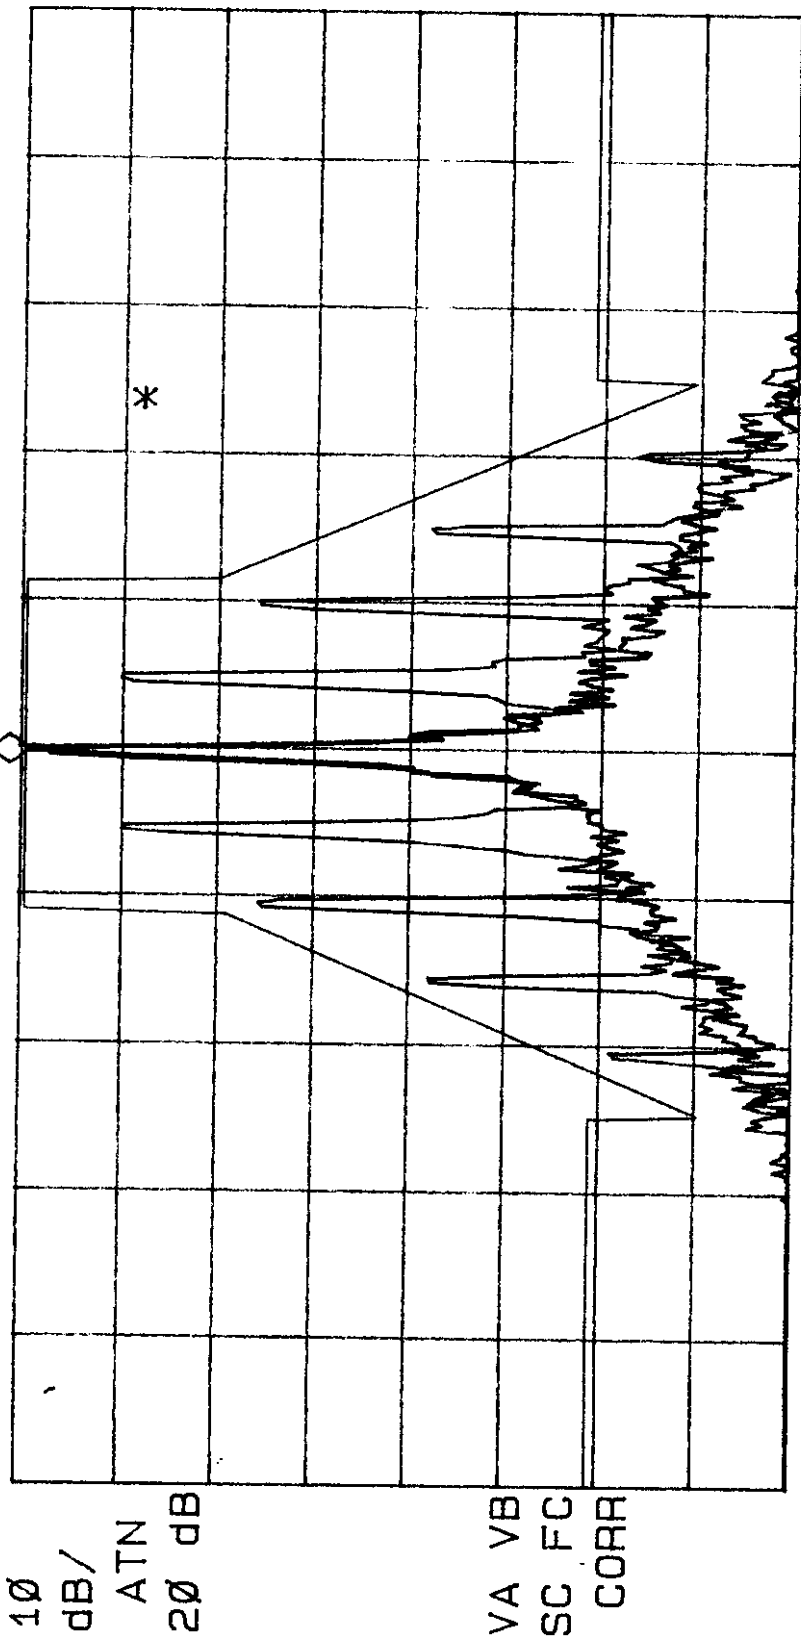

CENTER 469.99975 MHz  
#IF BW 100 Hz

SPAN 50.00 KHz  
SWP 15.0 sec

#AVG BW 100 Hz



#### 4.6. TRANSMITTER ANTENNA POWER SPURIOUS/HARMONIC CONDUCTED EMISSIONS @ FCC 90.210

**PRODUCT NAME:** VHF/UHF FM MOBILE TRANSCEIVER,  
Model No.: TFM-500

**FCC REQUIREMENTS:**

FCC Part 90, Sub. I, Para. 90.210

Emissions shall be attenuated below the mean output power of the transmitter as follows:

FREQUENCY RANGE (MHz)	Recommended OBW (KHz)	CHANNEL SPACING (KHz)	Recommended FREQ. DEVIATION (KHz)	FCC SPECIFICATION LIMITS (Para. No.)
150-174 / 403-512	20	25.0	5.0	90.210(b): Mask B – Audio & Voice
150-174 / 403-512	10	12.5	2.5	90.210(d): Mask D – Audio & Voice

**CLIMATE CONDITION:**

Standard Temperature and Humidity:

- Ambient temperature: 21 °C
- Relative humidity: 43%

**POWER INPUT:**

28 Vdc.

**TEST EQUIPMENT:**

- Advantest Spectrum Analyzer, Model R3271, S/N: 15050203
- Bird Attenuator, 50 Ohm IN/OUT
- Hi-pass Filter, Microphase, P/N: CR220HIB, S/N: IITI11000AB, cut-off freq.: 600 MHz.
- Audio Oscillator, HP, Model 204C, SN: 0989A08798, Output: 0-1.2 MHz, 5 Vrms.

**METHOD OF MEASUREMENTS:**

With transmitter modulation characteristics described in Out-of-Band Emissions measurements @ 2.989, the transmitter spurious and harmonic emissions were scanned. The spurious and harmonic emissions were measured with the Spectrum Analyzer controls set as RBW = 100 kHz, VBW = 100 kHz and SWEEP TIME = AUTO). The transmitter was operated at a full rated power output, and modulated as follows:

**ULTRATECH GROUP OF LABS**

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: [yhik.ultratech@sympatico.ca](mailto:yhik.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>


File #: TIL10FT  
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

**FCC CFR 47, Para. 2.997 - Frequency spectrum to be investigated:-** The spectrum was investigated from the lowest radio generated in the equipment up to at least the 10<sup>th</sup> harmonic of the carrier frequency or to the highest frequency practicable in the present state of the art of measuring techniques, whichever is lower. Particular attention should be paid to harmonics and subharmonics of the carrier frequency. Radiation at the frequencies of multiplier stages should be checked. The amplitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be reported.

**FCC CFR 47, Para. 2.991 - Spurious Emissions at Antenna Terminal:-** The radio frequency voltage or powers generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of the harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in 2.989 as appropriate. The magnitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be specified.

#### **TEST ARRANGEMENT**

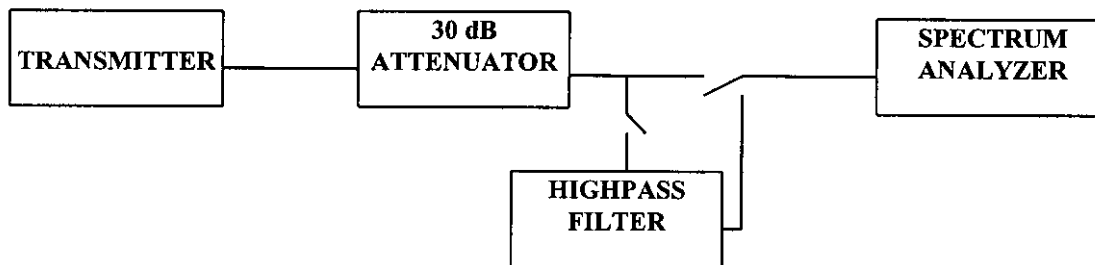

**TEST RESULTS:** Conforms.

**TESTED PERSONNEL:** Hung Trinh, RFI Technician

**DATE:** January 12, 1999

#### **ULTRATECH GROUP OF LABS**

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: TIL10FT  
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## MEASUREMENT DATA

### SPURIOUS & HARMONIC EMISSIONS AT THE TRANSMITTER ANTENNA TERMINAL

#### TEST CONFIGURATION

- The transmitter was coupled to the Spectrum Analyzer through a 30 dB attenuator.
- The insertion loss between the transmitter output terminal and the spectrum analyzer was measured to be 30 dB
- The channel frequencies (Low, Middle and High ) was established on the extreme edges of the operating band, both upper and lower at its full rated output power. The emissions was investigated up to the tenth harmonic of the fundamental emissions in each case.

\* **Remark:** Since the only difference between 12.5 kHz and 25 kHz Channel Spacing operation is the adjustment of frequency deviation limiter (only can be done by software), tests was done with 25 kHz Channel Spacing operation and the results were compared against the limits for 12.5 kHz Channel Spacing operation to represent the worst case.

Fundamental Frequency: 138 MHz, 25 kHz Channel Spacing  
RF Output Power: 10 Watts  
Modulation: FM modulation with 2.5 kHz Sine Wave signal, freq. Dev. = 3.9 kHz

FREQUENCY (MHz)	RF LEVEL (dBm)	* LIMIT (dBm)	MARGIN (dB)	PASS/ FAIL
277.3	-25.1	-20.0	-5.1	PASS
415.9	-21.3	-20.0	-1.3	PASS
2054.0	-29.8	-20.0	-9.8	PASS
2708.0	-30.0	-20.0	-10.0	PASS

The emissions were scanned from 10 MHz to 5 GHz and all emissions less 30 dB below the limits were recorded.

Fundamental Frequency: 150 MHz, 25 kHz Channel Spacing, 25 kHz Channel Spacing  
RF Output Power: 10 Watts  
Modulation: FM modulation with 2.5 kHz Sine Wave signal, freq. Dev. = 3.9 kHz

FREQUENCY (MHz)	RF LEVEL (dBm)	* LIMIT (dBm)	MARGIN (dB)	PASS/ FAIL
302.1	-24.2	-20.0	-4.2	PASS
453.0	-24.4	-20.0	-4.4	PASS
2223.0	-30.3	-20.0	-10.3	PASS
2899.0	-29.9	-20.0	-9.9	PASS

The emissions were scanned from 10 MHz to 5 GHz and all emissions less 30 dB below the limits were recorded.

#### ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: [vhk.ultratech@sympatico.ca](mailto:vhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: TIL10FT  
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Fundamental Frequency: 174 MHz, 25 kHz Channel Spacing RF Output Power: 10 Watts Modulation: FM modulation with 2.5 kHz Sine Wave signal, freq. Dev. = 3.9 kHz				
FREQUENCY (MHz)	RF LEVEL (dBm)	*LIMIT (dBm)	MARGIN (dB)	PASS/ FAIL
349.1	-23.7	-20.0	-3.7	PASS
524.8	-24.8	-20.0	-4.8	PASS
1840.0	-30.3	-20.0	-10.3	PASS
2760.0	-30.3	-20.0	-10.3	PASS
The emissions were scanned from 10 MHz to 5 GHz and all emissions less 30 dB below the limits were recorded.				

Fundamental Frequency: 406.125 MHz, 25 kHz Channel Spacing RF Output Power: 10 Watts Modulation: FM modulation with 2.5 kHz Sine Wave signal, freq. Dev. = 3.9 kHz				
FREQUENCY (MHz)	RF LEVEL (dBm)	*LIMIT (dBm)	MARGIN (dB)	PASS/ FAIL
428.3	-28.8	-20.0	-8.8	PASS
475.3	-26.3	-20.0	-6.3	PASS
1221.0	-26.3	-20.0	-6.3	PASS
2847.0	-27.2	-20.0	-7.2	PASS
The emissions were scanned from 10 MHz to 5 GHz and all emissions less 30 dB below the limits were recorded.				

Fundamental Frequency: 450 MHz, 25 kHz Channel Spacing RF Output Power: 10 Watts Modulation: FM modulation with 2.5 kHz Sine Wave signal, freq. Dev. = 3.9 kHz				
FREQUENCY (MHz)	RF LEVEL (dBm)	*LIMIT (dBm)	MARGIN (dB)	PASS/ FAIL
428.3	-21.7	-20.0	-1.7	PASS
475.3	-22.4	-20.0	-2.4	PASS
901.0	-27.4	-20.0	-7.4	PASS
1353.0	-27.0	-20.0	-7.0	PASS
2702	-27.7	-20.0	-7.7	PASS
The emissions were scanned from 10 MHz to 5 GHz and all emissions less 30 dB below the limits were recorded.				

# ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2

Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: TIL10FT

Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Fundamental Frequency: 470 MHz, 25 kHz Channel Spacing RF Output Power: 10 Watts Modulation: FM modulation with 2.5 kHz Sine Wave signal, freq. Dev. = 3.9 kHz				
FREQUENCY (MHz)	RF LEVEL (dBm)	*LIMIT (dBm)	MARGIN (dB)	PASS/ FAIL
940.6	-27.5	-20.0	-7.5	PASS
1413.0	-20.8	-20.0	-0.8	PASS
2350.0	-22.5	-20.0	-2.5	PASS
2824.0	-25.8	-20.0	-5.8	PASS
3764.0	-25.4	-20.0	-5.4	PASS
The emissions were scanned from 10 MHz to 5 GHz and all emissions less 30 dB below the limits were recorded.				

Note: The transmitter conducted emissions measurements at the antenna terminal were also pre-scans with the transmitter operated in 12.5 kHz channel-spacing configuration and the results were found to be identical with those operates in 25 kHz spacing configuration.

#### ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: [vhk.ultratech@sympatico.ca](mailto:vhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: TIL10FT  
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



**UltraTech**  
Engineering Labs Inc.

**TECHNISONIC INDUSTRIES LTD.**

VHF/UHF AIRBORNE TRANSCEIVER, MODEL TFM-500

Frequency: 138 MHz, Power Rating: 100 W, Channel Spacing: 25 kHz

Modulation: FM modulation with 2.5 kHz Sine Wave Signal

Date: Jan. 12, 1999  
Tested by: Hung Trinh

ACTV DET: PEAK

No user

MEAS DET: PEAK QP AVG

Menu

MKR 141.2 MHz

38.57 dBm

REF OFFST 30.0 dB

REF 40.0 dBm

LOG

10

dB/


ATN

20 dB

MA SB

SC FC

CORR

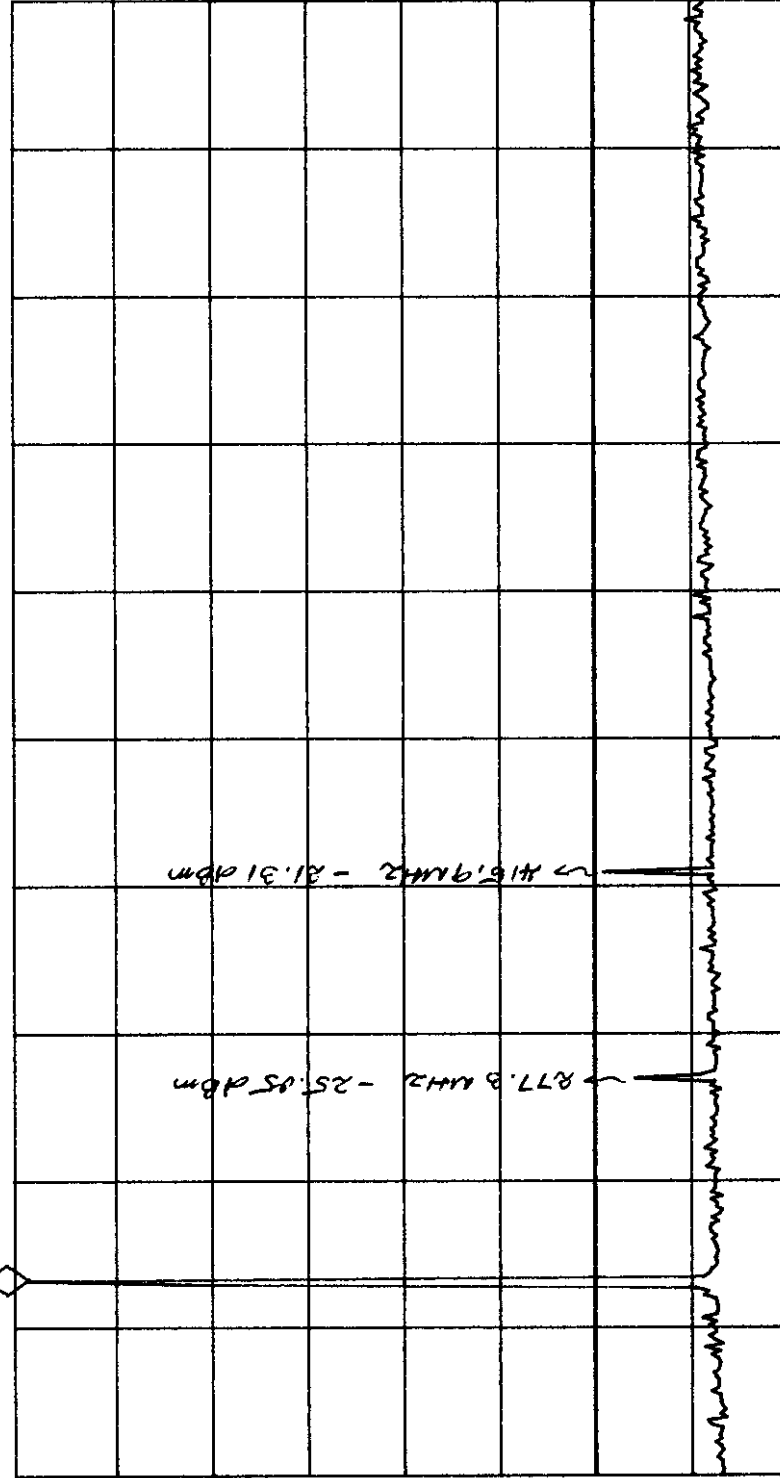

START 10.0 MHz

STOP 1.0000 GHz

IF BW 120 kHz

AVG BW 300 kHz

SWP 206 msec



TECHNISONIC INDUSTRIES LTD.

VHF/UHF AIRBORNE TRANSCEIVER, MODEL TFM-500

Frequency: 1.38 MHz, Power Rating: 10.0 W, Channel Spacing: 25 kHz  
Modulation: FM modulation with 2.5 kHz Sine Wave Signal

Date: Jan. 22, 1999  
Tested by: Hung Trinh

STOP

2.500 GHZ

ACTV DET: PEAK

No user

MEAS DET: PEAK QP AVG

Menu

MKR 2.054 GHZ

-29.80 dBm

REF OFFST 30.0 dB

LOG REF 40.0 dBm

10

dB/


ATN

20 dB

MA SB

SC FC

CORR

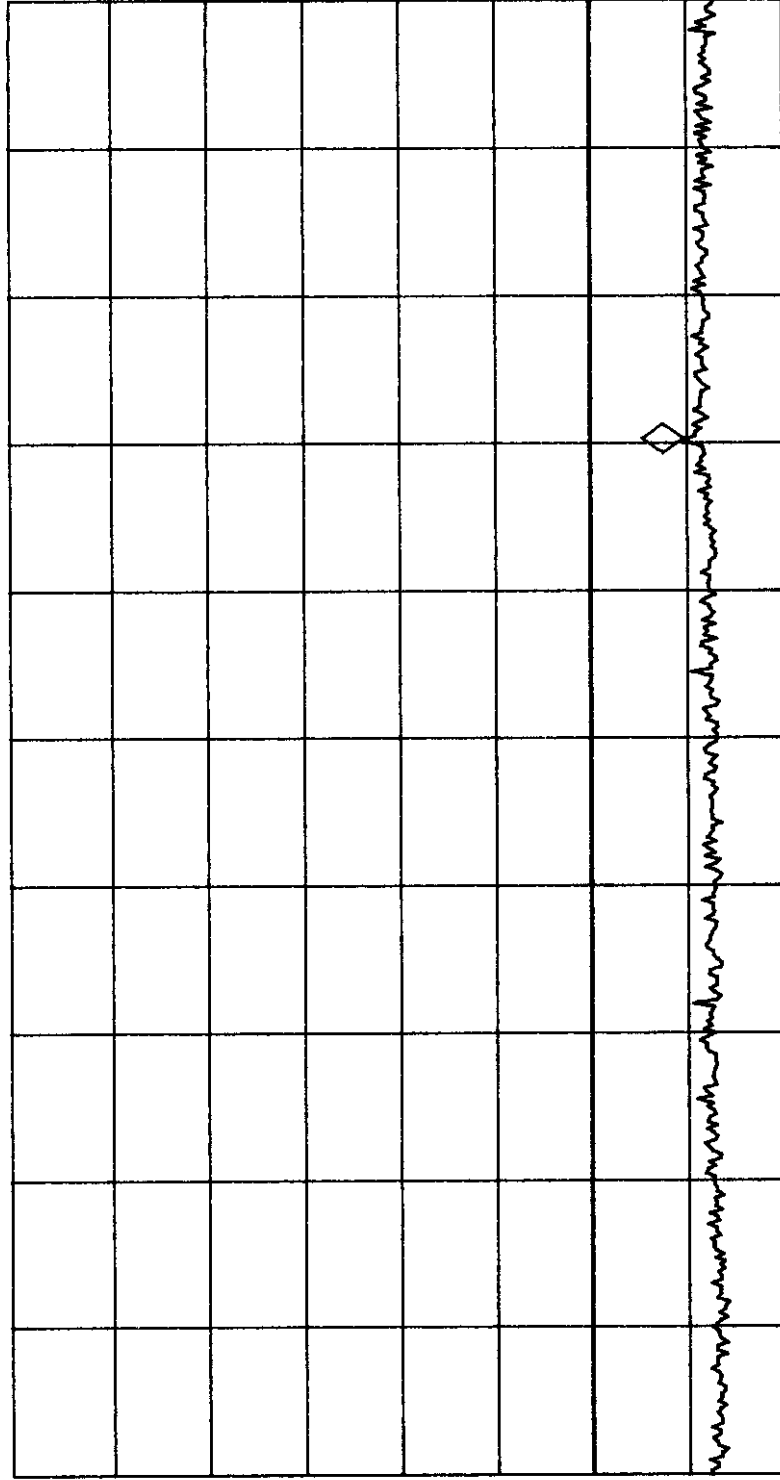

START 1.000 GHZ

IF BW 120 KHZ

AVG BW 300 KHZ

STOP 2.500 GHZ

SWP 313 msec



TECHNISONIC INDUSTRIES LTD.

VHF/UHF AIRBORNE TRANSCEIVER, MODEL TFM-500

Frequency: 138 MHz, Power Rating: 100 W, Channel Spacing: 25 kHz

Modulation: FM modulation with 2.5 kHz Sine Wave Signal

Date: Jan. 12, 1999  
Tested by: Hung Trinh

STOP

5.000 GHz

ACTV DET: PEAK

MEAS DET: PEAK QP AVG

MKR 2.708 GHz

-29.95 dBm

No user

Menu

REF OFFST 30.0 dB

REF 40.0 dBm

LOG

10

dB/


ATN

20 dB

MA SB

SC FC

CORR

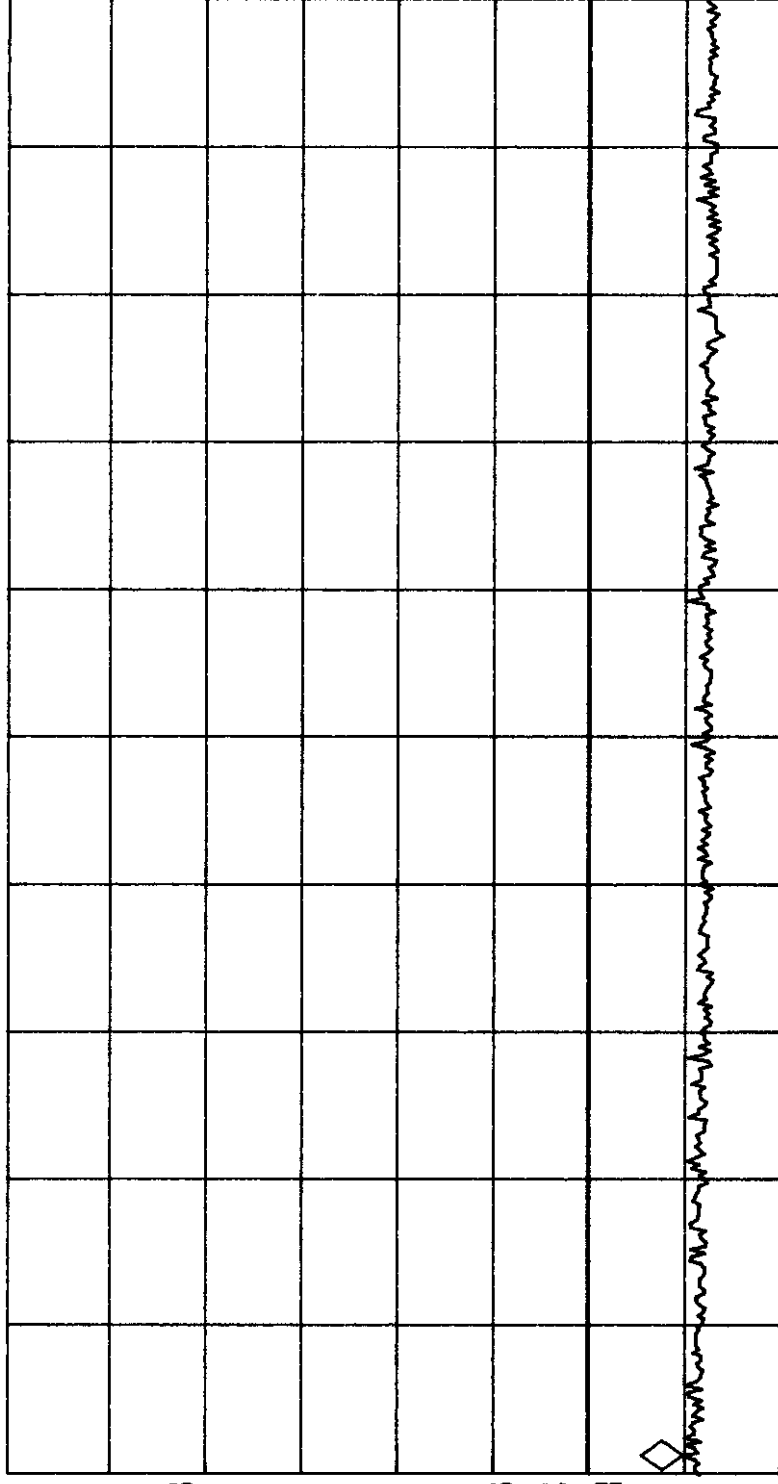

START 2.679 GHz

IF BW 120 KHZ

AVG BW 300 KHZ

STOP 5.000 GHz

SWP 484 msec



STOP

1.0000 GHz

ACTV DET: PEAK

No user

MEAS DET: PEAK QP AVG

Menu

MKR 153.6 MHz

38.35 dBm

REF OFFST 30.0 dB

REF 40.0 dBm

LOG

10

dB/


ATN

20 dB

MA SB

SC FC

CORR

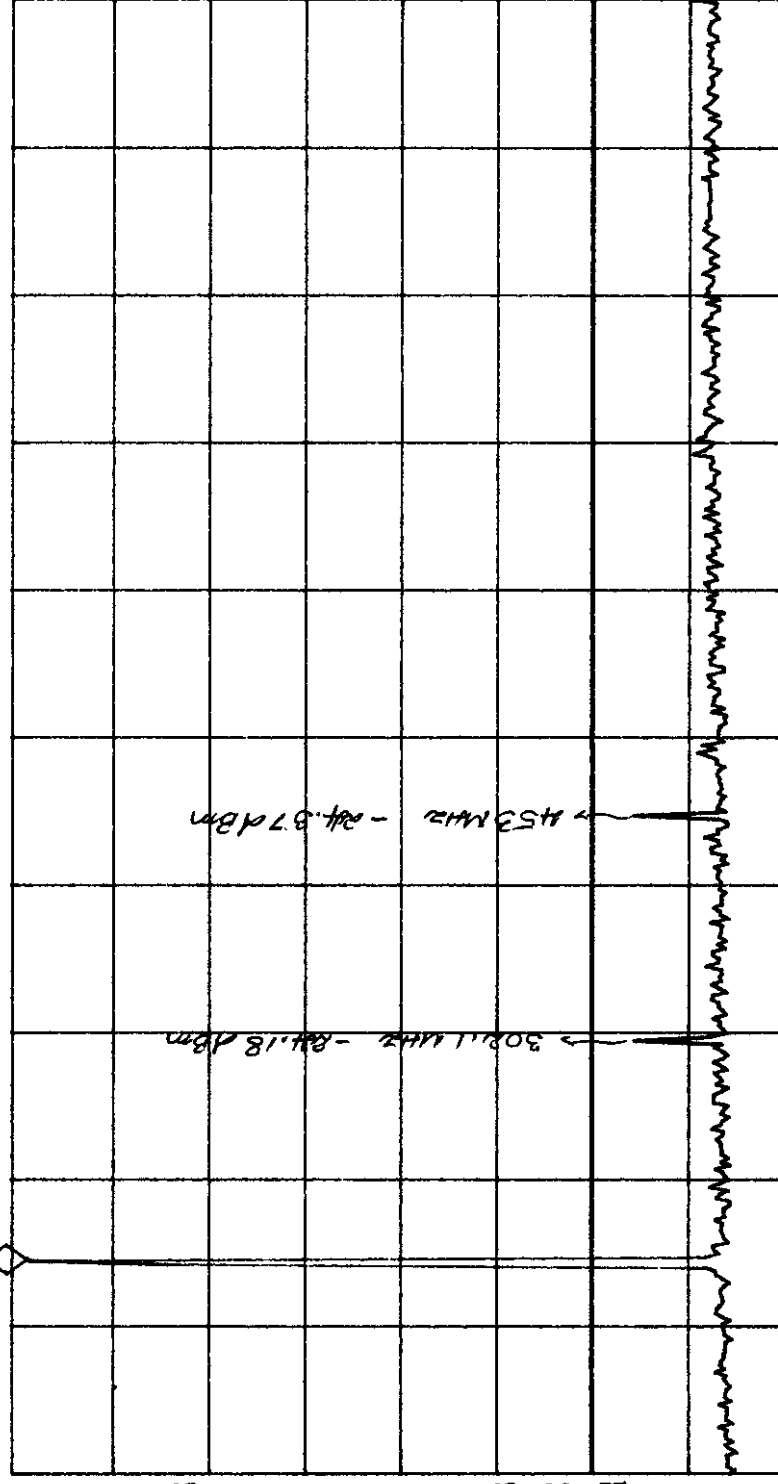

START 10.0 MHz

IF BW 120 KHz

AVG BW 300 KHz

STOP 1.0000 GHz

SWP 206 msec



UltraTech  
Engineering Labs Inc.

TECHNISONIC INDUSTRIES LTD.

VHF/UHF AIRBORNE TRANSCEIVER, MODEL TFM-500

Frequency: 150 MHz, Power Rating: 10 W, Channel Spacing: 25 kHz

Modulation: FM modulation with 2.5 kHz Sine Wave Signal

Date: Jan. 22, 1999  
Tested by: Hung Trinh

STOP

2.500 GHz

ACTV DET: PEAK

MEAS DET: PEAK QP AVG

MKR 2.223 GHz

-30.31 dBm

No user  
Menu

REF OFFST 30.0 dB

REF 40.0 dBm

LOG

10

dB/


ATN

20 dB

MA SB

SC FC

CORR

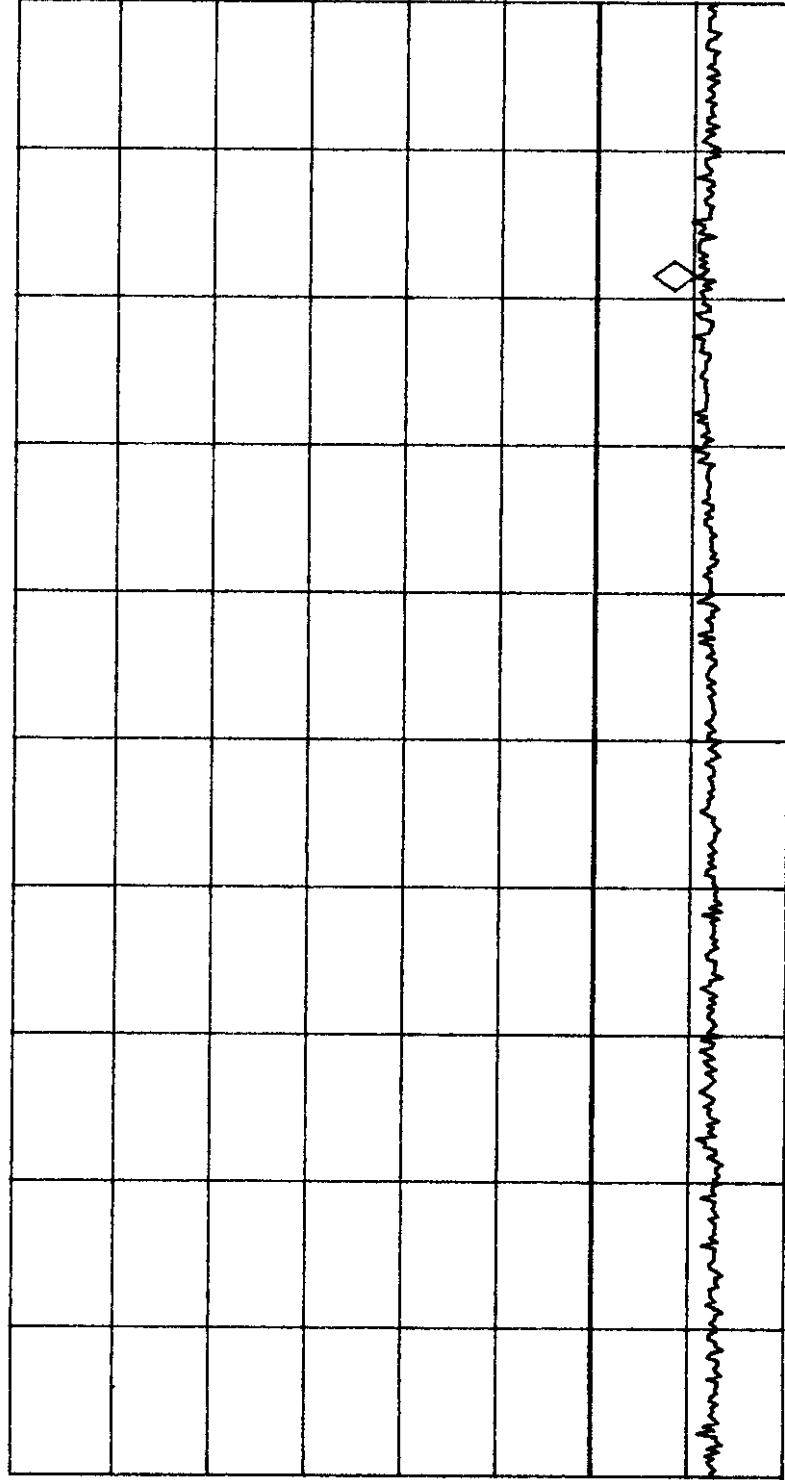

START 1.000 GHz

IF BW 120 kHz

AVG BW 300 kHz

STOP 2.500 GHz

SWP 313 msec




Date: Jan. 12, 1999  
Tested by: Hung Trinh

**TECHNISONIC INDUSTRIES LTD.**  
VHF/UHF AIRBORNE TRANSCEIVER, MODEL TFM-500  
Frequency: 150 MHz, Power Rating: 100 W, Channel Spacing: 25 kHz  
Modulation: FM modulation with 2.5 kHz Sine Wave Signal

STOP  
5.000 GHz  
REF OFFST 30.0 dB  
REF 40.0 dBm  
LOG 10 dB/ ATN 20 dB  
MA SB  
SC FC  
CORR

ACTV DET: PEAK  
MEAS DET: PEAK QP AVG  
MKR 2.899 GHz  
-29.94 dBm

No user  
Menu

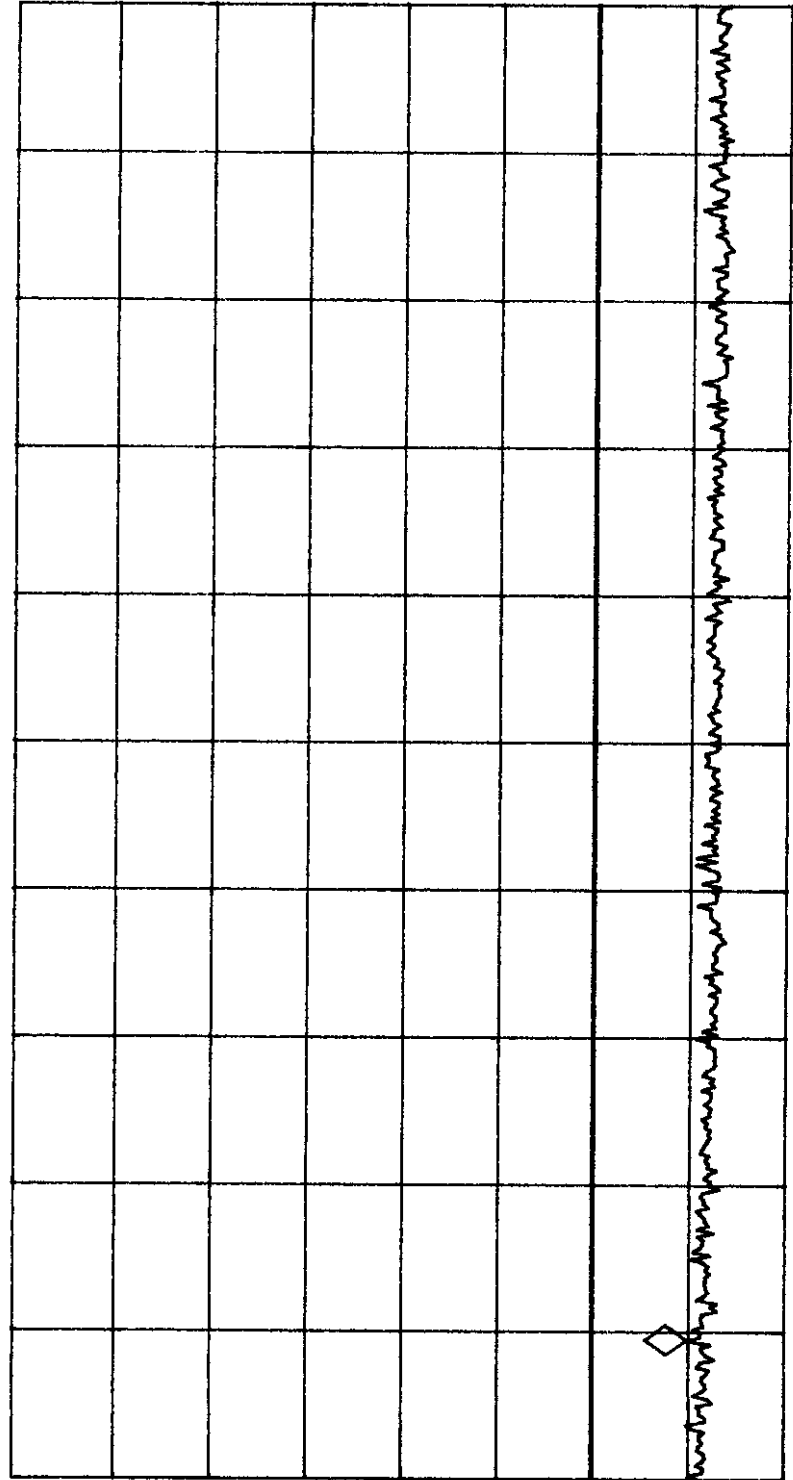

START 2.679 GHz  
IF BW 120 KHz  
AVG BW 300 KHz  
STOP 5.000 GHz  
SWP 484 msec




Date: Jan. 12, 1999  
Tested by: Hung Trinh

TECHNISONIC INDUSTRIES LTD.  
VHF/UHF AIRBORNE TRANSCEIVER, MODEL TFM-500  
Frequency: 174 MHz, Power Rating: 20 W, Channel Spacing: 25 kHz  
Modulation: FM modulation with 2.5 kHz Sine Wave Signal

MARKER  
175.8 MHz  
38.67 dBm

ACTV DET: PEAK  
MEAS DET: PEAK QP AVG  
MKR 175.8 MHz  
38.67 dBm

No user  
Menu

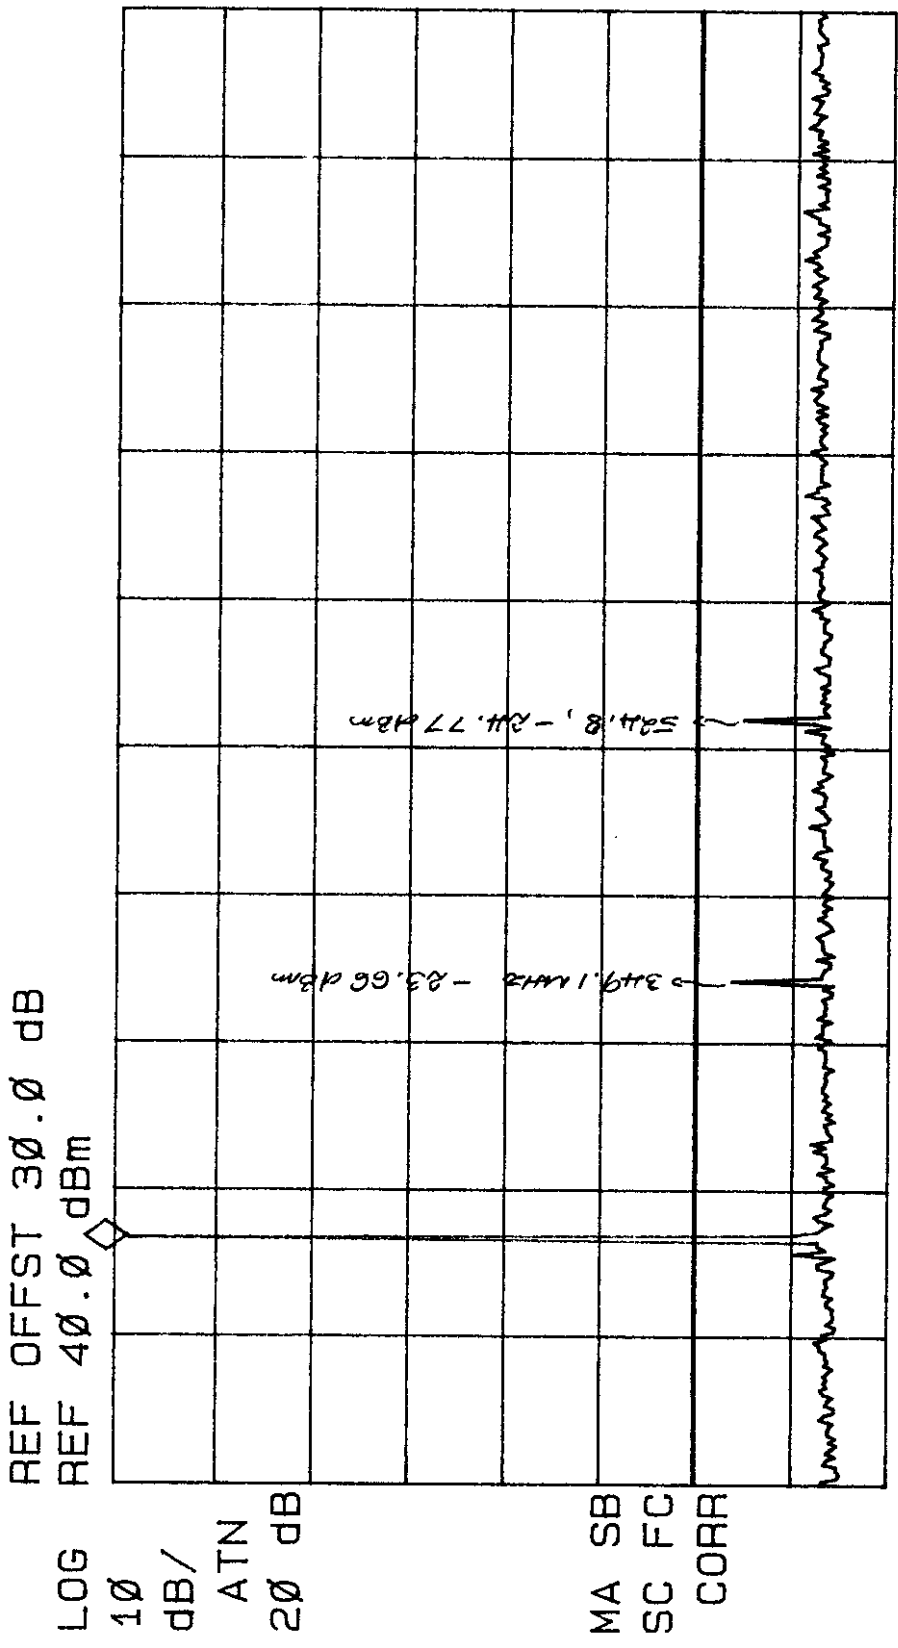

START 10.0 MHz  
IF BW 120 kHz  
STOP 1.0000 GHz  
AVG BW 300 kHz  
SWP 206 msec



UltraTech  
Engineering Labs Inc.

TECHNISONIC INDUSTRIES LTD.

VHF/UHF AIRBORNE TRANSCEIVER, MODEL TFM-500

Frequency: 174 MHz, Power Rating: 100 W, Channel Spacing: 25 kHz

Modulation: FM modulation with 2.5 kHz Sine Wave Signal

Date: Jan. 12, 1999  
Tested by: Hung Trinh

REF LEVEL

40.0 dBm

ACTV DET: PEAK

MEAS DET: PEAK QP AVG

No USER  
Menu

MKR 1.840 GHZ

-30.28 dBm

REF OFFST 30.0 dB

REF 40.0 dBm


LOG

10

dB/

ATN

20 dB

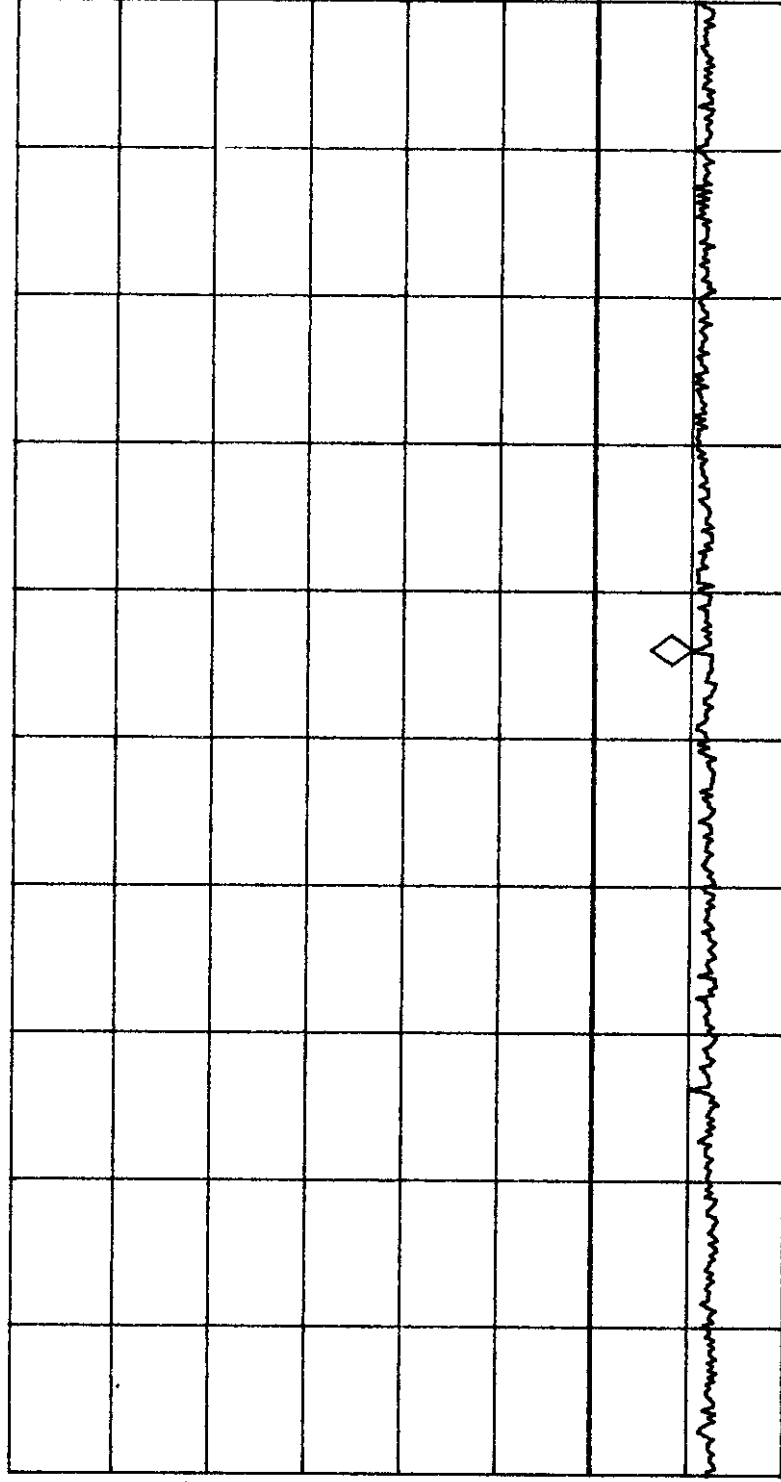

MA SB

SC FC

CORR

START 1.000 GHZ

IF BW 120 KHZ

AVG BW 300 KHZ

STOP 2.500 GHZ

SWP 313 msec



TECHNISONIC INDUSTRIES LTD.  
VHF/UHF AIRBORNE TRANSCEIVER, MODEL TFM-500  
Frequency: 174 MHz, Power Rating: 100 W, Channel Spacing: 25 kHz  
Modulation: FM modulation with 2.5 kHz Sine Wave Signal

Date: Jan. 22, 1999  
Tested by: Hung Trinh

STOP

5.000 GHZ

ACTV DET: PEAK

No user

MEAS DET: PEAK QP AVG

Menu

MKR 2.760 GHZ

-30.32 dBm

REF OFFST 30.0 dB

REF 40.0 dBm


LOG

10

dB/

ATN

20 dB

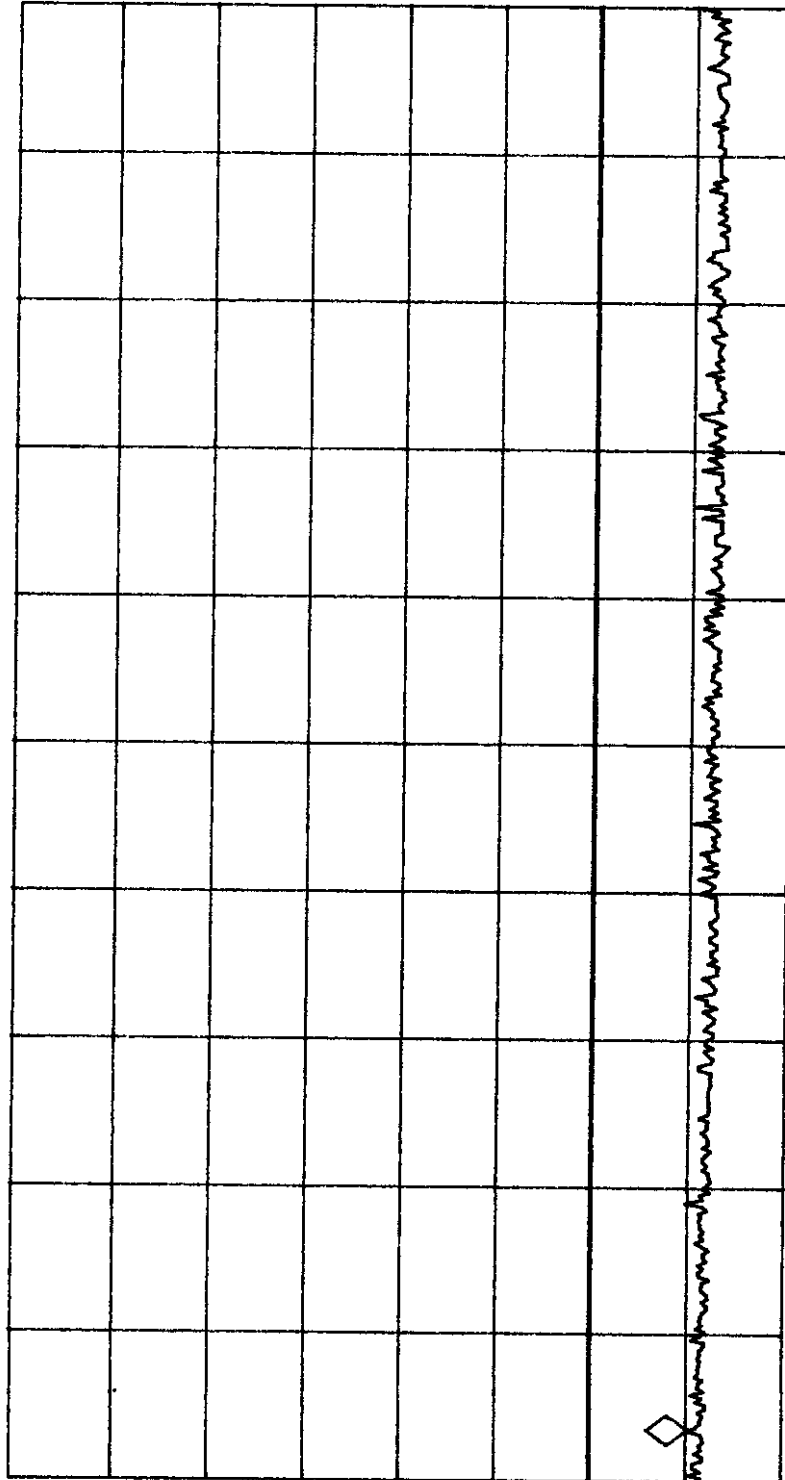

MA SB

SC FC

CORR

START 2.679 GHZ

IF BW 120 KHZ

AVG BW 300 KHZ

STOP 5.000 GHZ

SWP 484 msec

STOP

1.0000 GHz

ACTV DET: PEAK


MEAS DET: PEAK QP AVG

No user  
Menu

MKR 408.5 MHz  
38.44 dBm

REF OFFST 30.0 dB  
REF 40.0 dBm

LOG 10  
dB/  
ATN  
20 dB

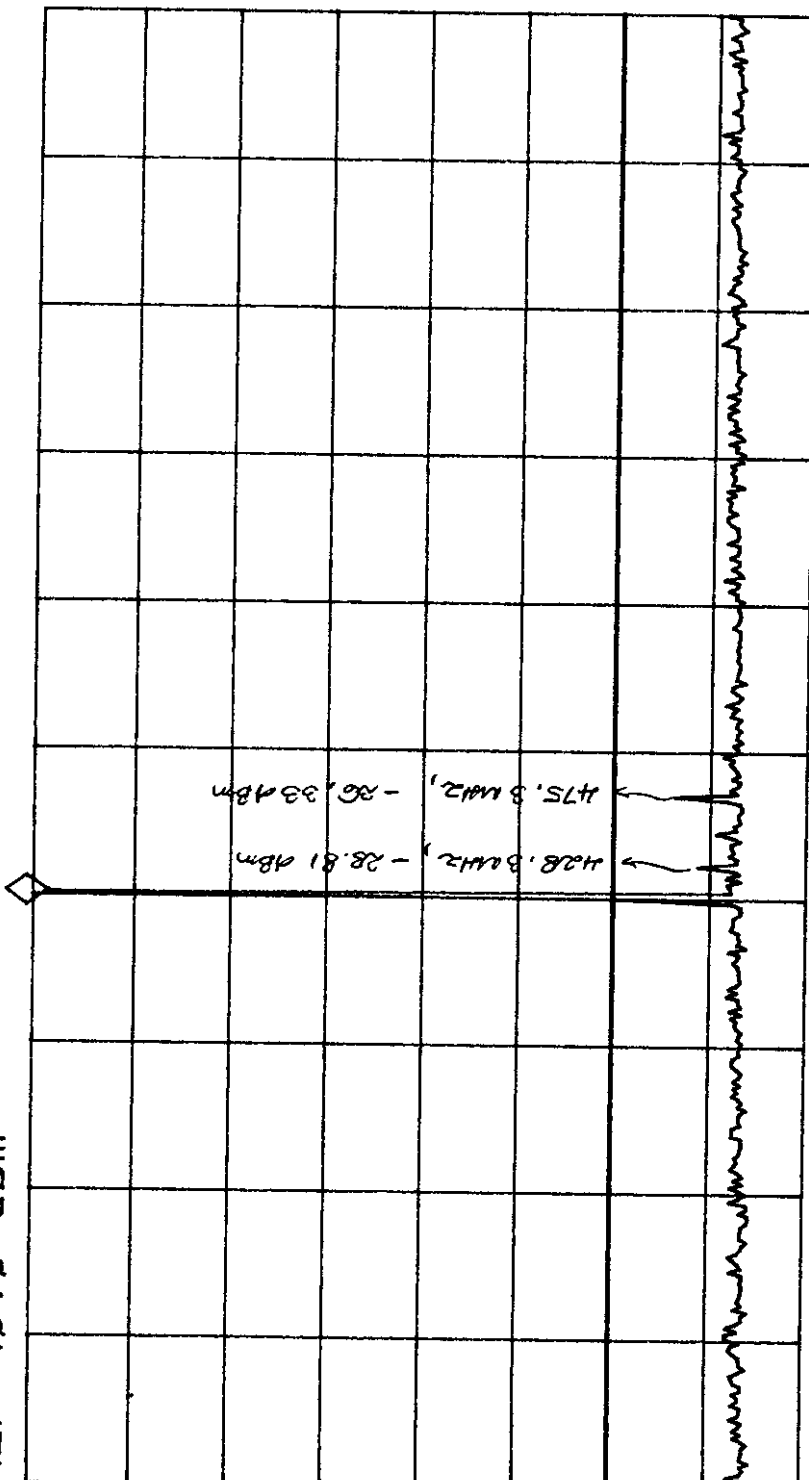

MA SB  
SC FC  
CORR

START 10.0 MHz

IF BW 120 kHz

AVG BW 300 kHz

STOP 1.0000 GHz

SWP 200 msec



UltraTech  
Engineering Labs Inc.

TECHNISONIC INDUSTRIES LTD.

VHF/UHF AIRBORNE TRANSCEIVER, MODEL TFM-500

Frequency: 406.135 MHz, Power Rating: 10.0 W, Channel Spacing: 25 kHz

Modulation: FM modulation with 2.5 kHz Sine Wave Signal

Date: Jan. 12, 1999  
Tested by: Hung Trinh

STOP

2.500 GHz

ACTV DET: PEAK

MEAS DET: PEAK QP AVG

No user  
Menu

MKR 1.221 GHz

-26.26 dBm

REF OFFST 30.0 dB

REF 40.0 dBm


LOG

10

dB/

ATN

20 dB

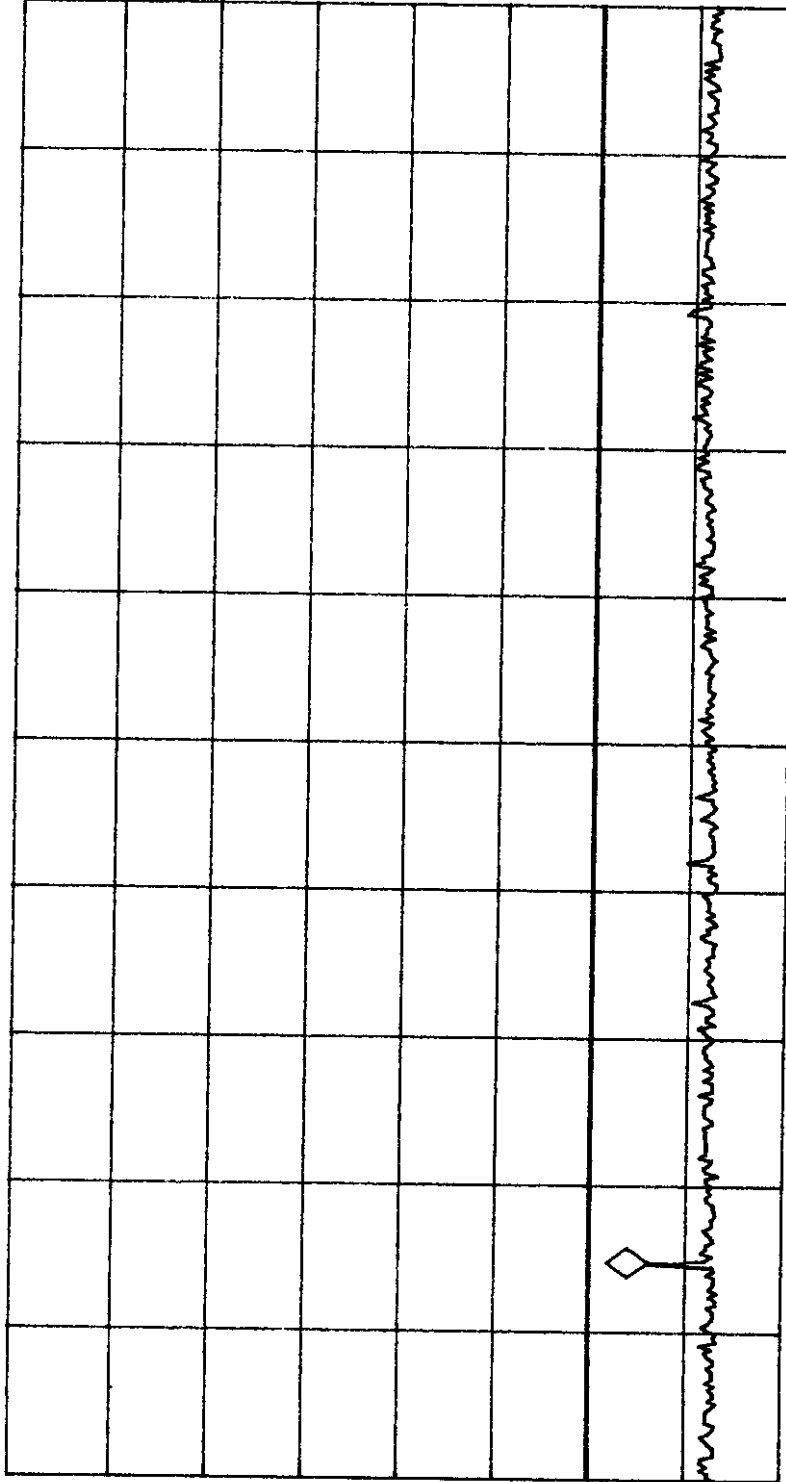

MA SB

SC FC

CORR

START 1.000 GHz

IF BW 120 KHz

AVG BW 300 KHz

STOP 2.500 GHz

SWP 313 msec





Date: Jan. 22, 1999  
Tested by: Hung Trinh

TECHNISONIC INDUSTRIES LTD.  
VHF/UHF AIRBORNE TRANSCEIVER, MODEL TFM-500  
Frequency: 406.125 MHz, Power Rating: 0.0 W, Channel Spacing: 25 kHz  
Modulation: FM modulation with 2.5 kHz Sine Wave Signal


STOP  
5.000 GHz

ACTV DET: PEAK  
MEAS DET: PEAK QP AVG  
MKR 2.847 GHz  
-27.19 dBm

No user  
Menu

REF OFFST 30.0 dB  
REF 40.0 dBm

LOG 10  
dB/  
ATN  
20 dB

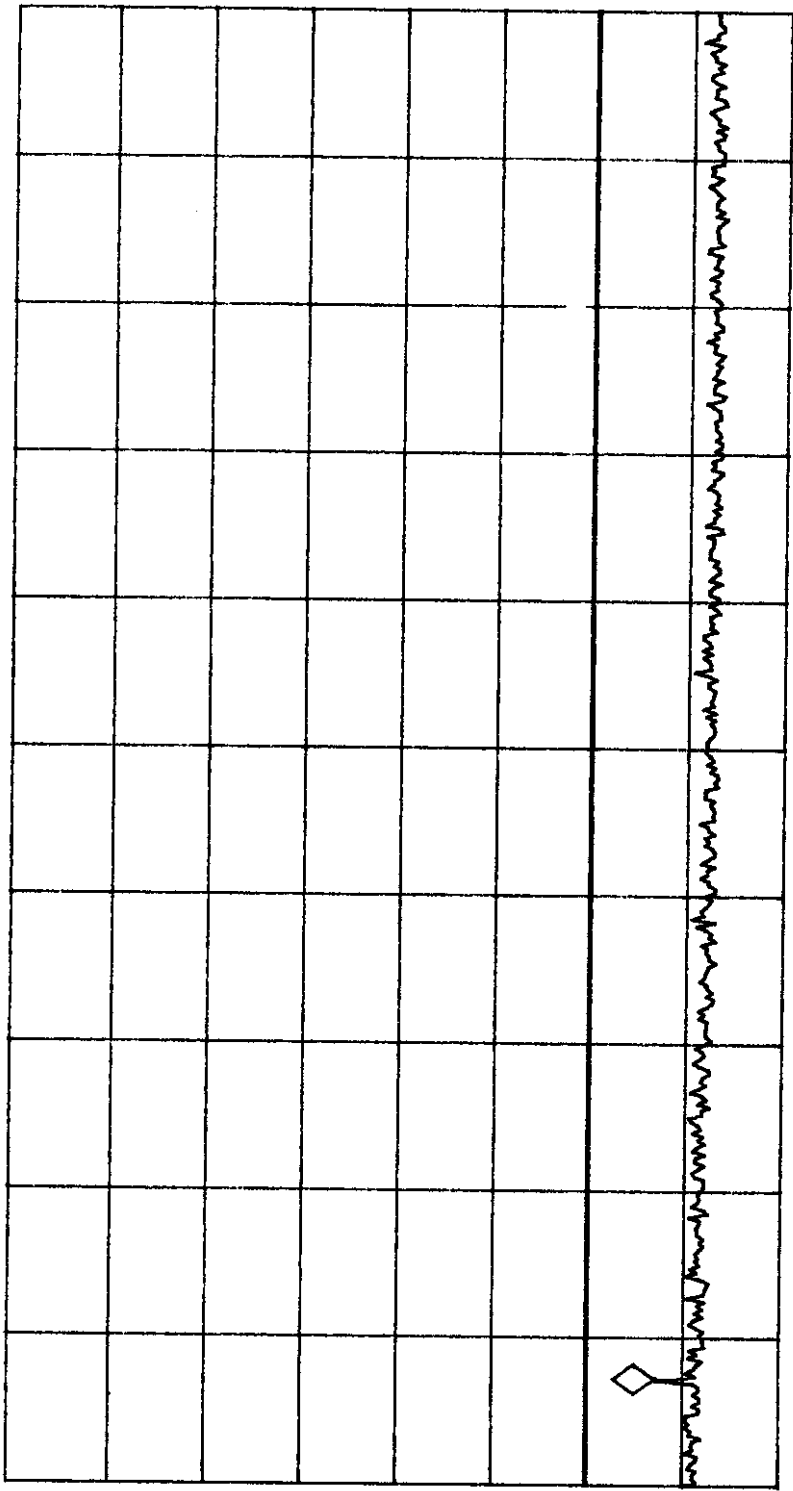

MA SB  
SC FC  
CORR


START 2.679 GHz  
IF BW 120 kHz  
STOP 5.000 GHz  
AVG BW 300 kHz  
SWP 484 msec



Date: Jan. 22, 1999  
Tested by: Hung Trinh

TECHNISONIC INDUSTRIES LTD.  
VHF/UHF AIRBORNE TRANSCEIVER, MODEL TFM-500  
Frequency: 450 MHz, Power Rating: 100 W, Channel Spacing: 25 kHz  
Modulation: FM modulation with 2.5 kHz Sine Wave Signal

REF LEVEL 40.0 dBm  
ACTV DET: PEAK  
MEAS DET: PEAK QP AVG  
MKR 453.0 MHz  
38.46 dBm

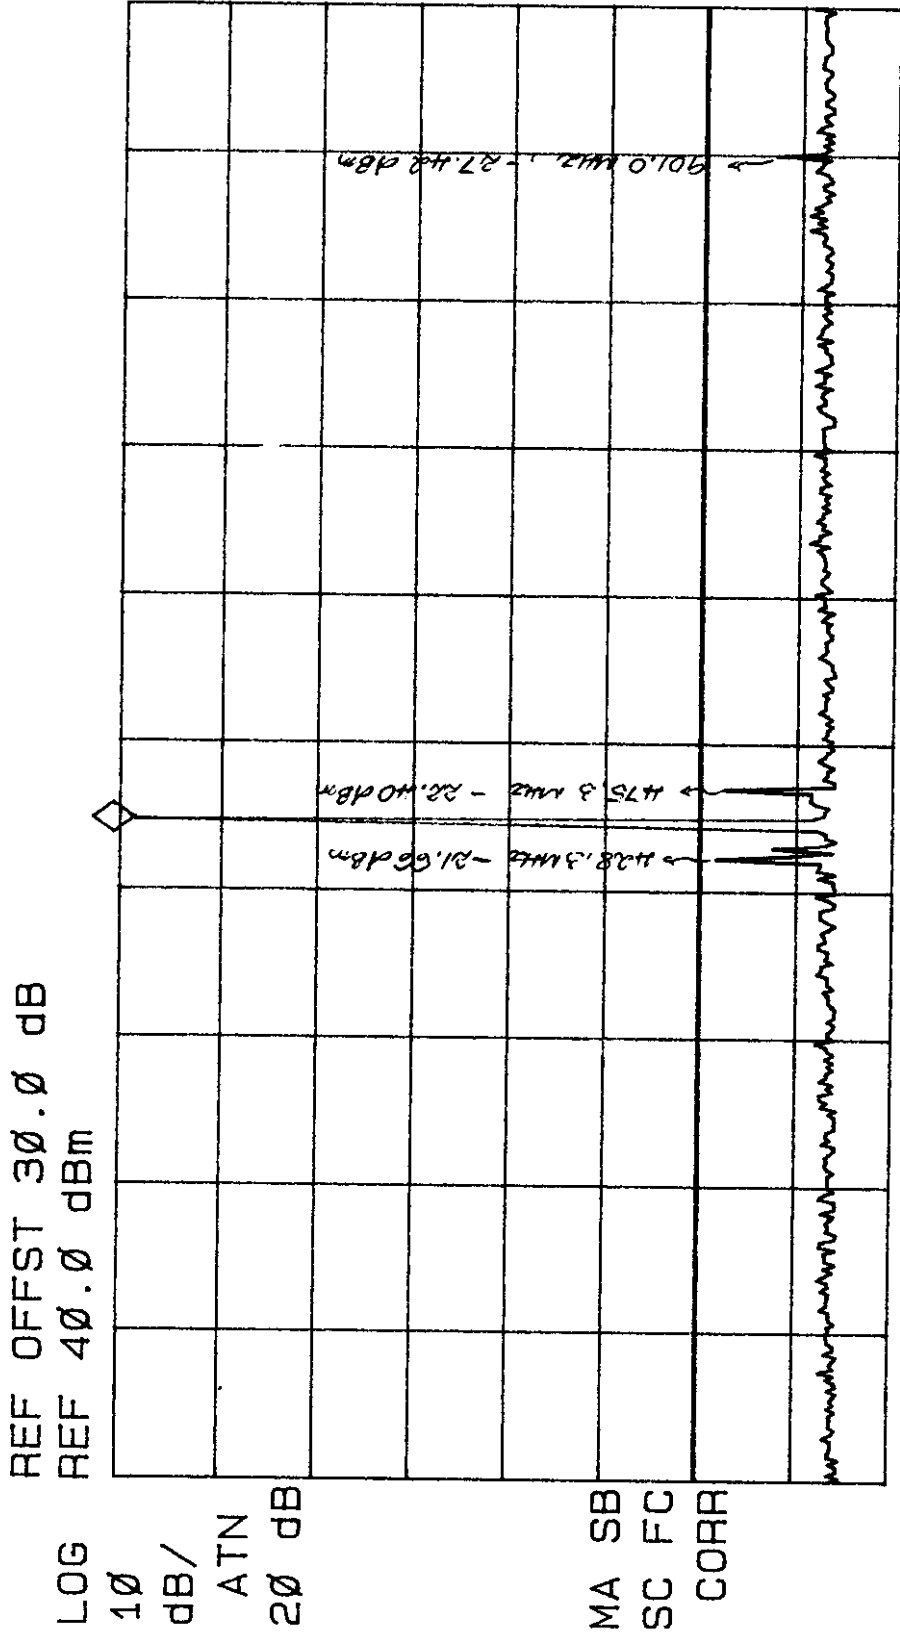

START 10.0 MHz  
IF BW 120 kHz  
STOP 1.0000 GHz  
AVG BW 300 kHz  
SWP 206 msec



UltraTech  
Engineering Labs Inc.

TECHNISONIC INDUSTRIES LTD.

VHF/UHF AIRBORNE TRANSCEIVER, MODEL TFM-500

Frequency: 4450 MHz, Power Rating: 17.0 W, Channel Spacing: 25 kHz

Modulation: FM modulation with 2.5 kHz Sine Wave Signal

Date: Jan. 12, 1999  
Tested by: Hung Trinh

STOP

2.500 GHz

ACTV DET: PEAK

MEAS DET: PEAK QP AVG

No user  
Menu

MKR 1.353 GHz

-26.97 dBm

REF OFFST 30.0 dB

REF 40.0 dBm

LOG

10

dB/


ATN

20 dB

MA SB

SC FC

CORR

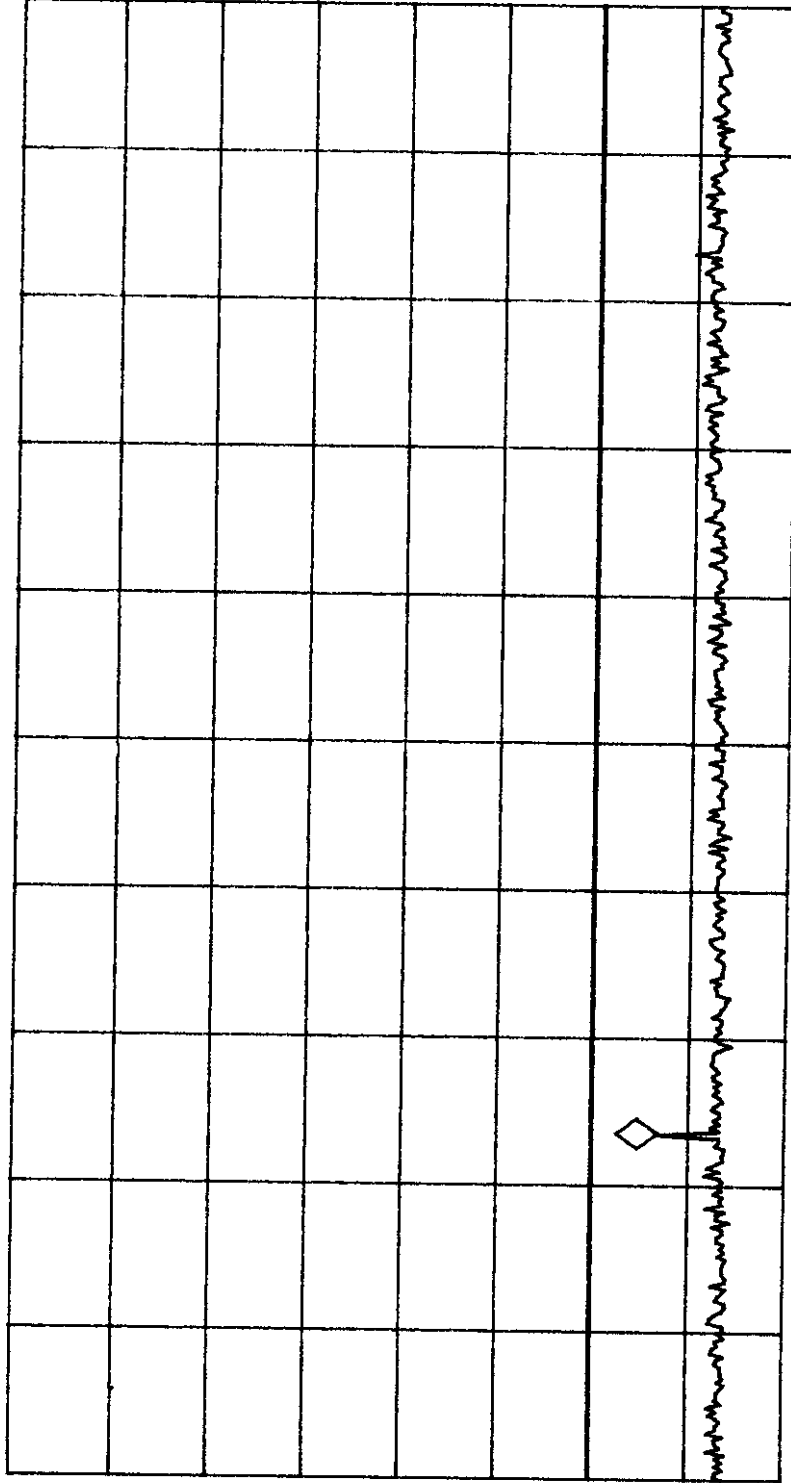

START 1.000 GHz

IF BW 120 kHz

AVG BW 300 kHz

STOP 2.500 GHz

SWP 313 msec



UltraTech  
Engineering Labs Inc.

TECHNISONIC INDUSTRIES LTD.

VHF/UHF AIRBORNE TRANSCEIVER, MODEL TFM-500

Frequency: 450 MHz, Power Rating: 10.0 W, Channel Spacing: 25 kHz

Modulation: FM modulation with 2.5 kHz Sine Wave Signal

Date: Jan. 12, 1999  
Tested by: Hung Trinh

STOP

5.000 GHz

ACTV DET: PEAK

MEAS DET: PEAK QP AVG

No user  
Menu

MKR 2.702 GHz

-27.66 dBm

REF OFFST 30.0 dB

REF 40.0 dBm


LOG

10

dB/

ATN

20 dB

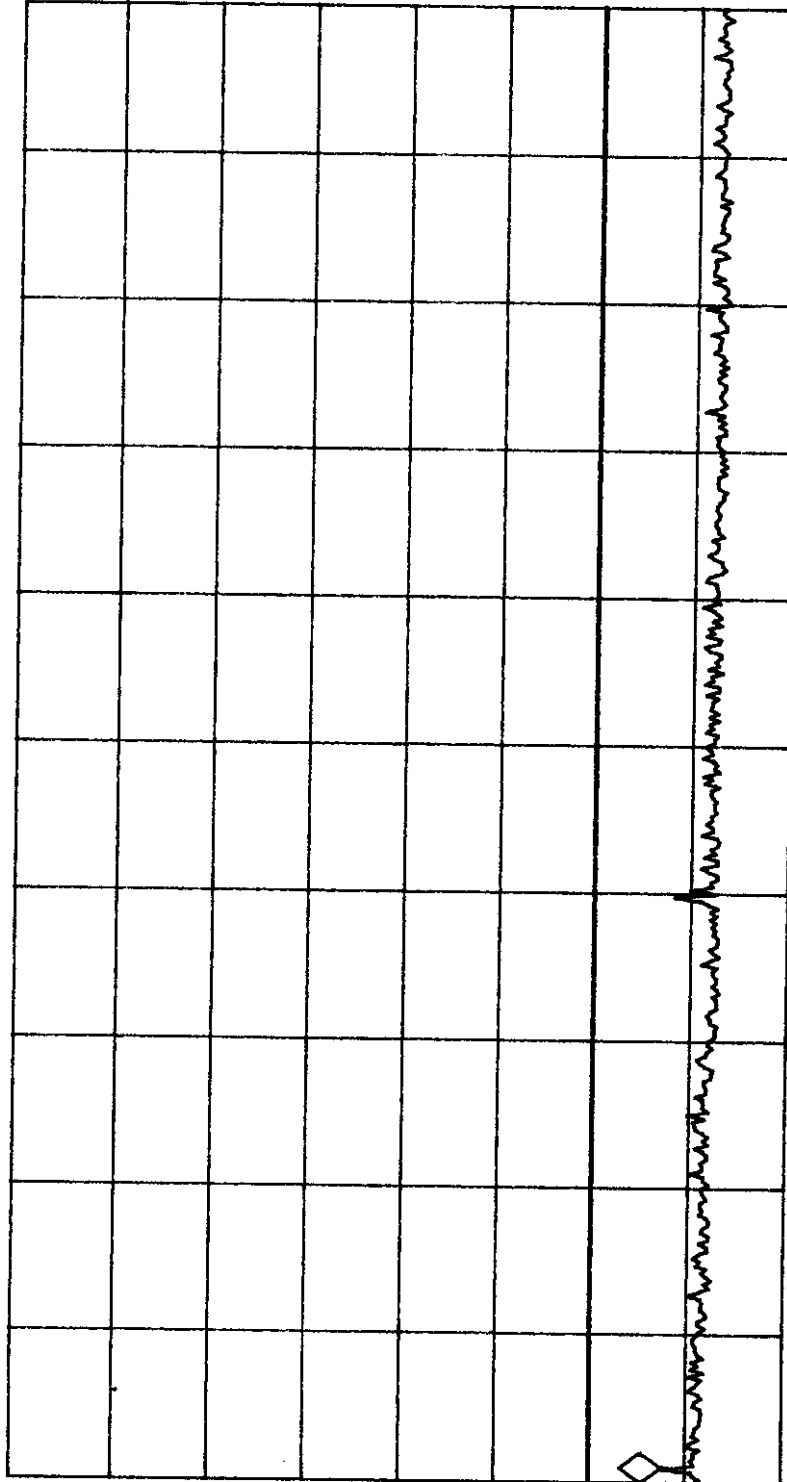

MA SB

SC FC

CORR

START 2.679 GHz

IF BW 120 kHz

AVG BW 300 kHz

STOP 5.000 GHz

SWP 484 msec



UltraTech  
Engineering Labs Inc.

TECHNISONIC INDUSTRIES LTD.

VHF/UHF AIRBORNE TRANSCEIVER, MODEL TFM-500

Frequency: 470 MHz, Power Rating: 100 W, Channel Spacing: 25 kHz

Modulation: FM modulation with 2.5 kHz Sine Wave Signal

Date: Jan. 22, 1999  
Tested by: Hung Trinh

STOP

1.00000 GHz

ACTV DET: PEAK

MEAS DET: PEAK QP AVG

No user  
Menu

MKR 472.8 MHz

38.53 dBm

REF OFFST 30.0 dB

REF 40.0 dBm

LOG

10

dB/


ATN

20 dB

MA SB

SC FC

CORR

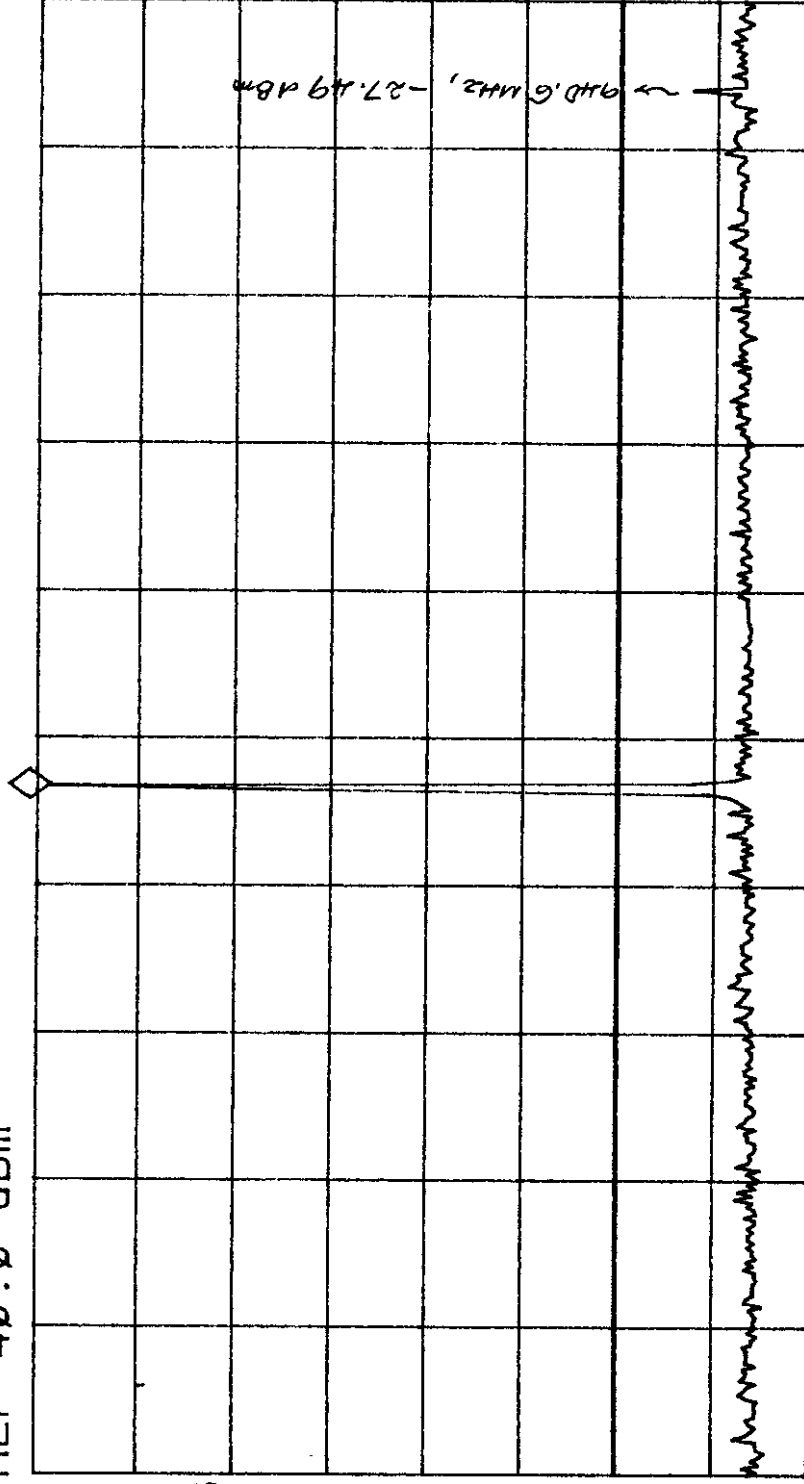

START 10.0 MHz

IF BW 120 kHz

AVG BW 300 kHz

STOP 1.00000 GHz

SWP 206 msec



UltraTech  
Engineering Labs Inc.

TECHNISONIC INDUSTRIES LTD.

VHF/UHF AIRBORNE TRANSCIEVER, MODEL TFM-500

Frequency: 470 MHz, Power Rating: 10.0 W, Channel Spacing: 25 kHz  
Modulation: FM modulation with 2.5 kHz Sine Wave Signal

Date: Jan. 12, 1999  
Tested by: Hung Trinh

STOP

2.500 GHz

ACTV DET: PEAK

MEAS DET: PEAK QP AVG

No user  
Menu

MKR 1.413 GHz  
-20.84 dBm

REF OFFST 30.0 dB

REF 40.0 dBm

LOG

10

dB/


ATN

20 dB

MA SB

SC FC

CORR

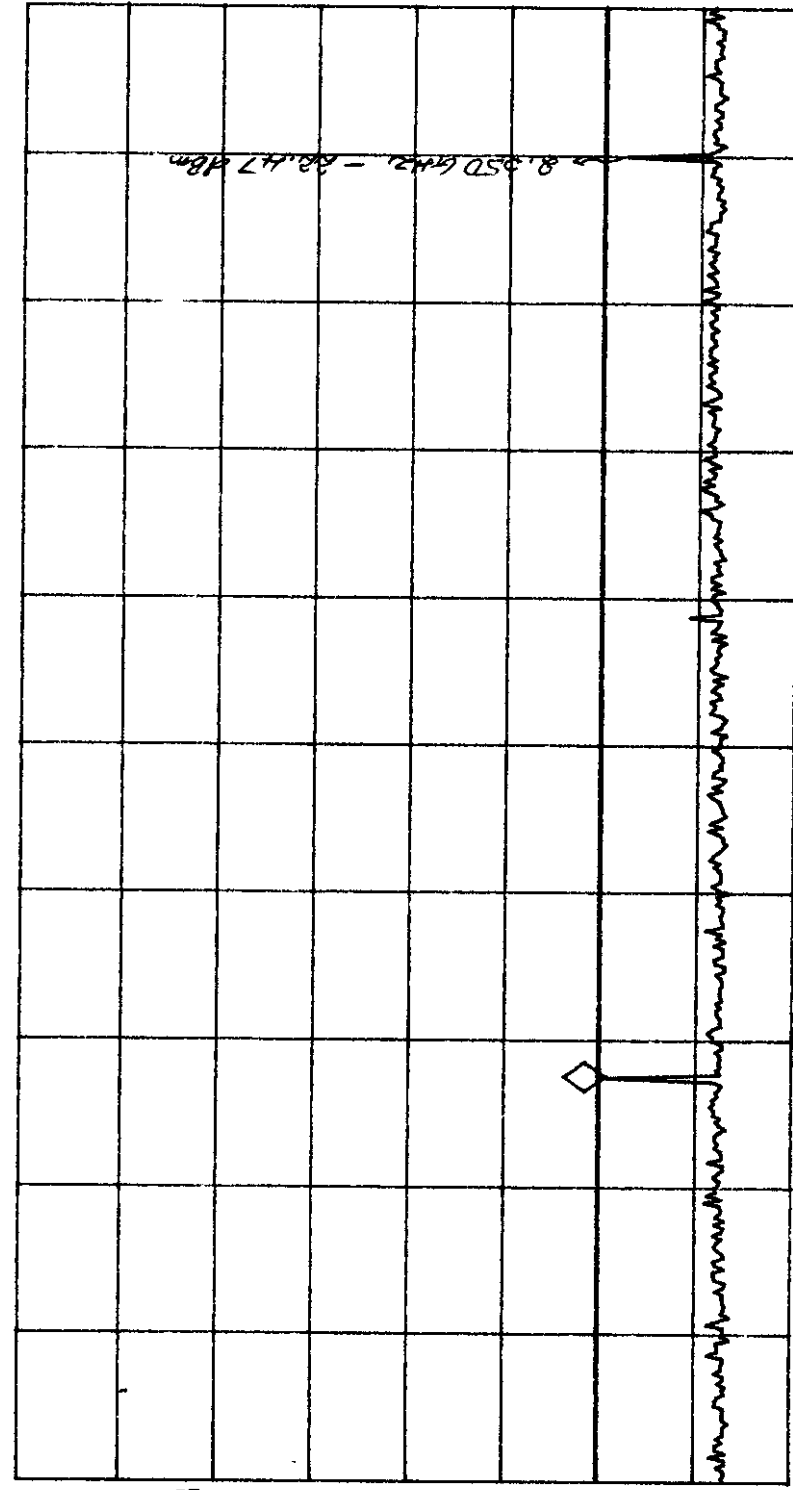

START 1.000 GHz

IF BW 120 kHz

AVG BW 300 kHz

STOP 2.500 GHz

SWP 313 msec



**VHF/UHF AIRBORNE TRANSCEIVER, MODEL TFM-500**

Frequency: 470 MHz, Power Rating: 10.0 W, Channel Spacing: 25 kHz  
Modulation: FM modulation with 2.5 kHz Sine Wave Signal

top

5.000 GHz

~~ACTV DET: PEAK~~

MEAS DET: PEAK GP AVG

MKR 3.764 GHz

-25.44 dBm

REF OFFST 30.0 dB

REF 40.0 dbm

507

10

db/


Z  
T  
A

20

MA  
SB

၁၆၁၈

COR

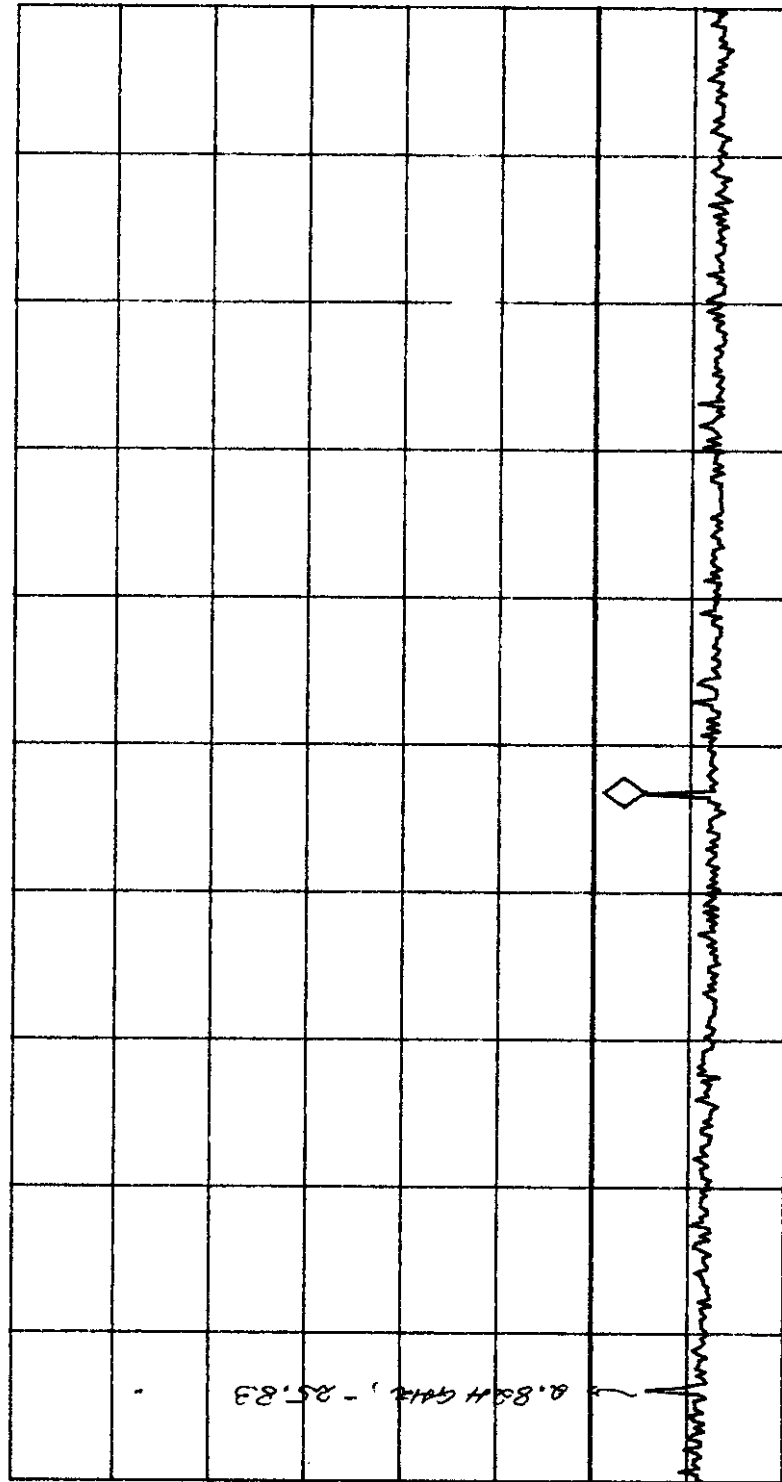

START 2.679 GHz

IF BW 120 KHZ

AVG BW 300 KHZ

STOP 5.000 GHz

SWP 484 msec

Version

## Menu

Date: Jan. 12, 1999  
Tested by: Hung Trinh

## 4.7. TRANSMITTER SPURIOUS/HARMONIC RADIATED EMISSIONS @ FCC 90.210

**PRODUCT NAME:** VHF/UHF FM MOBILE TRANSCEIVER,  
Model No.: TFM-500

### FCC REQUIREMENTS:

FCC Part 90, Sub. I, Para. 90.210

Emissions shall be attenuated below the mean output power of the transmitter as follows:

FREQUENCY RANGE (MHz)	Recommended OBW (KHz)	CHANNEL SPACING (KHz)	Recommended FREQ. DEVIATION (KHz)	FCC SPECIFICATION LIMITS (Para. No.)
150-174 / 403-512	20	25.0	5.0	90.210(b): Mask B – Audio & Voice
150-174 / 403-512	10	12.5	2.5	90.210(d): Mask D – Audio & Voice

FCC RULES	FREQUENCY RANGE	ATTENUATION LIMIT (dBc)
Worst Case: 90.210(d): Mask D – Voice	Lowest frequency generated from the transmitter circuit to 10 <sup>th</sup> harmonic of the fundamental frequency	Worst Case: $50 + 10\log_{10}(P)$ or 70 dB whichever is less

### CLIMATE CONDITION:

Standard Temperature and Humidity:

- Ambient temperature: 21 °C
- Relative humidity: 43%

### POWER INPUT:

28 Vdc.

### TEST EQUIPMENT:

1. EMI Receiver System/Spectrum Analyzer, Hewlett Packard, Model 8546A, Input +25dBm max., 9KHz-5.6GHz, 50 Ohms, built-in Peak, Quasi-Peak & Average Detectors, Pre-Amplifier and Tracking Signal Generator. This System includes: (1) HP 85460A RF Filter Section, S/N: 3448A00236 and (2) HP 85462A Receiver RF Section/Display, S/N: 3520A00248.
2. Spectrum Analyzer, Advantest, Model R3271, S/N: 15050203, 100 Hz to 32 GHz)
3. Microwave Amplifier, HP, Model 83017A, Frequency Range 1 to 22GHz, 30dB gain nominal, low noise floor type.
4. Active Loop Antenna, Emco, Model 6502, SN 9104-2611, Frequency Range 1 KHz - 30 MHz, @ 50 Ohms.
5. BiconiLog Antenna, Emco, Model 3142, SN 10005, 30-2000 MHz @ 50 Ohms.
6. Log Periodic Antenna, AH System, Model SAS-200/518, SN: 343, Frequency Range: 1GHz-18GHz.

### ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: [vhk.ultratech@sympatico.ca](mailto:vhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: TIL10FT  
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



7. FCC Listed Open Field Test Site.
8. Audio Oscillator, HP, Model 204C, SN: 0989A08798, Output: 0-1.2 MHz, 5 Vrms.

9. **METHOD OF MEASUREMENTS:**

Refer to ANSI 63.4, Para. 8 for detailed radiated emissions measurement procedures.

With transmitter modulation characteristics described in Out-of-Band Emissions measurements @ 2.989, the transmitter spurious and harmonic emissions were scanned. The spurious and harmonic emissions were measured with the Spectrum Analyzer controls set as RBW = 100 kHz, VBW = 100 kHz and SWEEP TIME = AUTO). The transmitter was operated at a full rated power output, and modulated as follows:

**FCC CFR 47, Para. 2.997 - Frequency spectrum to be investigated**

The spectrum was investigated from the lowest radio generated in the equipment up to at least the 10<sup>th</sup> harmonic of the carrier frequency or to the highest frequency practicable in the present state of the art of measuring techniques, whichever is lower. Particular attention should be paid to harmonics and subharmonics of the carrier frequency. Radiation at the frequencies of multiplier stages should be checked. The amplitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be reported.

**FCC CFR 47, Para. 2.993 - Field Strength Spurious Emissions**

- (a) Measurements was made to detect spurious emissions radiated directly from the cabinet, control circuits, power leads, or intermediate circuit elements under normal conditions of installation and operation. Curves or equivalent data were supplied showing the magnitude of each harmonic and other spurious emission. For this test, single sideband, independent sideband, and controlled carrier transmitters shall be modulated under the conditions specified in paragraph 2.989(c) as appropriate. For equipment operating on frequencies below 1 GHz, an Open Field Test is normally required, with the measuring instrument antenna located in the far field at all test frequencies. In event it is either impractical or impossible to make open field measurements (e.g. a broadcast transmitter installed in a building) measurement will be accepted of the equipment as installed. Such measurements must be accompanied by a description of the site where the measurements were made showing the location of any possible source of reflections which might distort the field strength measurements. Information submitted shall include the relative radiated power of each spurious emission with the reference to the rated power output of the transmitter, assuming all emissions are radiated from half-wave dipole antennas.
- (b) Measurements specified in paragraph (a) of this section shall be made for the following equipment:
  - (1) Those in which the spurious emission are required to be 60 dB or more below the mean power of the transmitter.
  - (2) All equipment operating on frequencies higher than 25 MHz
  - (3) All equipment where the antenna is an integral part of, and attached directly to the transmitter.
  - (4) Other types of equipment as required, when deemed necessary by the Commission.

**ULTRATECH GROUP OF LABS**

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: TIL10FT  
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

**METHOD OF CALCULATION FOR TRANSMITTED POWER (P) FROM THE MEASURED FIELD STRENGTH LEVEL (E):**

According to IEC 801-3, the power density can be calculated as follows:

$$S = P / (4\pi D^2) \quad \text{Where: } S: \text{ Power density in watts per square meter}$$

$P$ : Transmitted power in watts  
 $\pi$ : 3.1415  
 $D$ : Distance in meters

The power density  $S$  ( $\text{W/m}^2$ ) and electric field  $E$  ( $\text{V/m}$ ) is related by:

$$S = E^2 / (120\pi)$$

Accordingly, the field intensity of isotropic radiator in free space can be expressed as follows:

$$E = (30\sqrt{P}) / D = 5.5\sqrt{P} / D$$

For Halfwave dipole antenna or other antennas correlated to dipole in direction of maximum radiation:

$$S = (1.64\sqrt{P}) / (4\pi D^2)$$
$$E = (49.2\sqrt{P}) / D = 7.01\sqrt{P} / D$$

$$P = (E \times D / 7.01)^2$$

Calculation of transmitted power  $P$  (dBm) given a measured field intensity  $E$  (dBuV/m):

$$\begin{aligned} P(W) &= [E(V/m) \times D / 7.01]^2 \\ P(mW) &= P(W) \times 1000 \\ \Rightarrow P(dBm) &= 10\log P(mW) \\ &= 20\log E(V/m) + 20\log(D) - 20\log(7.01) + 10\log 1000 \\ &= E(dBV/m) + 20\log D + 13 \\ &= E(dBuV/m) - 120 + 20\log(D) + 13 \\ &= E(dBuV/m) + 20\log(D) - 107 \end{aligned}$$

The Transmitted Power @  $D = 3$  Meters

$$P(dBm) = E(dBuV/m) - 97.5$$

**TEST RESULTS:** Conforms.

**TESTED PERSONNEL:** Hung Trinh, RFI Technician

**DATE:** January 13, 1999

**ULTRATECH GROUP OF LABS**

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: [vhk.ultratech@sympatico.ca](mailto:vhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: TIL10FT  
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## MEASUREMENT DATA

### RADIATED EMISSIONS MEASUREMENTS @ 3 METERS

#### TEST CONFIGURATION

- The channel frequencies (Low, Middle and High ) was established at its full rated output power. The emissions was investigated up to the tenth harmonic of the fundamental emissions in each case. the measured level of the carrier was recorded and compared to the level of the emissions as required in Part 90.238(a). The absolute level of each emission shall not be greater than -20 dBm.
- For measuring radiated emissions at frequencies below 1 GHz, the Spectrum Analyzer was set as 100 kHz RBW, 100 KHz VBW, SWEEP TIME: AUTO, PEAK DETECTOR.
- For measuring radiated emissions at frequencies above 1 GHz, the Spectrum Analyzer was set as 1 MHz RBW, 1 MHz VBW, SWEEP TIME: AUTO, PEAK DETECTOR.
- All rf emissions from the lowest frequency generated by the transmitter ( ... ) upto the 10<sup>th</sup> harmonic of fundamental were scanned, and only emissions less than 20 dB below the limits (-20 dBm) were recorded.

\* **Remark:** Since the only difference between 12.5 kHz and 25 kHz Channel Spacing operation is the adjustment of frequency deviation limiter (only can be done by software), tests was done with 25 kHz Channel Spacing operation and the results were compared against the limits for 12.5 kHz Channel Spacing operation to represent the worst case.

Fundamental Frequency: 138 MHz, 25 kHz Channel Spacing							
RF Output Power: 10 Watts							
Modulation: FM modulation with 2.5 kHz Sine Wave Signal, Freq. Dev. = 3.9 kHz.							
FREQUENCY (MHz)	RF LEVEL (dBuV/m)	RF LEVEL (dBm)	DETECTOR USED (PEAK/QP)	ANTENNA PLANE (H/V)	* LIMIT (dBm)	MARGIN (dB)	PASS/ FAIL
276.0	32.9	-64.6	PEAK	V	-20.0	-44.6	PASS
276.0	34.3	-63.2	PEAK	H	-20.0	-43.2	PASS
414.0	34.7	-62.8	PEAK	V	-20.0	-42.8	PASS
414.0	33.6	-63.9	PEAK	H	-20.0	-43.9	PASS
552.0	38.8	-58.7	PEAK	V	-20.0	-38.7	PASS
552.0	38.6	-58.9	PEAK	H	-20.0	-38.9	PASS
690.0	39.0	-58.5	PEAK	V	-20.0	-38.5	PASS
690.0	41.1	-56.4	PEAK	H	-20.0	-36.4	PASS
828.0	32.3	-65.2	PEAK	V	-20.0	-45.2	PASS
828.0	31.7	-65.8	PEAK	H	-20.0	-45.8	PASS
966.0	54.7	-42.8	PEAK	V	-20.0	-22.8	PASS
966.0	52.3	-45.3	PEAK	H	-20.0	-25.3	PASS
1104.0	54.3	-43.2	PEAK	V	-20.0	-23.2	PASS
1104.0	49.4	-48.1	PEAK	H	-20.0	-28.1	PASS
1242.0	54.6	-42.9	PEAK	V	-20.0	-22.9	PASS
1242.0	53.1	-44.4	PEAK	H	-20.0	-24.4	PASS
1380.0	65.7	-31.8	PEAK	V	-20.0	-11.8	PASS
1380.0	57.6	-39.9	PEAK	H	-20.0	-19.9	PASS
No other significant rf radiated emissions from the transmitter were found in the frequency band from 10 MHz to 1380 MHz. All other emissions must be more than 40 dB below the FCC limits.							

#### ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: TIL10FT

Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Fundamental Frequency: 150 MHz, 25 kHz Channel Spacing							
RF Output Power: 10 Watts							
Modulation: FM modulation with 2.5 kHz Sine Wave Signal, Freq. Dev. = 3.9 kHz.							
FREQUENCY (MHz)	RF LEVEL (dBuV/m)	RF LEVEL (dBm)	DETECTOR USED (PEAK/QP)	ANTENNA PLANE (H/V)	*LIMIT (dBm)	MARGIN (dB)	PASS/ FAIL
300.0	37.1	-60.4	PEAK	V	-20.0	-40.4	PASS
300.0	36.9	-60.6	PEAK	H	-20.0	-40.6	PASS
450.0	34.7	-62.8	PEAK	V	-20.0	-42.8	PASS
450.0	33.1	-64.4	PEAK	H	-20.0	-44.4	PASS
600.0	48.8	-48.7	PEAK	V	-20.0	-28.7	PASS
600.0	43.8	-53.8	PEAK	H	-20.0	-33.8	PASS
750.0	41.7	-55.8	PEAK	V	-20.0	-35.8	PASS
750.0	48.1	-49.4	PEAK	H	-20.0	-29.4	PASS
900.0	37.7	-59.8	PEAK	V	-20.0	-39.8	PASS
900.0	35.7	-61.8	PEAK	H	-20.0	-41.8	PASS
1050.0	55.1	-42.4	PEAK	V	-20.0	-22.4	PASS
1050.0	47.0	-50.5	PEAK	H	-20.0	-30.5	PASS
1200.0	60.8	-36.7	PEAK	V	-20.0	-16.7	PASS
1200.0	51.5	-46.0	PEAK	H	-20.0	-26.0	PASS
1350.0	59.3	-38.2	PEAK	V	-20.0	-18.2	PASS
1350.0	59.6	-37.9	PEAK	H	-20.0	-17.9	PASS
1500.0	58.5	-39.0	PEAK	V	-20.0	-19.0	PASS
1500.0	53.8	-43.7	PEAK	H	-20.0	-23.7	PASS
No other significant rf radiated emissions from the transmitter were found in the frequency band from 10 MHz to 1500 MHz. All other emissions must be more than 40 dB below the FCC limits.							

# ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: [vhk.ultratech@sympatico.ca](mailto:vhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: TIL10FT  
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Fundamental Frequency: 174 MHz, 25 kHz Channel Spacing							
RF Output Power: 10 Watts							
Modulation: FM modulation with 2.5 kHz Sine Wave Signal, Freq. Dev. = 3.9 kHz.							
FREQUENCY (MHz)	RF LEVEL (dBuV/m)	RF LEVEL (dBm)	DETECTOR USED (PEAK/QP)	ANTENNA PLANE (H/V)	*LIMIT (dBm)	MARGIN (dB)	PASS/ FAIL
348.0	38.8	-58.7	PEAK	V	-20.0	-38.7	PASS
348.0	36.3	-61.3	PEAK	H	-20.0	-41.3	PASS
522.0	43.3	-54.2	PEAK	V	-20.0	-34.2	PASS
522.0	38.4	-59.1	PEAK	H	-20.0	-39.1	PASS
696.0	35.1	-62.4	PEAK	V	-20.0	-42.4	PASS
696.0	34.8	-62.7	PEAK	H	-20.0	-42.7	PASS
870.0	44.6	-52.9	PEAK	V	-20.0	-32.9	PASS
870.0	40.2	-57.3	PEAK	H	-20.0	-37.3	PASS
1044.0	57.4	-40.1	PEAK	V	-20.0	-20.1	PASS
1044.0	50.7	-46.8	PEAK	H	-20.0	-26.8	PASS
1218.0	60.3	-37.2	PEAK	V	-20.0	-17.2	PASS
1218.0	54.3	-43.2	PEAK	H	-20.0	-23.2	PASS
1392.0	66.9	-30.6	PEAK	V	-20.0	-10.6	PASS
1392.0	60.8	-36.7	PEAK	H	-20.0	-16.7	PASS
1566.0	52.8	-44.7	PEAK	V	-20.0	-24.7	PASS
1566.0	50.7	-46.8	PEAK	H	-20.0	-26.8	PASS
1740.0	48.4	-49.1	PEAK	V	-20.0	-29.1	PASS
1740.0	46.6	-50.9	PEAK	H	-20.0	-30.9	PASS
No other significant rf radiated emissions from the transmitter were found in the frequency band from 10 MHz to 1740 MHz. All other emissions must be more than 40 dB below the FCC limits.							

# ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: [vhk.ultratech@sympatico.ca](mailto:vhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: TIL10FT  
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Fundamental Frequency: 406.125 MHz, 25 kHz Channel Spacing							
RF Output Power: 10 Watts							
Modulation: FM modulation with 2.5 kHz Sine Wave Signal, Freq. Dev. = 3.9 kHz.							
FREQUENCY (MHz)	RF LEVEL (dBuV/m)	RF LEVEL (dBm)	DETECTOR USED (PEAK/QP)	ANTENNA PLANE (H/V)	*LIMIT (dBm)	MARGIN (dB)	PASS/ FAIL
812.3	29.5	-68.0	PEAK	V	-20.0	-48.0	PASS
812.3	30.6	-66.9	PEAK	H	-20.0	-46.9	PASS
1218.4	54.9	-42.6	PEAK	V	-20.0	-22.6	PASS
1218.4	51.0	-46.5	PEAK	H	-20.0	-26.5	PASS
1624.5	54.3	-43.2	PEAK	V	-20.0	-23.2	PASS
1624.5	52.7	-44.8	PEAK	H	-20.0	-24.8	PASS
2030.6	64.0	-33.5	PEAK	V	-20.0	-13.5	PASS
2030.6	64.4	-33.1	PEAK	H	-20.0	-13.1	PASS
2436.8	61.0	-36.5	PEAK	V	-20.0	-16.5	PASS
2436.8	59.9	-37.6	PEAK	H	-20.0	-17.6	PASS
2842.9	54.3	-43.2	PEAK	V	-20.0	-23.2	PASS
2842.9	55.1	-42.4	PEAK	H	-20.0	-22.4	PASS
3249.0	66.2	-31.3	PEAK	V	-20.0	-11.3	PASS
3249.0	72.4	-25.1	PEAK	H	-20.0	-5.1	PASS
3655.1	61.0	-36.5	PEAK	V	-20.0	-16.5	PASS
3655.1	69.1	-28.4	PEAK	H	-20.0	-8.4	PASS
4061.3	49.9	-47.6	PEAK	V	-20.0	-27.6	PASS
4061.3	72.8	-24.7	PEAK	H	-20.0	-4.7	PASS
No other significant rf radiated emissions from the transmitter were found in the frequency band from 10 MHz to 4061.3 MHz. All other emissions must be more than 40 dB below the FCC limits.							

# ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: [vhk.ultratech@sympatico.ca](mailto:vhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: TIL10FT  
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Fundamental Frequency: 450 MHz, 25 kHz Channel Spacing							
RF Output Power: 10 Watts							
Modulation: FM modulation with 2.5 kHz Sine Wave Signal, Freq. Dev. = 3.9 kHz.							
FREQUENCY (MHz)	RF LEVEL (dBuV/m)	RF LEVEL (dBm)	DETECTOR USED (PEAK/QP)	ANTENNA PLANE (H/V)	*LIMIT (dBm)	MARGIN (dB)	PASS/ FAIL
900.0	48.8	-48.7	PEAK	V	-20.0	-28.7	PASS
900.0	48.6	-48.9	PEAK	H	-20.0	-28.9	PASS
1350.0	55.2	-42.3	PEAK	V	-20.0	-22.3	PASS
1350.0	53.4	-44.1	PEAK	H	-20.0	-24.1	PASS
1800.0	50.4	-47.1	PEAK	V	-20.0	-27.1	PASS
1800.0	49.1	-48.4	PEAK	H	-20.0	-28.4	PASS
2250.0	63.8	-33.7	PEAK	V	-20.0	-13.7	PASS
2250.0	58.6	-38.9	PEAK	H	-20.0	-18.9	PASS
2700.0	57.0	-40.5	PEAK	V	-20.0	-20.5	PASS
2700.0	58.4	-39.1	PEAK	H	-20.0	-19.1	PASS
3150.0	54.1	-43.4	PEAK	V	-20.0	-23.4	PASS
3150.0	58.2	-39.3	PEAK	H	-20.0	-19.3	PASS
3600.0	66.2	-31.3	PEAK	V	-20.0	-11.3	PASS
3600.0	75.2	-22.3	PEAK	H	-20.0	-2.3	PASS
4050.0	52.3	-45.2	PEAK	V	-20.0	-25.2	PASS
4050.0	50.7	-46.8	PEAK	H	-20.0	-26.8	PASS
No other significant rf radiated emissions from the transmitter were found in the frequency band from 10 MHz to 4050 MHz. All other emissions must be more than 40 dB below the FCC limits.							

# ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: TIL10FT  
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Fundamental Frequency: 470 MHz, 25 kHz Channel Spacing							
RF Output Power: 10 Watts							
Modulation: FM modulation with 2.5 kHz Sine Wave Signal, Freq. Dev. = 3.9 kHz.							
FREQUENCY (MHz)	RF LEVEL (dBuV/m)	RF LEVEL (dBm)	DETECTOR USED (PEAK/QP)	ANTENNA PLANE (H/V)	*LIMIT (dBm)	MARGIN (dB)	PASS/ FAIL
940.0	56.0	-41.5	PEAK	V	-20.0	-21.5	PASS
940.0	55.3	-42.3	PEAK	H	-20.0	-22.3	PASS
1410.0	53.9	-43.6	PEAK	V	-20.0	-23.6	PASS
1410.0	54.0	-43.5	PEAK	H	-20.0	-23.5	PASS
1880.0	60.7	-36.8	PEAK	V	-20.0	-16.8	PASS
1880.0	62.0	-35.5	PEAK	H	-20.0	-15.5	PASS
2350.0	67.5	-30.0	PEAK	V	-20.0	-10.0	PASS
2350.0	67.0	-30.5	PEAK	H	-20.0	-10.5	PASS
2820.0	56.7	-40.8	PEAK	V	-20.0	-20.8	PASS
2820.0	53.8	-43.7	PEAK	H	-20.0	-23.7	PASS
3290.0	68.5	-29.0	PEAK	V	-20.0	-9.0	PASS
3290.0	73.4	-24.1	PEAK	H	-20.0	-4.1	PASS
3760.0	69.0	-28.5	PEAK	V	-20.0	-8.5	PASS
3760.0	74.8	-22.7	PEAK	H	-20.0	-2.7	PASS
4230.0	51.9	-45.6	PEAK	V	-20.0	-25.6	PASS
4230.0	54.2	-43.3	PEAK	H	-20.0	-23.3	PASS
4700.0	54.7	-42.8	PEAK	V	-20.0	-22.8	PASS
4700.0	56.1	-41.4	PEAK	H	-20.0	-21.4	PASS
No other significant rf radiated emissions from the transmitter were found in the frequency band from 10 MHz to 4700 MHz. All other emissions must be more than 40 dB below the FCC limits.							

**Note:** The transmitter radiated emissions measurements were also pre-scans with the transmitter operated in 12.5 kHz channel-spacing configuration and the results were found to be identical with those operates in 25 kHz spacing configuration.

#### ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2

Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: [vhk.ultratech@sympatico.ca](mailto:vhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: TIL10FT

Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



## 4.8. TRANSIENT FREQUENCY BEHAVIOR

**PRODUCT NAME:** VHF/UHF FM MOBILE TRANSCEIVER,  
Model No.: TFM-500

### FCC REQUIREMENTS:

FCC Part 90, Sub. I, Para. 90.214

Transient frequencies must be within the maximum frequency difference limits during the time intervals indicated:

		All Equipment	
Time Interval <sup>1,2</sup>	Maximum Frequency Difference <sup>3</sup>	150 to 174 MHz	421 to 512 MHz
Transient Frequency behavior for Equipment Designed to Operate on 25 kHz Channels			
t <sub>1</sub> <sup>4</sup>	± 25.0 kHz	5.0 ms	10.0 ms
t <sub>2</sub>	± 12.5 kHz	20.0 ms	25.0 ms
t <sub>3</sub> <sup>4</sup>	± 25.0 kHz	5.0 ms	10.0 ms
Transient Frequency behavior for Equipment Designed to Operate on 12.5 kHz Channels			
t <sub>1</sub> <sup>4</sup>	± 12.5 kHz	5.0 ms	10.0 ms
t <sub>2</sub>	± 6.25 kHz	20.0 ms	25.0 ms
t <sub>3</sub> <sup>4</sup>	± 12.5 kHz	5.0 ms	10.0 ms

- (1)  $t_{on}$ : the instant when a 1 KHz test signal is completely suppressed, including any capture time due to phasing.  
 $t_1$ : time period immediately after  $t_{on}$   
 $t_2$ : time period after  $t_1$   
 $t_3$ : time period from the instant when the transmitter is turned off until  $t_{off}$   
 $t_{off}$ : the instant when the 1 KHz test signal starts to rise.
- (2) During the time from the end of  $t_2$  to the beginning of  $t_3$ , the frequency difference must not exceed the limits specified in @ 90.213
- (3) Difference between the actual transmitter frequency and assigned transmitter frequency.
- (4) If the transmitter carrier output power rating is 6 watts or less, the frequency difference during this time period may exceed the maximum frequency difference for this time period.

### CLIMATE CONDITION:

Standard Temperature and Humidity:

- Ambient temperature: 21 °C
- Relative humidity: 43%

### POWER INPUT:

28 Vdc.


- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

### TEST EQUIPMENT:

- 1) **RF Synthesized RF Signal Generator**, Fluke, Model 6061A, frequency range 10KHz-1050MHz, power output 13dBm max.
- 2) **Communication Analyzer (Test Receiver)**, Rohde & Schwarz, SMFP2, SN 879988/047, 0.4-1000 MHz, including SINAD, S/N, Modulation meters, AF & RF signal generators and etc....
- 3) **Network Combiner**, Minicircuit, P/N: 15542 (7dB loss)
- 4) **Digital Storage Oscilloscope**, by Phillips, model 3320A, SN DQ 646.
- 5) **67297 RF Detector**, by Herotex, P/N: DZ122-553, S/N: 63400

### METHOD OF MEASUREMENTS:

Refer to ANSI/TIA/EIA - 603 - 1992, Sec. 2.2.19, Page 83

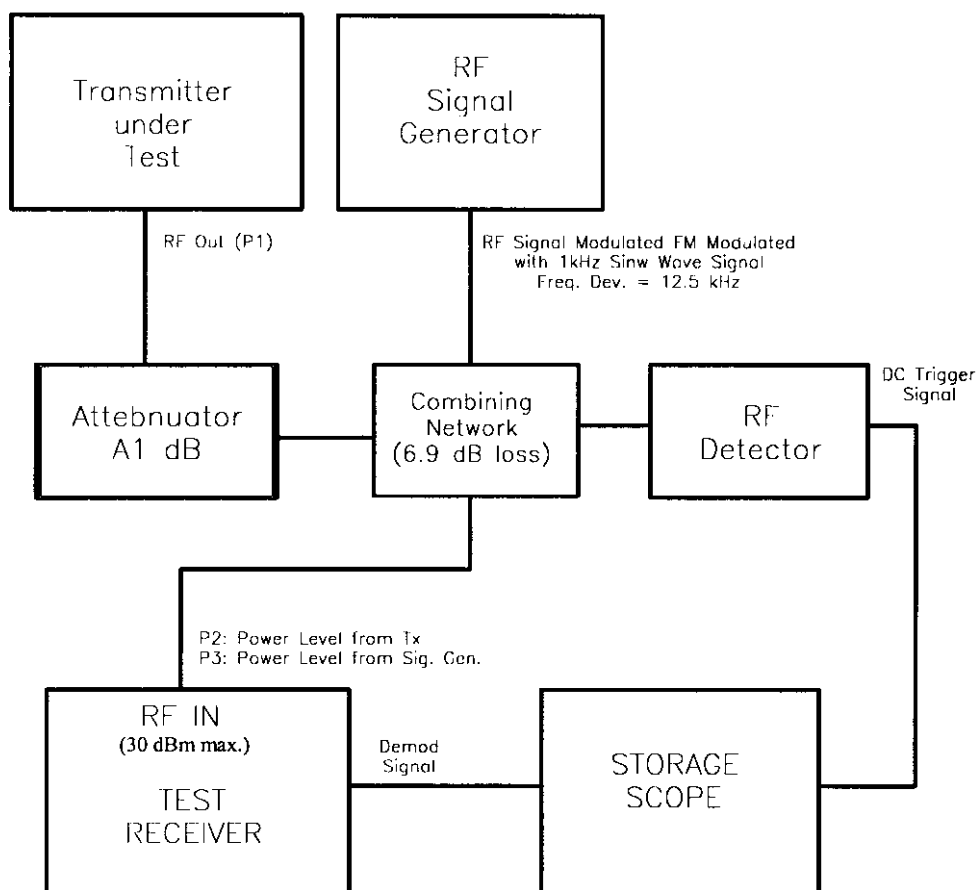

### ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: [vhk.ultratech@sympatico.ca](mailto:vhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: TIL10FT  
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

1. Connect the transmitter under tests as shown in the above block diagram
2. Set the signal generator to the assigned frequency and modulate with a 1 kHz tone at  $\pm 12.5$  kHz deviation and its output level to be 50 dB below the transmitter rf output at the test receiver end.
3. Set the horizontal sweep rate on the storage scope to 10 milliseconds per division and adjust the display to continuously view the 1000 Hz tone from the Demodulator Output Port (DOP) of the Test Receiver. Adjust the vertical scale amplitude control of the scope to display the 1000 Hz at  $\pm 4$  divisions vertical Center at the display.
4. Adjust the scope so it will trigger on an increasing magnitude from the RF trigger signal of the transmitter under test when the transmitter was turned on. Set the controls to store the display.
5. The output at the DOP, due to the change in the ratio of the power between the signal generator input power and transmitter output power will, because of the capture effect of the test receiver, produce a change in display: For the first part of the sweep it will show the 1 kHz test signal. Then once the receiver's demodulator has been captured by the transmitter power, the display will show the frequency difference from the assigned frequency to the actual transmitter frequency versus time. The instant when the 1 kHz test signal is completely suppressed (including any capture time due to phasing) is considered to be  $t_{on}$ . The trace should be maintained within the allowed divisions during the period  $t_1$  and  $t_2$ .
6. During the time from the end of  $t_2$  to the beginning of  $t_3$  the frequency difference should not exceed the limits set by the FCC in Part 90.214 and the outlined in the Carrier Frequency Stability sections. The allowed limit is equal to the transmitter frequency times its FCC frequency tolerance times  $\pm 4$  display divisions divided by 25 kHz (eg. at transmitter assigned frequency of 406 MHz, limit =  $406 \times 0.0015 \times 4 / 12.5 = 0.02$  div.
7. Repeat the above steps when the transmitter was turned off for measuring  $t_3$ .

**TEST RESULTS:** Conforms.

**TESTED PERSONNEL:** Tri M. Luu, P.Eng.

**DATE:** January 27, 1999

---

**ULTRATECH GROUP OF LABS**

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: TIL10FT  
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## MEASUREMENT DATA

Attenuator A1 = 20 dB

Measured Transmitter RF Output P1: 40 dBm

Measured Transmitter RF Output P2 @ Standard Test Receiver (Max. RF IN: 30 dBm): 13 dBm

Measured Signal generator Output P3 @ Standard Test Receiver (Max. RF IN: 30 dBm): -37 dBm

### Test Configuration # 1: VHF Radio, 12.5kHz Channeling, Unmodulated.

Time Interval	Transient Frequency	Transient Frequency Limit
t1 (5 mS) SWITCH ON CONDITION	-3.9 kHz	12.5 kHz
t2 (20 mS) SWITCH ON CONDITION	-5.1 kHz	6.25 kHz
After t2 (20 mS) SWITCH ON CONDITION	0	FCC Limit = $\pm 690$ Hz (0.0005% @138 MHz)
Before t3 (20 mS) SWITCH OFF CONDITION	0	FCC Limit = $\pm 690$ Hz (0.0005% @ 138 MHz)
t3 (5 mS) SWITCH OFF CONDITION	0	12.5 kHz
<i>Please refer to attached plots for detailed measurements.</i>		

### Test Configuration # 2: VHF Radio, 12.5kHz Channeling, FM modulation with 2.5 kHz Sine Wave, Freq. Dev: 1.9 kHz

Time Interval	Transient Frequency	Transient Frequency Limit
t1 (5 mS) SWITCH ON CONDITION	+3.5 kHz	12.5 kHz
t2 (20 mS) SWITCH ON CONDITION	+5.9 kHz	6.25 kHz
After t2 (20 mS) SWITCH ON CONDITION	0	FCC Limit = $\pm 690$ Hz (0.0005% @138 MHz)
Before t3 (20 mS) SWITCH OFF CONDITION	0	FCC Limit = $\pm 690$ Hz (0.0005% @ 138 MHz)
t3 (5 mS) SWITCH OFF CONDITION	0	12.5 kHz
<i>Please refer to attached plots for detailed measurements.</i>		

## ULTRATECH GROUP OF LABS

4181 Stadelview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: TIL10FT  
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

**Test Configuration # 3: VHF Radio, 25kHz Channeling, Unmodulated.**

Time Interval	Transient Frequency	Transient Frequency Limit
t1 (5 mS) SWITCH ON CONDITION	-6.3 kHz	25 kHz
t2 (20 mS) SWITCH ON CONDITION	-10.2 kHz	12.5 kHz
After t2 (20 mS) SWITCH ON CONDITION	0	FCC Limit = $\pm 690$ Hz (0.0005% @138 MHz)
Before t3 (20 mS) SWITCH OFF CONDITION	0	FCC Limit = $\pm 690$ Hz (0.0005% @ 138 MHz)
t3 (5 mS) SWITCH OFF CONDITION	0	25 kHz
<i>Please refer to attached plots for detailed measurements.</i>		

**Test Configuration # 4: VHF Radio, 25 kHz Channeling, FM modulation with 2.5kHz Sine Wave,  
Freq. Dev.: 3.9kHz**

Time Interval	Transient Frequency	Transient Frequency Limit
t1 (5 mS) SWITCH ON CONDITION	-9.4 kHz	25 kHz
t2 (20 mS) SWITCH ON CONDITION	+3.9 kHz	12.5 kHz
After t2 (20 mS) SWITCH ON CONDITION	0	FCC Limit = $\pm 690$ Hz (0.0005% @138 MHz)
Before t3 (20 mS) SWITCH OFF CONDITION	0	FCC Limit = $\pm 690$ Hz (0.0005% @ 138 MHz)
t3 (5 mS) SWITCH OFF CONDITION	0	25 kHz
<i>Please refer to attached plots for detailed measurements.</i>		

**Test Configuration # 5: UHF Radio, 12.5 kHz Channeling, Unmodulated.**

Time Interval	Transient Frequency	Transient Frequency Limit
t1 (10 mS) SWITCH ON CONDITION	+5.5 kHz	12.5 kHz
t2 (25 mS) SWITCH ON CONDITION	+1.2 kHz	6.25 kHz
After t2 (25 mS) SWITCH ON CONDITION	0	FCC Limit = $\pm 1.015$ Hz (0.00025% @ 406.125 MHz)
Before t3 (25 mS) SWITCH OFF CONDITION	0	FCC Limit = $\pm 1.015$ Hz (0.00025% @ 406.125 MHz)
t3 (10 mS) SWITCH OFF CONDITION	0	12.5 kHz
<i>Please refer to attached plots for detailed measurements.</i>		

**ULTRATECH GROUP OF LABS**

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: TIL10FT

Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

**Test Configuration # 6: UHF Radio, 12.5 kHz Channeling, FM modulation with 2.5kHz Sine Wave,  
Freq. Dev.: 1.9kHz**

Time Interval	Transient Frequency	Transient Frequency Limit
t1 (10 mS) SWITCH ON CONDITION	+5.5 kHz	12.5 kHz
t2 (25 mS) SWITCH ON CONDITION	+1.6 kHz	6.25 kHz
After t2 (25 mS) SWITCH ON CONDITION	0	FCC Limit = $\pm 1.015$ Hz (0.00025% @ 406.125 MHz)
Before t3 (25 mS) SWITCH OFF CONDITION	0	FCC Limit = $\pm 1.015$ Hz (0.00025% @ 406.125 MHz)
t3 (10 mS) SWITCH OFF CONDITION	0	12.5 kHz
<i>Please refer to attached plots for detailed measurements.</i>		

**Test Configuration # 7: UHF Radio, 25 kHz Channeling, Unmodulated.**

Time Interval	Transient Frequency	Transient Frequency Limit
t1 (10 mS) SWITCH ON CONDITION	+4.7 kHz	25 kHz
t2 (25 mS) SWITCH ON CONDITION	+3.9 kHz	12.5 kHz
After t2 (25 mS) SWITCH ON CONDITION	0	FCC Limit = $\pm 1.015$ Hz (0.00025% @ 406.125 MHz)
Before t3 (25 mS) SWITCH OFF CONDITION	0	FCC Limit = $\pm 1.015$ Hz (0.00025% @ 406.125 MHz)
t3 (10 mS) SWITCH OFF CONDITION	0	25 kHz
<i>Please refer to attached plots for detailed measurements.</i>		

**ULTRATECH GROUP OF LABS**


4181 Siadeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: TIL10FT  
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

# OSCILLOSCOPE


VHF, 130MHz, 12.5 Channel Spacing, TX ON without Modulation

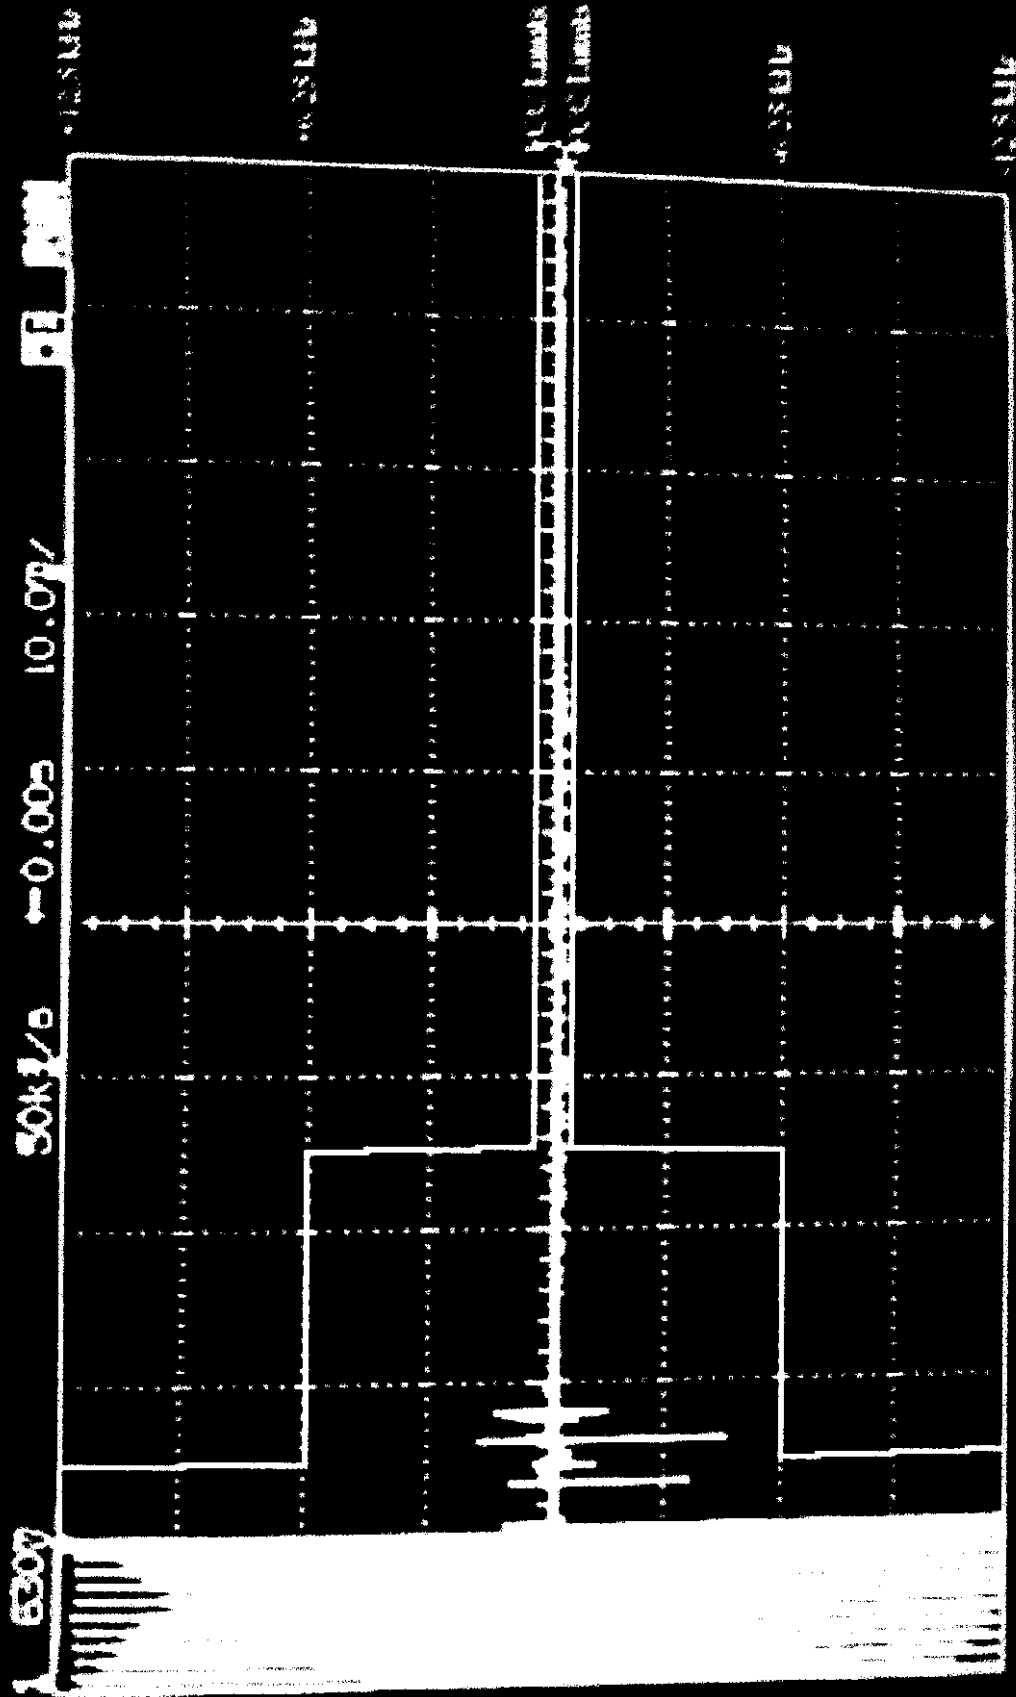

Slope ☐ f ☐ No 100 ReJ ☐ On

Reject ☐ LF ☐ H

VHF, 130MHz, 12.5 Channel Spacing, TX OFF without Modulation

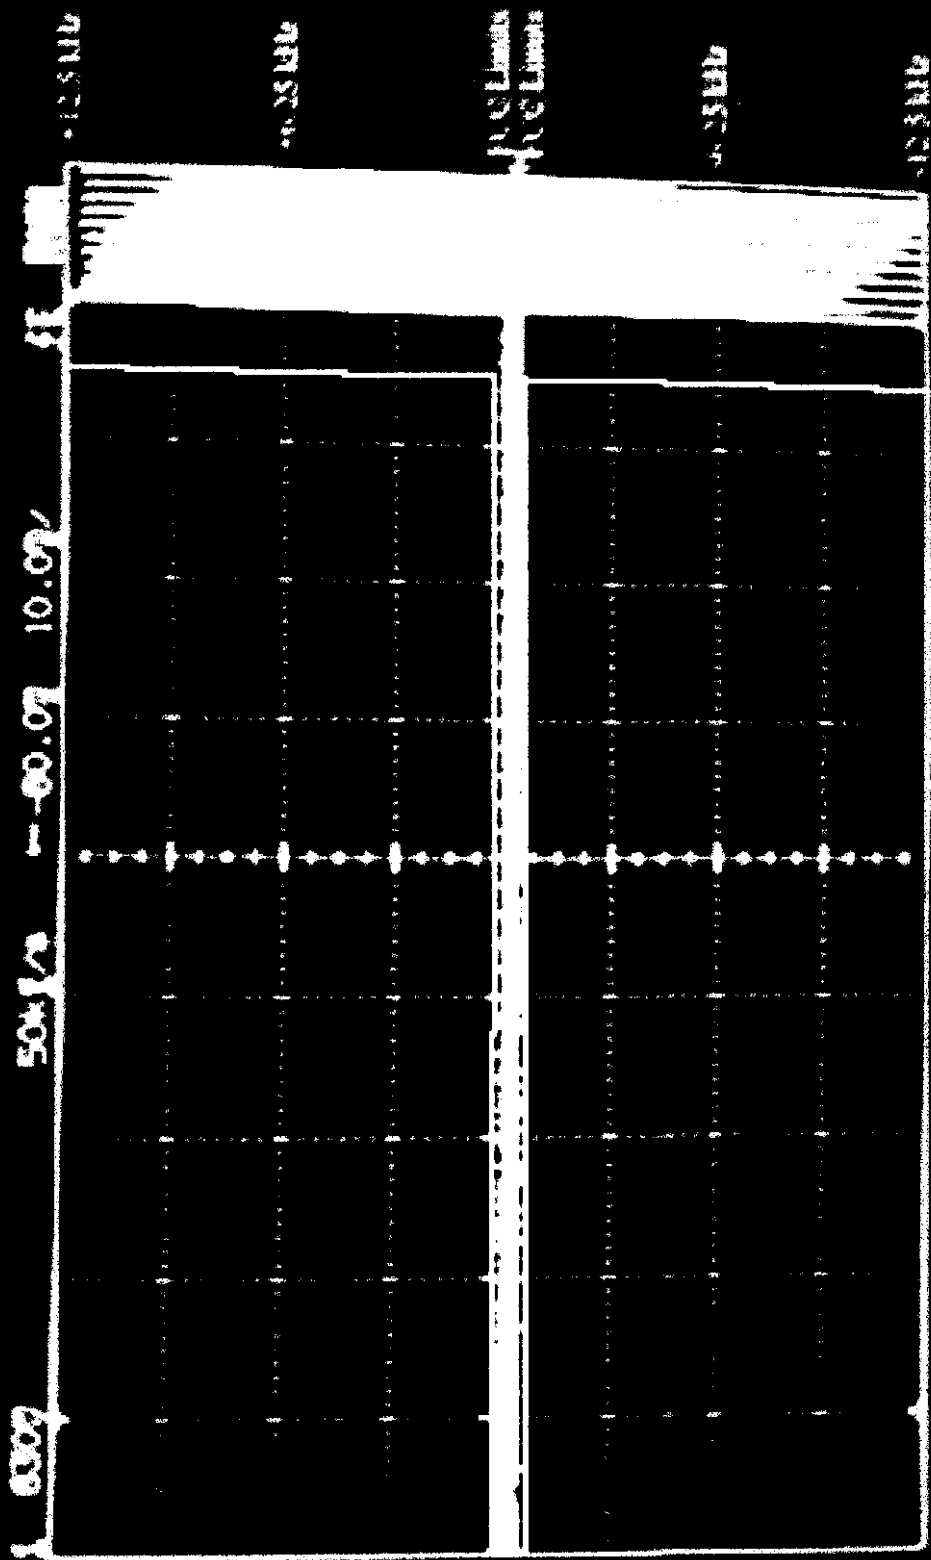

Slope ☐ ☒ Noise Rej ☐ ☒ Project ☐ ☒ On




PERKINS  
PACIFIC

840108  
OSCILLOSCOPE

2.050/1  
100 PEAK DETECT

500 MHz

VHF, 150MHz, 12.5 Channel Spacing, TX ON with Modulation

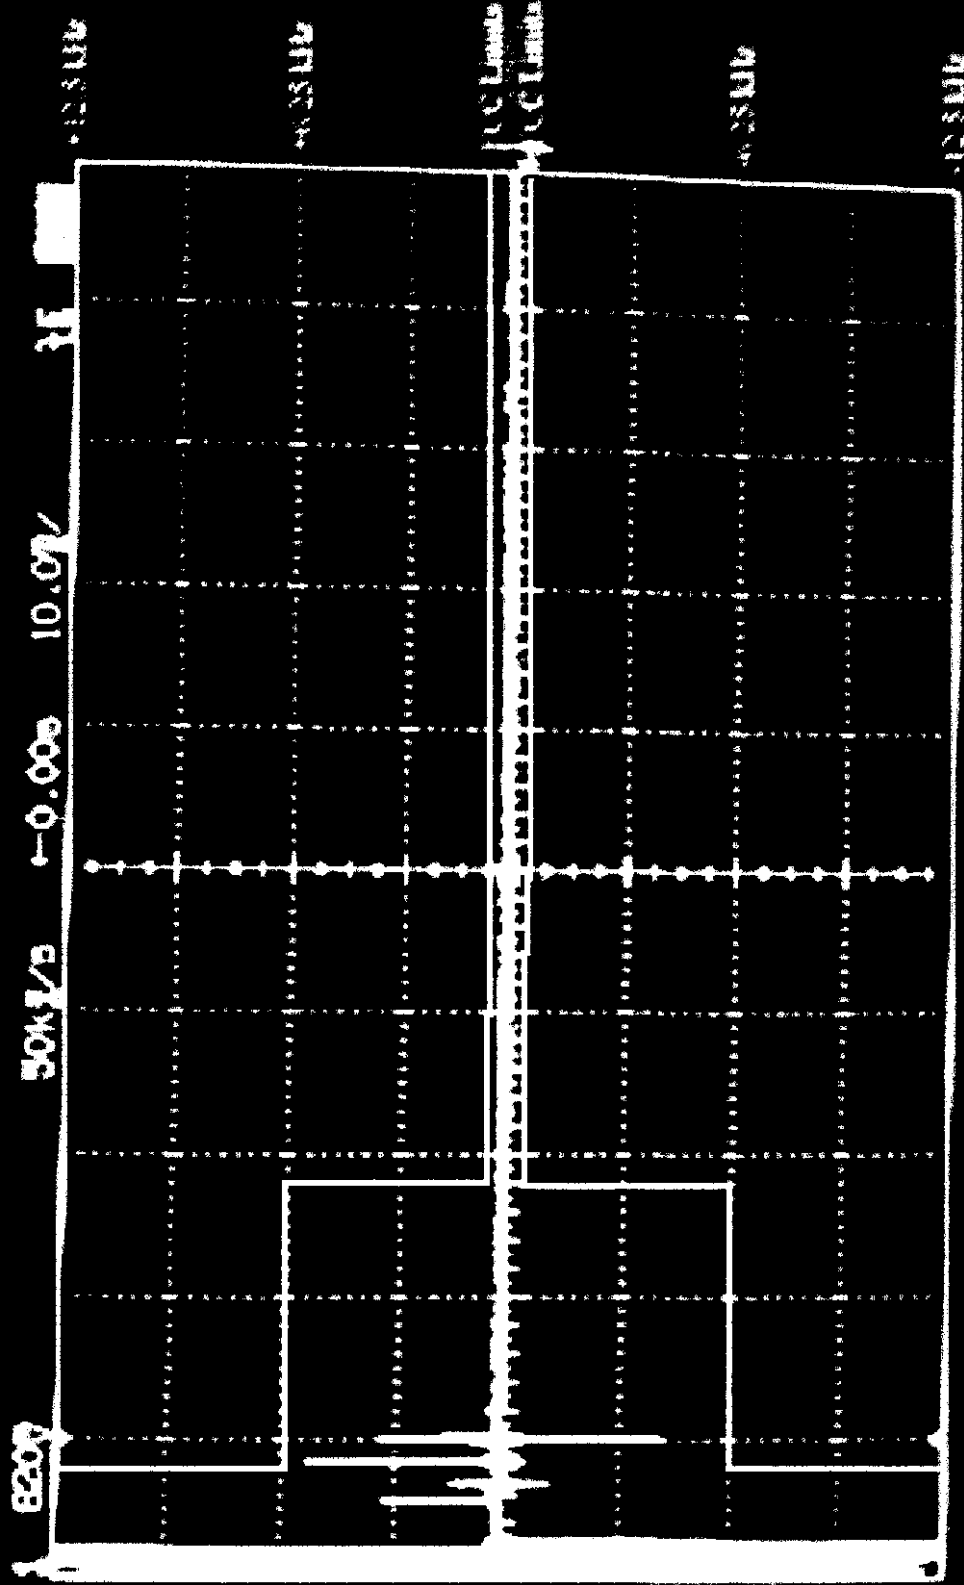


Slope  
f

Reject LF HF

Noise Rej  
On


VHF, 150MHz, 12.5 Channel Spacing, Tx OFF with Modulation

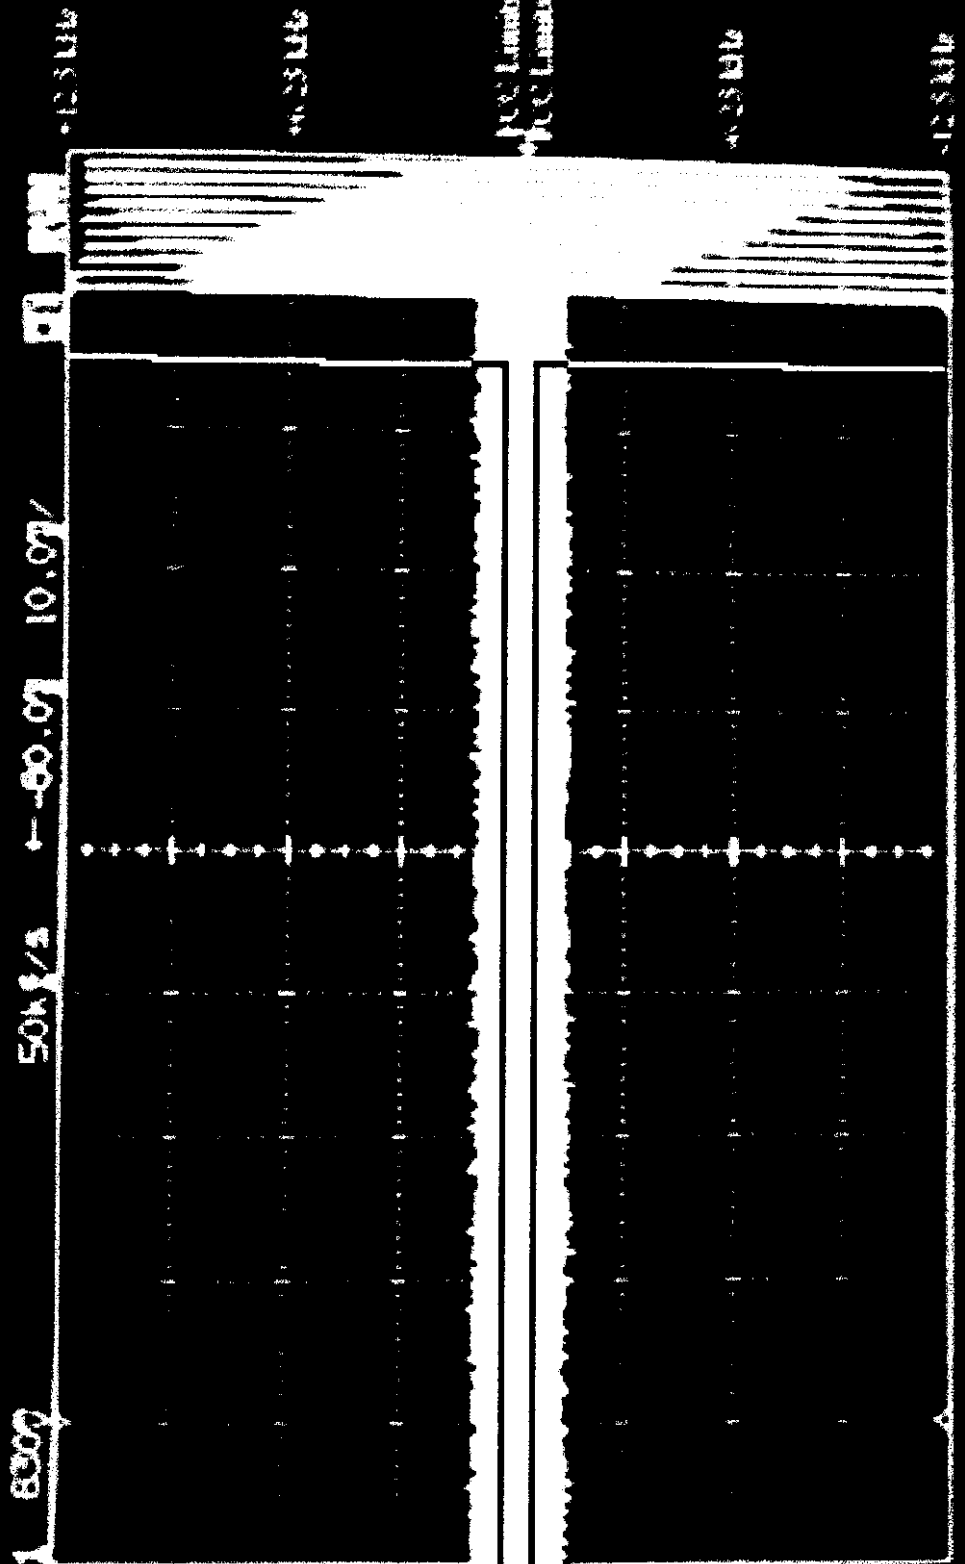

Slope ☐ ☒ ☐ Reject ☐ ☐ HF


Noise ☐ ☒ On

VHF, 150MHz, 25kHz Channel Spacing, Tx ON without Modulation

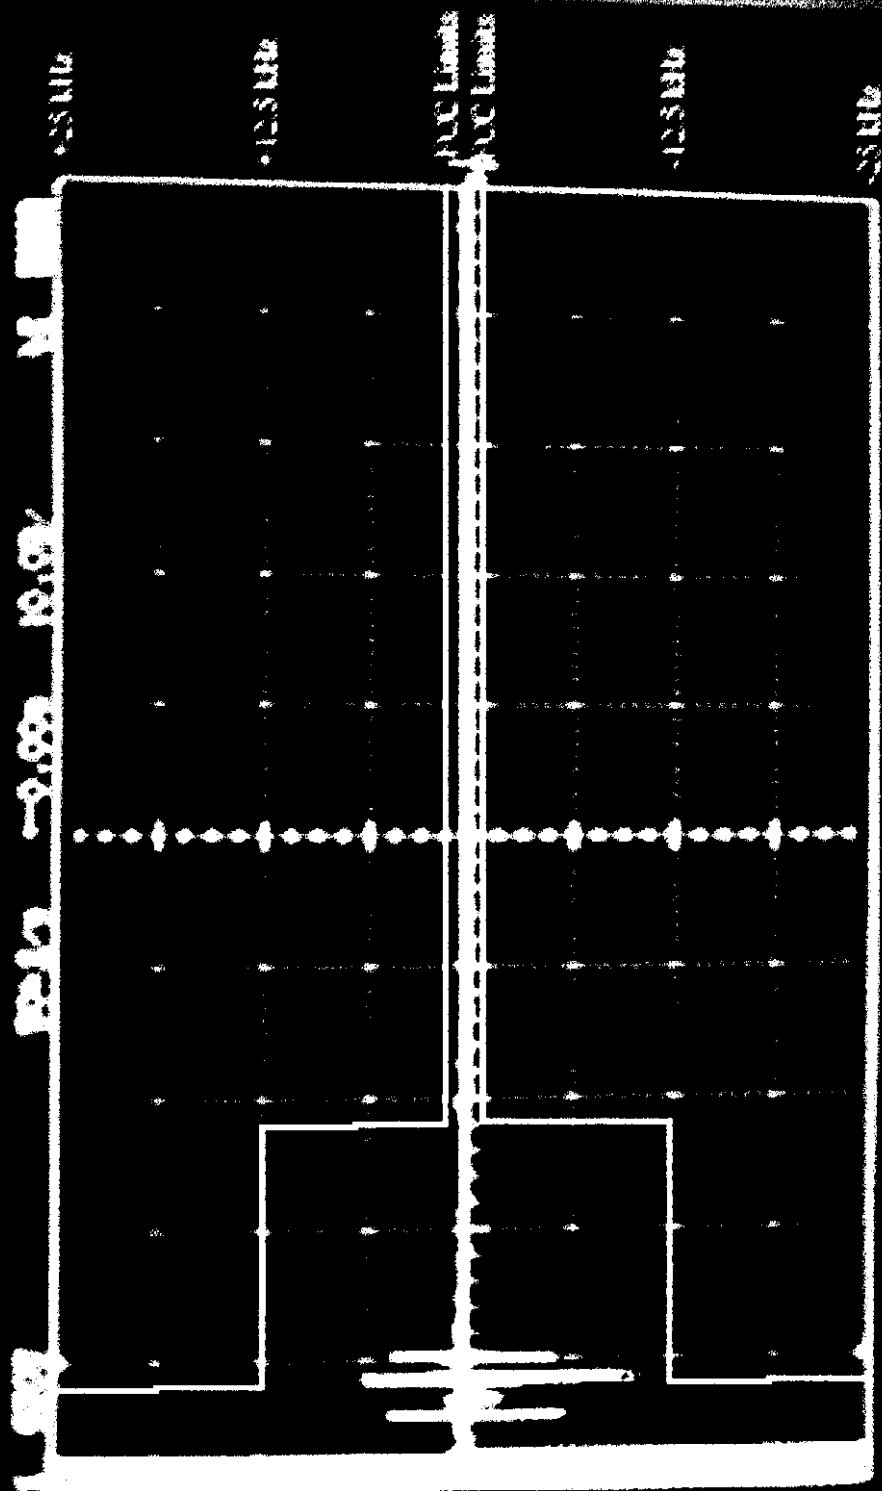


28  
 29  
 30  
 31  
 32  
 33  
 34  
 35  
 36  
 37  
 38  
 39  
 40  
 41  
 42  
 43  
 44  
 45  
 46  
 47  
 48  
 49  
 50  
 51  
 52  
 53  
 54  
 55  
 56  
 57  
 58  
 59  
 60  
 61  
 62  
 63  
 64  
 65  
 66  
 67  
 68  
 69  
 70  
 71  
 72  
 73  
 74  
 75  
 76  
 77  
 78  
 79  
 80  
 81  
 82  
 83  
 84  
 85  
 86  
 87  
 88  
 89  
 90  
 91  
 92  
 93  
 94  
 95  
 96  
 97  
 98  
 99  
 100  
 101  
 102  
 103  
 104  
 105  
 106  
 107  
 108  
 109  
 110  
 111  
 112  
 113  
 114  
 115  
 116  
 117  
 118  
 119  
 120  
 121  
 122  
 123  
 124  
 125  
 126  
 127  
 128  
 129  
 130  
 131  
 132  
 133  
 134  
 135  
 136  
 137  
 138  
 139  
 140  
 141  
 142  
 143  
 144  
 145  
 146  
 147  
 148  
 149  
 150  
 151  
 152  
 153  
 154  
 155  
 156  
 157  
 158  
 159  
 160  
 161  
 162  
 163  
 164  
 165  
 166  
 167  
 168  
 169  
 170  
 171  
 172  
 173  
 174  
 175  
 176  
 177  
 178  
 179  
 180  
 181  
 182  
 183  
 184  
 185  
 186  
 187  
 188  
 189  
 190  
 191  
 192  
 193  
 194  
 195  
 196  
 197  
 198  
 199  
 200  
 201  
 202  
 203  
 204  
 205  
 206  
 207  
 208  
 209  
 210  
 211  
 212  
 213  
 214  
 215  
 216  
 217  
 218  
 219  
 220  
 221  
 222  
 223  
 224  
 225  
 226  
 227  
 228  
 229  
 230  
 231  
 232  
 233  
 234  
 235  
 236  
 237  
 238  
 239  
 240  
 241  
 242  
 243  
 244  
 245  
 246  
 247  
 248  
 249  
 250  
 251  
 252  
 253  
 254  
 255  
 256  
 257  
 258  
 259  
 260  
 261  
 262  
 263  
 264  
 265  
 266  
 267  
 268  
 269  
 270  
 271  
 272  
 273  
 274  
 275  
 276  
 277  
 278  
 279  
 280  
 281  
 282  
 283  
 284  
 285  
 286  
 287  
 288  
 289  
 290  
 291  
 292  
 293  
 294  
 295  
 296  
 297  
 298  
 299  
 300  
 301  
 302  
 303  
 304  
 305  
 306  
 307  
 308  
 309  
 310  
 311  
 312  
 313  
 314  
 315  
 316  
 317  
 318  
 319  
 320  
 321  
 322  
 323  
 324  
 325  
 326  
 327  
 328  
 329  
 330  
 331  
 332  
 333  
 334  
 335  
 336  
 337  
 338  
 339  
 340  
 341  
 342  
 343  
 344  
 345  
 346  
 347  
 348  
 349  
 350  
 351  
 352  
 353  
 354  
 355  
 356  
 357  
 358  
 359  
 360  
 361  
 362  
 363  
 364  
 365  
 366  
 367  
 368  
 369  
 370  
 371  
 372  
 373  
 374  
 375  
 376  
 377  
 378  
 379  
 380  
 381  
 382  
 383  
 384  
 385  
 386  
 387  
 388  
 389  
 390  
 391  
 392  
 393  
 394  
 395  
 396  
 397  
 398  
 399  
 400  
 401  
 402  
 403  
 404  
 405  
 406  
 407  
 408  
 409  
 410  
 411  
 412  
 413  
 414  
 415  
 416  
 417  
 418  
 419  
 420  
 421  
 422  
 423  
 424  
 425  
 426  
 427  
 428  
 429  
 430  
 431  
 432  
 433  
 434  
 435  
 436  
 437  
 438  
 439  
 440  
 441  
 442  
 443  
 444  
 445  
 446  
 447  
 448  
 449  
 450  
 451  
 452  
 453  
 454  
 455  
 456  
 457  
 458  
 459  
 460  
 461  
 462  
 463  
 464  
 465  
 466  
 467  
 468  
 469  
 470  
 471  
 472  
 473  
 474  
 475  
 476  
 477  
 478  
 479  
 480  
 481  
 482  
 483  
 484  
 485  
 486  
 487  
 488  
 489  
 490  
 491  
 492  
 493  
 494  
 495  
 496  
 497  
 498  
 499  
 500  
 501  
 502  
 503  
 504  
 505  
 506  
 507  
 508  
 509  
 510  
 511  
 512  
 513  
 514  
 515  
 516  
 517  
 518  
 519  
 520  
 521  
 522  
 523  
 524  
 525  
 526  
 527  
 528  
 529  
 530  
 531  
 532  
 533  
 534  
 535  
 536  
 537  
 538  
 539  
 540  
 541  
 542  
 543  
 544  
 545  
 546  
 547  
 548

VHF, 150MHz, 25kHz Channel Spacing, Tx OFF without Modulation

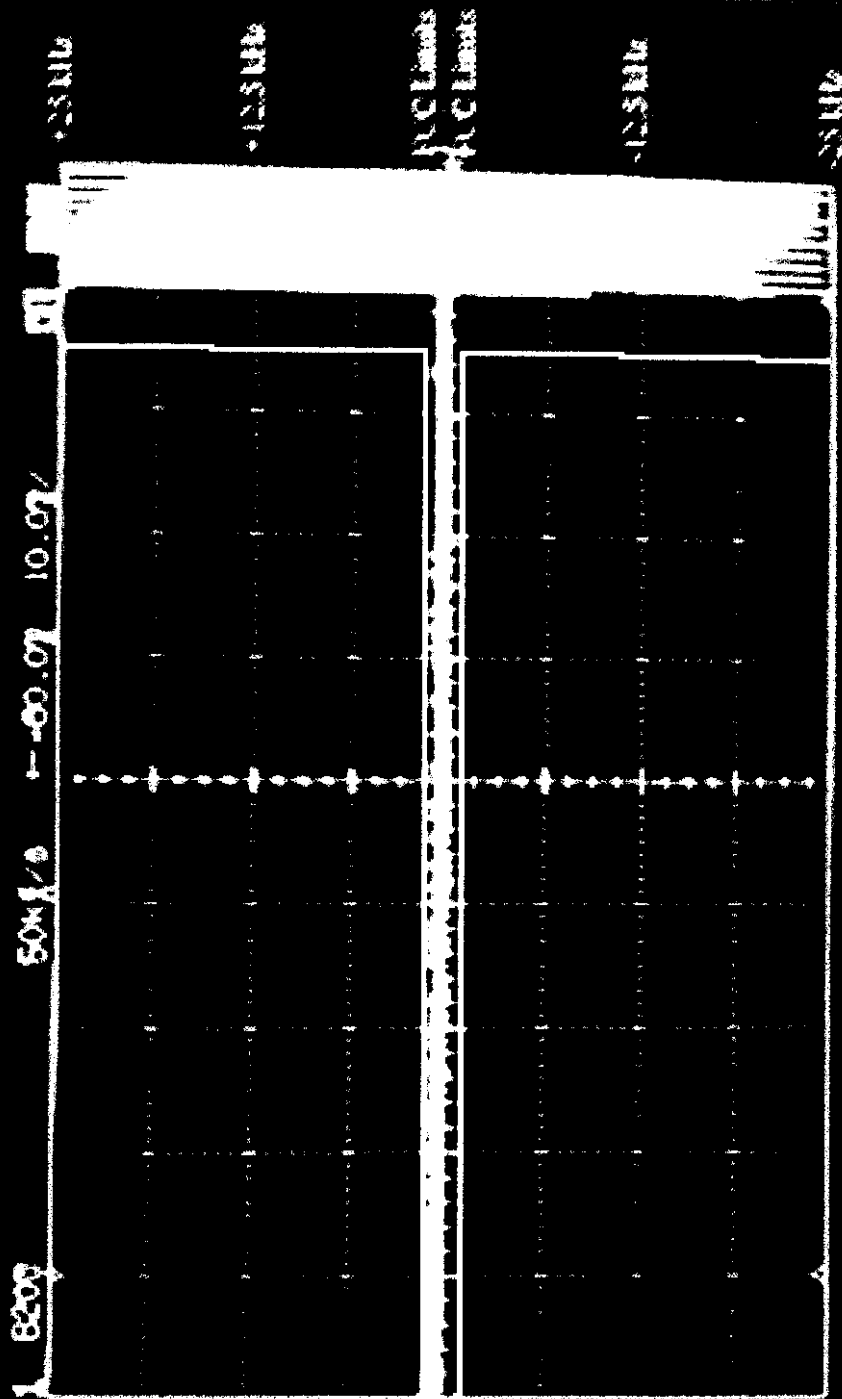

21000 4000 10000 20000 30000 40000 50000 60000 70000 80000 90000 100000 110000 120000 130000 140000 150000 160000 170000 180000 190000 200000 210000 220000 230000 240000 250000 260000 270000 280000 290000 300000 310000 320000 330000 340000 350000 360000 370000 380000 390000 400000 410000 420000 430000 440000 450000 460000 470000 480000 490000 500000 510000 520000 530000 540000 550000 560000 570000 580000 590000 600000 610000 620000 630000 640000 650000 660000 670000 680000 690000 700000 710000 720000 730000 740000 750000 760000 770000 780000 790000 800000 810000 820000 830000 840000 850000 860000 870000 880000 890000 900000 910000 920000 930000 940000 950000 960000 970000 980000 990000 1000000

VHF, 150MHz, 25kHz Channel Spacing, TX ON with Modulation

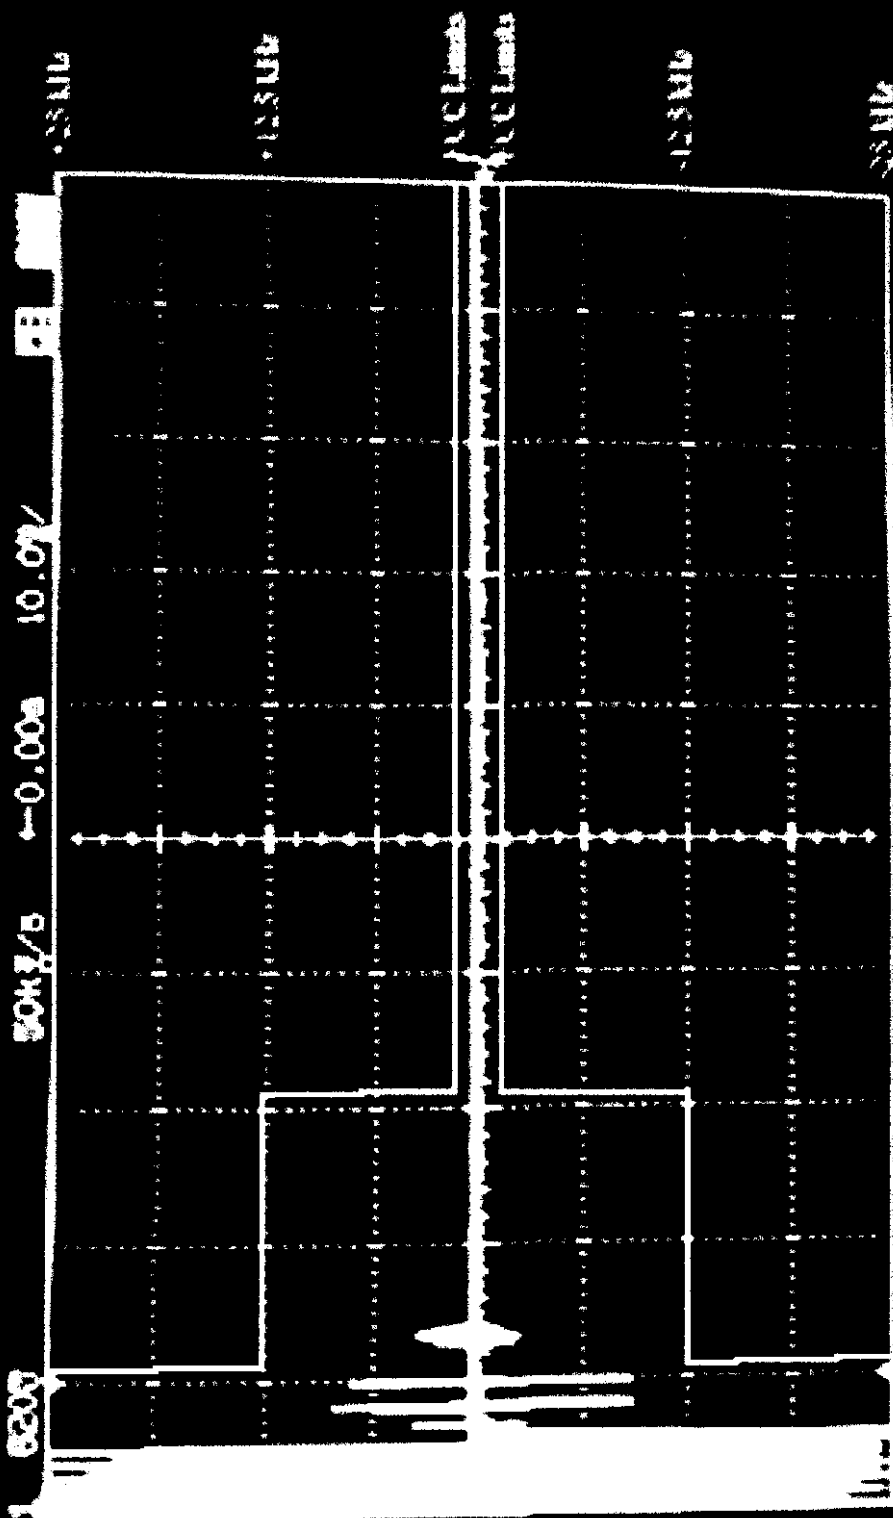

No. 1000


On

Reject

10


10

VHF, 150MHz, 25kHz Channel Spacing, TX OFF with Modulation

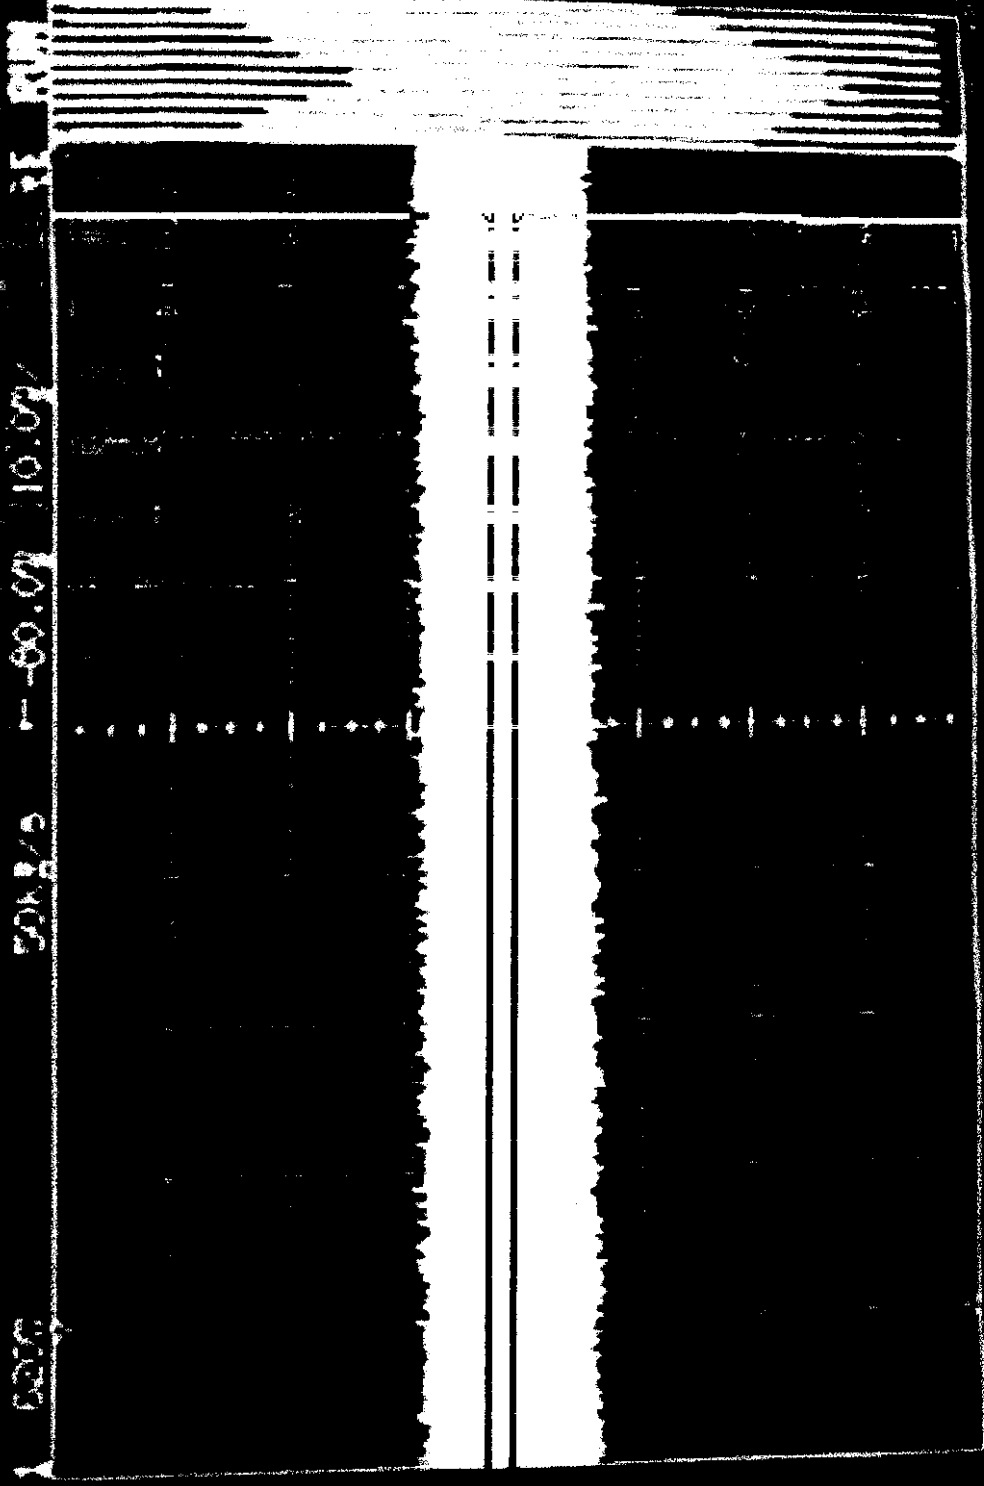


Stop + B  
Reject LF HF  
Noise Floor

UHF 450MHz 12.5 Channel Spacing. Tx ON without Modulation

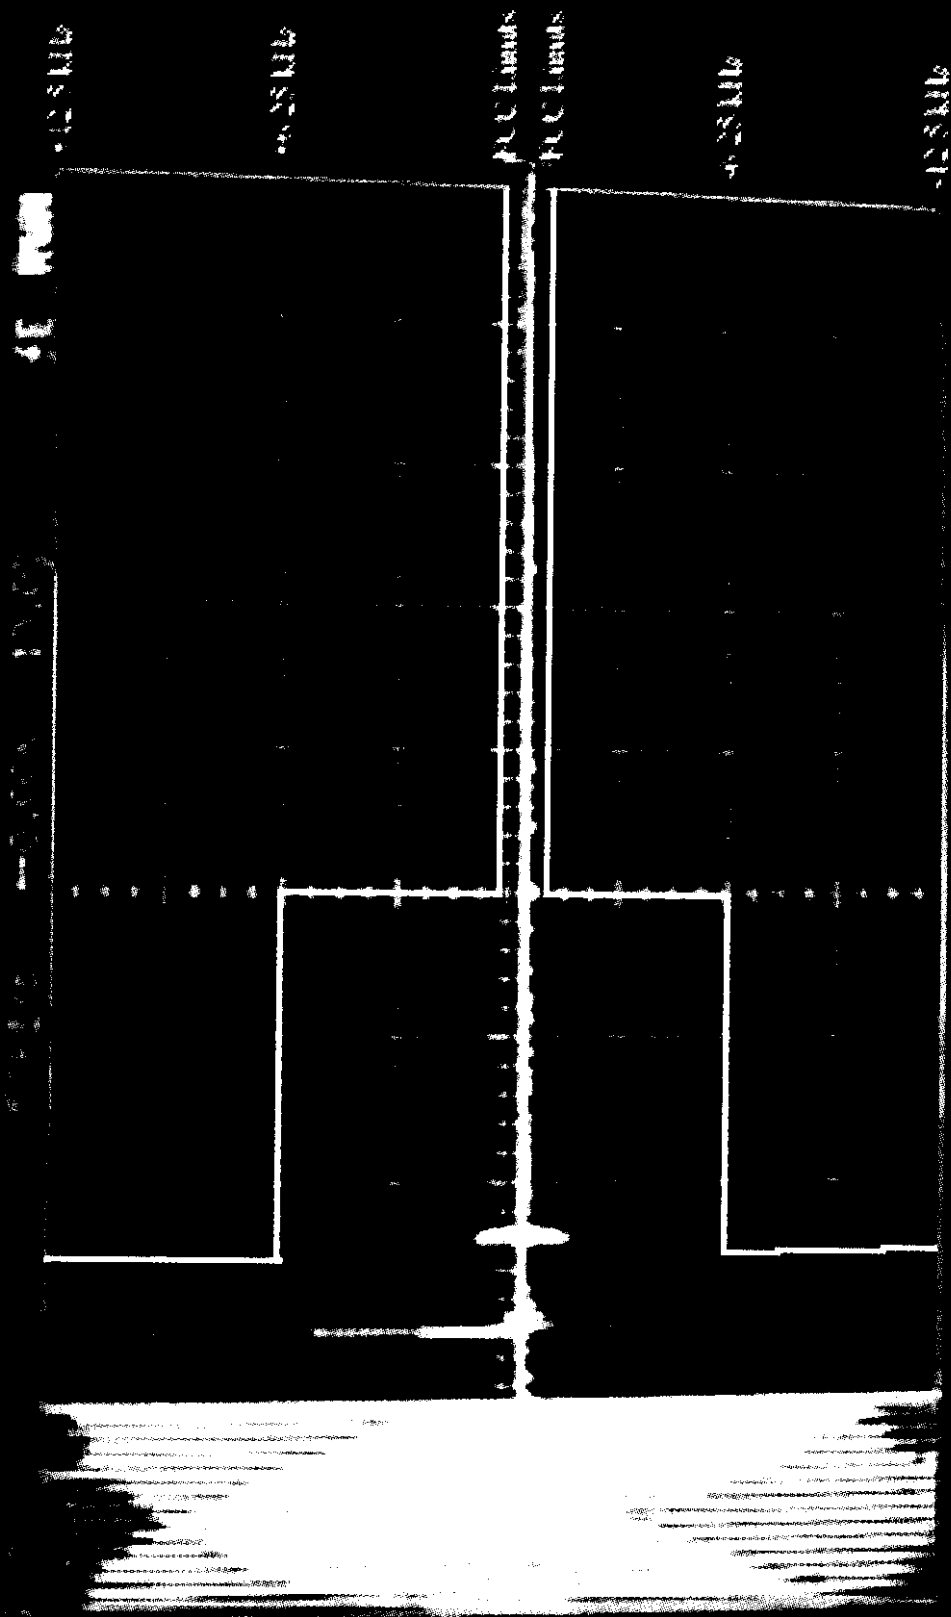

NOTE  
THE SCOPE IS DL LEVEL SETTING WAS A BIT  
OFF FROM THE CENTER LINE BEFORE TEST.  
THE RESULT SHALL BE OK.

UHF, 450MHz 12.5 Channel Spacing, Tx OFF without Modulation

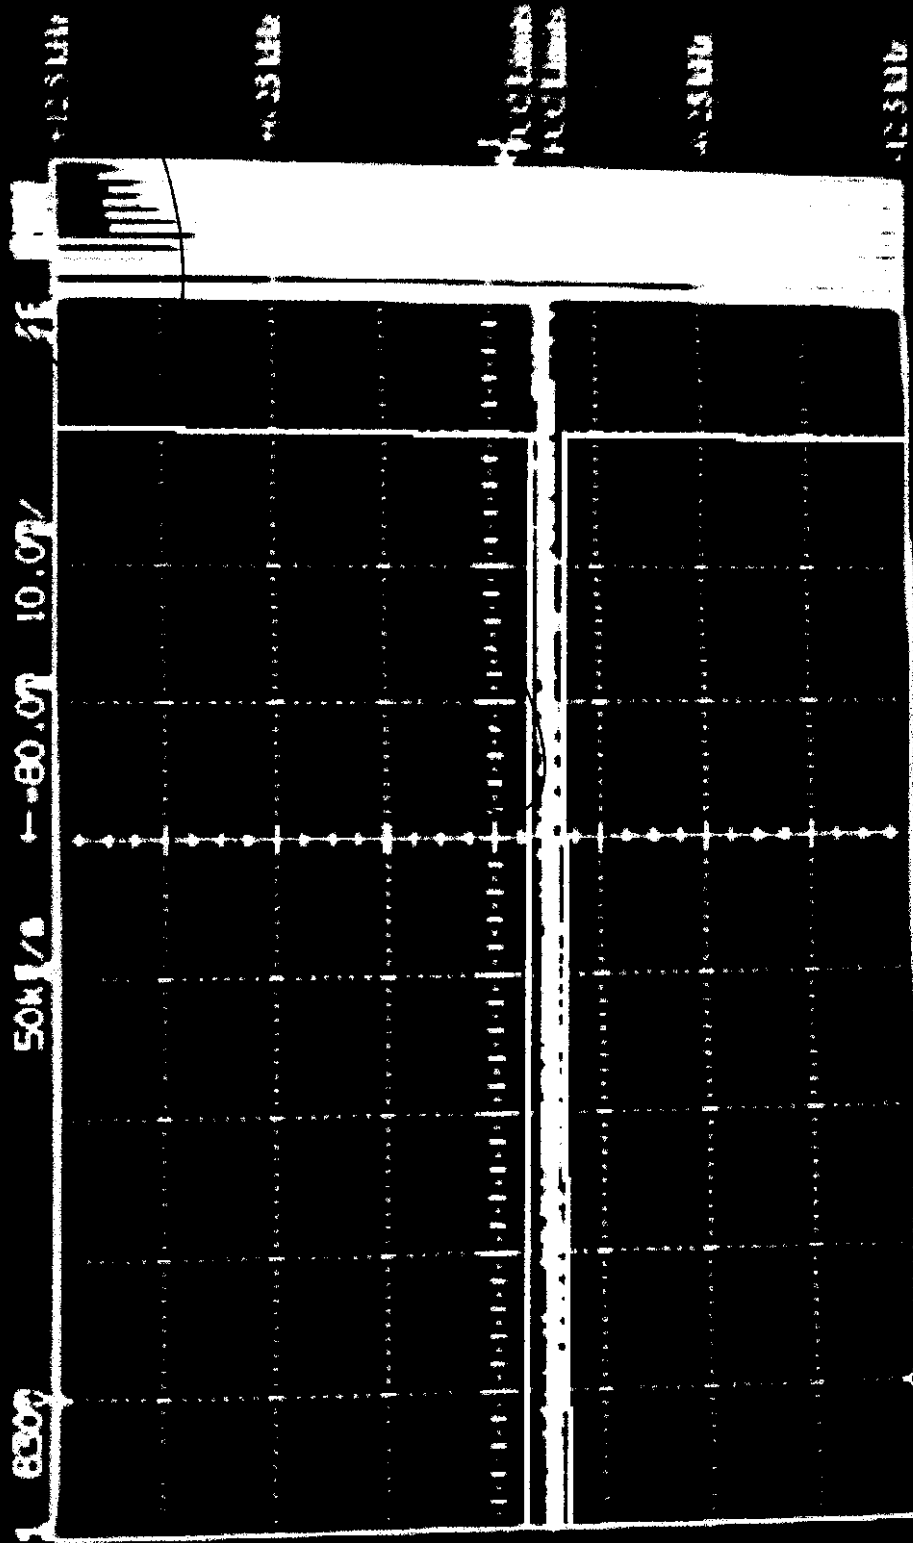

Next Menu

Vertical Off

Lim On

Coupling AC

Input 500

Off

\* NOTE  
THE SCALE'S PL LEVEL SETTING WAS A HIT  
OFF FROM THE CENTER LINE BEFORE TESTS  
THE RESULT SHALL BE OK.





10.07 10.07 10.07 10.07 10.07

504.1/8 10.07 10.07


10.07

Next Menu	Verrier	EW Lim	Coupling	Input	500
Next Menu	Off	On	AC		


LIFE, 450MHz, 25KHz Channel Spacing, FxON with No Modulation

100

801

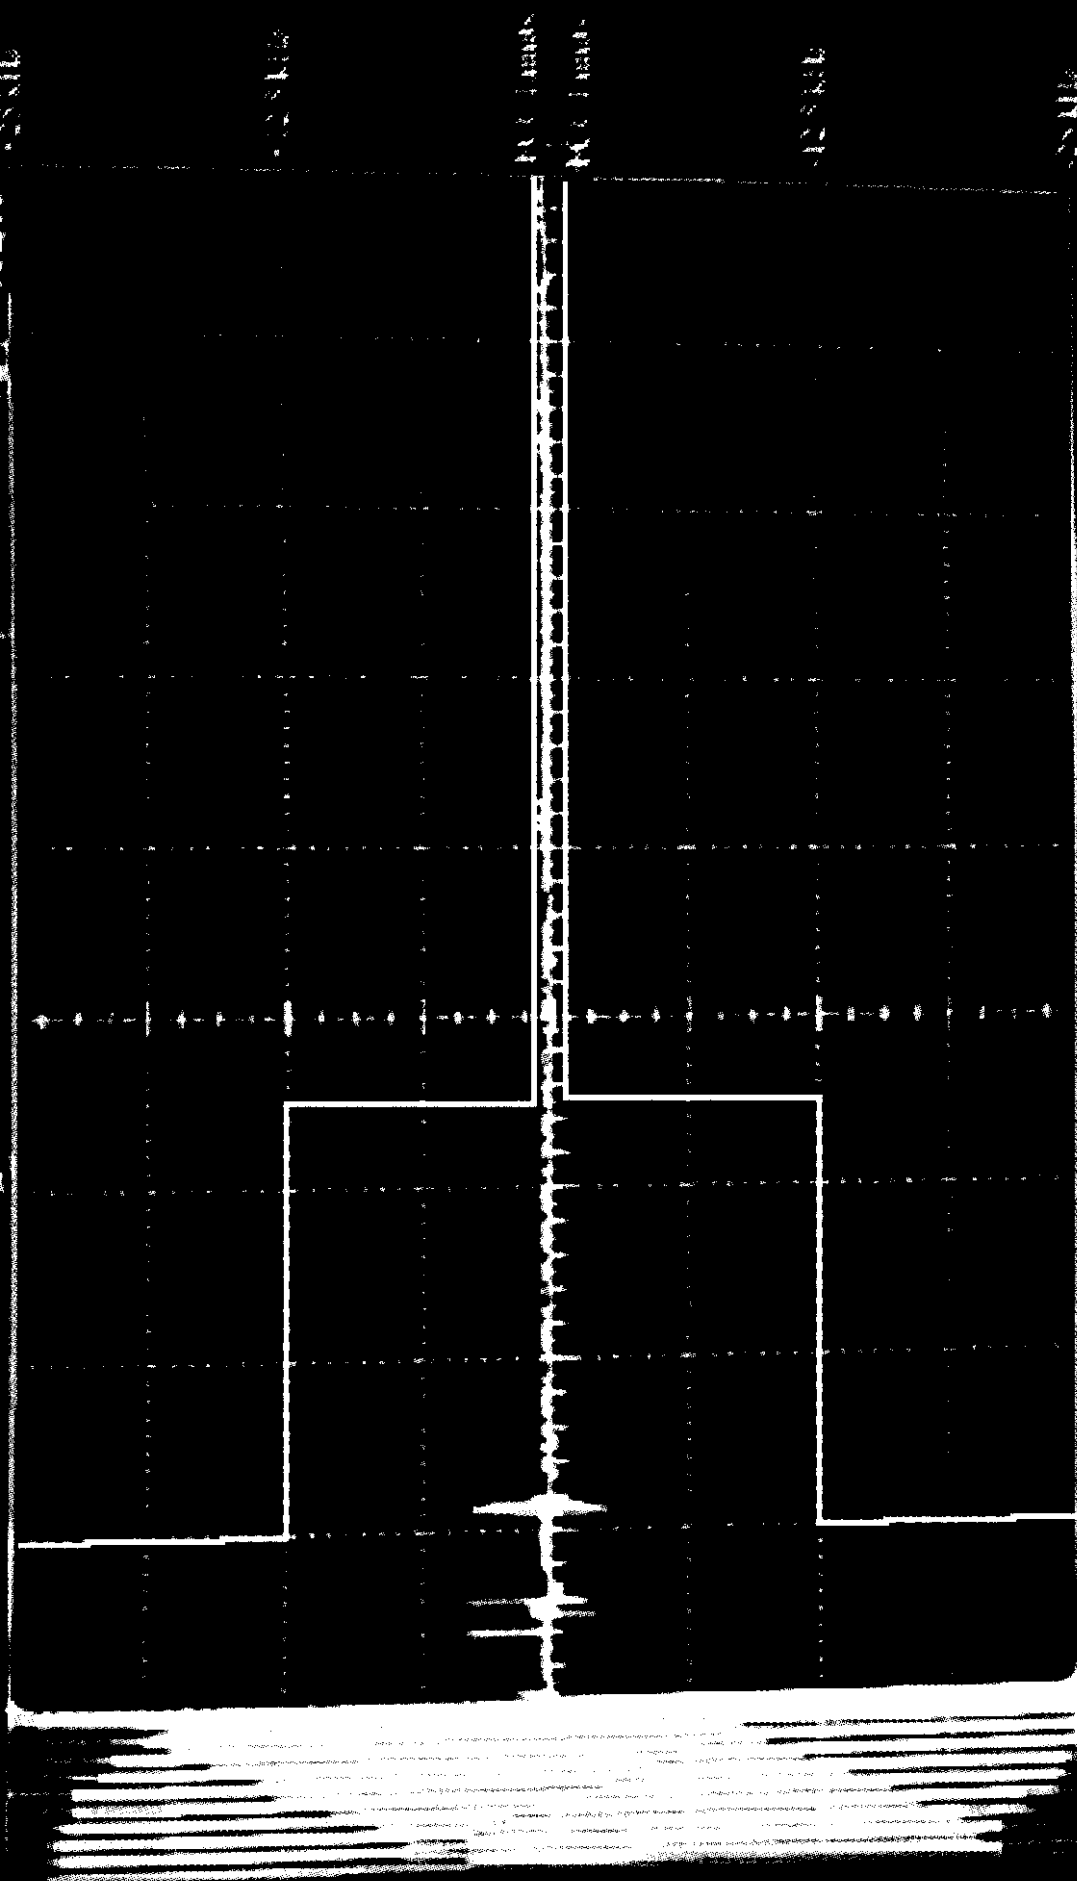

UHF, 450MHz, 25kHz Channel Spacing, TX OFF with No Modulation

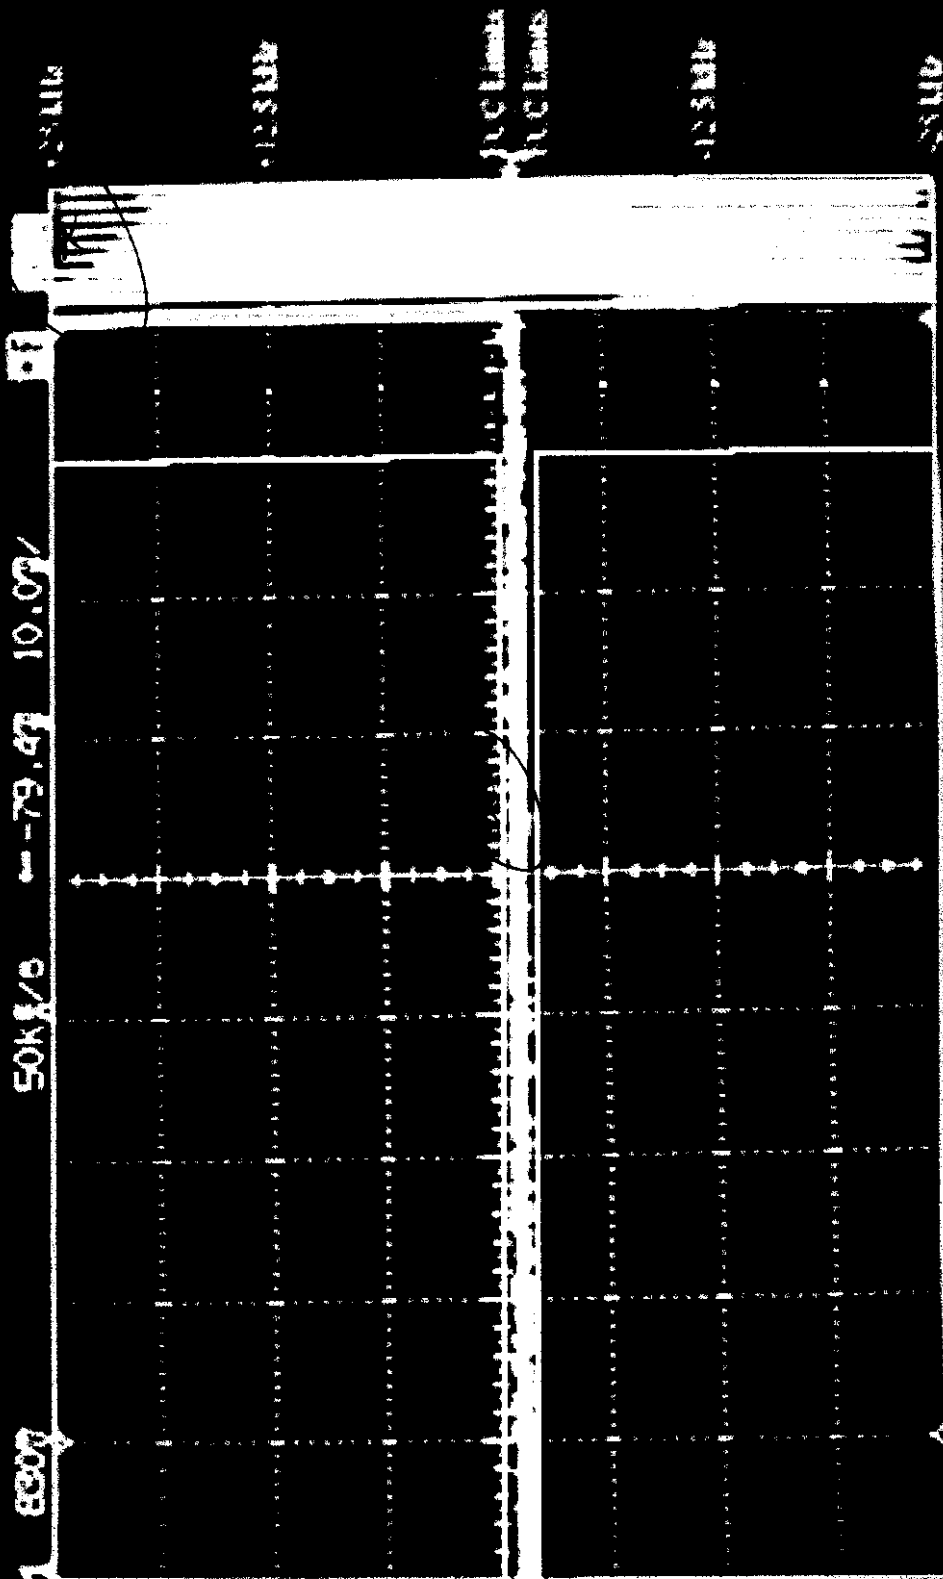

Next Menu

Vernier

Full


Carroll

500

off


\* NOTE  
THE SCOPE'S DC LEVEL SETTING WAS A BIT  
OFF FROM THE CENTER LINE BEFORE TESTS.  
THE RESULT SHALL BE OK.

# UHF, 450MHz, 25kHz Channel Spacing, TX ON with Modulation

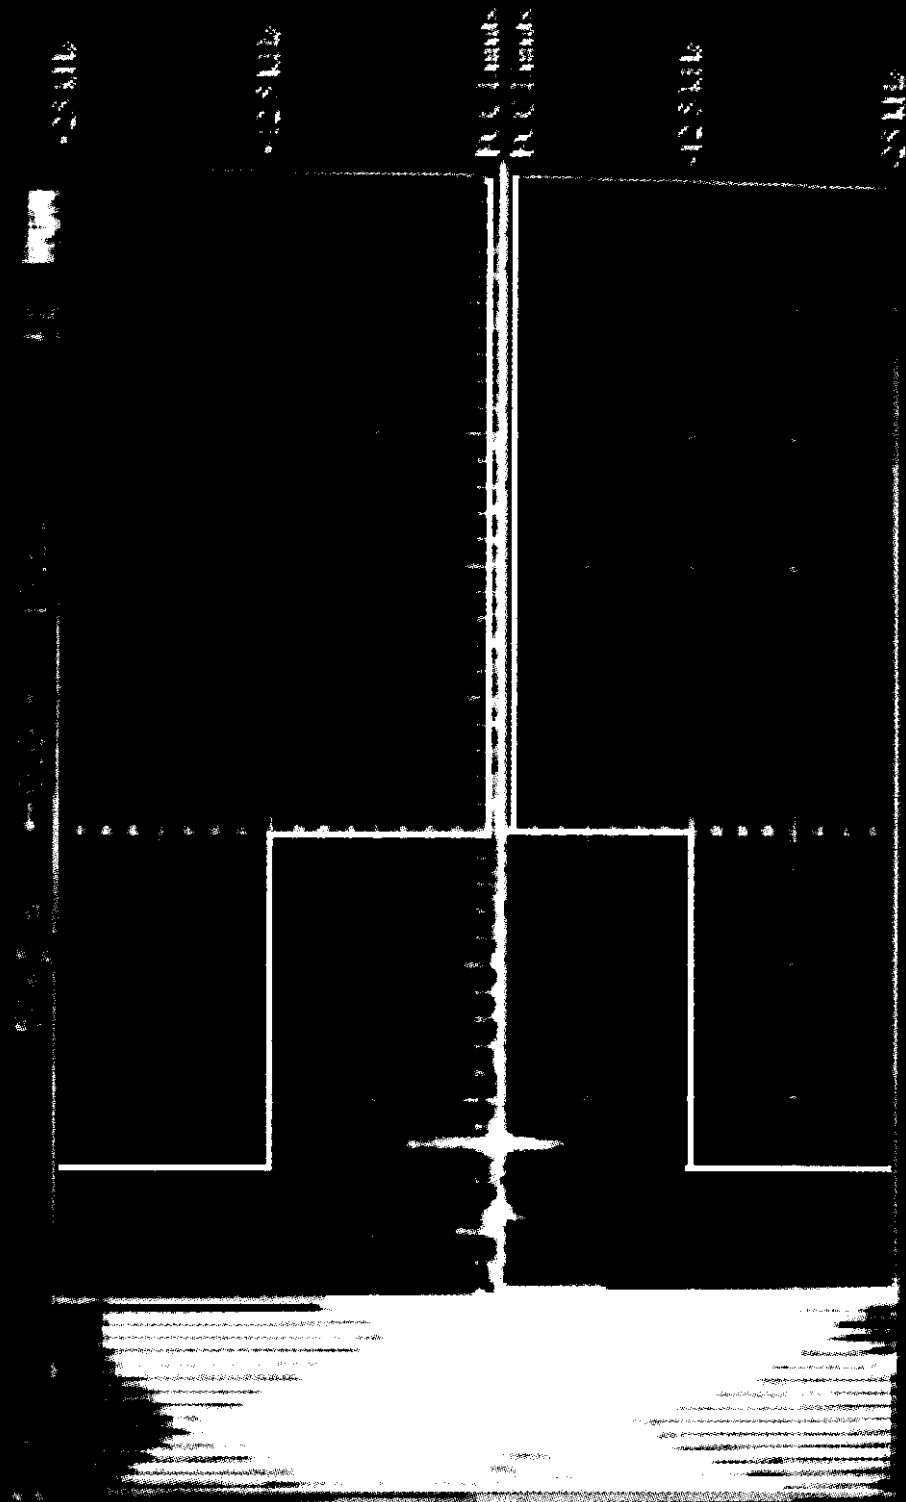

★ NOTE  
THE SCOPE'S DLABEL SETTING WAS A BIT  
OFF FROM THE CENTER LINE'S BEFORE TESTS.  
THE RESULT SHALL BE OK.

UHF, 450MHz, 25KHz Channel Spacing, Tx OFF with Modulation

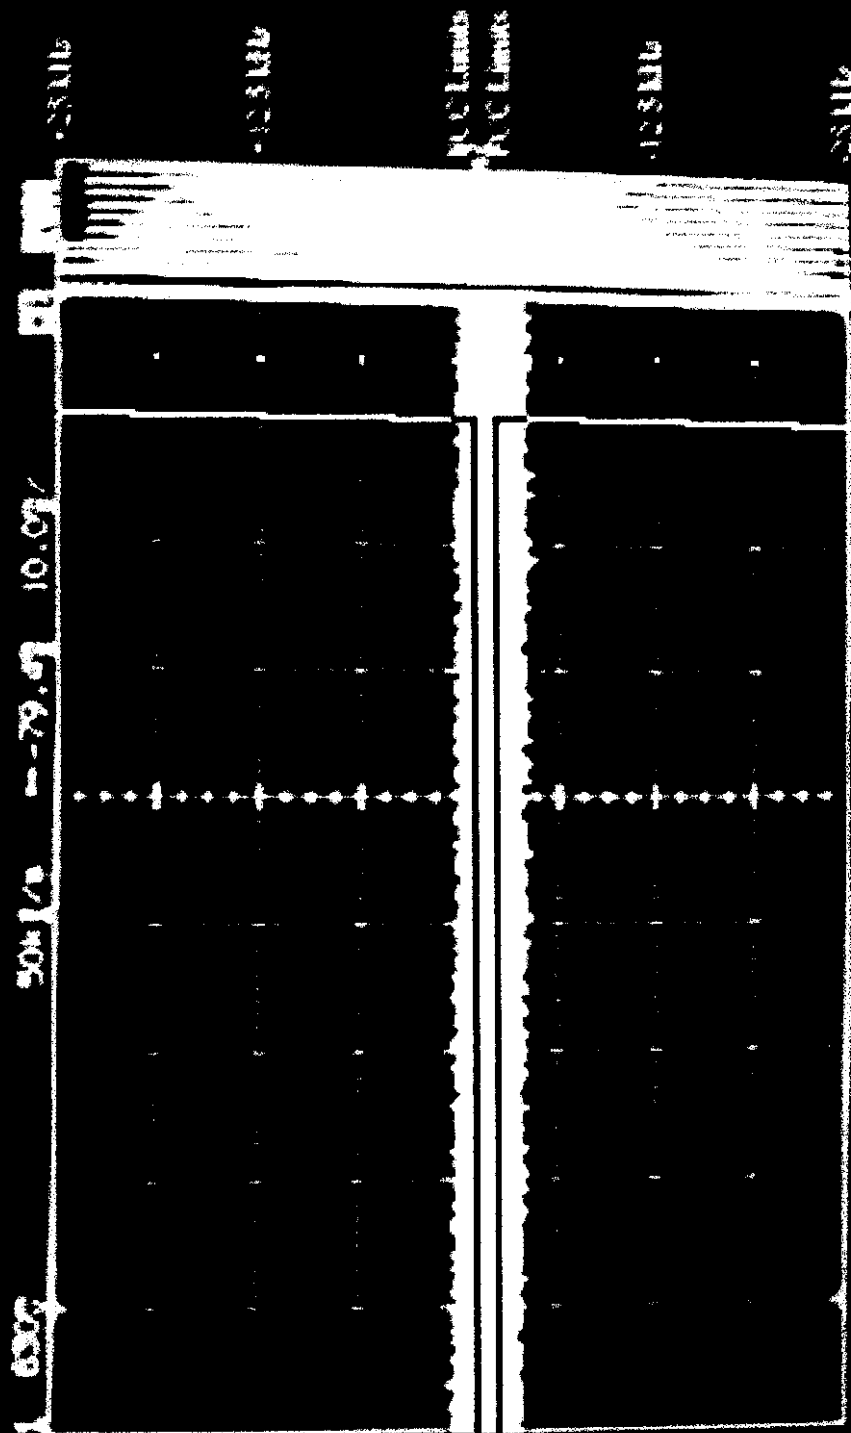

Or: ☐ Input 500 ☐ Coupling ☐ AC ☐ BW Lim ☐ On ☐ Varnier ☐ Off ☐ Menu

## 5. EXHIBIT 5 - GENERAL TEST PROCEDURES

### 5.1. AC POWERLINE CONDUCTED EMISSIONS MEASUREMENTS - GENERAL TEST METHOD

- AC Powerline Conducted Emissions were performed in the shielded room, 16'(L) by 12'(W) by 12'(H).
- Conducted power-line measurements were made over the frequency range from 450 KHz to 30 MHz to determine the line-to-ground radio noise voltage which was conducted from the EUT power-input terminals that were directly connected to a public power network.
- The EUT normally received power from another device that connects to the public utility ac power lines, measurements would be made on that device with the EUT in operation to ensure that the device continues to comply with the appropriate limits while providing the EUT with power.
- If the EUT operates only from internal or dedicated batteries, with no provisions for connection to the public utility ac power lines, ac power-line conducted measurements are not required.
- Table-top devices were placed on a platform of nominal size 1 m by 1.5m raised 80 cm above the conducting ground plane.
- The EUT current-carrying power lead, except the ground (safety) lead, was individually connected through a LISN to the power source. All unused 50-Ohm connectors of the LISN was terminated in 50-ohm when not connected to the measuring instruments.
- The line cord of the EUT connected to one LISN which was connected to the measuring instrument. Those power cords for the units of devices not under measurement were connected to a separate multiple ac outlets. Drawings and photographs of typically conducted emission test setups were shown in the Test Report. Each current-carrying conductor of the EUT shall be individually tested.
- The EUT was normally operated with a ground (safety) connection, the EUT was connected to the ground at the LISN through a conductor provided in the lead from the ac power mains to the LISN.
- The excess length of the power cord was folded back and forth in an 8-shape on a wooden strip with a vertical prong located on the top of the LISN case.
- The EUT was set-up in its typical configuration and operated in its various modes as described in 3.2 of the test report.
- A preliminary scan was made by using spectrum analyzer system with the detector function set to PEAK mode (10 KHz RBW, 10 KHz VBW), frequency span 450KHz-30MHz.
- The maximum conducted emission for a given mode of operation was found by using the following step-by-step procedure:

Step1. Monitor the frequency range of interest at a fixed EUT azimuth.

Step2. Manipulate the system cables and peripheral devices to produce highest amplitude signal relative to the limit. Note the amplitude and frequency of the suspect signal.

#### ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: TIL10FT  
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

- Step3. The effects of various modes of operation is examined. This is done by varying equipment operation modes as step 2 is being performed.
- Step4. After completing step 1 through 3, record EUT and peripheral device configuration, mode of operation, cable configuration, signal levels and frequencies for final test.
- Each highest signal level at the maximized test configuration was zoomed in a small frequency span on the spectrum analyzer's display (the manipulation of cables and peripheral devices and EUT operation modes might have to be repeated to obtain the highest signal level with the spectrum analyzer set to PEAK detector mode 10 KHz RBW and 10 KHz VBW). The spectrum analyzer was then set to CISPR QUASI-PEAK detector mode (9 KHz RBW, 1 MHz VBW) and the final highest RF signal level and frequency was record.
- **Broad-band ac powerline conducted emissions:-** If the EUT exhibits ac powerline conducted emissions that exceed the limit with the instrument set to the quasi-peak mode, then measurements should be made in the average mode. If the amplitude measured in the quasi-peak mode is at least 6 dB higher than the amplitude measured in the average mode, the level measured in quasi peak mode may be reduced by 13 dB before comparing it to the limit.

## 5.2. ELECTRICAL FIELD RADIATED EMISSIONS MEASUREMENTS - GENERAL TEST METHOD

- The radiated emission measurements were performed at the Ultratech's 3 Meter Open Field Test Site (OFTS) situated in the Town of Oakville, province of Ontario. The Attenuation Characteristics of OFTS have been filed to FCC.
- Radiated emissions measurements were made using the following test instruments:
  - 1. Calibrated EMCO biconilogl antenna in the frequency range from 30 MHz to 2000 MHz.
  - 2. Calibrated A.H. Systems log periodic antenna in the frequency range above 1000 MHz (1GHz - 18 GHz).
  - 3. Calibrated EMI receiver or spectrum analyzer and pre-selector. In general, the spectrum analyzer would be used as follows:
    - The rf electric field levels were measured with the spectrum analyzer set to PEAK detector (100 KHz RBW and 100 KHz VBW).
    - If any rf emission was observed to be a broadBand noise, the spectrum analyzer's CISPR QUASI-PEAK detector (120 KHz RBW and 1MHz VBW) was then set to measure the signal level.
    - If the signal being measured was narrowband and the ambient field was broadBand, the bandwidth of the spectrum analyzer was reduced.
- The EUT was set-up in its typical configuration and operated in its various modes as described in 3.2 of the test report.
- The frequencies of emissions was first detected. Then the amplitude of the emissions was measured at the specified measurement distance using required antenna height, polarization, and detector characteristics.
- During this process, cables and peripheral devices were manipulated within the range of likely configuration.
- For each mode of operation required to be tested, the frequency spectrum was monitored. Variations in antenna heights (from 1 meter to 4 meters above the ground plane), antenna polarization (horizontal plane and vertical

---

### ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: TIL10FT  
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



plane), cable placement and peripheral placement (each variable within bounds specified elsewhere) were explored to produce the highest amplitude signal relative to the limit.

The maximum radiated emission for a given mode of operation was found by using the following step-by-step procedure:

- Step1: Monitor the frequency range of interest at a fixed antenna height and EUT azimuth.
- Step2: Manipulate the system cables to produce highest amplitude signal relative to the limit. Note the amplitude and frequency of the suspect signal.
- Step3: Rotate the EUT 360 degrees to maximize the suspected highest amplitude signal. If the signal or another at a different frequency is observed to exceed the previously noted highest amplitude signal by 1 dB or more, go back to the azimuth and repeat Step 2. Otherwise, orient the EUT azimuth to repeat the highest amplitude observation and proceed.
- Step4: Move the antenna over its full allowed range of travel (1 to 4 meters) to maximize the suspected highest amplitude signal. If the signal or another at a different frequency is observed to exceed the previously noted highest amplitude signal by 1 dB or more, return to Step 2 with the highest amplitude observation and proceed.
- Step5: Change the polarization of the antenna and repeat Step 2 through 4. Compare the resulting suspected highest amplitude signal with that found for the other polarization. Select and note the higher of the two signals. This signal is termed the highest observed signal with respect to the limit for this EUT operational mode.
- Step6: The effects of various modes of operation is examined. This is done by varying the equipment modes as steps 2 through 5 are being performed.
- Step7: After completing steps 1 through 6, record the final highest emission level, frequency, antenna polarization and detector mode of the measuring instrument.

---

**ULTRATECH GROUP OF LABS**

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: [vik.ultratech@sympatico.ca](mailto:vik.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: TIL10FT  
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

**Calculation of Field Strength:**

The field strength is calculated by adding the calibrated antenna factor and cable factor, and subtracting the Amplifier gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - AG$$

Where	FS	=	Field Strength
	RA	=	Receiver/Analyzer Reading
	AF	=	Antenna Factor
	CF	=	Cable Attenuation Factor
	AG	=	Amplifier Gain

**Example:** If a receiver reading of 60.0 dBuV is obtained, the antenna factor of 7.0 dB/m and cable factor of 1.0 dB are added, and the amplifier gain of 30 dB is subtracted. The actual field strength will be:.

Field Level =  $60 + 7.0 + 1.0 - 30 = 38.0$  dBuV/m.

Field Level =  $10^{(38/20)} = 79.43$  uV/m.

**Notes:** The frequency and amplitude of at least six highest conducted emissions relative to the limit are recorded unless such emissions are more than 20 dB below the limit. If less than six emissions are within 20dB of the limit, the background or receiver noise level shall be reported at representative frequencies.

**ULTRATECH GROUP OF LABS**

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: [vhk.ultratech@sympatico.ca](mailto:vhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: TIL10FT  
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## 6. EXHIBIT 6 - INFORMATION RELATED TO EQUIPMENT UNDER TESTS

### 6.1. FCC ID LABELLING AND SKETCH OF FCC LABEL LOCATION

Refer to the attached sheets

### 6.2. PHOTOGRAPHS OF EQUIPMENT UNDER TEST

Refer to the attached photographs

### 6.3. SYSTEM BLOCK DIAGRAM(S)

Refer to the attached sheets

### 6.4. SCHEMATIC DIAGRAMS

Refer to the attached sheets

### 6.5. USER'S MANUAL WITH "FCC INFORMATION TO USER STATEMENTS"

Refer to the attached Users' manual

---

#### ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2  
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: TIL10FT  
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)