



FCC PART 15.231

TEST REPORT

For

Zhejiang Focus-On Import and Export Co., Ltd

11F, Binhai Building, 480 Jiangnan Dadao, Binjiang District, Hangzhou, China

FCC ID: INC-FOKH-T12

Report Type: Original Report	Product Type: WIRELESS THERMOMETER
Report Number:	<u>RXM180616050-00</u>
Report Date:	<u>2018-07-27</u>
Reviewed By:	Jerry Zhang EMC Manager <i>Jerry Zhang</i>
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan). This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA* or any agency of the Federal Government. * This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “*” .

TABLE OF CONTENTS

GENERAL INFORMATION.....3
 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)3
 OBJECTIVE3
 RELATED SUBMITTAL(S)/GRANT(S).....3
 TEST METHODOLOGY3
 MEASUREMENT UNCERTAINTY3
 TEST FACILITY4

SYSTEM TEST CONFIGURATION.....5
 JUSTIFICATION5
 EQUIPMENT MODIFICATIONS5
 EUT EXERCISE SOFTWARE5
 BLOCK DIAGRAM OF TEST SETUP5

SUMMARY OF TEST RESULTS6

FCC §15.203 - ANTENNA REQUIREMENT.....7
 APPLICABLE STANDARD7

FCC §15.205, §15.209, §15.231 (E) - RADIATED EMISSIONS8
 APPLICABLE STANDARD8
 EUT SETUP8
 EMI TEST RECEIVER SETUP.....9
 TEST EQUIPMENT LIST AND DETAILS.....9
 TEST PROCEDURE10
 CORRECTED AMPLITUDE & MARGIN CALCULATION10
 TEST RESULTS SUMMARY10
 TEST DATA10

FCC §15.231(C) – 20 DB BANDWIDTH TESTING.....20
 REQUIREMENT20
 TEST EQUIPMENT LIST AND DETAILS.....20
 TEST PROCEDURE20
 TEST DATA20

FCC §15.231(E) - DEACTIVATION TESTING22
 APPLICABLE STANDARD22
 TEST EQUIPMENT LIST AND DETAILS.....22
 TEST DATA22

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

EUT Name:	WIRELESS THERMOMETER
EUT Model:	KH-0200
FCC ID:	INC-FOKH-T12
Rated Input Voltage:	DC3V from battery
External Dimension:	50mm(L)*24mm(W)*100mm(H)
Serial Number:	180616050
EUT Received Date:	2018.06.20

Objective

This report is prepared on behalf of *Zhejiang Focus-On Import and Export Co., Ltd* in accordance with Part 2, Subpart J, Part 15, Subparts A, and C of the Federal Communications Commission's rules

The tests were performed in order to determine compliance with FCC Rules Part 15, Subpart C, and section 15.203, 15.205, 15.209, and 15.231 rules.

Related Submittal(s)/Grant(s)

Part of system submittal with FCC ID: INC-FOKH-0200.

Test Methodology

All measurements detailed in this Test Report were performed in accordance with ANSI C63.10-2013 "American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices".

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

Measurement Uncertainty

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
Unwanted Emissions, radiated	30M~200MHz: 4.58 dB for Horizontal, 4.59 dB for Vertical 200M~1GHz: 4.83 dB for Horizontal, 5.85 dB for Vertical 1G~6GHz: 4.45 dB, 6G~26.5GHz: 5.23 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	3.12 dB (150 kHz to 30 MHz)

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218,the FCC Designation No. : CN1220.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062D.

SYSTEM TEST CONFIGURATION

Justification

The system was configured in testing mode which was provided by manufacturer.

The device operation frequency is 433.94 MHz. with 3 difference transmission sequences(3 channel default by manufacturer)


Equipment Modifications

No modifications were made to the unit tested.

EUT Exercise Software

No software was used in test.

Block Diagram of Test Setup

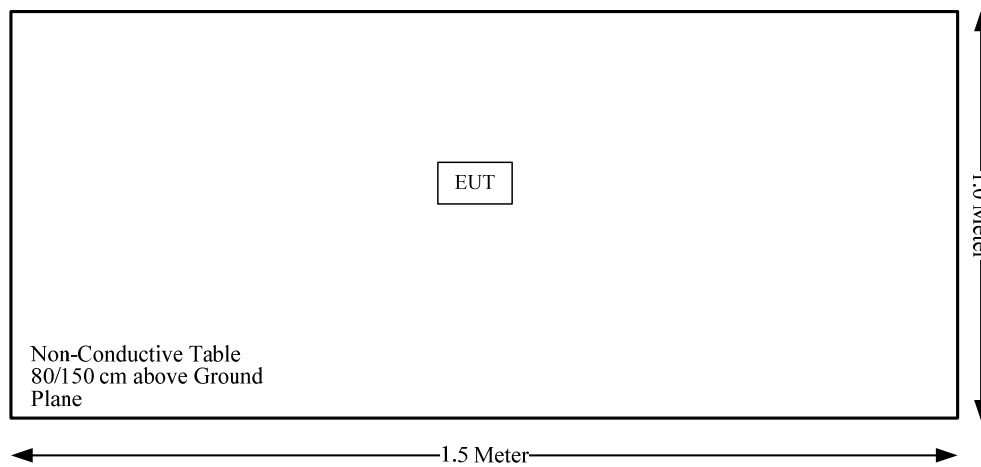

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.207 (a)	Conducted Emissions	Not applicable
§15.205, §15.209, §15.231 (e)	Radiated Emissions	Compliance
§15.231 (c)	20dB Bandwidth	Compliance
§15.231 (e)	Transmission Time	Compliance

Not Applicable: the device was powered by battery when use.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

Result: Compliant.

The EUT has 1 internal antenna, which was permanently attached, fulfill the requirement of this section. Please refer to the EUT photos.

FCC §15.205, §15.209, §15.231 (e) - RADIATED EMISSIONS

Applicable Standard

FCC §15.205, §15.209, §15.231 (e)

(e) Intentional radiators may operate at a periodic rate exceeding that specified in paragraph (a) of this section and may be employed for any type of operation, including operation prohibited in paragraph (a) of this section, provided the intentional radiator complies with the provisions of paragraphs (b) through (d) of this section, except the field strength table in paragraph (b) of this section is replaced by the following:


Fundamental frequency (MHz)	Field strength of fundamental (microvolts/meter)	Field strength of spurious emissions (microvolts/meter)
40.66-40.70	1,000	100
70-130	500	50
130-174	500 to 1,500 ¹	50 to 150 ¹
174-260	1,500	150
260-470	1,500 to 5,000 ¹	150 to 500 ¹
Above 470	5,000	500

¹Linear interpolations.


In addition, devices operated under the provisions of this paragraph shall be provided with a means for automatically limiting operation so that the duration of each transmission shall not be greater than one second and the silent period between transmissions shall be at least 30 times the duration of the transmission but in no case less than 10 seconds.

EUT Setup

Below 1 GHz:

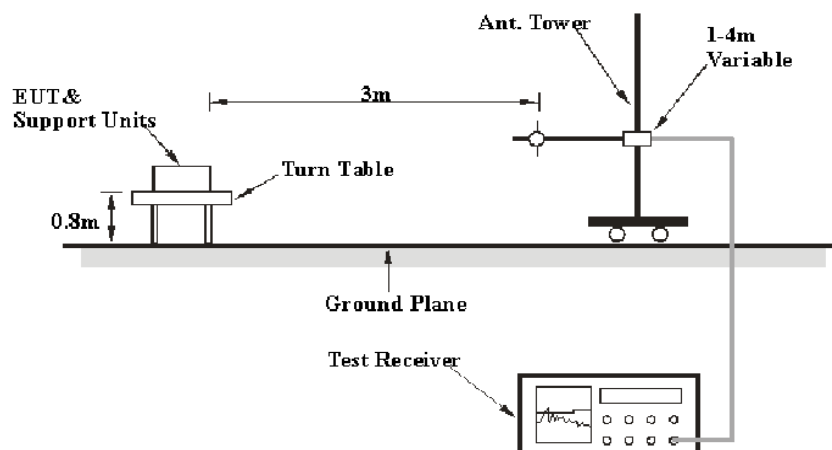

Above 1 GHz:

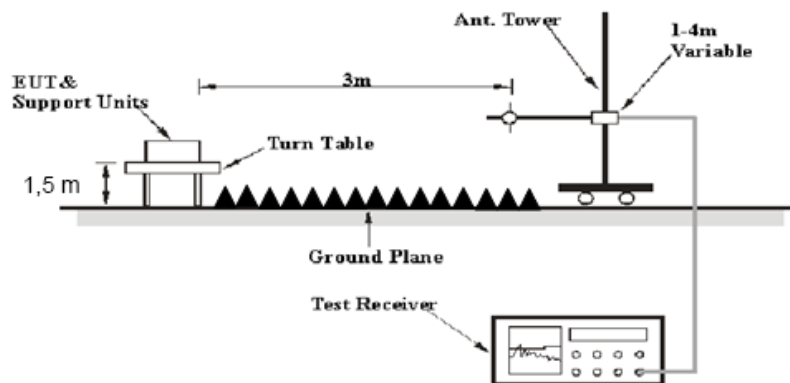

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15 § 15.209, 15.205 and 15.231.

EMI Test Receiver Setup

The system was investigated from 30 MHz to 5 GHz.

During the radiated emission test, the test receiver was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	100 kHz	PK
1 GHz – 5 GHz	1 MHz	3 MHz	/	PK

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2017-12-11	2018-12-11
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
Sunol Sciences	Antenna	JB3	A060611-1	2017-11-10	2020-11-10
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-01	2017-09-05	2018-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0075-01	2017-09-05	2018-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-1000-01	2017-09-05	2018-09-05
HP	Amplifier	8447D	2727A05902	2017-09-05	2018-09-05
Agilent	Spectrum Analyzer	E4440A	SG43360054	2018-01-04	2019-01-04
ETS-Lindgren	Horn Antenna	3115	000 527 35	2016-01-05	2019-01-04
Unknown	Coaxial Cable	C-SJSJ-50	C-0800-01	2017-09-05	2018-09-05
MITEQ	Amplifier	AFS42-00101800-25-S-42	2001271	2017-09-05	2018-09-05

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

According to §15.231, Intentional radiators operating under the provisions of this Section shall demonstrate compliance with the limits on the field strength of emissions, based on the average value of the measured emissions. As an alternative, compliance with the limits in the above table may be based on the use of measurement instrumentation with a CISPR quasi-peak detector

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the data in the following table, the EUT complied with the CFR47 §15.205, §15.209, §15.231 (e).

Test Data

Environmental Conditions

Temperature:	27.5~29.3 °C
Relative Humidity:	35~43 %
ATM Pressure:	101.4 ~ 101.8 kPa

The testing was performed by Blake Yang and Vern Shen from 2018-06-25 to 2018-07-09.

Test mode: Transmitting (Test performed at X,Y,Z Axis, X axis was the worst)

Field Strength (Peak)

Frequency (MHz)	Receiver Reading (dBµV)	Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	15.231	
		Polar (H/V)	Factor (dB/m)				Limit (dBµV/m)	Margin (dB)
Operating Frequency: 433.94 MHz								
433.94	73.93	H	16.48	2.65	26.54	66.52	92.87	26.35
433.94	89.82	V	16.48	2.65	26.54	82.41	92.87	10.46
867.88	27.61	H	21.76	4.09	26.68	26.78	72.87	46.09
867.88	28.13	V	21.76	4.09	26.68	27.30	72.87	45.57
1301.76	48.15	H	24.53	1.57	35.95	38.30	74.00	35.7
1301.76	50.83	V	24.53	1.57	35.95	40.98	74.00	33.02
1735.68	47.31	H	26.19	1.65	36.06	39.09	74.00	34.91
1735.68	48.63	V	26.19	1.65	36.06	40.41	74.00	33.59
2169.60	46.57	H	27.64	1.74	36.18	39.77	74.00	34.23
2169.60	47.85	V	27.64	1.74	36.18	41.05	74.00	32.95
2603.52	46.32	H	28.67	1.88	36.38	40.49	74.00	33.51
2603.52	47.25	V	28.67	1.88	36.38	41.42	74.00	32.58

Field Strength (Average)

Frequency (MHz)	Peak Measurement @ 3m (dBµV/m)	Polar (H/V)	Duty Cycle Correction Factor (dB)	Average Amp. (dBµV/m)	15.231	
					Limit (dBµV/m)	Margin (dB)
Operating Frequency: 433.94 MHz						
433.94	66.52	H	-14.12	52.40	72.87	20.47
433.94	82.41	V	-14.12	68.29	72.87	4.58
867.88	26.78	H	-14.12	12.66	52.87	40.21
867.88	27.30	V	-14.12	13.18	52.87	39.69
1301.76	38.30	H	-14.12	24.18	54.00	29.82
1301.76	40.98	V	-14.12	26.86	54.00	27.14
1735.68	39.09	H	-14.12	24.97	54.00	29.03
1735.68	40.41	V	-14.12	26.29	54.00	27.71
2169.60	39.77	H	-14.12	25.65	54.00	28.35
2169.60	41.05	V	-14.12	26.93	54.00	27.07
2603.52	40.49	H	-14.12	26.37	54.00	27.63
2603.52	41.42	V	-14.12	27.30	54.00	26.7

Note:

Duty Cycle Correction Factor= $20 \cdot \log(\text{Duty cycle}) = 20 \cdot \log(19.68\%) = -14.12 \text{ dB}$

The maximum duty cycle was test by software: Duty cycle test

N is the number of spectrum analyzer bins showing a device transmission, Dwell Time is the dwell time per bin (Dwell Time = $S/B = 960\text{ms}/8000 = 0.12\text{ms}$, S is the sweep time:960ms and B is the number of bin:8000)


Duty cycle= (Dwell time*Tx bin in 100ms)/100ms

100ms bin = $100\text{ms}/0.12\text{ms} = 834 \text{ pin}$

Maximum duty cycle= $\max\{\text{duty cycle}_{\text{bin } 1-834}, \text{duty cycle}_{\text{bin } 2-835}, \text{duty cycle}_{\text{bin } 3-836}, \dots, \text{duty cycle}_{\text{bin } 7166-8000}\}$


Channel 1:

Transmission period

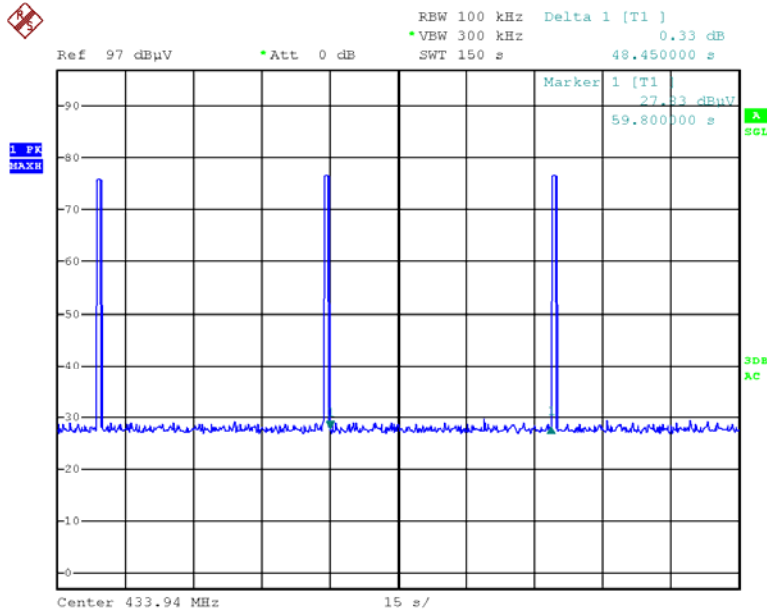


Date: 9.JUL.2018 11:26:11

Transmission duration=960ms

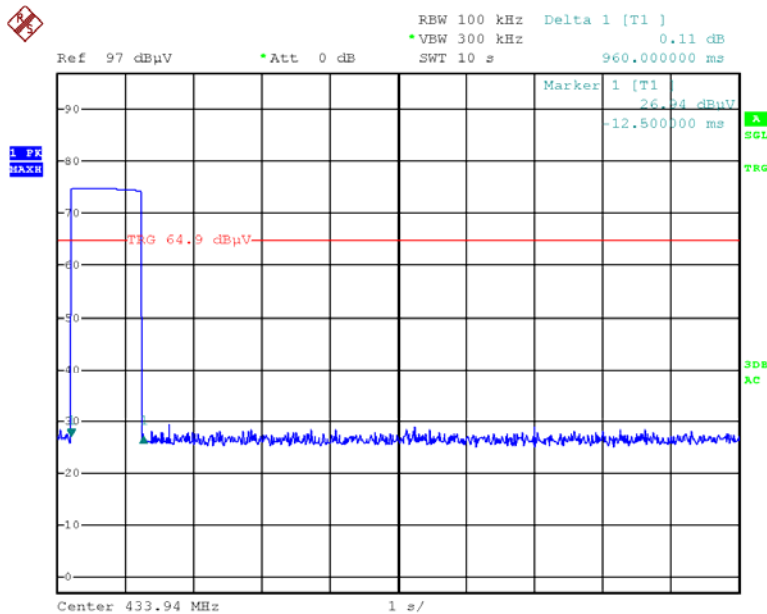


Date: 9.JUL.2018 11:16:02

Pulses in 960ms

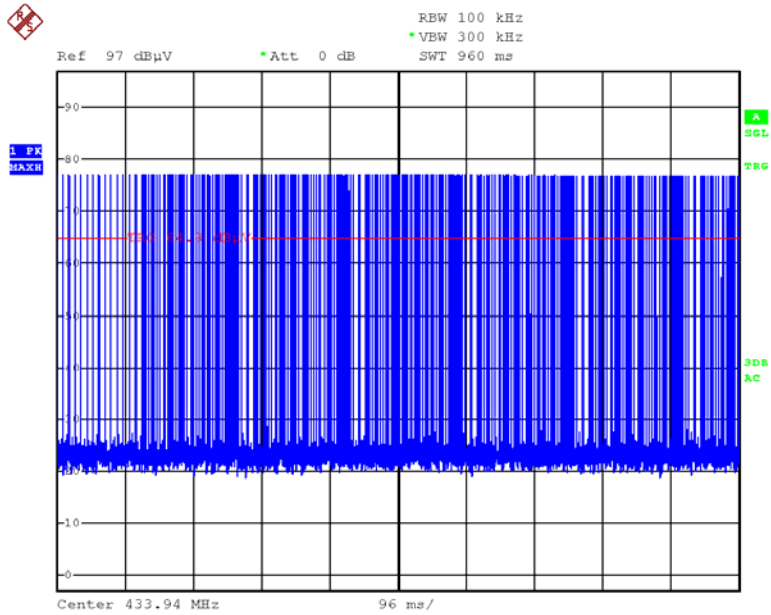


Date: 9.JUL.2018 09:33:52

Maximum duty cycle in 100ms

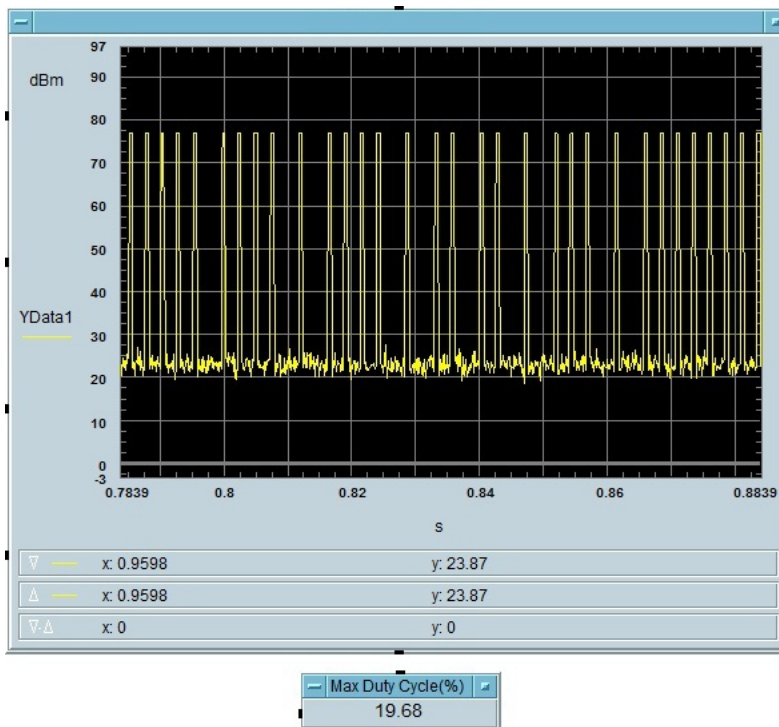


Channel 2:

Transmission period

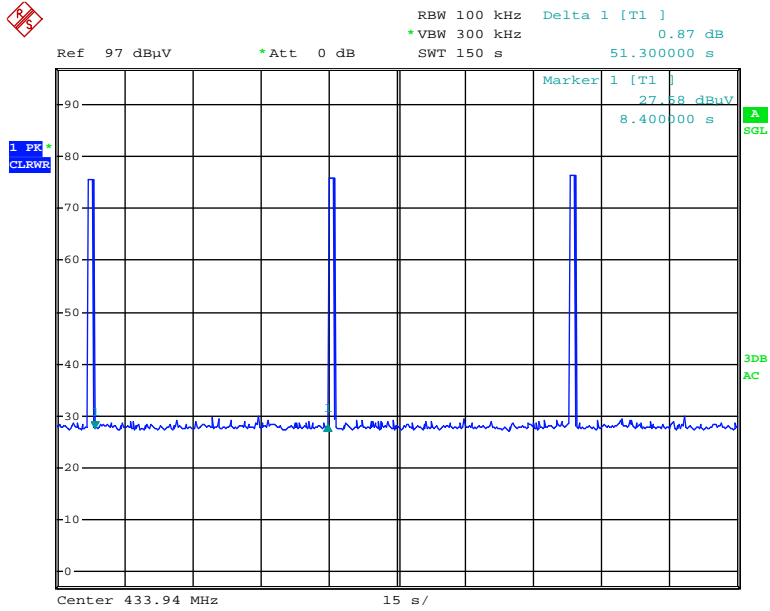


Date: 25.JUL.2018 14:01:47

Transmission duration=960ms

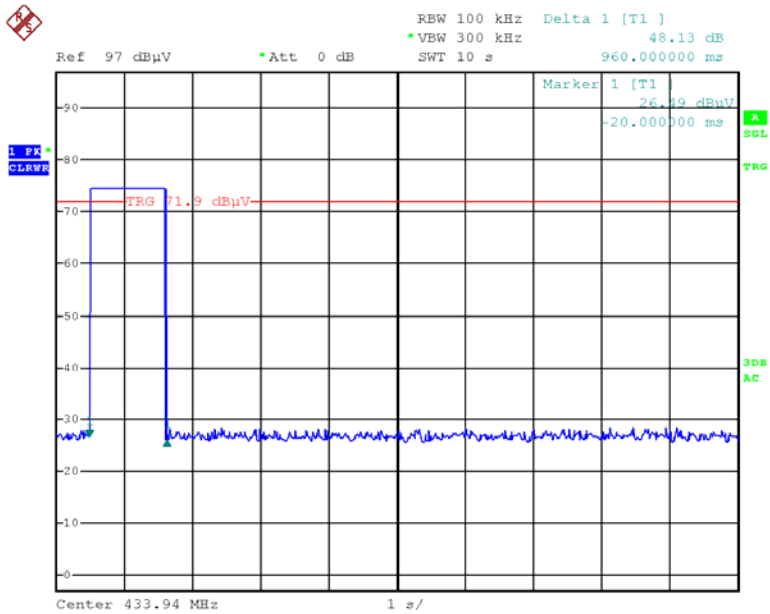


Date: 26.JUL.2018 18:43:06

Pulses in 960ms

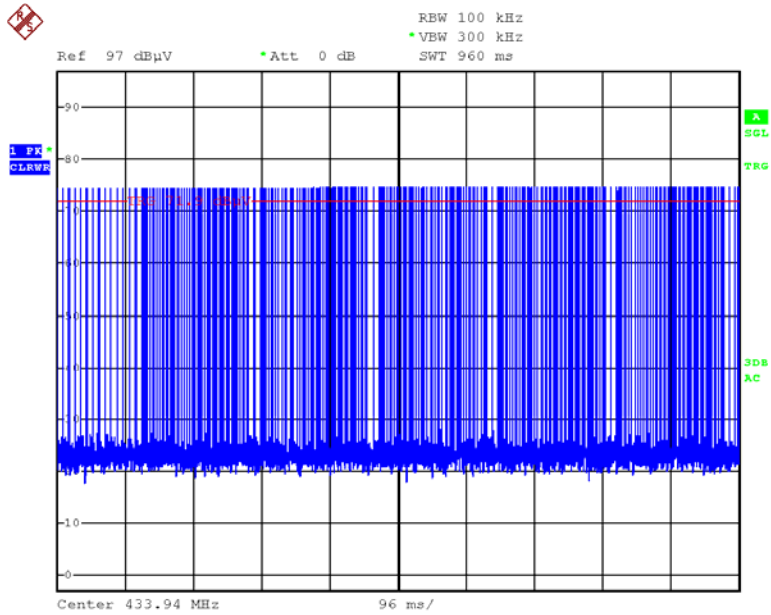


Date: 26.JUL.2018 15:29:20

Maximum duty cycle in 100ms

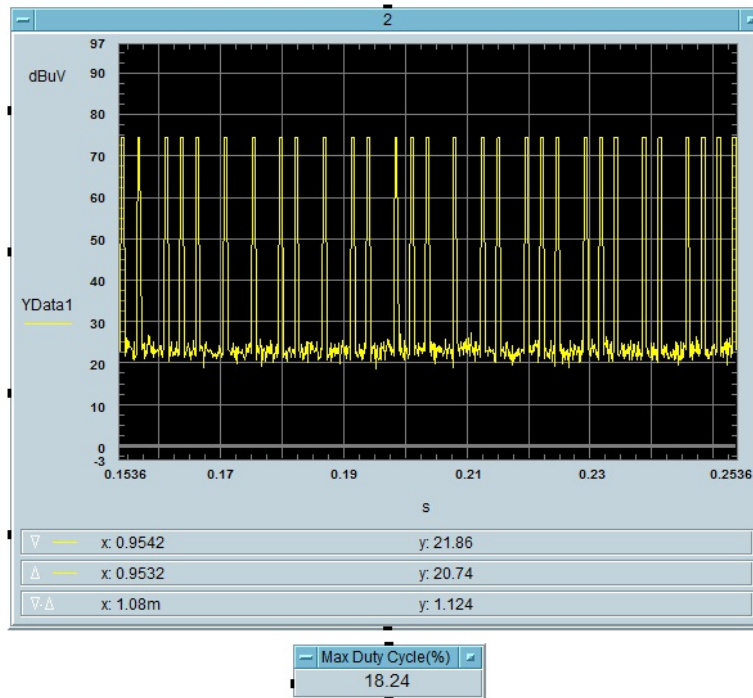


Channel 3:

Transmission period

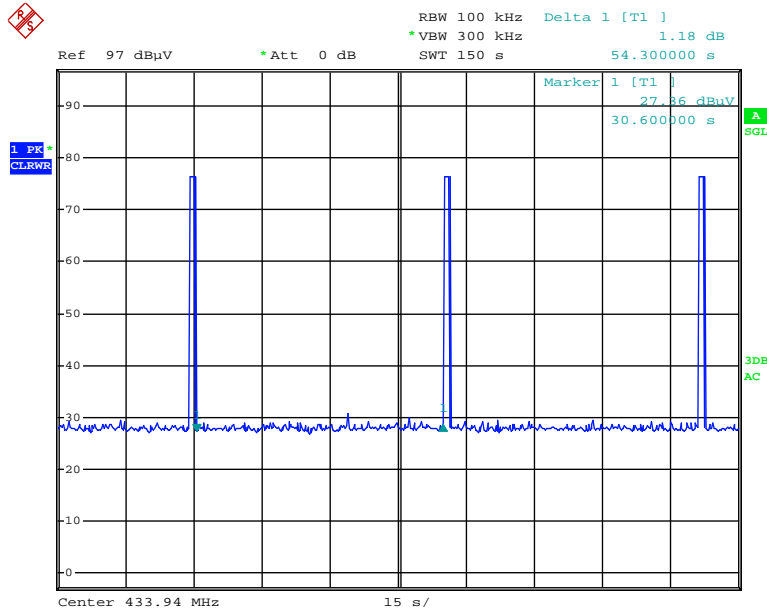


Date: 25.JUL.2018 14:06:18

Transmission duration=960ms

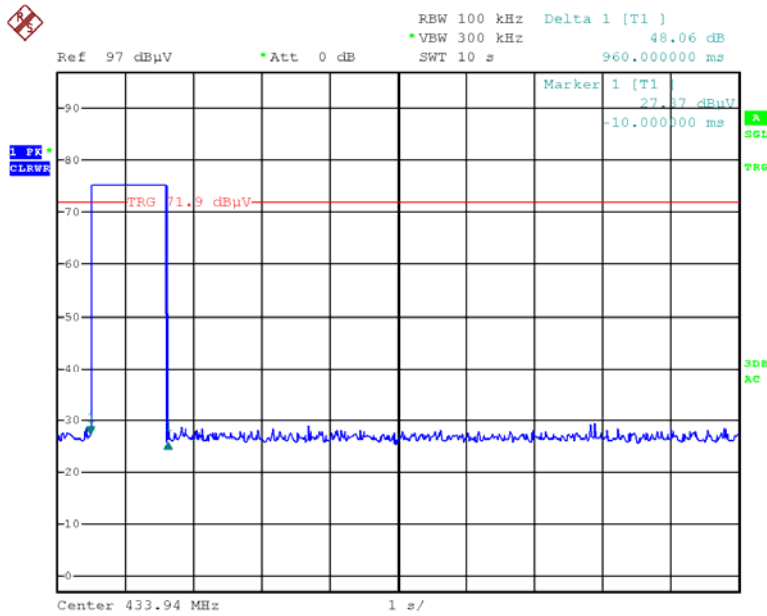


Date: 26.JUL.2018 18:47:35

Pulses in 960ms


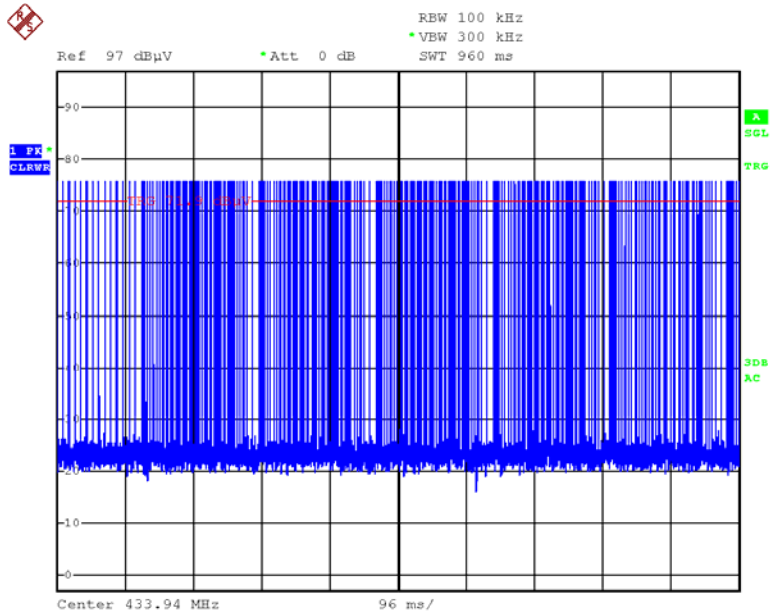


Date: 26.JUL.2018 15:46:42



Maximum duty cycle in 100ms

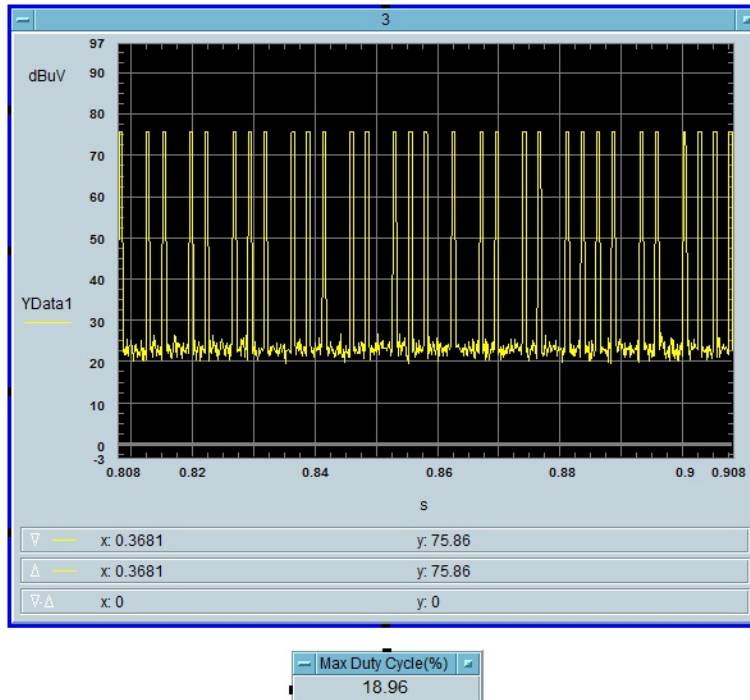

Horizontal:

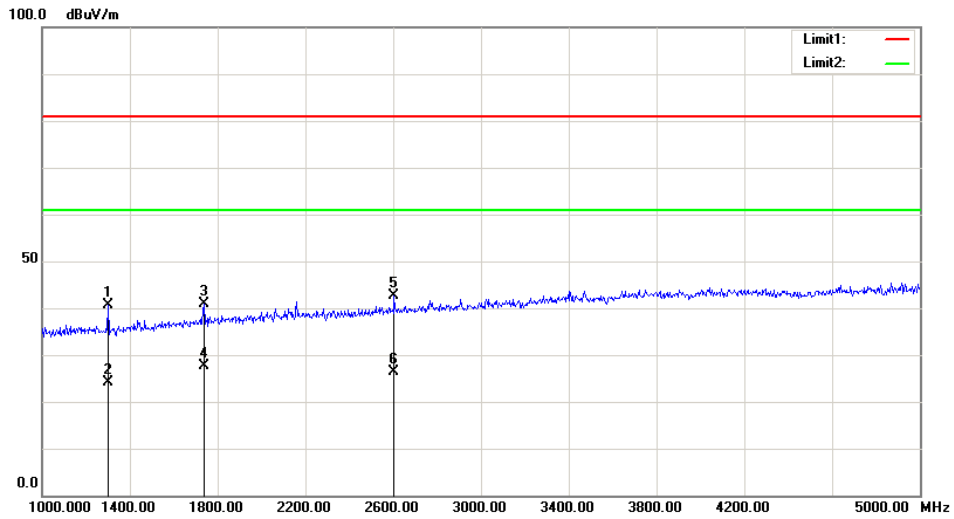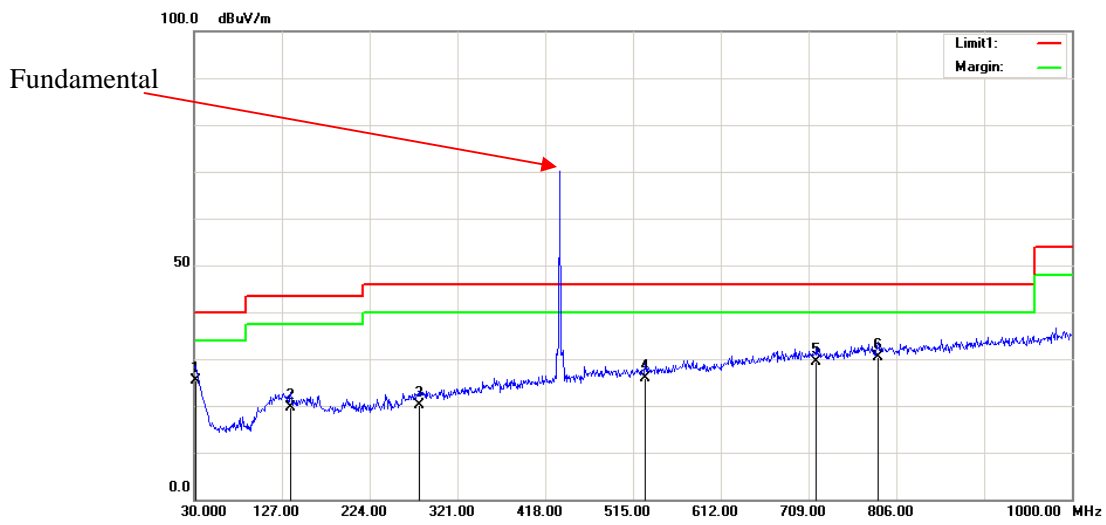

Vertical:

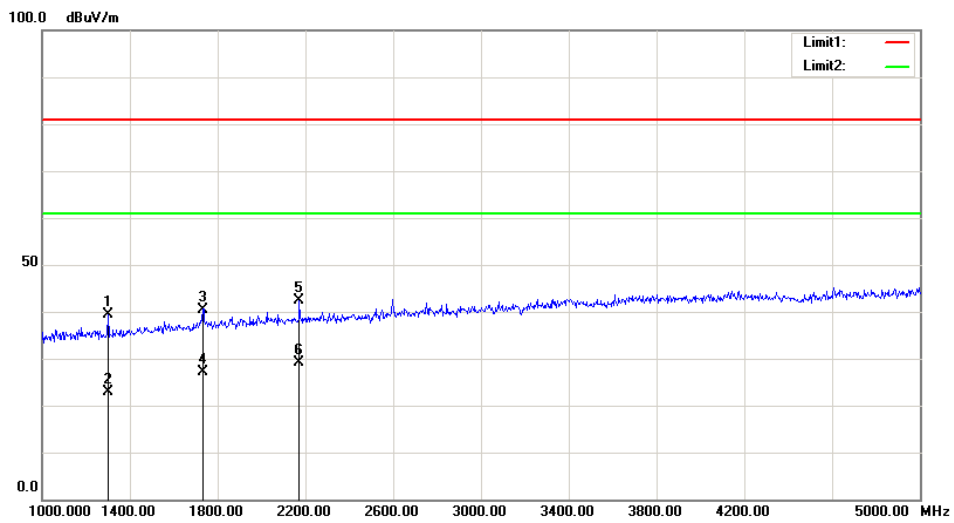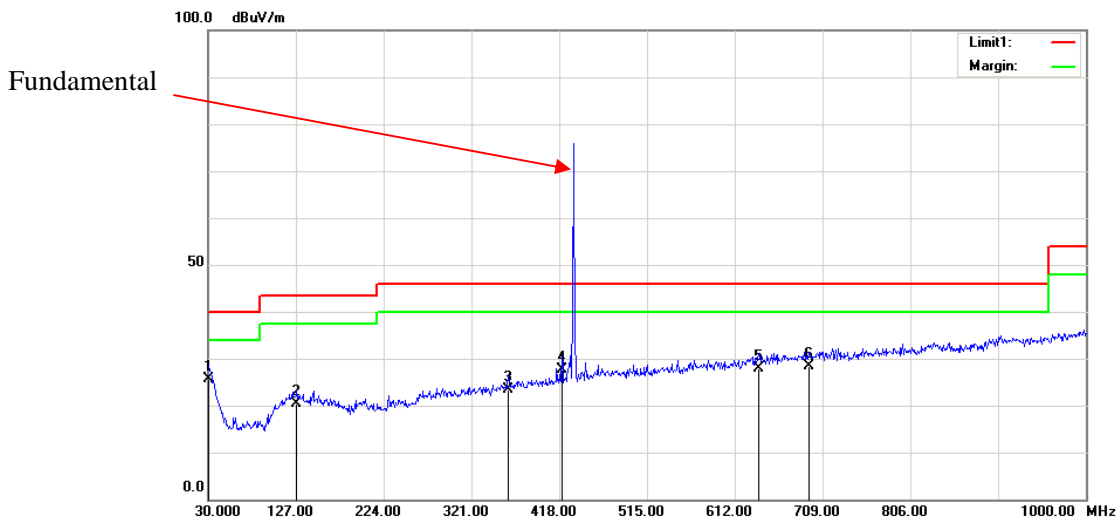

FCC §15.231(c) – 20 dB BANDWIDTH TESTING

Requirement

Per 15.231(c), The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. Bandwidth is determined at the points 20 dB down from the modulated carrier.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2017-12-11	2018-12-11
Sunol Sciences	Antenna	JB3	A060611-1	2017-11-10	2020-11-10
HP	Amplifier	8447D	2727A05902	2017-09-05	2018-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-01	2017-09-05	2018-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0075-01	2017-09-05	2018-09-05

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

The waveform was received by the test antenna which was connected to the spectrum analyzer, plot the 20 dB bandwidth.

Test Data

Environmental Conditions

Temperature:	27.5 °C
Relative Humidity:	56 %
ATM Pressure:	101.4 kPa

The testing was performed by Vern Shen on 2018-06-25.


Test Mode: Transmitting

Please refer to following table and plot.

Channel Frequency (MHz)	20 dB Bandwidth (kHz)	Limit (kHz)	Result
433.94	8.4	1084.85	Pass

Note: Limit = 0.25% * Center Frequency = 0.25% * 433.94 MHz = 1084.85 kHz

20 dB Bandwidth

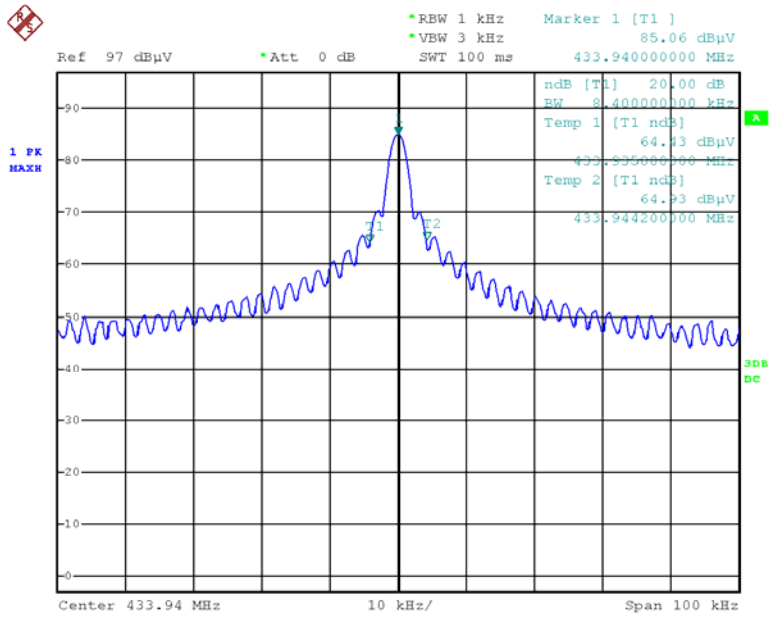

Date: 25.JUN.2018 15:40:44

FCC §15.231(e) - DEACTIVATION TESTING

Applicable Standard

Per 15.231(e)

In addition, devices operated under the provisions of this paragraph shall be provided with a means for automatically limiting operation so that the duration of each transmission shall not be greater than one second and the silent period between transmissions shall be at least 30 times the duration of the transmission but in no case less than 10 seconds.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2017-12-11	2018-12-11
Sunol Sciences	Antenna	JB3	A060611-1	2017-11-10	2020-11-10
HP	Amplifier	8447D	2727A05902	2017-09-05	2018-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-01	2017-09-05	2018-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0075-01	2017-09-05	2018-09-05

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	26.4~27.5°C
Relative Humidity:	24~56 %
ATM Pressure:	100.1~101.4 kPa

The testing was performed by Vern Shen from 2018-07-09 to 2018-07-26


Test Mode: Transmitting

Test Result: Compliance. Please refer to following plot.

Channel	Deactivate Time (s)	Deactivate Time Limit (s)	Silent Time (s)	Silent Time/Transmission duration Limit (s)	Result
1	0.96	<1	48.45	>28.8	Pass
2	0.96	<1	51.3	>28.8	Pass
3	0.96	<1	54.3	>28.8	Pass


Channel 1:

Silent period

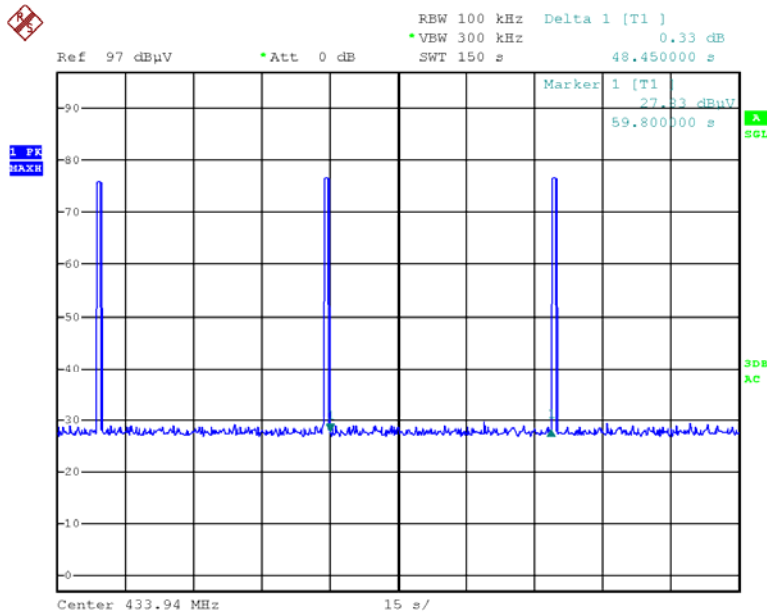

Date: 9.JUL.2018 11:26:11


Transmission duration

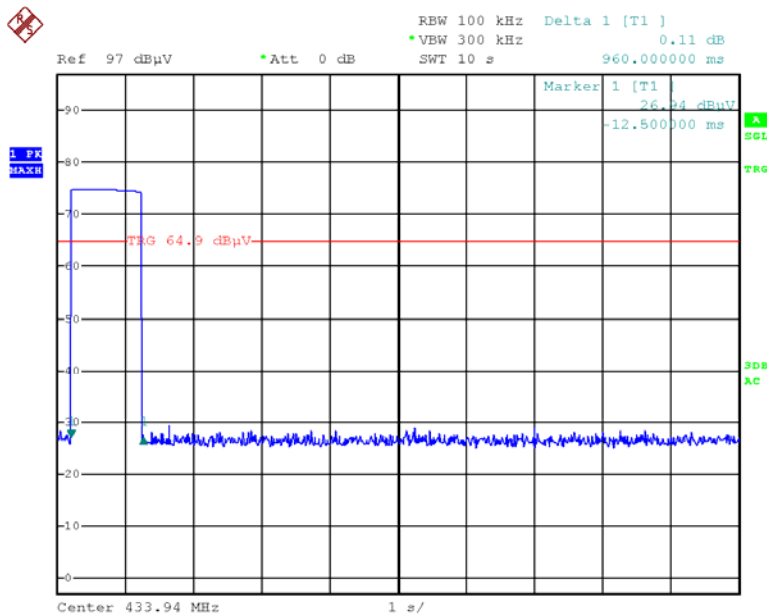

Date: 9.JUL.2018 11:16:02


Channel 2:

Silent period

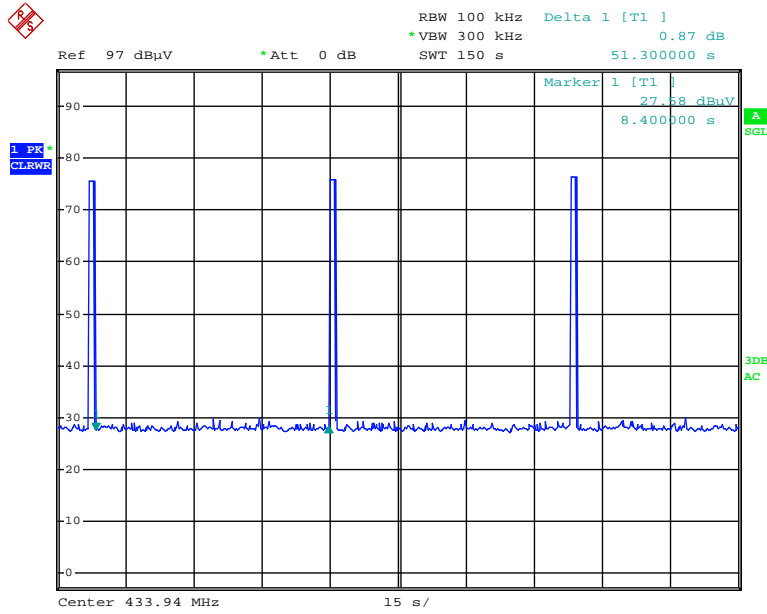

Date: 25.JUL.2018 14:01:47


Transmission duration=960ms

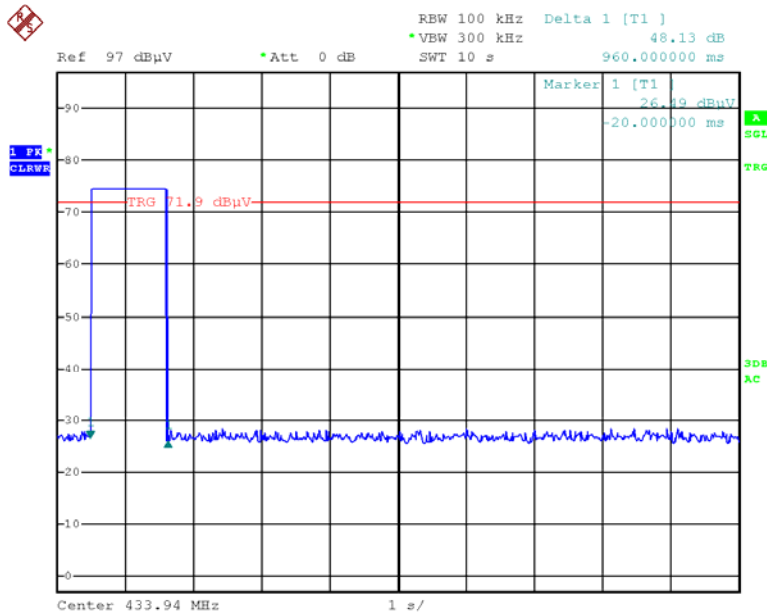

Date: 26.JUL.2018 18:43:06


Channel 3:

Silent period

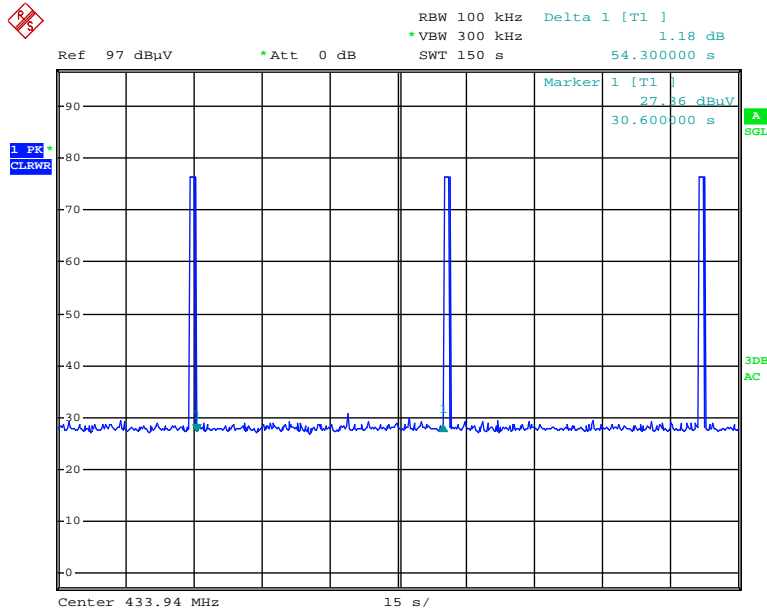

Date: 25.JUL.2018 14:06:18

Transmission duration=960ms

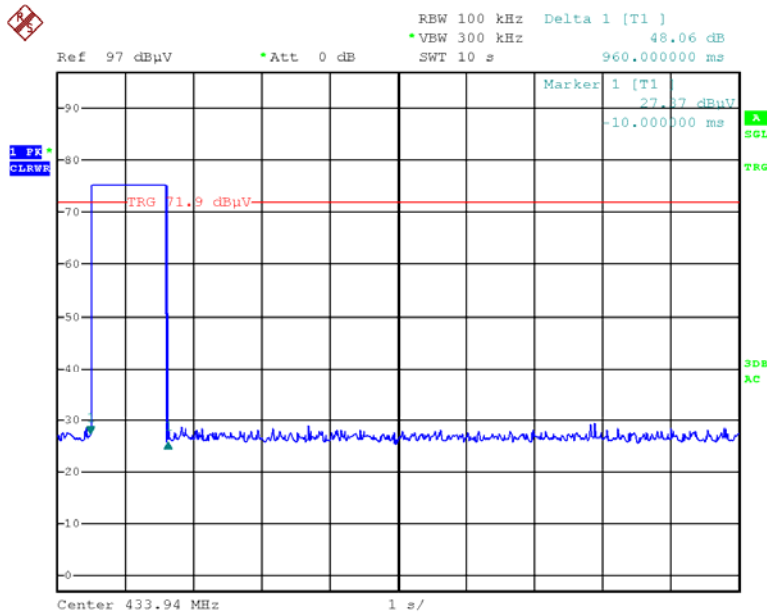

Date: 26.JUL.2018 18:47:35

*****END OF REPORT*****