



Test report No:


NIE: 48496RAN.002

Test report

REFERENCE STANDARDS:

FCC 47CFR Part 2.1093, Published RF Exposure KDB Procedures,
 ISED RSS -102 Issue 5:2015

Identification of item tested.....:	Smart Watch
Trade	Polar
Model and /or type reference	1V
Other identification of the product	FCC ID: INW1V
Final HW version	55521.05
Final SW version	MWD41
Features	GPS, Bluetooth 4+1+HS, Wi-Fi 802.11 b/g/n
Manufacturer	POLAR ELECTRO OY Professorintie 5, 90440 Kempele, Finland
Test method requested, standard.....:	<ol style="list-style-type: none"> 1. FCC 47 CFR Part 2.1093. (10-1-14 Edition) Radiofrequency radiation exposure evaluation: portable devices. 2. FCC OET KDB 447498 D01 General RF Exposure Guidance v06 (October 2015) 3. FCC OET KDB 865664 D01 - SAR Measurement Requirements for 100 MHz to 6 GHz v01r04 (August 2015). 4. FCC OET KDB 865664 D02 RF Exposure Reporting v01r02 (October 2015) 5. FCC OET KDB 248227 D01 802.11 Wi-Fi SAR v02r02 (October 2015). 6. ISED RSS-102 Issue 5 (2015-03) – Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands) 7. Canada's Safety Code No.6 – Limits of Human Exposure to Radiofrequency Electromagnetic Fields in the Frequency Range from 3 kHz to 300 GHz .

Summary	<p>Considering the results of the performed test according to FCC 47CFR Part 2.1093 and ISED RSS-102 Issue 5, the item under test is IN COMPLIANCE with the requested specifications specified in the standards.</p> <p>The maximum 10g volume averaged SAR found during this test into the extremity exposure condition has been 0.321 W/kg, for 802.11 b mode.</p> <p>NOTE: The results presented in this Test Report apply only to the particular item under test established in page 1 of this document, as presented for test on the date(s) shown in section, “USAGE OF SAMPLES, TESTING PERIOD AND ENVIRONMENTAL CONDITIONS”.</p>	
Approved by (name / position & signature)	Francisco Cañas Regulatory Lab Director	 FRANCISCO CAÑAS ESCRIBANO 2016.08.12 11:35:01 +02'00'
Date of issue	2016-08-12	
Report template No.	FDT08_18	

Index

Competences and guarantees.....	4
General conditions.....	4
Uncertainty	4
Usage of samples.....	5
Test sample description	5
Identification of the client	5
Testing period.....	5
Environmental conditions.....	5
Remarks and comments.....	6
Used instrumentation.....	6
Testing verdicts	7
Appendix A – Test configuration	8
Appendix B – Test results	19
Appendix C – Measurement report	26
Appendix D – System Validation Reports	28
Appendix E – Calibration data	30
Appendix F – Photographs	82

Competences and guarantees

AT4 wireless is a testing laboratory accredited by the National Accreditation Body (ENAC -Entidad Nacional de Acreditación), to perform the tests indicated in the Certificate No. 51/LE 147.

In order to assure the traceability to other national and international laboratories, AT4 wireless has a calibration and maintenance program for its measurement equipment.

AT4 wireless guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated on the report and, it is based on the knowledge and technical facilities available at AT4 wireless at the time of performance of the test.

AT4 wireless is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of AT4 wireless.

General conditions

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of AT4 wireless.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of AT4 wireless and the Accreditation Bodies.

Uncertainty

Uncertainty (factor $k=2$) was calculated according to the following documents:

1. FCC OET KDB 865664 D01 - SAR Measurement Requirements for 100 MHz to 6 GHz v01r04 (August 2015).

Usage of samples

Samples undergoing test have been selected by: the client

Sample M/01 is composed of the following elements:

Control N°	Description	Model	Serial N°	Date of reception
48496/011	Smart Watch (RF conducted)	1V	C6171V0000668	10/06/2016

Sample M/02 is composed of the following elements:

Control N°	Description	Model	Serial N°	Date of reception
48496/007	Smart Watch	1V	C6171V0000627	10/06/2016
48496/032	Smart Watch	1V	C6171V0000618	20/06/2016

1. Sample M/01 has undergone the test(s) specified in subclause “Test method requested”: Conducted average output power.
2. Sample M/02 has undergone the test(s) specified in subclause “Test method requested”: SAR evaluation for 802.11 modes.

Test sample description

The test sample consists of a Smart Watch.

Identification of the client

Company name: POLAR ELECTRO OY
Postal Address: Professorintie 5, 90440 Kempele, Finland
Contact person: Laura Uusimäki-Virpi
Job title / Department: Project Leader, Sales Items
Telephone: +358-50-5366443
e-mail: laura.uusimaki-virpi@polar.com

Testing period

The performed test started on 2016-06-22 and finished on 2016-08-09.

The tests have been performed at AT4 wireless.

Environmental conditions

In the laboratory for measurements, the following limits were not exceeded during the test:

Temperature	Min. = 21.66 °C Max. = 24.78 °C
Relative humidity	Min. = 43.38 % Max. = 51.63 %

Remarks and comments

- 1: Testing of other required channels is not required according to FCC OET KDB 447498 D01 General RF Exposure Guidance v06, paragraph “4.4.1. General SAR test reduction considerations”.
- 2: Only the plots of the highest reported SAR for each test position and mode/band are included in appendix C.

Used instrumentation

1. Dosimetric E-field probe EX3DV4 SPEAG
2. Data acquisition device SPEAG DAE4
3. Electro-optical converter SPEAG EOC3
4. 2450 MHz dipole validation kit SPEAG D2450V2
5. Robot Stäubli RX60BL
6. Robot controller Stäubli CM7MB
7. SAR measurement software SPEAG DASY52 V52.8.8.1222
8. SAR post processing software SPEAG SEMCAD X
9. Measurement server SPEAG DASY5 SE UMS 011 BS
10. SAM head-body simulator SPEAG Twin SAM V4.0
11. Body Tissue Equivalent Liquids for 2450MHz band
12. Vector network analyzer Agilent FieldFox N9923A
13. Dielectric probe kit SPEAG DAK-3.5
14. Power sensor DC 50 MHz to 18 GHz R&S model NRP-Z81
15. Power meter Agilent E4419B
16. RF Generator R&S SMU200A
17. DC Power supply Agilent U8002A
18. Dual directional coupler NARDA FSCM 99899
19. Power amplifier MITEQ AMF-4D-00400600-50-30P
20. 6 dB attenuator Weinschel 75 A-6-11
21. 20 dB attenuator Weinschel 75 A-20-11
22. SPEAG Mounting Device for Hand-Held Transmitters.

Testing verdicts

Not applicable	N/A
Pass	P
Fail	F
Not measured	N/M

2450 MHz band

FCC 47CFR Part 2.1093 & Health Canada Safety Code 6	VERDICT			
	NA	P	F	NM
(d)(2) 802.11b		P		
(d)(2) 802.11g		P		
(d)(2) 802.11n20/n40		P		
(d)(2) Bluetooth		P		

Appendix A – Test configuration

INDEX

1.	GENERAL INTRODUCTION	10
1.1.	Application Standard.....	10
1.2.	General requirements	10
1.3.	Measurement system requirements	10
1.4.	Phantom requirements.....	10
1.5.	Measurement Liquids requirements.....	11
2.	MEASUREMENT SYSTEM	12
2.1.	Measurement System	12
2.2.	Test Positions of device relative to body	16
2.3.	Test to be performed	16
2.4.	Description of interpolation/extrapolation scheme	16
2.5.	Determination of the largest peak spatial-average SAR	16
2.6.	System Validation	16
3.	UNCERTAINTY.....	17
4.	SAR LIMIT	18
5.	DEVICE UNDER TEST	18
5.1.	Dimensions.....	18
5.2.	Wireless Technology.....	18
5.3.	Antenna Location.....	18

1. GENERAL INTRODUCTION

1.1. Application Standard

The Federal Communications Commission (FCC) sets the limits for General Population/Uncontrolled exposure to radio frequency electromagnetic fields for transmitting devices designed to be used within 20 centimetres of the body of the user under FCC 47 CFR Part 2.1093 - “Radiofrequency radiation exposure evaluation: portable devices”, paragraph (d)(2).

Innovation, Science and Economic Development Canada (formerly Industry Canada (ISED) regulates the radio spectrum for all transmitters operated in Canada and sets the limits for General Population/Uncontrolled exposure when the exposure occurs at a distance of 0.2 m or less into the Health Canada Safety Code 6, paragraph 2.1 “Basic restrictions”.

1.2. General requirements

The SAR measurement has been performed continuing the following considerations and environment conditions:

- The ambient temperature shall be in the range of 18°C to 25°C and the variation shall not exceed +/- 2°C during the test.
- The ambient humidity shall be in the range of and 30% - 70%.
- The device battery shall be fully charged before each measurement.

1.3. Measurement system requirements

The measurement system used for SAR tests fulfils the procedural and technical requirements described at the reference standards used.

1.4. Phantom requirements

The phantom for head worn is a simplified representation of the human anatomy and comprised of material with electrical properties similar to the corresponding tissues in human body. The human model has the following proportions:




Figure 1: Proportions of Phantom

The shell model is a shaped container and it has the representation shown in the following figure:

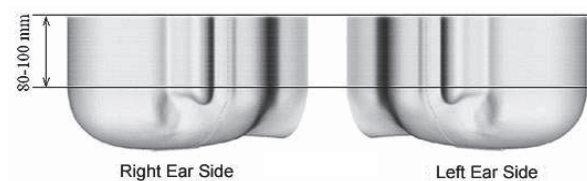


Figure 2: Proportions and shape of Phantom shell

The phantom model for body measurements is an elliptical open-top container with a flat bottom, with the following shape and dimensions:

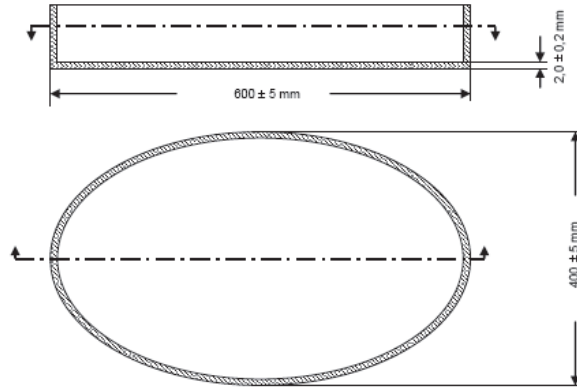


Figure 3: Proportions and shape of Phantom shell

1.5. Measurement Liquids requirements.

The liquids used to simulate the human tissues, must fulfil the requirements of the dielectric properties required. These target dielectric properties per FCC OET KDB 865664 D01 instructions come from the dipole and probe calibration data which are included in Appendix B, Section 3, of this document.

To minimize the effect of reflections on peak spatial-average SAR values, from the upper surface of the tissue-equivalent liquid, the depth of the liquid should be at least 15 cm.

2. MEASUREMENT SYSTEM

2.1. Measurement System

The DASY5 system for performing compliance tests consists of the following items:






Figure 4: SAR Measurement system


- A standard high precision 6-axis robot (Stäubli TX=RX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running Win7 professional operating system and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.


Manufacturer	Device	Type
Schmid & Partner Engineering AG	Dosimetric E-Field Probe	EX3DV4
Schmid & Partner Engineering AG	Data Acquisition Electronics	DAE4
Schmid & Partner Engineering AG	Electro-Optical Converter	EOC3
Stäubli	Robot	RX60BL
Stäubli	Robot controller	CS7MB
Schmid & Partner Engineering AG	Measurement Server	DASY5 SE UMS 011 BS
Schmid & Partner Engineering AG	SAM head-body simulator	TWIN SAM V4.0
Schmid & Partner Engineering AG	Mounting Device for Hand-Held Transmitters	SD000 HD1HA
Schmid & Partner Engineering AG	Measurement Software	DASY52 V52.8.8.1222
Schmid & Partner Engineering AG	Postprocessing Software	SEMCAD X
Schmid & Partner Engineering AG	2450 MHz System Validation Dipole	D2450V2
Agilent	Vector Network Analyser	FieldFox N9923A
Schmid & Partner Engineering AG	Dielectric Probe Kit	DAK-3.5


Table 1: Measurement Equipment

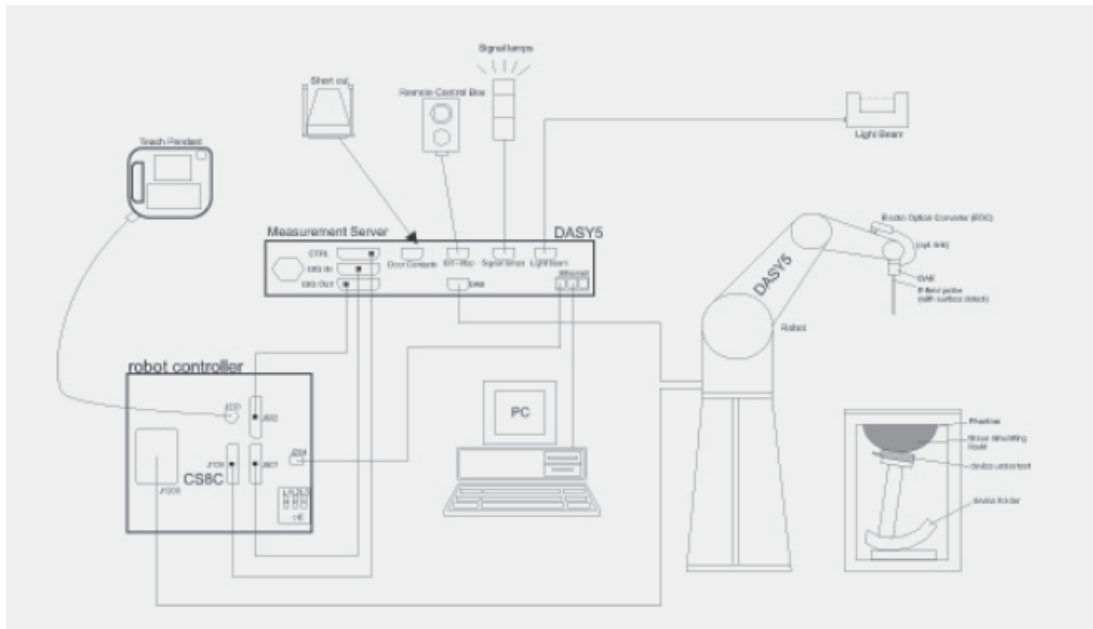	Model	EX3DV4
	Construction	Symmetrical design with triangular core. Built-in shielding against static charges. PEEK enclosure material (resistant to organic solvents, e.g., DGBE).
	Frequency	10 MHz to > 6 GHz; Linearity: ± 0.2 dB (30 MHz to 6 GHz)
	Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)
	Dynamic Range	10 μ W/g to > 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)
	Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1.0 mm

	Model	DAE4
	Construction	Signal amplifier, multiplexer, A/D converter, and control logic. Serial optical link communication with DASY4/5 embedded system (fully remote controlled). Two-step probe touch detector for mechanical surface detection and emergency robot stop.
	Measurement Range	-100 to +300 mV (16 bit resolution and two range settings: 4mV, 400mV)
	Input Offset Voltage	< 5 μ V (with auto zero)
	Input Resistance	200 MOhm
	Input Bias Current	< 50 fA

	Model	Twin SAM
	Construction	The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528 and IEC 62209-1. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot.
	Material	Vinylester, glass fiber reinforced (VE-GF)
	Liquid Compatibility	Compatible with all SPEAG tissue simulating liquids (incl. DGBE type)
	Shell Thickness	2 \pm 0.2 mm (6 \pm 0.2 mm at ear point)
	Dimensions	Length: 1000 mm Width: 500 mm Height: adjustable feet
	Filling Volume	Approx. 25 liters
	Wooden Support	SPEAG standard phantom table

	Model	Mounting Device for Hand-Held Transmitters
	Construction	In combination with the Twin SAM V5.0/V5.0c or ELI Phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat).
	Material	Polyoxymethylene (POM)

	Model	System Validations Kits 450 MHz – 6 GHz		
	Construction	Symmetrical dipole with I/4 balun. Enables measurement of feedpoint impedance with NWA. Matched for use near flat phantoms filled with tissue simulating solutions.		
	Frequency	450 MHz to 5800 MHz		
	Return Loss	20 dB at specified validation position		
	Dimensions (length and overall height in mm)	Product	Dipole length	Overall height
	D450V3	290.0	330.0	
	D750V3	179.0	330.0	
	D900V2	148.5	340.0	
	D1800V2	72.5	300.0	
	D2000V2	65.0	300.0	
	D2450V2	52.0	290.0	
	D2600V2	49.2	290.0	
	D5GHzV2	20.6	300.0	

2.2. Test Positions of device relative to body

According to the FCC KDB 447498 D01 General RF Exposure Guidance, paragraph “4.2.3. Extremity exposure conditions”, a flat phantom must be used if the exposure condition is more conservative than the actual use conditions. For devices with irregular shapes or form factors that do not conform to a flat phantom, and/or unusual operating configurations and exposure conditions, a KDB inquiry is also required to determine the appropriate SAR measurements procedures.

Due to its curved back face, which introduces a separation distance between the flat phantom and the device, and based on a previous FCC Inquiry, with tracking number 539966, and an ISED Inquiry, a more conservative testing position has been search to perform testing. Measurements have been performed into the flat side of the phantom (test position 1), into the ear side of the head phantom (test positions 2 and 3), into the cheek side of the head phantom (test positions 4 and 5) and in the neck side (test positions 6 and 7), determining test position 7 as the worst case testing configuration for SAR measurements. Please see “Appendix F – Photographs” for further information.

2.3. Test to be performed

Testing has been performed at the worst device position previously described, using the centre, low-end and the high-end frequencies of each supported transmitting technology and transmitting band.

2.4. Description of interpolation/extrapolation scheme

The local SAR inside the Phantom is measured using small dipole sensing elements inside a probe element. The probe tip must not be in contact with the Phantoms surface in order to minimise measurement errors, but the highest local SAR is obtained from measurements at a certain distances from the shell trough extrapolation. The accurate assessment of the maximum SAR averaged over 1 gr and 10 gr. requires a very fine resolution in the three dimensional scanned data array. Since the measurements have to be performed over a limited time, the measured data have to be interpolated to provide an array of sufficient resolution.

The interpolation of 2D area scan is used after the initial area scan, at a fixed distance from the Phantom shell wall. The initial scan data is collected with approx. 15 mm spatial resolution and this interpolation is used to find the location of the local maximum for positioning the subsequent 3D scanning within a 1 mm resolution.

For the 3D scan, data is collected on a spatially regular 3D grid having 5 mm steps in both directions. After the data collection by the SAR probe, the data are extrapolated in the depth direction to assign values to points in the 3D array closer to the shell wall. A notional extrapolation value is also assigned to the first point outside the shell wall so that subsequent interpolation schemes will be applicable right up to the shell wall boundary.

2.5. Determination of the largest peak spatial-average SAR

To determine the maximum value of the peak spatial-average SAR of a DUT, all device positions, configurations and operational modes should be tested for each frequency band.

The averaging volume shall be chosen as 1gr. of contiguous tissue. The cubic volumes, over which the SAR measurements are averaged after extrapolation and interpolation, are chosen in order to include the highest values of local SAR.

The maximum SAR level for the DUT will be the maximum level obtained of the performed measurements, and indicated in the previous points.

2.6. System Validation

Prior to the SAR measurements, system verification is done to verify the system accuracy. A complete SAR evaluation is done using a half-wavelength dipole as source with the frequency of the mid-band channel of the operating band, or within 10% of this channel.

The measured 1 gr. and 10 gr. SAR should be within 10% of the expected target values specified in the calibration certificate of the dipole, for the specific tissue and frequency used.

3. UNCERTAINTY

According to FCC OET KDB 865664 D01 - SAR Measurement Requirements for 100 MHz to 6 GHz v01r04 (August 2015), as the highest measured 1-g SAR has been < 1.5 W/kg, SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in the actual SAR report, but it has been included for ISO 17025 accreditation.

Uncertainty for 300 MHz – 6 GHz

ERROR SOURCES	Uncertainty value (± %)	Probability distribution	Divisor	(c) 1g	(c) 10g	Standard uncertainty (1g) (± %)	Standard uncertainty (10g) (± %)
Measurement Equipment							
Probe Calibration	6.550	N	1	1	1	6.550	6.550
Axial Isotropy	4.700	R	√3	0.7	0.7	1.899	1.899
Hemispherical Isotropy	9.600	R	√3	0.7	0.7	3.880	3.880
Boundary effect	2.000	R	√3	1	1	1.155	1.155
Linearity	4.700	R	√3	1	1	2.714	2.714
System Detection limits	1.000	R	√3	1	1	0.577	0.577
Probe modulation response	6.100	R	√3	1	1	3.522	3.522
Readout electronics	0.300	N	1	1	1	0.300	0.300
Response time	0.800	R	√3	1	1	0.462	0.462
Integration time	2.600	R	√3	1	1	1.501	1.501
RF Ambient noise	3.000	R	√3	1	1	1.732	1.732
RF Ambient reflections	3.000	R	√3	1	1	1.732	1.732
Probe positioner mech. restrictions	0.800	R	√3	1	1	0.462	0.462
Probe positioning with respect to phantom shell	6.700	R	√3	1	1	3.868	3.868
Max. SAR Eval.	4.000	R	√3	1	1	2.309	2.309
Test Sample Related							
Device holder uncertainty	2.900	N	1	1	1	2.900	2.900
Test sample positioning	3.600	N	1	1	1	3.600	3.600
Drift of output power	5.000	R	√3	1	1	2.887	2.887
Phantom and Setup							
Phantom uncertainty (shape and thickness tolerances)	6.600	R	√3	1	1	3.811	3.811
Algorithm for correcting SAR for deviations in permittivity and conductivity	1.900	R	√3	1	0.84	1.097	0.921
Liquid conductivity (meas.)	2.454	N	1	0.78	0.71	1.914	1.742
Liquid permittivity (meas.)	2.454	N	1	0.26	0.26	0.638	0.638
Liquid conductivity – temperature uncertainty	3.400	R	√3	0.78	0.71	1.531	1.394
Liquid permittivity – temperature uncertainty	0.400	R	√3	0.23	0.26	0.053	0.060
Combined standard uncertainty	$u_c = \sqrt{\sum_{i=1}^m c_i^2 \cdot u_i^2}$					12.82	12.76
Expanded uncertainty (confidence interval of 95%)	$ue = 2.00 u_c$					25.64	25.53

Table 2: Uncertainty Assessment for 300 MHz - 6 GHz

4. SAR LIMIT

Having a worst case measurement, the SAR limit is valid for general population/uncontrolled exposure.

The SAR values have to be averaged over a mass of 1 gr. (SAR 1 gr.) with the shape of a cube and averaged over a mass of 10 gr (Extremity SAR 10 gr). These levels couldn't exceed the values indicated in the application Standard:

Standard	Exposure	SAR	SAR Limit (W/kg)
FCC 47 CFR Part 2.1093, Paragraph (d)(2) Health Canada Safety Code 6, Paragraph 2.1.2	General population/Uncontrolled	SAR _{1 gr.}	1.6
FCC 47 CFR Part 2.1093, Paragraph (d)(2) Health Canada Safety Code 6, Paragraph 2.1.2	General population/Uncontrolled Extremity	SAR _{10 gr.}	4.0

Table 3: SAR limits

5. DEVICE UNDER TEST

5.1. Dimensions

Dimensions	Millimetres
Height x Width x Depth (Including curved part)	60.0 x 32.0 x 15.0 (25.0)
Overall Diagonal:	45.0
Display Diagonal:	35.0

Table 4: Dimensions

5.2. Wireless Technology

Wireless Technology	Frequency Bands	Modes
Wi-Fi	2.4 GHz	- 802.11b/g/n (20MHz & 40MHz)
Bluetooth	2.4 GHz	- Bluetooth

Table 5: Supported modes

5.3. Antenna Location

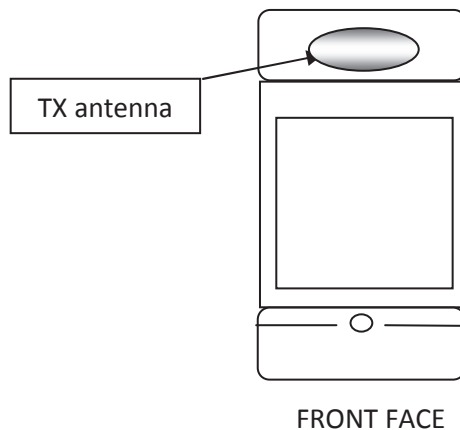


Figure 5: Antenna diagram location sketch

Appendix B – Test results

INDEX

1.	TEST CONDITIONS	21
1.1.	Power supply (V):	21
1.2.	Temperature (°C):.....	21
1.3.	Test signal, Output Power and Frequencies	21
1.4.	DUT and test-site configurations	21
2.	CONDUCTED AVERAGE POWER MEASUREMENTS.....	22
2.1.	Wi-Fi	22
2.2.	Bluetooth.....	22
3.	TISSUE PARAMETERS MEASUREMENTS	23
4.	SYSTEM CHECK MEASUREMENTS.....	24
4.1.	Validation results for Body TSL	24
5.	MEASUREMENT RESULTS FOR SAR (SPECIFIC ABSORPTION RATE)	24
5.1.	Summary maximum results for 10-g extremity SAR measurements	24
5.2.	Results for Wi-Fi 2450 MHz Band	24
5.3.	Variability results.....	25

1. TEST CONDITIONS

1.1. Power supply (V):

$V_n = 3.8$ Li-polymer rechargeable battery

Type of power supply = DC Voltage from rechargeable Li-Ion 3.8 V battery.

1.2. Temperature (°C):

$T_n = +20.00$ to $+25.00$

The subscript n indicates normal test conditions.

1.3. Test signal, Output Power and Frequencies

For the 802.11a/b/g/n modes, the device was put into operation by using a manufacturer proprietary test mode, setting the maximum output power for each mode. The duty factor was set to maximum (aprox. 100%).

The actual SAR sample does not have accessible antenna connectors for conducted measurements, so the conducted average output power was measured using others identical samples (M/01) provided by the manufacturer with auxiliary external connectors that makes the measurements representative and applicable for all the tested samples. See ‘usage of samples’ paragraph of this report.

The maximum conducted time-averaged power of the device for each mode was measured with a power sensor R&S NRP-Z81.

A fully charged battery was used for every test sequence. In all operating bands and test positions, the measurements were performed on the middle channel. In each band, for those positions where the maximum averaged SAR was found, measurements were performed on the remaining required channels except those with applicable test reductions ¹

1: See remarks and comments

The DUT doesn’t support simultaneous transmission, so only standalone transmission operation has been evaluated.

The target power alignments for RF components declared by the manufacturer for each supported technology are:

Band	Maximum Output Power (dBm)							
	802.11b	802.11g	802.11n20	802.11n40	BT BR	BT EDR2	BT EDR3	BT LE
2.4 GHz	17.0	16.5	16.0	12.5	9.5	7.0	7.0	3.0

1.4. DUT and test-site configurations

All supported modes were tested for body exposure (10-g extremity SAR). The device under test was placed with its back face against the head phantom surface into the neck zone, using body-tissue equivalent liquid to perform the measurements. (See position 7, from “Appendix F – Photographs”).

2. CONDUCTED AVERAGE POWER MEASUREMENTS

2.1. Wi-Fi

Band	Mode	Channel / Freq (MHz)	Averaged Power (dBm)
2.4 GHz	802.11b	1/2412	16.66
		6/2437	16.88
		11/2462	16.96
	802.11g	1/2412	16.16
		6/2437	16.25
		11/2462	16.22
	802.11n20	1/2412	15.56
		6/2437	15.63
		11/2462	15.59
	802.11n40	3/2422	12.16
		6/2437	12.19
		9/2452	12.15

2.2. Bluetooth

Band	Mode	Channel / Freq (MHz)	Average Output Power (dBm)
2.4 GHz	Bluetooth BR (GFSK)	0 / 2402	9.26
		39 / 2441	9.21
		78 / 2480	8.75
	Bluetooth EDR2 ($\pi/4$ -DQPSK)	0 / 2402	6.63
		39 / 2441	6.94
		78 / 2480	6.56
	Bluetooth EDR3 (8-DPSK)	0 / 2402	6.56
		39 / 2441	6.87
		78 / 2480	6.48
	Bluetooth LE	0 / 2402	2.36
		39 / 2441	2.55
		78 / 2480	1.62

Based on paragraph “4.3.1 Standalone SAR test exclusion considerations” of the KDB 447498 D01 - General RF Exposure Guidance:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR}$$

Protocol	Max. Conducted Output Power		Max. Output Power		Min. Test Distance (mm)	Freq. (GHz)	Result	Test Exclusion
	(dBm)	(mW)	(dBm)	(mW)				
Bluetooth	9.26	8.433	9.5	9.5	5	2.402	2.76	√

The computed value for Bluetooth is < 7.5, so Bluetooth mode qualifies for Standalone SAR test exclusion for 10-g extremity SAR.

According to ISED RSS-102 Issue 5 (2015-03) – Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands), paragraph 2.5.1 Exemption Limits for Routine Evaluation – SAR Evaluation, the device operates below the applicable output power level (adjusted for tune-up tolerance), for the specified separation distance defined in Table 1. Output power level shall be the higher of the maximum conducted or equivalent isotropically radiated power (e.i.r.p.) source-based, time-averaged output power.

The DUT has an antenna with a gain of -0.4 dBi, so the isotropically radiated power (e.i.r.p.) source-based, time-averaged output power value will be lower than the time-averaged output power.

The exemption limits for the applicable separation distance have been calculated by linear interpolation for the following operating frequencies:

Exposure condition	Frequency (MHz)	Distance (mm)	Exemption Limits (mW)
1-g SAR Extremity	2402	5	10.65
	2440	5	10.12
	2480	5	9.87

The evaluation for the applicable output power levels and exemption limits for each operating frequency will be as follow:

Technology	Frequency (MHz)	Maximum Time Avg. Power (dBm)	Maximum Time Avg. Power (mW)	IC Exemption Limits (mW)	Verdict
Bluetooth BR	2402	9.26	8.43	10.65	√
	2440	9.21	8.34	10.12	√
	2480	8.75	7.50	9.87	√

As all operating Bluetooth frequencies comply with SAR Test Exclusion Thresholds, according to the standard ISED “RSS-102 Issue 5 (2015-03)” SAR testing is not required.

3. TISSUE PARAMETERS MEASUREMENTS

Frequency (MHz)	Target Body Tissue		Measured Body Tissue		Deviation %		Measured Date
	Permittivity ϵ	Conductivity σ [S/m]	Permittivity ϵ	Conductivity σ [S/m]	Permittivity ϵ	Conductivity σ [S/m]	
2450	52.7	1.95	51.21	2.01	-2.83	3.14	2016-08-09

Note: The dielectric properties have been measured by the contact probe method at 22° C.

Head and Muscle Tissue Simulation Liquids HBBL1900-3800V3/M HBBL1900-3800V3

Water	50 – 73 %
Non-ionic detergents	27 – 50 % polyoxyethylenesorbitan monolaurate
NaCl	0 – 2 %
Preservative	0.05 – 0.1% Preventol-D7
Safety relevant ingredients:	
CAS-No. 55965-84-9	< 0.1 % aqueous preparation, containing 5-chloro-2-methyl-3(2H)-isothiazolone and 2-methyl-3(2H)-isothiazolone
CAS-No. 9005-64-5	<50 % polyoxyethylenesorbitan monolaurate

4. SYSTEM CHECK MEASUREMENTS

4.1. Validation results for Body TSL

Date	Frequency (MHz)	SAR over	SAR (W/kg)	1 W Target SAR (W/kg)	1 W Norm. SAR (W/kg)	Drift (%)
2016/08/09	2450	1 gr.	13.20	52.1	53.13	1.97
		10 gr.	6.16	24.4	24.79	1.61

5. MEASUREMENT RESULTS FOR SAR (SPECIFIC ABSORPTION RATE)

5.1. Summary maximum results for 10-g extremity SAR measurements

Band	Mode	Position/Distance	Channel (Frequency)	Reported SAR 10-g (W/kg)	SAR limit SAR 10-g (W/kg)
2450 MHz	802.11b	Position 7 / 0 mm	6 (2437 MHz)	0.321	4.0

5.2. Results for Wi-Fi 2450 MHz Band.

Position	Description	Mode	Channel	Freq (MHz)	Fast SAR 10-g (W/kg)	Power Drift (%)
1	Flat Phantom	802.11b	6	2437	0.075	0.13
2	Head Phantom - Ear side 1	802.11b	6	2437	0.061	-0.07
3	Head Phantom -Ear side 2	802.11b	6	2437	0.064	0.25
4	Head Phantom - Cheek side 1	802.11b	6	2437	0.069	0.25
5	Head Phantom - Cheek side 2	802.11b	6	2437	0.150	0.15
6	Head Phantom - Neck side 1	802.11b	6	2437	0.150	0.27
7	Head Phantom – Neck side 2	802.11b	6	2437	0.282	0.05

Position	Dist (mm)	Mode	Channel	Freq (MHz)	Fast SAR 10-g (W/kg)	SAR 10-g (W/kg)	Power Drift (%)	Max Output Power (dBm)	Reported SAR 10-g (W/kg)	Plot No.
7	0	802.11b	6	2437	0.282	0.312	0.05	17.0	0.321	1
7	0	802.11b	1	2412		NM ¹				
7	0	802.11b	11	2462		NM ¹				

1: See remarks and comments

- 2.4 GHz 802.11g/n OFDM modes

The highest reported SAR for 802.11b mode and worst case exposure condition is 0.321 W/Kg.

802.11 b Max declared Power = 17 dBm → 50.12 mW

802.11 g Max declared Power = 16.5 dBm → 44.67 mW

802.11 n20 Max declared Power = 16 dBm → 39.81 mW

802.11 n40 Max declared Power = 12.5 dBm → 17.78 mW

Adjusted SAR for 802.11g: $0.321 \text{ W/Kg} \times (44.67/50.12) = 0.286 \text{ W/Kg}$

Adjusted SAR for 802.11n20: $0.321 \text{ W/Kg} \times (39.81/50.12) = 0.255 \text{ W/Kg}$

Adjusted SAR for 802.11n40: $0.321 \text{ W/Kg} \times (17.78/50.12) = 0.114 \text{ W/Kg}$

As Adjusted SAR value for all 2.4 GHz 802.11g/n OFDM modes are $\leq 1.2 \text{ W/Kg}$, SAR measurements are not required for these 802.11 g/n OFDM modes.

5.3. Variability results.

According to KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, paragraph “2.8.1. SAR measurement variability”, repeated measurements are required only when the measured SAR is $\geq 0.80 \text{ W/kg}$.

Appendix C – Measurement report

802.11b – 2.4 GHz – Position 7 – Middle Channel – Plot N°1

Test Laboratory: AT4 Wireless; Date: 09/08/2016

DUT: Polar IV; Type: Smart Watch; Serial: C6171V0000618

Communication System: UID 10012 - CAB, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps); Frequency: 2437 MHz; Duty Cycle: 1:1.53815

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.994$ S/m; $\epsilon_r = 51.213$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3687; ConvF(6.84, 6.84, 6.84); Calibrated: 26/07/2016;
- Sensor-Surface: 3mm (Mechanical Surface Detection), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 18/07/2016
- Phantom: SAM head-body simulator ; Type: Twin SAM V4.0; Serial: ---
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Left Hand Side 2450 MHz/Position 7, Neck, M32/802.11b, 1Mbps, CH 6/Area Scan (101x71x1):

Interpolated grid: dx=1.200 mm, dy=1.200 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.879 W/kg

Left Hand Side 2450 MHz/Position 7, Neck, M32/802.11b, 1Mbps, CH 6/Zoom Scan (9x8x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 18.83 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.31 W/kg


SAR(1 g) = 0.648 W/kg; SAR(10 g) = 0.312 W/kg (SAR corrected for target medium)

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.706 W/kg

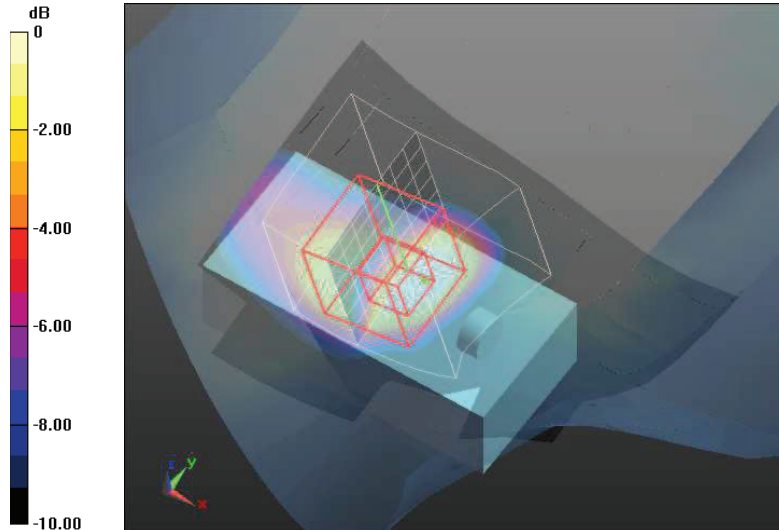

0 dB = 0.706 W/kg = -1.51 dBW/kg

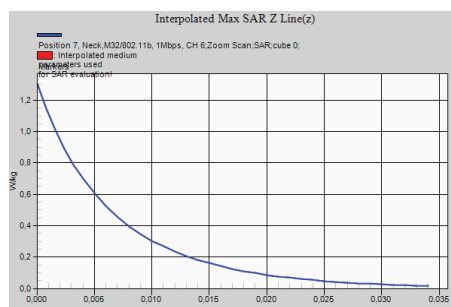

Appendix D – System Validation Reports

Validation results in 2450 MHz Band for Body TSL

Test Laboratory: AT4 Wireless; Date: 09/08/2016

DUT: Dipole 2450 MHz D2450V2; Type: D2450V2; Serial: D2450V2 - SN:756
 Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2450$ MHz; $\sigma = 2.01$ S/m; $\epsilon_r = 51.21$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3687; ConvF(6.84, 6.84, 6.84); Calibrated: 26/07/2016;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 18/07/2016
- Phantom: SAM head-body simulator ; Type: Twin SAM V4.0; Serial: ---
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

FCC System Performance Check with D2450V2 Dipole, 09-08-2016/d=10mm, Pin=250mW/Area Scan (61x61x1):

Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 17.8 W/kg

FCC System Performance Check with D2450V2 Dipole, 09-08-2016/d=10mm, Pin=250mW/Zoom Scan (7x8x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 92.59 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 26.9 W/kg

SAR(1 g) = 13.2 W/kg; SAR(10 g) = 6.16 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 17.4 W/kg

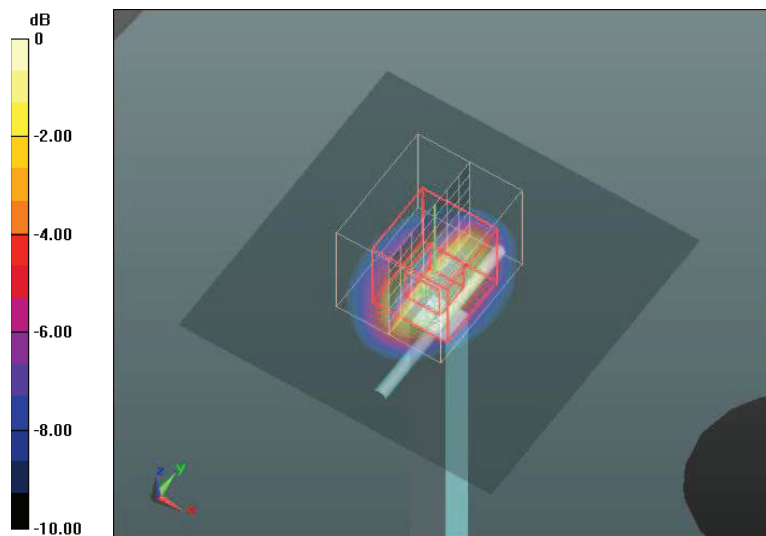

0 dB = 17.4 W/kg = 12.41 dBW/kg

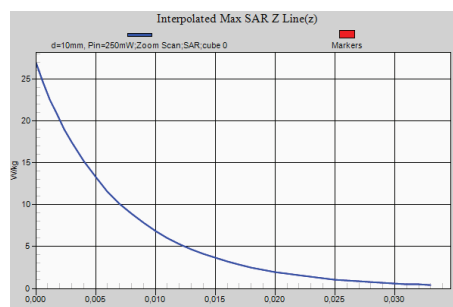

Appendix E – Calibration data

**Calibration Laboratory of
 Schmid & Partner
 Engineering AG**
 Zeughausstrasse 43, 8004 Zurich, Switzerland





S Schweizerischer Kalibrierdienst
 C Service suisse d'étalonnage
 S Servizio svizzero di taratura
 S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Client **AT4 Wireless**

Certificate No: DAE4-669_Jul16

CALIBRATION CERTIFICATE																							
Object	DAE4 - SD 000 D04 BM - SN: 669																						
Calibration procedure(s)	QA CAL-06.v29 Calibration procedure for the data acquisition electronics (DAE)																						
Calibration date:	July 18, 2016																						
<p>This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.</p> <p>All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.</p> <p>Calibration Equipment used (M&TE critical for calibration)</p> <table border="1"> <thead> <tr> <th>Primary Standards</th> <th>ID #</th> <th>Cal Date (Certificate No.)</th> <th>Scheduled Calibration</th> </tr> </thead> <tbody> <tr> <td>Keithley Multimeter Type 2001</td> <td>SN: 0810278</td> <td>09-Sep-15 (No:17153)</td> <td>Sep-16</td> </tr> <tr> <th>Secondary Standards</th> <th>ID #</th> <th>Check Date (in house)</th> <th>Scheduled Check</th> </tr> <tr> <td>Auto DAE Calibration Unit</td> <td>SE UWS 053 AA 1001</td> <td>05-Jan-16 (in house check)</td> <td>In house check: Jan-17</td> </tr> <tr> <td>Calibrator Box V2.1</td> <td>SE UMS 006 AA 1002</td> <td>05-Jan-16 (in house check)</td> <td>In house check: Jan-17</td> </tr> </tbody> </table>				Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration	Keithley Multimeter Type 2001	SN: 0810278	09-Sep-15 (No:17153)	Sep-16	Secondary Standards	ID #	Check Date (in house)	Scheduled Check	Auto DAE Calibration Unit	SE UWS 053 AA 1001	05-Jan-16 (in house check)	In house check: Jan-17	Calibrator Box V2.1	SE UMS 006 AA 1002	05-Jan-16 (in house check)	In house check: Jan-17
Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration																				
Keithley Multimeter Type 2001	SN: 0810278	09-Sep-15 (No:17153)	Sep-16																				
Secondary Standards	ID #	Check Date (in house)	Scheduled Check																				
Auto DAE Calibration Unit	SE UWS 053 AA 1001	05-Jan-16 (in house check)	In house check: Jan-17																				
Calibrator Box V2.1	SE UMS 006 AA 1002	05-Jan-16 (in house check)	In house check: Jan-17																				
Calibrated by:	Name Dominique Steffen	Function Technician	Signature 																				
Approved by:	Name Fin Bomholt	Function Deputy Technical Manager	Signature 																				
			Issued: July 18, 2016																				
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.																							

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
S Service suisse d'étalonnage
C Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary

DAE data acquisition electronics
Connector angle information used in DASYS system to align probe sensor X to the robot coordinate system.

Methods Applied and Interpretation of Parameters

- *DC Voltage Measurement*: Calibration Factor assessed for use in DASYS system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- *Connector angle*: The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The following parameters as documented in the Appendix contain technical information as a result from the performance test and require no uncertainty.
 - *DC Voltage Measurement Linearity*: Verification of the Linearity at +10% and -10% of the nominal calibration voltage. Influence of offset voltage is included in this measurement.
 - *Common mode sensitivity*: Influence of a positive or negative common mode voltage on the differential measurement.
 - *Channel separation*: Influence of a voltage on the neighbor channels not subject to an input voltage.
 - *AD Converter Values with inputs shorted*: Values on the internal AD converter corresponding to zero input voltage
 - *Input Offset Measurement*: Output voltage and statistical results over a large number of zero voltage measurements.
 - *Input Offset Current*: Typical value for information; Maximum channel input offset current, not considering the input resistance.
 - *Input resistance*: Typical value for information: DAE input resistance at the connector, during internal auto-zeroing and during measurement.
 - *Low Battery Alarm Voltage*: Typical value for information. Below this voltage, a battery alarm signal is generated.
 - *Power consumption*: Typical value for information. Supply currents in various operating modes.

DC Voltage Measurement

A/D - Converter Resolution nominal

High Range: 1LSB = 6.1 μ V, full range = -100...+300 mV

Low Range: 1LSB = 61nV, full range = -1.....+3mV

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Calibration Factors	X	Y	Z
High Range	403.329 \pm 0.02% (k=2)	403.880 \pm 0.02% (k=2)	404.240 \pm 0.02% (k=2)
Low Range	3.95541 \pm 1.50% (k=2)	3.97473 \pm 1.50% (k=2)	3.97419 \pm 1.50% (k=2)

Connector Angle

Connector Angle to be used in DASY system	192.0 \pm 1 $^{\circ}$
---	--------------------------

Appendix (Additional assessments outside the scope of SCS0108)

1. DC Voltage Linearity

High Range	Reading (μV)	Difference (μV)	Error (%)
Channel X + Input	200036.84	-0.47	-0.00
Channel X + Input	20009.62	4.22	0.02
Channel X - Input	-20001.84	3.36	-0.02
Channel Y + Input	200035.95	-1.37	-0.00
Channel Y + Input	20008.11	2.95	0.01
Channel Y - Input	-20003.03	2.32	-0.01
Channel Z + Input	200036.35	-2.70	-0.00
Channel Z + Input	20008.87	3.78	0.02
Channel Z - Input	-20003.08	2.25	-0.01

Low Range	Reading (μV)	Difference (μV)	Error (%)
Channel X + Input	2001.08	-0.33	-0.02
Channel X + Input	201.62	0.14	0.07
Channel X - Input	-198.88	-0.36	0.18
Channel Y + Input	2001.32	0.23	0.01
Channel Y + Input	200.95	-0.29	-0.14
Channel Y - Input	-199.87	-1.04	0.52
Channel Z + Input	2001.30	0.12	0.01
Channel Z + Input	200.62	-0.62	-0.31
Channel Z - Input	-200.16	-1.41	0.71

2. Common mode sensitivity

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Common mode Input Voltage (mV)	High Range Average Reading (μV)	Low Range Average Reading (μV)
Channel X	200	2.15	0.63
	- 200	0.50	-1.00
Channel Y	200	10.89	10.66
	- 200	-13.07	-13.28
Channel Z	200	-10.00	-10.04
	- 200	7.66	7.47

3. Channel separation

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Input Voltage (mV)	Channel X (μV)	Channel Y (μV)	Channel Z (μV)
Channel X	200	-	-2.46	-2.83
Channel Y	200	8.89	-	-1.72
Channel Z	200	2.97	6.84	-

4. AD-Converter Values with inputs shorted

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	High Range (LSB)	Low Range (LSB)
Channel X	16074	15743
Channel Y	15795	15269
Channel Z	15996	15139

5. Input Offset Measurement

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Input 10M Ω

	Average (μ V)	min. Offset (μ V)	max. Offset (μ V)	Std. Deviation (μ V)
Channel X	0.25	-1.07	2.29	0.53
Channel Y	0.36	-0.99	1.48	0.38
Channel Z	0.05	-1.09	2.02	0.46

6. Input Offset Current

Nominal input circuitry offset current on all channels: <25fA

7. Input Resistance (Typical values for information)

	Zeroing (kOhm)	Measuring (MOhm)
Channel X	200	200
Channel Y	200	200
Channel Z	200	200

8. Low Battery Alarm Voltage (Typical values for information)

Typical values	Alarm Level (VDC)
Supply (+ Vcc)	+7.9
Supply (- Vcc)	-7.6

9. Power Consumption (Typical values for information)

Typical values	Switched off (mA)	Stand by (mA)	Transmitting (mA)
Supply (+ Vcc)	+0.01	+6	+14
Supply (- Vcc)	-0.01	-8	-9

**Calibration Laboratory of
 Schmid & Partner
 Engineering AG**
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **AT4 Wireless**

Certificate No: **EX3-3687_Jul16**

CALIBRATION CERTIFICATE

Object: **EX3DV4 - SN:3687**

Calibration procedure(s): **QA CAL-01.v9, QA CAL-12.v9, QA CAL-14.v4, QA CAL-23.v5,
 QA CAL-25.v6
 Calibration procedure for dosimetric E-field probes**

Calibration date: **July 26, 2016**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	06-Apr-16 (No. 217-02288/02289)	Apr-17
Power sensor NRP-Z91	SN: 103244	06-Apr-16 (No. 217-02288)	Apr-17
Power sensor NRP-Z91	SN: 103245	06-Apr-16 (No. 217-02288)	Apr-17
Reference 20 dB Attenuator	SN: 55277 (20x)	05-Apr-16 (No. 217-02293)	Apr-17
Reference Probe ES3DV2	SN: 3013	31-Dec-15 (No. ES3-3013_Dec15)	Dec-16
DAE4	SN: 660	23-Dec-15 (No. DAE4-660_Dec15)	Dec-16
Secondary Standards	ID	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB41293874	06-Apr-16 (in house check Jun-16)	In house check: Jun-18
Power sensor E4412A	SN: MY41499087	06-Apr-16 (in house check Jun-16)	In house check: Jun-18
Power sensor E4412A	SN: 000110210	06-Apr-16 (in house check Jun-16)	In house check: Jun-18
RF generator HP 8648C	SN: US3642U01700	04-Aug-99 (in house check Jun-18)	In house check: Jun-18
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-15)	In house check: Oct-16

Calibrated by: **Name: Claudio Leudler, Function: Laboratory Technician, Signature: [Signature]**

Approved by: **Name: Katja Pokovic, Function: Technical Manager, Signature: [Signature]**

Issued: July 27, 2016

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

**Calibration Laboratory of
 Schmid & Partner
 Engineering AG**
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization ϕ	ϕ rotation around probe axis
Polarization θ	θ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\theta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Methods Applied and Interpretation of Parameters:

- **NORM_{x,y,z}**: Assessed for E-field polarization $\theta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E²-field uncertainty inside TSL (see below ConvF).
- **NORM(f)_{x,y,z} = NORM_{x,y,z} * frequency_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- **DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- **PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- **A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; D_{x,y,z}; VR_{x,y,z}; A, B, C, D** are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- **ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- **Spherical Isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- **Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- **Connector Angle**: The angle is assessed using the information gained by determining the NORM_x (no uncertainty required).

EX3DV4 – SN:3687

July 26, 2016

Probe EX3DV4

SN:3687

Manufactured: March 10, 2009
Calibrated: July 26, 2016

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

EX3DV4- SN:3687

July 26, 2016

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3687

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V/m})^2$) ^A	0.51	0.43	0.48	± 10.1 %
DCP (mV) ^B	99.3	99.8	99.4	

Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB $\sqrt{\mu\text{V}}$	C	D dB	VR mV	Unc ^C (k=2)
0	CW	X	0.0	0.0	1.0	0.00	146.7	±3.0 %
		Y	0.0	0.0	1.0		151.7	
		Z	0.0	0.0	1.0		141.2	

Note: For details on UID parameters see Appendix.

Sensor Model Parameters

	C1 fF	C2 fF	α V ⁻¹	T1 ms.V ⁻²	T2 ms.V ⁻¹	T3 ms	T4 V ⁻³	T5 V ⁻¹	T6
X	58.39	438.8	36.55	21.96	1.231	5.04	0.647	0.439	1.01
Y	58.7	443.2	36.41	22.95	1.635	5.015	0.758	0.573	1.007
Z	57.03	428.8	36.14	23.46	1.653	5.025	0.36	0.586	1.006

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of Norm X,Y,Z do not affect the E²-field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter: uncertainty not required.

^C Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

EX3DV4 - SN:3687

July 26, 2016

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3687

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^c	Relative Permittivity ^e	Conductivity (S/m) ^e	ConvF X	ConvF Y	ConvF Z	Alpha ^d	Depth (mm) ^d	Unc (k=2)
450	43.5	0.87	9.64	9.64	9.64	0.18	1.30	± 13.3 %
750	41.9	0.89	8.82	8.82	8.82	0.51	0.95	± 12.0 %
835	41.5	0.90	8.61	8.61	8.61	0.55	0.88	± 12.0 %
900	41.5	0.97	8.25	8.25	8.25	0.38	1.03	± 12.0 %
1640	40.3	1.29	8.10	8.10	8.10	0.41	0.80	± 12.0 %
1750	40.1	1.37	7.63	7.63	7.63	0.43	0.81	± 12.0 %
1900	40.0	1.40	7.31	7.31	7.31	0.39	0.80	± 12.0 %
2000	40.0	1.40	7.23	7.23	7.23	0.33	0.80	± 12.0 %
2100	39.8	1.49	7.31	7.31	7.31	0.37	0.80	± 12.0 %
2300	39.5	1.67	7.24	7.24	7.24	0.35	0.80	± 12.0 %
2450	39.2	1.80	6.88	6.88	6.88	0.37	0.86	± 12.0 %
2600	39.0	1.96	6.73	6.73	6.73	0.44	0.81	± 12.0 %
5200	36.0	4.66	4.83	4.83	4.83	0.40	1.80	± 13.1 %
5300	35.9	4.76	4.58	4.58	4.58	0.40	1.80	± 13.1 %
5600	35.5	5.07	4.13	4.13	4.13	0.50	1.80	± 13.1 %
5800	35.3	5.27	4.24	4.24	4.24	0.50	1.80	± 13.1 %

^c Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^e At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^d Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

EX3DV4 - SN:3687

July 26, 2016

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3687

Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^H (mm)	Unc (k=2)
450	56.7	0.94	10.18	10.18	10.18	0.09	1.30	± 13.3 %
750	55.5	0.96	8.61	8.61	8.61	0.44	0.80	± 12.0 %
835	55.2	0.97	8.59	8.59	8.59	0.43	0.88	± 12.0 %
900	55.0	1.05	8.49	8.49	8.49	0.42	0.80	± 12.0 %
1640	53.8	1.40	7.73	7.73	7.73	0.43	0.80	± 12.0 %
1750	53.4	1.49	7.25	7.25	7.25	0.34	1.02	± 12.0 %
1900	53.3	1.52	7.19	7.19	7.19	0.50	0.80	± 12.0 %
2000	53.3	1.52	7.23	7.23	7.23	0.44	0.80	± 12.0 %
2450	52.7	1.95	6.84	6.84	6.84	0.41	0.80	± 12.0 %
2600	52.5	2.16	6.66	6.66	6.66	0.32	0.80	± 12.0 %
5200	49.0	5.30	4.33	4.33	4.33	0.50	1.90	± 13.1 %
5300	48.9	5.42	4.16	4.16	4.16	0.50	1.90	± 13.1 %
5600	48.5	5.77	3.60	3.60	3.60	0.60	1.90	± 13.1 %
5800	48.2	6.00	3.67	3.67	3.67	0.60	1.90	± 13.1 %

^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2); else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 84, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.


^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^H Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

EX3DV4- SN:3687

July 26, 2016

Frequency Response of E-Field (TEM-Cell: ifi110 EXX, Waveguide: R22)

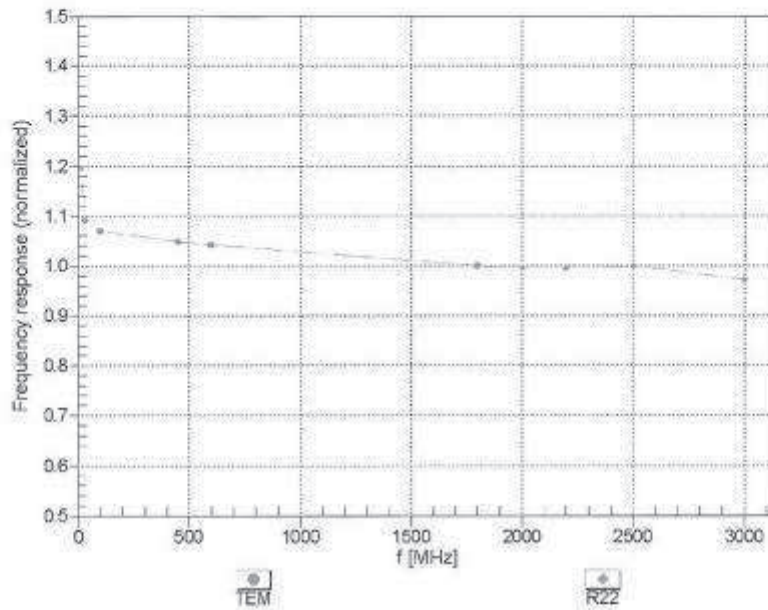


Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ (k=2)

EX30V4- SN:3687



July 26, 2016

Receiving Pattern (ϕ), $\theta = 0^\circ$

f=600 MHz,TEM

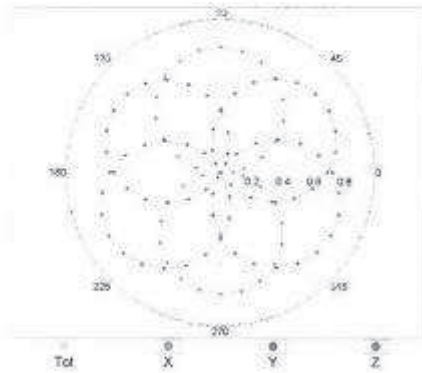

f=1800 MHz,R22

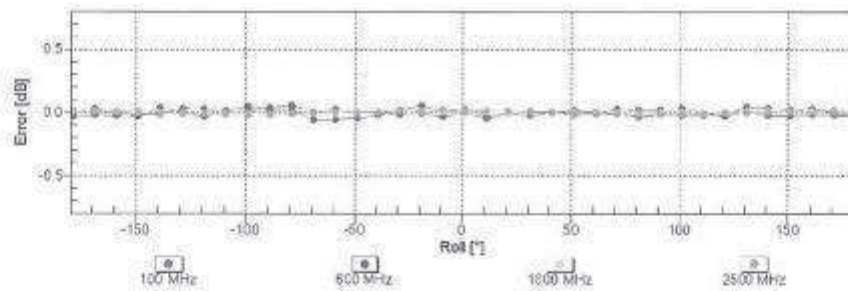
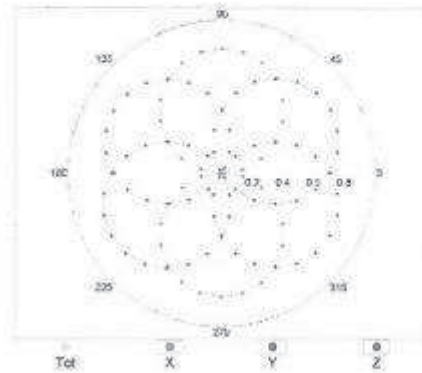


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ (k=2)

EX3DV4- SN:3687

July 26, 2016

Dynamic Range f(SAR_{head})
 (TEM cell , f_{eval}= 1900 MHz)

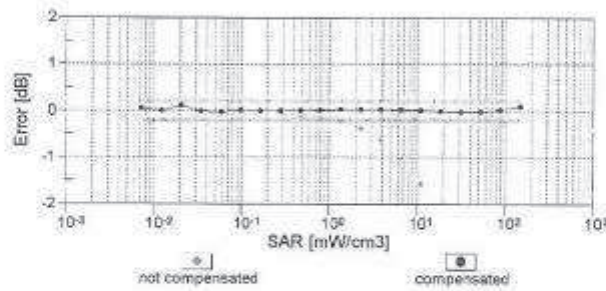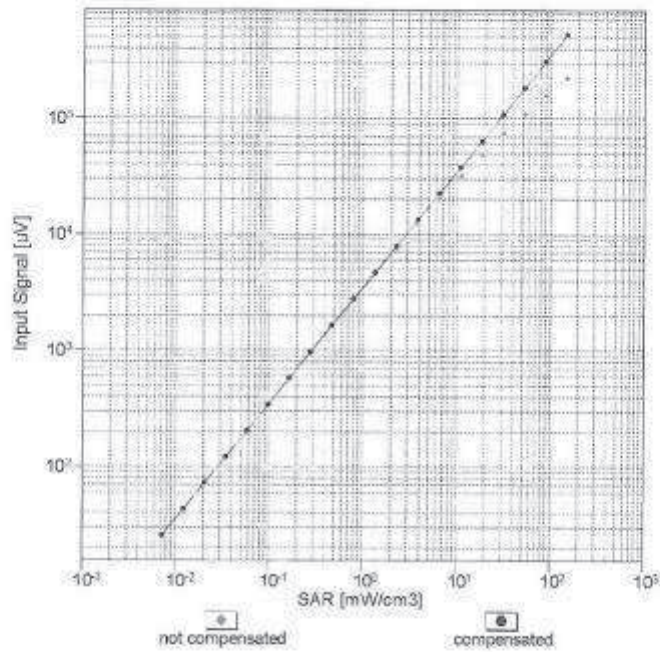


Uncertainty of Linearity Assessment: ± 0.6% (k=2)



EX3DV4- SN:3687

July 26, 2016

Conversion Factor Assessment

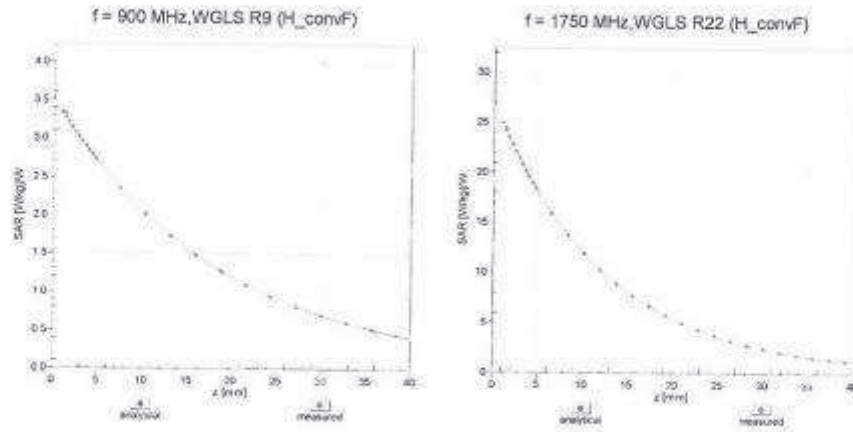

Deviation from Isotropy in Liquid Error (ϕ , θ), f = 900 MHz

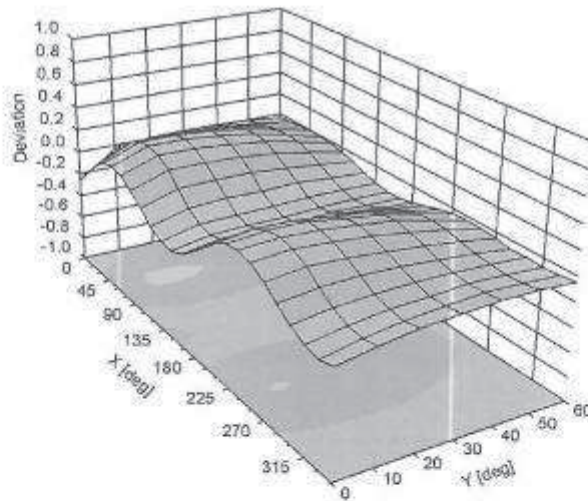

EX3DV4- SN:3687

July 26, 2016

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3687

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	131,1
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	1.4 mm

EX3DV4- SN:3687

July 28, 2016

Appendix: Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB μ V	C	D dB	VR mV	Max Unc [±] (k=2)
0	CW	X	0.00	0.00	1.00	0.00	146.7	± 3.0 %
		Y	0.00	0.00	1.00		151.7	
		Z	0.00	0.00	1.00		141.2	
10010- CAA	SAR Validation (Square, 100ms, 10ms)	X	8.12	80.07	17.36	10.00	20.0	± 9.6 %
		Y	4.73	72.68	14.90		20.0	
		Z	5.05	73.40	15.24		20.0	
10011- CAB	UMTS-FDD (WCDMA)	X	5.47	100.57	30.23	0.00	150.0	± 9.6 %
		Y	1.14	68.64	16.28		150.0	
		Z	1.15	69.03	16.42		150.0	
10012- CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps)	X	1.47	69.37	19.72	0.41	150.0	± 9.6 %
		Y	1.26	64.61	15.82		150.0	
		Z	1.26	64.77	15.89		150.0	
10013- CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps)	X	5.10	67.32	17.88	1.46	150.0	± 9.6 %
		Y	5.03	66.66	17.13		150.0	
		Z	5.02	66.73	17.17		150.0	
10021- DAB	GSM-FDD (TDMA, GMSK)	X	100.00	117.79	30.00	9.39	50.0	± 9.6 %
		Y	47.78	106.45	27.33		50.0	
		Z	42.46	104.79	26.97		50.0	
10023- DAB	GPRS-FDD (TDMA, GMSK, TN 0)	X	100.00	117.69	30.00	9.57	50.0	± 9.6 %
		Y	32.51	100.88	25.89		50.0	
		Z	30.74	100.08	25.74		50.0	
10024- DAB	GPRS-FDD (TDMA, GMSK, TN 0-1)	X	100.00	116.35	28.31	6.56	60.0	± 9.6 %
		Y	100.00	113.60	27.27		60.0	
		Z	100.00	113.76	27.40		60.0	
10025- DAB	EDGE-FDD (TDMA, 8PSK, TN 0)	X	16.63	110.67	43.64	12.57	50.0	± 9.6 %
		Y	5.46	73.12	28.26		50.0	
		Z	13.08	99.20	38.16		50.0	
10026- DAB	EDGE-FDD (TDMA, 8PSK, TN 0-1)	X	26.54	116.56	40.95	9.56	60.0	± 9.6 %
		Y	12.44	94.04	32.21		60.0	
		Z	16.35	101.24	35.02		60.0	
10027- DAB	GPRS-FDD (TDMA, GMSK, TN 0-1-2)	X	100.00	117.84	28.21	4.80	80.0	± 9.6 %
		Y	100.00	112.56	28.01		80.0	
		Z	100.00	112.74	28.14		80.0	
10028- DAB	GPRS-FDD (TDMA, GMSK, TN 0-1-2-3)	X	100.00	121.97	29.31	3.55	100.0	± 9.6 %
		Y	100.00	112.90	25.47		100.0	
		Z	100.00	113.07	25.59		100.0	
10029- DAB	EDGE-FDD (TDMA, 8PSK, TN 0-1-2)	X	13.28	99.36	34.22	7.80	80.0	± 9.6 %
		Y	8.55	86.13	28.28		80.0	
		Z	10.11	90.33	30.07		80.0	
10030- CAA	IEEE 802.15.1 Bluetooth (GFSK, DH1)	X	100.00	115.74	27.57	5.30	70.0	± 9.6 %
		Y	100.00	111.85	25.99		70.0	
		Z	100.00	112.06	26.14		70.0	
10031- CAA	IEEE 802.15.1 Bluetooth (GFSK, DH3)	X	100.00	137.33	34.26	1.88	100.0	± 9.6 %
		Y	100.00	113.88	24.56		100.0	
		Z	100.00	113.86	24.58		100.0	

EX3DV4- SN:3687

July 26, 2016

10032-CAA	IEEE 802.15.1 Bluetooth (GFSK, DH5)	X	100.00	176.30	49.49	1.17	100.0	± 9.6 %	
		Y	100.00	120.36	26.31			100.0	
		Z	100.00	119.89	26.12			100.0	
10033-CAA	IEEE 802.15.1 Bluetooth (PI4-DQPSK, DH1)	X	100.00	130.01	36.84	5.30	70.0	± 9.6 %	
		Y	11.43	90.78	24.33			70.0	
		Z	13.89	93.71	25.23			70.0	
10034-CAA	IEEE 802.15.1 Bluetooth (PI4-DQPSK, DH3)	X	100.00	133.95	35.99	1.88	100.0	± 9.6 %	
		Y	4.42	80.86	20.04			100.0	
		Z	5.01	82.52	20.52			100.0	
10035-CAA	IEEE 802.15.1 Bluetooth (PI4-DQPSK, DH5)	X	100.00	136.41	38.63	1.17	100.0	± 9.6 %	
		Y	2.91	76.58	18.39			100.0	
		Z	3.19	77.80	18.73			100.0	
10036-CAA	IEEE 802.15.1 Bluetooth (B-DPSK, DH1)	X	100.00	130.35	38.00	5.30	70.0	± 9.6 %	
		Y	14.44	94.67	25.61			70.0	
		Z	17.62	97.83	26.53			70.0	
10037-CAA	IEEE 802.15.1 Bluetooth (B-DPSK, DH3)	X	100.00	133.95	35.94	1.88	100.0	± 9.6 %	
		Y	4.20	80.19	19.76			100.0	
		Z	4.77	81.87	20.26			100.0	
10038-CAA	IEEE 802.15.1 Bluetooth (B-DPSK, DH5)	X	100.00	137.26	37.00	1.17	100.0	± 9.6 %	
		Y	2.98	77.16	18.70			100.0	
		Z	3.27	78.41	19.06			100.0	
10039-CAB	CDMA2000 (1xRTT, RC1)	X	100.00	138.24	37.17	0.00	150.0	± 9.6 %	
		Y	2.40	75.35	18.02			150.0	
		Z	2.35	75.19	17.80			150.0	
10042-CAB	IS-54 / IS-136 FDD (TDMA/FDM, PI4-DQPSK, Halfrate)	X	100.00	114.11	27.49	7.78	50.0	± 9.6 %	
		Y	100.00	112.88	27.08			50.0	
		Z	100.00	112.74	27.16			50.0	
10044-CAA	IS-91/EIA/TIA-553 FDD (FDMA, FM)	X	0.04	80.00	76668.79	0.00	150.0	± 9.6 %	
		Y	0.00	98.62	0.06			150.0	
		Z	0.00	99.29	0.03			150.0	
10048-CAA	DECT (TDD, TDMA/FDM, GFSK, Full Slot, 24)	X	51.76	106.79	29.47	13.80	25.0	± 9.6 %	
		Y	11.56	84.77	22.78			25.0	
		Z	11.22	84.23	22.65			25.0	
10049-CAA	DECT (TDD, TDMA/FDM, GFSK, Double Slot, 12)	X	100.00	117.85	30.40	10.79	40.0	± 9.6 %	
		Y	14.91	89.34	22.89			40.0	
		Z	14.79	89.15	22.90			40.0	
10056-CAA	UMTS-TDD (TD-SCDMA, 1.28 Mcps)	X	52.67	114.60	32.27	9.03	50.0	± 9.6 %	
		Y	11.64	86.93	23.60			50.0	
		Z	12.96	88.67	24.23			50.0	
10058-DAB	EDGE-FDD (TDMA, 8PSK, TN 0-1-2-3)	X	8.79	90.34	30.31	6.55	100.0	± 9.6 %	
		Y	6.54	81.22	25.72			100.0	
		Z	7.31	83.94	26.96			100.0	
10059-CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps)	X	1.70	72.65	21.26	0.61	110.0	± 9.6 %	
		Y	1.36	66.16	16.55			110.0	
		Z	1.37	66.46	16.69			110.0	
10060-CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps)	X	100.00	149.28	41.21	1.30	110.0	± 9.6 %	
		Y	54.10	123.50	31.89			110.0	
		Z	100.00	132.22	33.78			110.0	

EX3DV4- SN:3687

July 26, 2016

10081-CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps)	X	100.00	146.01	41.80	2.04	110.0	± 9.6 %
		Y	4.81	85.34	23.42		110.0	
		Z	5.90	88.76	24.59		110.0	
10062-CAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps)	X	4.93	67.45	17.41	0.49	100.0	± 9.6 %
		Y	4.83	66.66	16.62		100.0	
		Z	4.81	66.71	16.62		100.0	
10063-CAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps)	X	4.95	67.57	17.52	0.72	100.0	± 9.6 %
		Y	4.85	66.78	16.72		100.0	
		Z	4.93	66.82	16.73		100.0	
10064-CAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps)	X	5.27	67.81	17.71	0.88	100.0	± 9.6 %
		Y	5.18	67.08	16.95		100.0	
		Z	5.15	67.12	16.96		100.0	
10065-CAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps)	X	5.13	67.75	17.82	1.21	100.0	± 9.6 %
		Y	5.04	67.00	17.04		100.0	
		Z	5.02	67.05	17.05		100.0	
10066-CAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps)	X	5.15	67.78	17.99	1.46	100.0	± 9.6 %
		Y	5.07	67.04	17.20		100.0	
		Z	5.05	67.11	17.24		100.0	
10067-CAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps)	X	5.42	67.75	18.31	2.04	100.0	± 9.6 %
		Y	5.38	67.09	17.57		100.0	
		Z	5.34	67.20	17.83		100.0	
10068-CAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps)	X	5.51	67.97	18.60	2.55	100.0	± 9.6 %
		Y	5.45	67.32	17.85		100.0	
		Z	5.44	67.43	17.93		100.0	
10069-CAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps)	X	5.57	67.85	18.73	2.67	100.0	± 9.6 %
		Y	5.52	67.23	18.00		100.0	
		Z	5.52	67.37	18.10		100.0	
10071-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 9 Mbps)	X	5.20	67.41	18.16	1.99	100.0	± 9.6 %
		Y	5.14	66.77	17.43		100.0	
		Z	5.13	66.86	17.48		100.0	
10072-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 12 Mbps)	X	5.22	67.89	18.44	2.30	100.0	± 9.6 %
		Y	5.15	67.18	17.66		100.0	
		Z	5.15	67.30	17.73		100.0	
10073-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 18 Mbps)	X	5.29	68.07	18.76	2.83	100.0	± 9.6 %
		Y	5.23	67.36	17.97		100.0	
		Z	5.23	67.51	18.07		100.0	
10074-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 24 Mbps)	X	5.27	67.97	18.92	3.30	100.0	± 9.6 %
		Y	5.22	67.30	18.14		100.0	
		Z	5.23	67.47	18.25		100.0	
10075-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 36 Mbps)	X	5.35	68.25	19.31	3.82	90.0	± 9.6 %
		Y	5.31	67.58	18.51		90.0	
		Z	5.33	67.79	18.65		90.0	
10076-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 48 Mbps)	X	5.32	67.92	19.35	4.15	90.0	± 9.6 %
		Y	5.30	67.31	18.58		90.0	
		Z	5.32	67.53	18.73		90.0	
10077-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps)	X	5.34	67.97	19.44	4.30	90.0	± 9.6 %
		Y	5.32	67.36	18.66		90.0	
		Z	5.35	67.61	18.83		90.0	

EX3DV4- SN:3687

July 26, 2016

10081-CAB	CDMA2000 (1xRTT, RC3)	X	100.00	146.01	39.19	0.00	150.0	± 9.6 %
		Y	1.06	68.37	14.70		150.0	
		Z	1.05	68.48	14.61		150.0	
10082-CAB	IS-54 / IS-136 FDD (TDMA/FDM, Pi/4-DQPSK, Fullrate)	X	1.10	60.54	5.86	4.77	60.0	± 9.6 %
		Y	1.19	60.42	5.97		60.0	
		Z	1.25	60.72	6.18		60.0	
10090-DAB	GPRS-FDD (TDMA, GMSK, TN 0-4)	X	100.00	116.38	28.34	6.56	60.0	± 9.6 %
		Y	100.00	113.64	27.30		60.0	
		Z	100.00	113.80	27.44		60.0	
10097-CAB	UMTS-FDD (HSDPA)	X	2.81	76.39	21.06	0.00	150.0	± 9.6 %
		Y	1.94	68.17	16.32		150.0	
		Z	1.93	68.24	16.29		150.0	
10098-CAB	UMTS-FDD (HSUPA, Subtest 2)	X	2.79	76.62	21.18	0.00	150.0	± 9.6 %
		Y	1.90	68.13	16.28		150.0	
		Z	1.89	68.21	16.27		150.0	
10099-DAB	EDGE-FDD (TDMA, 8PSK, TN 0-4)	X	26.62	116.57	40.94	9.56	60.0	± 9.6 %
		Y	12.47	94.04	32.21		60.0	
		Z	16.37	101.20	34.99		60.0	
10100-CAB	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	X	4.77	78.19	20.90	0.00	150.0	± 9.6 %
		Y	3.38	71.21	17.21		150.0	
		Z	3.37	71.25	17.21		150.0	
10101-CAB	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)	X	3.79	70.60	18.13	0.00	150.0	± 9.6 %
		Y	3.40	67.94	16.26		150.0	
		Z	3.38	67.95	16.25		150.0	
10102-CAB	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)	X	3.85	70.26	18.07	0.00	150.0	± 9.6 %
		Y	3.51	67.88	16.35		150.0	
		Z	3.48	67.86	16.32		150.0	
10103-CAB	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	X	9.07	81.21	22.88	3.98	65.0	± 9.6 %
		Y	7.32	76.10	20.29		65.0	
		Z	7.60	77.27	20.79		65.0	
10104-CAB	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)	X	8.10	77.73	22.41	3.98	65.0	± 9.6 %
		Y	7.44	74.94	20.67		65.0	
		Z	7.60	75.47	20.94		65.0	
10105-CAB	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)	X	7.61	76.45	22.17	3.98	65.0	± 9.6 %
		Y	6.94	73.56	20.38		65.0	
		Z	7.48	75.06	21.08		65.0	
10108-CAC	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	X	4.14	77.29	20.82	0.00	150.0	± 9.6 %
		Y	2.98	70.38	17.04		150.0	
		Z	2.96	70.42	17.03		150.0	
10109-CAC	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)	X	3.49	70.88	18.35	0.00	150.0	± 9.6 %
		Y	3.07	67.80	16.23		150.0	
		Z	3.05	67.80	16.20		150.0	
10110-CAC	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, QPSK)	X	3.60	77.15	21.02	0.00	150.0	± 9.6 %
		Y	2.44	68.41	16.71		150.0	
		Z	2.42	69.50	16.72		150.0	
10111-CAC	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)	X	3.39	73.07	19.46	0.00	150.0	± 9.6 %
		Y	2.81	68.67	16.68		150.0	
		Z	2.77	68.57	16.58		150.0	

Certificate No: EX3-3687_Jul16

Page 15 of 38

EX3DV4- SN:3687

July 26, 2016

10112-CAC	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)	X	3.57	70.50	18.21	0.00	150.0	± 9.6 %
		Y	3.20	67.74	16.27		150.0	
		Z	3.17	67.72	16.23		150.0	
10113-CAC	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)	X	3.50	72.70	19.32	0.00	150.0	± 9.6 %
		Y	2.96	68.74	16.78		150.0	
		Z	2.92	68.83	16.67		150.0	
10114-CAB	IEEE 802.11n (HT Greenfield, 13.5 Mbps, BPSK)	X	5.36	67.98	17.28	0.00	150.0	± 9.6 %
		Y	5.25	67.23	16.54		150.0	
		Z	5.22	67.22	16.52		150.0	
10115-CAB	IEEE 802.11n (HT Greenfield, 81 Mbps, 16-QAM)	X	5.72	68.24	17.38	0.00	150.0	± 9.6 %
		Y	5.61	67.53	16.70		150.0	
		Z	5.58	67.52	16.68		150.0	
10116-CAB	IEEE 802.11n (HT Greenfield, 135 Mbps, 64-QAM)	X	5.50	68.28	17.35	0.00	150.0	± 9.6 %
		Y	5.38	67.50	16.60		150.0	
		Z	5.34	67.48	16.58		150.0	
10117-CAB	IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK)	X	5.36	67.97	17.30	0.00	150.0	± 9.6 %
		Y	5.25	67.22	16.56		150.0	
		Z	5.21	67.20	16.53		150.0	
10118-CAB	IEEE 802.11n (HT Mixed, 81 Mbps, 16-QAM)	X	5.81	68.43	17.50	0.00	150.0	± 9.6 %
		Y	5.69	67.70	16.79		150.0	
		Z	5.65	67.89	16.77		150.0	
10119-CAB	IEEE 802.11n (HT Mixed, 135 Mbps, 64-QAM)	X	5.47	68.22	17.33	0.00	150.0	± 9.6 %
		Y	5.35	67.44	16.59		150.0	
		Z	5.31	67.42	16.56		150.0	
10140-CAB	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)	X	3.80	70.24	17.97	0.00	150.0	± 9.6 %
		Y	3.55	67.87	16.27		150.0	
		Z	3.53	67.87	16.24		150.0	
10141-CAB	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	X	3.99	70.11	18.01	0.00	150.0	± 9.6 %
		Y	3.67	67.93	16.42		150.0	
		Z	3.64	67.91	16.38		150.0	
10142-CAC	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, QPSK)	X	3.61	79.49	21.84	0.00	150.0	± 9.6 %
		Y	2.23	69.52	16.59		150.0	
		Z	2.21	69.59	16.57		150.0	
10143-CAC	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)	X	3.74	76.40	20.46	0.00	150.0	± 9.6 %
		Y	2.72	69.66	16.71		150.0	
		Z	2.67	69.50	16.54		150.0	
10144-CAC	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)	X	3.14	72.31	18.16	0.00	150.0	± 9.6 %
		Y	2.47	67.28	15.08		150.0	
		Z	2.45	67.30	15.02		150.0	
10145-CAC	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	X	8.62	95.67	25.59	0.00	150.0	± 9.6 %
		Y	1.62	68.20	14.45		150.0	
		Z	1.57	67.89	14.13		150.0	
10146-CAC	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)	X	55.01	114.84	29.58	0.00	150.0	± 9.6 %
		Y	3.14	71.71	15.30		150.0	
		Z	2.63	69.57	14.17		150.0	
10147-CAC	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)	X	100.00	124.53	32.18	0.00	150.0	± 9.6 %
		Y	4.25	75.99	17.23		150.0	
		Z	3.26	72.51	15.62		150.0	

EX3DV4-- SN.3687

July 26, 2016

10149-CAB	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)	X	3.50	70.96	18.41	0.00	150.0	± 9.6 %
		Y	3.08	67.87	16.28		150.0	
		Z	3.06	67.86	16.25		150.0	
10150-CAB	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)	X	3.58	70.57	18.26	0.00	150.0	± 9.6 %
		Y	3.21	67.80	16.31		150.0	
		Z	3.18	67.77	16.27		150.0	
10151-CAB	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	X	10.19	84.85	24.39	3.98	65.0	± 9.6 %
		Y	7.80	78.46	21.32		65.0	
		Z	8.08	79.17	21.62		65.0	
10152-CAB	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)	X	7.82	78.30	22.44	3.98	65.0	± 9.6 %
		Y	6.98	74.89	20.41		65.0	
		Z	7.17	75.53	20.72		65.0	
10153-CAB	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)	X	8.19	79.08	23.11	3.98	65.0	± 9.6 %
		Y	7.38	75.81	21.17		65.0	
		Z	7.55	76.36	21.42		65.0	
10154-CAC	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	X	3.68	78.13	21.50	0.00	150.0	± 9.6 %
		Y	2.51	70.00	17.06		150.0	
		Z	2.48	69.99	17.02		150.0	
10155-CAC	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)	X	3.39	73.07	19.46	0.00	150.0	± 9.6 %
		Y	2.81	68.66	16.69		150.0	
		Z	2.77	68.58	16.59		150.0	
10156-CAC	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, QPSK)	X	4.05	82.92	23.06	0.00	150.0	± 9.6 %
		Y	2.11	69.93	16.64		150.0	
		Z	2.08	69.96	16.58		150.0	
10157-CAC	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)	X	3.42	75.61	19.48	0.00	150.0	± 9.6 %
		Y	2.34	68.13	15.35		150.0	
		Z	2.31	68.12	15.25		150.0	
10158-CAC	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)	X	3.51	72.78	19.38	0.00	150.0	± 9.6 %
		Y	2.97	68.60	16.83		150.0	
		Z	2.93	68.69	16.71		150.0	
10159-CAC	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)	X	3.64	76.34	19.85	0.00	150.0	± 9.6 %
		Y	2.48	68.72	15.71		150.0	
		Z	2.44	68.63	15.66		150.0	
10160-CAB	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	X	3.65	74.05	19.70	0.00	150.0	± 9.6 %
		Y	2.93	69.11	16.71		150.0	
		Z	2.90	69.14	16.70		150.0	
10161-CAB	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)	X	3.48	70.62	18.30	0.00	150.0	± 9.6 %
		Y	3.10	67.72	16.27		150.0	
		Z	3.07	67.70	16.22		150.0	
10162-CAB	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)	X	3.57	70.54	18.28	0.00	150.0	± 9.6 %
		Y	3.21	67.79	16.34		150.0	
		Z	3.18	67.77	16.29		150.0	
10166-CAC	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)	X	4.11	72.19	21.18	3.01	150.0	± 9.6 %
		Y	3.82	70.03	19.41		150.0	
		Z	3.78	69.99	19.15		150.0	
10167-CAC	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM)	X	5.47	76.52	22.17	3.01	150.0	± 9.6 %
		Y	5.02	73.28	20.00		150.0	
		Z	4.73	72.52	19.64		150.0	

Certificate No: EX3-3687_Jul16

Page 17 of 38

EX3DV4- SN:3687

July 26, 2016

10168-CAC	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM)	X	6.19	79.29	23.65	3.01	150.0	± 9.6 %
		Y	5.62	75.73	21.40		150.0	
		Z	5.20	74.53	20.83		150.0	
10169-CAB	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	X	3.70	73.91	22.13	3.01	150.0	± 9.6 %
		Y	3.53	71.08	19.83		150.0	
		Z	3.30	70.11	19.37		150.0	
10170-CAB	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	X	6.48	84.90	26.20	3.01	150.0	± 9.6 %
		Y	5.44	78.61	22.65		150.0	
		Z	4.70	76.21	21.66		150.0	
10171-AAB	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)	X	4.86	78.31	22.63	3.01	150.0	± 9.6 %
		Y	4.21	73.16	19.43		150.0	
		Z	3.85	72.02	18.96		150.0	
10172-CAB	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	X	80.84	135.90	41.68	6.02	65.0	± 9.6 %
		Y	12.39	93.36	28.20		65.0	
		Z	11.61	92.61	28.07		65.0	
10173-CAB	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	X	100.00	131.01	37.95	6.02	65.0	± 9.6 %
		Y	19.50	87.20	27.69		65.0	
		Z	18.54	96.69	27.58		65.0	
10174-CAB	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)	X	100.00	128.63	36.72	6.02	65.0	± 9.6 %
		Y	14.06	90.60	25.17		65.0	
		Z	15.07	91.99	25.63		65.0	
10175-CAC	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	X	3.64	73.46	21.82	3.01	150.0	± 9.6 %
		Y	3.47	70.85	19.53		150.0	
		Z	3.26	69.78	19.12		150.0	
10176-CAC	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)	X	6.50	84.93	26.21	3.01	150.0	± 9.6 %
		Y	5.45	78.64	22.66		150.0	
		Z	4.71	76.24	21.67		150.0	
10177-CAE	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, QPSK)	X	3.68	73.69	21.95	3.01	150.0	± 9.6 %
		Y	3.51	70.87	19.66		150.0	
		Z	3.29	69.94	19.22		150.0	
10178-CAC	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)	X	6.35	84.45	26.00	3.01	150.0	± 9.6 %
		Y	5.35	78.24	22.47		150.0	
		Z	4.65	75.97	21.53		150.0	
10179-CAC	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)	X	5.62	81.51	24.30	3.01	150.0	± 9.6 %
		Y	4.74	75.60	20.84		150.0	
		Z	4.23	73.96	20.17		150.0	
10180-CAC	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)	X	4.83	78.16	22.54	3.01	150.0	± 9.6 %
		Y	4.19	73.03	19.35		150.0	
		Z	3.84	71.93	18.91		150.0	
10181-CAB	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	X	3.67	73.67	21.94	3.01	150.0	± 9.6 %
		Y	3.51	70.85	19.65		150.0	
		Z	3.29	69.92	19.21		150.0	
10182-CAB	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)	X	6.34	84.41	25.99	3.01	150.0	± 9.6 %
		Y	5.34	78.21	22.46		150.0	
		Z	4.64	75.94	21.52		150.0	
10183-AAA	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)	X	4.82	78.12	22.53	3.01	150.0	± 9.6 %
		Y	4.18	73.01	19.34		150.0	
		Z	3.83	71.91	18.89		150.0	

EX3DV4-- SN-3657

July 26, 2016

10184-CAC	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	X	3.69	73.72	21.97	3.01	150.0	± 9.6 %
		Y	3.52	70.90	19.67		150.0	
		Z	3.30	69.97	19.23		150.0	
10185-CAC	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)	X	6.38	84.53	26.03	3.01	150.0	± 9.6 %
		Y	5.37	78.30	22.50		150.0	
		Z	4.66	76.01	21.55		150.0	
10188-AAC	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	X	4.85	79.23	22.58	3.01	150.0	± 9.6 %
		Y	4.21	73.08	19.38		150.0	
		Z	3.85	71.97	18.93		150.0	
10187-CAC	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)	X	3.70	73.76	22.02	3.01	150.0	± 9.6 %
		Y	3.53	70.93	19.72		150.0	
		Z	3.30	70.01	19.28		150.0	
10188-CAC	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)	X	6.74	85.72	28.58	3.01	150.0	± 9.6 %
		Y	5.63	79.28	23.00		150.0	
		Z	4.82	76.72	21.94		150.0	
10189-AAC	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)	X	5.02	78.94	22.96	3.01	150.0	± 9.6 %
		Y	4.33	73.64	19.71		150.0	
		Z	3.94	72.42	19.21		150.0	
10193-CAB	IEEE 802.11n (HT Greenfield, 8.5 Mbps, BPSK)	X	4.78	67.50	17.14	0.00	150.0	± 9.6 %
		Y	4.67	66.66	16.33		150.0	
		Z	4.64	66.66	16.30		150.0	
10194-CAB	IEEE 802.11n (HT Greenfield, 39 Mbps, 16-QAM)	X	4.98	67.87	17.25	0.00	150.0	± 9.6 %
		Y	4.86	67.02	16.44		150.0	
		Z	4.83	67.01	16.41		150.0	
10195-CAB	IEEE 802.11n (HT Greenfield, 65 Mbps, 64-QAM)	X	5.02	67.87	17.25	0.00	150.0	± 9.6 %
		Y	4.91	67.04	16.45		150.0	
		Z	4.87	67.03	16.42		150.0	
10196-CAB	IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK)	X	4.80	67.61	17.18	0.00	150.0	± 9.6 %
		Y	4.69	66.76	16.36		150.0	
		Z	4.65	66.75	16.33		150.0	
10197-CAB	IEEE 802.11n (HT Mixed, 38 Mbps, 16-QAM)	X	5.00	67.89	17.26	0.00	150.0	± 9.6 %
		Y	4.88	67.04	16.45		150.0	
		Z	4.85	67.03	16.43		150.0	
10198-CAB	IEEE 802.11n (HT Mixed, 65 Mbps, 64-QAM)	X	5.03	67.89	17.26	0.00	150.0	± 9.6 %
		Y	4.91	67.05	16.46		150.0	
		Z	4.88	67.05	16.44		150.0	
10219-CAB	IEEE 802.11n (HT Mixed, 7.2 Mbps, BPSK)	X	4.76	67.66	17.17	0.00	150.0	± 9.6 %
		Y	4.64	66.77	16.33		150.0	
		Z	4.60	66.76	16.30		150.0	
10220-CAB	IEEE 802.11n (HT Mixed, 43.3 Mbps, 16-QAM)	X	5.00	67.87	17.26	0.00	150.0	± 9.6 %
		Y	4.88	67.03	16.45		150.0	
		Z	4.84	67.02	16.42		150.0	
10221-CAB	IEEE 802.11n (HT Mixed, 72.2 Mbps, 64-QAM)	X	5.03	67.80	17.24	0.00	150.0	± 9.6 %
		Y	4.92	66.98	16.45		150.0	
		Z	4.88	66.88	16.42		150.0	
10222-CAB	IEEE 802.11n (HT Mixed, 15 Mbps, BPSK)	X	5.34	68.00	17.30	0.00	150.0	± 9.6 %
		Y	5.23	67.24	16.56		150.0	
		Z	5.19	67.22	16.53		150.0	

Certificate No: EX3-3887_Jul16

Page 19 of 38

EX3DV4- SN:3687

July 26, 2016

10223-CAB	IEEE 802.11n (HT Mixed, 90 Mbps, 16-QAM)	X	5.69	68.22	17.41	0.00	150.0	± 9.6 %
		Y	5.58	67.53	16.72		150.0	
		Z	5.53	67.46	16.67		150.0	
10224-CAB	IEEE 802.11n (HT Mixed, 150 Mbps, 64-QAM)	X	5.39	68.11	17.28	0.00	150.0	± 9.6 %
		Y	5.27	67.34	16.54		150.0	
		Z	5.24	67.32	16.51		150.0	
10225-CAB	UMTS-FDD (HSPA+)	X	3.19	68.47	17.44	0.00	150.0	± 9.6 %
		Y	2.95	66.32	15.76		150.0	
		Z	2.92	66.32	15.71		150.0	
10226-CAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)	X	100.00	131.25	38.11	6.02	65.0	± 9.6 %
		Y	20.98	98.60	28.20		65.0	
		Z	19.70	97.86	28.03		65.0	
10227-CAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)	X	100.00	128.80	36.84	6.02	65.0	± 9.6 %
		Y	17.56	94.28	26.38		65.0	
		Z	16.49	93.53	26.17		65.0	
10228-CAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)	X	100.00	140.79	42.97	6.02	65.0	± 9.6 %
		Y	16.26	98.87	30.05		65.0	
		Z	17.41	100.57	30.65		65.0	
10229-CAB	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)	X	100.00	131.00	37.96	6.02	65.0	± 9.6 %
		Y	19.62	97.29	27.72		65.0	
		Z	18.63	96.75	27.61		65.0	
10230-CAB	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	X	100.00	128.61	38.72	6.02	65.0	± 9.6 %
		Y	16.55	93.20	25.97		65.0	
		Z	15.70	92.61	25.82		65.0	
10231-CAB	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	X	100.00	140.80	42.85	6.02	65.0	± 9.6 %
		Y	15.36	97.68	29.59		65.0	
		Z	16.54	99.48	30.24		65.0	
10232-CAB	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)	X	100.00	131.01	37.96	6.02	65.0	± 9.6 %
		Y	19.59	97.28	27.72		65.0	
		Z	18.62	96.75	27.61		65.0	
10233-CAB	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)	X	100.00	128.63	36.72	6.02	65.0	± 9.6 %
		Y	16.54	93.19	25.96		65.0	
		Z	15.69	92.62	25.82		65.0	
10234-CAB	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK)	X	100.00	140.25	42.64	6.02	65.0	± 9.6 %
		Y	14.56	96.49	29.11		65.0	
		Z	15.72	98.36	29.79		65.0	
10235-CAB	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)	X	100.00	131.03	37.97	6.02	65.0	± 9.6 %
		Y	19.62	97.32	27.73		65.0	
		Z	18.65	96.79	27.62		65.0	
10236-CAB	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)	X	100.00	128.58	36.70	6.02	65.0	± 9.6 %
		Y	16.67	93.30	25.99		65.0	
		Z	15.82	92.73	25.85		65.0	
10237-CAB	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	X	100.00	140.63	42.85	6.02	65.0	± 9.6 %
		Y	15.42	97.78	29.63		65.0	
		Z	16.63	99.61	30.28		65.0	
10238-CAB	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)	X	100.00	131.02	37.96	6.02	65.0	± 9.6 %
		Y	19.57	97.27	27.71		65.0	
		Z	18.60	96.74	27.61		65.0	

EX3DV4— SN:3687

July 26, 2016

10239-CAB	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)	X	100.00	128.65	36.73	6.02	65.0	± 9.6 %
		Y	16.51	93.18	25.96		65.0	
		Z	15.67	92.61	25.82		65.0	
10240-CAB	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	X	100.00	140.64	42.86	6.02	65.0	± 9.6 %
		Y	15.37	97.72	29.61		65.0	
		Z	18.57	99.56	30.26		65.0	
10241-CAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM)	X	11.18	87.08	28.18	6.98	65.0	± 9.6 %
		Y	9.88	82.30	25.49		65.0	
		Z	9.97	82.82	25.75		65.0	
10242-CAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM)	X	10.03	84.59	27.11	6.98	65.0	± 9.6 %
		Y	8.73	79.66	24.33		65.0	
		Z	9.63	82.05	25.36		65.0	
10243-CAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)	X	7.74	80.52	26.42	6.98	65.0	± 9.6 %
		Y	7.01	76.51	23.85		65.0	
		Z	7.84	79.37	25.18		65.0	
10244-CAB	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)	X	11.61	88.45	23.60	3.98	65.0	± 9.6 %
		Y	7.61	77.57	19.62		65.0	
		Z	7.35	76.97	19.27		65.0	
10245-CAB	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)	X	11.08	85.36	23.16	3.98	65.0	± 9.6 %
		Y	7.51	77.12	19.39		65.0	
		Z	7.25	76.52	19.05		65.0	
10246-CAB	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK)	X	16.24	95.28	26.50	3.98	65.0	± 9.6 %
		Y	7.16	79.78	20.52		65.0	
		Z	7.51	80.53	20.76		65.0	
10247-CAB	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)	X	8.05	81.05	22.29	3.98	65.0	± 9.6 %
		Y	6.32	75.38	19.43		65.0	
		Z	6.47	75.81	19.57		65.0	
10248-CAB	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)	X	7.82	80.00	21.85	3.98	65.0	± 9.6 %
		Y	6.32	74.68	19.21		65.0	
		Z	6.47	75.33	19.37		65.0	
10249-CAB	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK)	X	17.10	96.86	27.78	3.98	65.0	± 9.6 %
		Y	8.08	81.80	21.94		65.0	
		Z	8.58	82.83	22.30		65.0	
10250-CAB	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)	X	8.60	82.25	24.10	3.98	65.0	± 9.6 %
		Y	7.18	77.35	21.51		65.0	
		Z	7.37	77.88	21.73		65.0	
10251-CAB	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)	X	7.82	79.11	22.53	3.98	65.0	± 9.6 %
		Y	6.80	75.16	20.30		65.0	
		Z	7.00	75.81	20.59		65.0	
10252-CAB	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	X	12.94	81.44	26.79	3.98	65.0	± 9.6 %
		Y	8.15	81.13	22.37		65.0	
		Z	8.58	82.12	22.75		65.0	
10253-CAB	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)	X	7.51	77.42	22.12	3.98	65.0	± 9.6 %
		Y	6.80	74.30	20.20		65.0	
		Z	6.98	74.92	20.50		65.0	
10254-CAB	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)	X	7.89	78.23	22.76	3.98	65.0	± 9.6 %
		Y	7.19	75.19	20.90		65.0	
		Z	7.35	75.73	21.15		65.0	

Certificate No: EX3-3687_Jul16

Page 21 of 38

EX3DV4- SN:3687

July 28, 2016

10255-CAB	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	X	9.48	83.86	24.30	3.98	65.0	± 9.6 %
		Y	7.48	77.94	21.35		65.0	
		Z	7.76	78.68	21.67		65.0	
10256-CAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)	X	10.02	83.36	21.55	3.98	65.0	± 9.6 %
		Y	6.43	74.73	17.62		65.0	
		Z	6.17	74.06	17.22		65.0	
10257-CAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)	X	9.31	81.77	20.87	3.98	65.0	± 9.6 %
		Y	6.31	74.11	17.29		65.0	
		Z	6.06	73.46	16.90		65.0	
10258-CAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	X	12.43	90.01	24.07	3.98	65.0	± 9.6 %
		Y	5.97	76.67	19.70		65.0	
		Z	6.13	77.03	18.77		65.0	
10259-CAB	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)	X	8.25	81.38	22.89	3.98	65.0	± 9.6 %
		Y	6.65	76.04	20.15		65.0	
		Z	6.82	76.54	20.33		65.0	
10260-CAB	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)	X	8.15	80.81	22.66	3.98	65.0	± 9.6 %
		Y	6.69	75.83	20.06		65.0	
		Z	6.85	76.30	20.25		65.0	
10261-CAB	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK)	X	13.63	92.80	26.85	3.98	65.0	± 9.6 %
		Y	7.75	80.80	21.68		65.0	
		Z	8.20	81.82	22.26		65.0	
10262-CAB	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)	X	8.59	82.20	24.06	3.98	65.0	± 9.6 %
		Y	7.17	77.29	21.47		65.0	
		Z	7.36	77.84	21.69		65.0	
10263-CAB	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)	X	7.81	79.10	22.53	3.98	65.0	± 9.6 %
		Y	6.79	75.15	20.30		65.0	
		Z	6.99	75.80	20.59		65.0	
10264-CAB	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK)	X	12.79	91.18	26.68	3.98	65.0	± 9.6 %
		Y	8.08	80.96	22.28		65.0	
		Z	8.51	81.98	22.67		65.0	
10265-CAB	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)	X	7.81	78.30	22.44	3.98	65.0	± 9.6 %
		Y	6.98	74.89	20.42		65.0	
		Z	7.17	75.53	20.73		65.0	
10266-CAB	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)	X	8.18	79.07	23.10	3.98	65.0	± 9.6 %
		Y	7.38	75.80	21.16		65.0	
		Z	7.55	76.35	21.42		65.0	
10267-CAB	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	X	10.16	84.78	24.37	3.98	65.0	± 9.6 %
		Y	7.79	78.42	21.30		65.0	
		Z	8.07	79.13	21.60		65.0	
10268-CAB	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)	X	8.11	77.19	22.31	3.98	65.0	± 9.6 %
		Y	7.56	74.73	20.72		65.0	
		Z	7.71	75.21	20.97		65.0	
10269-CAB	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	X	7.98	76.57	22.12	3.98	65.0	± 9.6 %
		Y	7.51	74.32	20.62		65.0	
		Z	7.85	74.79	20.87		65.0	
10270-CAB	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	X	8.68	79.87	22.63	3.98	65.0	± 9.6 %
		Y	7.57	76.10	20.54		65.0	
		Z	7.74	76.56	20.76		65.0	

EX3DV4- SN:3687

July 26, 2016

10274-CAB	UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.10)	X	3.03	69.54	17.75	0.00	150.0	± 9.6 %
		Y	2.69	66.60	15.63		150.0	
		Z	2.68	66.65	15.61		150.0	
10275-CAB	UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.4)	X	3.26	81.54	22.94	0.00	150.0	± 9.6 %
		Y	1.75	68.75	16.29		150.0	
		Z	1.75	68.93	16.33		150.0	
10277-CAA	PHS (QPSK)	X	3.28	64.60	10.21	9.03	50.0	± 9.6 %
		Y	3.51	64.85	10.46		50.0	
		Z	3.60	65.03	10.57		50.0	
10278-CAA	PHS (QPSK, BW 884MHz, Roll-off 0.5)	X	10.76	84.73	21.65	9.03	50.0	± 9.6 %
		Y	6.78	76.25	18.34		50.0	
		Z	6.91	76.38	18.37		50.0	
10279-CAA	PHS (QPSK, BW 884MHz, Roll-off 0.38)	X	11.02	84.98	21.78	9.03	50.0	± 9.6 %
		Y	6.93	76.48	18.46		50.0	
		Z	7.07	76.63	18.50		50.0	
10290-AAB	CDMA2000, RC1, SO55, Full Rate	X	88.46	134.34	35.76	0.00	150.0	± 9.6 %
		Y	1.85	71.33	16.06		150.0	
		Z	1.82	71.34	15.92		150.0	
10291-AAB	CDMA2000, RC3, SO55, Full Rate	X	100.00	145.97	39.15	0.00	150.0	± 9.6 %
		Y	1.03	68.06	14.54		150.0	
		Z	1.02	68.16	14.44		150.0	
10292-AAB	CDMA2000, RC3, SO32, Full Rate	X	100.00	152.38	41.89	0.00	150.0	± 9.6 %
		Y	1.43	73.89	17.61		150.0	
		Z	1.42	74.02	17.49		150.0	
10293-AAB	CDMA2000, RC3, SO3, Full Rate	X	100.00	156.15	43.74	0.00	150.0	± 9.6 %
		Y	2.47	82.67	21.53		150.0	
		Z	2.37	82.05	21.11		150.0	
10295-AAB	CDMA2000, RC1, SO3, 1/8th Rate 25 fr.	X	11.88	89.56	26.39	9.03	50.0	± 9.6 %
		Y	8.09	80.45	22.47		50.0	
		Z	8.69	81.73	22.97		50.0	
10297-AAA	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	X	4.17	77.48	20.92	0.00	150.0	± 9.6 %
		Y	2.99	70.50	17.11		150.0	
		Z	2.97	70.52	17.10		150.0	
10298-AAB	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, QPSK)	X	5.90	90.04	24.75	0.00	150.0	± 9.6 %
		Y	1.90	69.69	15.85		150.0	
		Z	1.87	69.59	15.69		150.0	
10299-AAB	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)	X	16.42	98.77	26.49	0.00	150.0	± 9.6 %
		Y	3.65	73.42	16.80		150.0	
		Z	3.15	71.54	15.85		150.0	
10300-AAB	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)	X	4.77	78.02	18.71	0.00	150.0	± 9.6 %
		Y	2.60	67.67	13.52		150.0	
		Z	2.37	66.75	12.94		150.0	
10301-AAA	IEEE 802.16e WiMAX (29.18, 5ms, 10MHz, QPSK, PUSC)	X	5.27	67.15	18.66	4.17	50.0	± 9.6 %
		Y	5.09	65.96	17.88		50.0	
		Z	5.08	66.02	17.88		50.0	
10302-AAA	IEEE 802.16e WiMAX (29.18, 5ms, 10MHz, QPSK, PUSC, 3 CTRL. symbols)	X	5.68	67.44	19.40	4.96	50.0	± 9.6 %
		Y	5.54	66.38	18.47		50.0	
		Z	5.63	66.95	18.78		50.0	

Certificate No: EX3-3687_Jul16

Page 23 of 38

EX30V4- SN:3687

July 26, 2016

10303-AAA	IEEE 802.16e WiMAX (31:15, 5ms, 10MHz, 64QAM, PUSC)	X	5.46	67.26	19.35	4.96	50.0	± 9.6 %
		Y	5.33	66.17	18.40		50.0	
		Z	5.42	66.78	18.73		50.0	
10304-AAA	IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, 64QAM, PUSC)	X	5.23	67.00	18.77	4.17	50.0	± 9.6 %
		Y	5.09	65.90	17.82		50.0	
		Z	5.15	66.39	18.08		50.0	
10305-AAA	IEEE 802.16e WiMAX (31:15, 10ms, 10MHz, 64QAM, PUSC, 15 symbols)	X	5.32	71.38	22.39	6.02	35.0	± 9.6 %
		Y	5.16	69.71	21.00		35.0	
		Z	5.46	71.47	21.93		35.0	
10306-AAA	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 64QAM, PUSC, 18 symbols)	X	5.34	68.90	21.13	6.02	35.0	± 9.6 %
		Y	5.26	67.79	20.07		35.0	
		Z	5.42	68.86	20.69		35.0	
10307-AAA	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, QPSK, PUSC, 18 symbols)	X	5.33	69.51	21.32	6.02	35.0	± 9.6 %
		Y	5.23	68.29	20.20		35.0	
		Z	5.42	69.47	20.86		35.0	
10308-AAA	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 16QAM, PUSC)	X	5.32	69.81	21.51	6.02	35.0	± 9.6 %
		Y	5.21	68.52	20.34		35.0	
		Z	5.42	69.79	21.05		35.0	
10309-AAA	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 16QAM, AMC 2x3, 18 symbols)	X	5.45	69.26	21.34	6.02	35.0	± 9.6 %
		Y	5.34	68.07	20.23		35.0	
		Z	5.52	69.18	20.87		35.0	
10310-AAA	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, QPSK, AMC 2x3, 18 symbols)	X	5.32	69.10	21.17	6.02	35.0	± 9.6 %
		Y	5.23	67.95	20.09		35.0	
		Z	5.40	69.07	20.73		35.0	
10311-AAA	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	X	4.57	75.97	20.10	0.00	150.0	± 9.6 %
		Y	3.36	69.81	18.75		150.0	
		Z	3.34	69.79	18.72		150.0	
10313-AAA	IDEN 1:3	X	13.93	90.23	22.53	6.99	70.0	± 9.6 %
		Y	4.97	74.36	16.70		70.0	
		Z	5.29	75.06	16.97		70.0	
10314-AAA	IDEN 1:6	X	33.22	109.59	31.06	10.00	30.0	± 9.6 %
		Y	6.66	81.02	21.88		30.0	
		Z	6.67	80.82	21.76		30.0	
10315-AAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 96pc duty cycle)	X	1.36	69.56	19.97	0.17	150.0	± 9.6 %
		Y	1.15	64.42	15.76		150.0	
		Z	1.15	64.51	15.78		150.0	
10316-AAB	IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 96pc duty cycle)	X	4.84	67.53	17.24	0.17	150.0	± 9.6 %
		Y	4.73	66.69	16.41		150.0	
		Z	4.71	66.72	16.41		150.0	
10317-AAB	IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 96pc duty cycle)	X	4.84	67.53	17.24	0.17	150.0	± 9.6 %
		Y	4.73	66.69	16.41		150.0	
		Z	4.71	66.72	16.41		150.0	
10400-AAC	IEEE 802.11ac WiFi (20MHz, 64-QAM, 99pc duty cycle)	X	5.00	67.95	17.26	0.00	150.0	± 9.6 %
		Y	4.87	67.06	16.42		150.0	
		Z	4.84	67.07	16.41		150.0	
10401-AAC	IEEE 802.11ac WiFi (40MHz, 64-QAM, 99pc duty cycle)	X	5.61	67.82	17.19	0.00	150.0	± 9.6 %
		Y	5.51	67.14	16.50		150.0	
		Z	5.48	67.15	16.50		150.0	

EX3DV4- SN:3687

July 26, 2016

10402-AAC	IEEE 802.11ac WiFi (80MHz, 64-QAM, 99pc duty cycle)	X	5.92	68.33	17.27	0.00	150.0	± 9.6 %
		Y	5.81	67.66	16.61		150.0	
		Z	5.77	67.64	16.58		150.0	
10403-AAB	CDMA2000 (1xEV-DO, Rev. 0)	X	88.46	134.34	35.76	0.00	115.0	± 9.6 %
		Y	1.85	71.33	16.06		115.0	
		Z	1.82	71.34	15.92		115.0	
10404-AAB	CDMA2000 (1xEV-DO, Rev. A)	X	88.46	134.34	35.76	0.00	115.0	± 9.6 %
		Y	1.85	71.33	16.06		115.0	
		Z	1.82	71.34	15.92		115.0	
10406-AAB	CDMA2000, RC3, SO32, SCH0, Full Rate	X	100.00	132.57	35.82	0.00	100.0	± 9.6 %
		Y	100.00	122.77	31.49		100.0	
		Z	28.95	105.84	27.43		100.0	
10410-AAA	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	0.91	60.00	4.98	2.23	80.0	± 9.6 %
		Y	1.02	60.00	5.08		80.0	
		Z	0.99	60.00	4.99		80.0	
10415-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle)	X	1.21	67.66	19.11	0.00	150.0	± 9.6 %
		Y	1.05	63.34	15.14		150.0	
		Z	1.04	63.38	15.13		150.0	
10416-AAA	IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 99pc duty cycle)	X	4.79	67.54	17.19	0.00	150.0	± 9.6 %
		Y	4.67	66.70	16.37		150.0	
		Z	4.64	66.70	16.35		150.0	
10417-AAA	IEEE 802.11a/n WiFi 5 GHz (OFDM, 6 Mbps, 99pc duty cycle)	X	4.79	67.54	17.19	0.00	150.0	± 9.6 %
		Y	4.67	66.70	16.37		150.0	
		Z	4.64	66.70	16.35		150.0	
10418-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Long preamble)	X	4.78	67.74	17.23	0.00	150.0	± 9.6 %
		Y	4.66	66.84	16.38		150.0	
		Z	4.63	66.85	16.36		150.0	
10419-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Short preamble)	X	4.80	67.67	17.22	0.00	150.0	± 9.6 %
		Y	4.68	66.80	16.39		150.0	
		Z	4.65	66.80	16.37		150.0	
10422-AAA	IEEE 802.11n (HT Greenfield, 7.2 Mbps, BPSK)	X	4.92	67.62	17.20	0.00	150.0	± 9.6 %
		Y	4.81	66.80	16.40		150.0	
		Z	4.78	66.80	16.38		150.0	
10423-AAA	IEEE 802.11n (HT Greenfield, 43.3 Mbps, 16-QAM)	X	5.12	68.00	17.32	0.00	150.0	± 9.6 %
		Y	5.01	67.17	16.53		150.0	
		Z	4.97	67.16	16.51		150.0	
10424-AAA	IEEE 802.11n (HT Greenfield, 72.2 Mbps, 64-QAM)	X	5.04	67.96	17.31	0.00	150.0	± 9.6 %
		Y	4.92	67.11	16.50		150.0	
		Z	4.88	67.10	16.48		150.0	
10425-AAA	IEEE 802.11n (HT Greenfield, 15 Mbps, BPSK)	X	5.60	68.14	17.35	0.00	150.0	± 9.6 %
		Y	5.49	67.41	16.64		150.0	
		Z	5.46	67.40	16.62		150.0	
10426-AAA	IEEE 802.11n (HT Greenfield, 90 Mbps, 16-QAM)	X	5.61	68.16	17.36	0.00	150.0	± 9.6 %
		Y	5.50	67.44	16.65		150.0	
		Z	5.48	67.42	16.62		150.0	

Certificate No: EX3-3687_Jul16

Page 25 of 38

EX3DV4- SN:3687

July 26, 2016

10427-AAA	IEEE 802.11n (HT Greenfield, 150 Mbps, 64-QAM)	X	5.63	68.15	17.35	0.00	150.0	± 9.6 %
		Y	5.52	67.44	16.65		150.0	
		Z	5.48	67.42	16.62		150.0	
10430-AAA	LTE-FDD (OFDMA, 5 MHz, E-TM 3.1)	X	4.84	73.06	20.06	0.00	150.0	± 9.6 %
		Y	4.51	71.10	18.70		150.0	
		Z	4.38	70.61	18.36		150.0	
10431-AAA	LTE-FDD (OFDMA, 10 MHz, E-TM 3.1)	X	4.57	68.47	17.47	0.00	150.0	± 9.6 %
		Y	4.40	67.28	16.45		150.0	
		Z	4.37	67.28	16.42		150.0	
10432-AAA	LTE-FDD (OFDMA, 15 MHz, E-TM 3.1)	X	4.63	68.13	17.36	0.00	150.0	± 9.6 %
		Y	4.69	67.16	16.47		150.0	
		Z	4.66	67.15	16.45		150.0	
10433-AAA	LTE-FDD (OFDMA, 20 MHz, E-TM 3.1)	X	5.05	68.01	17.34	0.00	150.0	± 9.6 %
		Y	4.93	67.15	16.53		150.0	
		Z	4.90	67.15	16.50		150.0	
10434-AAA	W-CDMA (BS Test Model 1, 64 DPCH)	X	5.13	74.55	20.37	0.00	150.0	± 9.6 %
		Y	4.65	72.04	18.79		150.0	
		Z	4.50	71.47	18.39		150.0	
10435-AAA	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	0.91	60.00	4.97	2.23	80.0	± 9.6 %
		Y	1.03	60.00	5.07		80.0	
		Z	0.99	60.00	4.99		80.0	
10447-AAA	LTE-FDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%)	X	4.00	68.32	17.43	0.00	150.0	± 9.6 %
		Y	3.72	67.40	15.99		150.0	
		Z	3.69	67.40	15.93		150.0	
10448-AAA	LTE-FDD (OFDMA, 10 MHz, E-TM 3.1, Clipping 44%)	X	4.39	68.29	17.37	0.00	150.0	± 9.6 %
		Y	4.23	67.06	16.31		150.0	
		Z	4.19	67.06	16.28		150.0	
10449-AAA	LTE-FDD (OFDMA, 15 MHz, E-TM 3.1, Clipping 44%)	X	4.63	68.02	17.31	0.00	150.0	± 9.6 %
		Y	4.48	66.99	16.38		150.0	
		Z	4.45	66.99	16.35		150.0	
10450-AAA	LTE-FDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%)	X	4.79	67.83	17.24	0.00	150.0	± 9.6 %
		Y	4.67	66.91	16.39		150.0	
		Z	4.63	66.91	16.36		150.0	
10451-AAA	W-CDMA (BS Test Model 1, 64 DPCH, Clipping 44%)	X	4.02	70.05	17.38	0.00	150.0	± 9.6 %
		Y	3.65	67.71	15.75		150.0	
		Z	3.61	67.70	15.68		150.0	
10456-AAA	IEEE 802.11ac WiFi (180MHz, 64-QAM, 99pc duty cycle)	X	6.45	68.60	17.40	0.00	150.0	± 9.6 %
		Y	6.35	68.02	16.80		150.0	
		Z	6.31	67.99	16.77		150.0	
10457-AAA	UMTS-FDD (DC-HSDPA)	X	3.95	66.14	16.97	0.00	150.0	± 9.6 %
		Y	3.87	65.33	16.10		150.0	
		Z	3.85	65.33	16.07		150.0	
10458-AAA	CDMA2000 (1xEV-DO, Rev. B, 2 carriers)	X	3.79	69.17	16.81	0.00	150.0	± 9.6 %
		Y	3.46	66.93	15.21		150.0	
		Z	3.43	67.00	15.17		150.0	
10459-AAA	CDMA2000 (1xEV-DO, Rev. B, 3 carriers)	X	4.75	66.25	16.87	0.00	150.0	± 9.6 %
		Y	4.50	64.65	15.78		150.0	
		Z	4.60	65.44	16.04		150.0	

EX3DV4- SN:3687

July 26, 2016

10460-AAA	UMTS-FDD (WCDMA, AMR)	X	12.04	123.08	38.00	0.00	150.0	± 9.6 %
		Y	1.00	69.62	17.28		150.0	
		Z	1.01	70.04	17.42		150.0	
10461-AAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	100.00	134.29	36.64	3.23	80.0	± 9.6 %
		Y	100.00	120.65	30.55		80.0	
		Z	78.61	117.26	29.68		80.0	
10462-AAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	100.00	114.10	27.09	3.23	80.0	± 9.6 %
		Y	4.94	74.34	15.06		80.0	
		Z	3.86	71.95	14.17		80.0	
10463-AAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	100.00	109.69	26.03	3.23	80.0	± 9.6 %
		Y	2.60	67.76	12.17		80.0	
		Z	2.44	66.57	11.64		80.0	
10464-AAA	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	100.00	132.30	35.53	3.23	80.0	± 9.6 %
		Y	100.00	118.37	29.34		80.0	
		Z	64.89	110.54	27.47		80.0	
10465-AAA	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	100.00	113.37	28.74	3.23	80.0	± 9.6 %
		Y	3.94	71.89	14.12		80.0	
		Z	3.26	70.11	13.42		80.0	
10466-AAA	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	100.00	108.99	24.71	3.23	80.0	± 9.6 %
		Y	2.51	66.57	11.64		80.0	
		Z	2.22	65.60	11.18		80.0	
10467-AAA	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	100.00	132.60	35.66	3.23	80.0	± 9.6 %
		Y	100.00	118.59	29.44		80.0	
		Z	67.06	113.27	28.14		80.0	
10468-AAA	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	100.00	113.60	26.84	3.23	80.0	± 9.6 %
		Y	4.13	72.43	14.33		80.0	
		Z	3.38	70.54	13.60		80.0	
10469-AAA	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	100.00	109.03	24.72	3.23	80.0	± 9.6 %
		Y	2.51	66.61	11.65		80.0	
		Z	2.23	65.63	11.19		80.0	
10470-AAA	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	100.00	132.67	35.69	3.23	80.0	± 9.6 %
		Y	100.00	118.80	29.44		80.0	
		Z	67.90	113.44	28.17		80.0	
10471-AAA	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	100.00	113.53	26.81	3.23	80.0	± 9.6 %
		Y	4.10	72.35	14.29		80.0	
		Z	3.36	70.47	13.56		80.0	
10472-AAA	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	100.00	108.96	24.68	3.23	80.0	± 9.6 %
		Y	2.50	66.56	11.62		80.0	
		Z	2.21	65.58	11.16		80.0	
10473-AAA	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	100.00	132.63	35.67	3.23	80.0	± 9.6 %
		Y	100.00	118.57	29.43		80.0	
		Z	67.58	113.35	28.15		80.0	
10474-AAA	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	100.00	113.55	26.81	3.23	80.0	± 9.6 %
		Y	4.08	72.29	14.27		80.0	
		Z	3.34	70.42	13.54		80.0	
10475-AAA	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	100.00	108.98	24.69	3.23	80.0	± 9.6 %
		Y	2.49	66.53	11.61		80.0	
		Z	2.21	65.55	11.15		80.0	

Certificate No: EX3-3687_Jul16

Page 27 of 38

EX3DV4- SN:3687

July 26, 2016

10477-AAA	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	100.00	113.33	26.71	3.23	80.0	± 9.6 %
		Y	3.92	71.85	14.09		80.0	
		Z	3.24	70.08	13.39		80.0	
10478-AAA	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	100.00	108.89	24.65	3.23	80.0	± 9.6 %
		Y	2.47	66.46	11.57		80.0	
		Z	2.20	65.49	11.12		80.0	
10479-AAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	100.00	105.44	22.69	1.99	80.0	± 9.6 %
		Y	1.40	61.91	8.83		80.0	
		Z	1.22	60.81	8.11		80.0	
10480-AAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	1.37	60.41	7.55	1.99	80.0	± 9.6 %
		Y	1.46	60.00	7.12		80.0	
		Z	1.43	60.00	6.97		80.0	
10481-AAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	1.34	60.00	7.07	1.99	80.0	± 9.6 %
		Y	1.48	60.00	6.90		80.0	
		Z	1.46	60.00	6.75		80.0	
10482-AAA	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	100.00	122.72	31.96	1.99	80.0	± 9.6 %
		Y	3.77	73.54	17.00		80.0	
		Z	4.03	74.45	17.27		80.0	
10483-AAA	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	100.00	118.35	30.71	1.99	80.0	± 9.6 %
		Y	5.38	74.78	17.30		80.0	
		Z	4.74	73.06	16.49		80.0	
10484-AAA	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	100.00	118.12	30.67	1.99	80.0	± 9.6 %
		Y	5.09	73.85	16.98		80.0	
		Z	4.53	72.28	16.21		80.0	
10485-AAA	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	96.76	125.95	34.02	1.99	80.0	± 9.6 %
		Y	4.37	75.77	18.69		80.0	
		Z	4.74	76.99	19.10		80.0	
10486-AAA	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	8.86	85.13	22.64	1.99	80.0	± 9.6 %
		Y	3.69	70.33	16.36		80.0	
		Z	3.78	70.76	16.47		80.0	
10487-AAA	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	7.93	83.06	21.95	1.99	80.0	± 9.6 %
		Y	3.68	69.94	16.21		80.0	
		Z	3.76	70.32	16.31		80.0	
10488-AAA	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	15.73	97.02	27.43	1.99	80.0	± 9.6 %
		Y	4.57	74.91	19.01		80.0	
		Z	4.84	75.90	19.39		80.0	
10489-AAA	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	5.83	78.04	21.39	1.99	80.0	± 9.6 %
		Y	3.96	70.26	17.45		80.0	
		Z	4.06	70.70	17.62		80.0	
10490-AAA	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	5.66	76.89	20.88	1.99	80.0	± 9.6 %
		Y	4.05	69.99	17.38		80.0	
		Z	4.13	70.41	17.54		80.0	
10491-AAA	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	8.34	84.36	23.56	1.99	80.0	± 9.6 %
		Y	4.54	72.73	18.36		80.0	
		Z	4.70	73.40	18.64		80.0	
10492-AAA	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	5.30	74.25	20.17	1.99	80.0	± 9.6 %
		Y	4.27	69.36	17.39		80.0	
		Z	4.33	69.72	17.54		80.0	

Certificate No: EX3-3687_Jul16

Page 28 of 38

EX3DV4- SN:3687

July 26, 2016

10493-AAA	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	5.27	73.69	19.96	1.99	80.0	± 9.6 %
		Y	4.33	89.16	17.35		80.0	
		Z	4.39	89.52	17.49		80.0	
10494-AAA	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	12.18	90.40	25.27	1.99	80.0	± 9.6 %
		Y	5.08	74.54	18.84		80.0	
		Z	5.30	75.29	19.14		80.0	
10495-AAA	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	5.56	75.32	20.59	1.99	80.0	± 9.6 %
		Y	4.34	89.91	17.61		80.0	
		Z	4.41	70.27	17.76		80.0	
10496-AAA	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	5.42	74.27	20.21	1.99	80.0	± 9.6 %
		Y	4.40	89.54	17.51		80.0	
		Z	4.46	89.67	17.66		80.0	
10497-AAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	100.00	118.34	29.52	1.99	80.0	± 9.6 %
		Y	2.54	68.43	14.11		80.0	
		Z	2.59	68.69	14.11		80.0	
10498-AAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	5.21	75.51	16.54	1.99	80.0	± 9.6 %
		Y	2.00	63.12	10.90		80.0	
		Z	1.96	62.95	10.70		80.0	
10499-AAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	4.34	72.90	15.43	1.99	80.0	± 9.6 %
		Y	1.97	62.66	10.56		80.0	
		Z	1.82	62.47	10.35		80.0	
10500-AAA	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	27.10	106.19	29.59	1.99	80.0	± 9.6 %
		Y	4.31	74.91	18.67		80.0	
		Z	4.62	76.03	19.07		80.0	
10501-AAA	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	7.03	81.39	21.87	1.99	80.0	± 9.6 %
		Y	3.82	70.30	16.79		80.0	
		Z	3.82	70.75	16.93		80.0	
10502-AAA	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	6.80	80.38	21.45	1.99	80.0	± 9.6 %
		Y	3.86	70.08	16.67		80.0	
		Z	3.95	70.49	16.79		80.0	
10503-AAA	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	15.09	96.33	27.21	1.99	80.0	± 9.6 %
		Y	4.49	74.64	18.89		80.0	
		Z	4.76	75.64	19.28		80.0	
10504-AAA	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	5.78	77.88	21.31	1.99	80.0	± 9.6 %
		Y	3.95	70.15	17.39		80.0	
		Z	4.04	70.60	17.56		80.0	
10505-AAA	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	5.61	78.74	20.90	1.99	80.0	± 9.6 %
		Y	4.03	69.88	17.32		80.0	
		Z	4.11	70.30	17.48		80.0	
10506-AAA	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	11.69	89.98	25.12	1.99	80.0	± 9.6 %
		Y	5.02	74.35	18.75		80.0	
		Z	5.24	75.11	19.06		80.0	
10507-AAA	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	5.52	75.23	20.55	1.99	80.0	± 9.6 %
		Y	4.32	69.83	17.56		80.0	
		Z	4.39	70.20	17.72		80.0	

Certificate No: EX3-3687_Jul16

Page 29 of 38

EX3DV4- SN:3687

July 28, 2016

10509-AAA	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	5.39	74.16	20.16	1.99	80.0	± 9.6 %	
			Y	4.38	69.46	17.46		80.0	
			Z	4.44	69.80	17.61		80.0	
10509-AAA	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	8.16	81.43	22.27	1.99	80.0	± 9.6 %	
			Y	5.11	72.49	18.12		80.0	
			Z	5.25	72.98	18.32		80.0	
10510-AAA	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	5.63	73.25	19.79	1.99	80.0	± 9.6 %	
			Y	4.78	69.42	17.51		80.0	
			Z	4.84	69.71	17.64		80.0	
10511-AAA	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	5.54	72.52	19.54	1.99	80.0	± 9.6 %	
			Y	4.81	69.10	17.44		80.0	
			Z	4.88	69.37	17.56		80.0	
10512-AAA	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	11.61	87.72	24.17	1.99	80.0	± 9.6 %	
			Y	5.53	74.38	18.64		80.0	
			Z	5.73	75.01	18.89		80.0	
10513-AAA	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	5.73	74.32	20.21	1.99	80.0	± 9.6 %	
			Y	4.70	69.85	17.65		80.0	
			Z	4.77	70.17	17.79		80.0	
10514-AAA	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	5.51	73.18	19.82	1.99	80.0	± 9.6 %	
			Y	4.68	69.33	17.52		80.0	
			Z	4.73	69.62	17.65		80.0	
10515-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 99pc duty cycle)	X	1.19	68.70	19.59	0.00	150.0	± 9.6 %	
			Y	1.01	63.56	15.23		150.0	
			Z	1.00	63.61	15.22		150.0	
10516-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 99pc duty cycle)	X	100.00	198.16	59.25	0.00	150.0	± 9.6 %	
			Y	0.70	72.88	19.05		150.0	
			Z	0.75	74.40	19.64		150.0	
10517-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 99pc duty cycle)	X	1.53	80.19	24.97	0.00	150.0	± 9.6 %	
			Y	0.88	65.89	16.12		150.0	
			Z	0.87	66.05	16.17		150.0	
10518-AAA	IEEE 802.11a/n WiFi 5 GHz (OFDM, 9 Mbps, 99pc duty cycle)	X	4.79	67.65	17.19	0.00	150.0	± 9.6 %	
			Y	4.67	66.78	16.36		150.0	
			Z	4.64	66.78	16.33		150.0	
10519-AAA	IEEE 802.11a/n WiFi 5 GHz (OFDM, 12 Mbps, 99pc duty cycle)	X	5.00	67.90	17.30	0.00	150.0	± 9.6 %	
			Y	4.88	67.05	16.49		150.0	
			Z	4.85	67.04	16.46		150.0	
10520-AAA	IEEE 802.11a/n WiFi 5 GHz (OFDM, 18 Mbps, 99pc duty cycle)	X	4.86	67.95	17.28	0.00	150.0	± 9.6 %	
			Y	4.73	67.04	16.42		150.0	
			Z	4.70	67.03	16.39		150.0	
10521-AAA	IEEE 802.11a/n WiFi 5 GHz (OFDM, 24 Mbps, 99pc duty cycle)	X	4.80	68.00	17.29	0.00	150.0	± 9.6 %	
			Y	4.67	67.04	16.41		150.0	
			Z	4.63	67.03	16.38		150.0	
10522-AAA	IEEE 802.11a/n WiFi 5 GHz (OFDM, 36 Mbps, 99pc duty cycle)	X	4.84	67.97	17.32	0.00	150.0	± 9.6 %	
			Y	4.71	67.04	16.45		150.0	
			Z	4.68	67.05	16.43		150.0	

Certificate No: EX3-3687_Jul16

Page 30 of 38

EX3DV4-- SN:3687

July 26, 2016

10523-AAA	IEEE 802.11a/n WiFi 5 GHz (OFDM, 48 Mbps, 99pc duty cycle)	X	4.72	67.91	17.21	0.00	150.0	± 9.6 %
		Y	4.59	66.94	16.31		150.0	
		Z	4.56	66.94	16.29		150.0	
10524-AAA	IEEE 802.11a/n WiFi 5 GHz (OFDM, 54 Mbps, 99pc duty cycle)	X	4.79	67.93	17.31	0.00	150.0	± 9.6 %
		Y	4.66	66.99	16.44		150.0	
		Z	4.63	66.99	16.41		150.0	
10525-AAA	IEEE 802.11ac WiFi (20MHz, MCS0, 99pc duty cycle)	X	4.77	66.97	16.69	0.00	150.0	± 9.6 %
		Y	4.63	66.03	16.03		150.0	
		Z	4.60	66.03	16.00		150.0	
10526-AAA	IEEE 802.11ac WiFi (20MHz, MCS1, 99pc duty cycle)	X	4.97	67.39	17.04	0.00	150.0	± 9.6 %
		Y	4.82	66.43	16.17		150.0	
		Z	4.78	66.43	16.15		150.0	
10527-AAA	IEEE 802.11ac WiFi (20MHz, MCS2, 99pc duty cycle)	X	4.89	67.40	17.02	0.00	150.0	± 9.6 %
		Y	4.74	66.41	16.13		150.0	
		Z	4.71	66.40	16.10		150.0	
10528-AAA	IEEE 802.11ac WiFi (20MHz, MCS3, 99pc duty cycle)	X	4.91	67.41	17.04	0.00	150.0	± 9.6 %
		Y	4.76	66.42	16.16		150.0	
		Z	4.72	66.42	16.13		150.0	
10529-AAA	IEEE 802.11ac WiFi (20MHz, MCS4, 99pc duty cycle)	X	4.91	67.41	17.04	0.00	150.0	± 9.6 %
		Y	4.76	66.42	16.16		150.0	
		Z	4.72	66.42	16.13		150.0	
10531-AAA	IEEE 802.11ac WiFi (20MHz, MCS6, 99pc duty cycle)	X	4.93	67.60	17.09	0.00	150.0	± 9.6 %
		Y	4.77	66.57	16.19		150.0	
		Z	4.73	66.55	16.16		150.0	
10532-AAA	IEEE 802.11ac WiFi (20MHz, MCS7, 99pc duty cycle)	X	4.78	67.50	17.07	0.00	150.0	± 9.6 %
		Y	4.62	66.43	16.13		150.0	
		Z	4.58	66.41	16.10		150.0	
10533-AAA	IEEE 802.11ac WiFi (20MHz, MCS8, 99pc duty cycle)	X	4.93	67.45	17.03	0.00	150.0	± 9.6 %
		Y	4.77	66.45	16.14		150.0	
		Z	4.74	66.45	16.12		150.0	
10534-AAA	IEEE 802.11ac WiFi (40MHz, MCS0, 99pc duty cycle)	X	5.41	67.35	16.95	0.00	150.0	± 9.6 %
		Y	5.28	66.55	16.20		150.0	
		Z	5.24	66.53	16.17		150.0	
10535-AAA	IEEE 802.11ac WiFi (40MHz, MCS1, 99pc duty cycle)	X	5.48	67.50	17.01	0.00	150.0	± 9.6 %
		Y	5.34	66.69	16.26		150.0	
		Z	5.31	66.69	16.23		150.0	
10536-AAA	IEEE 802.11ac WiFi (40MHz, MCS2, 99pc duty cycle)	X	5.36	67.54	17.02	0.00	150.0	± 9.6 %
		Y	5.21	66.68	16.24		150.0	
		Z	5.18	66.66	16.21		150.0	
10537-AAA	IEEE 802.11ac WiFi (40MHz, MCS3, 99pc duty cycle)	X	5.41	67.48	16.99	0.00	150.0	± 9.6 %
		Y	5.28	66.65	16.22		150.0	
		Z	5.24	66.63	16.19		150.0	
10538-AAA	IEEE 802.11ac WiFi (40MHz, MCS4, 99pc duty cycle)	X	5.52	67.50	17.03	0.00	150.0	± 9.6 %
		Y	5.38	66.71	16.29		150.0	
		Z	5.34	66.68	16.26		150.0	
10540-AAA	IEEE 802.11ac WiFi (40MHz, MCS6, 99pc duty cycle)	X	5.43	67.49	17.05	0.00	150.0	± 9.6 %
		Y	5.29	66.67	16.28		150.0	
		Z	5.25	66.65	16.25		150.0	

EX30V4- SN:3687

July 26, 2016

10541-AAA	IEEE 802.11ac WiFi (40MHz, MCS7, 99pc duty cycle)	X	5.40	67.36	16.98	0.00	150.0	± 9.6 %
		Y	5.27	66.57	16.23		150.0	
		Z	5.23	66.54	16.20		150.0	
10542-AAA	IEEE 802.11ac WiFi (40MHz, MCS8, 99pc duty cycle)	X	5.55	67.37	16.99	0.00	150.0	± 9.6 %
		Y	5.42	66.62	16.27		150.0	
		Z	5.39	66.60	16.24		150.0	
10543-AAA	IEEE 802.11ac WiFi (40MHz, MCS9, 99pc duty cycle)	X	5.62	67.36	16.99	0.00	150.0	± 9.6 %
		Y	5.50	66.63	16.29		150.0	
		Z	5.47	66.61	16.26		150.0	
10544-AAA	IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle)	X	5.68	67.38	16.88	0.00	150.0	± 9.6 %
		Y	5.56	66.66	16.18		150.0	
		Z	5.53	66.64	16.15		150.0	
10545-AAA	IEEE 802.11ac WiFi (80MHz, MCS1, 99pc duty cycle)	X	5.91	67.83	17.03	0.00	150.0	± 9.6 %
		Y	5.77	67.06	16.32		150.0	
		Z	5.73	67.04	16.30		150.0	
10546-AAA	IEEE 802.11ac WiFi (80MHz, MCS2, 99pc duty cycle)	X	5.79	67.89	16.99	0.00	150.0	± 9.6 %
		Y	5.65	66.93	16.26		150.0	
		Z	5.62	66.90	16.25		150.0	
10547-AAA	IEEE 802.11ac WiFi (80MHz, MCS3, 99pc duty cycle)	X	5.88	67.75	17.01	0.00	150.0	± 9.6 %
		Y	5.74	67.01	16.31		150.0	
		Z	5.70	66.98	16.27		150.0	
10548-AAA	IEEE 802.11ac WiFi (80MHz, MCS4, 99pc duty cycle)	X	6.23	68.98	17.58	0.00	150.0	± 9.6 %
		Y	6.03	68.00	16.77		150.0	
		Z	5.97	67.94	16.73		150.0	
10550-AAA	IEEE 802.11ac WiFi (80MHz, MCS6, 99pc duty cycle)	X	5.80	67.63	16.97	0.00	150.0	± 9.6 %
		Y	5.67	66.89	16.27		150.0	
		Z	5.64	66.87	16.24		150.0	
10551-AAA	IEEE 802.11ac WiFi (80MHz, MCS7, 99pc duty cycle)	X	5.82	67.72	16.97	0.00	150.0	± 9.6 %
		Y	5.68	66.97	16.27		150.0	
		Z	5.65	66.93	16.23		150.0	
10552-AAA	IEEE 802.11ac WiFi (80MHz, MCS8, 99pc duty cycle)	X	5.71	67.47	16.87	0.00	150.0	± 9.6 %
		Y	5.59	66.74	16.17		150.0	
		Z	5.55	66.72	16.14		150.0	
10553-AAA	IEEE 802.11ac WiFi (80MHz, MCS9, 99pc duty cycle)	X	5.80	67.50	16.90	0.00	150.0	± 9.6 %
		Y	5.68	66.79	16.22		150.0	
		Z	5.65	66.77	16.19		150.0	
10554-AAA	IEEE 1602.11ac WiFi (160MHz, MCS0, 99pc duty cycle)	X	6.09	67.71	16.93	0.00	150.0	± 9.6 %
		Y	5.96	67.03	16.27		150.0	
		Z	5.93	67.01	16.24		150.0	
10555-AAA	IEEE 1602.11ac WiFi (160MHz, MCS1, 99pc duty cycle)	X	6.24	68.06	17.07	0.00	150.0	± 9.6 %
		Y	6.11	67.35	16.40		150.0	
		Z	6.07	67.32	16.37		150.0	
10556-AAA	IEEE 1602.11ac WiFi (160MHz, MCS2, 99pc duty cycle)	X	6.26	68.09	17.08	0.00	150.0	± 9.6 %
		Y	6.12	67.37	16.41		150.0	
		Z	6.09	67.35	16.38		150.0	
10557-AAA	IEEE 1602.11ac WiFi (160MHz, MCS3, 99pc duty cycle)	X	6.24	68.02	17.07	0.00	150.0	± 9.6 %
		Y	6.10	67.32	16.41		150.0	
		Z	6.07	67.29	16.37		150.0	

Certificate No: EX3-3687_Jul16

Page 32 of 38

EX3DV4- SN.3687

July 26, 2016

10558-AAA	IEEE 1602.11ac WiFi (160MHz, MCS4, 99pc duty cycle)	X	6.30	68.23	17.18	0.00	150.0	± 9.6 %
		Y	6.16	67.50	16.51		150.0	
		Z	6.12	67.47	16.48		150.0	
10560-AAA	IEEE 1602.11ac WiFi (160MHz, MCS6, 99pc duty cycle)	X	6.28	68.02	17.11	0.00	150.0	± 9.6 %
		Y	6.15	67.34	16.47		150.0	
		Z	6.12	67.32	16.44		150.0	
10561-AAA	IEEE 1602.11ac WiFi (160MHz, MCS7, 99pc duty cycle)	X	6.20	67.99	17.14	0.00	150.0	± 9.6 %
		Y	6.07	67.29	16.48		150.0	
		Z	6.03	67.27	16.45		150.0	
10562-AAA	IEEE 1602.11ac WiFi (160MHz, MCS8, 99pc duty cycle)	X	6.37	68.52	17.41	0.00	150.0	± 9.6 %
		Y	6.22	67.75	16.71		150.0	
		Z	6.17	67.71	16.67		150.0	
10563-AAA	IEEE 1602.11ac WiFi (160MHz, MCS9, 99pc duty cycle)	X	6.74	69.13	17.64	0.00	150.0	± 9.6 %
		Y	6.55	68.30	16.92		150.0	
		Z	6.51	68.27	16.90		150.0	
10564-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 99pc duty cycle)	X	5.10	67.60	17.25	0.46	150.0	± 9.6 %
		Y	5.00	66.83	16.49		150.0	
		Z	4.97	66.85	16.48		150.0	
10565-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 99pc duty cycle)	X	5.38	68.08	17.56	0.46	150.0	± 9.6 %
		Y	5.25	67.33	16.83		150.0	
		Z	5.22	67.33	16.81		150.0	
10566-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 18 Mbps, 99pc duty cycle)	X	5.19	67.99	17.42	0.46	150.0	± 9.6 %
		Y	5.08	67.18	16.64		150.0	
		Z	5.05	67.19	16.63		150.0	
10567-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 24 Mbps, 99pc duty cycle)	X	5.23	68.44	17.80	0.46	150.0	± 9.6 %
		Y	5.12	67.62	17.02		150.0	
		Z	5.08	67.58	16.97		150.0	
10568-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 36 Mbps, 99pc duty cycle)	X	5.10	67.71	17.17	0.46	150.0	± 9.6 %
		Y	4.98	66.88	16.36		150.0	
		Z	4.96	66.93	16.38		150.0	
10569-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 48 Mbps, 99pc duty cycle)	X	5.18	68.49	17.84	0.46	150.0	± 9.6 %
		Y	5.06	67.66	17.06		150.0	
		Z	5.02	67.62	17.00		150.0	
10570-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps, 99pc duty cycle)	X	5.21	68.28	17.75	0.46	150.0	± 9.6 %
		Y	5.10	67.48	16.98		150.0	
		Z	5.08	67.46	16.94		150.0	
10571-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 90pc duty cycle)	X	1.53	70.87	20.46	0.46	130.0	± 9.6 %
		Y	1.27	65.23	16.09		130.0	
		Z	1.27	65.46	16.19		130.0	
10572-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 90pc duty cycle)	X	1.61	72.30	21.21	0.46	130.0	± 9.6 %
		Y	1.29	65.89	16.48		130.0	
		Z	1.30	66.10	16.57		130.0	
10573-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 90pc duty cycle)	X	100.00	173.39	50.36	0.46	130.0	± 9.6 %
		Y	3.33	91.84	25.28		130.0	
		Z	4.95	98.23	27.15		130.0	
10574-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 90pc duty cycle)	X	4.46	98.73	31.86	0.46	130.0	± 9.6 %
		Y	1.53	72.83	19.87		130.0	
		Z	1.54	73.04	19.91		130.0	

Certificate No: EX3-3687_Jul16

Page 33 of 38

EX3DV4-SN:3687

July 26, 2016

10575-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 90pc duty cycle)	X	4.88	67.39	17.30	0.46	130.0	± 9.6 %
		Y	4.78	66.59	16.50		130.0	
		Z	4.75	66.63	16.51		130.0	
10576-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 90pc duty cycle)	X	4.91	67.57	17.38	0.46	130.0	± 9.6 %
		Y	4.81	66.77	16.57		130.0	
		Z	4.78	66.79	16.57		130.0	
10577-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 90pc duty cycle)	X	5.14	67.89	17.54	0.46	130.0	± 9.6 %
		Y	5.04	67.10	16.76		130.0	
		Z	5.00	67.11	16.75		130.0	
10578-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 18 Mbps, 90pc duty cycle)	X	5.05	68.12	17.68	0.46	130.0	± 9.6 %
		Y	4.93	67.29	16.87		130.0	
		Z	4.90	67.28	16.85		130.0	
10579-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 24 Mbps, 90pc duty cycle)	X	4.81	67.44	17.03	0.46	130.0	± 9.6 %
		Y	4.69	66.55	16.16		130.0	
		Z	4.67	66.61	16.19		130.0	
10580-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 36 Mbps, 90pc duty cycle)	X	4.85	67.42	17.02	0.46	130.0	± 9.6 %
		Y	4.74	66.53	16.16		130.0	
		Z	4.71	66.61	16.20		130.0	
10581-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 48 Mbps, 90pc duty cycle)	X	4.95	68.24	17.67	0.46	130.0	± 9.6 %
		Y	4.83	67.33	16.81		130.0	
		Z	4.80	67.32	16.78		130.0	
10582-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps, 90pc duty cycle)	X	4.75	67.17	16.81	0.46	130.0	± 9.6 %
		Y	4.64	66.28	15.94		130.0	
		Z	4.62	66.38	15.99		130.0	
10583-AAA	IEEE 802.11a/n WiFi 5 GHz (OFDM, 6 Mbps, 90pc duty cycle)	X	4.88	67.39	17.30	0.46	130.0	± 9.6 %
		Y	4.78	66.59	16.50		130.0	
		Z	4.75	66.63	16.51		130.0	
10584-AAA	IEEE 802.11a/n WiFi 5 GHz (OFDM, 9 Mbps, 90pc duty cycle)	X	4.91	67.57	17.38	0.46	130.0	± 9.6 %
		Y	4.81	66.77	16.57		130.0	
		Z	4.78	66.79	16.57		130.0	
10585-AAA	IEEE 802.11a/n WiFi 5 GHz (OFDM, 12 Mbps, 90pc duty cycle)	X	5.14	67.89	17.54	0.46	130.0	± 9.6 %
		Y	5.04	67.10	16.76		130.0	
		Z	5.00	67.11	16.75		130.0	
10586-AAA	IEEE 802.11a/n WiFi 5 GHz (OFDM, 18 Mbps, 90pc duty cycle)	X	5.05	68.12	17.68	0.46	130.0	± 9.6 %
		Y	4.93	67.29	16.87		130.0	
		Z	4.90	67.28	16.85		130.0	
10587-AAA	IEEE 802.11a/n WiFi 5 GHz (OFDM, 24 Mbps, 90pc duty cycle)	X	4.81	67.44	17.03	0.46	130.0	± 9.6 %
		Y	4.69	66.55	16.16		130.0	
		Z	4.67	66.61	16.19		130.0	
10588-AAA	IEEE 802.11a/n WiFi 5 GHz (OFDM, 36 Mbps, 90pc duty cycle)	X	4.85	67.42	17.02	0.46	130.0	± 9.6 %
		Y	4.74	66.53	16.16		130.0	
		Z	4.71	66.61	16.20		130.0	
10589-AAA	IEEE 802.11a/n WiFi 5 GHz (OFDM, 48 Mbps, 90pc duty cycle)	X	4.95	68.24	17.67	0.46	130.0	± 9.6 %
		Y	4.83	67.33	16.81		130.0	
		Z	4.80	67.32	16.78		130.0	
10590-AAA	IEEE 802.11a/n WiFi 5 GHz (OFDM, 54 Mbps, 90pc duty cycle)	X	4.75	67.17	16.81	0.46	130.0	± 9.6 %
		Y	4.64	66.28	15.94		130.0	
		Z	4.62	66.38	15.99		130.0	

EX3DV4— SN:3687

July 26, 2016

10591-AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS0, 90pc duty cycle)	X	5.02	67.39	17.36	0.46	130.0	± 9.6 %
		Y	4.93	66.67	16.60		130.0	
		Z	4.90	66.69	16.60		130.0	
10592-AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS1, 90pc duty cycle)	X	5.20	67.76	17.49	0.46	130.0	± 9.6 %
		Y	5.10	67.01	16.73		130.0	
		Z	5.07	67.03	16.73		130.0	
10593-AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS2, 90pc duty cycle)	X	5.13	67.72	17.40	0.46	130.0	± 9.6 %
		Y	5.03	66.94	16.62		130.0	
		Z	5.00	66.97	16.62		130.0	
10594-AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS3, 90pc duty cycle)	X	5.18	67.87	17.54	0.46	130.0	± 9.6 %
		Y	5.08	67.11	16.78		130.0	
		Z	5.05	67.12	16.77		130.0	
10595-AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS4, 90pc duty cycle)	X	5.16	67.85	17.45	0.46	130.0	± 9.6 %
		Y	5.05	67.06	16.67		130.0	
		Z	5.02	67.08	16.67		130.0	
10596-AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS5, 90pc duty cycle)	X	5.10	67.67	17.47	0.46	130.0	± 9.6 %
		Y	4.99	67.05	16.67		130.0	
		Z	4.96	67.08	16.67		130.0	
10597-AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS6, 90pc duty cycle)	X	5.05	67.81	17.38	0.46	130.0	± 9.6 %
		Y	4.94	66.98	16.57		130.0	
		Z	4.91	67.01	16.57		130.0	
10598-AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS7, 90pc duty cycle)	X	5.04	68.10	17.67	0.46	130.0	± 9.6 %
		Y	4.92	67.26	16.86		130.0	
		Z	4.89	67.25	16.83		130.0	
10599-AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS0, 90pc duty cycle)	X	5.69	67.91	17.47	0.46	130.0	± 9.6 %
		Y	5.60	67.26	16.80		130.0	
		Z	5.57	67.26	16.79		130.0	
10600-AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS1, 90pc duty cycle)	X	5.89	68.51	17.74	0.46	130.0	± 9.6 %
		Y	5.77	67.76	17.02		130.0	
		Z	5.73	67.75	17.01		130.0	
10601-AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS2, 90pc duty cycle)	X	5.74	68.15	17.58	0.46	130.0	± 9.6 %
		Y	5.64	67.46	16.88		130.0	
		Z	5.61	67.45	16.87		130.0	
10602-AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS3, 90pc duty cycle)	X	5.83	68.12	17.48	0.46	130.0	± 9.6 %
		Y	5.73	67.43	16.78		130.0	
		Z	5.69	67.44	16.78		130.0	
10603-AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS4, 90pc duty cycle)	X	5.92	68.43	17.76	0.46	130.0	± 9.6 %
		Y	5.82	67.77	17.09		130.0	
		Z	5.78	67.76	17.07		130.0	
10604-AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS5, 90pc duty cycle)	X	5.69	67.85	17.47	0.46	130.0	± 9.6 %
		Y	5.60	67.21	16.80		130.0	
		Z	5.57	67.21	16.79		130.0	
10605-AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS6, 90pc duty cycle)	X	5.81	68.18	17.63	0.46	130.0	± 9.6 %
		Y	5.71	67.49	16.93		130.0	
		Z	5.68	67.51	16.94		130.0	
10606-AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS7, 90pc duty cycle)	X	5.57	67.62	17.23	0.46	130.0	± 9.6 %
		Y	5.48	66.96	16.53		130.0	
		Z	5.46	67.00	16.55		130.0	

Certificate No: EX3-3687_Jul16

Page 35 of 38

EX3DV4- SN:3687

July 26, 2016

10607-AAA	IEEE 802.11ac WiFi (20MHz, MCS0, 90pc duty cycle)	X	4.88	66.82	17.05	0.46	130.0	± 9.6 %
		Y	4.76	65.97	16.22		130.0	
		Z	4.74	65.99	16.22		130.0	
10608-AAA	IEEE 802.11ac WiFi (20MHz, MCS1, 90pc duty cycle)	X	5.10	67.27	17.21	0.46	130.0	± 9.6 %
		Y	4.97	66.40	16.39		130.0	
		Z	4.94	66.42	16.38		130.0	
10609-AAA	IEEE 802.11ac WiFi (20MHz, MCS2, 90pc duty cycle)	X	4.99	67.17	17.09	0.46	130.0	± 9.6 %
		Y	4.86	66.25	16.23		130.0	
		Z	4.83	66.28	16.23		130.0	
10610-AAA	IEEE 802.11ac WiFi (20MHz, MCS3, 90pc duty cycle)	X	5.05	67.33	17.25	0.46	130.0	± 9.6 %
		Y	4.91	66.42	16.40		130.0	
		Z	4.88	66.44	16.39		130.0	
10611-AAA	IEEE 802.11ac WiFi (20MHz, MCS4, 90pc duty cycle)	X	4.96	67.15	17.11	0.46	130.0	± 9.6 %
		Y	4.83	66.24	16.25		130.0	
		Z	4.80	66.26	16.25		130.0	
10612-AAA	IEEE 802.11ac WiFi (20MHz, MCS5, 90pc duty cycle)	X	4.99	67.34	17.17	0.46	130.0	± 9.6 %
		Y	4.84	66.38	16.28		130.0	
		Z	4.82	66.41	16.29		130.0	
10613-AAA	IEEE 802.11ac WiFi (20MHz, MCS6, 90pc duty cycle)	X	5.00	67.24	17.06	0.46	130.0	± 9.6 %
		Y	4.85	66.29	16.18		130.0	
		Z	4.83	66.32	16.19		130.0	
10614-AAA	IEEE 802.11ac WiFi (20MHz, MCS7, 90pc duty cycle)	X	4.93	67.47	17.32	0.46	130.0	± 9.6 %
		Y	4.79	66.50	16.43		130.0	
		Z	4.76	66.50	16.41		130.0	
10615-AAA	IEEE 802.11ac WiFi (20MHz, MCS8, 90pc duty cycle)	X	4.96	66.95	16.87	0.46	130.0	± 9.6 %
		Y	4.83	66.02	16.00		130.0	
		Z	4.80	66.08	16.03		130.0	
10616-AAA	IEEE 802.11ac WiFi (40MHz, MCS0, 90pc duty cycle)	X	5.53	67.26	17.14	0.46	130.0	± 9.6 %
		Y	5.42	66.52	16.42		130.0	
		Z	5.39	66.52	16.41		130.0	
10617-AAA	IEEE 802.11ac WiFi (40MHz, MCS1, 90pc duty cycle)	X	5.59	67.37	17.16	0.46	130.0	± 9.6 %
		Y	5.47	66.62	16.43		130.0	
		Z	5.44	66.63	16.43		130.0	
10618-AAA	IEEE 802.11ac WiFi (40MHz, MCS2, 90pc duty cycle)	X	5.50	67.49	17.25	0.46	130.0	± 9.6 %
		Y	5.37	66.70	16.49		130.0	
		Z	5.34	66.70	16.48		130.0	
10619-AAA	IEEE 802.11ac WiFi (40MHz, MCS3, 90pc duty cycle)	X	5.52	67.29	17.08	0.46	130.0	± 9.6 %
		Y	5.39	66.52	16.33		130.0	
		Z	5.36	66.53	16.33		130.0	
10620-AAA	IEEE 802.11ac WiFi (40MHz, MCS4, 90pc duty cycle)	X	5.62	67.35	17.16	0.46	130.0	± 9.6 %
		Y	5.50	66.61	16.43		130.0	
		Z	5.47	66.61	16.42		130.0	
10621-AAA	IEEE 802.11ac WiFi (40MHz, MCS5, 90pc duty cycle)	X	5.60	67.41	17.30	0.46	130.0	± 9.6 %
		Y	5.48	66.70	16.60		130.0	
		Z	5.45	66.66	16.57		130.0	
10622-AAA	IEEE 802.11ac WiFi (40MHz, MCS6, 90pc duty cycle)	X	5.61	67.57	17.38	0.46	130.0	± 9.6 %
		Y	5.49	66.82	16.64		130.0	
		Z	5.45	66.80	16.62		130.0	

EX3DV4- SN:3687

July 26, 2016

10623-AAA	IEEE 802.11ac WiFi (40MHz, MCS7, 90pc duty cycle)	X	5.48	67.10	17.03	0.46	130.0	± 9.6 %
		Y	5.37	66.36	16.30		130.0	
		Z	5.34	66.37	16.29		130.0	
10624-AAA	IEEE 802.11ac WiFi (40MHz, MCS8, 90pc duty cycle)	X	5.67	67.27	17.16	0.46	130.0	± 9.6 %
		Y	5.56	66.56	16.46		130.0	
		Z	5.53	66.56	16.45		130.0	
10625-AAA	IEEE 802.11ac WiFi (40MHz, MCS9, 90pc duty cycle)	X	6.12	68.46	17.79	0.46	130.0	± 9.6 %
		Y	5.97	67.61	17.02		130.0	
		Z	5.93	67.80	17.01		130.0	
10626-AAA	IEEE 802.11ac WiFi (80MHz, MCS0, 90pc duty cycle)	X	5.79	67.23	17.03	0.46	130.0	± 9.6 %
		Y	5.68	66.56	16.36		130.0	
		Z	5.66	66.57	16.35		130.0	
10627-AAA	IEEE 802.11ac WiFi (80MHz, MCS1, 90pc duty cycle)	X	6.07	67.84	17.28	0.46	130.0	± 9.6 %
		Y	5.93	67.11	16.58		130.0	
		Z	5.90	67.10	16.57		130.0	
10628-AAA	IEEE 802.11ac WiFi (80MHz, MCS2, 90pc duty cycle)	X	5.86	67.42	17.02	0.46	130.0	± 9.6 %
		Y	5.74	66.71	16.32		130.0	
		Z	5.71	66.72	16.32		130.0	
10629-AAA	IEEE 802.11ac WiFi (80MHz, MCS3, 90pc duty cycle)	X	5.94	67.46	17.02	0.46	130.0	± 9.6 %
		Y	5.82	66.76	16.34		130.0	
		Z	5.80	66.78	16.34		130.0	
10630-AAA	IEEE 802.11ac WiFi (80MHz, MCS4, 90pc duty cycle)	X	6.58	69.52	18.04	0.46	130.0	± 9.6 %
		Y	6.35	68.49	17.19		130.0	
		Z	6.30	68.44	17.17		130.0	
10631-AAA	IEEE 802.11ac WiFi (80MHz, MCS5, 90pc duty cycle)	X	6.40	69.11	18.03	0.46	130.0	± 9.6 %
		Y	6.24	68.29	17.29		130.0	
		Z	6.18	68.20	17.24		130.0	
10632-AAA	IEEE 802.11ac WiFi (80MHz, MCS6, 90pc duty cycle)	X	6.03	67.89	17.44	0.46	130.0	± 9.6 %
		Y	5.91	67.21	16.78		130.0	
		Z	5.87	67.17	16.74		130.0	
10633-AAA	IEEE 802.11ac WiFi (80MHz, MCS7, 90pc duty cycle)	X	5.95	67.63	17.15	0.46	130.0	± 9.6 %
		Y	5.83	66.93	16.46		130.0	
		Z	5.79	66.91	16.44		130.0	
10634-AAA	IEEE 802.11ac WiFi (80MHz, MCS8, 90pc duty cycle)	X	5.92	67.62	17.20	0.46	130.0	± 9.6 %
		Y	5.81	66.94	16.53		130.0	
		Z	5.77	66.92	16.50		130.0	
10635-AAA	IEEE 802.11ac WiFi (80MHz, MCS9, 90pc duty cycle)	X	5.80	66.93	16.60	0.46	130.0	± 9.6 %
		Y	5.68	66.23	15.90		130.0	
		Z	5.66	66.28	15.93		130.0	
10636-AAA	IEEE 1602.11ac WiFi (160MHz, MCS0, 90pc duty cycle)	X	6.21	67.59	17.09	0.46	130.0	± 9.6 %
		Y	6.09	66.95	16.45		130.0	
		Z	6.07	66.95	16.44		130.0	
10637-AAA	IEEE 1602.11ac WiFi (160MHz, MCS1, 90pc duty cycle)	X	6.38	68.00	17.27	0.46	130.0	± 9.6 %
		Y	6.26	67.33	16.62		130.0	
		Z	6.23	67.32	16.61		130.0	
10638-AAA	IEEE 1602.11ac WiFi (160MHz, MCS2, 90pc duty cycle)	X	6.38	67.98	17.24	0.46	130.0	± 9.6 %
		Y	6.26	67.30	16.58		130.0	
		Z	6.23	67.30	16.57		130.0	

Certificate No: EX3-3687_Jul16

Page 37 of 38

EX3DV4- SN:3687

July 26, 2016

10639-AAA	IEEE 1602.11ac WiFi (160MHz, MCS3, 90pc duty cycle)	X	6.38	67.97	17.26	0.46	130.0	± 9.6 %
		Y	6.25	67.31	16.63		130.0	
		Z	6.22	67.30	16.62		130.0	
10640-AAA	IEEE 1602.11ac WiFi (160MHz, MCS4, 90pc duty cycle)	X	6.41	68.05	17.26	0.46	130.0	± 9.6 %
		Y	6.27	67.35	16.59		130.0	
		Z	6.24	67.35	16.59		130.0	
10641-AAA	IEEE 1602.11ac WiFi (160MHz, MCS5, 90pc duty cycle)	X	6.39	67.77	17.13	0.46	130.0	± 9.6 %
		Y	6.27	67.12	16.50		130.0	
		Z	6.25	67.14	16.50		130.0	
10642-AAA	IEEE 1602.11ac WiFi (160MHz, MCS6, 90pc duty cycle)	X	6.46	68.10	17.47	0.46	130.0	± 9.6 %
		Y	6.35	67.48	16.85		130.0	
		Z	6.31	67.45	16.82		130.0	
10643-AAA	IEEE 1602.11ac WiFi (160MHz, MCS7, 90pc duty cycle)	X	6.29	67.79	17.22	0.46	130.0	± 9.6 %
		Y	6.17	67.12	16.56		130.0	
		Z	6.14	67.13	16.56		130.0	
10644-AAA	IEEE 1602.11ac WiFi (160MHz, MCS8, 90pc duty cycle)	X	6.53	68.52	17.61	0.46	130.0	± 9.6 %
		Y	6.39	67.77	16.91		130.0	
		Z	6.35	67.76	16.90		130.0	
10645-AAA	IEEE 1602.11ac WiFi (160MHz, MCS9, 90pc duty cycle)	X	6.97	69.32	17.94	0.46	130.0	± 9.6 %
		Y	6.78	68.47	17.20		130.0	
		Z	6.76	68.52	17.22		130.0	

^F Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

**Calibration Laboratory of
 Schmid & Partner
 Engineering AG**
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **AT4 Wireless**

Certificate No: **D2450V2-756_Jul15**

CALIBRATION CERTIFICATE

Object **D2450V2 - SN:756**

Calibration procedure(s) **QA CAL-05.v9
 Calibration procedure for dipole validation kits above 700 MHz**

Calibration date: **July 08, 2015**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	07-Oct-14 (No. 217-02020)	Oct-15
Power sensor HP 8481A	US37292783	07-Oct-14 (No. 217-02020)	Oct-15
Power sensor HP 8481A	MY41092317	07-Oct-14 (No. 217-02021)	Oct-15
Reference 20 dB Attenuator	SN: 5058 (20k)	01-Apr-15 (No. 217-02131)	Mar-16
Type-N mismatch combination	SN: 5047.2 / 06327	01-Apr-15 (No. 217-02134)	Mar-16
Reference Probe ES3DV3	SN: 3205	30-Dec-14 (No. ES3-3205_Dec14)	Dec-15
DAE4	SN: 601	18-Aug-14 (No. DAE4-601_Aug14)	Aug-15

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-13)	In house check: Oct-16
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-14)	In house check: Oct-15

	Name	Function	Signature
Calibrated by:	Jeton Kastrati	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: July 9, 2015

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2450 MHz ± 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.2	1.80 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	37.9 ± 6 %	1.88 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	13.8 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	53.7 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	6.46 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	25.4 W/kg ± 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	52.7	1.95 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	52.4 ± 6 %	2.03 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	13.3 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	52.1 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	6.17 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	24.4 W/kg ± 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	55.9 Ω + 2.7 j Ω
Return Loss	- 24.3 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	52.4 Ω + 4.3 j Ω
Return Loss	- 26.4 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.157 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	April 22, 2004

DASY5 Validation Report for Head TSL

Date: 08.07.2015

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:756

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.88$ S/m; $\epsilon_r = 37.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.54, 4.54, 4.54); Calibrated: 30.12.2014;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 18.08.2014
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 101.3 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 28.2 W/kg

SAR(1 g) = 13.8 W/kg; SAR(10 g) = 6.46 W/kg

Maximum value of SAR (measured) = 18.0 W/kg

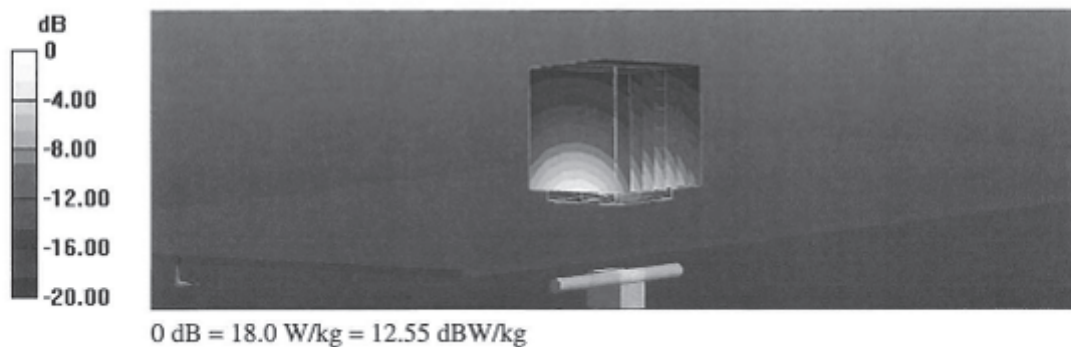

Impedance Measurement Plot for Head TSL

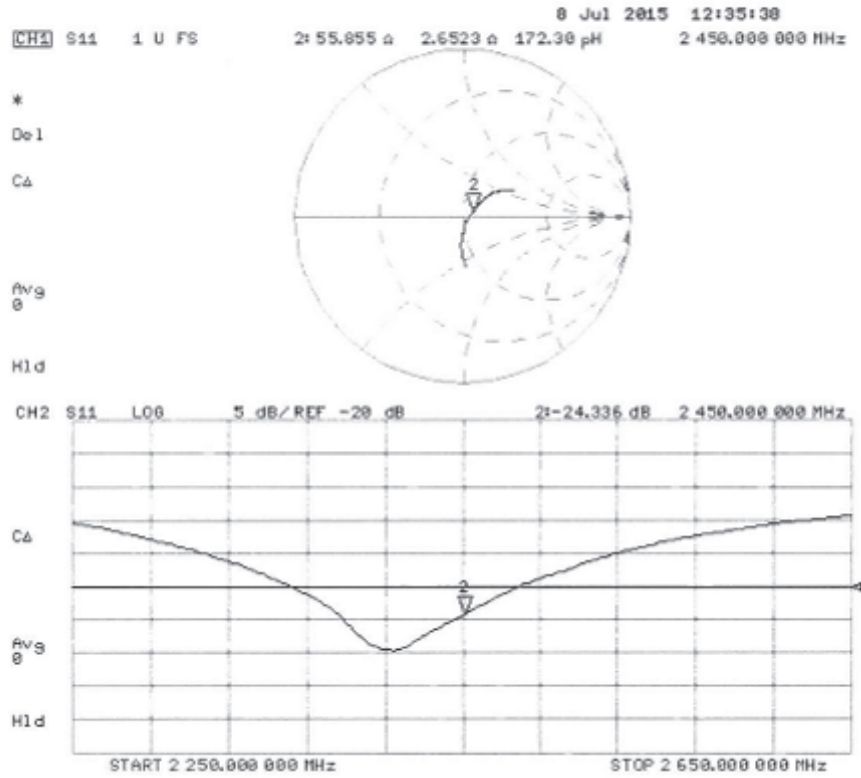

DASY5 Validation Report for Body TSL

Date: 08.07.2015

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:756


Communication System: UID 0 - CW; Frequency: 2450 MHz
Medium parameters used: $f = 2450$ MHz; $\sigma = 2.03$ S/m; $\epsilon_r = 52.4$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.32, 4.32, 4.32); Calibrated: 30.12.2014;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 18.08.2014
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 95.96 V/m; Power Drift = -0.00 dB
Peak SAR (extrapolated) = 27.4 W/kg
SAR(1 g) = 13.3 W/kg; SAR(10 g) = 6.17 W/kg
Maximum value of SAR (measured) = 17.6 W/kg

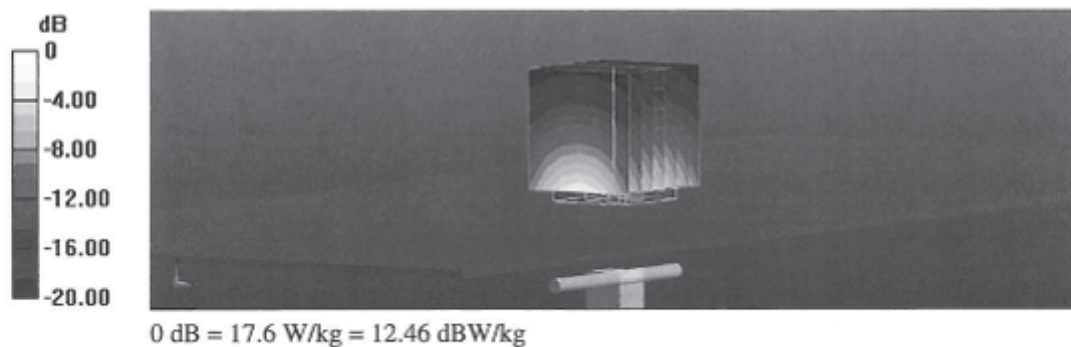

Impedance Measurement Plot for Body TSL

