

*FCC PART 15, SUBPART B and C
TEST REPORT*
for
READER
MODEL: AVID1033

Prepared for

 AVID ID SYSTEMS, INC.
 3185 HAMNER AVENUE
 NORCO, CALIFORNIA 92860

 Prepared by: 

KYLE FUJIMOTO

 Approved by: 

JAMES ROSS

 COMPATIBLE ELECTRONICS INC.
 114 OLINDA DRIVE
 BREA, CALIFORNIA 92823
 (714) 579-0500

DATE: MARCH 6, 2007

	REPORT BODY	APPENDICES					TOTAL
		A	B	C	D	E	
PAGES	18	2	2	2	17	14	55

This report shall not be reproduced except in full, without the written approval of Compatible Electronics.



TABLE OF CONTENTS

Section / Title	PAGE
GENERAL REPORT SUMMARY	4
SUMMARY OF TEST RESULTS	5
1. PURPOSE	6
2. ADMINISTRATIVE DATA	7
2.1 Location of Testing	7
2.2 Traceability Statement	7
2.3 Cognizant Personnel	7
2.4 Date Test Sample was Received	7
2.5 Disposition of the Test Sample	7
2.6 Abbreviations and Acronyms	7
3. APPLICABLE DOCUMENTS	8
4. DESCRIPTION OF TEST CONFIGURATION	9
4.1 Description of Test Configuration - EMI	9
4.1.1 Cable Construction and Termination	10
5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT	11
5.1 EUT and Accessory List	11
5.2 EMI Test Equipment	12
6. TEST SITE DESCRIPTION	13
6.1 Test Facility Description	13
6.2 EUT Mounting, Bonding and Grounding	13
7. TEST PROCEDURES	14
7.1 RF Emissions	14
7.1.1 Conducted Emissions Test	14
7.1.2 Radiated Emissions (Spurious and Harmonics) Test	15
7.1.3 Radiated Emissions (Spurious and Harmonics) Test (Continued)	16
7.2 Frequency Tolerance of Carrier Signal	17
8. CONCLUSIONS	18



LIST OF APPENDICES

APPENDIX	TITLE
A	Laboratory Recognitions
B	Modifications to the EUT
C	Additional Models Covered Under This Report
D	Diagrams, Charts, and Photos <ul style="list-style-type: none">• Test Setup Diagrams• Radiated and Conducted Emissions Photos• Antenna and Effective Gain Factors
E	Data Sheets

LIST OF FIGURES

FIGURE	TITLE
1	Conducted Emissions Test Setup
2	Plot Map And Layout of Radiated Test Site



GENERAL REPORT SUMMARY

This electromagnetic emission test report is generated by Compatible Electronics Inc., which is an independent testing and consulting firm. The test report is based on testing performed by Compatible Electronics personnel according to the measurement procedures described in the test specifications given below and in the "Test Procedures" section of this report.

The measurement data and conclusions appearing herein relate only to the sample tested and this report may not be reproduced without the written permission of Compatible Electronics, unless done so in full.

This report must not be used to claim product endorsement by NVLAP, NIST or any other agency of the U.S. Government.

Device Tested: Reader
Model: AVID1033
S/N: N/A

Product Description: See Expository Statement.

Modifications: The EUT was not modified in order to meet the specifications.

Manufacturer: AVID ID Systems, Inc.
3185 Hamner Avenue
Norco, California 92860

Test Dates: February 21, 22, and 23, 2007

Test Specifications: EMI requirements
CFR Title 47, Part 15 Subpart B; and Subpart C, Sections 15.205, 15.207, 15.209 and 15.225

Test Procedure: ANSI C63.4

Test Deviations: The test procedure was not deviated from during the testing.



SUMMARY OF TEST RESULTS

TEST	DESCRIPTION	RESULTS
1	Conducted RF Emissions, 150 kHz – 30 MHz	Complies with the Class B limits of CFR Title 47, Part 15, Subpart B; and Subpart C, sections 15.207.
2	Radiated RF Emissions, 9 kHz – 135.6 MHz	Complies with the Class B limits of CFR Title 47, Part 15, Subpart B; and Subpart C, sections 15.205, 15.209 and 15.225.
3	Radiated RF Emissions, 135.6 MHz – 2000 MHz	Complies with the Class A limits of CFR Title 47, Part 15, Subpart B.



1. PURPOSE

This document is a qualification test report based on the Electromagnetic Interference (EMI) tests performed on the Reader, Model: AVID1033 (EUT). The EMI measurements were performed according to the measurement procedure described in ANSI C63.4. The tests were performed in order to determine whether the electromagnetic emissions from the equipment under test, referred to as EUT hereafter, are within the Class A (above 135.6 MHz) and the Class B (135.6 MHz and below) specification limits defined by CFR Title 47, Part 15, Subpart B; and Subpart C, sections 15.205, 15.207, 15.209 and 15.225.



2. ADMINISTRATIVE DATA

2.1 Location of Testing

The EMI tests described herein were performed at the test facility of Compatible Electronics, 114 Olinda Drive, Brea, California 92823.

2.2 Traceability Statement

The calibration certificates of all test equipment used during the test are on file at the location of the test. The calibration is traceable to the National Institute of Standards and Technology (NIST).

2.3 Cognizant Personnel

AVID ID Systems, Inc.

Gui-Yang Lu Director of R/D

Compatible Electronics, Inc.

Kyle Fujimoto Test Engineer
James Ross Test Engineer

2.4 Date Test Sample was Received

The test sample was received on February 21, 2007.

2.5 Disposition of the Test Sample

The sample has not been returned to AVID ID Systems, Inc. as of March 6, 2007.

2.6 Abbreviations and Acronyms

The following abbreviations and acronyms may be used in this document.

RF	Radio Frequency
EMI	Electromagnetic Interference
EUT	Equipment Under Test
P/N	Part Number
S/N	Serial Number
HP	Hewlett Packard
ITE	Information Technology Equipment
CML	Corrected Meter Limit
LISN	Line Impedance Stabilization Network
R/D	Research and Development



3. APPLICABLE DOCUMENTS

The following documents are referenced or used in the preparation of this EMI Test Report.

SPEC	TITLE
CFR Title 47, Part 15	FCC Rules – Radio frequency devices (including digital devices)
ANSI C63.4 2003	Methods of measurement of radio-noise emissions from low-voltage electrical and electronic equipment in the range of 9 kHz to 40 GHz



4. DESCRIPTION OF TEST CONFIGURATION

4.1 Description of Test Configuration - EMI

Setup and operation of the equipment under test.

Specifics of the EUT:

The Reader (EUT), Model: AVID1033 was connected to an AC Adapter via its power port. Also, a USB memory stick was directly connected to the EUT's USB Type 'A' port. The EUT was continuously transmitting.

Note: Per section 15.209 (f), measurements made beyond the 10th harmonic (135.6 MHz) shall comply with the general radiated emission limits in 15.109 that are applicable to the incorporated digital device. The EUT was tested to the **Class A** limits of 15.109 beyond the 10th harmonic (135.6 MHz)

It was determined that the emissions were at their highest level when the EUT was operating in the above configuration. The cable was moved to maximize the emissions. The final radiated data as well as conducted data was taken in this mode of operation. All initial investigations were performed with the EMI Receiver in manual mode scanning the frequency range continuously.



4.1.1 **Cable Construction and Termination**

Cable 1

This is a 1.8-meter unshielded cable connecting EUT to the AC adapter. The cable has a 1/8 inch power connector at the EUT end and is hard wired into the AC Adapter.



5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT**5.1 EUT and Accessory List**

EQUIPMENT	MANUFACTURER	MODEL NUMBER	PART NUMBER	FCC ID
READER (EUT)	AVID ID SYSTEMS, INC.	AVID1033	N/A	IOL-1356-AV1033
AC ADAPTER FOR THE EUT	GLOBTEK, INC.	GTM21089-1509-1.5-W3	WR92C20000LCP-Y-MED	N/A
USB MEMORY STICK	AVID ID SYSTEMS, INC.	N/A	N/A	N/A



5.2 EMI Test Equipment

EQUIPMENT TYPE	MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	CAL. DATE	CAL. CYCLE
GENERAL TEST EQUIPMENT USED FOR ALL RF EMISSIONS TESTS					
EMI Receiver	Rohde & Schwarz	ESIB40	100194	November 18, 2005	2 Year
Computer	Hewlett Packard	4530	US91912319	N/A	N/A
RF RADIATED EMISSIONS TEST EQUIPMENT					
Radiated Emissions Data Capture Program	Compatible Electronics	2.0	N/A	N/A	N/A
Preamplifier	Com Power	PA-102	1017	January 16, 2007	1 Year
Biconical Antenna	Com Power	AB-900	15227	March 9, 2006	1 Year
Log Periodic Antenna	Com Power	AL-100	16060	July 17, 2006	1 Year
Loop Antenna	Com Power	AL-130	17089	September 21, 2005	2 Year
Microwave Preamplifier	Com-Power	PA-122	181921	March 7, 2006	1 Year
Horn Antenna	Antenna Research	DRG-118/A	1053	March 6, 2006	2 Year
Mast Antenna	Com Power	AM-100	N/A	N/A	N/A
RF CONDUCTED EMISSIONS TEST EQUIPMENT					
Emissions Program	Compatible Electronics	2.3 (SR19)	N/A	N/A	N/A
LISN	Com Power	LI-215	12076	September 13, 2006	1 Year
LISN	Com Power	LI-215	12090	September 13, 2006	1 Year
Transient Limiter	Com Power	252A910	1	September 15, 2006	1 Year



6. TEST SITE DESCRIPTION**6.1 Test Facility Description**

Please refer to section 2.1 and 7.1 of this report for EMI test location.

6.2 EUT Mounting, Bonding and Grounding

The EUT was mounted on a 1.0 by 1.5 meter non-conductive table 0.8 meters above the ground plane.

The EUT was not grounded.



7. TEST PROCEDURES

The following sections describe the test methods and the specifications for the tests. Test results are also included in this section.

7.1 RF Emissions

7.1.1 Conducted Emissions Test

The EMI Receiver was used as a measuring meter. The data was collected with the spectrum analyzer in the peak detect mode with the "Max Hold" feature activated. The quasi-peak was used only where indicated in the data sheets. A transient limiter was used for the protection of the spectrum analyzer input stage, and the offset was adjusted accordingly to read the actual data measured. The LISN output was measured using the EMI Receiver. The output of the second LISN was terminated by a 50 ohm termination. The effective measurement bandwidth used for this test was 9 kHz.

Please see section 6.2 of this report for mounting, bonding, and grounding of the EUT. The EUT was powered through the LISN, which was bonded to the ground plane. The LISN power was filtered and the filter was bonded to the ground plane. The EUT was set up with the minimum distances from any conductive surfaces as specified in ANSI C63.4. The excess power cord was wrapped in a figure eight pattern to form a bundle not exceeding 0.4 meters in length.

The conducted emissions from the EUT were maximized for operating mode as well as cable placement. The final data was collected under program control by the Compatible Electronics software in several overlapping sweeps by running the spectrum analyzer at a minimum scan rate of 10 seconds per octave. The final qualification data is located in Appendix E.

Test Results:

The EUT complies with the **Class B** limits of CFR Title 47, Part 15 Subpart B; and the limits of CFR Title 47, Part 15, Subpart C, Section 15.207 for conducted emissions.



7.1.2 Radiated Emissions (Spurious and Harmonics) Test

The EMI Receiver was used as a measuring meter along with the quasi-peak adapter. A preamplifier was used to increase the sensitivity of the instrument. The EMI Receiver was used in the peak detect mode with the "Max Hold" feature activated. In this mode, the EMI Receiver records the highest measured reading over all the sweeps.

The measurement bandwidths and transducers used for the radiated emissions test were:

FREQUENCY RANGE	EFFECTIVE MEASUREMENT BANDWIDTH	TRANSDUCER
9 kHz to 150 kHz	200 Hz	Active Loop Antenna
150 kHz to 30 MHz	9 kHz	Active Loop Antenna
30 MHz to 300 MHz	120 kHz	Biconical Antenna
300 MHz to 1 GHz	120 kHz	Log Periodic Antenna
1 GHz to 2 GHz	1 MHz	Horn Antenna

The open field test site of Compatible Electronics, Inc. was used for radiated emission testing. This test site is set up according to ANSI C63.4. Please see section 6.2 of this report for mounting, bonding and grounding of the EUT. The turntable supporting the EUT is remote controlled using a motor. The turntable permits EUT rotation of 360 degrees in order to maximize emissions. Also, the antenna mast allows height variation of the antenna from 1 meter to 4 meters. Data was collected in the worst case (highest emission) configuration of the EUT. At each reading, the EUT was rotated 360 degrees and the antenna height was varied from 1 to 4 meters (for E field radiated field strength). The loop antenna was also rotated in the horizontal and vertical axis in order to ensure accurate results.



7.1.3**Radiated Emissions (Spurious and Harmonics) Test (Continued)**

The presence of ambient signals was verified by turning the EUT off. In case an ambient signal was detected, the measurement bandwidth was reduced temporarily and verification was made that an additional adjacent peak did not exist. This ensures that the ambient signal does not hide any emissions from the EUT. The EUT was tested at a test distance of 3 meters and 10 meters to obtain final test data. The final qualification data sheets are located in Appendix E.

Test Results:

The EUT complies with the **Class A** (above 135.6 MHz) and **Class B** (30 MHz to 135.6 MHz) limits of CFR Title 47, Part 15 Subpart B; and the limits of CFR Title 47, Part 15, Subpart C, Section 15.225 for radiated emissions.



7.2 Frequency Tolerance of Carrier Signal

The EUT was placed in temperature chamber and set to -20 degrees C. The EUT was exposed to this temperature for a period of 10 minutes. The temperature was subsequently increased at 10 degree increments up to +50 degrees with a 30 minute acclimation period between each temperature. At each temperature, the EUT was checked with an EMI Receiver to determine whether the carrier signal was within 0.01% of the fundamental frequency at startup, 2 minutes, 5 minutes and 10 minutes after removal from the temperature chamber. The frequency tolerance of the carrier signal was also checked at 85% and 115% of the rated supply voltage at 20 degrees C. A data sheet of the Frequency Tolerance testing is located in Appendix E.

Test Results:

The EUT complies with the frequency tolerance requirements of CFR Title 47, Part 15, Subpart C, Section 15.225.



8. CONCLUSIONS

The Reader, Model: AVID1033 (EUT) meets all of the Class A (above 135.6 MHz) and the Class B (135.6 MHz and below) specification limits defined in CFR Title 47, Part 15, Subpart B; and Subpart C, sections 15.205, 15.209, and 15.225.



APPENDIX A

LABORATORY RECOGNITIONS



LABORATORY RECOGNITIONS

Compatible Electronics has the following agency accreditations:

National Voluntary Laboratory Accreditation Program - Lab Code: 200528-0

Voluntary Control Council for Interference - Registration Numbers: R-983, C-1026, R-984 and C-1027

Bureau of Standards and Metrology Inspection - Reference Number: SL2-IN-E-1031

Conformity Assessment Body for the EMC Directive Under the US/EU MRA Appointed by NIST

Compatible Electronics is recognized or on file with the following agencies:

Federal Communications Commission

Industry Canada

Radio-Frequency Technologies (Competent Body)



APPENDIX B

MODIFICATIONS TO THE EUT



MODIFICATIONS TO THE EUT

The modifications listed below were made to the EUT to pass FCC 15.225, FCC Class A, and FCC Class B specifications.

All the rework described below was implemented during the test in a method that could be reproduced in all the units by the manufacturer.

No modifications were made to the EUT during testing.



APPENDIX C

ADDITIONAL MODELS COVERED UNDER THIS REPORT



ADDITIONAL MODELS COVERED UNDER THIS REPORT

USED FOR THE PRIMARY TEST

Reader
Model: AVID1033
S/N: N/A

There were no additional models covered under this report.



APPENDIX D

DIAGRAMS, CHARTS, AND PHOTOS



FIGURE 1: CONDUCTED EMISSIONS TEST SETUP


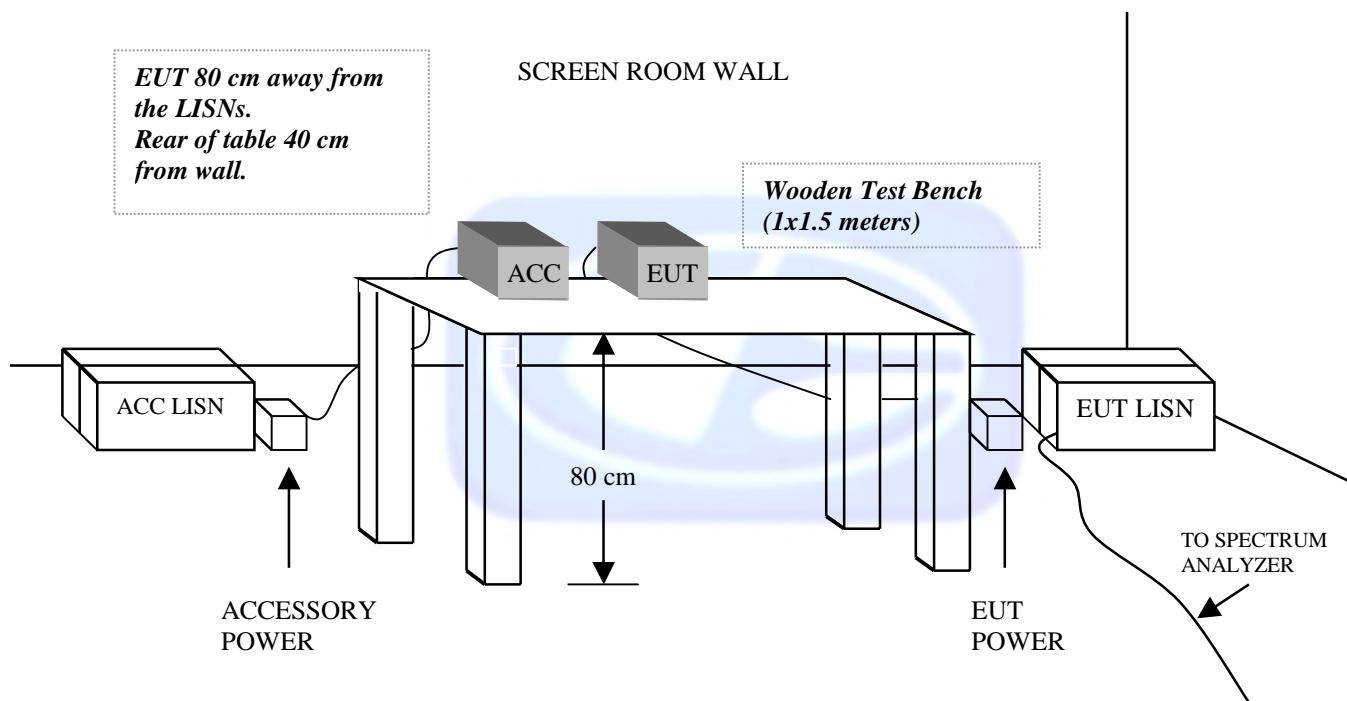


FIGURE 2: PLOT MAP AND LAYOUT OF RADIATED SITE

OPEN LAND > 15 METERS

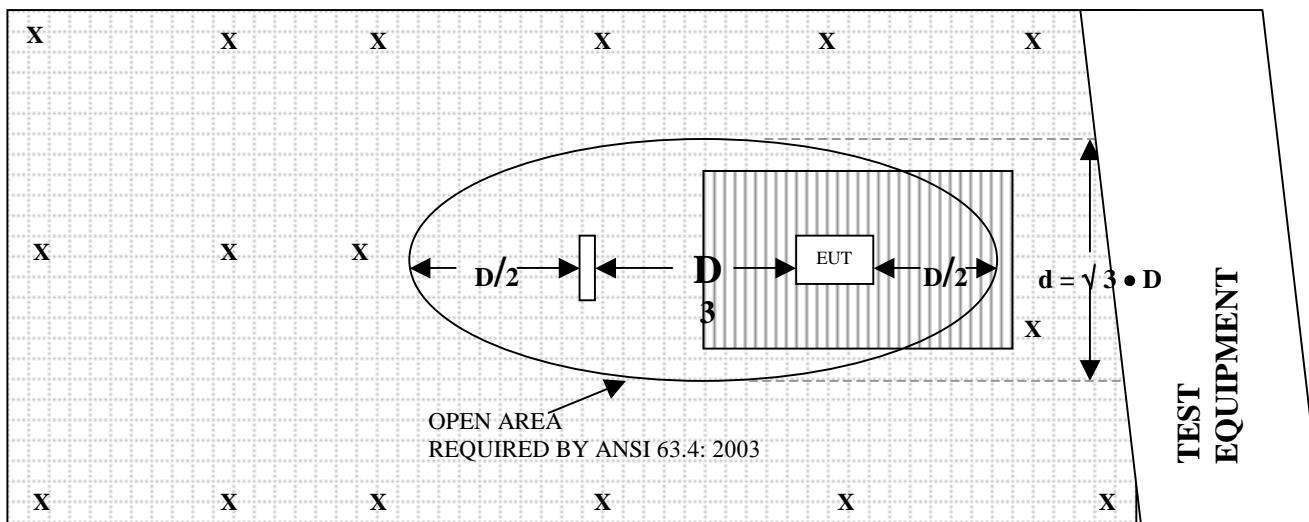

OPEN LAND > 15 METERS

	= GROUND RODS		= GROUND SCREEN
	= TEST DISTANCE (meters)		= WOOD COVER



COM-POWER AB-900**BICONICAL ANTENNA****S/N: 15227****CALIBRATION DATE: MARCH 9, 2006**

FREQUENCY (MHz)	FACTOR (dB)	FREQUENCY (MHz)	FACTOR (dB)
30	11.12	120	13.50
35	10.17	125	12.63
40	9.75	140	12.20
45	12.22	150	11.85
50	13.28	160	13.25
60	11.36	175	15.74
70	7.95	180	16.23
80	5.95	200	16.79
90	7.62	250	16.47
100	10.89	300	17.49



COM-POWER AL-100**LOG PERIODIC ANTENNA****S/N: 16060****CALIBRATION DATE: JULY 17, 2006**

FREQUENCY (MHz)	FACTOR (dB)	FREQUENCY (MHz)	FACTOR (dB)
300	13.58	700	20.49
400	14.53	800	20.13
500	15.36	900	22.15
600	18.29	1000	22.76



COM-POWER PA-102**PREAMPLIFIER****S/N: 1017****CALIBRATION DATE: JANUARY 16, 2007**

FREQUENCY (MHz)	FACTOR (dB)	FREQUENCY (MHz)	FACTOR (dB)
30	38.4	300	38.2
40	38.3	350	38.2
50	38.2	400	38.1
60	38.3	450	37.8
70	38.4	500	37.8
80	38.6	550	38.1
90	38.3	600	37.8
100	38.4	650	37.8
125	38.3	700	37.6
150	38.2	750	37.9
175	38.4	800	37.6
200	38.4	850	37.2
225	38.4	900	37.4
250	38.3	950	37.0
275	38.3	1000	37.2



COM-POWER PA-122**PREAMPLIFIER****S/N: 181921****CALIBRATION DATE: MARCH 7, 2006**

FREQUENCY (GHz)	FACTOR (dB)	FREQUENCY (GHz)	FACTOR (dB)
1.0	36.2	10.0	36.3
1.5	35.6	10.5	35.1
2.0	35.1	11.0	34.5
2.5	35.2	11.5	34.5
3.0	35.1	12.0	34.7
3.5	34.8	12.5	35.5
4.0	34.6	13.0	35.3
4.5	34.4	13.5	35.7
5.0	34.5	14.0	36.2
5.5	35.1	14.5	36.4
6.0	36.4	15.0	36.4
6.5	37.1	15.5	36.3
7.0	37.1	16.0	35.9
7.5	35.9	16.5	35.7
8.0	34.1	17.0	35.4
8.5	33.4	17.5	34.6
9.0	34.7	18.0	34.0
9.5	36.6		



ANTENNA RESEARCH DRG-118/A**HORN ANTENNA****S/N: 1053****CALIBRATION DATE: MARCH 6, 2006**

FREQUENCY (GHz)	FACTOR (dB)	FREQUENCY (GHz)	FACTOR (dB)
1.0	24.46	10.0	39.55
1.5	25.05	10.5	39.86
2.0	28.42	11.0	38.49
2.5	29.91	11.5	40.71
3.0	31.46	12.0	40.59
3.5	31.91	12.5	40.17
4.0	31.55	13.0	39.70
4.5	31.94	13.5	40.84
5.0	32.90	14.0	41.58
5.5	34.07	14.5	45.14
6.0	35.69	15.0	42.20
6.5	33.11	15.5	39.42
7.0	36.51	16.0	38.80
7.5	37.27	16.5	41.08
8.0	37.21	17.0	44.11
8.5	37.16	17.5	46.29
9.0	38.27	18.0	41.61
9.5	39.73		



COM-POWER AL-130**LOOP ANTENNA****S/N: 17089****CALIBRATION DATE: SEPTEMBER 21, 2005**

FREQUENCY (MHz)	MAGNETIC (Db/m)	ELECTRIC (dB/m)
0.009	-42.84	8.66
0.01	-41.93	9.57
0.02	-41.29	10.21
0.05	-42.37	9.13
0.07	-41.8	9.7
0.1	-41.83	9.67
0.2	-44.13	7.37
0.3	-41.73	9.77
0.5	-41.8	9.7
0.7	-41.53	9.97
1	-41.46	10.04
2	-41.14	10.36
3	-41.26	10.24
4	-41.46	10.04
5	-41.10	10.40
10	-40.83	10.67
15	-41.47	10.03
20	-35.44	16.06
25	-42.37	9.13
30	-42.94	8.56



**FRONT VIEW**

AVID ID SYSTEMS, INC.
READER
MODEL: AVID1033
FCC SUBPART B AND C – RADIATED EMISSIONS – 3 METERS

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**



**REAR VIEW**

AVID ID SYSTEMS, INC.
READER
MODEL: AVID1033
FCC SUBPART B AND C – RADIATED EMISSIONS – 3 METERS

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**



**FRONT VIEW**

AVID ID SYSTEMS, INC.
READER
MODEL: AVID1033
FCC SUBPART B AND C – RADIATED EMISSIONS – 10 METERS

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**



**REAR VIEW**

AVID ID SYSTEMS, INC.
READER
MODEL: AVID1033
FCC SUBPART B AND C – RADIATED EMISSIONS – 10 METERS

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**



**FRONT VIEW**

AVID ID SYSTEMS, INC.
READER
MODEL: AVID1033
FCC SUBPART B AND C – RADIATED EMISSIONS – 10 METERS

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**



**REAR VIEW**

AVID ID SYSTEMS, INC.
READER
MODEL: AVID1033
FCC SUBPART B AND C – RADIATED EMISSIONS – 10 METERS

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**






FRONT VIEW

AVID ID SYSTEMS, INC.
READER
MODEL: AVID1033
FCC SUBPART B AND C – CONDUCTED EMISSIONS

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**

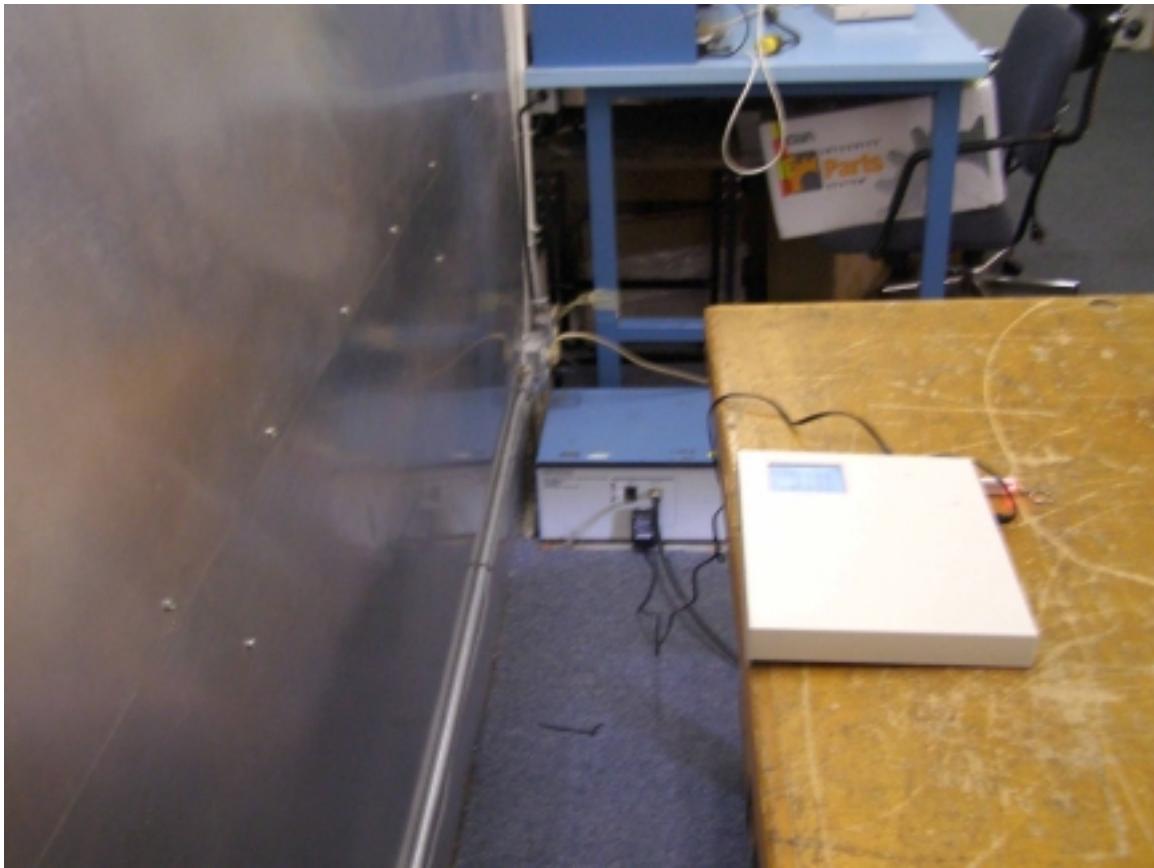

**REAR VIEW**

AVID ID SYSTEMS, INC.
READER
MODEL: AVID1033
FCC SUBPART B AND C – CONDUCTED EMISSIONS

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**



APPENDIX E

DATA SHEETS



RADIATED EMISSIONS
DATA SHEETS



FCC 15.225 and FCC Class B

AVID ID Systems, Inc.

Date: 2/21/2007

Reader

Lab: D

Model: AVID1033

Tested By: Kyle Fujimoto

Radiated Emissions -- 30 MHz to 135.60 MHz

Transmit Frequency: 13.56 MHz

Vertical and Horizontal Polarizations

Test Distance: 3 Meters

FCC Class A

AVID ID Systems, Inc.

Reader

Model: AVID1033

Dates: 2/21/2007 and 2/22/2007

Labs: B and D

Tested By: Kyle Fujimoto

Radiated Emissions -- 135.60 MHz to 2000 MHz**Transmit Frqency: 13.56 MHz****Vertical and Horizontal Polarizations****Test Distance: 10 Meters (below 1 GHz), 3 Meters (Above 1 GHz)**

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit (dBuV/m)	Margin (dB)	Peak / QP / Avg	Comments
149.15	32.05	H	43.50	-11.45	Pk	
162.69	36.64	H	43.50	-6.86	Pk	
176.27	36.01	H	43.50	-7.49	Pk	
189.81	39.54	H	43.50	-3.96	Pk	
203.28	38.35	H	43.50	-5.15	Pk	
216.94	37.84	H	46.40	-8.56	Pk	
230.52	36.39	H	46.40	-10.01	Pk	
244.06	36.89	H	46.40	-9.51	Pk	
311.87	32.43	H	46.40	-13.97	Pk	
325.42	31.13	H	46.40	-15.27	Pk	
338.98	31.14	H	46.40	-15.26	Pk	
352.54	31.83	H	54.00	-22.17	Pk	
366.09	27.32	H	46.40	-19.08	Pk	
379.67	31.33	H	46.40	-15.07	Pk	
406.78	28.78	H	46.40	-17.62	Pk	
433.90	30.18	H	46.40	-16.22	Pk	
461.02	29.62	H	46.40	-16.78	Pk	
501.72	30.94	H	46.40	-15.46	Pk	
474.61	34.21	H	46.40	-12.19	Pk	
352.53	27.63	V	46.40	-18.77	Pk	
406.79	31.15	V	46.40	-15.25	Pk	
433.98	32.04	V	46.40	-14.36	Pk	
447.47	32.14	V	46.40	-14.26	Pk	
474.59	36.29	V	46.00	-9.71	Pk	
501.71	30.75	V	46.00	-15.25	Pk	
420.03	41.98	V	46.00	-4.02	Pk	
420.01	34.74	H	46.00	-11.26	Pk	
1259.96	44.67	V	60.00	-15.33	Pk	
1259.96	41.66	H	54.00	-12.34	Pk	

FCC 15.225

AVID ID Systems, Inc.
Reader
Model: AVID1033


Date: 2/21/2007
Lab: D
Tested By: Kyle Fujimoto

Test Range: 9 kHz to 30 MHz, Including the Fundamental and 2nd Harmonic of the Tx

Loop Antenna Perpendicular (V) and Loop Antenna Parallel (H) to the EUT

Note: The Limit has been adjusted for 10 Meters based on 40 Log (Spec Dist. / Test Dist.)


FCC 15.225
 AVID ID Systems, Inc.
 Reader
 Model: AVID1033
 Tested By: Kyle Fujimoto

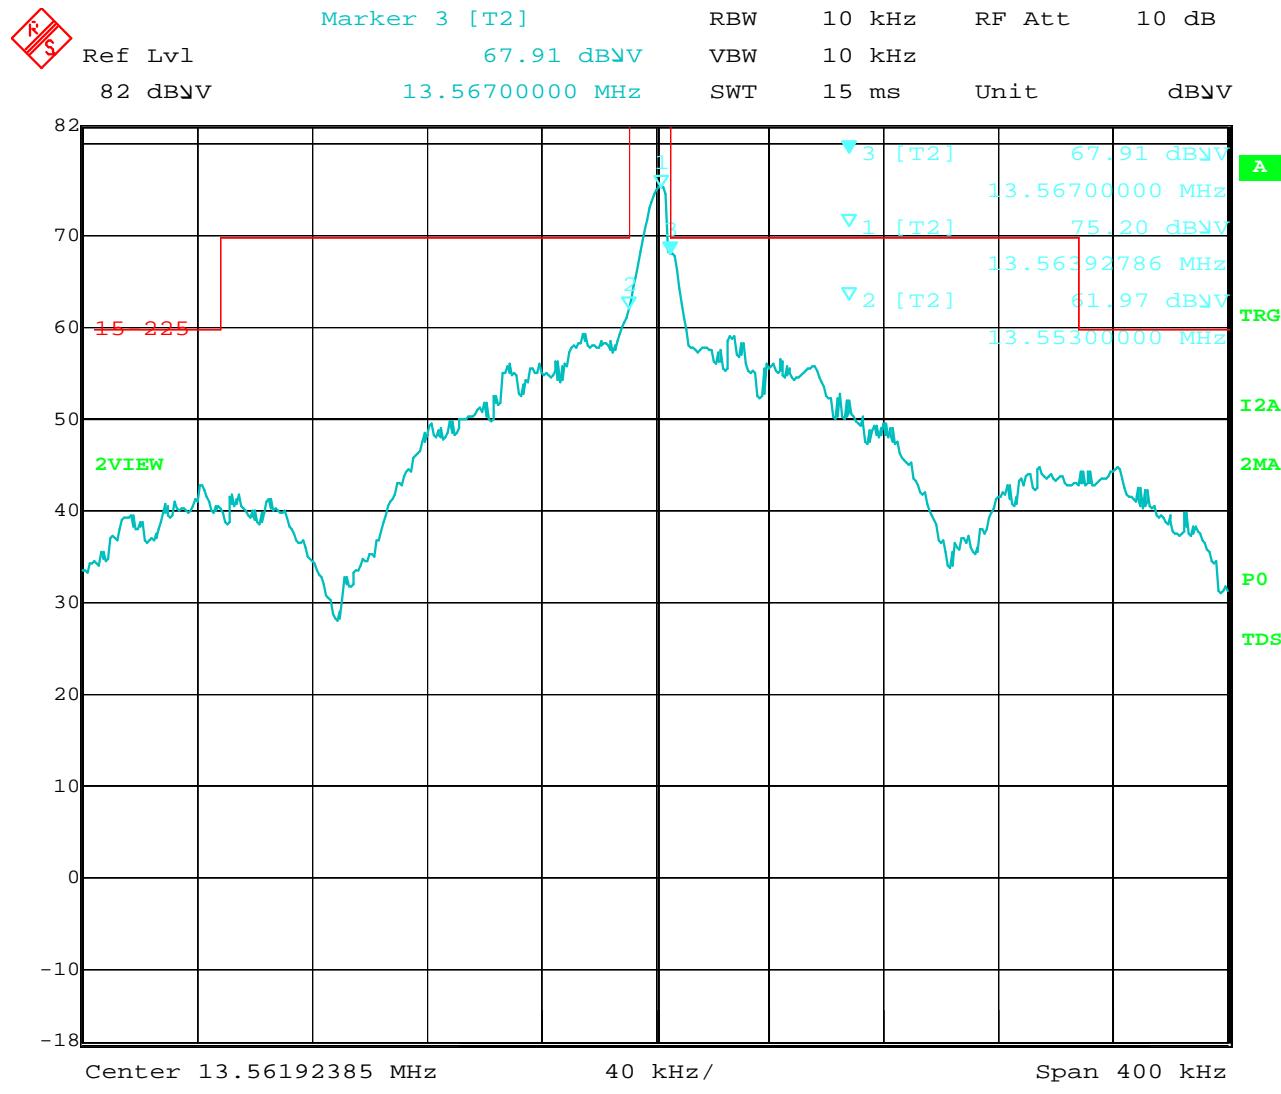

Date: 21.FEB.2007 14:52:44

Band Edge of the Fundamental – Part 1

FCC 15.225
AVID ID Systems, Inc.
Reader
Model: AVID1033
Tested By: Kyle Fujimoto

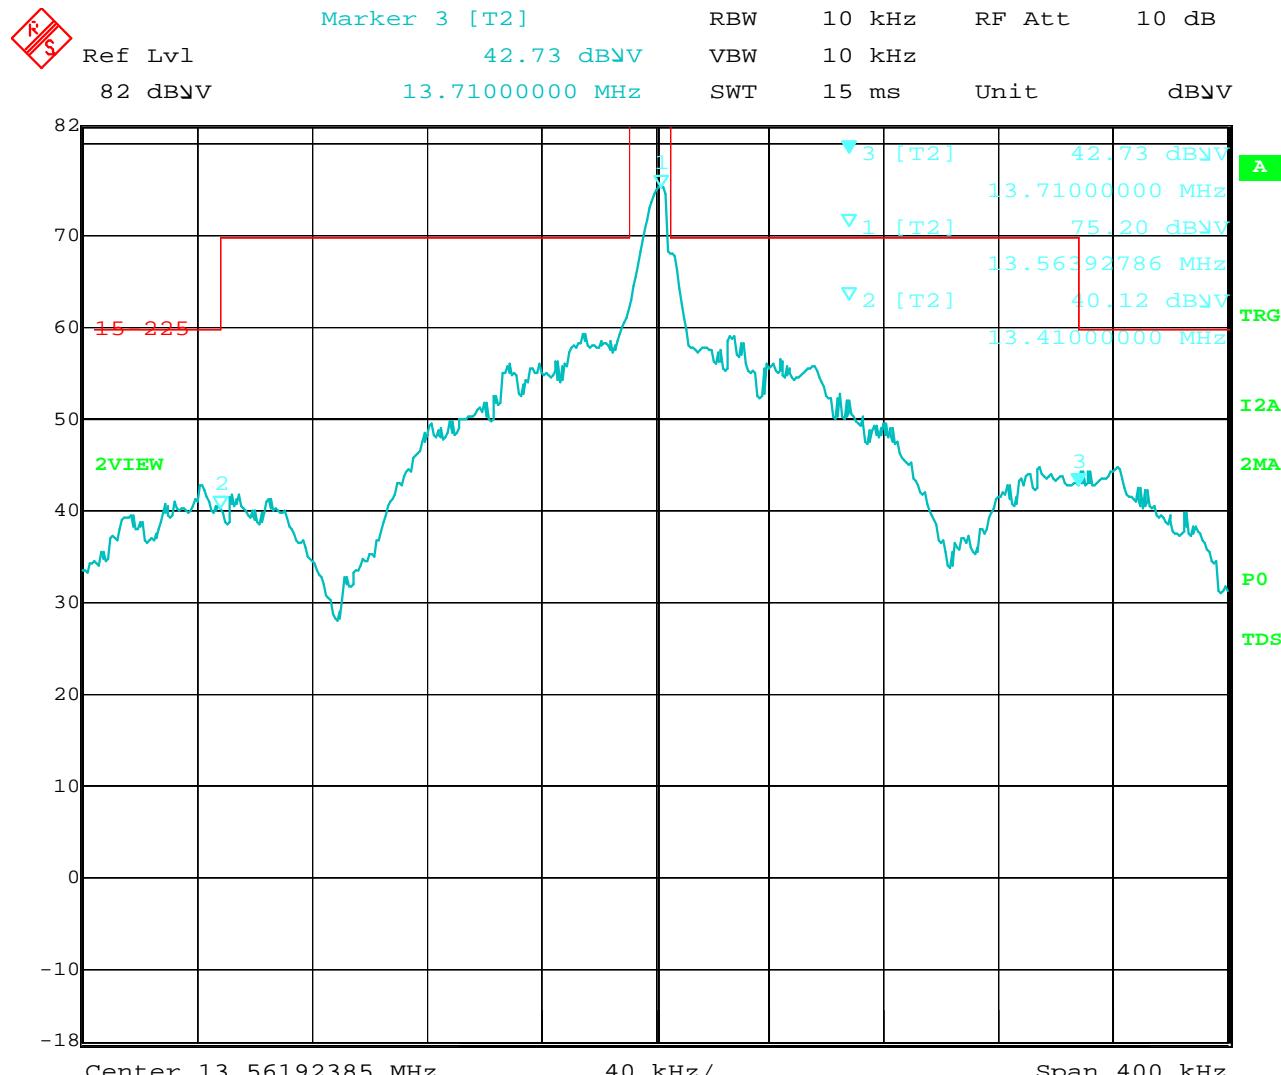

Date: 21.FEB.2007 14:55:17
Band Edge of the Fundamental – Part 2

CONDUCTED EMISSIONS
DATA SHEETS



FCC Conducted Emissions

AVID ID Systems, Inc.

Reader

Model: AVID1033

FCC Class B – Black Lead

Tested By: Kyle Fujimoto



FCC Conducted Emissions

AVID ID Systems, Inc.

Reader

Model: AVID1033

FCC Class B – Black Lead

Tested By: Kyle Fujimoto

EDIT PEAK LIST (Prescan Results)			
Trace1:	C22CONAV	Trace2:	---
Trace3:	---	Trace4:	---
TRACE	FREQUENCY	LEVEL dB _V V	DELTA LIMIT dB
1 Max Peak	13.5620 MHz	45.69	-4.30
1 Max Peak	3.4260 MHz	35.02	-10.97
1 Max Peak	3.1780 MHz	34.63	-11.36
1 Max Peak	3.5780 MHz	34.51	-11.48
1 Max Peak	3.4460 MHz	34.51	-11.48
1 Max Peak	3.3940 MHz	34.38	-11.61
1 Max Peak	3.1420 MHz	34.24	-11.75
1 Max Peak	3.4100 MHz	34.11	-11.89
1 Max Peak	3.3140 MHz	34.10	-11.89
1 Max Peak	3.5580 MHz	33.96	-12.03
1 Max Peak	3.4700 MHz	33.39	-12.60
1 Max Peak	3.1340 MHz	32.70	-13.29
1 Max Peak	3.1100 MHz	32.70	-13.29
1 Max Peak	3.1580 MHz	32.57	-13.42
1 Max Peak	150.0000 kHz	42.55	-13.44
1 Max Peak	3.2180 MHz	31.78	-14.21
1 Max Peak	3.5060 MHz	31.52	-14.47
1 Max Peak	3.2900 MHz	31.26	-14.74
1 Max Peak	3.2020 MHz	31.25	-14.74
1 Max Peak	3.2700 MHz	31.12	-14.87

Date: 21.FEB.2007 08:45:37

FCC Conducted Emissions


AVID ID Systems, Inc.

Reader

Model: AVID1033

FCC Class B – White Lead

Tested By: Kyle Fujimoto

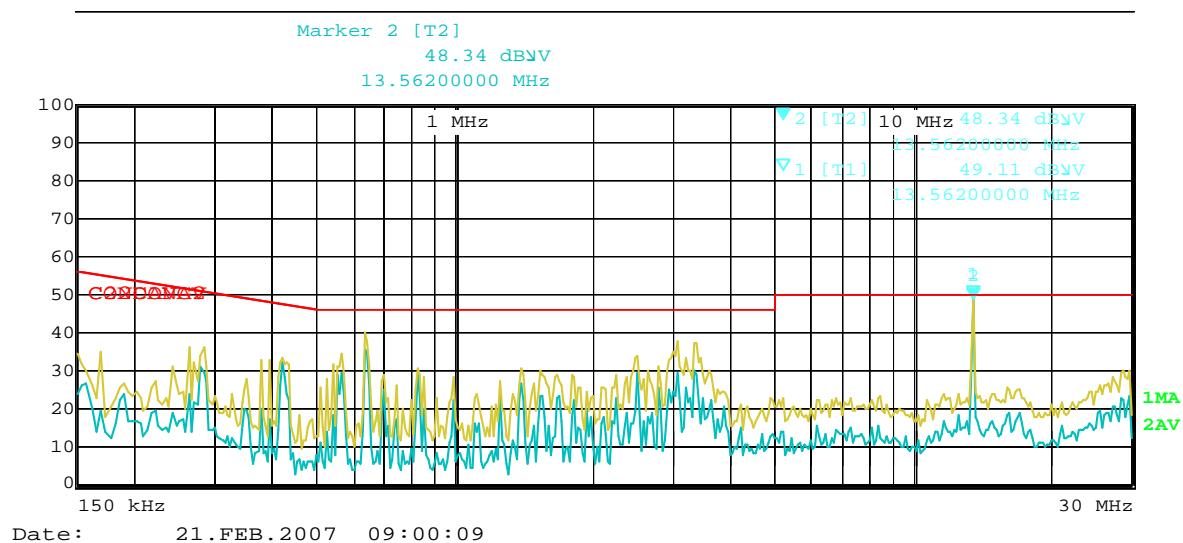

FCC Conducted Emissions

AVID ID Systems, Inc.

Reader

Model: AVID1033


FCC Class B – White Lead

Tested By: Kyle Fujimoto

EDIT PEAK LIST (Prescan Results)			
Trace1:	C22CONAV	Trace2:	CONDAVG2
Trace3:	---	Trace4:	---
TRACE	FREQUENCY	LEVEL dB _V V	DELTA LIMIT dB
1	Max Peak 13.5620 MHz	49.11	-0.88
2	Average 13.5620 MHz	48.33	-1.66
1	Max Peak 638.0000 kHz	39.72	-6.27
1	Max Peak 3.0860 MHz	37.54	-8.45
1	Max Peak 3.3940 MHz	36.92	-9.07
1	Max Peak 3.3500 MHz	36.92	-9.07
2	Average 638.0000 kHz	35.08	-10.91
1	Max Peak 2.9980 MHz	34.98	-11.01
1	Max Peak 3.3700 MHz	34.77	-11.22
1	Max Peak 3.0620 MHz	34.48	-11.51
1	Max Peak 562.0000 kHz	34.12	-11.87
1	Max Peak 3.3340 MHz	33.54	-12.45
1	Max Peak 3.0460 MHz	33.52	-12.47
1	Max Peak 2.5140 MHz	33.34	-12.65
1	Max Peak 3.4420 MHz	32.98	-13.01
1	Max Peak 3.1980 MHz	32.83	-13.16
1	Max Peak 2.9780 MHz	32.82	-13.17
1	Max Peak 2.4740 MHz	32.80	-13.19
1	Max Peak 2.9300 MHz	32.41	-13.58
1	Max Peak 3.2180 MHz	32.04	-13.96

Date: 21.FEB.2007 09:01:10

FREQUENCY TOLERANCE

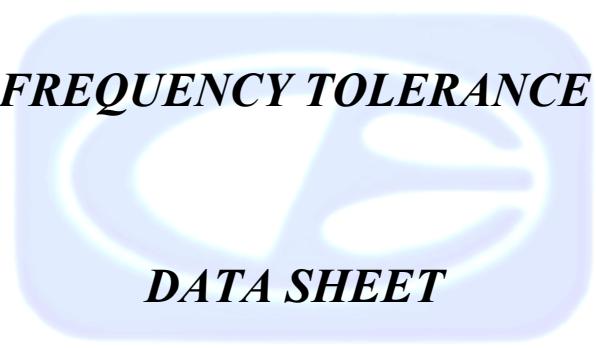

DATA SHEET



FCC 15.225 TESTING

COMPANY:	AVID ID SYSTEMS, INC.	DATE:	02/23/2007
EUT:	READER	ENGINEER:	KYLE FUJIMOTO
MODEL:	AVID1033	S/N:	N/A

TEMPERATURE	FREQUENCY (GHz) AT 0 MINUTES	FREQUENCY (GHz) AT 2 MINUTES	FREQUENCY (GHz) AT 5 MINUTES	FREQUENCY (GHz) AT 10 MINUTES	% OF SUPPLY VOLTAGE
-30°C	13.56049098	13.56049098	13.56049098	13.56049098	100
-20°C	13.56049098	13.56049098	13.56049098	13.56049098	100
-10°C	13.56049098	13.56049098	13.56049098	13.56049098	100
0°C	13.56049098	13.56049098	13.56049098	13.56049098	100
+10°C	13.56045090	13.56045090	13.56045090	13.56045090	100
+20°C	13.56045090	13.56045090	13.56045090	13.56045090	100
+20°C	13.56045090	13.56045090	13.56045090	13.56045090	85
+20°C	13.56045090	13.56045090	13.56045090	13.56045090	115
+30°C	13.56037074	13.56037074	13.56037074	13.56037074	100
+40°C	13.56039078	13.56039078	13.56039078	13.56039078	100
+50°C	13.56037074	13.56037074	13.56037074	13.56037074	100