

## FCC TEST REPORT

for

### PART 15, SUBPART B CLASS B

Equipment : SOHO ware HUB

MODEL NO. : ND4205

**F C C I D** : IOUND4205S01

Filing Type : Original Grant

**APPLICANT : NATIONAL DATACOMM CORPORATION**

2F, 28, Industry East 9th Rd., Science Park,  
Hsin Chu 30077, Taiwan, R.O.C.


- The test result refers exclusively to the test presented test model / sample.
- Without the written authorization of the test lab., the Test Report may not be copied.

**SPORTON INTERNATIONAL INC.**

6F, No. 106, Hsin Tai Wu Rd., Sec. 1, Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

**TABLE OF CONTENT**

SECTION TITLE	PAGE
<b>CERTIFICATE OF COMPLIANCE</b> .....	<b>3</b>
<b>1. GENERAL DESCRIPTION OF EQUIPMENT UNDER TEST</b> .....	<b>4</b>
1.1. APPLICANT .....	4
1.2. MANUFACTURER .....	4
1.3. BASIC DESCRIPTION OF EQUIPMENT UNDER TEST .....	4
1.4. FEATURE OF EQUIPMENT UNDER TEST .....	4
<b>2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST</b> .....	<b>5</b>
2.1. TEST MANNER .....	5
2.2. DESCRIPTION OF TEST SYSTEM .....	5
2.3. CONNECTION DIAGRAM OF TEST SYSTEM .....	7
<b>3. TEST SOFTWARE</b> .....	<b>8</b>
<b>4. GENERAL INFORMATION OF TEST</b> .....	<b>9</b>
4.1. TEST FACILITY .....	9
4.2. STANDARD FOR METHODS OF MEASUREMENT .....	9
4.3. TEST IN COMPLIANCE WITH .....	9
4.4. FREQUENCY RANGE INVESTIGATED .....	9
4.5. TEST DISTANCE .....	9
<b>5. TEST OF CONDUCTED POWERLINE</b> .....	<b>10</b>
5.1. MAJOR MEASURING INSTRUMENTS .....	10
5.2. TEST PROCEDURES .....	11
5.3. TYPICAL TEST SETUP LAYOUT OF CONDUCTED POWERLINE .....	12
5.4. TEST RESULT OF AC POWERLINE CONDUCTED EMISSION .....	13
5.5. PHOTOGRAPHS OF CONDUCTED POWERLINE TEST CONFIGURATION .....	14
<b>6. TEST OF RADIATED EMISSION</b> .....	<b>16</b>
6.1. MAJOR MEASURING INSTRUMENTS .....	16
6.2. TEST PROCEDURES .....	17
6.3. TYPICAL TEST SETUP LAYOUT OF RADIATED EMISSION .....	18
6.4. TEST RESULT OF RADIATED EMISSION .....	19
6.5. PHOTOGRAPHS OF RADIATED EMISSION TEST CONFIGURATION .....	20
<b>7. ANTENNA FACTOR AND CABLE LOSS</b> .....	<b>21</b>
<b>8. LIST OF MEASURING INSTRUMENTS USED</b> .....	<b>22</b>



**SPORTON International Inc.**

TEL : 886-2-2696-2468

FAX : 886-2-2696-2255

**FCC TEST REPORT**

**REPORT NO. : F852204**

CERTIFICATE NO. : F852204

## CERTIFICATE OF COMPLIANCE

for

**FCC PART 15, SUBPART B CLASS B**

Equipment : SOHO ware HUB

MODEL NO. : ND4205


**F C C I D** : IOUND4205S01

APPLICANT : **NATIONAL DATACOMM CORPORATION**

2F, 28, Industry East 9th Rd., Science Park,  
Hsin Chu 30077, Taiwan, R.O.C.

### I **HEREBY** CERTIFY THAT :

The measurement shown in this report were made in accordance with the procedures given in **ANSI C63.4 -1992** and the energy emitted by this equipment was **passed** both radiated and conducted emissions CLASS B limits. Testing was carried out on JUN. 08, 1998 at **SPORTON International Inc.** in NEI HWU.

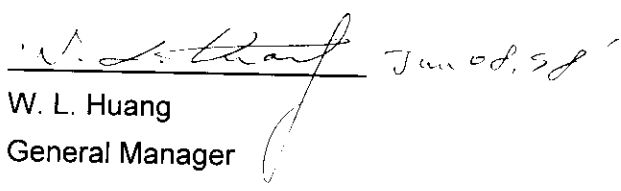  
W. L. Huang

General Manager

**SPORTON International Inc.**

6F, No. 106, Hsin Tai Wu Rd., Sec. 1, Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

APPLICANT : NATIONAL DATACOMM CORPORATION

EQUIPMENT : SOHO ware HUB

**F C C I D** : IOUND4205S01

ISSUED DATE : JUN. 08, 1998

PAGE NUMBER : 3 OF 22

## **1. GENERAL DESCRIPTION OF EQUIPMENT UNDER TEST**

### **1.1. APPLICANT**

**NATIONAL DATACOMM CORPORATION**  
2F, 28, Industry East 9th Rd., Science Park,  
Hsin Chu 30077, Taiwan, R.O.C.

### **1.2. MANUFACTURER**

Same as 1.1

### **1.3. BASIC DESCRIPTION OF EQUIPMENT UNDER TEST**

EQUIPMENT : SOHO ware HUB

MODEL NO. :ND4205

FCC ID : IOUND4205S01

TRADE NAME : NDC

TP DATA CABLE : Non-shielded

Power Supply Type: Linear

Power Cord: N/A

### **1.4. FEATURE OF EQUIPMENT UNDER TEST**

- IEEE 802.3 compliant
- Five RJ-45 ports supporting up to five 10BaseT segment connections.
- Polarity auto-detection and auto-correction for RJ-45 ports.
- Two LEDs per port indicate Link/Receive, and Partition status.
- Two LEDs to indicate Power and Collision status.

## 7. ANTENNA FACTOR AND CABLE LOSS

Frequency ( Mhz )	Antenna Factor ( dB )	Cable Loss ( dB )
30	-2.20	0.80
35	-0.70	0.82
40	0.51	0.94
45	1.30	1.00
50	2.39	1.00
55	3.14	1.11
60	4.40	1.20
65	5.14	1.20
70	5.59	1.20
75	6.11	1.30
80	7.10	1.40
85	7.53	1.40
90	8.22	1.40
95	8.80	1.40
100	9.36	1.50
110	10.11	1.60
120	10.41	1.70
130	10.74	1.80
140	11.42	1.91
150	11.91	2.01
160	12.25	2.01
170	12.22	2.21
180	13.02	2.30
190	13.50	2.30
200	14.05	2.40
220	14.31	2.40
240	15.11	2.50
260	17.11	2.61
280	17.50	2.70
300	17.99	3.11
320	18.10	3.10
340	19.13	3.20
360	20.14	3.30
380	21.81	3.40
400	22.29	3.60
450	22.40	3.80
500	22.31	4.10
550	23.42	4.40
600	24.01	4.60
650	25.11	5.00
700	26.00	5.30
750	26.51	5.51
800	27.10	5.70
850	27.51	5.90
900	27.90	6.20
950	30.01	6.30
1000	29.00	6.40

**8. LIST OF MEASURING INSTRUMENTS USED**

INSTRUMENT	Manufacturer	Model No.	Serial No.	Characteristic	Calibration date	Remark
Spectrum monitor	R&S	EZM	894987/011	---	Apr. 13, 1998	C
Test Receiver	R&S	ESH3	893495/013	9 KHz - 30MHz	Apr. 13, 1998	C
LISN	EMCO	3825/2	9510-2484	50 ohm / 50 uH	Nov. 29, 1997	C
LISN	KYORITSU	KNW-407	8-1010-15	50 ohm / 50 uH	Nov. 10, 1997	C
EMI Filter	CORCOM	MRI-2030	N/A	480 VAC / 30 A	N/A	C
EMI Filter	CORCOM	MRI-2030	N/A	480 VAC / 30 A	N/A	C
Spectrum Analyzer (site 1)	HP	8568B	2928A04713	100Hz - 1500MHz	Jul. 19, 1997	R
Quasi-peak Adapter (site 1)	HP	85650A	2811A01285	9KHz - 1 GHz	Jul. 19, 1997	R
RF Preselector (site 1)	HP	85685A	2926A00951	20Hz-1GHz	Aug. 12, 1997	R
Bilog Antenna (1)	CHASE	CBL6112A	2296	30 MHz -2000 MHz	Jul. 24, 1997	R
Spectrum	HP	8594A	2741A0311	9 KHz - 2.9GHz	Apr. 17, 1998	R
Half-wave dipole antenna	EMCO	3121C	8912-496	28M-1GHZ	Aug. 12, 1997	R
Turn Table	EMCO	1060-1.211	9507-1805	0 ~ 360 degree	N/A	R
Antenna Mast	EMCO	1051-1.2	9502-1868	1 m- 4 m	N/A	R

※ The column of Remark indicates that the instruments used for conduction ("C") or radiation ("R") test.

## **2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST**

### **2.1. TEST MANNER**

- a. The EUT has been associated with personal computer and peripherals pursuant to ANSI C63.4-1992 and configuration operated in a manner which tended to maximize its emission characteristics in a typical application.
- b. The SILITEK keyboard, SONY monitor, HP printer, NDC HUB and ACCEX modem were connected to the LEO PC.
- c. Using the twisted pair cable to connect the EUT and workstation which is installed with the other ethernet lan card.
- d. During the test, the monitor AC power cord was plugged into the PC computer-mounted AC outlet and a floor-mounted AC outlet to search the maximum emission.
- e. Frequency range investigated: Conduction 450 KHz to 30 MHz, Radiation 30 MHz to 1000 MHz.

### **2.2. DESCRIPTION OF TEST SYSTEM**

#### **Support Device 1. --- MODEM ( ACEEX )**

FCC ID : IFAXDM1414  
Model No. : DM1414  
Serial No. : SP0025  
Data Cable : Shielded, 360 degree via metal backshells.  
Power Supply Type : Linear

#### **Support Device 2. --- PRINTER (HP)**

FCC ID : DSI6XU2225  
Model No. : 2225C  
Serial No. : SP0003  
Data Cable : Shielded, 360 degree via metal backshells  
Power Supply Type : Linear

**SPORTON International Inc.**

TEL : 886-2-2696-2468

FAX : 886-2-2696-2255

**FCC TEST REPORT****REPORT NO. : F852204****Support Device 3. --- MONITOR (SONY)**

FCC ID : AK8GDM17SE2T  
Model No. : GDM-17SE2T  
Serial No. : SP1046  
Data Cable : Shielded, 360 degree via metal backshells.  
Power Supply Type : Switching  
Power Cord : Non-shielded

**Support Device 4. --- KEYBOARD (SILITEK)**

FCC ID : GYUR99SK  
Model No. : SK9001AS2U  
Serial No. : SP1008  
Data Cable : Shielded, 360 degree via metal backshells.

**Support Device 5. --- PERSONAL COMPUTER (LEO)**

FCC ID : N/A  
Model No. : P55T2P4  
Serial No. : SP1033  
Data Cable : Shielded, 360 degree via metal backshells  
Power Cord : Non-shielded  
Power Supply Type : Switching


Remark: This support device was tested to comply with FCC standards and authorized under a declaration of conformity.

**Support Device 6. --- ETHERNET LAN CARD (D-LINK)**

FCC ID : KA2APC220E1  
Model No. : DE-220CT  
BNC Data Cable : Shielded  
TP Data Cable : Non-shielded



### 2.3. CONNECTION DIAGRAM OF TEST SYSTEM

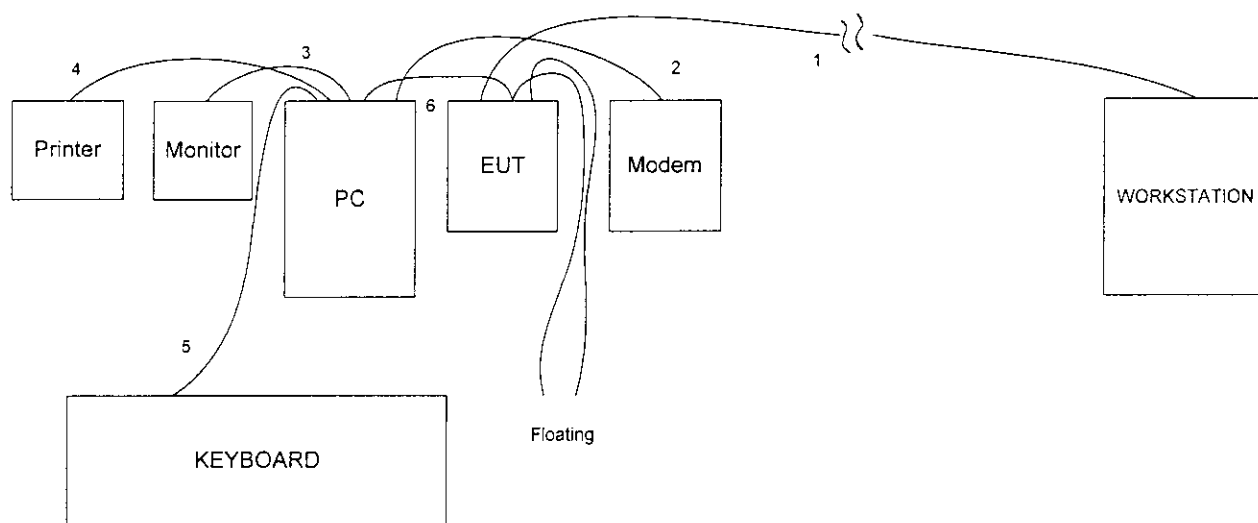

1. The twisted pair cable is connected to the support device 6.
2. The I/O cable is connected to the support device 1.
3. The I/O cable is connected to the support device 3.
4. The I/O cable is connected to the support device 2.
5. The I/O cable is connected to the support device 4.
6. The I/O cable is connected to the EUT.

Remark: The workstation PC, FCC ID: HCJVECTRAVE4

### **3. TEST SOFTWARE**

3.0 Using the following batch files to connect the EUT and workstation with twisted pair cable.

- a. For EUT: In DOS mode, running the "TEST200J.EXE"
  - b. For workstation: In DOS mode, running the batch file "TEST200J.EXE"
- 
- a. Turn on the power of all equipment.
  - b. The PC transmits the "H" character to the other PC.
  - c. The monitor then displaying the "H" characters on the screen continuously and repeatedly.
  - d. The PC sends " H " messages to the printer, then the printer prints it on the paper.
  - e. The PC sends " H " messages to the modem.
  - f. The PC sends " H " messages to the internal Hard Disk, then the hard disk reads and writes the message.
  - g. Repeat the steps from b to f.

## **4. GENERAL INFORMATION OF TEST**

### **4.1. TEST FACILITY**

This test was carried out by SPORTON INTERNATIONAL INC. in an openarea test site.

Openarea Test Site Location : No. 3, Lane 238, Kang Lo Street, Nei Hwu District,  
Taipei 11424, Taiwan, R.O.C.

TEL : 886-2-2631-4739

FAX : 886-2-2631-9740

### **4.2. STANDARD FOR METHODS OF MEASUREMENT**

ANSI C63.4-1992

### **4.3 .TEST IN COMPLIANCE WITH**

FCC PART 15, SUBPART B CLASS B

### **4.4. FREQUENCY RANGE INVESTIGATED**

- a. Conduction : from 450 KHz to 30 MHz
- b. Radiation : from 30 MHz to 1000 MHz

### **4.5. TEST DISTANCE**

The test distance of radiated emission from antenna to EUT is 3M.

## **5. TEST OF CONDUCTED POWERLINE**

Conducted Emissions were measured from 450 KHz to 30 MHz with a bandwidth of 9 KHz on the 115 VAC power and return leads of the EUT according to the methods defined in ANSI C63.4-1992 Section 3.1. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane as shown in Figure 5-3. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

### **5.1. MAJOR MEASURING INSTRUMENTS**


- Test Receiver
  - Attenuation 0 dB
  - Start Frequency 0.45 MHz
  - Stop Frequency 30 MHz
  - Step MHz 0.007 MHz
  - IF Bandwidth 9 KHz

---

## **5.2. TEST PROCEDURES**

- a. The EUT was placed 0.4 meter from the conducting wall of the shielding room and was kept at least 80 centimeters from any other grounded conducting surface.
- b. Connect EUT to the power mains through a line impedance stabilization network ( LISN ).
- c. All the support units are connect to the other LISN.
- d. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- e. The FCC states that a 50 ohm , 50 microhenry LISN should be used.
- f. Both sides of AC line were checked for maximum conducted interference.
- g. The frequency range from 450 KHz to 30 MHz was searched.
- h. Set the test-receiver system ( R/S receiver ESH3 ) to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- i. If the emission level of the EUT in peak mode was 6 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported otherwise the emissions which do not have 6 dB margin will be retested on by one using the quasi-peak method and reported.

### 5.3. TYPICAL TEST SETUP LAYOUT OF CONDUCTED POWERLINE

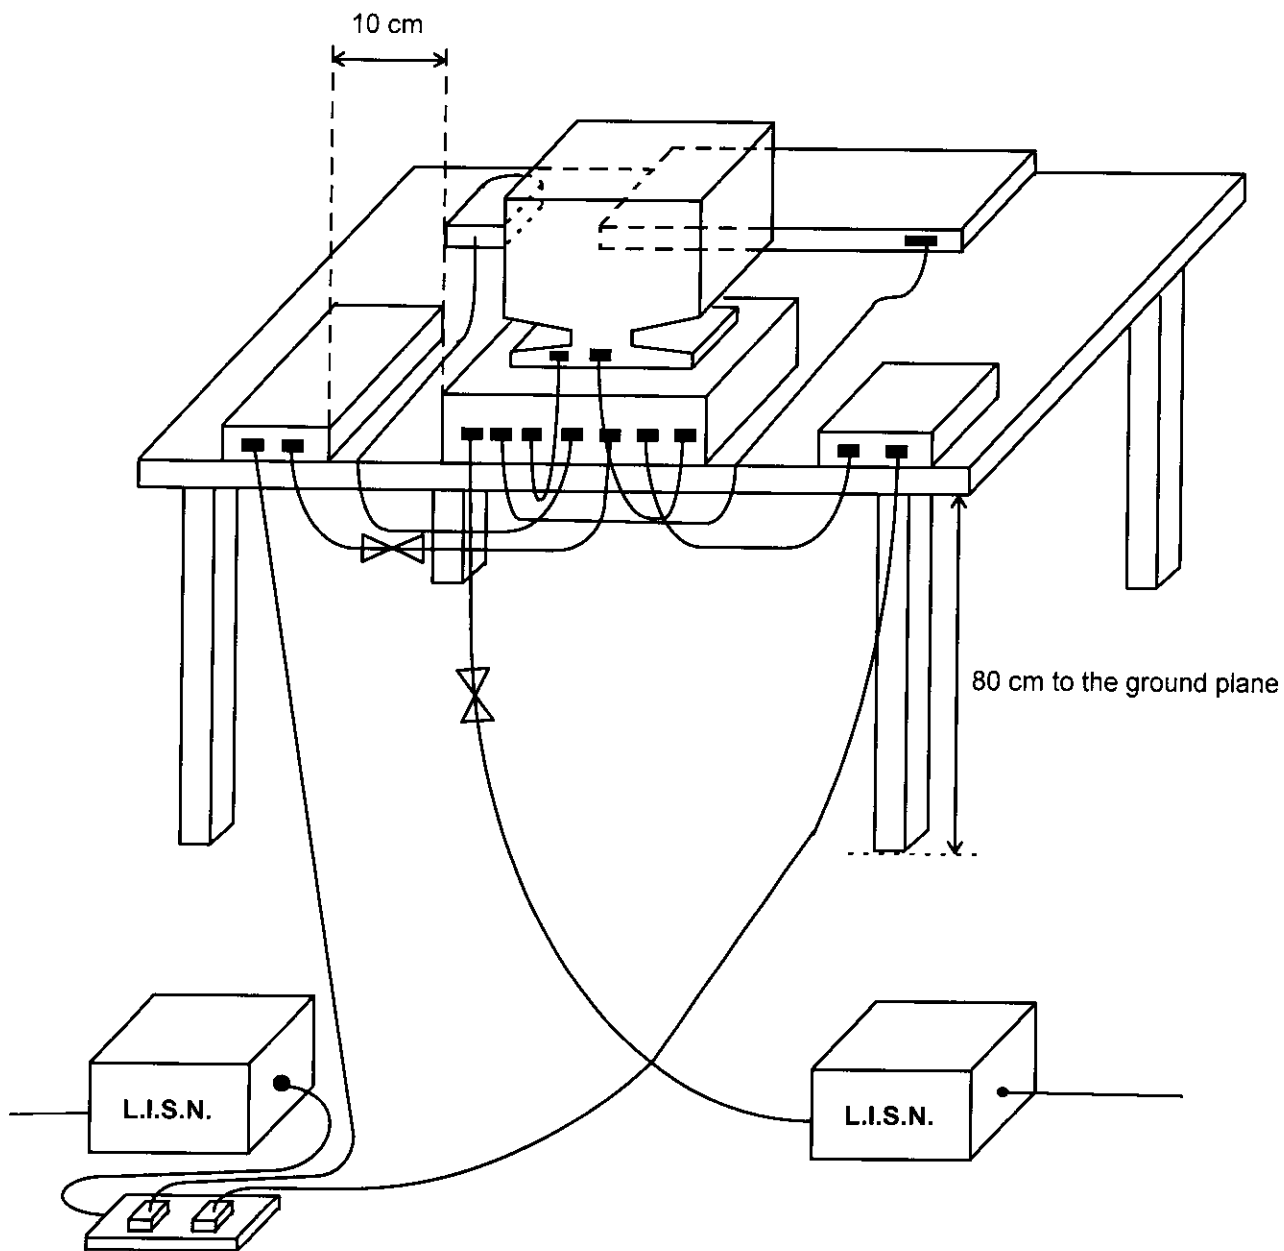

**5.4. TEST RESULT OF AC POWERLINE CONDUCTED EMISSION**

- Frequency Range of Test : from 0.45 MHz to 30 MHz
- Temperature :26 °C
- Relative Humidity :60% RH
- All emissions not reported here are more than 10 dB below the prescribed limit.
- Measuring Mode :TWISTED PAIR MODE
- Test Date : JUN. 05, 1998

**The Conducted Emission was passed at minimum margin NEUTRAL 0.48MHz / 34.80dBuV.**

Frequency Line / Neutral		Meter Reading		Limits		Margin
( MHz )		( dBuV )	( uV )	( dBuV )	( uV )	( dB )
0.49	L	30.50	33.50	48.00	251.19	-17.50
0.54	L	34.00	50.12	48.00	251.19	-14.00
15.61	L	27.20	22.91	48.00	251.19	-20.80
0.48	N	34.80	54.95	48.00	251.19	-13.20
1.10	N	33.50	47.32	48.00	251.19	-14.50
15.61	N	27.10	22.65	48.00	251.19	-20.90

Test Engineer :



## 6. TEST OF RADIATED EMISSION

Radiated emissions from 30 MHz to 1000 MHz were measured with a bandwidth of 120 KHz according to the methods defines in ANSI C63.4-1992. The EUT was placed on a nonmetallic stand in the open-field site, 0.8 meter above the ground plane, as shown in Figure 6-3. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions.

### 6.1. MAJOR MEASURING INSTRUMENTS


- RF Preselector
  - Attenuation 0 dB
  - RF Gain 20 dB
  - Signal Input Input 2 ( for 20 MHz to 2 GHz )
  
- Spectrum Analyzer 8568B
  - Attenuation 0 dB
  - Start Frequency 30 MHz
  - Stop Frequency 1000 MHz
  - Resolution Bandwidth 1 MHz
  - Video Bandwidth 1 MHz
  - Signal Input Input 1 ( for 100KHz to 1.5 GHz )
  
- Quasi-Peak Adapter
  - Resolution Bandwidth 120 KHz
  - Frequency Band 30 MHz to 1 GHz
  - Quasi-Peak Detector ON for Quasi-Peak Mode  
OFF for Peak Mode



## **6.2. TEST PROCEDURES**

- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a half wave dipole and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower ( from 1 M to 4 M ) and turn table ( from 0 degree to 360 degrees ) to find the maximum reading.
- f. Set the test-receiver system ( HP 8568B ) to Peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 6 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported otherwise the emissions which do not have 6 dB margin will be repeated one by one using the quasi-peak method and reported.

### 6.3. TYPICAL TEST SETUP LAYOUT OF RADIATED EMISSION

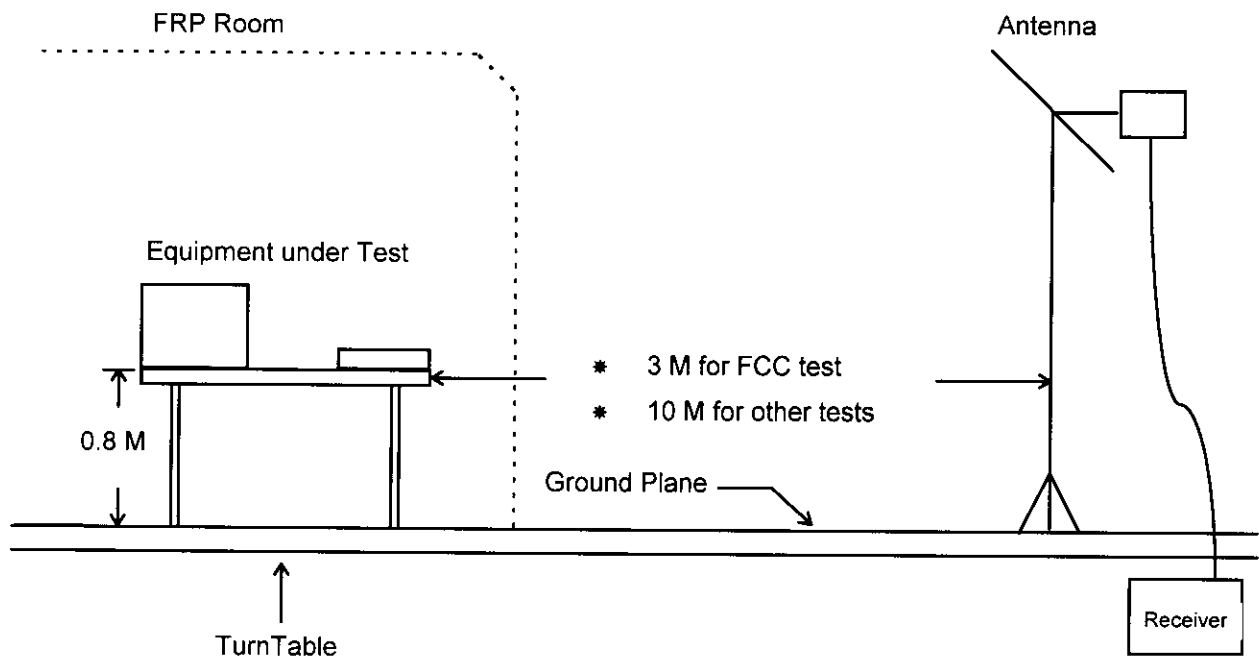

**6.4. TEST RESULT OF RADIATED EMISSION**

- Equipment meets the technical specifications of 15.109
- Frequency Range of Test : from 30 MHz to 1000 MHz
- Test Distance : 3 M
- Temperature : 30 °C
- Relative Humidity : 50% RH
- Measuring Mode : TWISTED PAIR MODE
- Test Date : JUN. 05, 1998
- Emission level ( dBuV/m ) = 20 log Emission level ( uV/m )
- Sample Calculation at 150.06MHz  
Corrected Reading = 11.91+ 2.01+ 21.05= 34.97(dBuV/m )

**The Radiated Emission test was passed at**

**150.00MHz / 34.97dBuV ( Vertical )**

**Antenna Height 1 Meter , Turntable Degree 120 °.**

Frequency ( MHz )	Polarity	Antenna Factor (dB/m)	Cable Loss ( dB )	Reading ( dBuV )	Limits (dBuV/m) (uV/m)	Emission (dBuV/m) (uV/m)	Level (uV/m)	Margin ( dB )
50.41	H	2.48	1.10	26.24	40.00 100	29.83	31.01	-10.17
80.17	H	7.60	1.51	19.88	40.00 100	29.00	28.18	-11.00
150.06	H	11.91	2.01	6.85	43.50 150	20.77	10.93	-22.73
70.14	V	5.61	1.37	21.34	40.00 100	28.31	26.03	-11.69
120.13	V	10.42	1.90	19.83	43.50 150	32.15	40.50	-11.35
150.06	V	11.91	2.01	21.05	43.50 150	34.97	56.04	-8.53

Test Engineer :

*Ben 207*