
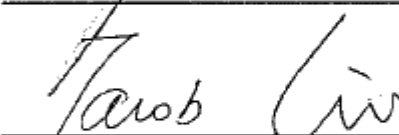


**Test Report**

1/19

|                   |   |
|-------------------|---|
| Report No.        | C3115387  |
| FCC ID            | IOW1465UP   |
| Specifications    | FCC Part 15, Class B  |
| Test Method       | ANSI C63.4 1992   |
| Applicant         | Chic Technology Corp.   |
| Applicant address | 16F, No. 150, Chien-I Road, 235 Chung Ho City, Taipei Hsien, Taiwan, R.O.C.   |
| Items tested      | Wireless Optical Mouse (Sample # C31386)  |
| Model No.         | CHIC 1465UP; CHIC 1462UP; CHIC 2400;  |
|                   | 350WL Ami Mouse Wireless Optical  |
| Frequency Range   | 26.96MHz to 27.28MHz  |
| Results           | <b>Compliance</b> (As detailed within this report)  |
| Date              | 05/03/2002 (month / day / year)(Sample received)  |
|                   | 06/13/2002 (month / day / year)(Tested)   |
| Prepared by       |  Project Engineer                   |
| Authorized by     |  V. General Manager<br>(Jacob Lin) |
| Issue date        | July 18, 2002 (month / day / year)  |
| Modifications     | None  |
| Tested by         | Training Research Co., Ltd. <b>(Accredited by NVLAP)</b>  |
| Office at         | 2, Lane 194, Huan-Ho Street, Hsichih, Taipei Hsien 221, Taiwan  |
| Open site at      | No. 15, Lane 530, Pa-Lian RD., Sec. 1, Hsichih City, Taipei Hsien, Taiwan, R.O.C.                                     |

**Conditions of issue :**

- This test report shall not be reproduced except in full, without written approval of TRC. And the test result contained within this report only relate to the sample submitted for testing.
- The test data in this test report are following the procedures in accordance with the terms of accreditation.
- This test report and measurements made by TRC are traceable to the NIST only Conducted and Radiated Method (TRC is accredited by NVLAP, code No.: 200174-0).
- The device has been tested is fully complied with the requirements the Directive FCC Part 15.

Report No.: C3115387

Training Research Co., Ltd., TEL: 886-2-26461146, Fax: 886-2-26461778

# Contents

## Chapter 1 Introduction

|                                   |   |
|-----------------------------------|---|
| Description of EUT .....          | 3 |
| Configuration of Test Setup ..... | 4 |
| List of Support Equipment.....    | 6 |

## Chapter 2 Conducted Emission Test

|                                |   |
|--------------------------------|---|
| Test Condition and Setup.....  | 8 |
| Conducted Test Placement ..... | 9 |

## Chapter 3 Peak Power Measurement (Frequency Band: 26.96 ~ 27.28)

|                     |    |
|---------------------|----|
| Test Setup .....    | 10 |
| Test Procedure..... | 10 |

## Chapter 4 Radiated Emission Test

|                               |    |
|-------------------------------|----|
| Test Condition and Setup..... | 11 |
| Radiated Test Placement.....  | 12 |

## Appendix A :

|                             |    |
|-----------------------------|----|
| Conducted test result ..... | 13 |
|-----------------------------|----|

## Appendix B :

|   |    |
|---|----|
| Peak Power and Radiated test result ..... | 14 |
|---|----|

## Appendix C :

|                                |    |
|--------------------------------|----|
| Band Edge of Measurement ..... | 18 |
|--------------------------------|----|

## ***Chapter 1 Introduction***

### ***Description of EUT:***

**EUT** : Wireless Optical Mouse  
**Model No.** : CHIC 1465UP; CHIC 1462UP; CHIC 2400;  
350WL Ami Mouse Wireless Optical  
**Product name** : Wireless Optical Mouse  
**FCC ID** : IOW1465UP  
**Frequency Range** : 26.96 – 27.28 MHz  
**Power Type** : Transmitter: Powered by two 1.5VDC AA batteries

\*This EUT has two channels (each with 256 IDs):

1. 27.1000 MHz
2. 27.0500 MHz

\*Battery and Charging Notice

1. At the first time of usage, please charge the batteries at least 6 to 8 hours.
2. Recommendation: please do not use the mouse during charge periods.
3. The LED indicator or the scroll wheel on the mouse will light while the mouse is low battery. Please change or recharge the batteries immediately.
4. Press any button to wake up the mouse while the mouse is in the sleeping mode.

### ***Test method:***

All measurements contained in this report were performed according to the techniques described in Measurement procedure ANSI C63.4 – 1992.

Pretest was found that the emission of operating mode is worse than standby mode. So, The final test is made at the operating mode.


During the measurement, there are two channel and three modes tested: “Operating CH-1“, “Operating CH-2“ and “Charging“ modes. The pretest was found out the testing mode: “Operating CH-1“ and “Charging“ were the worse cases and we only recorded worse cases in this report.

While testing, the EUT was made to transmit continuously and adjusted at a position, which transmitted the maximum emission.

The test placement as the photographs showed is the worst case emission placed. (If the emission is close to the ambient, the resolution BW and view resolution will be reduced and the data will be recorded by detection of maximum hold peak mode.)

***The testing configuration of test setup is showing in the next page.***


***Configuration of Test Setup(Test mode: “Normal”)***

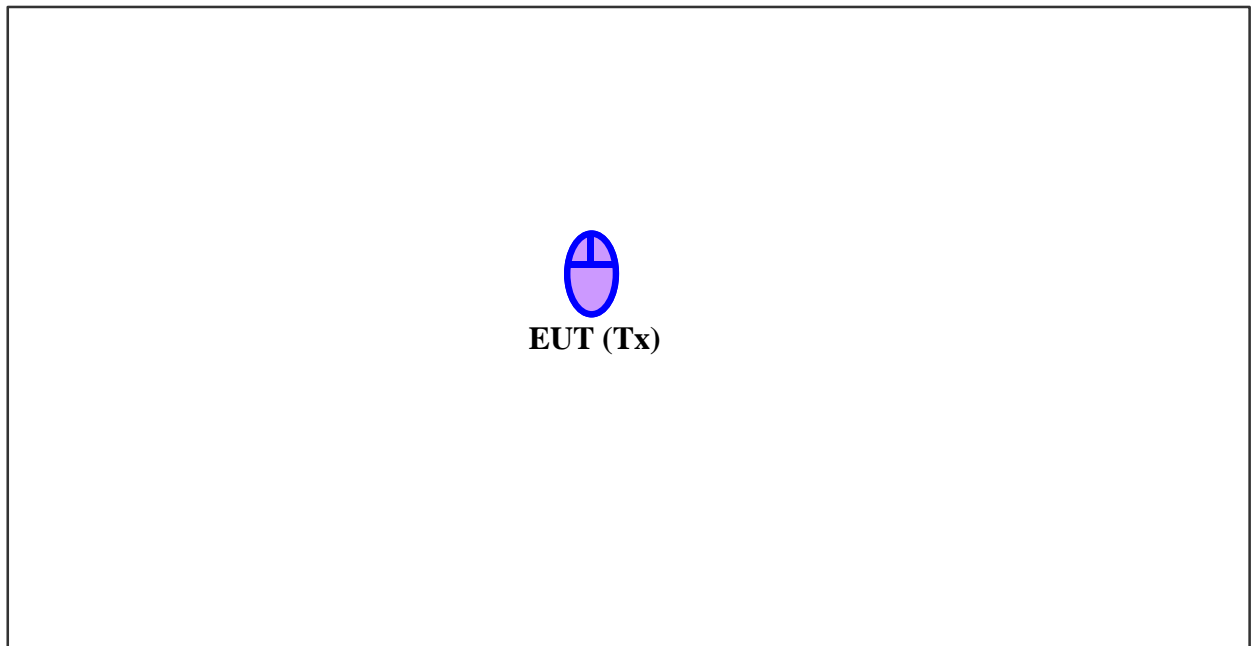

**EUT:**

Put two AA size, 1.5V battery into the battery cell of EUT, powers the subject device.  
The EUT does not be connected with any product.

**Configuration of Test Setup (Test mode: "Charging")**

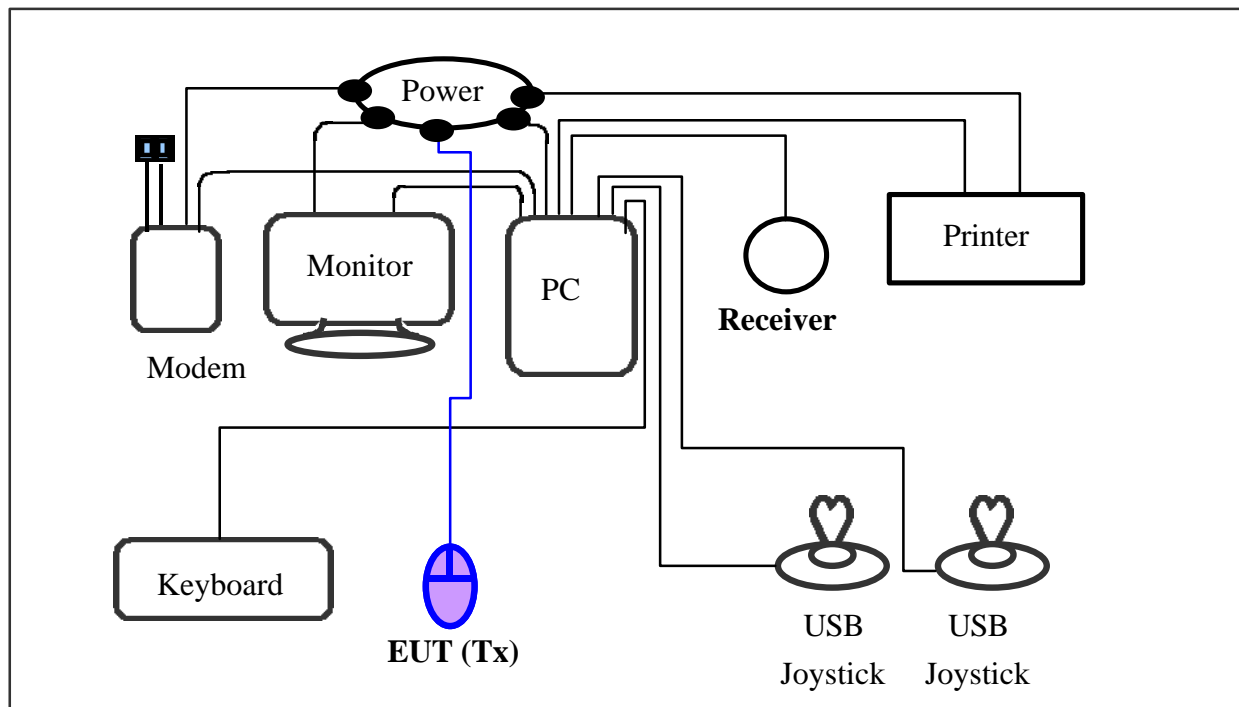

**Connections:**

**PC:**

- \*Serial Port --- via a 110cm shielded RS-232 cable to an external modem.
  - \*Monitor Port --- a monitor with 1.5m length data cable.
  - \*Keyboard port --- a keyboard with 1.5m length data cable.
  - \*Mouse port --- Receiver.
  - \*USB port A --- a USB joystick with 1.5m long, shielded, no ferrite bead data cable.
  - \*USB port B --- a USB joystick with 1.5m long, shielded, no ferrite bead data cable.
- (Each port on PC is connected with suitable device)

**EUT:**

- \*Put two AA size, 1.5V battery into the battery cell of EUT, powers the subject device.  
The EUT does not be connected with any product.
- \*Power jack --- via a 1.88m long power cable with a AC/DC adaptor (MODEL: TL-35GD-060500; INPUT: 230VAC 50Hz; OUTPUT: 6VDC 300mA).

**List of Support Equipment**

**Conducted (Radiated) test:**

**PC : HP Brio 85xx 6/350**

Model No. : D6928A

Serial No. : SG91801443

FCC ID : Doc Approved

Power type : 100 ~ 230VAC / 50 ~ 60Hz, 5A, Switching

Power cord : Non-shielded, 2.33m long, Plastic, No ferrite core

**Monitor : HP pavilion mx70**

Model No. : P1283A

Serial No. : THTBR00257

FCC ID : DOC Approved

Power type : 100 ~ 240V AC 15A 50/60Hz

Power cord : Shielded, 1.83m long, No ferrite core

Data cable : Shielded, 1.46m (1.80m) long, with two ferrite cores (no ferrite core)

**Printer : HP**

Model No. : C2642A

Serial No. : SG69A196GV

FCC ID : B94C2642X

Power type : 230 VAC, 50Hz

Power cord : Non-shielded, 2m long, no ferrite core

Data cable : Shielded, 1.84m long, no ferrite core

**Modem : ACEEX**

Model No. : DM-1414V

FCC ID : IFAXDM1414

Power type : 120VAC, 60Hz/ 9VAC, 1A

Power cord : Non-shielded, 1.9m long, no ferrite cord

Data cable : RS232, Shielded, 1.2m long, no ferrite core  
RJ11C x 2, 7' long non-shielded, no ferrite core

**Keyboard** : **Logitech SK-720C**  
Model No. : Y-SA2  
Serial No. : SCC04514357  
FCC ID : GYUR49SK  
Power type : By PC  
Data cable : Shielded, 1.73m long, with ferrite core

**USB Joystick** : **Padix**  
Model No. : QF-606U, QF-707U  
Serial No. : 8100848  
FCC ID : Doc Approval  
Power type : Powered by PC  
Power Cable : Shielded, 1.5M long, No ferrite bead data cable

**Receiver** : **Chic Technology Corp.**  
Model No. : C105R (CHIC 1405UP)  
Serial No. : SCC04514357  
FCC ID : N/A, Doc Approval (IOW1405UP)  
Power type : By PC  
Data cable : Shielded, 1.43m long, with ferrite core  
Nemko Project No.: 200225145

## ***Chapter 2 Conducted Emission Test***

### ***Test Condition and Setup:***

All the equipment is placed and setup according to the ANSI C63.4 – 1992. The EUT is assembled on a wooden table that is 80 cm high, is placed 40 cm from the back-wall that is a vertical conducting plane. One LISN is for EUT, the other LISN is for support equipment. They are all placed on the conductive ground. The EUT's LISN connect a line switch box for selecting L1 or L2, then connect to a preamplifier and Spectrum.

The spectrum measured from 150KHz to 30MHz. Conducted emission levels are detected at max. peak mode. But if the max. peak mode failed or over average limit, it will be measured by QP and average detection mode using the Receiver.

While testing, there is the worst-emission plot printed at peak detection mode, and there are more than 6 highest emissions relative to limit recorded. The plot is kept as the original data, not included in test report.

### ***List of test Instrument :***

| <u>Instrument Name</u> | <u>Model No.</u> | <u>Brand</u> | <u>Serial No.</u> | <u>Calibration Date</u> |                  |
|------------------------|------------------|--------------|-------------------|-------------------------|------------------|
|                        |                  |              |                   | <u>Last time</u>        | <u>Next time</u> |
| Receiver               | SCR3102          | SCHAFFNER    | 012               | 03/29/02                | 03/28/03         |
| LISN (EUT)             | 3825/2           | EMCO         | 9411-2284         | 06/10/02                | 06/09/03         |
| LISN (Support E.)      | 3825/2           | EMCO         | 9210-2007         | 06/14/02                | 06/13/03         |
| Preamplifier           | EQ3-006          | TRC          | -----             | 05/14/02                | 05/13/03         |
| Line switch box        | EQ3-007          | TRC          | -----             | 05/14/02                | 05/13/03         |

The level of confidence of 95% , the uncertainty of measurement of conducted emission is  $\pm 2.4$  dB .

### ***Test Result: Pass (Appendix A)***




***Conducted Test Placement: (Photographs)***



### Chapter 3 Peak Power Measurement (Frequency Band: 26.96 ~ 27.28)

#### Test Setup:

##### 1. Test Setup:

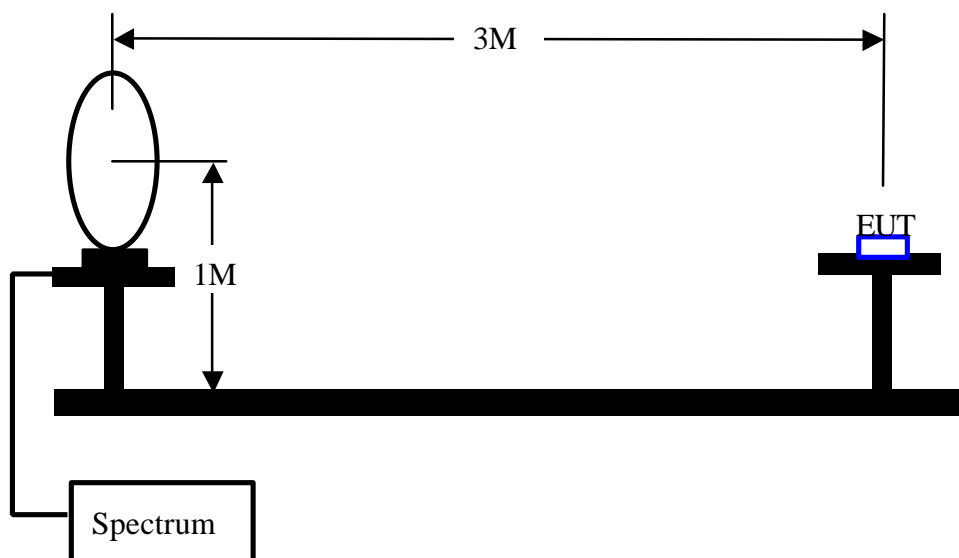

##### 2. Test Procedure:

- The EUT was setup in the anechoic chamber as shown above.
- The loop antenna was located upon its plane vertical, 3-meter distance from the EUT. The center of the loop is 1-meter above the ground plane.
- In order to find the maximum radiation, the EUT was rotated 360°. The measuring antenna was rotated about its axis at each azimuth about the EUT.

#### List of test Instrument :

| Instrument Name  | Model No. | Brand     | Serial No. | <u>Calibration Date</u> |           |
|--|-----------|-----------|------------|-------------------------|-----------|
|  |           |           |            | Last time               | Next time |
| Receiver   | SCR3102   | SCHAFFNER | 012        | 03/29/02                | 03/28/03  |
| Control Box  | TRC-CB-2  | TRC       | CB-002     | N/A                     | N/A       |
| Antenna  | 6502      | EMCO      | 9206-2777  | 06/10/02                | 06/09/03  |
| Open test side (Antenna, Amplify, cable calibrated together) |           |           |            | 05/16/02                | 05/15/03  |

The level of confidence of 95% , the uncertainty of measurement of radiated emission is  $\pm 4.96$  dB .

#### Test Result : Appendix A

## **Chapter 4 Radiated Emission Test**

### **Test Condition and Setup:**

**Pretest :** Prior to the final test ,the EUT is placed in an anechoic chamber, and scan from 30MHz to 1GHz. The devices rotated through three orthogonal axes to determine which attitude and configuration produces the highest emission relative to the limit. This is done to ensure the radiation exactly emits form the EUT.

**Final test:** Final radiation measurements is made on a **3 – meter** open-field test site. The EUT's maximum emission of radiation is placed on a nonconductive table, which is 0.8m height, the top surface is 1.0 x 1.5 meter. All placement is according to ANSI C63.4 - 1992.

The emissions was examined from 30 MHz to 1000 MHz measured by receiver.

The whole range Antenna is used to measure frequency from 30 MHz to 1 GHz. The final test is used the receiver.

Measure more than six top marked frequencies generated form pretest by computer step by step at each frequency. The EUT is rotated 360 degrees, and antenna is raised and lowered from 1 to 4 meters to find the maximum emission levels. The antenna is used with both horizontal and vertical polarization.

Appropriated preamplifier, which is made by TRC is used for improving sensitivity and precautions is taken to avoid overloading. The spectrum analyzer' s 6dB bandwidth is set to 120 KHz, and the EUT is measured at quasi-peak mode.

If the emission is close to the frequency band of ambient, the tester will recheck the data and the corrected data will be written in the test data sheet. If the emission is just within the ambient, the data from shield room will be taken as the final data.

### **List of test Instrument :**



| Instrument Name  | Model No. | Brand     | Serial No. | <u>Calibration Date</u> |           |
|--|-----------|-----------|------------|-------------------------|-----------|
|  |           |           |            | Last time               | Next time |
| Receiver   | SCR3102   | SCHAFFNER | 012        | 03/29/02                | 03/28/03  |
| Control Box  | TRC-CB-2  | TRC       | CB-002     | N/A                     | N/A       |
| Antenna  | VULB 9160 | SCHAFFNER | 4188       | 11/29/01                | 11/29/02  |
| Open test side (Antenna, Amplify, cable calibrated together) |           |           |            | 05/16/02                | 05/15/03  |

The level of confidence of 95% , the uncertainty of measurement of radiated emission is  $\pm 4.96$  dB .

### **Test Result : Pass (Appendix A)**



***Radiated Test Placement: (Photographs)***

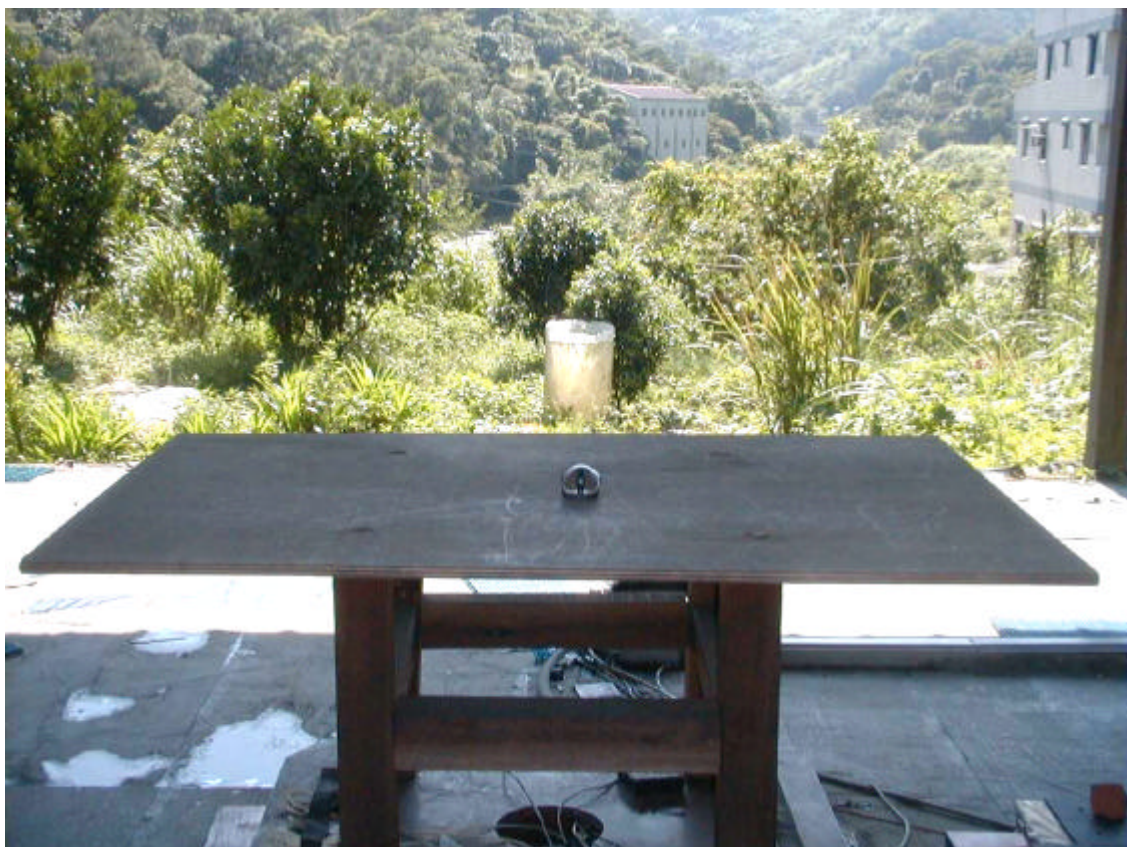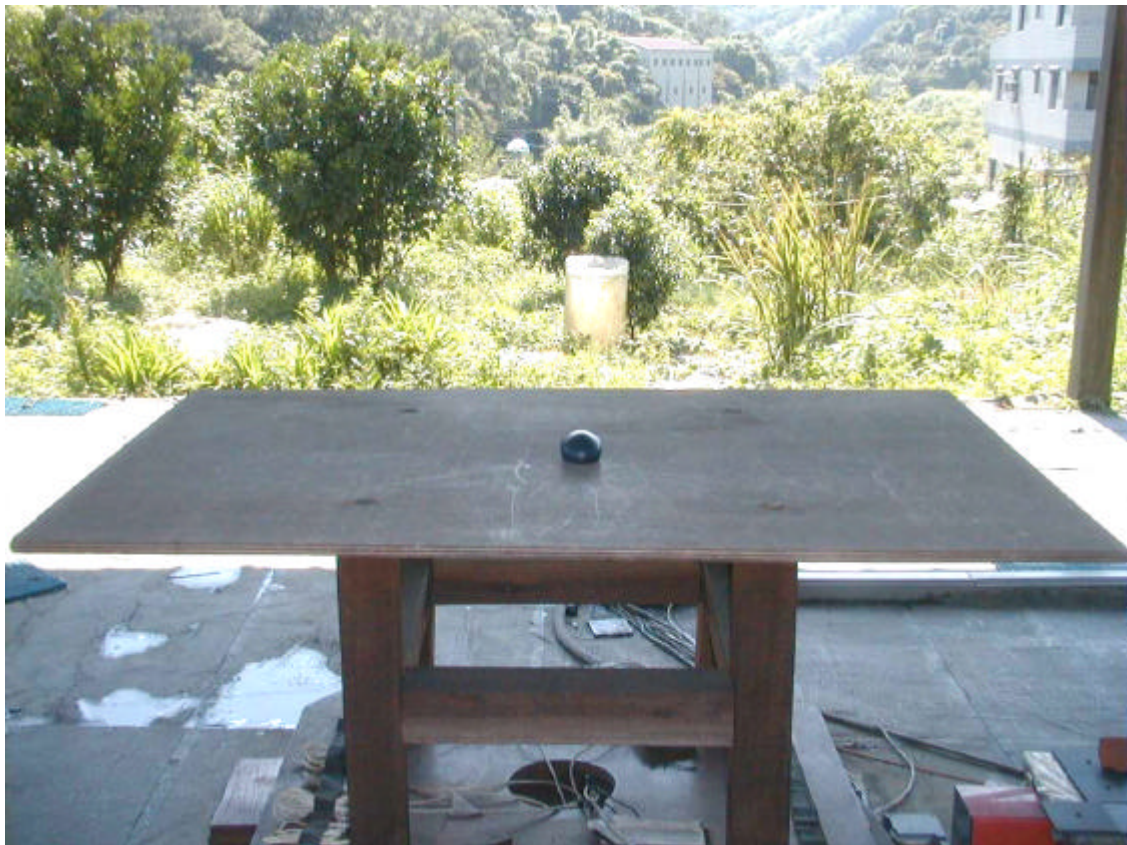

## Appendix A

### Conducted Emission Test Result: (Test mode: Charging)

Testing room :      Temperature : 21 ° C      Humidity : 72 % RH

#### Line 1

| Frequency<br>(KHz) | READING AMPLITUDE |                      |                   | LIMIT                |                   | Margin<br>(dB) |
|--------------------|-------------------|----------------------|-------------------|----------------------|-------------------|----------------|
|                    | Peak<br>(dBmV)    | Quasi-Peak<br>(dBmV) | Average<br>(dBmV) | Quasi-Peak<br>(dBmV) | Average<br>(dBmV) |                |
| 499.00             | 30.84             | ***.**               | ***.**            | 48.00                | ***.**            | -17.16         |
| 604.00             | 30.85             | ***.**               | ***.**            | 48.00                | ***.**            | -17.15         |
| 705.00             | 29.40             | ***.**               | ***.**            | 48.00                | ***.**            | -18.60         |
| 1113.00            | 29.57             | ***.**               | ***.**            | 48.00                | ***.**            | -18.43         |
| 1215.00            | 28.56             | ***.**               | ***.**            | 48.00                | ***.**            | -19.44         |
| 1516.00            | 30.82             | ***.**               | ***.**            | 48.00                | ***.**            | -17.18         |
| 1623.00            | 30.89             | ***.**               | ***.**            | 48.00                | ***.**            | -17.11         |
| 27090.00           | 40.79             | ***.**               | ***.**            | 48.00                | ***.**            | -7.21          |
| ---                | ---               | ---                  | ---               | ---                  | ---               | ---            |
| ---                | ---               | ---                  | ---               | ---                  | ---               | ---            |

#### Line 2

| Frequency<br>(KHz) | READING AMPLITUDE |                      |                   | LIMIT                |                   | Margin<br>(dB) |
|--------------------|-------------------|----------------------|-------------------|----------------------|-------------------|----------------|
|                    | Peak<br>(dBmV)    | Quasi-Peak<br>(dBmV) | Average<br>(dBmV) | Quasi-Peak<br>(dBmV) | Average<br>(dBmV) |                |
| 499.00             | 32.17             | ***.**               | ***.**            | 48.00                | ***.**            | -15.83         |
| 604.00             | 30.79             | ***.**               | ***.**            | 48.00                | ***.**            | -17.21         |
| 705.00             | 30.55             | ***.**               | ***.**            | 48.00                | ***.**            | -17.45         |
| 793.00             | 28.24             | ***.**               | ***.**            | 48.00                | ***.**            | -19.76         |
| 898.00             | 28.59             | ***.**               | ***.**            | 48.00                | ***.**            | -19.41         |
| 11060.00           | 29.30             | ***.**               | ***.**            | 48.00                | ***.**            | -18.70         |
| 27090.00           | 38.56             | ***.**               | ***.**            | 48.00                | ***.**            | -9.44          |
| ---                | ---               | ---                  | ---               | ---                  | ---               | ---            |
| ---                | ---               | ---                  | ---               | ---                  | ---               | ---            |
| ---                | ---               | ---                  | ---               | ---                  | ---               | ---            |

\*The reading amplitudes are all under limit.

## Appendix B

### Peak Power Test Result: (Horizontal)(Test mode: Normal)

| Frequency | Reading Amplitude | Correction Factors | Corrected Amplitude | Limit  | Margin |
|-----------|-------------------|--------------------|---------------------|--------|--------|
| MHz       | dBμV/m            | dB                 | dBμV/m              | dBμV/m | dB     |
| 27.1000   | 72.43             | -8.30              | 64.13               | 80.00  | -15.13 |

### Radiated Emission Test Result: (Horizontal) (Test mode: Normal)

Test Conditions:

Testing site :      Temperature : 28 ° C      Humidity : 73 % RH

| Frequency | Reading Amplitude | Ant. Height | Table  | Correction Factors | Corrected Amplitude | Class B Limit | Margin |
|-----------|-------------------|-------------|--------|--------------------|---------------------|---------------|--------|
| MHz       | dBμV/m            | m           | degree | dB                 | dBμV/m              | dBμV/m        | dB     |
| 125.4525  | 39.05             | 2.50        | 48     | -4.72              | 34.33               | 43.52         | -9.19  |
| 197.1525  | 33.82             | 2.50        | 121    | -5.40              | 28.42               | 43.52         | -15.10 |
| 415.6900  | 21.82             | 0.97        | 32     | 2.97               | 24.79               | 46.02         | -21.23 |
| 581.9680  | 27.32             | 0.97        | 328    | 6.15               | 33.47               | 46.02         | -12.55 |
| ***       |                   |             |        |                    |                     |               |        |

Note:

1. Margin = Amplitude – limit, *if margin is minus means under limit.*
2. Corrected Amplitude = Reading Amplitude – Correction Factors
3. Correction factor = Antenna factor + ( Cable Loss – Amplitude gain)  
(For example : 30MHz correction factor = 15.5 + (–15.26) = 0.24 dB/m)

**Peak Power Test Result: (Vertical) (Test mode: Normal)**

| Frequency | Reading Amplitude | Correction Factors | Corrected Amplitude | Limit  | Margin |
|-----------|-------------------|--------------------|---------------------|--------|--------|
| MHz       | dBμV/m            | dB/m               | dBμV                | dBμV/m | dB     |
| 27.1025   | 75.62             | -8.30              | 67.32               | 80.00  | -12.68 |

**Radiated Emission Test Result: (Vertical) (Test mode: Normal)**

Test Conditions:

Testing site : Temperature : 28 ° C Humidity : 73 % RH

| Frequency | Reading Amplitude | Ant. Height | Table  | Correction Factors | Corrected Amplitude | Class B Limit | Margin |
|-----------|-------------------|-------------|--------|--------------------|---------------------|---------------|--------|
| MHz       | dBμV/m            | m           | degree | dB                 | dBμV/m              | dBμV/m        | dB     |
| 126.0025  | 43.43             | 1.00        | 72     | -4.66              | 38.77               | 43.52         | -4.75  |
| 156.0025  | 43.09             | 2.50        | 200    | -4.47              | 38.62               | 43.52         | -4.90  |
| 270.4900  | 37.67             | 1.00        | 306    | -3.02              | 34.65               | 46.02         | -11.37 |
| ***       |                   |             |        |                    |                     |               |        |

Note:

1. Margin = Amplitude – limit, *if margin is minus means under limit.*
2. Corrected Amplitude = Reading Amplitude – Correction Factors
3. Correction factor = Antenna factor + ( Cable Loss – Amplitude gain)  
(For example : 30MHz correction factor = 15.5 + (–15.26) = 0.24 dB/m)

**Peak Power Test Result: (Horizontal)(Test mode: Charging)**

| Frequency | Reading Amplitude | Correction Factors | Corrected Amplitude | Limit  | Margin |
|-----------|-------------------|--------------------|---------------------|--------|--------|
| MHz       | dBμV/m            | dB                 | dBμV/m              | dBμV/m | dB     |
| 27.1000   | 72.04             | -8.30              | 63.74               | 80.00  | -16.26 |

**Radiated Emission Test Result: (Horizontal) (Test mode: Charging)**

Test Conditions:

Testing site : Temperature : 28 ° C Humidity : 73 % RH

| Frequency | Reading Amplitude | Ant. Height | Table  | Correction Factors | Corrected Amplitude | Class B Limit | Margin |
|-----------|-------------------|-------------|--------|--------------------|---------------------|---------------|--------|
| MHz       | dBμV/m            | m           | degree | dB                 | dBμV/m              | dBμV/m        | dB     |
| 125.4525  | 35.92             | 2.51        | 312    | -4.72              | 31.20               | 43.52         | -12.32 |
| 185.1580  | 29.81             | 1.00        | 296    | -5.96              | 23.85               | 43.52         | -19.67 |
| 334.0500  | 26.12             | 1.00        | 287    | -0.36              | 25.76               | 46.02         | -20.26 |
| ***       |                   |             |        |                    |                     |               |        |

Note:

1. Margin = Amplitude – limit, *if margin is minus means under limit.*
2. Corrected Amplitude = Reading Amplitude – Correction Factors
3. Correction factor = Antenna factor + ( Cable Loss – Amplitude gain)  
(For example : 30MHz correction factor = 15.5 + (–15.26) = 0.24 dB/m)



**Peak Power Test Result: (Vertical) (Test mode: Charging)**

| Frequency | Reading Amplitude | Correction Factors | Corrected Amplitude | Limit  | Margin |
|-----------|-------------------|--------------------|---------------------|--------|--------|
| MHz       | dBμV/m            | dB/m               | dBμV                | dBμV/m | dB     |
| 27.1025   | 76.24             | -8.30              | 67.94               | 80.00  | -12.06 |

**Radiated Emission Test Result: (Vertical) (Test mode: Charging)**

Test Conditions:

Testing site : Temperature : 28 ° C Humidity : 73 % RH

| Frequency | Reading Amplitude | Ant. Height | Table  | Correction Factors | Corrected Amplitude | Class B Limit | Margin |
|-----------|-------------------|-------------|--------|--------------------|---------------------|---------------|--------|
| MHz       | dBμV/m            | m           | degree | dB                 | dBμV/m              | dBμV/m        | dB     |
| 125.4490  | 43.29             | 0.97        | 134    | -4.73              | 38.56               | 43.52         | -4.96  |
| 288.0000  | 25.67             | 2.51        | 180    | -2.69              | 22.98               | 46.02         | -23.04 |
| 384.0663  | 24.19             | 0.97        | 349    | 1.47               | 25.66               | 46.02         | -20.36 |
| ***       |                   |             |        |                    |                     |               |        |


Note:

1. Margin = Amplitude – limit, *if margin is minus means under limit.*
2. Corrected Amplitude = Reading Amplitude – Correction Factors
3. Correction factor = Antenna factor + ( Cable Loss – Amplitude gain)  
(For example : 30MHz correction factor = 15.5 + (–15.26) = 0.24 dB/m)

## Appendix C


**Band Edge of Measurement: (Frequency Band: 26.96 ~ 27.28)**

Lower channel

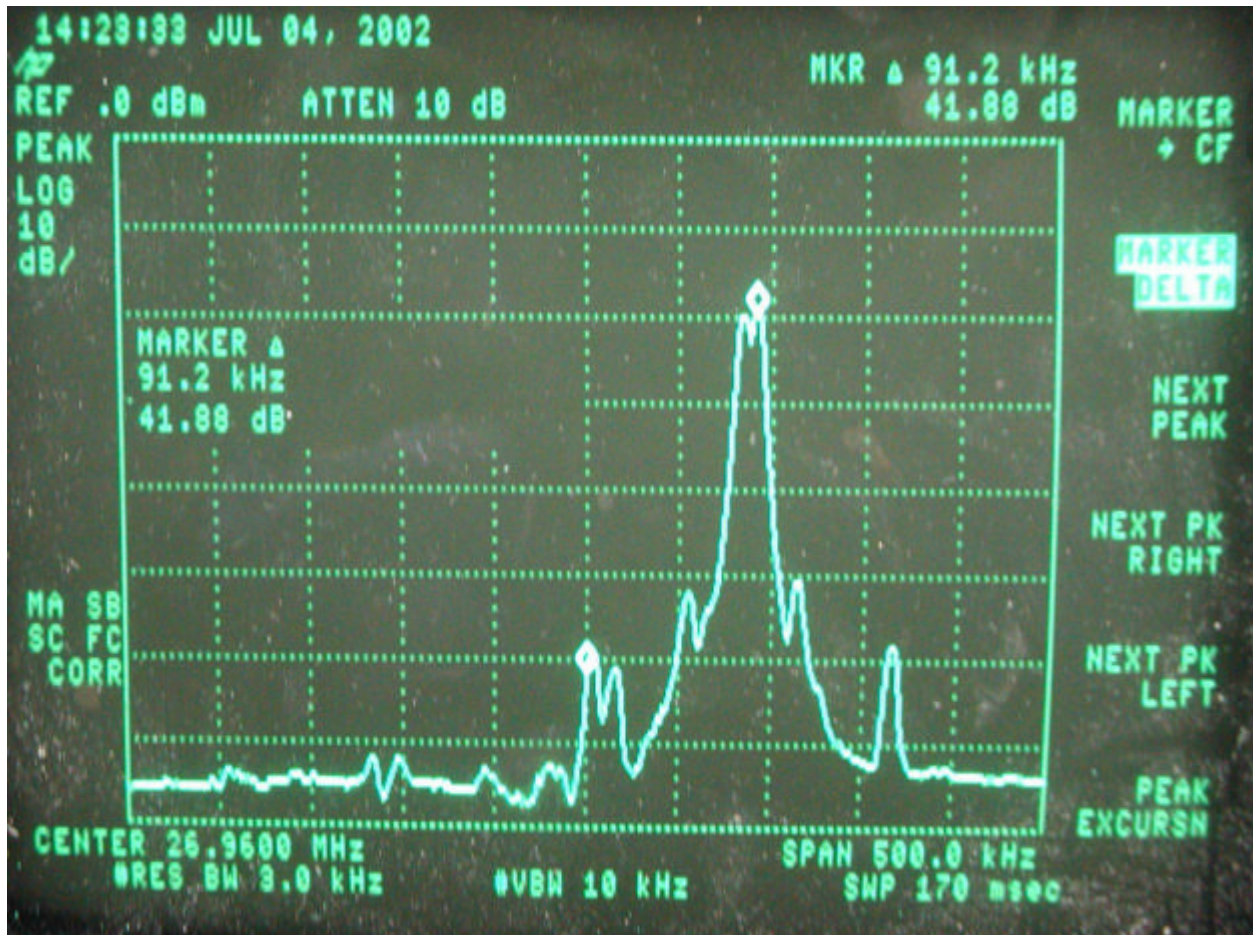

26.96MHz << Class B Limit.

Upper channel:

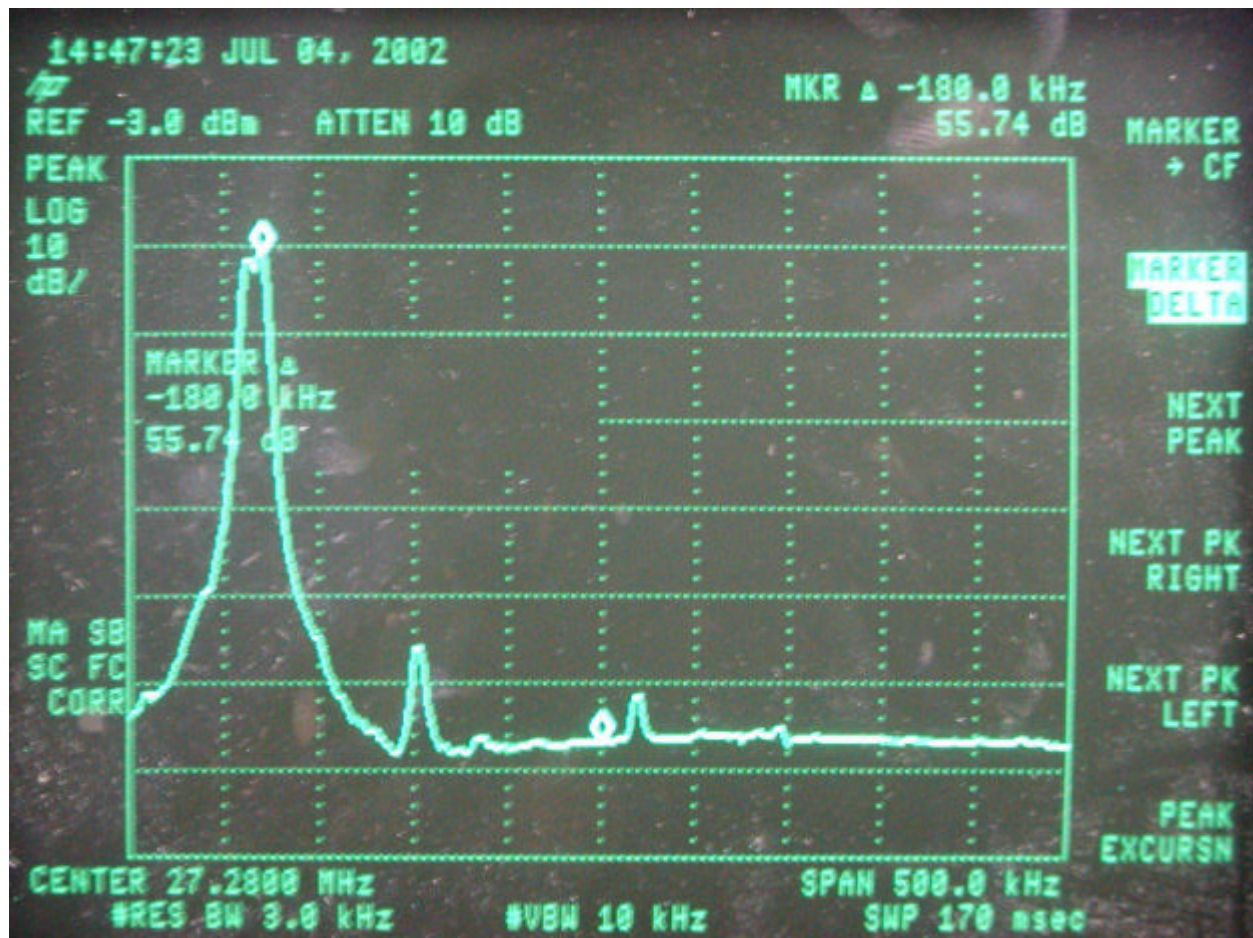

27.28 MHz >> Class B Limit.