




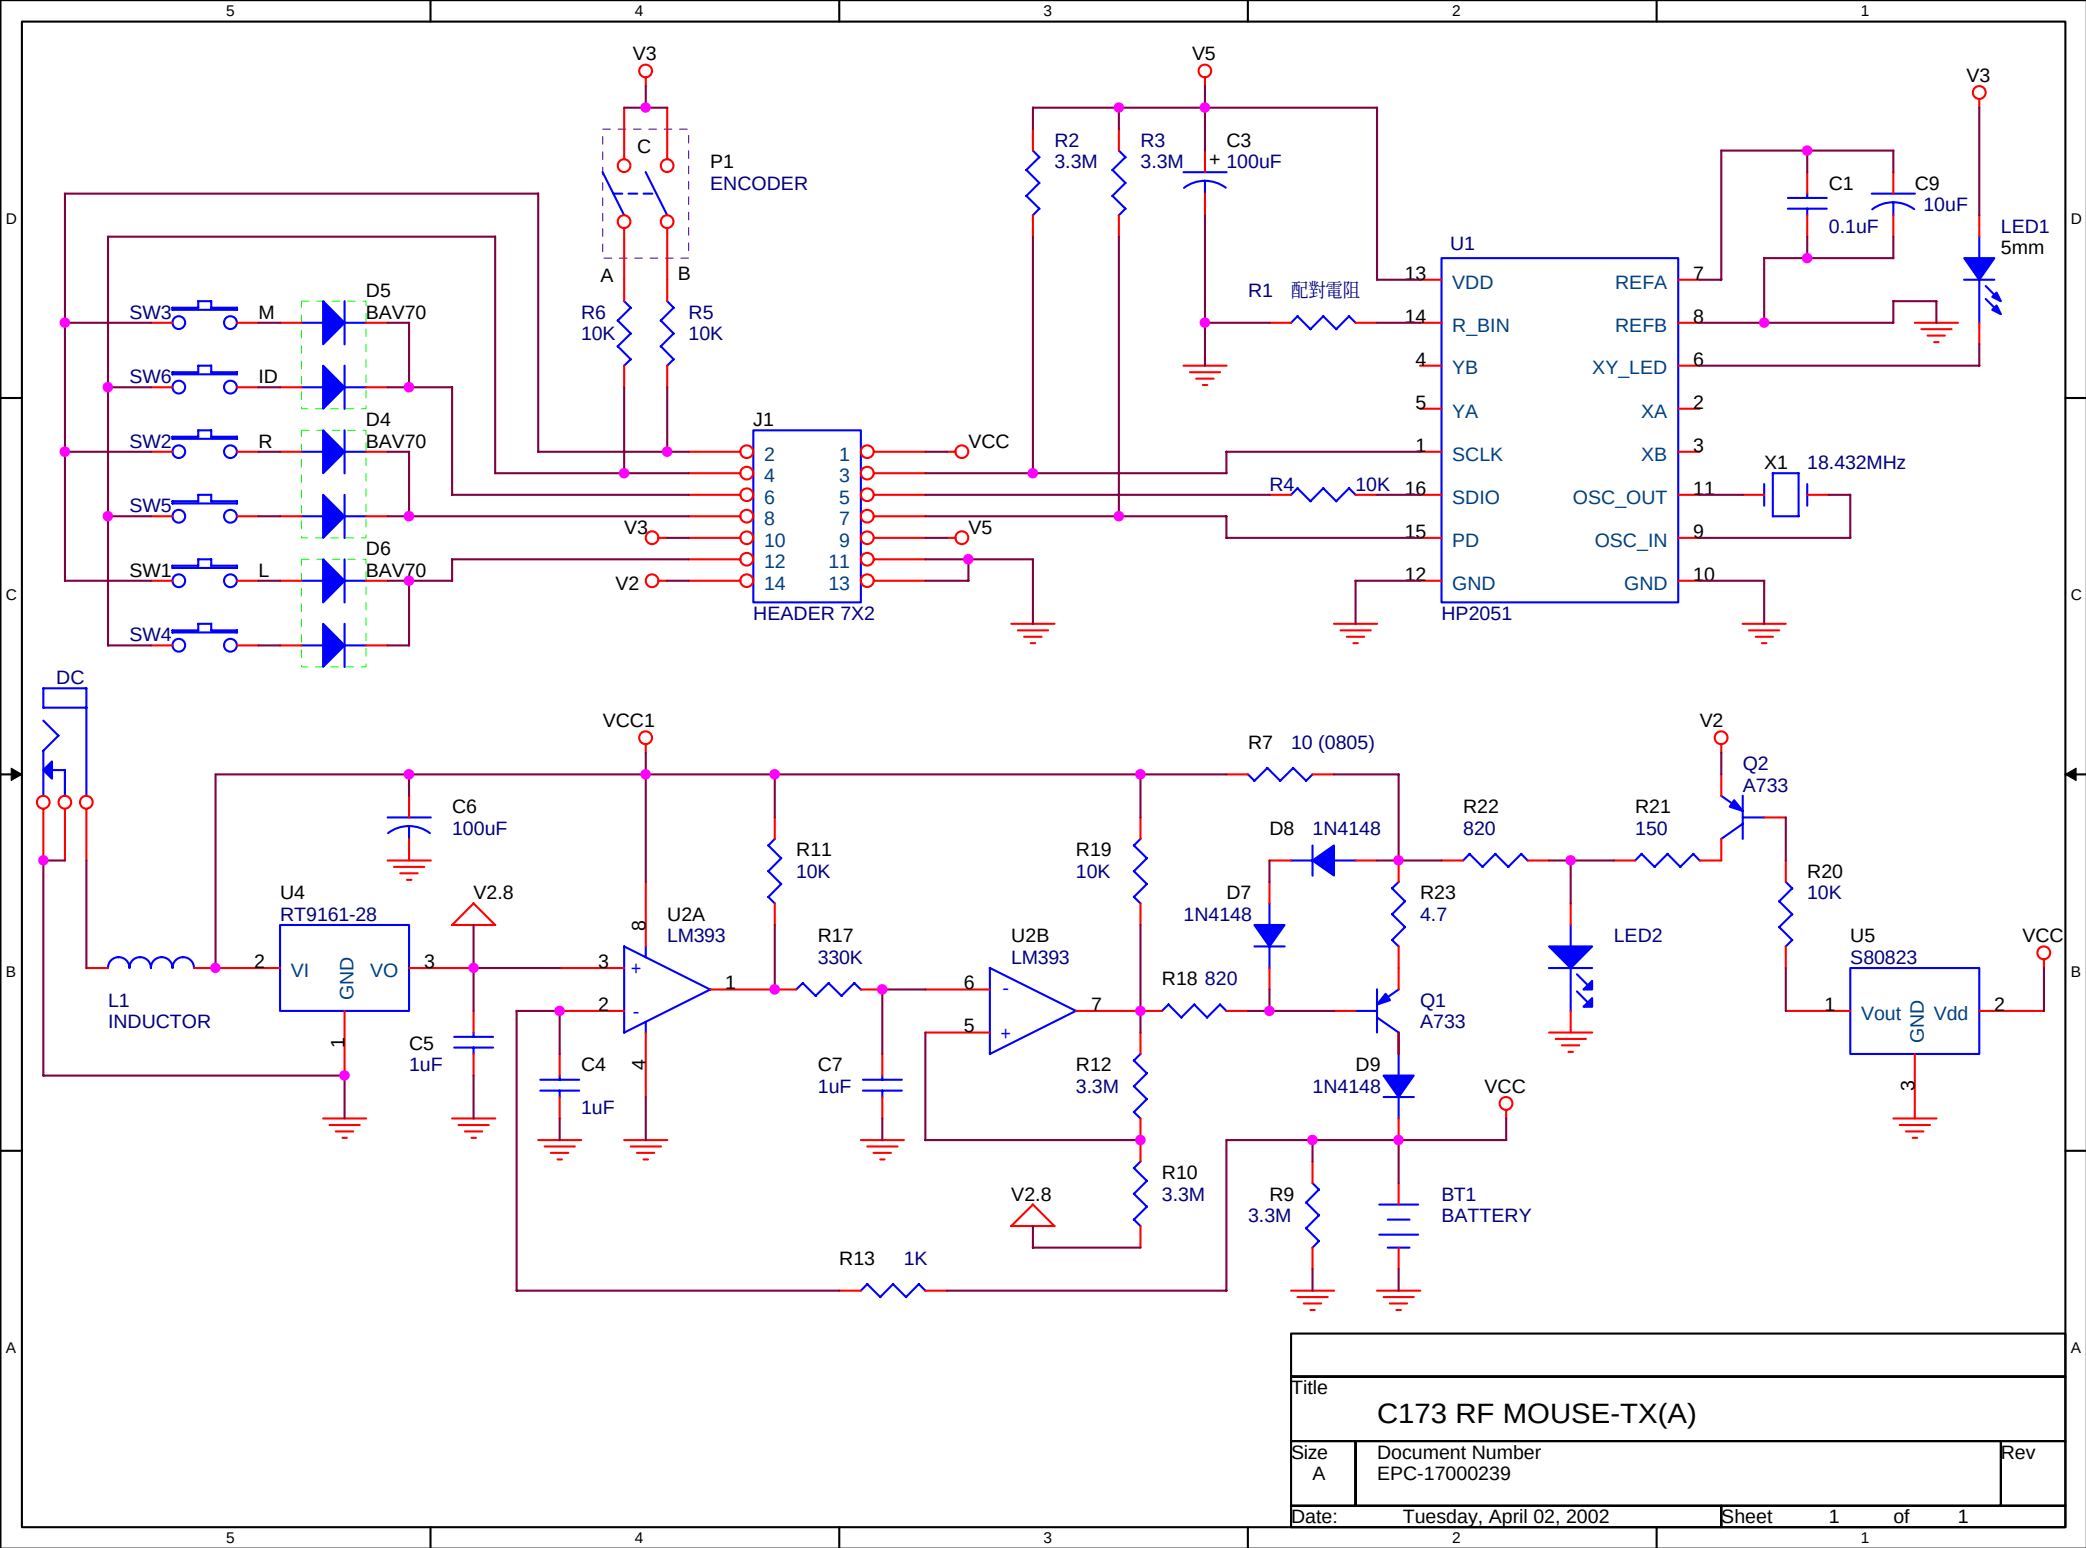


Title		
C173 RF MOUSE-TX(A)		
Size	Document Number	Rev
A	EPC-17000239	
Date:	Tuesday, April 02, 2002	Sheet 1 of 1

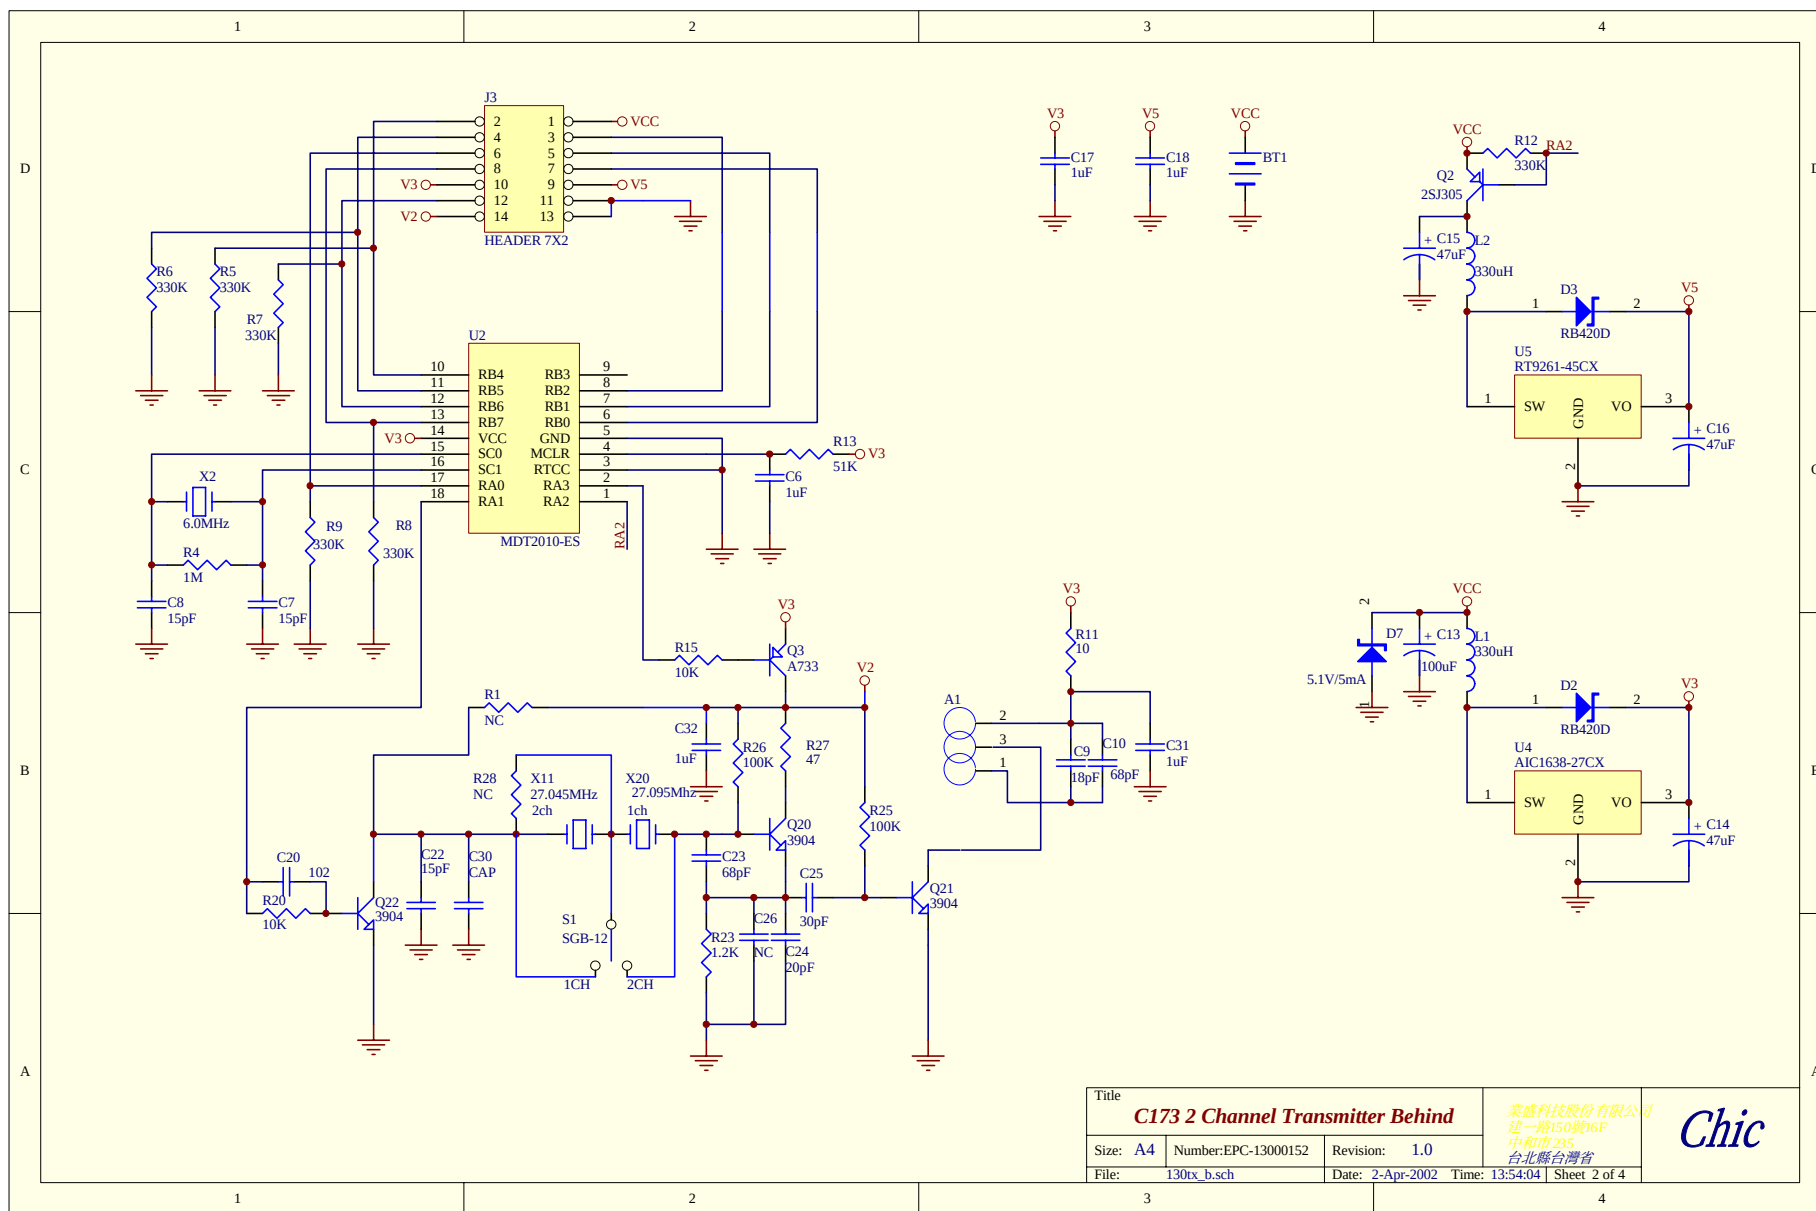

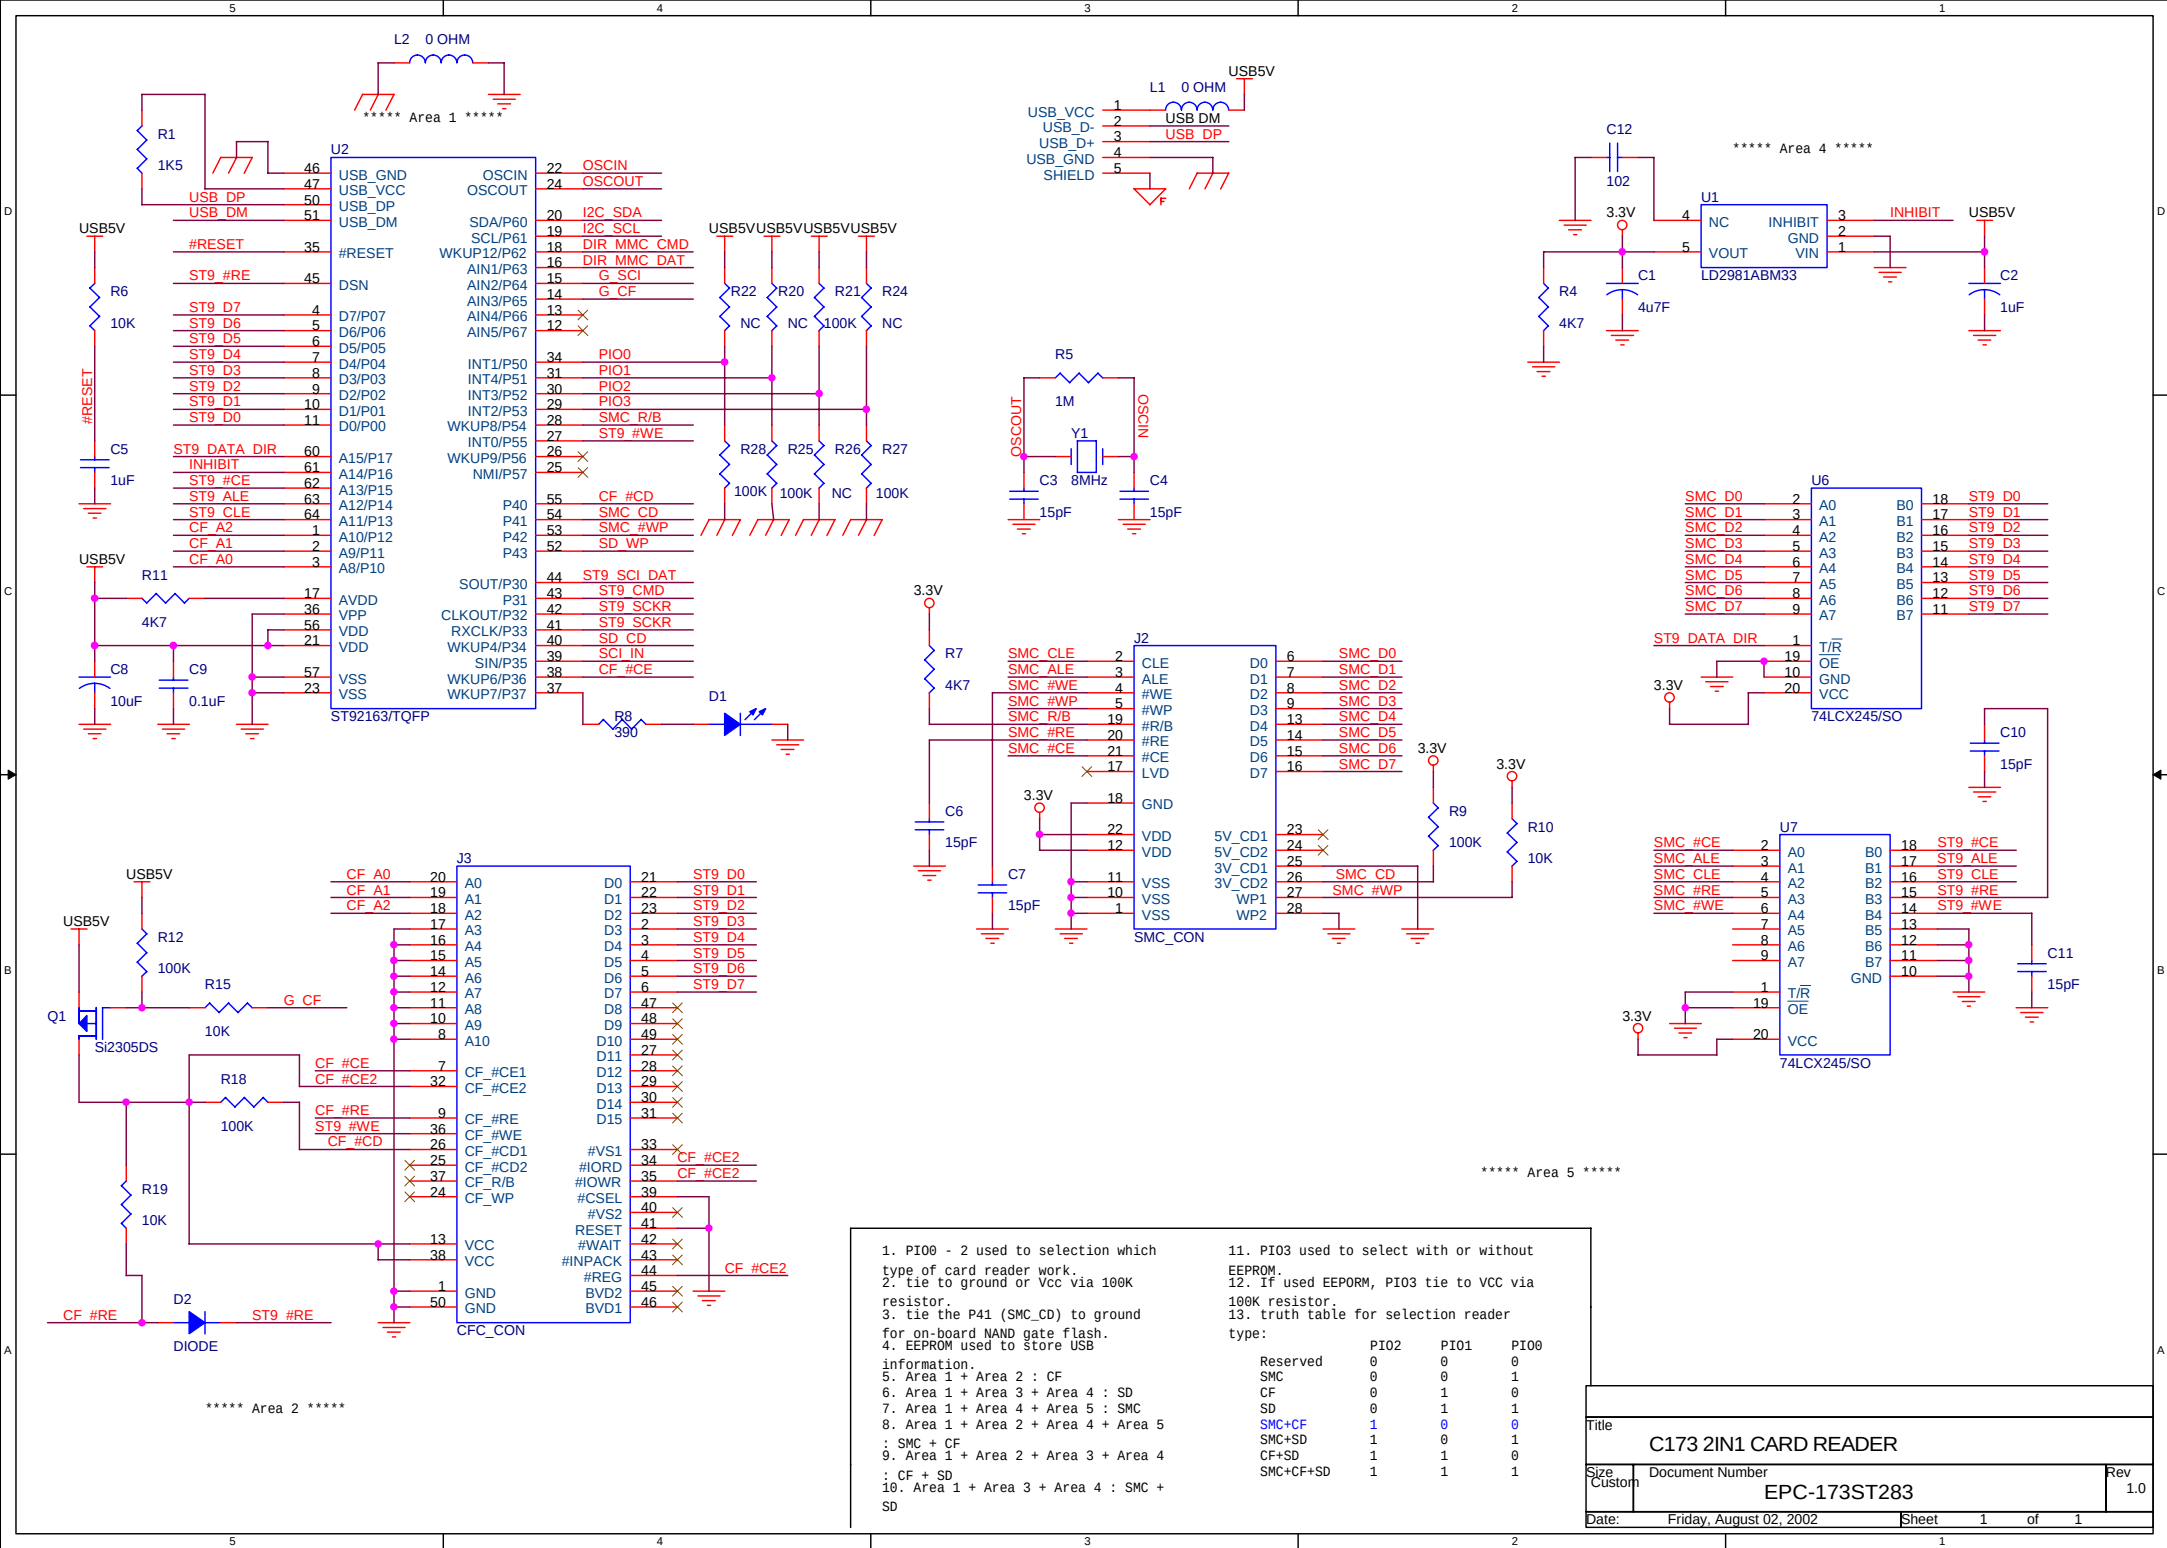

W81181D/SD USB HUb Reference Schematic (Use Poly_Switch)

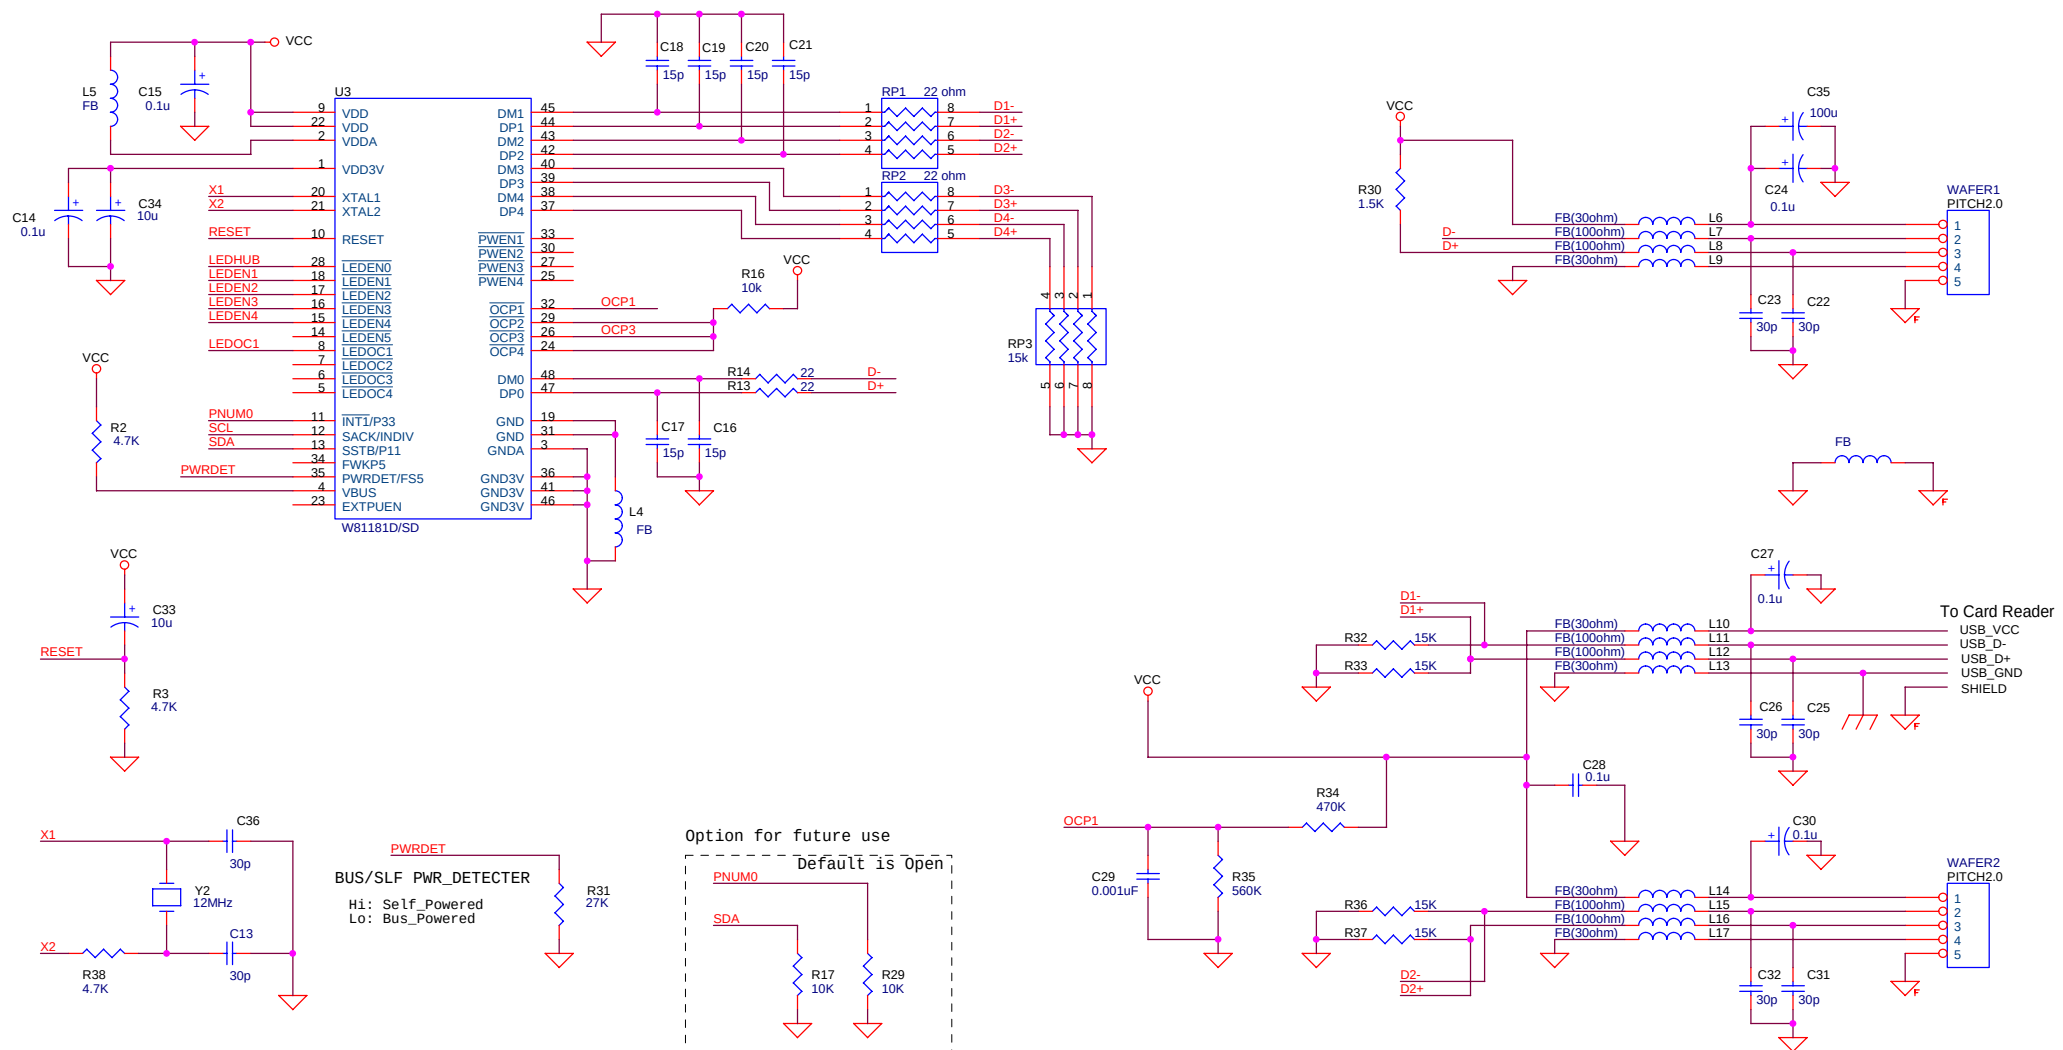

Check Point for Layout:

- a. All of down_stream ports need to be pull-down R(15K) to GND even the port is unused.
- b. Pin 1 VDD3V needs to be connected a C(10uF) to GND only.
Do not use to drive any other circuit.
- c. Pin 4,24,26,29,32 & 35 need to add pull-up resistor to VCC when they are unused.
- d. All of LED pins can be floating if they are unused.

NOTES :

USE PORT

1 PORT	10K	10K
2 PORT	10K	X
3 PORT	X	10K
4 PORT	X	X

