

# APPLICATION For GRANT OF CERTIFICATION

FOR  
Model:  
**DC30**  
2403-2480 MHz  
Low Power Transmitter

FCC ID: IPH-01393

FOR

Garmin International, Inc.  
1200 East 151st Street  
Olathe, KS 66062

Test Report number 080306A

Authorized Signatory: *Scott D Rogers*

**ROGERS LABS, INC.**

4405 West 259<sup>th</sup> Terrace  
Louisburg, KS 66053  
Phone / Fax (913) 837-3214

**TEST REPORT**

For

**Application for Grant of Certification**

For

**Garmin International, Inc.**

1200 East 151st Street  
Olathe, KS 66062  
Phone: (913) 397-8200

Mr. Abe Cox  
Director of Quality Assurance

Model: DC30

Low Power Transmitter  
Frequency Range: 2403 - 2480 MHz

FCC ID: IPH-01393

Test Report Number: 080306A

Test Date: March 6, 2008

Certifying Engineer:

*Scot D Rogers*

Scot D. Rogers  
Rogers Labs, Inc.  
4405 West 259th Terrace  
Louisburg, KS 66053  
Telephone: (913) 837-3214  
FAX: (913) 837-3214

This report shall not be reproduced except in full, without the written approval of the laboratory. This report must not be used by the client to claim product endorsement by NVLAP, NIST, or any agency of the U.S. Government.

Rogers Labs, Inc.  
4405 West 259<sup>th</sup> Terrace  
Louisburg, KS 66053  
Phone/Fax: (913) 837-3214  
Revision 1

Garmin International, Inc.  
Model: DC30  
Test #: 080306A  
Test to: CFR47 Parts 2, 15.249  
File: TstRpt DC30 15249

FCC ID: IPH-01393  
GPN: 011-01902-00  
SN: 2/29  
Page 2 of 30  
Date: April 1, 2008

## Table of Contents

<b>TABLE OF CONTENTS.....</b>	<b>3</b>
<b>FORWARD .....</b>	<b>5</b>
<b>OPINION / INTERPRETATION OF RESULTS .....</b>	<b>5</b>
<b>ENVIRONMENTAL CONDITIONS.....</b>	<b>5</b>
<b>EQUIPMENT TESTED.....</b>	<b>5</b>
<b>APPLICABLE STANDARDS &amp; TEST PROCEDURES .....</b>	<b>6</b>
<b>LIST OF TEST EQUIPMENT .....</b>	<b>6</b>
<b>2.1033(B) APPLICATION FOR CERTIFICATION .....</b>	<b>7</b>
<b>EQUIPMENT FUNCTION AND TESTING PROCEDURES .....</b>	<b>8</b>
Configuration options for the EUT .....	9
AC Line Conducted Emission Test Procedure.....	9
Radiated Emission Test Procedure .....	10
Units of Measurements.....	10
Test Site Locations.....	10
<b>SUBPART C - INTENTIONAL RADIATORS.....</b>	<b>11</b>
<b>ANTENNA REQUIREMENTS .....</b>	<b>11</b>
<b>EMISSIONS IN RESTRICTED BANDS OF OPERATION .....</b>	<b>11</b>
Radiated Emissions in Restricted Bands Data .....	12
Summary of Results for Radiated Emissions in Restricted Bands.....	12
<b>AC LINE CONDUCTED EMISSIONS LIMITS; GENERAL REQUIREMENTS .....</b>	<b>12</b>
AC Line Conducted EMI .....	12
AC Line Conducted Emissions Data (7 Highest Emissions).....	13
Figure One Conducted emissions of EUT line 1 .....	14
Figure Two Conducted emissions of EUT line 2.....	14
Summary of Results for AC Line Conducted Emissions .....	15
<b>RADIATED EMISSIONS LIMITS; GENERAL REQUIREMENTS.....</b>	<b>15</b>
General Radiated Emissions .....	15
Figure Three Radiated Emissions Plot.....	16
Figure Four Radiated Emissions Plot.....	17
Figure Five Radiated Emissions Plot .....	17
Figure Six Radiated Emissions Plot.....	18
Figure Seven Radiated Emissions Plot .....	18
Figure Eight Radiated Emissions Plot.....	19
General Radiated Emissions Data.....	19
Summary of Results for General Radiated Emissions .....	19
<b>OPERATION IN THE BAND 2,400-2,483.5 MHZ .....</b>	<b>20</b>



NVLAP Lab Code 200087-0

Figure Nine Occupied Bandwidth.....	21
Figure Ten Operation across Frequency Band.....	21
Figure Eleven Operation at Frequency Band Edge.....	22
Figure Twelve Operation at Frequency Band Edge .....	22
<b>Transmitter Radiated Emissions Data.....</b>	<b>23</b>
<b>Summary of Results for Transmitter Radiated Emissions .....</b>	<b>23</b>
<b>ANNEX.....</b>	<b>24</b>
<b>Annex A Measurement Uncertainty Calculations .....</b>	<b>25</b>
<b>Annex B Test Equipment List For Rogers Labs, Inc. .....</b>	<b>27</b>
<b>Annex C Qualifications .....</b>	<b>28</b>
<b>Annex D FCC Test Site Registration Letter.....</b>	<b>29</b>
<b>Annex E Industry Canada Test Site Registration Letter .....</b>	<b>30</b>

## Forward

The following information is submitted for consideration in obtaining a Grant of Certification for low power intentional radiator per CFR47, October 1, 2007, Paragraph 15.249 Low Power Transmitter, operation in the 2400 - 2483.5 MHz band.

Name of Applicant: Garmin International, Inc.  
1200 East 151st Street  
Olathe, KS 66062

Model: DC30 GPN 011-01902-00

FCC ID: IPH-01393

Frequency Range: 2403 - 2480 MHz.

Operating Power: 1 mW (as design specification, measured 78.5 dB $\mu$ V/m @ 3 meters), for operation in the 2400-2483.5 MHz.

## Opinion / Interpretation of Results

Tests Performed	Results
Antenna Requirements and 15.203	Complies
Emissions as per CFR47 paragraphs 2 and 15.205	Complies
Emissions as per CFR47 paragraphs 2 and 15.207	Complies
Emissions as per CFR47 paragraphs 2 and 15.209	Complies
Emissions as per CFR47 paragraphs 2 and 15.249	Complies

## Environmental Conditions

Ambient Temperature	20.6° C
Relative Humidity	18%
Atmospheric Pressure	30.12 in Hg

## Equipment Tested

<u>Equipment</u>	<u>Serial Number</u>	<u>FCC I.D. #</u>
DC30	2/29	IPH-01393

## Applicable Standards & Test Procedures

In accordance with the Federal Communications Commission, Code of Federal Regulations CFR47, dated October 1, 2007, Part 2, Subpart J, Paragraphs 2.907, 2.911, 2.913, 2.925, 2.926, 2.1031 through 2.1057, applicable parts of paragraph 15, Part 15C paragraph 15.249 the following information is submitted.

Test procedures used are the established Methods of Measurement of Radio-Noise Emissions as described in the ANSI 63.4-2003 Document.

## List of Test Equipment

A Hewlett Packard 8591EM and or 8562A Spectrum Analyzer was used as the measuring device for the emissions testing. The analyzer settings used are described in the following table. Refer to the Appendix for a complete list of Test Equipment.

HP 8591EM SPECTRUM ANALYZER SETTINGS		
CONDUCTED EMISSIONS		
RBW	AVG. BW	DETECTOR FUNCTION
9 kHz	30 kHz	Peak/Quasi Peak
RADIATED EMISSIONS (30 - 1000 MHz)		
RBW	AVG. BW	DETECTOR FUNCTION
120 kHz	300 kHz	Peak/Quasi Peak
HP 8562A SPECTRUM ANALYZER SETTINGS		
RADIATED EMISSIONS (1 - 40 GHz)		
RBW	AVG. BW	DETECTOR FUNCTION
1 MHz	1 MHz	Peak/Average
ANTENNA CONDUCTED EMISSIONS		
RBW	AVG. BW	DETECTOR FUNCTION
120 kHz	300 kHz	Peak

EQUIPMENT	MFG.	MODEL	CAL. DATE	DUE.
LISN	Comp. Design	FCC-LISN-2-MOD.CD	10/07	10/08
LISN	Comp. Design	1762	2/08	2/09
Antenna	ARA	BCD-235-B	10/07	10/08
Antenna	EMCO	3147	10/07	10/08
Antenna	EMCO	3143	5/07	5/08
Analyzer	HP	8591EM	5/07	5/08
Analyzer	HP	8562A	2/08	2/09

## 2.1033(b) Application for Certification

(1) Manufacturer: Garmin International, Inc.  
1200 East 151st Street  
Olathe, KS 66062  
Telephone: (913) 397-8200

(2) FCC Identification: FCC I.D.: IPH-01393

(3) Copy of the installation and operating manual: Refer to exhibit for Draft Instruction Manual.

(4) Description of Circuit Functions, Device Operation: The transceiver is used for short-range data communications between two compliant units. A user initiates the transmission from another unit with a key press and that unit begins the communication process with the EUT. The microcontroller then sends and receives data from the transceiver.

(5) Block Diagram with Frequencies: Refer to exhibit for the Block Diagram

(6) Report of measurements showing compliance with the pertinent FCC/IC technical requires are provided in this report.

(7) Photographs of equipment are provided in application exhibits.

(8) Peripheral equipment or accessories for the equipment. No optional equipment was available other than that shown in the configuration diagram. The available configuration options were investigated for this report with worst-case data presented.

(9) Transition Provisions of 15.37 are not being requested.

(10) The equipment is not a scanning receiver.

(11) The equipment is not a transmitter operating in the 59-64 GHz frequency range.

## Equipment Function and Testing Procedures


The DC30 transmitter is mounted to a collar for placement on animals. The unit functions while attached to a collar or harness allowing a sports enthusiast to locate and track an animal wearing the harness and transmitter. The EUT incorporates two separate transmitter sections, one operating on the approved MURS frequencies governed by rule of CFR47 95.632. The other functioning as a low power license exempt intentional radiator operating between 2.4-2.4835 GHz governed by CFR47 15.249. The low power transmitter allows for channel selection and synchronization of the VHF transmitter with the remote receiver.

The MURS transmissions are received on the synchronized receiver carried by the sports enthusiast allowing them to monitor the location of the transmitter.


The EUT enclosure is sealed allowing no access inside. This approach hardens the equipment to adverse conditions the tracked animal may experience. The EUT offers no transmitter power adjustment to the end user. The internal battery may be recharged using the approved charging accessories. Two charging options are available, AC/DC wall adapter or DC car/cigarette lighter adapter. Test results in this report relate only to the products described in this report.

**Configuration options for the EUT**

1. DC30 (GPN: 011-01902-00) connected to car cigarette lighter adapter (GPN: 320-00340-00), and external VHF antenna (GPN: 700-00027-00).

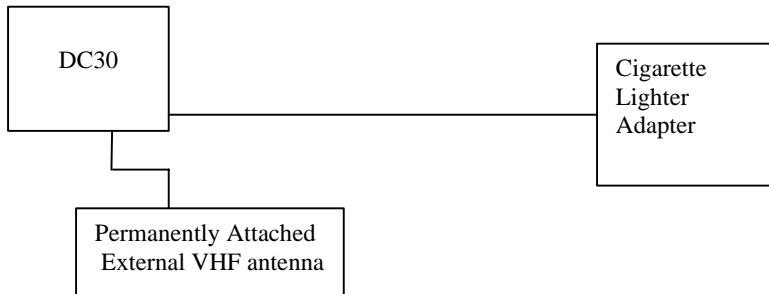

2. DC30's Li-Ion battery charged by the AC wall brick power supply (GPN: 362-00045-00).

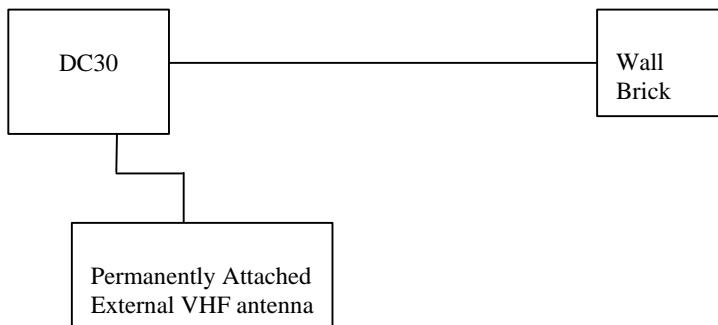**AC Line Conducted Emission Test Procedure**

Testing for the AC line-conducted emissions was performed as defined in section 7.2.4 of ANSI C63.4. The test setup, including the EUT, was arranged in the test configurations as shown above and placed on a 1 x 1.5-meter wooden bench, 0.8 meters high located in a screen room. The power lines of the system were isolated from the power source using a standard LISN with a 50- $\mu$ Hy choke. EMI was coupled to the spectrum analyzer through a 0.1  $\mu$ F capacitor internal to the LISN. The LISN was positioned on the floor beneath the wooden bench supporting the

EUT. The power lines and cables were draped over the back edge of the table.

### **Radiated Emission Test Procedure**

Testing for the radiated emissions was performed as defined in sections 8.3 and 13.1 of ANSI C63.4. The EUT was arranged in the test configurations as shown above and placed on a rotating 1 x 1.5-meter wooden platform 0.8 meters above the ground plane at a distance of 3 meters from the FSM antenna. EMI energy was maximized by equipment placement, raising and lowering the FSM antenna, changing the antenna polarization, and by rotating the turntable. Each emission was maximized before final data was taken using a spectrum analyzer. Refer to photographs in exhibits for EUT placement used during testing.

### **Units of Measurements**

Conducted EMI: Data is in dB $\mu$ V; dB referenced to one microvolt.

Radiated EMI: Data is in dB $\mu$ V/m; dB/m referenced to one microvolt per meter.

### Radiated Emissions Calculations:

Note: The emissions requirements are expressed for measurement in dB $\mu$ V/m when the measurement is taken at a distance of 3 meters. Data taken for this report was taken at a distance of 3 meters.

### **Test Site Locations**

Conducted EMI ROGERS LABS, INC. located at 4405 W. 259<sup>th</sup> Terrace, Louisburg, KS.

Radiated EMI The radiated emissions tests were performed at Rogers Labs, Inc. 3 meters Open Area Test Site (OATS) located at 4405 W. 259th Terrace, Louisburg, KS.



NVLAP Lab Code 200087-0

Site Approval Refer to Annex for FCC Site Registration Letter, Reference 90910, and Industry Canada Site Registration Letter Reference IC 3041-1.

## **Subpart C - Intentional Radiators**

As per CFR47 Part 15, Subpart C the following information is submitted for consideration in obtaining a grant of certification for unlicensed intentional radiators.

### **Antenna Requirements**

The unit is produced with a permanently attached antenna inside the sealed plastic case. No provisions for modification or alterations of the antenna configuration are available. The requirements of 15.203 are met there are no deviations or exceptions to the specification.

### **Emissions in Restricted Bands of Operation**

Spurious emissions falling in the restricted frequency bands of operation were measured at the 3-meter OATS. The EUT utilizes frequency, determining circuitry, which generates harmonics falling in the restricted bands. Emissions were investigated at the OATS, using appropriate antennas or pyramidal horns, amplification stages, and a spectrum analyzer. Peak and average amplitudes of frequencies above 1000 MHz were compared to the required limits with worst-case data presented below. Test procedures of ANSI 63.4-2003 paragraphs 13.1 and 8.3.1.2 were used during testing. No other significant emission was observed which fell into the restricted bands of operation. Computed emission values take into account the received radiated field strength, receive antenna correction factor, amplifier gain stage, and test system cable losses.

## Sample Calculations:

$$\begin{aligned}
 \text{Computed Peak (dB}\mu\text{V/m @ 3m)} &= \text{FSM (dB}\mu\text{V)} + \text{A.F. (dB)} - \text{Gain (dB)} \\
 &= 25.0 + 41.1 - 30 \\
 &= 36.1
 \end{aligned}$$

**Radiated Emissions in Restricted Bands Data**

Emission Frequency (MHz)	FSM Horz. (dBμV)	FSM Vert. (dBμV)	Ant. Factor (dB)	Amp. Gain (dB)	RFS Horz. @ 3m (dBμV/m)	RFS Vert. @ 3m (dBμV/m)	Limit @ 3m (dBμV/m)
4806.00	25.0	24.8	41.1	30	36.1	35.9	54.0
4882.00	27.5	22.3	41.1	30	38.6	33.4	54.0
4960.00	26.5	21.3	41.7	30	38.2	33.0	54.0
7323.00	24.1	23.5	36.5	30	30.6	30.0	54.0
7440.00	20.2	21.5	36.7	30	26.9	28.2	54.0

No other emissions found in the restricted bands.

**Summary of Results for Radiated Emissions in Restricted Bands**

The radiated emissions for the EUT meet the requirements for FCC CFR47 Part 15.205 restricted bands of operation. The EUT had a 15.4 dB minimum margin below the limits. Other emissions were present with amplitudes at least 20 dB below the required limits.

**AC Line Conducted emissions limits; general requirements****AC Line Conducted EMI**

The EUT was arranged in a typical equipment battery charging configuration for AC line conducted emissions testing. Testing was performed with the EUT placed on a 1 x 1.5-meter wooden bench 80 cm above the conducting ground plane, floor of a screen room.

The bench was positioned 40 cm away from the wall of the screen room. The LISN was positioned on the floor of the screen room 80-cm from the rear of the EUT. Testing for the line-conducted emissions was as follows. The AC/DC adapter for the EUT was connected to the LISN for line-conducted emissions testing. A

second LISN was positioned on the floor of the screen room 80-cm from the rear of the supporting equipment of the EUT. All power cords except the EUT were then powered from the second LISN. EMI was coupled to the spectrum analyzer through a 0.1  $\mu$ F capacitor, internal to the LISN. Power line conducted emissions testing was carried out individually for each current carrying conductor of the EUT. The excess length of lead between the system and the LISN receptacle was folded back and forth to form a bundle not exceeding 40 cm in length. The screen room, conducting ground plane, analyzer, and LISN were bonded together to the protective earth ground. Preliminary testing was performed to identify the frequencies of each of the emissions, which had the highest amplitudes. The cables were repositioned to obtain maximum amplitude of measured EMI level. Once the worst-case configuration was identified, plots were made of the EMI from 0.15 MHz to 30 MHz then data was recorded with maximum conducted emissions levels. Refer to Figures one and two for plots of the EUT conducted emissions frequency spectrum taken in the screen room.

### AC Line Conducted Emissions Data (7 Highest Emissions)


Frequency band (MHz)	L1 Level (dB $\mu$ V)			L2 Level (dB $\mu$ V)			CISPR 22 Limit Q.P. Ave(dB $\mu$ V)
	Peak	Q.P.	AVE	Peak	Q.P.	AVE	
0.15 - 0.5	50.3	48.2	34.7	48.8	45.4	34.3	66-56 / 56-46
0.5 - 5	49.2	46.3	37.3	50.8	46.7	36.2	56 / 46
5 - 10	30.8	26.5	20.3	26.1	21.3	15.5	60 / 50
10 - 15	22.7	17.3	11.5	22.8	17.3	10.8	60 / 50
15 - 20	23.7	19.4	13.1	25.7	19.8	13.7	60 / 50
20 - 25	21.6	16.5	10.2	23.8	17.5	11.2	60 / 50
25 - 30	21.5	16.5	10.3	20.7	16.6	10.2	60 / 50

Other emissions present had amplitudes at least 20 dB below the limit.

MARKER  
180 kHz  
50.31 dB $\mu$ V

ACTV DET: PEAK  
MEAS DET: PEAK QP AVG  
                  MKR 180 kHz  
                  50.31 dB $\mu$ V

REF OFFSET 7.0 dB  
LOG REF 85.0 dB $\mu$ V

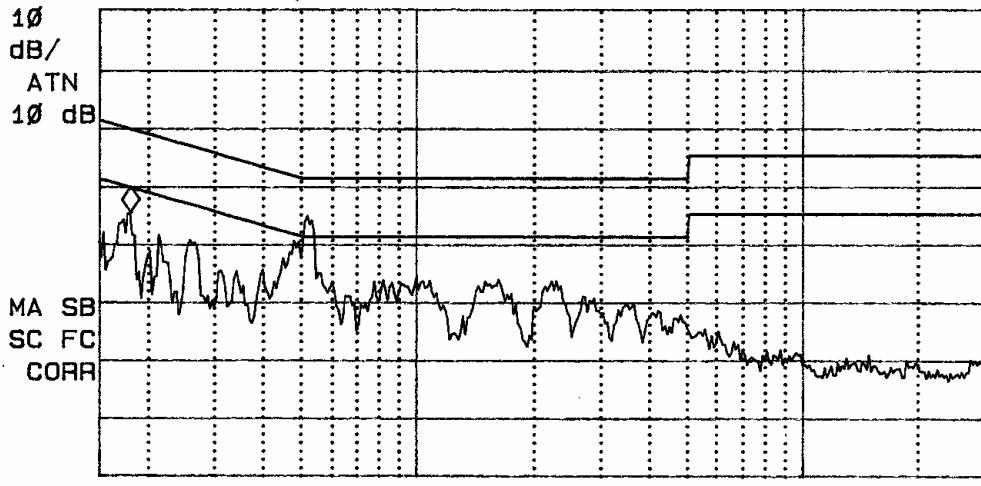


START 150 KHz STOP 30.00 MHz  
#IF BW 9.0 kHz AVG BW 30 kHz SWP 1.40 sec

## Figure One Conducted emissions of EUT line 1

MARKER  
520 kHz  
50.82 dB  $\mu$ V

ACTV DET: PEAK  
MEAS DET: PEAK QP AVG  
MKR 520 kHz  
50.82 dB $\mu$ V

REF OFFSET 7.0 dB  
LOG REF 85.0 dBuV

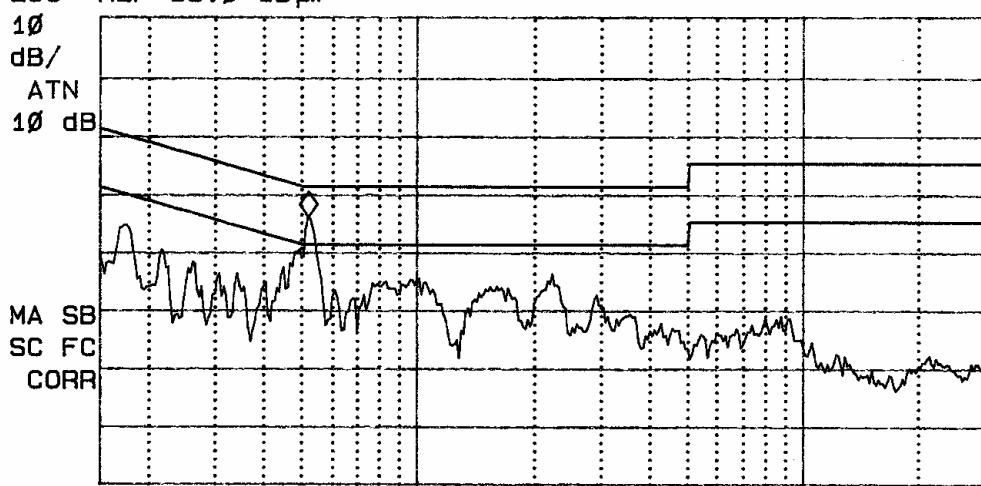

START 150 kHz #IF BW 9.0 kHz AVG BW 30 kHz STOP 30.00 MHz SWP 1.40 sec

## Figure Two Conducted emissions of EUT line 2

Rogers Labs, Inc.  
4405 West 259<sup>th</sup> Terrace  
Louisburg, KS 66053  
Phone/Fax: (913) 837-3214  
Revision 1

Garmin International, Inc.  
Model: DC30  
Test #: 080306A  
Test to: CFR47 Parts 2, 15.249  
File: TestReport DC30 15249

FCC ID: IPH-01393  
GPN: 011-01902-00  
SN: 2/29  
Page 14 of 30  
Date: April 1, 2008

***Summary of Results for AC Line Conducted Emissions***

The conducted emissions for the EUT meet the requirements for FCC Part 15C Intentional Radiators. The EUT worst-case conducted emission resulted in a 9.3 dB minimum margin below the FCC/CISPR quasi peak limit, and an 8.7 dB minimum margin below the FCC/CISPR average limit. Other emissions were present with recorded data representing the worst-case amplitudes.

**Radiated emissions limits; general requirements*****General Radiated Emissions***

Testing was performed with the EUT arranged in all typical equipment configurations and operated through available modes. Preliminary testing was performed in a screen room with the EUT positioned 1 meter from the FSM. Radiated emissions investigations were performed to identify the frequencies, which produced the highest emissions. Plots were made of the radiated emission frequency spectrum from 30 MHz to 18,000 MHz for the preliminary transmitter testing. Refer to figures three through eight showing the worst-case radiated emission spectrum as displayed on the spectrum analyzer taken in a screen room. Each radiated emission was then re-maximized at the OATS site before final radiated emissions measurements were performed. Final data was taken with the EUT located at the open field test site at a distance of 3 meters between the EUT and the receiving antenna. Test procedures of ANSI 63.4-2003 paragraphs 13.1 and 8.3.1.2 were used during radiated emissions testing. The frequency spectrum from 30 MHz to 25,000 MHz was searched for radiated emissions. Peak and average amplitudes of frequencies above 1000 MHz were compared to the required limits with worst-case data presented below. Measured emission levels were maximized by EUT placement on the table, changing cable location, rotating the turntable through 360 degrees, varying the antenna height between 1 and 4 meters above the ground plane and changing

antenna polarization between horizontal and vertical. Antennas used were Broadband Biconical from 30 MHz to 200 MHz, Log Periodic from 200 MHz to 5 GHz, and/or Biconilog from 30 MHz to 1000 MHz, Double-Ridge horn and/or Pyramidal Horns from 5 GHz to 25 GHz, and amplification stages.

Sample Calculations:

RFS = Radiated Field Strength

$\text{dB}\mu\text{V}/\text{m} @ 3\text{m} = \text{dB}\mu\text{V} + \text{A.F.} - \text{Amplifier Gain}$

$\text{dB}\mu\text{V}/\text{m} @ 3\text{m} = 28.4 + 13.6 - 30$

= 12.0

MARKER  
81.5 MHz  
21.10 dB $\mu$ V

ACTV DET: PEAK  
MEAS DET: PEAK QP  
MKR 81.5 MHz  
21.10 dB $\mu$ V

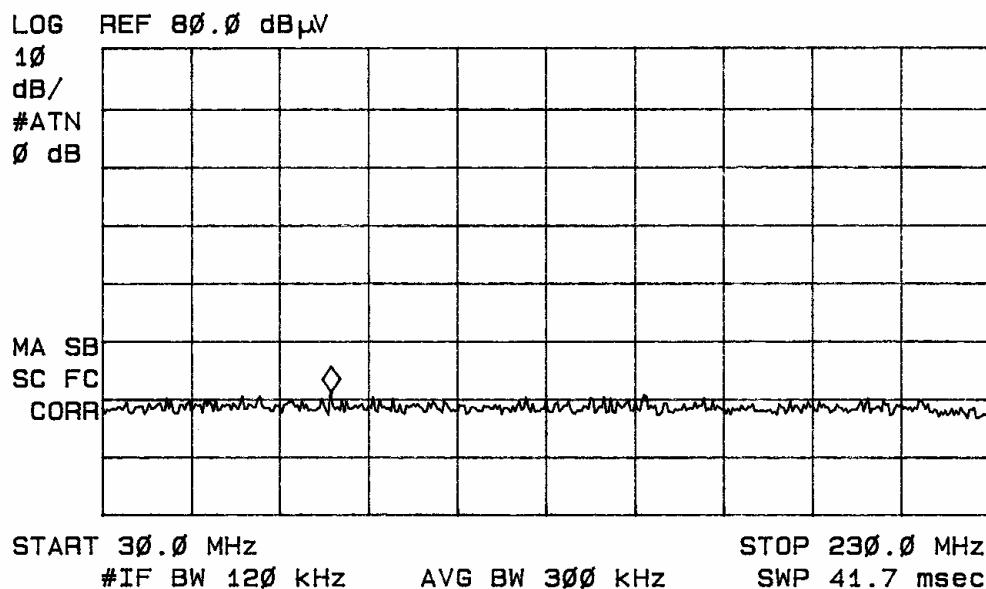


Figure Three Radiated Emissions Plot

MARKER  
290 MHz  
21.82 dB $\mu$ V

ACTV DET: PEAK  
MEAS DET: PEAK QP  
MKA 290 MHz  
21.82 dB $\mu$ V

LOG REF 80.0 dB $\mu$ V

10  
dB/  
#ATN  
0 dB

VA SB  
SC FC  
CORR

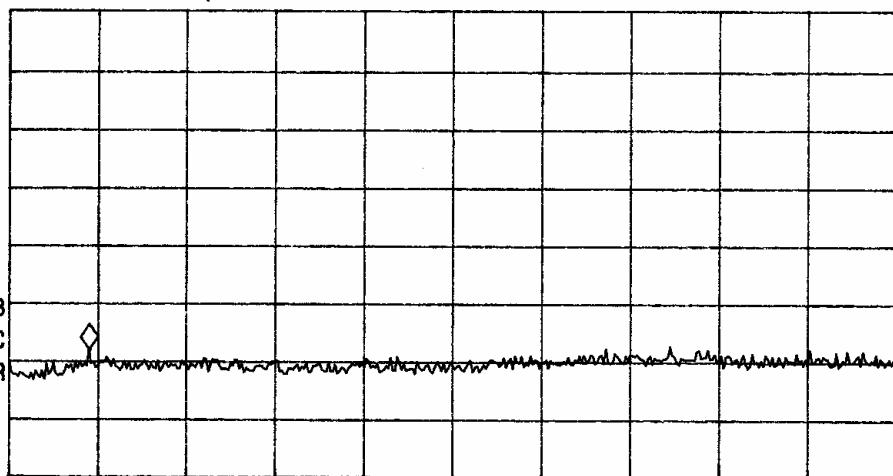



Figure Four Radiated Emissions Plot

\*ATTEN 0dB  
RL 97.0dB $\mu$ V

MKA 35.17dB $\mu$ V  
2.437GHz

10dB/

D

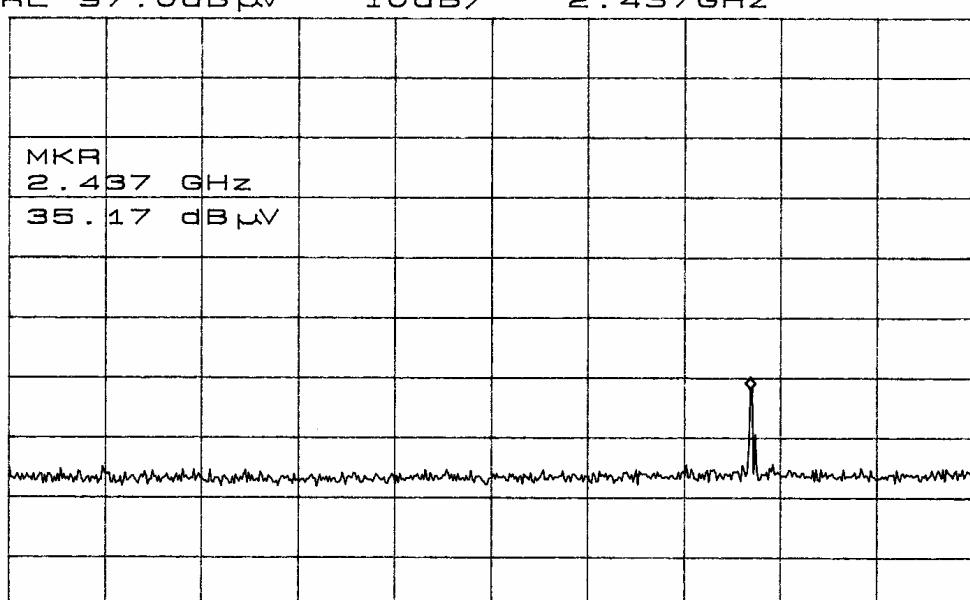


START 900MHz  
\*RBW 100kHz  
VBW 100kHz  
STOP 2.900GHz  
SWP 500ms

Figure Five Radiated Emissions Plot


Rogers Labs, Inc.  
4405 West 259<sup>th</sup> Terrace  
Louisburg, KS 66053  
Phone/Fax: (913) 837-3214  
Revision 1

Garmin International, Inc.  
Model: DC30  
Test #: 080306A  
Test to: CFR47 Parts 2, 15.249  
File: TstRpt DC30 15249


FCC ID: IPH-01393  
GPN: 011-01902-00  
SN: 2/29  
Page 17 of 30  
Date: April 1, 2008

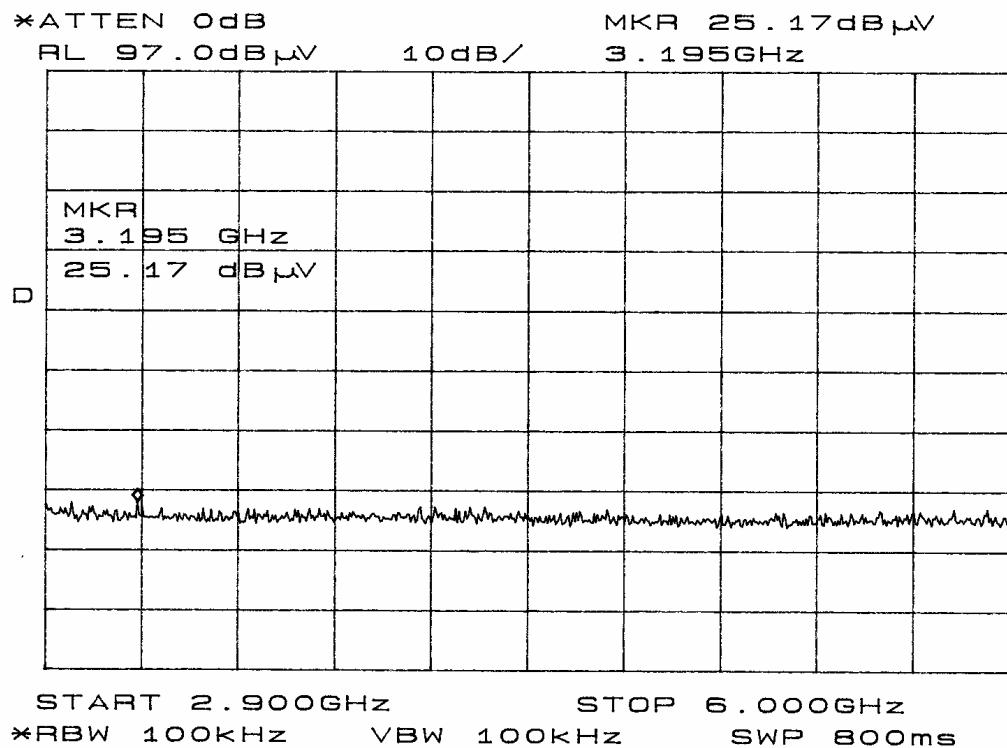

## Figure Six Radiated Emissions Plot

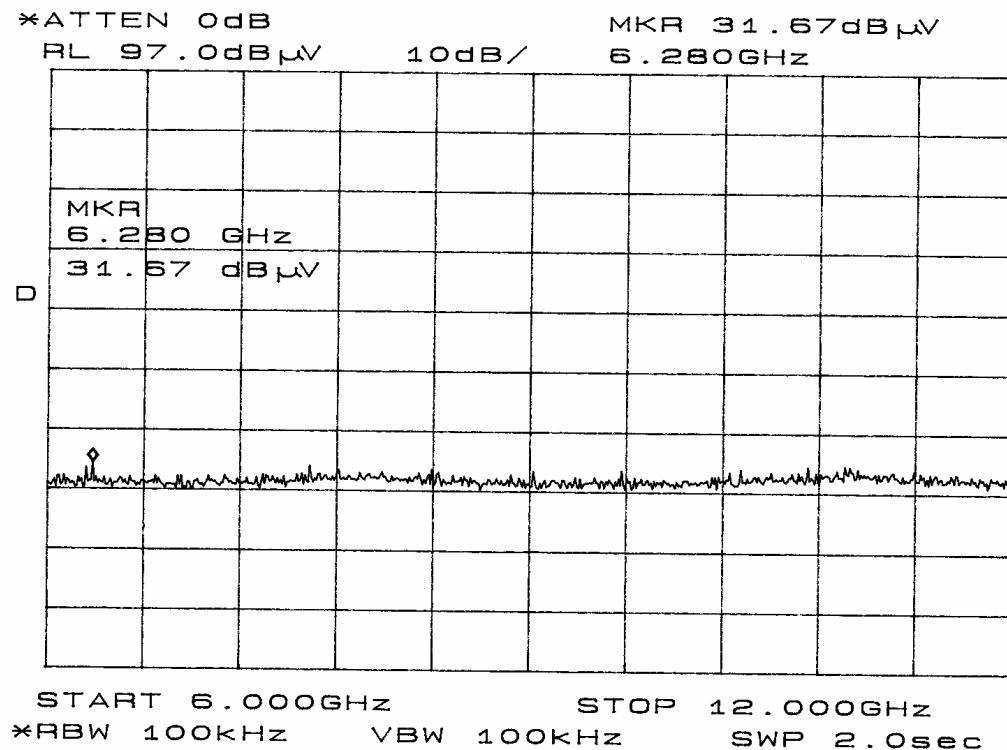

## Figure Seven Radiated Emissions Plot

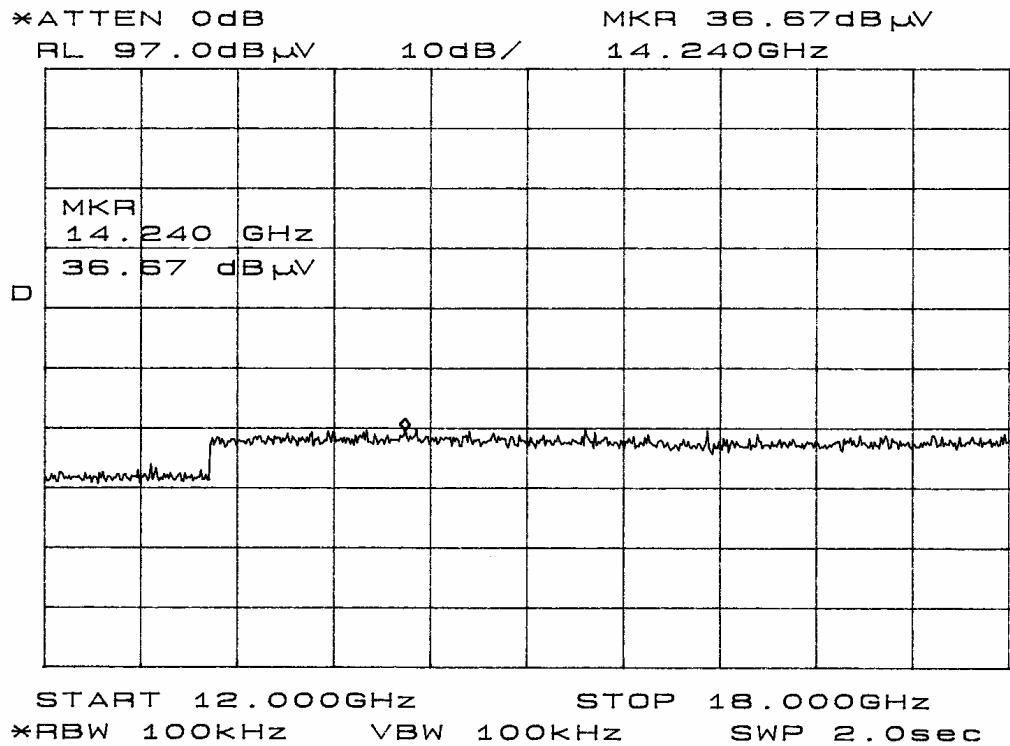

## Figure Eight Radiated Emissions Plot

## ***General Radiated Emissions Data***

Emission Freq. (MHz)	FSM Horz. (dB $\mu$ V)	FSM Vert. (dB $\mu$ V)	Ant. Factor (dB)	Amp. Gain (dB)	RFS Horz. @ 3m (dB $\mu$ V/m)	RFS Vert. @ 3m (dB $\mu$ V/m)	Limit @ 3m (dB $\mu$ V/m)
290.4	28.4	31.8	13.6	30	12.0	15.4	46.0

Other emissions were present with amplitudes at least 20 dB below limits.

## ***Summary of Results for General Radiated Emissions***

The radiated emissions for the EUT meet the requirements for FCC Part 15C and other applicable standards for Intentional Radiators. The EUT had a 30.6 dB minimum margin below the limits. Other emissions were present with amplitudes at least 20 dB below the FCC Limits.

## Operation in the Band 2,400-2,483.5 MHz

The power output was measured on an open field test site @ 3-meters. Test procedures of ANSI 63.4-2003 paragraphs 13.1 and 8.3.1.2 were used during testing. The EUT was placed on a wooden turntable 0.8 meters above the ground plane and at a distance of 3-meters from the FSM antenna. The peak and quasi-peak amplitude of frequencies below 1000 MHz were measured using a spectrum analyzer.

The peak and average amplitude of frequencies above 1000 MHz were measured using a spectrum analyzer. The amplitude of the emission was then recorded from the analyzer display. Emissions radiated outside of the specified bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in 15.209, whichever is the lesser attenuation. Refer to figures nine through twelve showing the frequency and amplitude of emissions displayed on the spectrum analyzer demonstrating compliance. The amplitudes of each spurious emission were measured at the OATS at a distance of 3 meters from the FSM antenna. The amplitude of each radiated emission was maximized by varying the FSM antenna height, polarization, and by rotating the turntable. A Biconilog Antenna was used for measuring emissions from 30 to 1000 MHz, a Log Periodic Antenna for 200 to 5000 MHz, and Double-ridge horn and/or Pyramidal Horn Antennas from 4 GHz to 25 GHz. Emissions were measured in dB $\mu$ V/m @ 3 meters.

Sample calculation.

$$\begin{aligned}\text{dB}\mu\text{V/m}@ 3\text{m} &= \text{FSM} + \text{A.F.} + \text{cable loss} - \text{amplifier Gain} \\ &= 75.5 + 33.0 - 30 \\ &= 78.5\end{aligned}$$

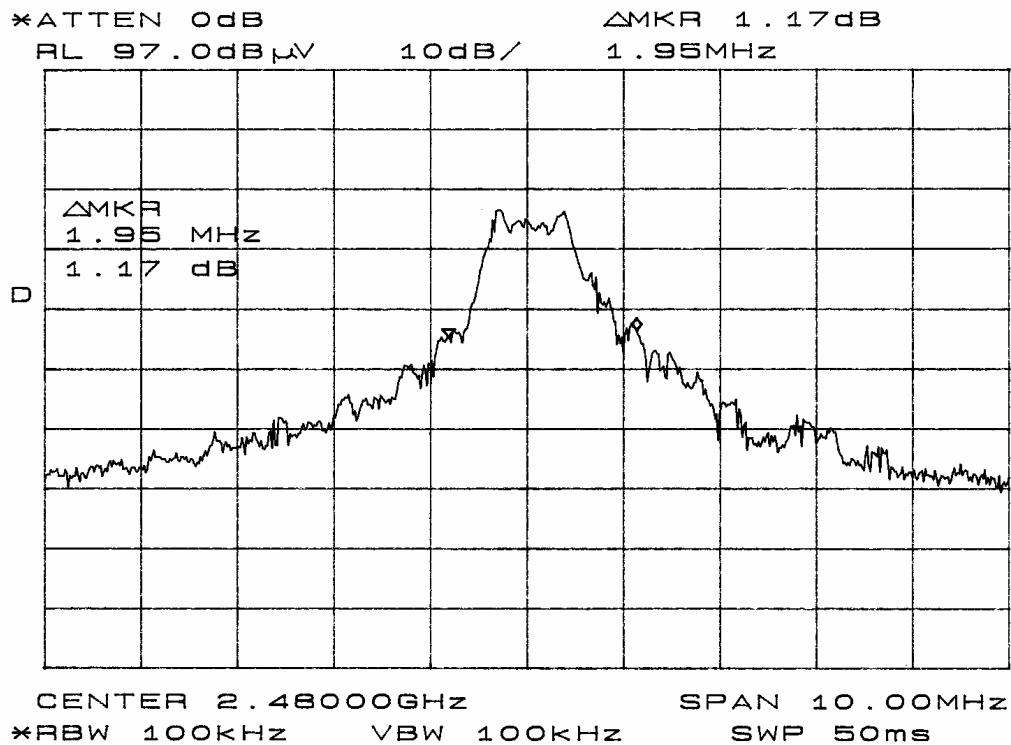


Figure Nine Occupied Bandwidth



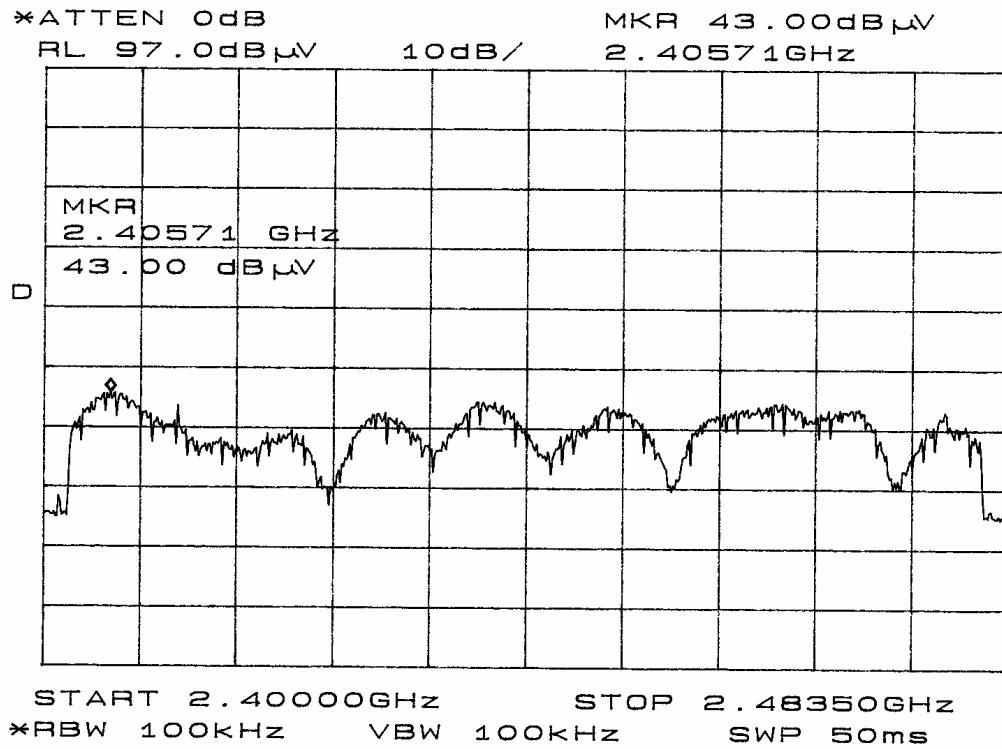


Figure Ten Operation across Frequency Band

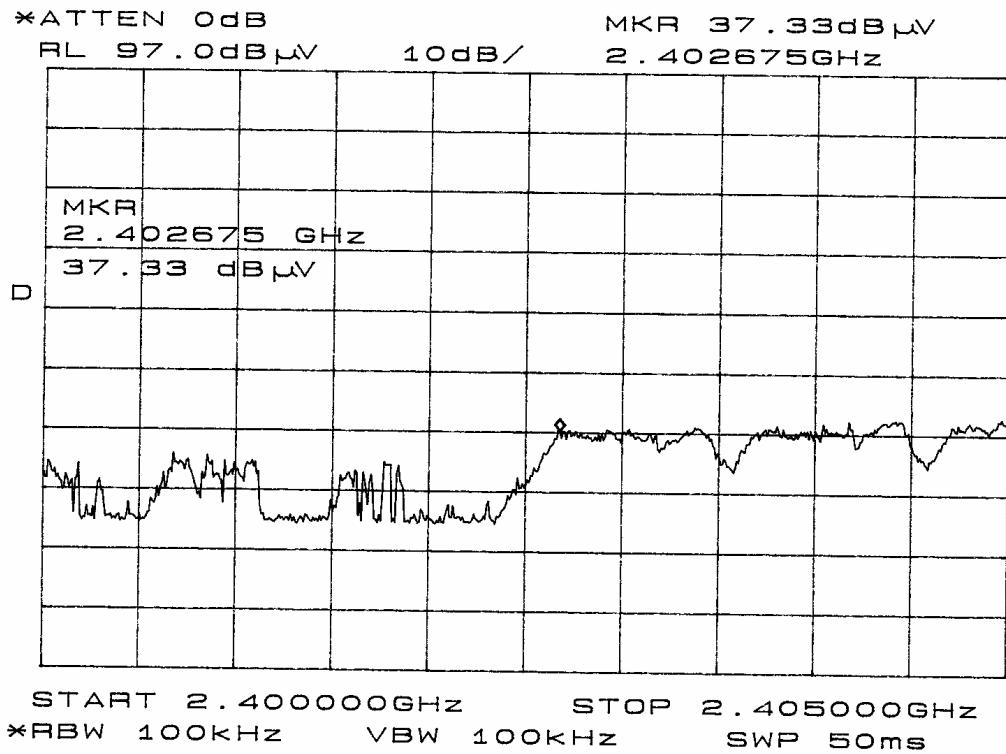

## Figure Eleven Operation at Frequency Band Edge

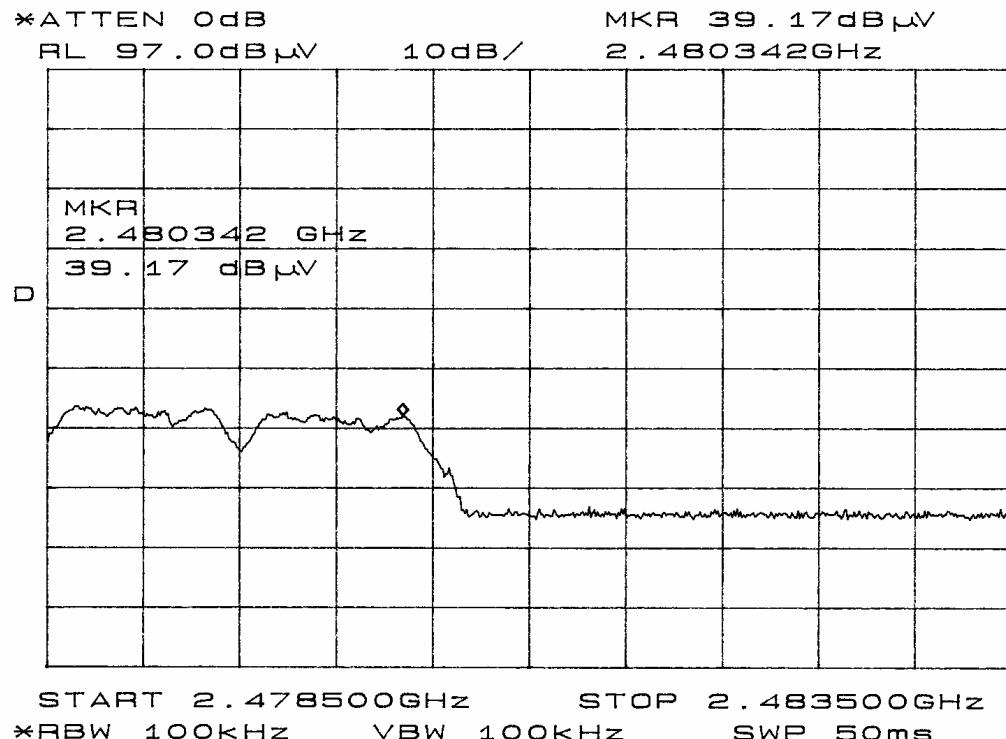

## Figure Twelve Operation at Frequency Band Edge

**Transmitter Radiated Emissions Data**

Emission Freq. (MHz)	FSM Horz. (dB $\mu$ V)	FSM Vert. (dB $\mu$ V)	Ant. Factor (dB)	Amp. Gain (dB)	RFS Horz. @ 3m (dB $\mu$ V/m)	RFS Vert. @ 3m (dB $\mu$ V/m)	Limit @ 3m (dB $\mu$ V/m)
2403.0	75.5	74.5	33.0	30	78.5	77.5	94.0
4806.0	25.0	24.8	41.1	30	36.1	35.9	54.0
7209.0	21.3	23.0	36.0	30	27.3	29.0	54.0
9612.0	22.6	22.5	38.1	30	30.7	30.6	54.0
2441.3	76.3	73.3	33.3	30	79.6	76.6	94.0
4882.0	27.5	22.3	41.1	30	38.6	33.4	54.0
7323.0	24.1	23.5	36.5	30	30.6	30.0	54.0
9764.0	22.8	23.1	38.2	30	31.0	31.3	54.0
2480.0	72.1	71.2	33.3	30	75.4	74.5	94.0
4960.0	26.5	21.3	41.7	30	38.2	33.0	54.0
7440.0	20.2	21.5	36.7	30	26.9	28.2	54.0
9920.0	22.1	22.8	38.4	30	30.5	31.2	54.0

Note: Levels measured @ 3-meter OATS site.

**Summary of Results for Transmitter Radiated Emissions**

The EUT had a peak amplitude emission of 14.4 dB margin below the average limit of CFR47 15.249. The EUT had worst-case harmonic emission amplitude of 15.4 dB below the average limit of 15.209 and 15.249. The radiated emissions for the EUT meet the requirements for FCC CFR47 Part 15.249 and other applicable standards for Intentional Radiators. There were no measurable emissions in the restricted bands other than those recorded in this report. Other emissions were present with amplitudes at least 20 dB below the FCC CFR47 Limits.



NVLAP Lab Code 200087-0

## Annex

- Annex A, Measurement Uncertainty Calculations
- Annex B, Test Equipment List.
- Annex C, Rogers Qualifications.
- Annex D, FCC Site Approval Letter.
- Annex E, Industry Canada Approval Letter.

Rogers Labs, Inc.

4405 West 259<sup>th</sup> Terrace

Louisburg, KS 66053

Phone/Fax: (913) 837-3214

Revision 1

Garmin International, Inc.

Model: DC30

Test #: 080306A

Test to: CFR47 Parts 2, 15.249

File: TstRpt DC30 15249

FCC ID: IPH-01393

GPN: 011-01902-00

SN: 2/29

Page 24 of 30

Date: April 1, 2008

## Annex A Measurement Uncertainty Calculations

### Radiated Emissions Measurement Uncertainty Calculation

Measurement of vertically polarized radiated field strength over the frequency range 30 MHz to 1 GHz on an open area test site at 3m and 10m includes following uncertainty:

Contribution	Probability	Uncertainty (dB)
Antenna factor calibration	normal (k = 2)	±0.58
Cable loss calibration	normal (k = 2)	±0.2
Receiver specification	rectangular	±1.0
Antenna directivity	rectangular	±0.1
Antenna factor variation with height	rectangular	±2.0
Antenna factor frequency interpolation	rectangular	±0.1
Measurement distance variation	rectangular	±0.2
Site Imperfections	rectangular	±1.5

Combined standard uncertainty  $u_c(y)$  is

$$U_c(y) = \pm \sqrt{\left[\frac{1.0}{2}\right]^2 + \left[\frac{0.2}{2}\right]^2 + \left[\frac{1.0^2 + 0.1^2 + 2.0^2 + 0.1^2 + 0.2^2 + 1.5^2}{3}\right]}$$

$$U_c(y) = \pm 1.6 \text{ dB}$$

It is probable that  $u_c(y) / s(q_k) > 3$ , where  $s(q_k)$  is estimated standard deviation from a sample of  $n$  readings unless the repeatability of the EUT is particularly poor, and a coverage factor of  $k = 2$  will ensure that the level of confidence will be approximately 95%, therefore:

$$s(q_k) = \sqrt{\frac{1}{(n-1)} \sum_{k=1}^n (q_k - \bar{q})^2}$$

$$U = 2 U_c(y) = 2 \times \pm 1.6 \text{ dB} = \pm 3.2 \text{ dB}$$

Notes:

- 1.1 Uncertainties for the antenna and cable were estimated, based on a normal probability distribution with  $k = 2$ .
- 1.2 The receiver uncertainty was obtained from the manufacturer's specification for which a rectangular distribution was assumed.
- 1.3 The antenna factor uncertainty does not take account of antenna directivity.
- 1.4 The antenna factor varies with height and since the height was not always the same in use as when the antenna was calibrated an additional uncertainty is added.
- 1.5 The uncertainty in the measurement distance is relatively small but has some effect on the received signal strength. The increase in measurement distance as the antenna height is increased is an inevitable consequence of the test method and is therefore not considered a contribution to uncertainty.
- 1.6 Site imperfections are difficult to quantify but may include the following contributions:
  - Unwanted reflections from adjacent objects.
  - Ground plane imperfections: reflection coefficient, flatness, and edge effects.
  - Losses or reflections from "transparent" cabins for the EUT or site coverings.
  - Earth currents in antenna cable (mainly effect biconical antennas).

The specified limits for the difference between measured site attenuation and the theoretical value ( $\pm 4$  dB) were not included in total since the measurement of site attenuation includes uncertainty contributions already allowed for in this budget, such as antenna factor.

### Conducted Measurements Uncertainty Calculation

Measurement of conducted emissions over the frequency range 9 kHz to 30 MHz includes following uncertainty:

	Probability	Uncertainty
Contribution	Distribution	(dB)
Receiver specification	rectangular	±1.5
LISN coupling specification	rectangular	±1.5
Cable and input attenuator calibration	normal (k=2)	±0.5

Combined standard uncertainty  $u_c(y)$  is

$$U_c(y) = \pm \sqrt{\left[\frac{0.5}{2}\right]^2 + \frac{1.5^2 + 1.5^2}{3}}$$

$$U_c(y) = \pm 1.2 \text{ dB}$$

As with radiated field strength uncertainty, it is probable that  $u_c(y) / s(q_k) > 3$  and a coverage factor of  $k = 2$  will suffice, therefore:

$$U = 2 U_c(y) = 2 \times \pm 1.2 \text{ dB} = \pm 2.4 \text{ dB}$$

**Annex B Test Equipment List For Rogers Labs, Inc.**

The test equipment used is maintained in calibration and good operating condition. Use of this calibrated equipment ensures measurements are traceable to national standards.

List of Test Equipment	Calibration Date
Oscilloscope Scope: Tektronix 2230	2/08
Wattmeter: Bird 43 with Load Bird 8085	2/08
Power Supplies: Sorensen SRL 20-25, SRL 40-25, DCR 150, DCR 140	2/08
H/V Power Supply: Fluke Model: 408B (SN: 573)	2/08
R.F. Generator: HP 606A	2/08
R.F. Generator: HP 8614A	2/08
R.F. Generator: HP 8640B	2/08
Spectrum Analyzer: HP 8562A, Mixers: 11517A, 11970A, 11970K, 11970U, 11970V, 11970W HP Adapters: 11518, 11519, 11520	2/08
Spectrum Analyzer: HP 8591EM	5/07
Frequency Counter: Leader LDC825	2/08
Antenna: EMCO Biconilog Model: 3143	5/07
Antenna: EMCO Log Periodic Model: 3147	10/07
Antenna: Antenna Research Biconical Model: BCD 235	10/07
Antenna: EMCO Dipole Set 3121C	2/08
Antenna: C.D. B-101	2/08
Antenna: Solar 9229-1 & 9230-1	2/08
Antenna: EMCO 6509	2/08
Audio Oscillator: H.P. 201CD	2/08
R.F. Power Amp 65W Model: 470-A-1010	2/08
R.F. Power Amp 50W M185- 10-501	2/08
R.F. PreAmp CPPA-102	2/08
LISN 50 $\mu$ Hy/50 ohm/0.1 $\mu$ f	10/07
LISN Compliance Eng. 240/20	2/08
LISN Fischer Custom Communications FCC-LISN-50-16-2-08	2/08
Peavey Power Amp Model: IPS 801	2/08
Power Amp A.R. Model: 10W 1010M7	2/08
Power Amp EIN Model: A301	2/08
ELGAR Model: 1751	2/08
ELGAR Model: TG 704A-3D	2/08
ESD Test Set 2010i	2/08
Fast Transient Burst Generator Model: EFT/B-101	2/08
Current Probe: Singer CP-105	2/08
Current Probe: Solar 9108-1N	2/08
Field Intensity Meter: EFM-018	2/08
KEYTEK Ecat Surge Generator	2/08
Shielded Room 5 M x 3 M x 3.0 M	



NVLAP Lab Code 200087-0

## **Annex C Qualifications**

**SCOT D. ROGERS, ENGINEER**

**ROGERS LABS, INC.**

Mr. Rogers has approximately 17 years experience in the field of electronics. Six years working in the automated controls industry and 6 years working with the design, development and testing of radio communications and electronic equipment.

### **POSITIONS HELD:**

Systems Engineer: A/C Controls Mfg. Co., Inc. 6 Years

Electrical Engineer: Rogers Consulting Labs, Inc. 5 Years

Electrical Engineer: Rogers Labs, Inc. Current

### **EDUCATIONAL BACKGROUND:**

- 1) Bachelor of Science Degree in Electrical Engineering from Kansas State University
- 2) Bachelor of Science Degree in Business Administration Kansas State University
- 3) Several Specialized Training courses and seminars pertaining to Microprocessors and Software programming.

**Annex D FCC Test Site Registration Letter****FEDERAL COMMUNICATIONS COMMISSION**

**Laboratory Division  
7435 Oakland Mills Road  
Columbia, MD 21046**

**May 16, 2006**

**Registration Number: 90910**

**Rogers Labs, Inc.  
4405 West 259th Terrace  
Louisburg, KS 66053**


**Attention: Scot Rogers**

**Re: Measurement facility located at Louisburg  
3 & 10 meter site  
Date of Renewal: May 16, 2006**

**Dear Sir or Madam:**

Your request for renewal of the registration of the subject measurement facility has been received. The information submitted has been placed in your file and the registration has been renewed. The name of your organization will remain on the list of facilities whose measurement data will be accepted in conjunction with applications for Certification under Parts 15 or 18 of the Commission's Rules. Please note that the file must be updated for any changes made to the facility and the registration must be renewed at least every three years.

Measurement facilities that have indicated that they are available to the public to perform measurement services on a fee basis may be found on the FCC website [www.fcc.gov](http://www.fcc.gov) under E-Filing, OET Equipment Authorization Electronic Filing, Test Firms.

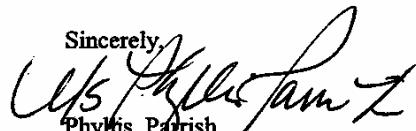Sincerely,  
  
Phyllis Parish  
Information Technician

**Annex E Industry Canada Test Site Registration Letter**May 23<sup>rd</sup>, 2006OUR FILE: 46405-3041  
Submission No: 115252

Rogers Labs Inc.  
4405 West 259<sup>th</sup> Terrace  
Louisburg, KY  
USA 66053

Dear Sir/Madame:

The Bureau has received your application for the Alternate Test Site or OATS and the filing is satisfactory to Industry Canada.

Please reference to the file number (3041-1) in the body of all test reports containing measurements performed on the site.

In the future, to obtain or renew a unique registration number, you may demonstrate that the site has been accredited to ANSI C63.4-2003 or later.

If the site is not accredited to ANSI C63.4-2003 or later, the test facility shall submit test data demonstrating conformance with the ANSI standard. The Department will evaluate the filing to determine if recognition shall be granted.

The frequency for re-validation of the test site and the information that is required to be filed or retained by the testing party shall comply with the requirements established by the accrediting organization. However, in all cases, test site re-validation shall occur on an interval not to exceed two years.

If you have any questions, you may contact the Bureau by e-mail at [certification.bureau@ic.gc.ca](mailto:certification.bureau@ic.gc.ca)  
Please reference our file number above for all correspondence.

Yours sincerely,

A handwritten signature in black ink, appearing to read "R. Corey".

Robert Corey  
Manager Certification  
Certification and Engineering Bureau  
3701 Carling Ave., Building 94  
Ottawa, Ontario K2H 8S2

**Canada**

Rogers Labs, Inc.  
4405 West 259<sup>th</sup> Terrace  
Louisburg, KS 66053  
Phone/Fax: (913) 837-3214  
Revision 1

Garmin International, Inc.  
Model: DC30  
Test #: 080306A  
Test to: CFR47 Parts 2, 15.249  
File: TstRpt DC30 15249

FCC ID: IPH-01393  
GPN: 011-01902-00  
SN: 2/29  
Page 30 of 30  
Date: April 1, 2008