

Application For Grant of Certification

2402-2480 MHz
47 CFR 15.249
Low Power Transmitter


FCC ID: IPH-0225612


FOR

Garmin International, Inc.

1200 East 151st Street
Olathe, KS 66062

FCC Designation: US5305
IC Test Site Registration: 3041A-1
Test Report Number: 181110

Authorized Signatory: 
Scot D. Rogers



ROGERS LABS, INC.

4405 West 259th Terrace
Louisburg, KS 66053
Phone / Fax (913) 837-3214

Engineering Test Report For Grant of Certification Application

for
47 CFR, PART 15C - Intentional Radiators Paragraph 15.249

License Exempt Intentional Radiator

For

Garmin International, Inc.

1200 East 151st Street
Olathe, KS 66062

Low Power Transmitter

Frequency Range 2402-2480 MHz
FCC ID: IPH-0225612

Test Dates: December 10, 2018 through January 24, 2019

Certifying Engineer: *Scot D. Rogers*
Scot D. Rogers
Rogers Labs, Inc.
4405 West 259th Terrace
Louisburg, KS 66053
Telephone/Facsimile: (913) 837-3214

This report shall not be reproduced except in full, without the written approval of the laboratory.
This report must not be used by the client to claim product certification, approval, or
endorsement by NVLAP, NIST, or any agency of the Federal Government.

Rogers Labs, Inc.	Garmin International, Inc.	SN's: 51W000108, 51Y000104
4405 West 259th Terrace		FCC ID: IPH-0225612
Louisburg, KS 66053	Test: 181110	
Phone/Fax: (913) 837-3214	Test to: CFR47 15.249	Date: March 1, 2019
Revision 1	File: IPH0225612 FCC DXX TstRpt 181110	Page 2 of 46

Table of Contents

TABLE OF CONTENTS.....	3
REVISIONS.....	5
FOREWORD.....	6
OPINION / INTERPRETATION OF RESULTS	6
EQUIPMENT TESTED.....	6
Equipment Function	7
Equipment Configuration.....	7
APPLICATION FOR CERTIFICATION.....	8
APPLICABLE STANDARDS & TEST PROCEDURES	9
TESTING PROCEDURES	9
AC Line Conducted Emission Test Procedure	9
Radiated Emission Test Procedure.....	9
Diagram 1 Test arrangement for radiated emissions of tabletop equipment.....	10
Diagram 2 Test arrangement for radiated emissions tested on Open Area Test Site (OATS).....	11
TEST SITE LOCATIONS	11
LIST OF TEST EQUIPMENT	12
UNITS OF MEASUREMENTS	13
ENVIRONMENTAL CONDITIONS.....	13
STATEMENT OF MODIFICATIONS AND DEVIATIONS	13
INTENTIONAL RADIATORS.....	13
Antenna Requirements	13
Restricted Bands of Operation.....	14

Table 1 Radiated Emissions in Restricted Frequency Bands Data (BR (GFSK)) #114

Table 2 Radiated Emissions in Restricted Frequency Bands Data (2EDR (PI/4 DQPSK)) #115

Table 3 Radiated Emissions in Restricted Frequency Bands Data (3EDR (8DPSK)) #116

Table 4 Radiated Emissions in Restricted Frequency Bands Data (BLE (GMSK)) #117

Table 5 Radiated Emissions in Restricted Frequency Bands Data (BR (GFSK)) #2.....18

Table 6 Radiated Emissions in Restricted Frequency Bands Data (2EDR (PI/4 DQPSK)) #219

Table 7 Radiated Emissions in Restricted Frequency Bands Data (3EDR (8DPSK)) #220

Table 8 Radiated Emissions in Restricted Frequency Bands Data (BLE (GMSK)) #221

Summary of Results for Radiated Emissions in Restricted Bands21

General Radiated Emissions Procedure.....22

Table 9 General Radiated Emissions Data (worse-case)23

Summary of Results for General Radiated Emissions23

Operation in the Band 2400 – 2483.5 MHz24

Figure 1 Plot of Transmitter Emissions Operation in 2402-2480 MHz (BR (GFSK))25

Figure 2 Plot of Transmitter Emissions Operation in 2402-2480 MHz (2EDR (PI/4 DQPSK))25

Figure 3 Plot of Transmitter Emissions Operation in 2402-2480 MHz (3EDR (8DPSK)).....26

Figure 4 Plot of Transmitter Emissions Operation in 2402-2480 MHz (BLE (GMSK)).....26

Figure 5 Plot of Transmitter Emissions 99% Occupied Bandwidth (BR (GFSK)).....27

Figure 6 Plot of Transmitter Emissions 99% Occupied Bandwidth (2EDR (PI/4 DQPSK))27

Figure 7 Plot of Transmitter Emissions 99% Occupied Bandwidth (3EDR (8DPSK))28

Figure 8 Plot of Transmitter Emissions 99% Occupied Bandwidth (BLE (GMSK))28

Figure 9 Plot of Transmitter Emissions Low Band Edge (BR (GFSK)).....29

Figure 10 Plot of Transmitter Emissions Low Band Edge (2EDR (PI/4 DQPSK)).....29

Figure 11 Plot of Transmitter Emissions Low Band Edge (3EDR (8DPSK))30

Figure 12 Plot of Transmitter Emissions Low Band Edge (BLE (GMSK))30

Figure 13 Plot of Transmitter Emissions High Band Edge (BR (GFSK))31

Figure 14 Plot of Transmitter Emissions High Band Edge (2EDR (PI/4 DQPSK))31

Figure 15 Plot of Transmitter Emissions High Band Edge (3EDR (8DPSK))32

Figure 16 Plot of Transmitter Emissions High Band Edge (BLE (GMSK))32

Transmitter Emissions Data.....33

Table 10 Transmitter Radiated Emissions (BR (GFSK)) #133

Table 11 Transmitter Radiated Emissions (2EDR (PI/4 DQPSK)) #134

Table 12 Transmitter Radiated Emissions (3EDR (8DPSK)) #135

Table 13 Transmitter Radiated Emissions (BLE (GMSK)) #136
 Table 14 Transmitter Radiated Emissions (BR (GFSK)) #237
 Table 15 Transmitter Radiated Emissions (2EDR (PI/4 DQPSK)) #238
 Table 16 Transmitter Radiated Emissions (3EDR (8DPSK)) #239
 Table 17 Transmitter Radiated Emissions (BLE (GMSK)) #240
Summary of Results for Transmitter Radiated Emissions of Intentional Radiator41
ANNEX..... 42
 Annex A Measurement Uncertainty Calculations43
 Annex B Additional Test Equipment.....44
 Annex C Rogers Qualifications45
 Annex D Rogers Labs Certificate of Accreditation46

Revisions

Revision 1 issued March 1, 2019

Foreword

The following information is submitted for consideration in obtaining Grant of Certification for low power intentional radiator per 47 CFR Paragraph 15.249 low power digital device transmitter operations in the 2400 – 2483.5 MHz frequency band.

Name of Applicant: Garmin International, Inc.
1200 East 151st Street
Olathe, KS 66062

FCC ID: IPH-0225612

Operating Frequency Range: 2402-2480 MHz

Mode	Peak Power (dB μ V/m@3m)	Average power (dB μ V/m@3m)	99% OBW (kHz)
BT BR (GFSK)	94.4	93.9	879.8
BT 2EDR ($\pi/4$ -DQPSK)	96.9	93.9	1,306.1
BT 3EDR (8DPSK)	97.4	93.9	1,306.1
BT BLE (GMSK)	94.9	93.9	1,025.6

Opinion / Interpretation of Results

Tests Performed	Margin (dB)	Results
Restricted Bands 47 CFR 15.205	-10.7	Complies
AC Line Conducted 47 CFR 15.207	N/A	Complies
Radiated Emissions 47 CFR 15.209	-3.1	Complies
Harmonic Emissions per 47 CFR 15.249	-8.8	Complies

Equipment Tested


<u>Equipment</u>	<u>Model / PN</u>	<u>Serial Number</u>
EUT	#1 GMN-01775	51W000108
EUT	#2 GMN-01776	51Y000104
Interface cables	Manufacturer provided	N/A
DC Power Supply	BK 1745A	209C13
Laptop Computer	Dell E6410	6JX50P1

Test results in this report relate only to the items tested

Equipment Function

The EUT is a Mode A and Mode S Avionics transponder. The design is provided in two versions, panel mount and remote mounted designs for installation in an aircraft. The transponder operates on aviation-defined frequencies, receiving radar interrogations at 1030 MHz and transmitting a coded response of pulses back at 1090 MHz. The transponder design provides a coded response when an interrogation signal is received from outside the craft. The coded response provides others the ability to identify the aircraft. The design also incorporates a low power transmitter providing additional wireless connectivity inside the aircraft. The low power transmitter operates in the 2402-2480 MHz unlicensed services band and provides wireless communications with compatible equipment. The panel and remote mounted designs utilize an internal chip antenna. The remote mounted design can be configured to disconnect from the internal chip antenna and connect to an external stub antenna provided by the manufacturer. The End user of the transponder Antenna configuration is determined by the installer during the installation process, with the end user of the transponder not having access to make modifications. The low power communications provide connectivity with compatible Bluetooth® modes including Basic Rate (GFSK), 2EDR (PI/4 DQPSK), 3EDR (8DPSK), and BLE (GMSK). Test results in this report relate only to the products described in this report. This report documents compliance of the low power license-exempt 2402-2480 MHz transmitter operations.

Equipment Configuration

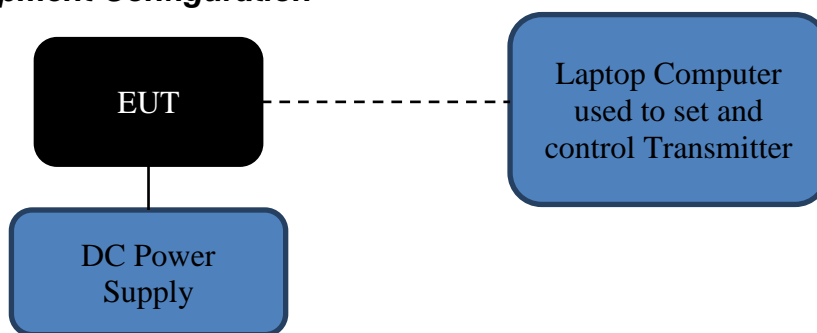

Application for Certification

- (1) Manufacturer: Garmin International, Inc.
1200 East 151st Street
Olathe, KS 66062
- (2) Identification:
FCC ID: IPH-0225612
- (3) Instruction Book:
Refer to Exhibit for Instruction Manual.
- (4) Description of Circuit Functions:
Refer to Exhibit of Operational Description.
- (5) Block Diagram with Frequencies:
Refer to Exhibit of Operational Description.
- (6) Report of Measurements:
Report of measurements follows in this Report.
- (7) Photographs: Construction, Component Placement, etc.:
Refer to Exhibit for photographs of equipment.
- (8) List of Peripheral Equipment Necessary for operation. The equipment operates from direct current power provided from the installation aircraft. The EUT offers interface ports for use with associated aircraft instrumentation as presented in this filing.
- (9) Transition Provisions of 47 CFR 15.37 are not requested.
- (10) Not Applicable. The unit is not a scanning receiver.
- (11) Not Applicable. The EUT does not operate in the 59 – 64 GHz frequency band.
- (12) The equipment is not software defined and this section is not applicable.
- (13) Applications for certification of U-NII devices in the 5.15-5.35 GHz and the 5.47-5.85 GHz bands must include a high-level operational description of the security procedures that control the radio frequency operating parameters and ensure that unauthorized modifications cannot be made. This requirement is not applicable to his DTS device.
- (14) Contain at least one drawing or photograph showing the test set-up for each of the required types of tests applicable to the device for which certification is requested. These drawings or photographs must show enough detail to confirm other information contained in the test report. Any photographs used must be focused originals without glare or dark spots and must clearly show the test configuration used. This information is provided in this report and Test Setup Exhibits provided with the application filing.

Applicable Standards & Test Procedures

In accordance with the e-CFR Code of Federal Regulations Title 47, dated November 13, 2018: Part 2, Subpart J, Paragraphs 2.907, 2.911, 2.913, 2.925, 2.926, 2.1031 through 2.1057, and applicable parts of paragraph 15, Part 15C Paragraph 15.249 operation in the 2400 – 2483.5 MHz Frequency band. Test procedures used are the established Methods of Measurement of Radio-Noise Emissions as described in ANSI C63.10-2013.


Testing Procedures

AC Line Conducted Emission Test Procedure

The EUT operates on direct current power only provided by the aircraft installation. Therefore, no AC line conducted emission testing was required or performed.

Radiated Emission Test Procedure

Radiated emissions testing was performed as required in 47 CFR 15C and specified in ANSI C63.10-2013. The EUT was placed on a rotating 0.9 x 1.2-meter platform, elevated as required above the ground plane at a distance of 3 meters from the FSM antenna. EMI energy was maximized by equipment placement permitting orientation in three orthogonal axes, raising and lowering the FSM antenna, changing the antenna polarization, and by rotating the turntable. Each emission was maximized before data was taken and recorded. The frequency spectrum from 9 kHz to 25,000 MHz was searched for emissions during preliminary investigation. Refer to diagrams one and two showing typical test setup. Refer to photographs in the test setup exhibits for specific EUT placement during testing.

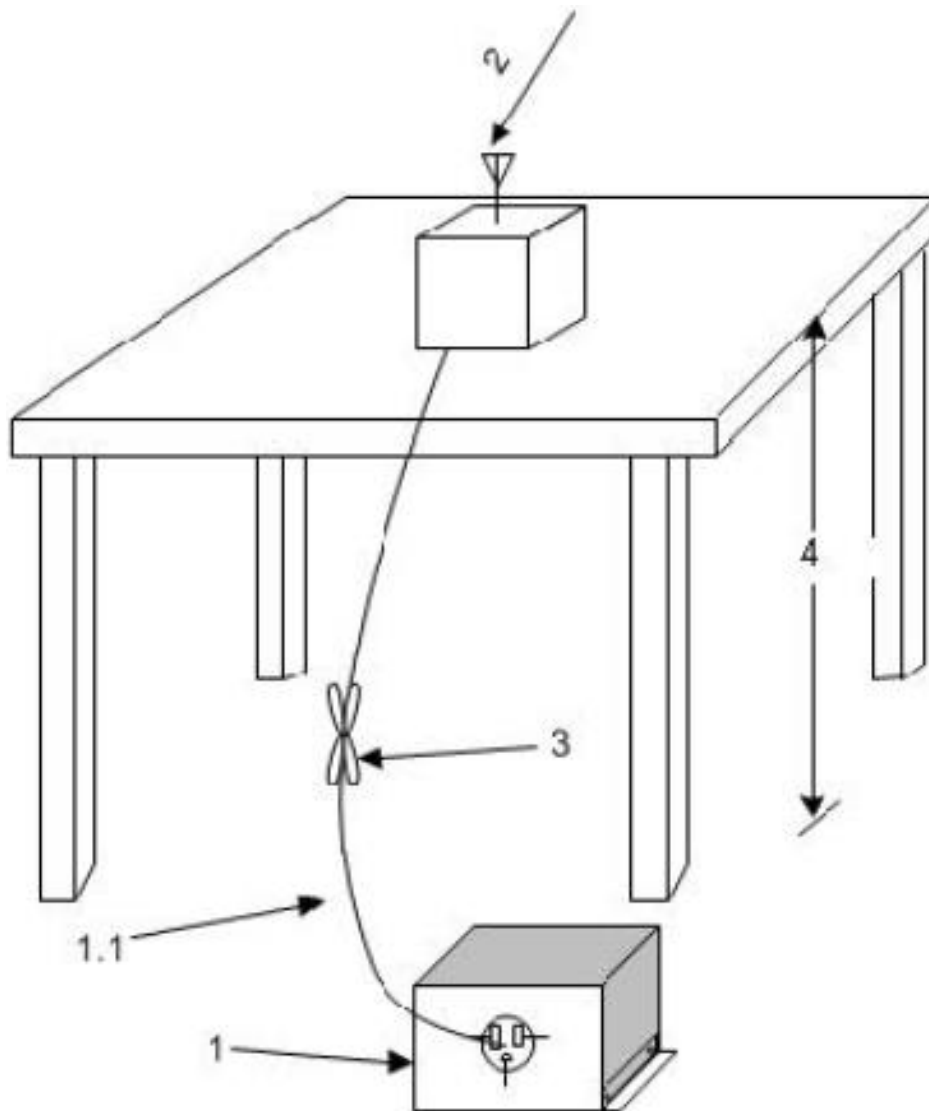

1—A LISN is optional for radiated measurements between 30 MHz and 1000 MHz but not allowed for measurements below 30 MHz and above 1000 MHz (see 6.3.1). If used, then connect EUT to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω loads. The LISN may be placed on top of, or immediately beneath, the reference ground plane (see 6.2.2 and 6.2.3.2).

1.1—LISN spaced at least 80 cm from the nearest part of the EUT chassis.

2—Antenna can be integral or detachable, depending on the EUT (see 6.3.1).

3—Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long (see 6.3.1).

4—For emission measurements at or below 1 GHz, the table height shall be 80 cm. For emission measurements above 1 GHz, the table height shall be 1.5 m for measurements, except as otherwise specified (see 6.3.1 and 6.6.3.1).

Diagram 1 Test arrangement for radiated emissions of tabletop equipment

List of Test Equipment

<u>Equipment</u>	<u>Manufacturer</u>	<u>Model (SN)</u>	<u>Band</u>	<u>Cal Date(m/d/y)</u>	<u>Due</u>
<input type="checkbox"/> LISN	FCC	FCC-LISN-50-25-10(1PA) (160611)	.15-30MHz	5/2/2018	5/2/2019
<input type="checkbox"/> LISN	Compliance Design	FCC-LISN-2.Mod.cd,(126)	.15-30MHz	10/16/2018	10/16/2019
<input checked="" type="checkbox"/> Cable	Huber & Suhner Inc.	Sucoflex102ea(L10M)(303073)	9kHz-40 GHz	10/16/2018	10/16/2019
<input checked="" type="checkbox"/> Cable	Huber & Suhner Inc.	Sucoflex102ea(1.5M)(303069)	9kHz-40 GHz	10/16/2018	10/16/2019
<input checked="" type="checkbox"/> Cable	Huber & Suhner Inc.	Sucoflex102ea(1.5M)(303071)	9kHz-40 GHz	10/16/2018	10/16/2019
<input type="checkbox"/> Cable	Belden	RG-58 (L1-CAT3-11509)	9kHz-30 MHz	10/16/2018	10/16/2019
<input type="checkbox"/> Cable	Belden	RG-58 (L2-CAT3-11509)	9kHz-30 MHz	10/16/2018	10/16/2019
<input type="checkbox"/> Antenna	ARA	BCD-235-B (169)	20-350MHz	10/16/2018	10/16/2019
<input type="checkbox"/> Antenna	EMCO	3147 (40582)	200-1000MHz	10/16/2018	10/16/2019
<input checked="" type="checkbox"/> Antenna	ETS-Lindgren	3117 (200389)	1-18 GHz	5/2/2018	5/2/2020
<input type="checkbox"/> Antenna	Com Power	AH-118 (10110)	1-18 GHz	10/16/2018	10/24/2019
<input checked="" type="checkbox"/> Antenna	Com Power	AH-840 (101046)	18-40 GHz	5/15/2017	5/15/2019
<input checked="" type="checkbox"/> Antenna	Com Power	AL-130 (121055)	.001-30 MHz	10/16/2018	10/16/2019
<input checked="" type="checkbox"/> Antenna	Sunol	JB-6 (A100709)	30-1000 MHz	10/16/2018	10/16/2019
<input checked="" type="checkbox"/> Analyzer	Rohde & Schwarz	ESU40 (100108)	20Hz-40GHz	5/2/2018	5/2/2019
<input type="checkbox"/> Analyzer	Rohde & Schwarz	ESW44 (101534)	20Hz-44GHz	12/22/2017	12/22/2018
<input type="checkbox"/> Analyzer	Rohde & Schwarz	FS-Z60, 90, 140, and 220	40GHz-220GHz	12/22/2017	12/22/2019
<input checked="" type="checkbox"/> Amplifier	Com-Power	PA-010 (171003)	100Hz-30MHz	10/16/2018	10/16/2019
<input checked="" type="checkbox"/> Amplifier	Com-Power	CPPA-102 (01254)	1-1000 MHz	10/16/2018	10/16/2019
<input checked="" type="checkbox"/> Amplifier	Com-Power	PAM-118A (551014)	0.5-18 GHz	10/16/2018	10/16/2019
<input checked="" type="checkbox"/> Amplifier	Com-Power	PAM-840A (461328)	18-40 GHz	10/16/2018	10/16/2019
<input type="checkbox"/> Power Meter	Agilent	N1911A with N1921A	0.05-40 GHz	5/2/2018	5/2/2019
<input type="checkbox"/> Generator	Rohde & Schwarz	SMB100A6 (100150)	20Hz-6 GHz	5/2/2018	5/2/2019
<input type="checkbox"/> Generator	Rohde & Schwarz	SMBV100A6 (260771)	20Hz-6 GHz	5/2/2018	5/2/2019
<input type="checkbox"/> RF Filter	Micro-Tronics	BRC50722 (009).9G notch	30-1800 MHz	5/2/2018	5/2/2019
<input type="checkbox"/> RF Filter	Micro-Tronics	HPM50114 (017)1.5G HPF	30-18000 MHz	5/2/2018	5/2/2019
<input type="checkbox"/> RF Filter	Micro-Tronics	HPM50117 (063) 3G HPF	30-18000 MHz	5/2/2018	5/2/2019
<input type="checkbox"/> RF Filter	Micro-Tronics	HPM50105 (059) 6G HPF	30-18000 MHz	5/2/2018	5/2/2019
<input type="checkbox"/> RF Filter	Micro-Tronics	BRM50702 (172) 2G notch	30-1800 MHz	5/2/2018	5/2/2019
<input type="checkbox"/> RF Filter	Micro-Tronics	BRC50703 (G102) 5G notch	30-1800 MHz	5/2/2018	5/2/2019
<input type="checkbox"/> RF Filter	Micro-Tronics	BRC50705 (024) 5G notch	30-1800 MHz	5/2/2018	5/2/2019
<input type="checkbox"/> Attenuator	Fairview	SA6NFN100W-14 (1625)	30-1800 MHz	5/2/2018	5/2/2019
<input type="checkbox"/> Attenuator	Mini-Circuits	VAT-3W2+ (1735)	30-6000 MHz	5/2/2018	5/2/2019
<input type="checkbox"/> Attenuator	Mini-Circuits	VAT-3W2+ (1436)	30-6000 MHz	5/2/2018	5/2/2019
<input type="checkbox"/> Attenuator	Mini-Circuits	VAT-3W2+ (14362)	30-6000 MHz	5/2/2018	5/2/2019
<input type="checkbox"/> Attenuator	Mini-Circuits	VAT-3W2+ (1445)	30-6000 MHz	5/2/2018	5/2/2019
<input type="checkbox"/> Attenuator	Mini-Circuits	VAT-3W2+ (14452)	30-6000 MHz	5/2/2018	5/2/2019
<input type="checkbox"/> Attenuator	Mini-Circuits	VAT-6W2+ (1438)	30-6000 MHz	5/2/2018	5/2/2019
<input type="checkbox"/> Attenuator	Mini-Circuits	VAT-6W2+ (1736)	30-6000 MHz	5/2/2018	5/2/2019
<input type="checkbox"/> Attenuator	JFW Industries	50FH-010-10 (1)	30-18000 MHz	5/2/2018	5/2/2019
<input checked="" type="checkbox"/> Weather station	Davis	6312 (A81120N075)		10/26/2018	10/26/2019

Rogers Labs, Inc.
4405 West 259th Terrace
Louisburg, KS 66053
Phone/Fax: (913) 837-3214
Revision 1

Garmin International, Inc.
Test: 181110
Test to: CFR47 15.249
File: IPH0225612 FCC DXX TstRpt 181110

SN's: 51W000108, 51Y000104
FCC ID: IPH-0225612
Date: March 1, 2019
Page 12 of 46

Units of Measurements

Conducted EMI Data is in dB μ V; dB referenced to one microvolt

Radiated EMI Data is in dB μ V/m; dB/m referenced to one microvolt per meter

Sample Calculation:

RFS = Radiated Field Strength, FSM = Field Strength Measured

A.F. = Receive antenna factor, Gain = amplification gains and/or cable losses

RFS (dB μ V/m @ 3m) = FSM (dB μ V) + A.F. (dB) - Gain (dB)

Environmental Conditions

Ambient Temperature 20.9-22.3° C

Relative Humidity 35-39%

Atmospheric Pressure 1015.2-1019.4 mb

Statement of Modifications and Deviations

No modifications to the EUT were required for the equipment to demonstrate compliance with the 47 CFR Part 15C, 15.249 emission requirements. There were no deviations to the specifications.

Intentional Radiators

The following information is submitted supporting compliance with the requirements of 47 CFR, Subpart C, paragraph 15.249.

Antenna Requirements

The design utilizes an internal chip antenna. The remote mounted design can be configured to disconnect from the internal chip antenna and connect to an external stub antenna provided by the manufacturer. The End user of the transponder Antenna configuration is determined by the installer during the installation process, with the end user of the transponder not having access to make modifications. The antenna connection point complies with the unique antenna connection requirements. There are no deviations or exceptions to the specification.

Restricted Bands of Operation

Spurious emissions falling in the restricted frequency bands of operation were measured at the OATS. The EUT utilizes frequency, determining circuitry, which generates harmonics falling in the restricted bands. Emissions were investigated at the OATS, using appropriate antennas or pyramidal horns, amplification stages, and a spectrum analyzer. Peak and average amplitudes of frequencies above 1000 MHz were compared to the required limits with worst-case data presented below. Test procedures of ANSI C63.10-2013 were used during testing. No other significant emission was observed which fell into the restricted bands of operation. Computed emission values take into account the received radiated field strength, receive antenna correction factor, amplifier gain stage, and test system cable losses.

Table 1 Radiated Emissions in Restricted Frequency Bands Data (BR (GFSK)) #1

Frequency in MHz	Horizontal Peak (dB μ V/m)	Horizontal Quasi-Peak (dB μ V/m)	Horizontal Average (dB μ V/m)	Vertical Peak (dB μ V/m)	Vertical Quasi-Peak (dB μ V/m)	Vertical Average (dB μ V/m)	Limit @ 3m (dB μ V/m)
2390.0	49.3	N/A	28.9	51.2	N/A	28.8	54.0
2483.5	47.6	N/A	30.8	46.7	N/A	31.7	54.0
4804.0	45.4	N/A	32.8	45.6	N/A	32.9	54.0
4882.0	45.8	N/A	33.4	45.7	N/A	32.5	54.0
4960.0	47.5	N/A	35.5	47.0	N/A	33.7	54.0
7206.0	47.4	N/A	34.6	48.5	N/A	36.2	54.0
7323.0	47.7	N/A	34.5	50.1	N/A	40.3	54.0
7440.0	47.6	N/A	34.5	51.7	N/A	43.3	54.0
12010.0	51.7	N/A	38.6	51.2	N/A	38.4	54.0
12205.0	51.1	N/A	37.2	50.5	N/A	37.2	54.0
12400.0	51.0	N/A	37.9	50.8	N/A	37.8	54.0

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency range below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 2 Radiated Emissions in Restricted Frequency Bands Data (2EDR (PI/4 DQPSK)) #1

Frequency in MHz	Horizontal Peak (dBµV/m)	Horizontal Quasi-Peak (dBµV/m)	Horizontal Average (dBµV/m)	Vertical Peak (dBµV/m)	Vertical Quasi-Peak (dBµV/m)	Vertical Average (dBµV/m)	Limit @ 3m (dBµV/m)
2390.0	42.4	N/A	29.8	49.4	N/A	30.5	54.0
2483.5	51.7	N/A	36.9	53.2	N/A	38.8	54.0
4804.0	46.1	N/A	33.1	46.3	N/A	33.0	54.0
4882.0	45.6	N/A	33.0	46.5	N/A	33.5	54.0
4960.0	46.8	N/A	34.0	46.7	N/A	33.8	54.0
7206.0	47.5	N/A	35.3	49.4	N/A	37.4	54.0
7323.0	47.9	N/A	35.0	48.8	N/A	36.6	54.0
7440.0	48.6	N/A	36.1	48.9	N/A	37.3	54.0
12010.0	51.4	N/A	38.5	51.1	N/A	38.5	54.0
12205.0	51.2	N/A	37.2	49.9	N/A	37.1	54.0
12400.0	51.3	N/A	38.0	50.4	N/A	37.9	54.0

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency range below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 3 Radiated Emissions in Restricted Frequency Bands Data (3EDR (8DPSK)) #1

Frequency in MHz	Horizontal Peak (dBµV/m)	Horizontal Quasi-Peak (dBµV/m)	Horizontal Average (dBµV/m)	Vertical Peak (dBµV/m)	Vertical Quasi-Peak (dBµV/m)	Vertical Average (dBµV/m)	Limit @ 3m (dBµV/m)
2390.0	45.5	N/A	30.4	47.8	N/A	30.9	54.0
2483.5	53.8	N/A	37.6	57.5	N/A	39.6	54.0
4804.0	45.9	N/A	33.4	45.6	N/A	33.1	54.0
4882.0	46.3	N/A	33.0	46.1	N/A	33.3	54.0
4960.0	46.8	N/A	33.7	46.5	N/A	33.6	54.0
7206.0	48.0	N/A	35.5	49.6	N/A	37.7	54.0
7323.0	47.3	N/A	34.6	49.1	N/A	37.1	54.0
7440.0	48.8	N/A	37.0	48.7	N/A	36.6	54.0
12010.0	51.2	N/A	38.5	51.1	N/A	38.5	54.0
12205.0	50.3	N/A	37.0	50.1	N/A	37.0	54.0
12400.0	50.6	N/A	37.8	50.2	N/A	37.9	54.0

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency range below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 4 Radiated Emissions in Restricted Frequency Bands Data (BLE (GMSK)) #1

Frequency in MHz	Horizontal Peak (dBµV/m)	Horizontal Quasi-Peak (dBµV/m)	Horizontal Average (dBµV/m)	Vertical Peak (dBµV/m)	Vertical Quasi-Peak (dBµV/m)	Vertical Average (dBµV/m)	Limit @ 3m (dBµV/m)
2390.0	43.3	N/A	29.1	49.4	N/A	29.1	54.0
2483.5	49.8	N/A	31.3	49.9	N/A	31.9	54.0
4804.0	45.9	N/A	32.7	45.7	N/A	32.9	54.0
4880.0	46.5	N/A	33.2	47.5	N/A	33.6	54.0
4960.0	47.0	N/A	34.8	47.3	N/A	34.6	54.0
7206.0	48.2	N/A	35.9	49.8	N/A	38.0	54.0
7320.0	47.2	N/A	34.8	48.7	N/A	36.5	54.0
7440.0	48.7	N/A	35.8	49.1	N/A	36.6	54.0
12010.0	51.6	N/A	38.6	51.5	N/A	38.4	54.0
12200.0	50.2	N/A	37.0	50.1	N/A	36.9	54.0
12400.0	50.8	N/A	37.8	50.1	N/A	37.7	54.0

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency range below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 5 Radiated Emissions in Restricted Frequency Bands Data (BR (GFSK)) #2

Frequency in MHz	Horizontal Peak (dBµV/m)	Horizontal Quasi-Peak (dBµV/m)	Horizontal Average (dBµV/m)	Vertical Peak (dBµV/m)	Vertical Quasi-Peak (dBµV/m)	Vertical Average (dBµV/m)	Limit @ 3m (dBµV/m)
2390.0	43.0	N/A	30.1	42.7	N/A	29.5	54.0
2483.5	51.9	N/A	34.5	45.3	N/A	31.4	54.0
4804.0	48.2	N/A	37.9	48.8	N/A	37.3	54.0
4882.0	48.5	N/A	39.0	48.5	N/A	37.7	54.0
4960.0	47.4	N/A	34.2	45.7	N/A	33.1	54.0
7206.0	50.4	N/A	39.9	48.2	N/A	37.1	54.0
7323.0	50.1	N/A	40.3	48.1	N/A	35.2	54.0
7440.0	49.4	N/A	39.3	49.2	N/A	37.9	54.0
12010.0	52.1	N/A	38.7	52.1	N/A	38.6	54.0
12205.0	50.1	N/A	37.5	50.7	N/A	37.4	54.0
12400.0	51.2	N/A	38.3	50.8	N/A	38.1	54.0

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency range below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 6 Radiated Emissions in Restricted Frequency Bands Data (2EDR (PI/4 DQPSK)) #2

Frequency in MHz	Horizontal Peak (dBµV/m)	Horizontal Quasi-Peak (dBµV/m)	Horizontal Average (dBµV/m)	Vertical Peak (dBµV/m)	Vertical Quasi-Peak (dBµV/m)	Vertical Average (dBµV/m)	Limit @ 3m (dBµV/m)
2390.0	43.6	N/A	30.5	43.5	N/A	30.2	54.0
2483.5	54.6	N/A	40.4	52.8	N/A	38.3	54.0
4804.0	47.5	N/A	35.8	46.8	N/A	34.7	54.0
4882.0	46.3	N/A	33.4	45.6	N/A	32.9	54.0
4960.0	46.5	N/A	33.0	46.3	N/A	33.0	54.0
7206.0	49.0	N/A	37.3	49.4	N/A	37.6	54.0
7323.0	48.4	N/A	37.8	48.0	N/A	35.6	54.0
7440.0	48.7	N/A	37.2	49.4	N/A	38.8	54.0
12010.0	51.3	N/A	38.7	51.7	N/A	38.7	54.0
12205.0	50.6	N/A	37.4	50.5	N/A	37.1	54.0
12400.0	51.1	N/A	38.0	51.3	N/A	38.1	54.0

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency range below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 7 Radiated Emissions in Restricted Frequency Bands Data (3EDR (8DPSK)) #2

Frequency in MHz	Horizontal Peak (dBµV/m)	Horizontal Quasi-Peak (dBµV/m)	Horizontal Average (dBµV/m)	Vertical Peak (dBµV/m)	Vertical Quasi-Peak (dBµV/m)	Vertical Average (dBµV/m)	Limit @ 3m (dBµV/m)
2390.0	48.2	N/A	30.8	47.5	N/A	30.5	54.0
2483.5	57.5	N/A	40.1	56.0	N/A	38.5	54.0
4804.0	47.4	N/A	35.6	47.7	N/A	35.0	54.0
4882.0	46.2	N/A	33.8	46.0	N/A	33.7	54.0
4960.0	46.2	N/A	33.2	45.6	N/A	33.0	54.0
7206.0	50.2	N/A	37.7	48.6	N/A	36.4	54.0
7323.0	49.1	N/A	37.8	47.7	N/A	34.9	54.0
7440.0	48.5	N/A	36.5	48.8	N/A	36.0	54.0
12010.0	51.0	N/A	38.7	51.8	N/A	38.7	54.0
12205.0	50.3	N/A	37.4	49.9	N/A	37.4	54.0
12400.0	50.3	N/A	37.9	50.5	N/A	37.9	54.0

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency range below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 8 Radiated Emissions in Restricted Frequency Bands Data (BLE (GMSK)) #2

Frequency in MHz	Horizontal Peak (dBµV/m)	Horizontal Quasi-Peak (dBµV/m)	Horizontal Average (dBµV/m)	Vertical Peak (dBµV/m)	Vertical Quasi-Peak (dBµV/m)	Vertical Average (dBµV/m)	Limit @ 3m (dBµV/m)
2390.0	42.6	N/A	29.5	54.4	N/A	29.1	54.0
2483.5	47.0	N/A	33.5	45.9	N/A	32.4	54.0
4804.0	48.2	N/A	37.3	46.7	N/A	34.8	54.0
4880.0	48.0	N/A	37.7	46.5	N/A	33.9	54.0
4960.0	46.1	N/A	33.8	46.0	N/A	33.3	54.0
7206.0	48.6	N/A	36.7	48.8	N/A	37.0	54.0
7320.0	48.5	N/A	37.1	50.3	N/A	39.2	54.0
7440.0	49.7	N/A	37.5	49.1	N/A	36.6	54.0
12010.0	52.2	N/A	38.8	51.3	N/A	38.8	54.0
12200.0	50.3	N/A	37.6	50.5	N/A	37.7	54.0
12400.0	51.0	N/A	38.3	51.1	N/A	38.3	54.0

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency range below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Summary of Results for Radiated Emissions in Restricted Bands

The EUT demonstrated compliance with the radiated emissions requirements of 47 CFR Part 15C Intentional Radiator requirements. The EUT #1 demonstrated a worst-case minimum margin of -10.7 dB below the emissions requirements in restricted frequency bands. The EUT #2 demonstrated a worst-case minimum margin of -13.6 dB below the emissions requirements in restricted frequency bands. Peak, Quasi-peak, and average amplitudes were checked for compliance with the regulations. Worst-case emissions are reported with other emissions found in the restricted frequency bands at least 20 dB below the requirements.

General Radiated Emissions Procedure

The EUT was arranged in typical equipment configurations and operated through available modes during testing. Preliminary testing was performed in a screen room with the EUT positioned 1 meter from the FSM. Radiated emissions measurements were performed to identify the frequencies, which produced the highest emissions. Each radiated emission was then maximized at the OATS location before final radiated measurements were performed. Final data was taken with the EUT located at the OATS at a distance of 3 meters between the EUT and the receiving antenna. The frequency spectrum from 9 kHz to 25,000 MHz was searched for general radiated emissions. Measured emission levels were maximized by EUT placement on the table, rotating the turntable through 360 degrees, varying the antenna height between 1 and 4 meters above the ground plane and changing antenna position between horizontal and vertical polarization. Antennas used were Loop from 9 kHz to 30 MHz, Broadband Biconical from 30 to 200 MHz, Biconilog from 30 to 1000 MHz, Log Periodic from 200 MHz to 1 GHz and or double Ridge or pyramidal horns and mixers above 1 GHz, notch filters and appropriate amplifiers and external mixers were utilized.

Table 9 General Radiated Emissions Data (worse-case)

Frequency in MHz	Horizontal Peak (dBµV/m)	Horizontal Quasi-Peak (dBµV/m)	Horizontal Average (dBµV/m)	Vertical Peak (dBµV/m)	Vertical Quasi-Peak (dBµV/m)	Vertical Average (dBµV/m)	Limit @ 3m (dBµV/m)
48.9	39.4	33.5	N/A	42.5	36.4	N/A	40.0
52.1	37.5	29.5	N/A	42.5	36.9	N/A	40.0
120.0	33.1	26.6	N/A	30.9	24.8	N/A	40.0
210.5	47.9	20.1	N/A	39.3	16.0	N/A	47.0
300.0	27.4	24.5	N/A	22.5	17.3	N/A	47.0
375.0	35.7	33.4	N/A	25.4	21.0	N/A	47.0
625.0	41.5	36.2	N/A	44.1	41.5	N/A	47.0

Other emissions present had amplitudes at least 10 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency range below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Summary of Results for General Radiated Emissions

The EUT demonstrated compliance with the radiated emissions requirements of 47 CFR Part 15C Intentional Radiators. The EUT demonstrated a minimum margin of -3.1 dB below the requirements. Other emissions were present with amplitudes at least 10 dB below the Limits.

Operation in the Band 2400 – 2483.5 MHz

The transmitter output power; harmonic and general emissions were measured on an open area test site @ 3 meters. The EUT was placed on a turntable elevated as required above the ground plane and at a distance of 3 meters from the FSM antenna. The peak and quasi-peak amplitude of frequencies below 1000 MHz were measured using a spectrum analyzer. The peak and average amplitude of frequencies above 1000 MHz were measured using a spectrum analyzer. The amplitude of each emission was then recorded from the analyzer display. Emissions radiated outside of the specified bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits, whichever is the lesser attenuation. Antenna port emission plots were taken of transmitter performance for reference in this and other documentation using test sample #2. The amplitude of each radiated emission was measured on the OATS at a distance of 3 meters from the FSM antenna testing was performed on sample representative of production with integral antenna (sample #1) with worst-case data provided. The amplitude of each radiated emission was maximized by equipment orientation and placement on the turn table, raising and lowering the FSM (Field Strength Measuring) antenna, changing the FSM antenna polarization, and by rotating the turntable. A Loop antenna was used for measuring emissions from 0.009 to 30 MHz, Biconilog Antenna for 30 to 1000 MHz, Double-Ridge, and/or Pyramidal Horn Antennas from 1 GHz to 25 GHz. Emissions were measured in dB μ V/m @ 3 meters.

Refer to figures one through sixteen showing plots taken of the 2402-2480 MHz transmitter operation displaying compliance with the specifications.

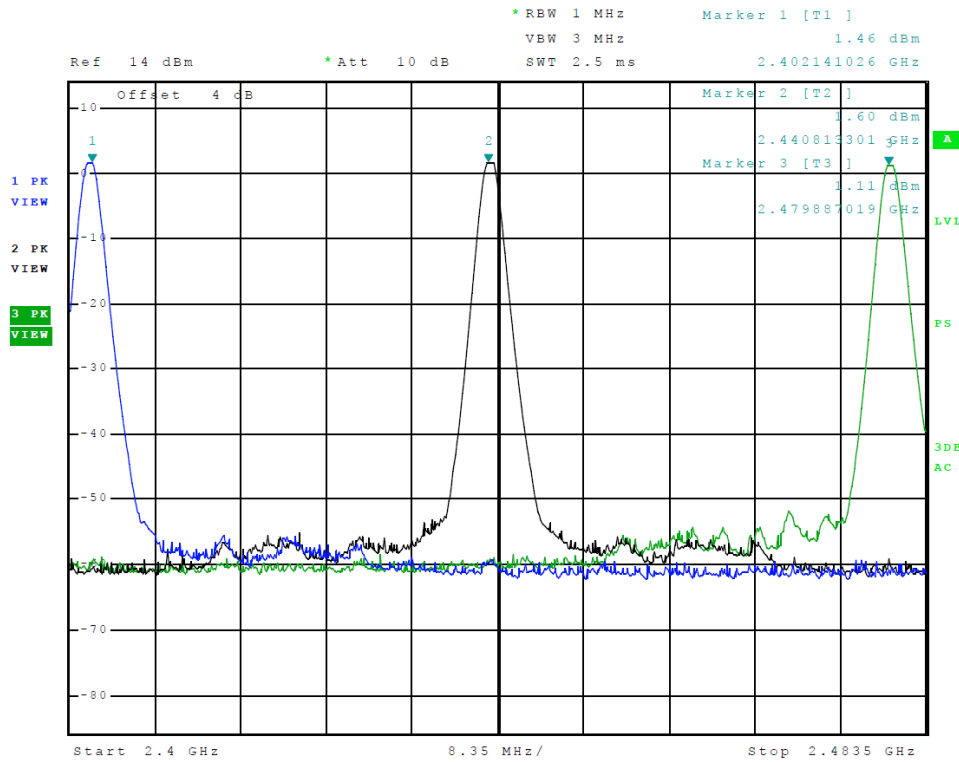


Figure 1 Plot of Transmitter Emissions Operation in 2402-2480 MHz (BR (GFSK))

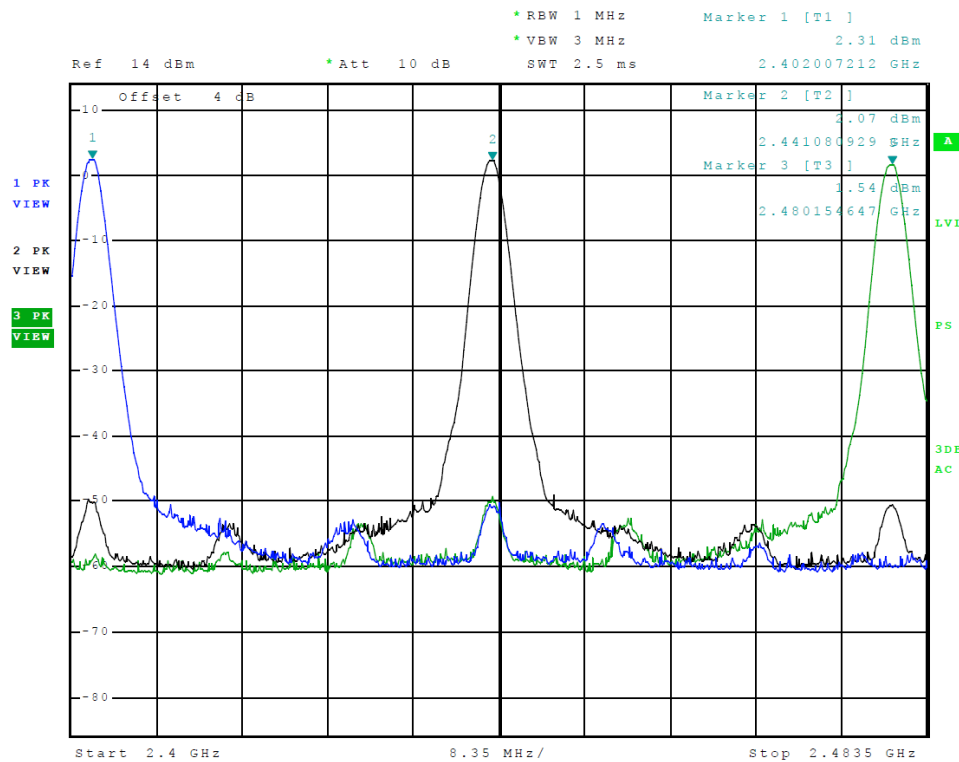


Figure 2 Plot of Transmitter Emissions Operation in 2402-2480 MHz (2EDR (PI/4 DQPSK))

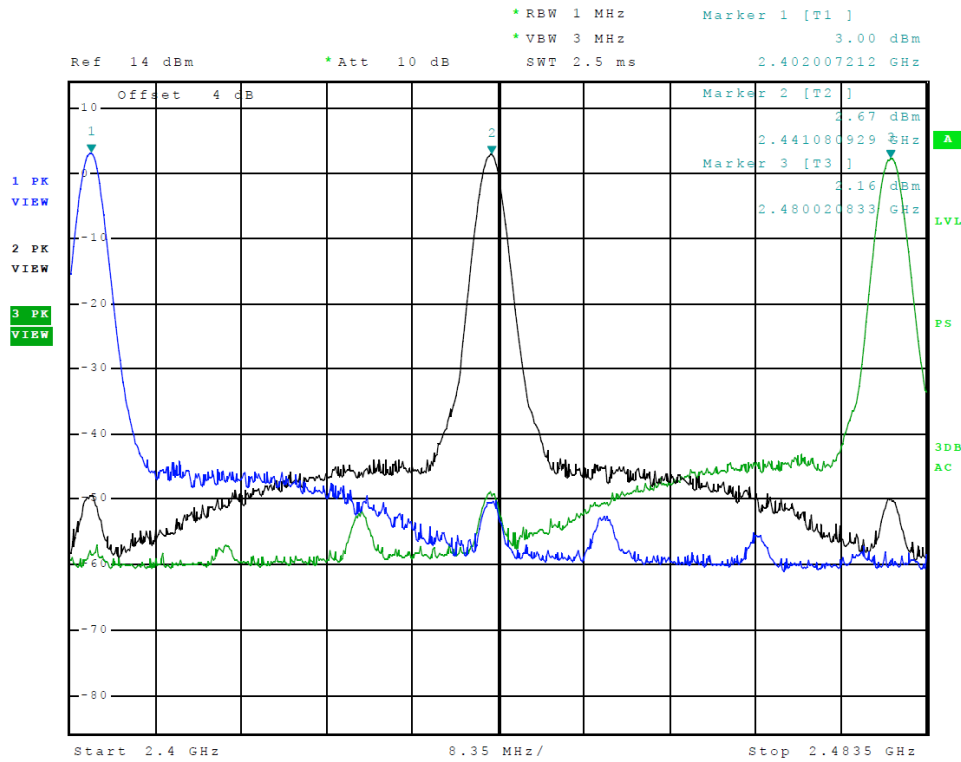


Figure 3 Plot of Transmitter Emissions Operation in 2402-2480 MHz (3EDR (8DPSK))

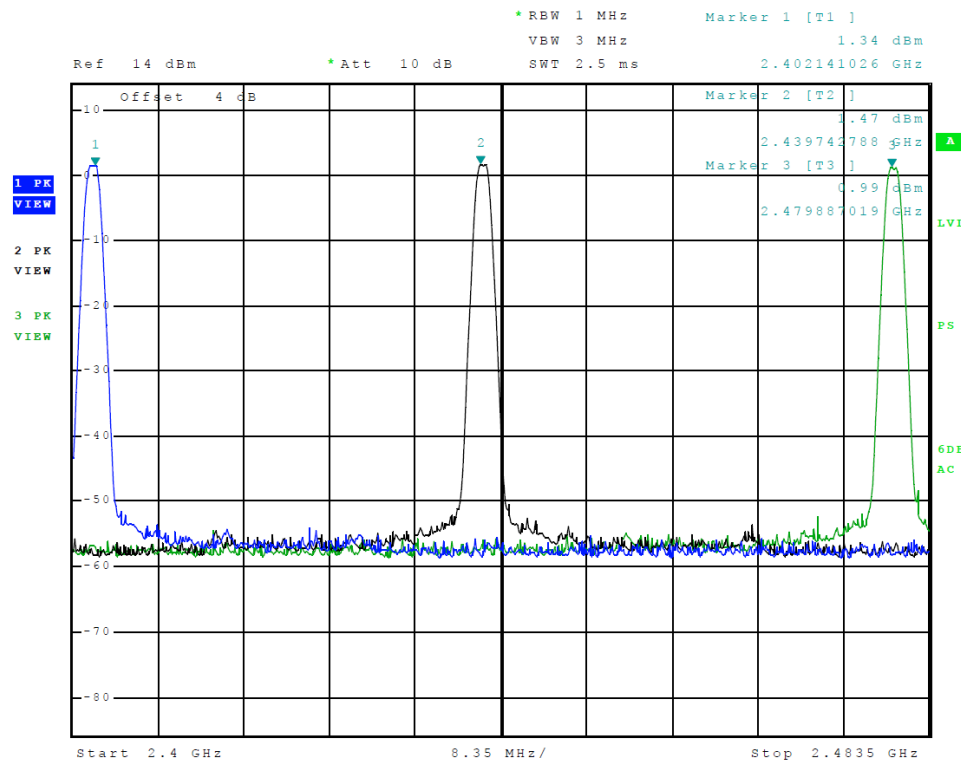


Figure 4 Plot of Transmitter Emissions Operation in 2402-2480 MHz (BLE (GMSK))

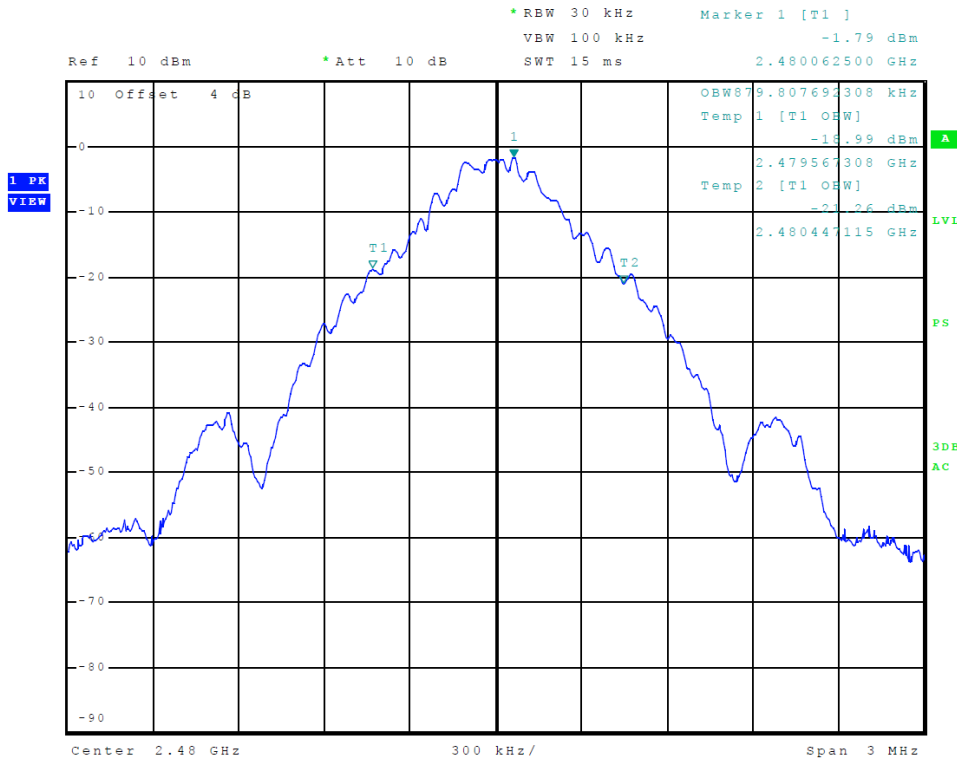


Figure 5 Plot of Transmitter Emissions 99% Occupied Bandwidth (BR (GFSK))

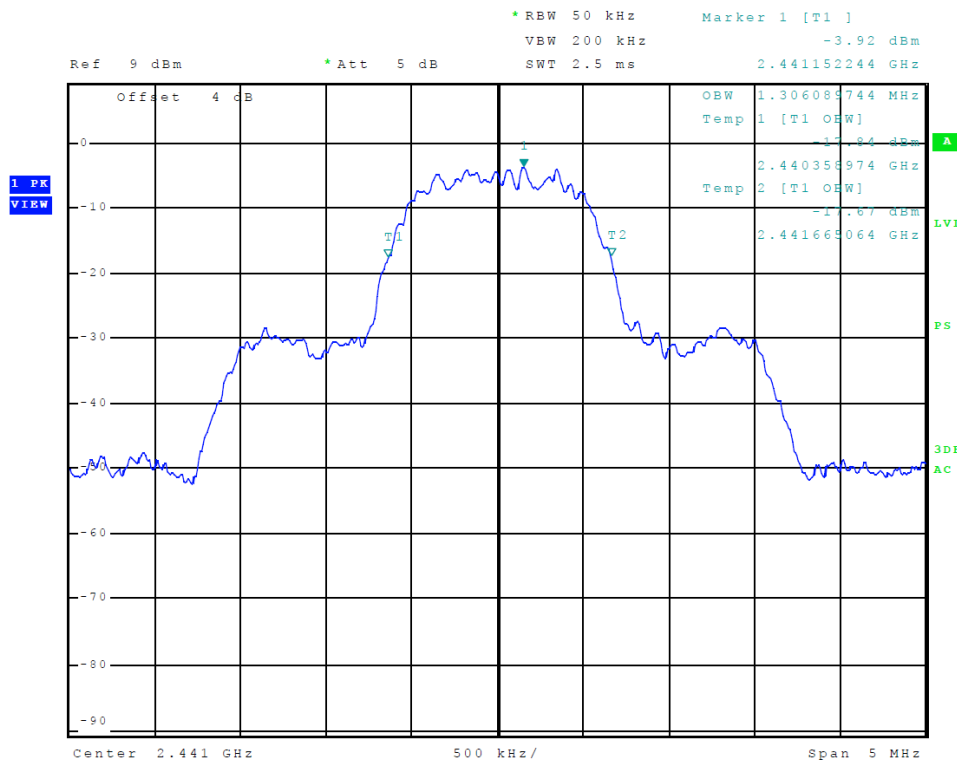


Figure 6 Plot of Transmitter Emissions 99% Occupied Bandwidth (2EDR (PI/4 DQPSK))

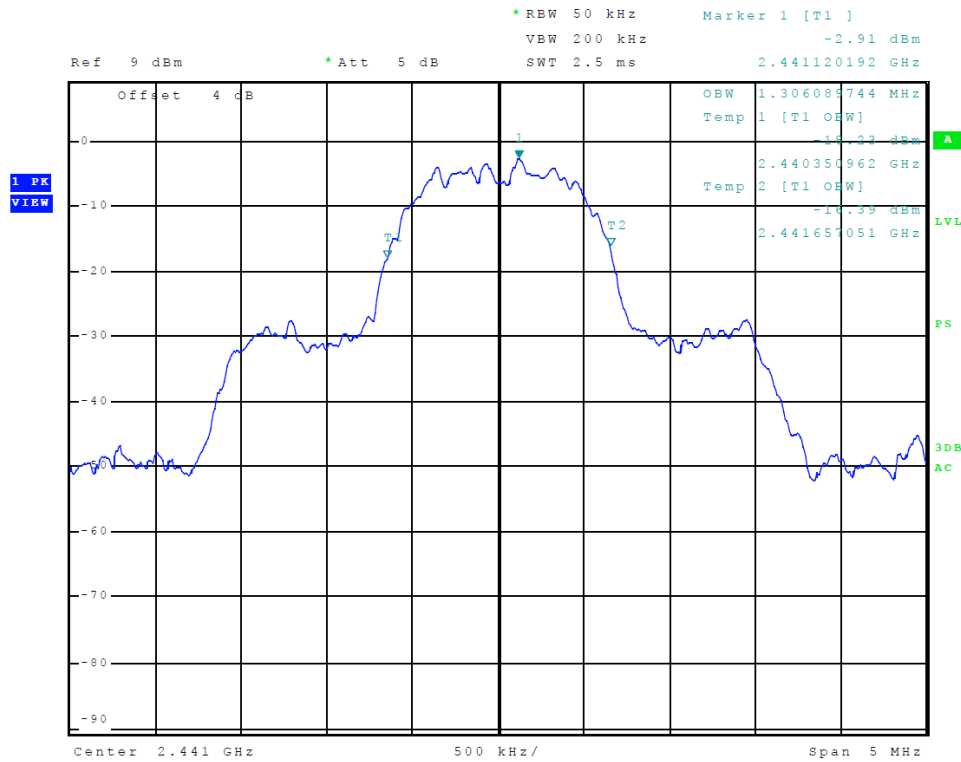


Figure 7 Plot of Transmitter Emissions 99% Occupied Bandwidth (3EDR (8DPSK))

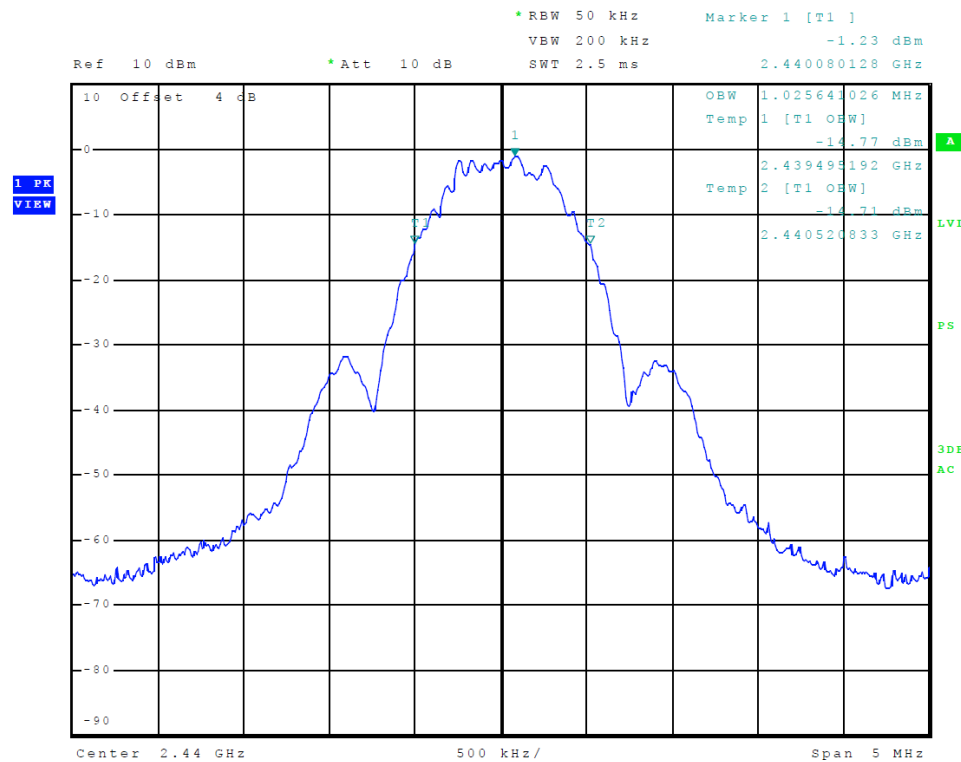


Figure 8 Plot of Transmitter Emissions 99% Occupied Bandwidth (BLE (GMSK))

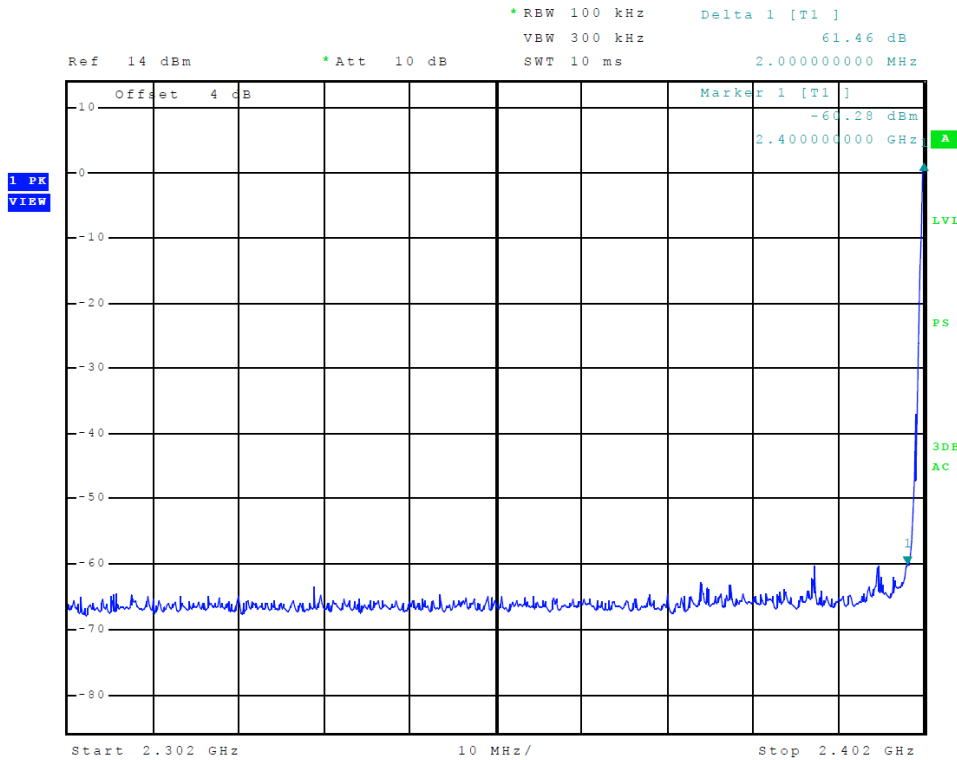


Figure 9 Plot of Transmitter Emissions Low Band Edge (BR (GFSK))

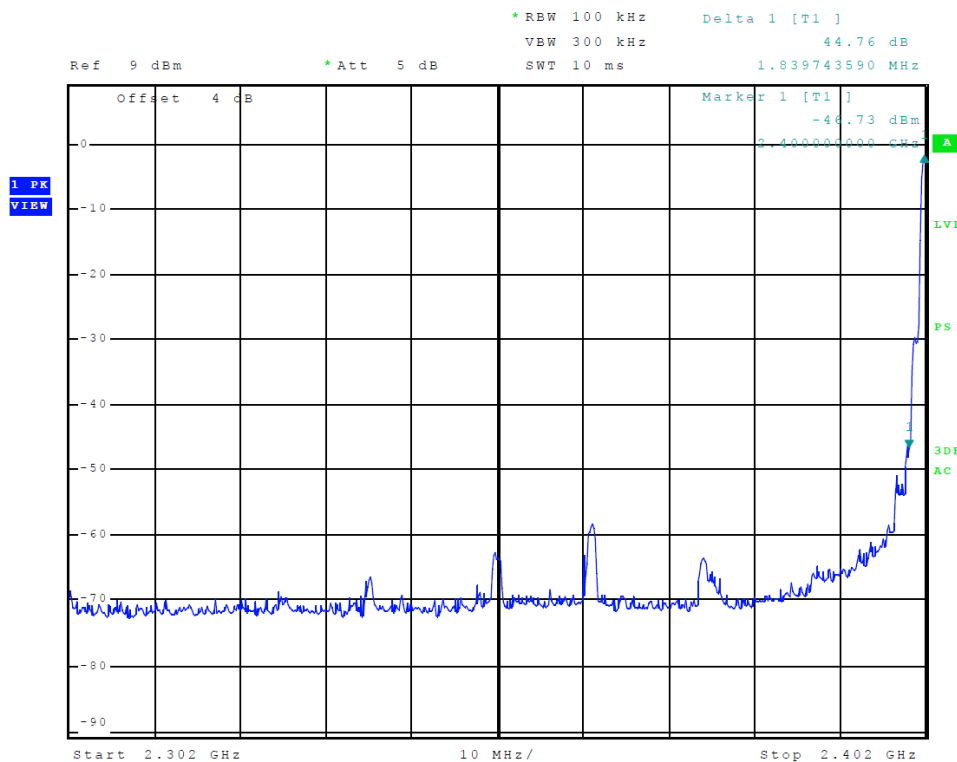


Figure 10 Plot of Transmitter Emissions Low Band Edge (2EDR (PI/4 DQPSK))

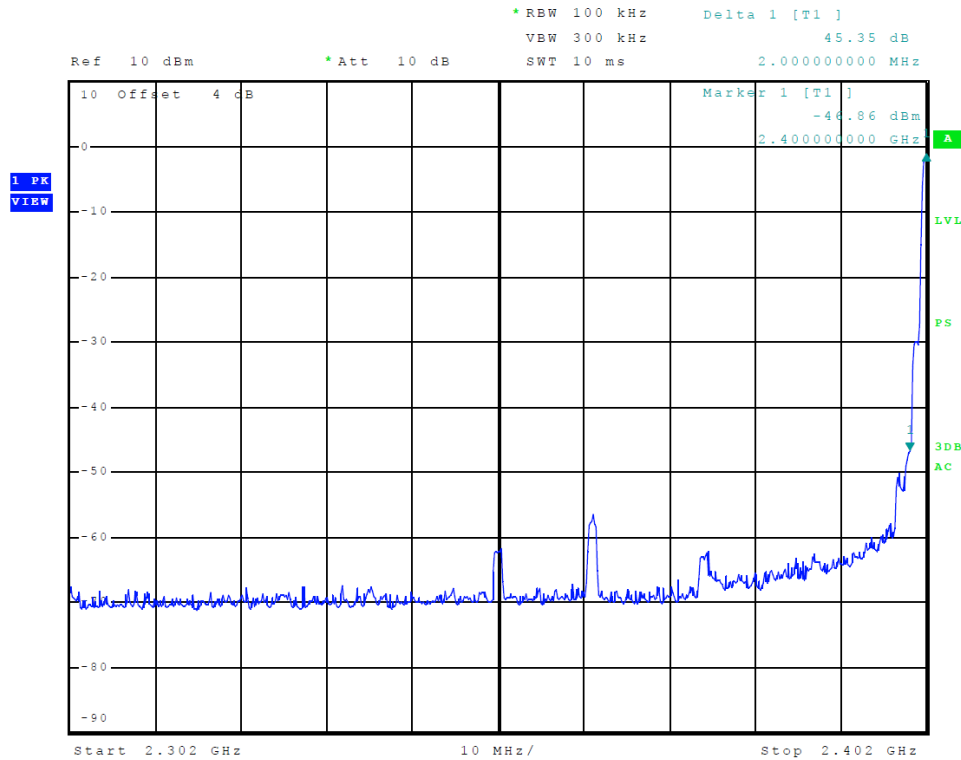


Figure 11 Plot of Transmitter Emissions Low Band Edge (3EDR (8DPSK))

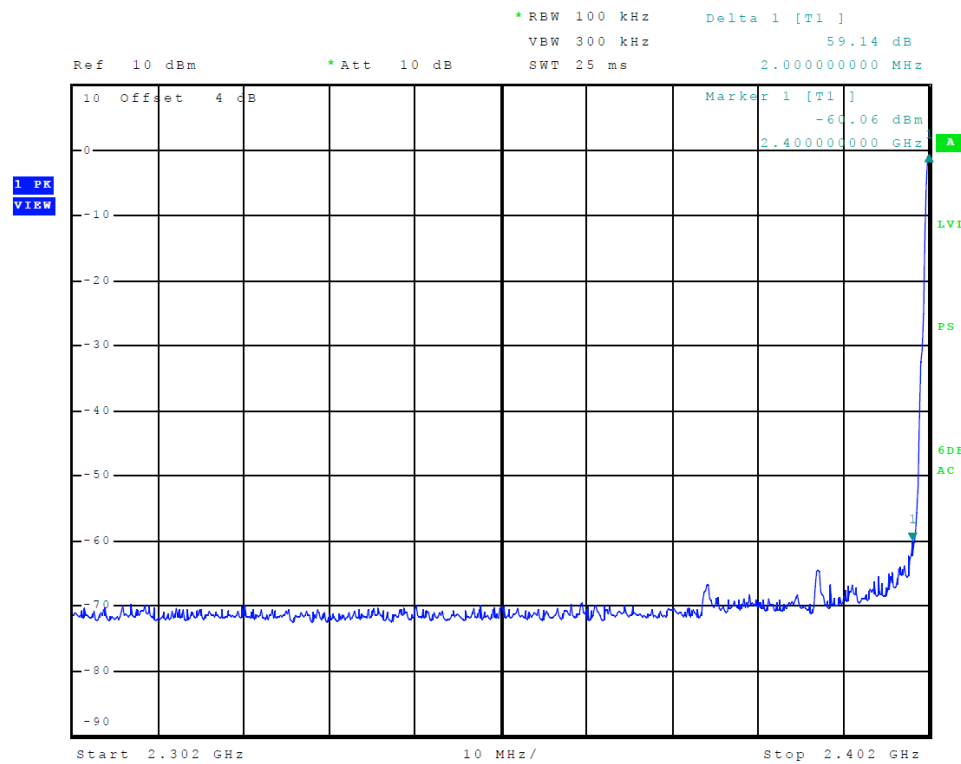


Figure 12 Plot of Transmitter Emissions Low Band Edge (BLE (GMSK))

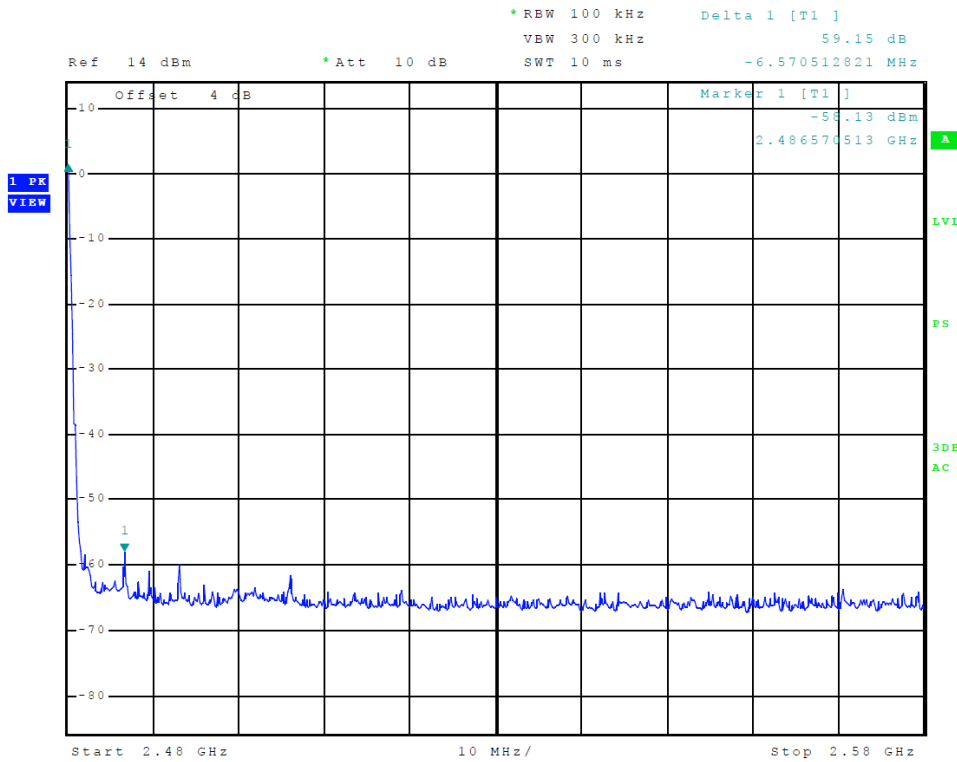


Figure 13 Plot of Transmitter Emissions High Band Edge (BR (GFSK))

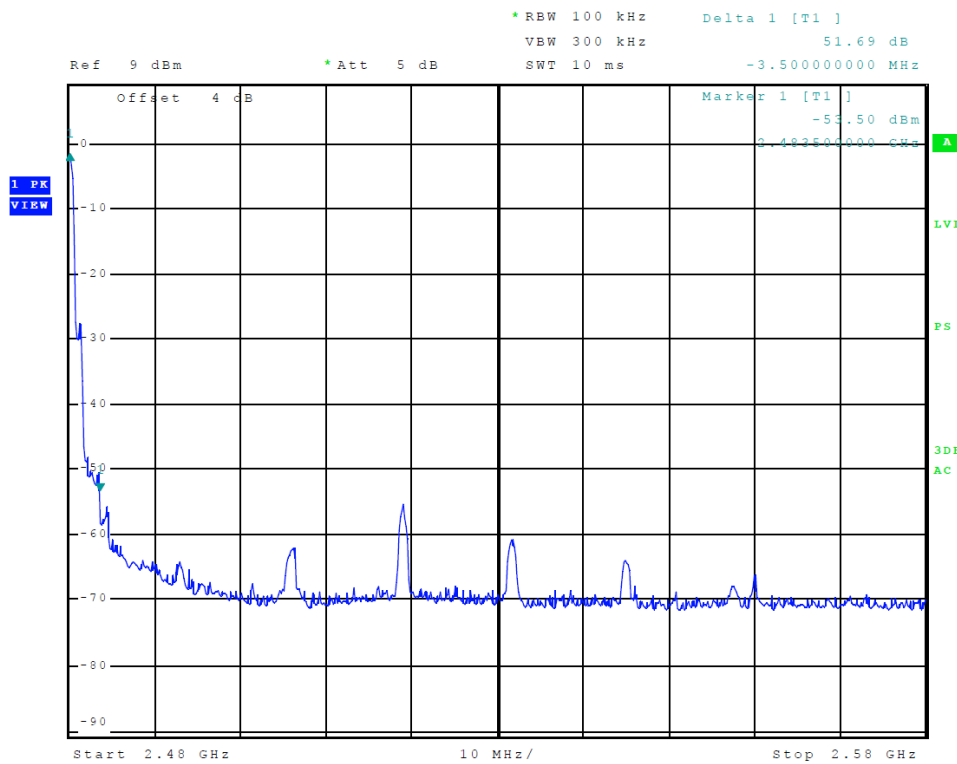


Figure 14 Plot of Transmitter Emissions High Band Edge (2EDR (PI/4 DQPSK))

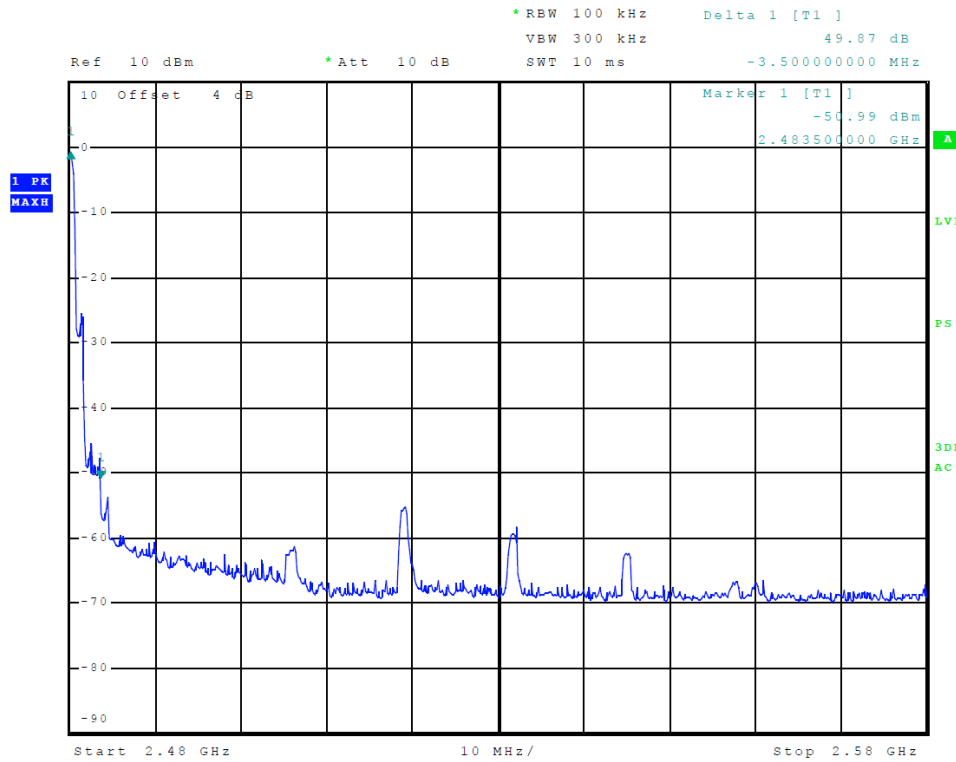


Figure 15 Plot of Transmitter Emissions High Band Edge (3EDR (8DPSK))

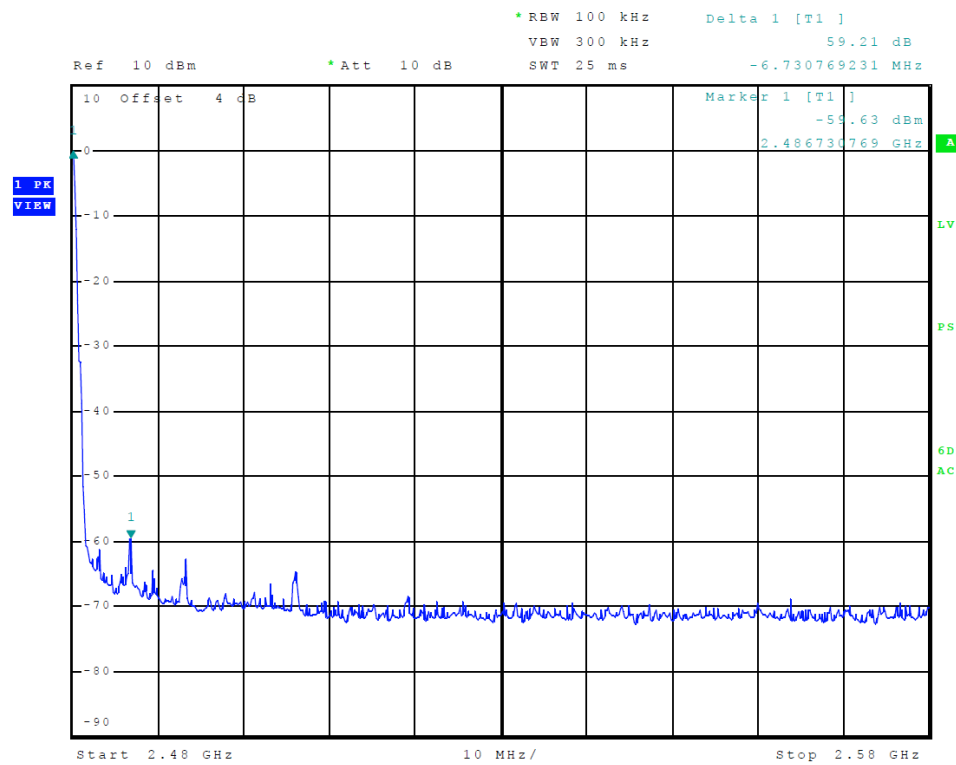


Figure 16 Plot of Transmitter Emissions High Band Edge (BLE (GMSK))

Transmitter Emissions Data

Table 10 Transmitter Radiated Emissions (BR (GFSK)) #1

Frequency in MHz	Horizontal Peak (dB μ V/m)	Horizontal Quasi-Peak (dB μ V/m)	Horizontal Average (dB μ V/m)	Vertical Peak (dB μ V/m)	Vertical Quasi-Peak (dB μ V/m)	Vertical Average (dB μ V/m)	Limit @ 3m (dB μ V/m)
2402.0	92.2	N/A	91.5	94.0	N/A	93.6	94.0
4804.0	45.4	N/A	32.8	45.6	N/A	32.9	54.0
7206.0	47.4	N/A	34.6	48.5	N/A	36.2	54.0
9608.0	49.2	N/A	35.9	48.9	N/A	35.8	54.0
12010.0	51.7	N/A	38.6	51.2	N/A	38.4	54.0
14412.0	53.2	N/A	40.3	53.1	N/A	40.4	54.0
16814.0	57.4	N/A	44.5	57.5	N/A	44.6	54.0
2441.0	92.1	N/A	91.3	94.0	N/A	93.3	94.0
4882.0	45.8	N/A	33.4	45.7	N/A	32.5	54.0
7323.0	47.7	N/A	34.5	50.1	N/A	40.3	54.0
9764.0	49.1	N/A	35.9	48.9	N/A	36.0	54.0
12205.0	51.1	N/A	37.2	50.5	N/A	37.2	54.0
14646.0	52.9	N/A	39.5	52.5	N/A	39.4	54.0
17087.0	57.4	N/A	44.5	57.3	N/A	44.5	54.0
2480.0	91.5	N/A	91.1	94.3	N/A	93.9	94.0
4960.0	47.5	N/A	35.5	47.0	N/A	33.7	54.0
7440.0	47.6	N/A	34.5	51.7	N/A	43.3	54.0
9920.0	48.6	N/A	35.6	49.0	N/A	35.7	54.0
12400.0	51.0	N/A	37.9	50.8	N/A	37.8	54.0
14880.0	52.9	N/A	39.6	52.5	N/A	39.6	54.0
17360.0	55.9	N/A	42.8	55.6	N/A	42.8	54.0

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency range below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 11 Transmitter Radiated Emissions (2EDR (PI/4 DQPSK)) #1

Frequency in MHz	Horizontal Peak (dB μ V/m)	Horizontal Quasi-Peak (dB μ V/m)	Horizontal Average (dB μ V/m)	Vertical Peak (dB μ V/m)	Vertical Quasi-Peak (dB μ V/m)	Vertical Average (dB μ V/m)	Limit @ 3m (dB μ V/m)
2402.0	94.5	N/A	91.2	96.1	N/A	92.7	94.0
4804.0	46.1	N/A	33.1	46.3	N/A	33.0	54.0
7206.0	47.5	N/A	35.3	49.4	N/A	37.4	54.0
9608.0	48.2	N/A	35.8	49.1	N/A	35.8	54.0
12010.0	51.4	N/A	38.5	51.1	N/A	38.5	54.0
14412.0	53.3	N/A	40.5	53.3	N/A	40.4	54.0
16814.0	57.5	N/A	44.5	56.8	N/A	44.4	54.0
2441.0	94.6	N/A	91.2	96.4	N/A	92.9	94.0
4882.0	45.6	N/A	33.0	46.5	N/A	33.5	54.0
7323.0	47.9	N/A	35.0	48.8	N/A	36.6	54.0
9764.0	48.5	N/A	36.0	49.0	N/A	36.0	54.0
12205.0	51.2	N/A	37.2	49.9	N/A	37.1	54.0
14646.0	53.2	N/A	39.3	52.4	N/A	39.3	54.0
17087.0	57.5	N/A	44.3	56.4	N/A	44.1	54.0
2480.0	94.1	N/A	91.2	96.3	N/A	93.4	94.0
4960.0	46.8	N/A	34.0	46.7	N/A	33.8	54.0
7440.0	48.6	N/A	36.1	48.9	N/A	37.3	54.0
9920.0	48.2	N/A	35.7	48.6	N/A	35.7	54.0
12400.0	51.3	N/A	38.0	50.4	N/A	37.9	54.0
14880.0	52.6	N/A	39.6	52.0	N/A	39.5	54.0
17360.0	56.0	N/A	42.9	55.9	N/A	42.8	54.0

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency range below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 12 Transmitter Radiated Emissions (3EDR (8DPSK)) #1

Frequency in MHz	Horizontal Peak (dBµV/m)	Horizontal Quasi-Peak (dBµV/m)	Horizontal Average (dBµV/m)	Vertical Peak (dBµV/m)	Vertical Quasi-Peak (dBµV/m)	Vertical Average (dBµV/m)	Limit @ 3m (dBµV/m)
2402.0	95.7	N/A	91.7	97.4	N/A	93.4	94.0
4804.0	45.9	N/A	33.4	45.6	N/A	33.1	54.0
7206.0	48.0	N/A	35.5	49.6	N/A	37.7	54.0
9608.0	48.3	N/A	35.7	48.3	N/A	35.8	54.0
12010.0	51.2	N/A	38.5	51.1	N/A	38.5	54.0
14412.0	53.4	N/A	40.4	54.3	N/A	40.5	54.0
16814.0	57.1	N/A	44.5	57.2	N/A	44.5	54.0
2441.0	95.4	N/A	91.6	97.4	N/A	93.3	94.0
4882.0	46.3	N/A	33.0	46.1	N/A	33.3	54.0
7323.0	47.3	N/A	34.6	49.1	N/A	37.1	54.0
9764.0	48.7	N/A	35.9	48.2	N/A	36.0	54.0
12205.0	50.3	N/A	37.0	50.1	N/A	37.0	54.0
14646.0	51.5	N/A	39.2	52.2	N/A	39.3	54.0
17087.0	57.0	N/A	44.0	56.6	N/A	44.0	54.0
2480.0	94.5	N/A	91.1	97.4	N/A	93.9	94.0
4960.0	46.8	N/A	33.7	46.5	N/A	33.6	54.0
7440.0	48.8	N/A	37.0	48.7	N/A	36.6	54.0
9920.0	48.2	N/A	35.7	49.0	N/A	35.7	54.0
12400.0	50.6	N/A	37.8	50.2	N/A	37.9	54.0
14880.0	52.2	N/A	39.6	52.2	N/A	39.5	54.0
17360.0	55.3	N/A	42.8	55.6	N/A	42.8	54.0

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency range below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 13 Transmitter Radiated Emissions (BLE (GMSK)) #1

Frequency in MHz	Horizontal Peak (dB μ V/m)	Horizontal Quasi-Peak (dB μ V/m)	Horizontal Average (dB μ V/m)	Vertical Peak (dB μ V/m)	Vertical Quasi-Peak (dB μ V/m)	Vertical Average (dB μ V/m)	Limit @ 3m (dB μ V/m)
2402.0	92.5	N/A	91.6	94.6	N/A	93.4	94.0
4804.0	45.9	N/A	32.7	45.7	N/A	32.9	54.0
7206.0	48.2	N/A	35.9	49.8	N/A	38.0	54.0
9608.0	48.9	N/A	35.8	48.4	N/A	35.8	54.0
12010.0	51.6	N/A	38.6	51.5	N/A	38.4	54.0
14412.0	54.1	N/A	40.7	53.3	N/A	40.4	54.0
16814.0	57.1	N/A	44.5	57.7	N/A	44.5	54.0
2440.0	92.5	N/A	91.6	94.9	N/A	93.5	94.0
4880.0	46.5	N/A	33.2	47.5	N/A	33.6	54.0
7320.0	47.2	N/A	34.8	48.7	N/A	36.5	54.0
9760.0	48.7	N/A	36.0	49.1	N/A	36.1	54.0
12200.0	50.2	N/A	37.0	50.1	N/A	36.9	54.0
14640.0	52.3	N/A	39.5	52.5	N/A	39.5	54.0
17080.0	57.2	N/A	44.2	56.9	N/A	44.1	54.0
2480.0	91.9	N/A	91.1	94.7	N/A	93.9	94.0
4960.0	47.0	N/A	34.8	47.3	N/A	34.6	54.0
7440.0	48.7	N/A	35.8	49.1	N/A	36.6	54.0
9920.0	48.3	N/A	35.8	48.7	N/A	35.7	54.0
12400.0	50.8	N/A	37.8	50.1	N/A	37.7	54.0
14880.0	52.6	N/A	39.6	52.3	N/A	39.5	54.0
17360.0	56.1	N/A	42.8	55.6	N/A	42.8	54.0

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency range below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 14 Transmitter Radiated Emissions (BR (GFSK)) #2

Frequency in MHz	Horizontal Peak (dBµV/m)	Horizontal Quasi-Peak (dBµV/m)	Horizontal Average (dBµV/m)	Vertical Peak (dBµV/m)	Vertical Quasi-Peak (dBµV/m)	Vertical Average (dBµV/m)	Limit @ 3m (dBµV/m)
2402.0	94.2	N/A	93.7	93.3	N/A	92.9	94.0
4804.0	48.2	N/A	37.9	48.8	N/A	37.3	54.0
7206.0	50.4	N/A	39.9	48.2	N/A	37.1	54.0
9608.0	49.0	N/A	35.8	48.3	N/A	35.8	54.0
12010.0	52.1	N/A	38.7	52.1	N/A	38.6	54.0
14412.0	54.0	N/A	41.5	54.6	N/A	41.1	54.0
16814.0	58.1	N/A	44.7	58.0	N/A	44.7	54.0
2441.0	94.4	N/A	93.9	92.4	N/A	91.8	94.0
4882.0	48.5	N/A	39.0	48.5	N/A	37.7	54.0
7323.0	50.1	N/A	40.3	48.1	N/A	35.2	54.0
9764.0	49.6	N/A	36.0	49.1	N/A	35.9	54.0
12205.0	50.1	N/A	37.5	50.7	N/A	37.4	54.0
14646.0	53.4	N/A	40.6	53.5	N/A	40.6	54.0
17087.0	58.2	N/A	45.1	58.0	N/A	45.1	54.0
2480.0	94.3	N/A	93.9	92.3	N/A	91.9	94.0
4960.0	47.4	N/A	34.2	45.7	N/A	33.1	54.0
7440.0	49.4	N/A	39.3	49.2	N/A	37.9	54.0
9920.0	49.0	N/A	35.6	48.7	N/A	35.9	54.0
12400.0	51.2	N/A	38.3	50.8	N/A	38.1	54.0
14880.0	53.3	N/A	40.4	53.1	N/A	40.3	54.0
17360.0	56.2	N/A	43.6	56.7	N/A	43.6	54.0

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency range below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 15 Transmitter Radiated Emissions (2EDR (PI/4 DQPSK)) #2

Frequency in MHz	Horizontal Peak (dBμV/m)	Horizontal Quasi-Peak (dBμV/m)	Horizontal Average (dBμV/m)	Vertical Peak (dBμV/m)	Vertical Quasi-Peak (dBμV/m)	Vertical Average (dBμV/m)	Limit @ 3m (dBμV/m)
2402.0	96.8	N/A	93.6	95.8	N/A	92.6	94.0
4804.0	47.5	N/A	35.8	46.8	N/A	34.7	54.0
7206.0	49.0	N/A	37.3	49.4	N/A	37.6	54.0
9608.0	48.8	N/A	35.6	48.9	N/A	35.6	54.0
12010.0	51.3	N/A	38.7	51.7	N/A	38.7	54.0
14412.0	54.5	N/A	41.0	54.3	N/A	41.0	54.0
16814.0	58.2	N/A	44.7	58.2	N/A	44.7	54.0
2441.0	96.7	N/A	93.8	94.9	N/A	91.8	94.0
4882.0	46.3	N/A	33.4	45.6	N/A	32.9	54.0
7323.0	48.4	N/A	37.8	48.0	N/A	35.6	54.0
9764.0	49.0	N/A	35.9	48.5	N/A	35.9	54.0
12205.0	50.6	N/A	37.4	50.5	N/A	37.1	54.0
14646.0	53.2	N/A	40.6	53.3	N/A	40.5	54.0
17087.0	58.1	N/A	45.1	59.0	N/A	45.2	54.0
2480.0	96.9	N/A	93.9	95.4	N/A	92.4	94.0
4960.0	46.5	N/A	33.0	46.3	N/A	33.0	54.0
7440.0	48.7	N/A	37.2	49.4	N/A	38.8	54.0
9920.0	49.3	N/A	35.9	49.1	N/A	35.9	54.0
12400.0	51.1	N/A	38.0	51.3	N/A	38.1	54.0
14880.0	53.0	N/A	40.2	52.6	N/A	40.0	54.0
17360.0	56.5	N/A	43.5	57.0	N/A	43.5	54.0

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency range below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 16 Transmitter Radiated Emissions (3EDR (8DPSK)) #2

Frequency in MHz	Horizontal Peak (dBµV/m)	Horizontal Quasi-Peak (dBµV/m)	Horizontal Average (dBµV/m)	Vertical Peak (dBµV/m)	Vertical Quasi-Peak (dBµV/m)	Vertical Average (dBµV/m)	Limit @ 3m (dBµV/m)
2402.0	97.0	N/A	93.4	95.8	N/A	92.2	94.0
4804.0	47.4	N/A	35.6	47.7	N/A	35.0	54.0
7206.0	50.2	N/A	37.7	48.6	N/A	36.4	54.0
9608.0	48.0	N/A	35.6	48.8	N/A	35.6	54.0
12010.0	51.0	N/A	38.7	51.8	N/A	38.7	54.0
14412.0	54.3	N/A	41.0	54.2	N/A	41.0	54.0
16814.0	58.5	N/A	44.7	57.7	N/A	44.7	54.0
2441.0	97.0	N/A	93.9	95.1	N/A	91.9	94.0
4882.0	46.2	N/A	33.8	46.0	N/A	33.7	54.0
7323.0	49.1	N/A	37.8	47.7	N/A	34.9	54.0
9764.0	48.3	N/A	35.9	48.6	N/A	35.9	54.0
12205.0	50.3	N/A	37.4	49.9	N/A	37.4	54.0
14646.0	53.1	N/A	40.6	53.2	N/A	40.6	54.0
17087.0	58.3	N/A	45.2	57.5	N/A	45.1	54.0
2480.0	97.1	N/A	93.8	96.0	N/A	92.6	94.0
4960.0	46.2	N/A	33.2	45.6	N/A	33.0	54.0
7440.0	48.5	N/A	36.5	48.8	N/A	36.0	54.0
9920.0	49.0	N/A	35.9	49.3	N/A	35.8	54.0
12400.0	50.3	N/A	37.9	50.5	N/A	37.9	54.0
14880.0	53.2	N/A	40.2	52.8	N/A	40.2	54.0
17360.0	56.2	N/A	43.5	56.4	N/A	43.5	54.0

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency range below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 17 Transmitter Radiated Emissions (BLE (GMSK)) #2

Frequency in MHz	Horizontal Peak (dBµV/m)	Horizontal Quasi-Peak (dBµV/m)	Horizontal Average (dBµV/m)	Vertical Peak (dBµV/m)	Vertical Quasi-Peak (dBµV/m)	Vertical Average (dBµV/m)	Limit @ 3m (dBµV/m)
2402.0	94.5	N/A	93.7	92.3	N/A	91.3	94.0
4804.0	48.2	N/A	37.3	46.7	N/A	34.8	54.0
7206.0	48.6	N/A	36.7	48.8	N/A	37.0	54.0
9608.0	48.9	N/A	35.7	48.4	N/A	35.7	54.0
12010.0	52.2	N/A	38.8	51.3	N/A	38.8	54.0
14412.0	53.6	N/A	41.0	53.4	N/A	41.0	54.0
16814.0	57.8	N/A	44.8	58.3	N/A	44.8	54.0
2440.0	94.4	N/A	93.6	93.1	N/A	92.3	94.0
4880.0	48.0	N/A	37.7	46.5	N/A	33.9	54.0
7320.0	48.5	N/A	37.1	50.3	N/A	39.2	54.0
9760.0	49.0	N/A	36.2	49.9	N/A	36.2	54.0
12200.0	50.3	N/A	37.6	50.5	N/A	37.7	54.0
14640.0	52.8	N/A	40.1	52.5	N/A	40.1	54.0
17080.0	57.4	N/A	45.2	58.4	N/A	45.2	54.0
2480.0	94.6	N/A	93.8	94.0	N/A	93.2	94.0
4960.0	46.1	N/A	33.8	46.0	N/A	33.3	54.0
7440.0	49.7	N/A	37.5	49.1	N/A	36.6	54.0
9920.0	49.0	N/A	35.8	48.7	N/A	36.0	54.0
12400.0	51.0	N/A	38.3	51.1	N/A	38.3	54.0
14880.0	53.3	N/A	40.3	53.0	N/A	40.3	54.0
17360.0	56.5	N/A	43.6	56.2	N/A	43.6	54.0

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency range below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Summary of Results for Transmitter Radiated Emissions of Intentional Radiator

The EUT demonstrated compliance with the radiated emissions requirements of FCC 47 CFR Part 15.249 Intentional Radiator regulations. The EUT #1 worst-case test sample configuration demonstrated minimum average margin of -0.1 dB below the average emission limit for the fundamental. The EUT #1 worst-case configuration demonstrated minimum radiated harmonic emission margin of -9.4 dB below the limit. The EUT #2 worst-case test sample configuration demonstrated minimum average margin of -0.1 dB below the average emission limit for the fundamental. The EUT #2 worst-case configuration demonstrated minimum radiated harmonic emission margin of -8.8 dB below the limit. No other radiated emissions were found in the restricted bands less than 20 dB below limits than those recorded in this report. Other emissions were present with amplitudes at least 20 dB below the limits.

Annex

- Annex A Measurement Uncertainty Calculations
- Annex B Additional Test Equipment
- Annex C Rogers Qualifications
- Annex D Rogers Labs Certificate of Accreditation

Annex A Measurement Uncertainty Calculations

The measurement uncertainty was calculated for all measurements listed in this test report according to CISPR 16-4. Result of measurement uncertainty calculations are recorded below. Component and process variability of production devices similar to those tested may result in additional deviations. The manufacturer has the sole responsibility of continued compliance.

Measurement	Expanded Measurement Uncertainty $U_{(lab)}$
3 Meter Horizontal 0.009-1000 MHz Measurements	4.16
3 Meter Vertical 0.009-1000 MHz Measurements	4.33
3 Meter Measurements 1-18 GHz	5.14
3 Meter Measurements 18-40 GHz	5.16
10 Meter Horizontal Measurements 0.009-1000 MHz	4.15
10 Meter Vertical Measurements 0.009-1000 MHz	4.32
AC Line Conducted	1.75
Antenna Port Conducted power	1.17
Frequency Stability	1.00E-11
Temperature	1.6°C
Humidity	3%

Annex B Additional Test Equipment

List of Test Equipment	Calibration	<u>Date (m/d/y)</u>	<u>Due</u>
Antenna: Schwarzbeck Model: BBA 9106/VHBB 9124 (9124-627)		5/2/2018	5/2/2019
Antenna: Schwarzbeck Model: VULP 9118 A (VULP 9118 A-534)		5/2/2018	5/2/2019
Antenna: EMCO 6509		10/16/2018	10/16/2020
Antenna: EMCO 3143 (9607-1277) 20-1200 MHz		5/2/2018	5/2/2019
Antenna: EMCO Dipole Set 3121C		2/23/2018	2/23/2019
Antenna: C.D. B-101		2/23/2018	2/23/2019
Antenna: Solar 9229-1 & 9230-1		2/23/2018	2/23/2019
Cable: Belden 8268 (L3)		10/16/2018	10/16/2019
Cable: Time Microwave: 4M-750HF290-750		10/16/2018	10/16/2019
Frequency Counter: Leader LDC-825 (8060153)		5/2/2018	5/2/2019
Oscilloscope Scope: Tektronix 2230		2/23/2018	2/23/2019
Wattmeter: Bird 43 with Load Bird 8085		2/23/2018	2/23/2019
R.F. Generator: SMB100A6 s/n 100623		5/2/2018	5/2/2019
R.F. Generator: SBMBV100A s/n: 260771		5/2/2018	5/2/2019
R.F. Generators: HP 606A, HP 8614A, HP 8640B		2/23/2018	2/23/2019
R.F. Power Amp 65W Model: 470-A-1010		2/23/2018	2/23/2019
R.F. Power Amp 50W M185- 10-501		2/23/2018	2/23/2019
R.F. Power Amp A.R. Model: 10W 1010M7		2/23/2018	2/23/2019
R.F. Power Amp EIN Model: A301		2/23/2018	2/23/2019
LISN: Compliance Eng. Model 240/20		5/2/2018	5/2/2019
LISN: Fischer Custom Communications Model: FCC-LISN-50-16-2-08		5/2/2018	5/2/2019
Audio Oscillator: H.P. 201CD		2/23/2018	2/23/2019
ESD Test Set 2010i		2/23/2018	2/23/2019
Oscilloscope Scope: Tektronix MDO 4104		2/23/2018	2/23/2019
EMC Transient Generator HVT TR 3000		2/23/2018	2/23/2019
AC Power Source (Ametek, California Instruments)		2/23/2018	2/23/2019
Fast Transient Burst Generator Model: EFT/B-101		2/23/2018	2/23/2019
Field Intensity Meter: EFM-018		2/23/2018	2/23/2019
KEYTEK Ecat Surge Generator		2/23/2018	2/23/2019
ESD Simulator: MZ-15		2/23/2018	2/23/2019
Shielded Room not required			

Annex C Rogers Qualifications

Scot D. Rogers, Engineer

Rogers Labs, Inc.

Mr. Rogers has approximately 29 years' experience in the field of electronics. Engineering experience includes six years in the automated controls industry and remaining years working with the design, development and testing of radio communications and electronic equipment.

Positions Held


Systems Engineer: A/C Controls Mfg. Co., Inc. 6 Years

Electrical Engineer: Rogers Consulting Labs, Inc. 5 Years

Electrical Engineer: Rogers Labs, Inc. Current

Educational Background

- 1) Bachelor of Science Degree in Electrical Engineering from Kansas State University.
- 2) Bachelor of Science Degree in Business Administration Kansas State University.
- 3) Several Specialized Training courses and seminars pertaining to Microprocessors and Software programming.



Scot D. Rogers

Annex D Rogers Labs Certificate of Accreditation

United States Department of Commerce
National Institute of Standards and Technology

NVLAP®

Certificate of Accreditation to ISO/IEC 17025:2005

NVLAP LAB CODE: 200087-0

Rogers Labs, Inc.
Louisburg, KS

*is accredited by the National Voluntary Laboratory Accreditation Program for specific services,
listed on the Scope of Accreditation, for:*

Electromagnetic Compatibility & Telecommunications

*This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005.
This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality
management system (refer to joint ISO-ILAC-IAF Communiqué dated January 2009).*

2018-02-21 through 2019-03-31
Effective Dates




For the National Voluntary Laboratory Accreditation Program