

Test Report

CFR47 part 80(E), RSS-238


Market Label: M3AONR00
9300-9500 MHz

Marine Radar Equipment
FCC ID: IPH-02356
IC: 1792A-02356

For


Garmin International, Inc.
1200 East 151st Street
Olathe, KS 66062

Test Report Number 130826

Authorized Signatory: 
Scot D. Rogers



NVLAP Lab Code 200087-0



Rogers Labs, Inc.

4405 West 259th Terrace
Louisburg, KS 66053
Phone / Fax (913) 837-3214

Test Report For Application of Certification For

Garmin International, Inc.

1200 East 151st Street
Olathe, KS 66062
Phone: (913) 397-8200

Mr. Van Ruggles
Director of Quality Assurance

Market Label: M3AONR00
Marine Radar Equipment
Frequency Range: 9300-9500 MHz

FCC ID: IPH-02356

IC: 1792A-2356

Test Date: August 26, 2013

Certifying Engineer: *Scot D. Rogers*

Scot D. Rogers
Rogers Labs, Inc.
4405 West 259th Terrace
Louisburg, KS 66053
Telephone/Facsimile: (913) 837-3214

This report shall not be reproduced except in full, without the written approval of the laboratory.
This report must not be used by the client to claim product certification, approval, or
endorsement by NVLAP, NIST, or any agency of the Federal Government.

Rogers Labs, Inc.
4405 West 259th Terrace
Louisburg, KS 66053
Phone/Fax: (913) 837-3214
Revision 1

Garmin International, Inc.
Model: M3AONR00
Test #: 130826
Test to: CFR47 Parts 2, 80, RSS-238
File: TstRpt M3AONR00 130826

FCC ID: IPH-02356
IC: 1792A-02356
SN: FCC Unit
Date: November 8, 2013
Page 2 of 26



Table of Contents

TABLE OF CONTENTS.....	3
REVISIONS.....	4
FORWARD	5
OPINION / INTERPRETATION OF RESULTS	5
EQUIPMENT TESTED.....	5
System Description	5
Equipment Configuration	6
ENVIRONMENTAL CONDITIONS.....	6
UNITS OF MEASUREMENTS	6
TEST SITE LOCATIONS	6
APPLICATION FOR CERTIFICATION.....	7
LIST OF TEST EQUIPMENT	8
APPLICABLE STANDARDS & TEST PROCEDURES	9
TEST PROCEDURES.....	9
Radiated Emission Test Procedure	9
Diagram 1 Test arrangement for radiated emissions tested on Open Area Test Site (OATS)	10
RADIO FREQUENCY POWER OUTPUT	11
Measurements Required	11
Test Arrangement Radio Frequency Power Output.....	11
Figure 1 Maximum Power Output	11
Table 1 Radio Frequency Power Output Results (18” antenna)	11
Table 2 Radio Frequency Power Output Results (24” antenna)	12
Table 3 Calculated average power Radio	12
Figure 2 Plot 18 RF power output at 3 meters distance 48 nm range	13
Figure 3 Plot RF power output at 3 meters distance 1/8 nm range.....	13
MODULATION CHARACTERISTICS.....	14
Measurements Required	14
Modulation Characteristics Test Arrangement	14
Modulation Characteristics Results	14



OCCUPIED BANDWIDTH	14
Measurements Required	14
Table 4 Occupied Bandwidth Results	14
Figure 4 Plot of analyzer screen showing 23-dB occupied bandwidth (1/8 nm).....	15
Figure 5 Plot of analyzer screen showing 40-dB occupied bandwidth (1/8 nm).....	15
SPURIOUS EMISSIONS AT ANTENNA TERMINALS.....	16
Measurements Required	16
Spurious Emission at Antenna Test Arrangement	16
Spurious Emission at Antenna Results	16
FIELD STRENGTH OF SPURIOUS RADIATION.....	16
Measurements Required	16
Field Strength of Spurious Radiation Test Arrangement	16
Field Strength of Spurious Results.....	17
Table 5 General Radiated Emissions	18
Table 6 Harmonic Radiated Emissions.....	18
FREQUENCY STABILITY	19
Measurements Required	19
Test Arrangement.....	19
Table 7 Frequency Stability vs. Temperature Results.....	20
Frequency Stability Results	20
ANNEX.....	21
Annex A Measurement Uncertainty Calculations	22
Annex B Rogers Labs Test Equipment List	23
Annex C Rogers Qualifications.....	24
Annex D FCC Test Site Registration Letter	25
Annex E Industry Canada Test Site Registration Letter	26

Revisions

Revision 1, Issued November 8, 2013



Forward

In accordance with the Federal Communications, Code of Federal Regulations dated October 1, 2012, Part 2 Subpart J, Paragraphs 2.907, 2.911, 2.913, 2.915, 2.925, 2.926, 2.1031 through 2.1057, and Part 80, Subchapter E, and RSS-238 the following information is submitted for consideration in obtaining grant of certification.

Name of Applicant: Garmin International, Inc., 1200 East 151st Street, Olathe, KS 66062
Model: M3AONR00
FCC ID: IPH-02356 Industry Canada ID: 1792A-02356
Frequency Range: 9300-9500 MHz
Emissions Designator: 15M36PON

Opinion / Interpretation of Results

Tests Performed	Results
Requirements per CFR47 paragraphs 2.1031-2.1057	Complies
Requirements per CFR47 paragraphs 80.205 Bandwidths	Complies
Requirements per CFR47 paragraphs 80.209 Frequency Tolerances	Complies
Requirements per CFR47 paragraphs 80.211 Emission Limitations	Complies
Requirements per CFR47 paragraphs 80.213 Modulation	Complies
Requirements per CFR47 paragraphs 80.215 Transmitter Power	Complies


Equipment Tested

<u>Equipment</u>	<u>Serial Number</u>	<u>FCC I.D.#</u>
EUT M3AONR00	FCC Unit	IPH-02356
Chart Plotter (GPSMap 6208)	1TM000002	N/A

System Description

The M3AONR00 is a ship borne marine radar designed to provide bearing and distance of ships in land targets in the vicinity from the ship. The radar unit is integrated into a full Marine system installation, including the chart plotter for display purposes. As the radar sweeps through 360°, reflected signals are displayed on the chart plotter as indications of hazards.

Equipment Configuration

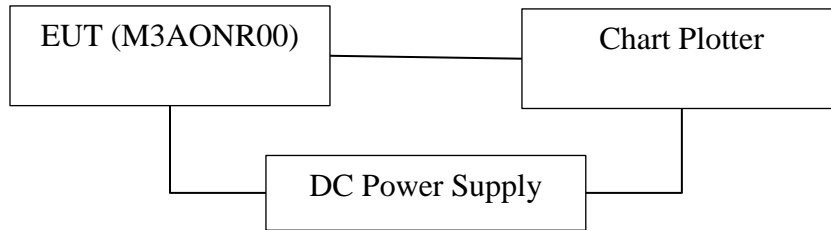

Environmental Conditions

Ambient Temperature	24.5° C
Relative Humidity	45%
Atmospheric Pressure	1018.2 mb

Units of Measurements

AC Line Conducted EMI	Data is in dB μ V; dB referenced to one microvolt.
Radiated EMI	Data is in dB μ V/m; dB/m referenced to one microvolt per meter
Antenna Conducted	Data is in dBm, dB referenced to one milliwatt

Test Site Locations

Conducted EMI	The conducted emissions testing performed in a shielded screen room located at Rogers Labs, Inc., 4405 W. 259th Terrace, Louisburg, KS.
Radiated EMI	The radiated emissions tests were performed at the 3 meters, Open Area Test Site (OATS) located at Rogers Labs, Inc., 4405 W. 259th Terrace, Louisburg, KS.
Site Registration	Refer to Annex for FCC Site Registration Letter, # 90910, and Industry Canada Site Registration Letter, IC3041A-1.



Application for Certification

- (1) Manufacturer: Garmin International, Inc. 1200 East 151st Street, Olathe, KS 66062
- (2) Identification: Model: M3AONR00 FCC ID: IPH-02356 IC: 1792A-02356
- (3) Instruction Book: Refer to exhibit for Draft Manual
- (4) Emission Type: Emissions designator 15M3PON
- (5) Frequency Range: 9300-9500 MHz, 9400 MHz \pm 30 MHz (typical)
- (6) Operating Power Level: 4000 Watt peak power, Maximum average power = 5 Watts EIRP
- (7) Maximum Power: 80.215, 20.0 Watts EIRP as listed on license.
- (8) Power into final amplifier(Peak magnetron anode) : 4,000 Vdc @ 3.0 A maximum =
12,000 watts peak power at magnetron, 4,000 watts mean peak output power
4 kW peak transmitter power, calculated averages
70 ns pulse = 1.4 Watts average
150 ns pulse = 3.1 Watts average
250 ns pulse = 3.6 Watts average
800 ns pulse = 4.1 Watts average
1000 ns pulse = 5.1 Watts average
- (9) Tune Up Procedure for Output Power: Refer to Exhibit for Alignment Procedure.
- (10) Circuit Diagrams: description of circuits, frequency stability, spurious suppression, and power and modulation limiting: Refer to Exhibit for Circuit Diagrams and theory of Operation.
- (11) Photograph or drawing of the Identification Plate: Refer to Exhibit for Photograph or Drawing.
- (12) Drawings of Construction and Layout: Refer to Exhibit for Drawings of Components Layout and Chassis Drawings.
- (13) Detail Description of Digital Modulation: Refer to Operational Description exhibit for description of modulation.
- (14) Data required by CFR47 paragraphs 2.1046 through 2.1057 are contained in this report.
- (15) External power amplifier requirements do not apply to this device or application.
- (16) AM broadcast requirements do not apply to this device or application.
- (17) Requirements of CFR47 paragraph 25.129 do not apply to this device or application.
- (18) The device is not a software-defined radio and requirements of 2.944 do not apply to this application.

List of Test Equipment

A Rohde and Schwarz ESU40 and/or Hewlett Packard 8591EM was used as the measuring device for the emissions testing of frequencies below 1 GHz. A Rohde and Schwarz ESU40 and/or Hewlett Packard 8562A Spectrum Analyzer was used as the measuring device for testing the emissions at frequencies above 1 GHz. The analyzer settings used are described in the following table. Refer to the appendix for a complete list of test equipment.

AC Line Conducted Emissions (0.150 -30 MHz)		
RBW	AVG. BW	Detector Function
9 kHz	30 kHz	Peak / Quasi Peak
Emissions (30-1000 MHz)		
RBW	AVG. BW	Detector Function
120 kHz	300 kHz	Peak / Quasi Peak
Emissions (Above 1000 MHz)		
RBW	Video BW	Detector Function
100 kHz	100 kHz	Peak
1 MHz	1 MHz	Peak / Average

<u>Equipment</u>	<u>Manufacturer</u>	<u>Model</u>	<u>Band</u>	<u>Cal Date</u>	<u>Due</u>
<input type="checkbox"/> LISN	Comp. Design	FCC-LISN-2-MOD.CD	.15-30MHz	10/12	10/13
<input type="checkbox"/> Antenna	ARA	BCD-235-B	20-350MHz	10/12	10/13
<input type="checkbox"/> Antenna	EMCO	3147	200-1000MHz	10/12	10/13
<input checked="" type="checkbox"/> Antenna	Com Power	AH-118	1-18 GHz	10/12	10/13
<input checked="" type="checkbox"/> Antenna	Com Power	AH-840	18-40 GHz	5/13	5/14
<input checked="" type="checkbox"/> Antenna	EMCO	6509	.001-30 MHz	10/12	10/13
<input checked="" type="checkbox"/> Antenna	Sunol	JB-6	30-1000 MHz	10/12	10/13
<input checked="" type="checkbox"/> Antenna	Standard	FXRY638A	10-18 GHz	5/13	5/14
<input type="checkbox"/> Antenna	EMCO	3143	20-1200 MHz	5/13	5/14
<input type="checkbox"/> Analyzer	HP	8591EM	9kHz-1.8GHz	5/13	5/14
<input type="checkbox"/> Analyzer	HP	8562A	9kHz-110GHz	5/13	5/14
<input checked="" type="checkbox"/> Analyzer	Rohde & Schwarz	ESU40	20Hz-40GHz	5/13	5/14
<input checked="" type="checkbox"/> Amplifier	Com-Power	PA-010	100Hz-30MHz	10/12	10/13
<input checked="" type="checkbox"/> Amplifier	Com-Power	CPPA-102	1-1000 MHz	10/12	10/13
<input checked="" type="checkbox"/> Appropriate RF cables		As necessary	0-100 GHz	10/12	10/13
<input checked="" type="checkbox"/> Analyzer	HP	HP 8562A	0.09-100 GHz	5/13	5/14



Applicable Standards & Test Procedures


In accordance with the Federal Communications Commission, Code of Federal Regulations CFR47, dated October 1, 2012, Part 2, Subpart J, Paragraphs 2.907, 2.911, 2.913, 2.925, 2.926, 2.1031 through 2.1057, applicable parts of paragraph Parts 2, 80(E), and Industry Canada RSS-238, the following information is submitted. Test procedures used are the established Methods of Measurement of Radio-Noise Emissions as described in ANSI C63.4-2009 and/or TIA/EIA 603-C.

Test Procedures

Radiated Emission Test Procedure

The EUT was placed on a rotating 1 x 1.5-meter table. EMI energy was maximized by equipment placement, raising and lowering the FSM antenna, changing the antenna polarization, and by rotating the turntable. Each emission was maximized before data was taken using a spectrum analyzer. The frequency spectrum from 9 kHz to 100,000 MHz was searched for during preliminary investigation. Refer to diagram two showing typical test arrangement and photographs in the test setup exhibits for specific EUT placement during testing.

Diagram 1 Test arrangement for radiated emissions tested on Open Area Test Site (OATS)

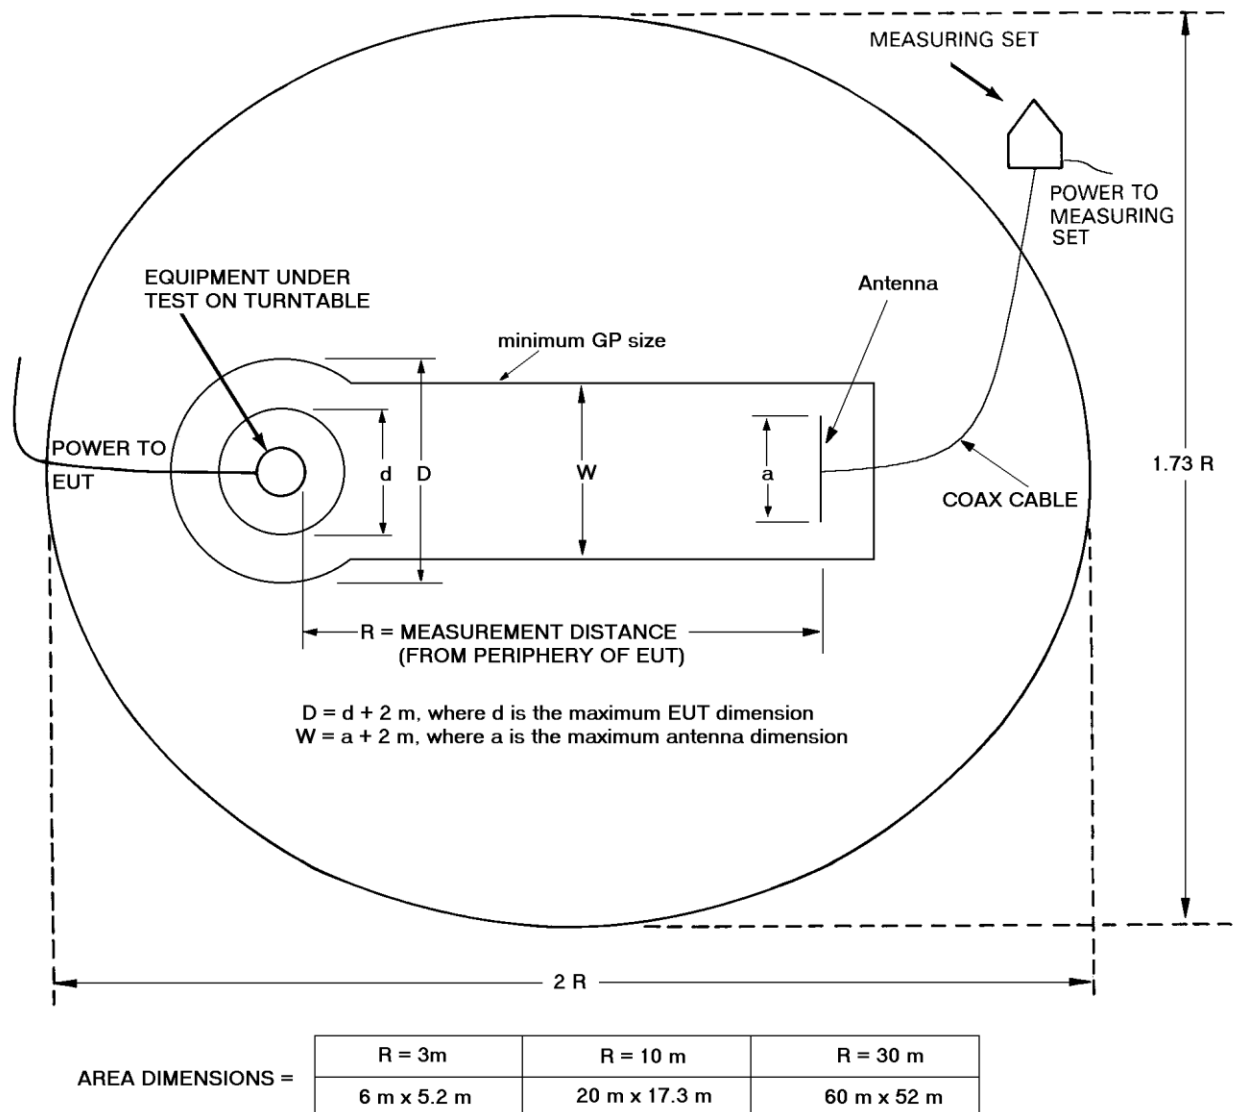


Radio Frequency Power Output

Measurements Required

Measurements shall be made to establish the radio frequency power delivered by the transmitter into the standard output termination. The power output shall be monitored and recorded and no adjustment shall be made to the transmitter after the test has begun except as noted below:

If the power output is adjustable, measurements shall be made for the highest and lowest power levels. Note designs output power is not adjustable.

Test Arrangement Radio Frequency Power Output



The design's peak output power is a function controlled strictly by the magnetron. The peak output power of the design is 4kW. The radio frequency power output was measured at the open area test site with the transmitter operating in a normal mode through all available transmission states. The EUT was separated from the receiving system by a distance of three meters during measurements. The spectrum analyzer had an impedance of 50Ω to match the impedance of the receiving antenna. A Rohde and Schwarz ESU40 and/or HP 8562A Spectrum Analyzer and appropriate mixers were used to measure the radio frequency power at a three-meter distance. During testing data was taken in dBμV/m.

Figure 1 Maximum Power Output

Table 1 Radio Frequency Power Output Results (18" antenna)

Transmitter Range Setting	Peak Measured emission dBμV/m @ 3 m	Average Measured emission dBμV/m @ 3 m
48 NM	157.7	94.9
1/8 NM	152.3	89.9

Table 2 Radio Frequency Power Output Results (24" antenna)

Transmitter Range Setting	Peak Measured emission dB μ V/m @ 3 m	Average Measured emission dB μ V/m @ 3 m
48 NM	157.3	95.2
1/8 NM	152.1	89.0

The average power output was also calculated using the pulse width and pulse repetition frequency, which define the duty cycle.

$P(\text{ave}) = \text{Peak Power (W)} \times \text{Pulse width (s) (PW)} \times \text{Pulse repetition (Hz) (PRF)}$

$P(\text{ave}) = P_o$ multiplied by duty factor, Duty factor = Pulse width (PW) x Pulse repetition (PRF)

Example: $P(\text{ave}) = 4000 \text{ watts} \times 1000\text{nS (PW)} \times 1280 \text{ (PRF)}$

$P(\text{ave}) = 5.1 \text{ watts}$

Table 3 Calculated average power Radio

Range [nm]	Pulse Width (ns)	Pulse Repetition Frequency (Hz)	Calculated Average Power (Watts)
0.125 NM	70	5120	1.43
0.25 NM	70	5120	1.43
0.5 NM	80	5120	1.64
0.75 NM	90	5120	1.84
1.0 NM	150	5120	3.07
1.5 NM	200	3840	3.07
2.0 NM	250	2560	2.56
3.0 NM	350	2560	3.58
4.0 NM	400	1280	2.05
6.0 NM	700	1280	3.58
8.0 NM	700	1280	3.58
12 NM	800	1280	4.10
16 NM	1000	1280	5.12
24 NM	1000	640	2.56
36 NM	1000	640	2.56
48 NM	1000	640	2.56

Data was taken per Paragraph 2.1046(a) and applicable parts of Part 80 and RSS-238. The equipment demonstrated compliance with specifications of Paragraph 2.1046(a) and applicable Parts of 80.215 and RSS-238. There were no modifications or deviations to the specifications.

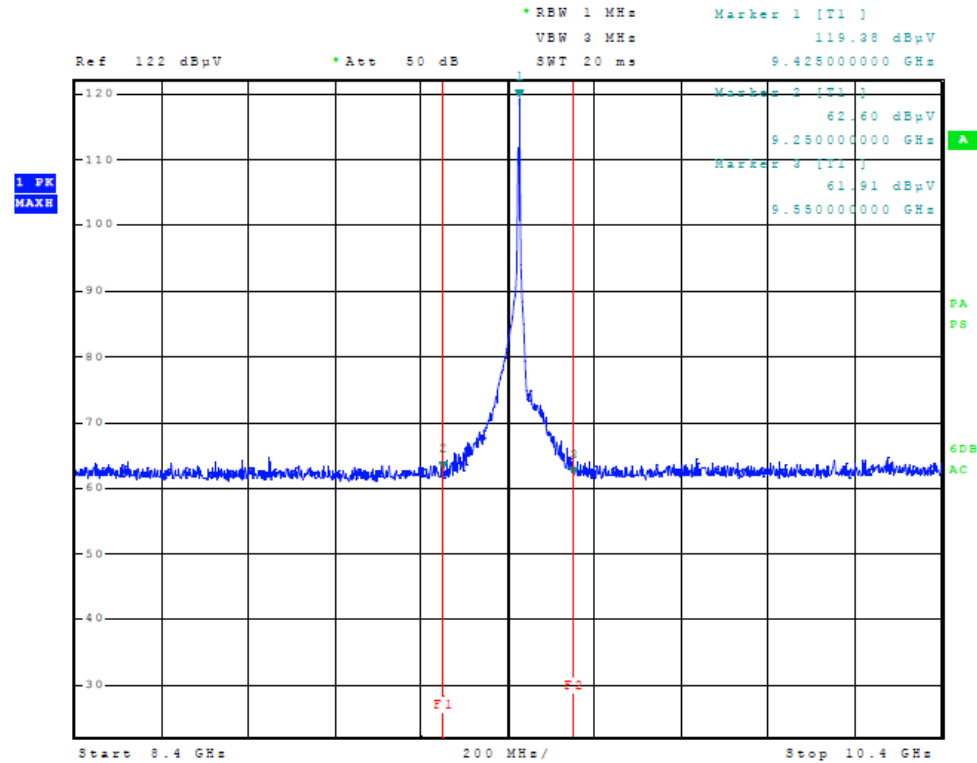


Figure 2 Plot 18 RF power output at 3 meters distance 48 nm range

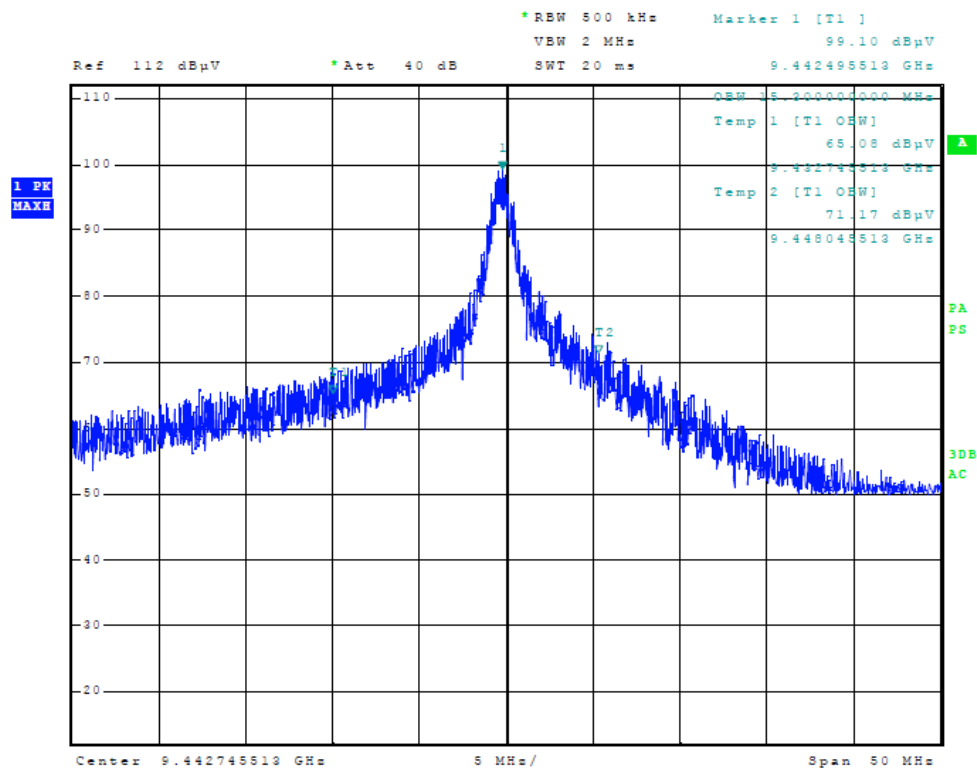


Figure 3 Plot RF power output at 3 meters distance 1/8 nm range

Modulation Characteristics

Measurements Required

A curve or equivalent data, which shows that the equipment will meet the modulation requirements of the rules, under which the equipment is to be licensed, shall be submitted.

Modulation Characteristics Test Arrangement

The EUT transmits no message and uses no modulation. Therefore, no curves are supplied.

Modulation Characteristics Results

The EUT transmits no message and uses no modulation. Therefore, no curves are supplied. The equipment demonstrated compliance with specifications of Paragraph 2.1046(a) and applicable Parts of 80.215 and RSS-238.

Occupied Bandwidth

Measurements Required

The occupied bandwidth, that is the frequency bandwidth such that below its lower and above its upper frequency limits, the mean powers radiated are each equal to (23 dB and 40-dB down) of the total peak power radiated by a given emission.

Table 4 Occupied Bandwidth Results

f_c (MHz)	Observed 40 dB Bandwidth (MHz)	Observed 23dB Bandwidth (MHz)
9425	39.55	15.3

A spectrum analyzer was used to observe the radio frequency spectrum with the transmitter operating in a normal mode. The power ratio in dB representing the 23-dB and 40-dB bandwidth was recorded from the spectrum analyzer. Data for the occupied bandwidth was observed at the RLI OATS using appropriate antennas. Refer to figures three and four showing the analyzer display screen with the analyzer connected to the receiving antenna. The equipment demonstrated compliance with specifications of Paragraph 2.1046(a) and applicable Parts of 80.215 and RSS-238.

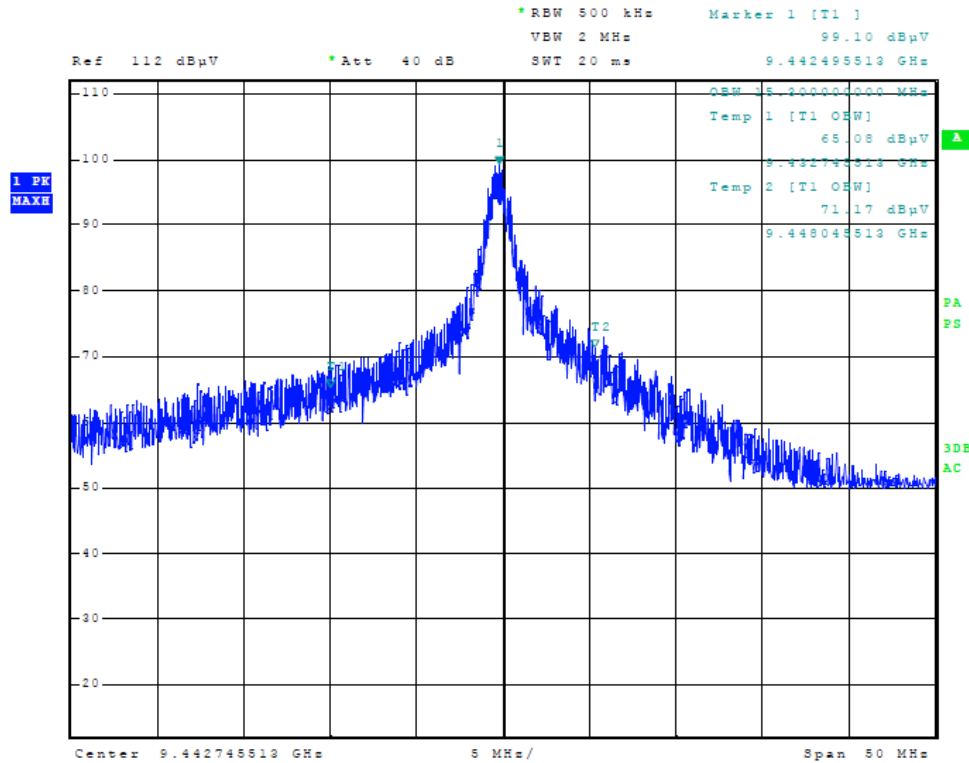


Figure 4 Plot of analyzer screen showing 23-dB occupied bandwidth (1/8 nm)

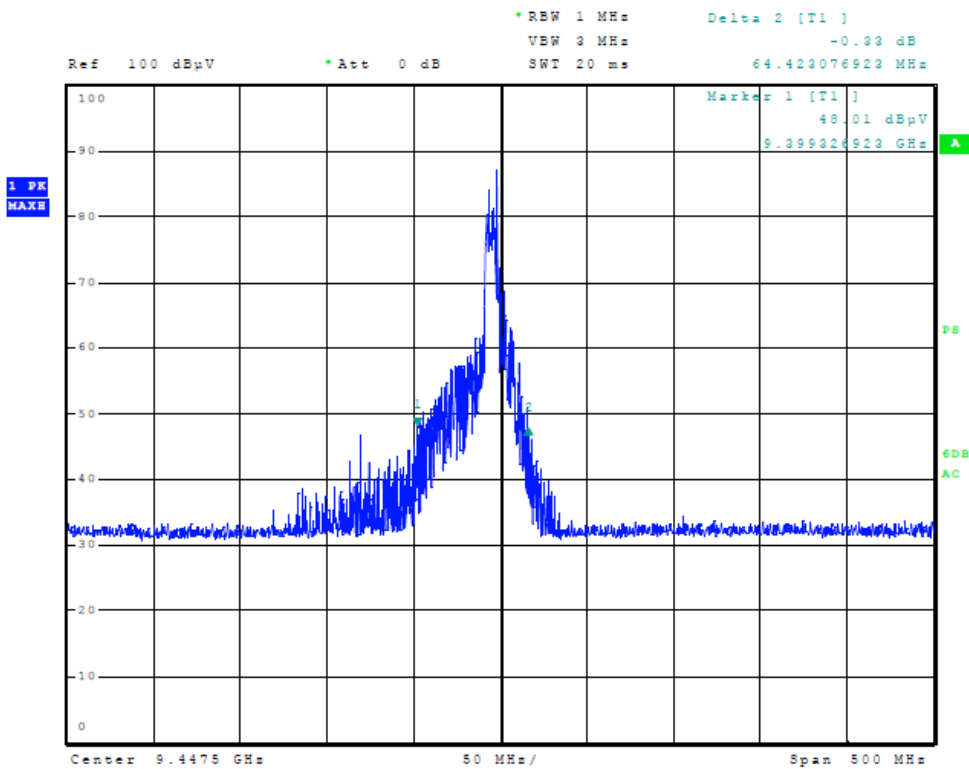


Figure 5 Plot of analyzer screen showing 40-dB occupied bandwidth (1/8 nm)

Spurious Emissions at Antenna Terminals

Measurements Required

The radio frequency voltage or power generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna.

Spurious Emission at Antenna Test Arrangement



Spurious Emission at Antenna Results

The EUT has no provision to connect directly to the output of the transmitter. Therefore, compliance to the specifications is shown in this and other data presented with this report. The equipment demonstrated compliance with specifications of Paragraph 2.1046(a) and applicable Parts of 80.215 and RSS-238.

Field Strength of Spurious Radiation

Measurements Required

Measurements shall be made to detect spurious emissions that may be radiated directly from the cabinet, control circuits, power leads, or intermediate circuit elements under normal conditions of installation and operation.

Field Strength of Spurious Radiation Test Arrangement



The transmitter was placed on a platform at a distance of 3 meters from the FSM antenna. With the EUT radiating into a 50-ohm load attached to the antenna port, the receiving antenna was raised and lowered to obtain the maximum reading of spurious radiation from the EUT on the spectrum analyzer. The platform was rotated through 360 degrees to locate the position registering the highest amplitude of



emission. The frequency spectrum was then searched for spurious emissions generated from the transmitter and support circuitry. The transmitter was also placed on a platform at a distance of 10 meters from the FSM antenna for power and spurious emissions testing. The amplitude of each spurious emission was maximized by raising and lowering the FSM antenna, and rotating the EUT before final data was recorded. Data presented below demonstrates the general and harmonic spur emissions from the EUT and support equipment taken at 3 meters. Plots were made of the spectrum analyzer display showing emission levels recorded at a one-meter distance in a screen room. Refer to figures five through sixteen showing general radiated emission levels taken in the screen room.

Field Strength of Spurious Results

The EUT was connected to the standard antenna(s) and set to transmit in a normal test mode of operation (with antenna rotation disabled during test). The amplitude of each spurious emission was then maximized and recorded. Measurements were made at a distance of ten meters at the RLI OATS. All other measured spurious emissions were 20-dB or more below the specified limit. The equipment demonstrated compliance with specifications of Paragraph 2.1046(a) and applicable Parts of 80.215 and RSS-238. There are no deviations to the specifications.

RSS-238 requires out of band emissions be at least 60 dB below fundamental emission. Using measured fundamental emissions power of 157.7 dBμV/m at 3-meters, the limit would be 97.7 dBμV/m. International Maritime standard EN 60945 requires emission levels less than 54 dBμV/m at 3-meters, and CFR 47 15.109 requires lower emission levels of which the equipment also complies.

Calculations made are as follows:

CFS = Calculated Field Strength

FSM = Field Strength Measurement

$CFS = FSM + \text{Antenna Factor} - \text{amplifier gain}$

Example:

$CFS = 50.6 + 8.9 - 30$

$CFS = 29.5$

Table 5 General Radiated Emissions

Frequency in MHz	Horizontal Peak (dBμV/m)	Horizontal Quasi-Peak (dBμV/m)	Horizontal Average (dBμV/m)	Vertical Peak (dBμV/m)	Vertical Quasi-Peak (dBμV/m)	Vertical Average (dBμV/m)	General Emissions Limit CFR47 15.109 @ 3m (dBμV/m)
49.0	29.5	22.5	N/A	38.8	33.4	N/A	40.0
64.0	34.2	29.5	N/A	38.8	32.1	N/A	40.0
77.2	37.2	33.3	N/A	37.7	31.4	N/A	40.0
96.4	33.8	27.9	N/A	41.8	38.8	N/A	43.5
125.0	39.3	37.2	N/A	35.4	32.9	N/A	43.5
163.0	34.3	28.5	N/A	34.8	28.4	N/A	43.5
174.3	34.7	28.2	N/A	30.3	22.3	N/A	43.5
250.0	39.8	36.6	N/A	34.3	31.2	N/A	46.0
350.0	40.0	35.4	N/A	42.2	41.6	N/A	46.0
382.0	39.5	32.9	N/A	30.2	22.5	N/A	46.0
398.3	39.3	34.2	N/A	38.7	27.8	N/A	46.0
408.9	37.4	30.7	N/A	41.3	34.1	N/A	46.0
420.0	40.8	33.3	N/A	34.5	30.3	N/A	46.0

Other emissions present had amplitudes at least 20 dB below the limit.

Quasi-Peak amplitude emissions are recorded above for frequency range of 30-1000 MHz.

Average amplitude emissions are recorded above for frequency range above 1000 MHz.

Table 6 Harmonic Radiated Emissions

Frequency in MHz	Horizontal Peak (dBμV/m)	Horizontal Quasi-Peak (dBμV/m)	Horizontal Average (dBμV/m)	Vertical Peak (dBμV/m)	Vertical Quasi-Peak (dBμV/m)	Vertical Average (dBμV/m)	General Average Emissions Limit @ 3m (dBμV/m)
18850.0	88.0	N/A	64.6	93.7	N/A	64.6	97.7
28275.0	82.8	N/A	70.0	83.0	N/A	69.9	97.7
37700.0	91.9	N/A	78.6	92.5	N/A	78.6	97.7

Other emissions present had amplitudes at least 20 dB below the limit.

Quasi-Peak amplitude emissions are recorded above for frequency range of 30-1000 MHz.


Average amplitude emissions are recorded above for frequency range above 1000 MHz.

Frequency Stability

Measurements Required

The frequency stability shall be measured with variations of ambient temperature from -30° to +50° centigrade. Measurements shall be made at the extremes of the temperature range and at intervals of not more than 10° centigrade through the range. A period sufficient to stabilize all of the components of the oscillator circuit at each temperature level shall be allowed prior to frequency measurement.

Test Arrangement

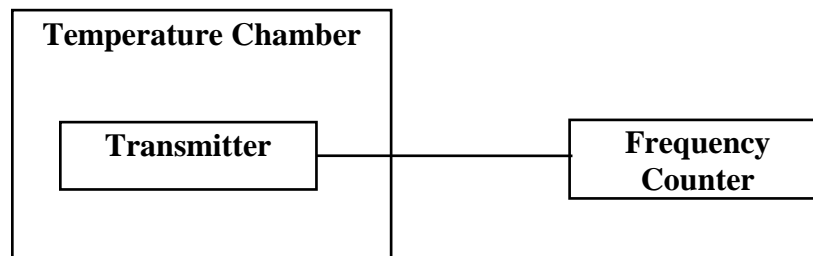

The measurement procedure outlined below shall be followed.

Step 1: The transmitter shall be installed in an environmental test chamber whose temperature is controllable. Provision shall be made to measure the frequency of the transmitter.

Step 2: With the transmitter inoperative (power switched "OFF"), the temperature of the test chamber shall be adjusted to +25°C. After a temperature stabilization period of one hour at +25°C, the transmitter shall be switched "ON" with standard test voltage applied.

Step 3: The carrier shall be keyed "ON", and the transmitter shall be operated at full radio frequency power output at the duty cycle, for which it is rated, for duration of at least 5 minutes. The radio frequency carrier frequency shall be monitored and measurements shall be recorded.

Step 4: The test procedures outlined in Steps 2 and 3, shall be repeated after stabilizing the transmitter at the environmental temperatures specified, -30°C to +50°C in 10-degree increments.

The frequency was measured and the variation in parts per million calculated. Data was taken per CFR47 Paragraphs 2.1055 and applicable paragraphs of part 80 and RSS-238.

Table 7 Frequency Stability vs. Temperature Results

Frequency 9413.3000 (MHz)	Frequency Stability Vs. Temperature Ambient Frequency (9413.3000)								
Temperature °C	-30	-20	-10	0	+10	+20	+30	+40	+50
PPM	-952	-825	-591	-368	-275	0.000	-76	69	423
%	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Limit (PPM)	1250	1250	1250	1250	1250	1250	1250	1250	1250

Frequency Stability Results

The temperature stability of the unit is determined by the Magnetron. There are no deviations or exceptions to the specifications. The equipment demonstrated compliance with specifications of Paragraph 2.1046(a) and applicable Parts of 80.215 and RSS-238. There are no deviations to the specifications.



NVLAP Lab Code 200087-0

Annex

- Annex A Measurement Uncertainty Calculations
- Annex B Test Equipment List
- Annex C Rogers Qualifications
- Annex D FCC Site Registration Letter
- Annex E Industry Canada Site Registration Letter

**Annex A Measurement Uncertainty Calculations**

Measurement uncertainty calculations were made for the laboratory. Result of measurement uncertainty calculations are recorded below for AC line conducted and radiated emission measurements.

Measurement Uncertainty	$U_{(E)}$	$U_{(lab)}$
3 Meter Horizontal 30-200 MHz Measurements	2.08	4.16
3 Meter Vertical 30-200 MHz Measurements	2.16	4.33
3 Meter Vertical Measurements 200-1000 MHz	2.99	5.97
10 Meter Horizontal Measurements 30-200 MHz	2.07	4.15
10 Meter Vertical Measurements 30-200 MHz	2.06	4.13
10 Meter Horizontal Measurements 200-1000 MHz	2.32	4.64
10 Meter Vertical Measurements 200-1000 MHz	2.33	4.66
3 Meter Measurements 1-6 GHz	2.57	5.14
3 Meter Measurements 6-18 GHz	2.58	5.16
AC Line Conducted	1.72	3.43



Annex B Rogers Labs Test Equipment List

List of Test Equipment	Calibration Date
Spectrum Analyzer: Rohde & Schwarz ESU40	5/13
Spectrum Analyzer: HP 8562A, HP Adapters: 11518, 11519, and 11520	5/13
Mixers: 11517A, 11970A, 11970K, 11970U, 11970V, 11970W	
Spectrum Analyzer: HP 8591EM	5/13
Antenna: EMCO Biconilog Model: 3143	5/13
Antenna: Sunol Biconilog Model: JB6	10/12
Antenna: EMCO Log Periodic Model: 3147	10/12
Antenna: Com Power Model: AH-118	10/12
Antenna: Com Power Model: AH-840	10/12
Antenna: Antenna Research Biconical Model: BCD 235	10/12
Antenna: EMCO 6509	10/12
LISN: Compliance Design Model: FCC-LISN-2.Mod.cd, 50 μ Hy/50 ohm/0.1 μ f	10/12
R.F. Preamp CPPA-102	10/12
Attenuator: HP Model: HP11509A	10/12
Attenuator: Mini Circuits Model: CAT-3	10/12
Attenuator: Mini Circuits Model: CAT-3	10/12
Cable: Belden RG-58 (L1)	10/12
Cable: Belden RG-58 (L2)	10/12
Cable: Belden 8268 (L3)	10/12
Cable: Time Microwave: 4M-750HF290-750	10/12
Cable: Time Microwave: 10M-750HF290-750	10/12
Frequency Counter: Leader LDC825	2/13
Oscilloscope Scope: Tektronix 2230	2/13
Wattmeter: Bird 43 with Load Bird 8085	2/13
Power Supplies: Sorensen SRL 20-25, SRL 40-25, DCR 150, DCR 140	2/13
R.F. Generators: HP 606A, HP 8614A, HP 8640B	2/13
R.F. Power Amp 65W Model: 470-A-1010	2/13
R.F. Power Amp 50W M185- 10-501	2/13
R.F. Power Amp A.R. Model: 10W 1010M7	2/13
R.F. Power Amp EIN Model: A301	2/13
LISN: Compliance Eng. Model 240/20	2/13
LISN: Fischer Custom Communications Model: FCC-LISN-50-16-2-08	2/13
Antenna: EMCO Dipole Set 3121C	2/13
Antenna: C.D. B-101	2/13
Antenna: Solar 9229-1 & 9230-1	2/13
Audio Oscillator: H.P. 201CD	2/13
ELGAR Model: 1751	2/13
ELGAR Model: TG 704A-3D	2/13
ESD Test Set 2010i	2/13
Fast Transient Burst Generator Model: EFT/B-101	2/13
Field Intensity Meter: EFM-018	2/13
KEYTEK Ecat Surge Generator	2/13
Shielded Room 5 M x 3 M x 3.0 M	



Annex C Rogers Qualifications

Scot D. Rogers, Engineer

Rogers Labs, Inc.

Mr. Rogers has approximately 17 years experience in the field of electronics. Engineering experience includes six years in the automated controls industry and remaining years working with the design, development and testing of radio communications and electronic equipment.

Positions Held:

Systems Engineer: A/C Controls Mfg. Co., Inc. 6 Years

Electrical Engineer: Rogers Consulting Labs, Inc. 5 Years

Electrical Engineer: Rogers Labs, Inc. Current

Educational Background:

- 1) Bachelor of Science Degree in Electrical Engineering from Kansas State University
- 2) Bachelor of Science Degree in Business Administration Kansas State University
- 3) Several Specialized Training courses and seminars pertaining to Microprocessors and Software programming.



NVLAP Lab Code 200087-0

Annex D FCC Test Site Registration Letter

FEDERAL COMMUNICATIONS COMMISSION

**Laboratory Division
7435 Oakland Mills Road
Columbia, MD 21046**

June 28, 2013

Registration Number: 90910

Rogers Labs, Inc.
4405 West 259th Terrace,
Louisburg, KS 66053

Attention: Scot Rogers,


Re: Measurement facility located at Louisburg
3 & 10 meter site
Date of Renewal: June 28, 2013

Dear Sir or Madam:

Your request for renewal of the registration of the subject measurement facility has been received. The information submitted has been placed in your file and the registration has been renewed. The name of your organization will remain on the list of facilities whose measurement data will be accepted in conjunction with applications for Certification under Parts 15 or 18 of the Commission's Rules. Please note that the file must be updated for any changes made to the facility and the registration must be renewed at least every three years.

Measurement facilities that have indicated that they are available to the public to perform measurement services on a fee basis may be found on the FCC website www.fcc.gov under E-Filing, OET Equipment Authorization Electronic Filing, Test Firms.

Sincerely,

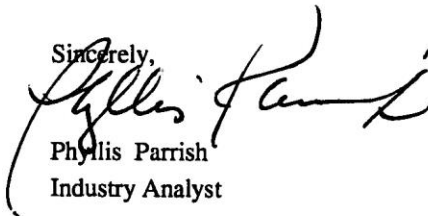

Phyllis Parrish
Industry Analyst

Rogers Labs, Inc.
4405 West 259th Terrace
Louisburg, KS 66053
Phone/Fax: (913) 837-3214
Revision 1

Garmin International, Inc.
Model: M3AONR00
Test #: 130826
Test to: CFR47 Parts 2, 80, RSS-238
File: TstRpt M3AONR00 130826

FCC ID: IPH-02356
IC: 1792A-02356
SN: FCC Unit
Date: November 8, 2013
Page 25 of 26



NVLAP Lab Code 200087-0

Annex E Industry Canada Test Site Registration Letter



June 19, 2013

OUR FILE: 46405-3041

Submission No: 168037

Rogers Labs Inc.
4405 West 259th Terrace
Louisburg
KS, USA
66053

Attention: Mr. Scot D. Rogers

Dear Sir:

The Bureau has received your application for the renewal of 3/10m OATS. Be advised that the information received was satisfactory to Industry Canada. The following number(s) is now associated to the site(s) for which registration / renewal was sought (**Site# 3041A-1**). Please reference the appropriate site number in the body of test reports containing measurements performed on the site. In addition, please keep for your records the following information;

- The company address code associated to the site(s) located at the above address is: **3041A**

Furthermore, to obtain or renew a unique site number, the applicant shall demonstrate that the site has been accredited to ANSI C63.4-2003 or later. A scope of accreditation indicating the accreditation by a recognized accreditation body to ANSI C63.4-2003 or later shall be accepted. Please indicate in a letter the previous assigned site number if applicable and the type of site (example: 3 metre OATS or 3 metre chamber). If the test facility is not accredited to ANSI C63.4-2003 or later, the test facility shall submit test data demonstrating full compliance with the ANSI standard. The Bureau will evaluate the filing to determine if recognition shall be granted.

The frequency for re-validation of the test site and the information that is required to be filed or retained by the testing party shall comply with the requirements established by the accrediting organization. However, in all cases, test site re-validation shall occur on an interval not to **exceed three years**. There is no fee or form associated with an OATS filing. OATS submissions are encouraged to be submitted electronically to the Bureau using the following URL;

http://strategis.ic.gc.ca/epic/internet/inceb-bhst.nsf/en/h_tt00052e.html.

If you have any questions, you may contact the Bureau by e-mail at certification.bureau@ic.gc.ca Please reference our file and submission number above for all correspondence.

Yours sincerely,

Bill Payn
For: Wireless Laboratory Manager
Certification and Engineering Bureau
3701 Carling Ave., Building 94
P.O. Box 11490, Station "H"
Ottawa, Ontario K2H 8S2
Email: Bill.Payn@ic.gc.ca
Tel. No. (613) 990-3639
Fax. No. (613) 990-4752

Rogers Labs, Inc.
4405 West 259th Terrace
Louisburg, KS 66053
Phone/Fax: (913) 837-3214
Revision 1

Garmin International, Inc.
Model: M3AONR00
Test #: 130826
Test to: CFR47 Parts 2, 80, RSS-238
File: TstRpt M3AONR00 130826

FCC ID: IPH-02356
IC: 1792A-02356
SN: FCC Unit
Date: November 8, 2013
Page 26 of 26