

Application For Grant of Certification

FCC CFR47 Part 87

For

Model: GMN-01589

9300-9500 MHz

Aviation Radar Transmitter

FCC ID: IPH-0305600

For

Garmin International, Inc.


1200 East 151st Street


Olathe, KS 66062

FCC accreditation designation number: 315994

IC Test Site Registration: 3041A-1

Test Report Number 170614

Authorized Signatory: 
Scot D. Rogers



ROGERS LABS, INC.

4405 West 259th Terrace
Louisburg, KS 66053
Phone / Fax (913) 837-3214

Test Report For Application of Certification For

Garmin International, Inc.

1200 East 151st Street
Olathe, KS 66062
Phone: (913) 397-8200

Mr. Doug Kealey
Regulatory and Environmental Affairs Manager

Model: GMN-01589

Aviation Radar Transmitter

FCC ID: IPH-0305600
Frequency Range: 9300-9500 MHz

Test Date: June 14, 2017

Certifying Engineer: *Scot D. Rogers*

Scot D. Rogers
Rogers Labs, Inc.
4405 West 259th Terrace
Louisburg, KS 66053
Telephone/Facsimile: (913) 837-3214

This report shall not be reproduced except in full, without the written approval of the laboratory. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

Rogers Labs, Inc.
4405 West 259th Terrace
Louisburg, KS 66053
Phone/Fax: (913) 837-3214
Revision 2

Garmin International, Inc.
Model: GMN-01589
Test #: 170614
Test to: FCC Parts 2 and 87
File: GMN01589 TstRpt 170614 r2

SN: 4RR000042
FCC ID: IPH-0305600
Date: October 12, 2017
Page 2 of 36

Table of Contents

TABLE OF CONTENTS.....	3
REVISION HISTORY	4
FOREWORD.....	5
OPINION / INTERPRETATION OF RESULTS	5
APPLICABLE STANDARDS & TEST PROCEDURES	5
ENVIRONMENTAL CONDITIONS.....	5
APPLICATION FOR CERTIFICATION.....	6
SYSTEM DESCRIPTION	9
UNITS OF MEASUREMENTS	10
TEST SITE LOCATIONS	10
LIST OF TEST EQUIPMENT	11
TRANSMITTER POWER OUTPUT	12
Measurements Required	12
Test Arrangement.....	12
Table 1 Transmitter Power Results.....	13
Figure 1 Power Output Across Frequency Band 9300-9500 MHz (Wind Shear)	14
Figure 2 Power Output Across Frequency Band 9300-9500 MHz (Ground Map).....	14
Figure 3 Power Output Across Frequency Band 9300-9500 MHz (Weather)	15
MODULATION CHARACTERISTICS.....	16
Measurements Required	16
Modulation Characteristic Results.....	16
OCCUPIED BANDWIDTH	17
Measurements Required	17
Test Arrangement.....	17
Table 2 Occupied Bandwidth Results	17
Figure 4 Occupied Band Width (Wind Shear)	18
Figure 5 Occupied Band Width (Ground Map).....	18
Figure 6 Occupied Band Width (Weather).....	19
SPURIOUS EMISSIONS AT ANTENNA TERMINALS.....	20

Measurements Required 20

Test Arrangement 20

Table 3 Spurious Emissions at Antenna Terminal Results (Wind Shear) 21

Table 4 Spurious Emissions at Antenna Terminal Results (Ground Map) 22

Table 5 Spurious Emissions at Antenna Terminal Results (Weather)..... 23

 Figure 7 Spurious Emissions at Antenna Terminal 24

 Figure 8 Spurious Emissions at Antenna Terminal 24

 Figure 9 Spurious Emissions at Antenna Terminal 25

 Figure 10 Spurious Emissions at Antenna Terminal 25

FIELD STRENGTH OF SPURIOUS RADIATION (UNWANTED EMISSIONS)..... 26

Measurements Required 26

Test Arrangement 26

Table 6 General Spurious Radiated Emission Results 28

Table 7 Spurious Radiated Emission Results Harmonics 29

FREQUENCY STABILITY 30

Measurements Required 30

Test Arrangement 30

Table 8 Frequency Stability vs. Temperature Results..... 31

Table 9 Frequency Stability vs. Input Power Supply Voltage Results 31

ANNEX..... 32

Annex A Measurement Uncertainty Calculations 33

Annex B Rogers Labs Test Equipment List 34

Annex C Rogers Qualifications..... 35

Annex D Rogers Labs Certificate of Accreditation 36

Revision History

Revision 2 Issued October 12, 2017 – corrected type error on page 9 (Frequency)
 Revision 1 Issued September 23, 2017

Foreword

In accordance with the Federal Communications, Code of Federal Regulations dated October 31, 2016, Part 2 Subpart J, Paragraphs 2.907, 2.911, 2.913, 2.915, 2.925, 2.926, 2.1031 through 2.1057, and Part 87, Subchapter D, Paragraphs 87.131 through 87.147. The following information is submitted for consideration on obtaining Grant of Certification.

Opinion / Interpretation of Results

Tests Performed	Results
Emissions Tests	
Requirements per CFR47 paragraphs 2.1031-2.1057	Complies
Requirements per CFR47 paragraphs 87.131	Complies
Requirements per CFR47 paragraphs 87.133	Complies
Requirements per CFR47 paragraphs 87.135	Complies
Requirements per CFR47 paragraphs 87.139	Complies
Requirements per CFR47 paragraphs 87.141	Complies

Applicable Standards & Test Procedures

Applicable requirements include the 47CFR Part 2, Subpart J, Paragraphs 2.907, 2.911, 2.913, 2.925, 2.926, 2.1031 through 2.1057, and applicable paragraphs of Part 87. Test procedures used are the established Methods of Measurement of Radio-Noise Emissions as described in ANSI C63.4-2014 and ANSI C63.26-2015.

Environmental Conditions

Ambient Temperature	22.7° C
Relative Humidity	49%
Atmospheric Pressure	1008.9 mb

Application for Certification

- (1) The full name and mailing address of the manufacturer of the device and the applicant for certification.

Garmin International, Inc. 1200 East 151st Street Olathe, KS 66062

- (2) FCC identifier. FCC I.D.: IPH-0305600

- (3) A copy of the installation and operating instructions to be furnished the user. A draft copy of the instructions may be submitted if the actual document is not available. The actual document shall be furnished to the FCC when it becomes available.

Refer to exhibit for Draft Instruction Manual.

- (4) Type or types of emission. 11M0F2N

- (5) Frequency range. 9300-9500 MHz

- (6) Range of operating power values or specific operating power levels, and description of any means provided for variation of operating power.

48 Watts peak, 4.8 Watts average power for 28/14-volt installation / operation

- (7) Maximum power rating as defined in the applicable part(s) of the rules.

Maximum power output as determined by appropriate standards during certification per CFR 47 paragraph 87.131.

- (8) The dc voltages applied to and dc currents into the several elements of the final radio frequency amplifying device for normal operation over the power range.

Power delivered into final amplifier 14-volt, 32 volts @ 3.5amps (112 watts)

Power delivered into final amplifier 28-volt, 32 volts @ 3.5 amps (112 watts)

- (9) Tune-up procedure over the power range, or at specific operating power levels.

Refer to Exhibit for Transceiver Alignment Procedure.

- (10) A schematic diagram and a description of all circuitry and devices provided for determining and stabilizing frequency, for suppression of spurious radiation, for limiting modulation, and for limiting power.

Refer to Exhibit for Circuit information and theory of operation.

- (11) A photograph or drawing of the equipment identification plate or label showing the information to be placed thereon.

Refer to Exhibit for Photograph or Drawing.

- (12) Photographs (8" × 10") of the equipment of sufficient clarity to reveal equipment construction and layout, including meters, if any, and labels for controls and meters and sufficient views of the internal construction to define component placement and chassis assembly. Insofar as these requirements are met by photographs or drawings contained in instruction manuals supplied with the certification request, additional photographs are necessary only to complete the required showing.

Refer to Exhibit for Drawings of Components Layout and Chassis Drawings.

- (13) For equipment employing digital modulation techniques, a detailed description of the modulation system to be used, including the response characteristics (frequency, phase and amplitude) of any filters provided, and a description of the modulating wave train, shall be submitted for the maximum rated conditions under which the equipment will be operated.

Not applicable

- (14) The data required by §2.1046 through 2.1057, inclusive, measured in accordance with the procedures set out in §2.1041.

Data is contained in this application

- (15) The application for certification of an external radio frequency power amplifier under part 97 of this chapter need not be accompanied by the data required by paragraph (b)(14) of this section. In lieu thereof, measurements shall be submitted to show compliance with the technical specifications in subpart C of part 97 of this chapter and such information as required by §2.1060 of this part.

Does not apply to this device or application.

- (16) An application for certification of an AM broadcast stereophonic exciter-generator intended for interfacing with existing certified, or formerly type accepted or notified transmitters must include measurements made on a complete stereophonic transmitter. The instruction book must include complete specifications and circuit requirements for interconnecting with existing transmitters. The instruction book must also provide a full description of the equipment and measurement procedures to monitor modulation and to verify that the combination of stereo exciter-generator and transmitter meet the emission limitations of §73.44.

Does not apply to this device or application.

- (17) Applications for certification required by §25.129 of this chapter shall include any additional equipment test data required by that section.

Does not apply to this device or application.

- (18) An application for certification of a software defined radio must include the information required by §2.944.

Does not apply to this device or application.

- (19) Applications for certification of equipment operating under part 27 of this chapter, that a manufacturer is seeking to certify for operation in the:

(i) 1755-1780 MHz, 2155-2180 MHz, or both bands shall include a statement indicating compliance with the pairing of 1710-1780 and 2110-2180 MHz specified in §§27.5(h) and 27.75 of this chapter.

(ii) 1695-1710 MHz, 1755-1780 MHz, or both bands shall include a statement indicating compliance with §27.77 of this chapter.

(iii) 600 MHz band shall include a statement indicating compliance with §27.75 of this chapter.

Does not apply to this device or application.

- (20) Before equipment operating under part 90 of this chapter and capable of operating on the 700 MHz interoperability channels (See §90.531(b)(1) of this chapter) may be marketed or sold, the manufacturer thereof shall have a Compliance Assessment Program Supplier's Declaration of Conformity and Summary Test Report or, alternatively, a document detailing how the manufacturer determined that its equipment complies with §90.548 of this chapter and that the equipment is interoperable across vendors. Submission of a 700 MHz narrowband radio for certification will constitute a representation by the manufacturer that the radio will be shown, by testing, to be interoperable across vendors before it is marketed or sold.


Does not apply to this device or application.

- (21) Contain at least one drawing or photograph showing the test set-up for each of the required types of tests applicable to the device for which certification is requested. These drawings or photographs must show enough detail to confirm other information contained in the test report. Any photographs used must be focused originals without glare or dark spots and must clearly show the test configuration used.

Data is contained in this application or application exhibits.

System Description

The GMN-01589 is a solid-state, mobile mounted, Airborne Aviation radar transponder operating in the 9300-9500 MHz frequency band. The design provides digital weather radar or ground mapping information operation to aid pilots in identifying weather, wind shear, and ground mapping. The modes are user selectable and the resulting information is sent to a display for use and interpretation by the pilot. The unit operates across within the 9300-9500 MHz frequency band on defined channels. Digitally modulated signals are transmitted out and doppler returns are processed in software and sent to the display to aid the pilot. The device is marketed as Aircraft Remote Mounted Avionics Unit. This report documents operation for this application as authorized in 47CFR 87 Subparts D, F and Q.

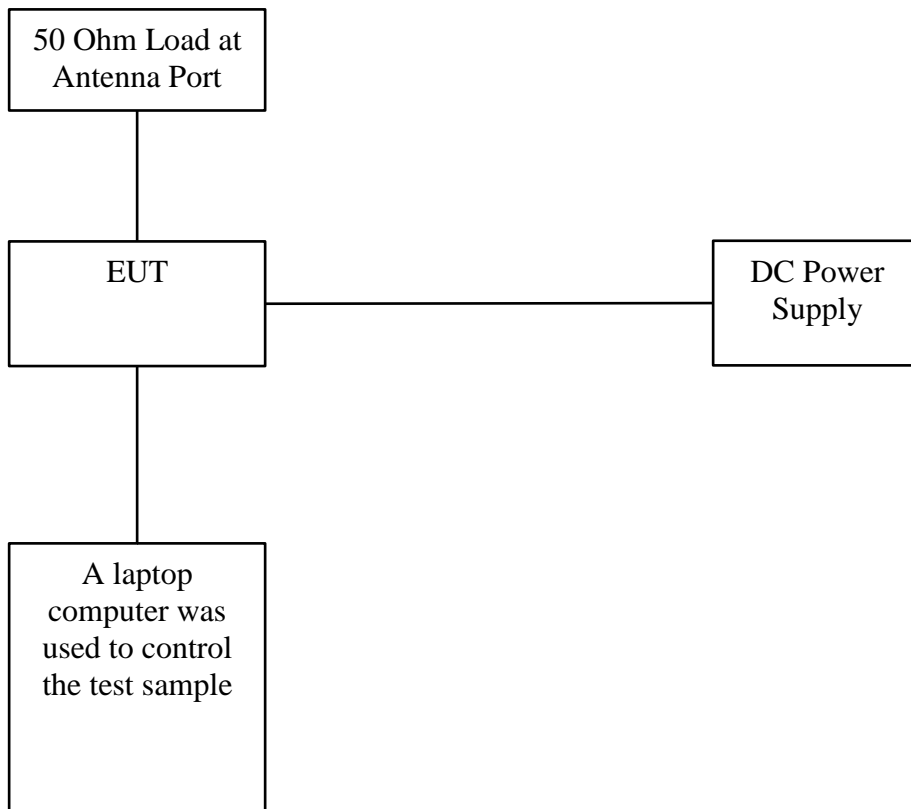

Units of Measurements

AC Line Conducted EMI Data is in dB μ V; dB referenced to one microvolt.

Radiated EMI Data is in dB μ V/m; dB/m referenced to one microvolt per meter

Antenna Conducted Data is in dBm, dB referenced to one milliwatt

Test Site Locations

Conducted EMI The AC power line conducted emissions testing performed in a shielded screen room located at Rogers Labs, Inc., 4405 W. 259th Terrace, Louisburg, KS.

Radiated EMI The radiated emissions testing performed at the 3 meters, Open Area Test Site (OATS) located at Rogers Labs, Inc., 4405 W. 259th Terrace, Louisburg, KS.

Site Registration Refer to Annex for FCC Site Registration Letter, # 90910, and Industry Canada Site Registration Letter, IC3041A-1.

List of Test Equipment

A Rohde and Schwarz ESU40 and/or Hewlett Packard 8591EM was used as the measuring device for the emissions testing of frequencies below 1 GHz. A Rohde and Schwarz ESU40 and/or Hewlett Packard 8562A Spectrum Analyzer was used as the measuring device for testing the emissions at frequencies above 1 GHz. The analyzer settings used are described in the following table. Refer to the appendix for a complete list of test equipment.

AC Line Conducted Emissions (0.150 -30 MHz)		
RBW	AVG. BW	Detector Function
9 kHz	30 kHz	Peak / Quasi Peak
Emissions (30-1000 MHz)		
RBW	AVG. BW	Detector Function
120 kHz	300 kHz	Peak / Quasi Peak
Emissions (Above 1000 MHz)		
RBW	Video BW	Detector Function
100 kHz	100 kHz	Peak
1 MHz	1 MHz	Peak / Average

<u>Equipment</u>	<u>Manufacturer</u>	<u>Model (SN)</u>	<u>Band</u>	<u>Cal Date</u>	<u>Due</u>
<input type="checkbox"/> LISN	FCC	FCC-LISN-50-2-10(1PA) (160611)	.15-30MHz	5/17	5/18
<input checked="" type="checkbox"/> Cable	Time Microwave	750HF290-750 (L10M)	9kHz-40 GHz	10/16	10/17
<input type="checkbox"/> Cable	Belden	RG-58 (L1-CAT3-11509)	9kHz-30 MHz	10/16	10/17
<input type="checkbox"/> Cable	Belden	RG-58 (L2-CAT3-11509)	9kHz-30 MHz	10/16	10/17
<input type="checkbox"/> Antenna	ARA	BCD-235-B (169)	20-350MHz	10/16	10/17
<input type="checkbox"/> Antenna	EMCO	3147 (40582)	200-1000MHz	10/16	10/17
<input checked="" type="checkbox"/> Antenna	ETS-Lindgren	3117 (200389)	1-18 GHz	5/17	5/18
<input type="checkbox"/> Antenna	Com Power	AH-118 (10110)	1-18 GHz	10/15	10/17
<input checked="" type="checkbox"/> Antenna	Com Power	AH-840 (101046)	18-40 GHz	5/17	5/18
<input checked="" type="checkbox"/> Antenna	Com Power	AL-130 (121055)	.001-30 MHz	10/16	10/17
<input checked="" type="checkbox"/> Antenna	Sunol	JB-6 (A100709)	30-1000 MHz	10/16	10/17
<input type="checkbox"/> Antenna	EMCO	3143 (9607-1277)	20-1200 MHz	5/17	5/18
<input type="checkbox"/> Analyzer	HP	8591EM (3628A00871)	9kHz-1.8GHz	5/17	5/18
<input checked="" type="checkbox"/> Analyzer	HP	8562A (3051A05950)	9kHz-110GHz	5/17	5/18
<input checked="" type="checkbox"/> Analyzer	HP External Mixers	11571, 11970	25GHz-110GHz	5/17	5/18
<input checked="" type="checkbox"/> Analyzer	Rohde & Schwarz	ESU40 (100108)	20Hz-40GHz	5/17	5/18
<input checked="" type="checkbox"/> Amplifier	Com-Power	PA-010 (171003)	100Hz-30MHz	10/16	10/17
<input checked="" type="checkbox"/> Amplifier	Com-Power	CPA-102 (01254)	1-1000 MHz	10/16	10/17
<input checked="" type="checkbox"/> Amplifier	Com-Power	PAM-118A (551014)	0.5-18 GHz	10/16	10/17
<input type="checkbox"/> Power Meter	Agilent	N1911A with N1921A	0.05-18 GHz	5/17	5/18

Rogers Labs, Inc.
4405 West 259th Terrace
Louisburg, KS 66053
Phone/Fax: (913) 837-3214
Revision 2

Garmin International, Inc.
Model: GMN-01589
Test #: 170614
Test to: FCC Parts 2 and 87
File: GMN01589 TstRpt 170614 r2

SN: 4RR000042
FCC ID: IPH-0305600
Date: October 12, 2017
Page 11 of 36


Transmitter Power Output

Measurements Required

Measurements shall be made to establish the radio frequency power delivered by the transmitter into the standard output termination. The power output shall be monitored and recorded and no adjustment shall be made to the transmitter after the test has begun, except as noted below:

If the power output is adjustable, measurements shall be made for the highest and lowest power levels.

Test Arrangement



The radio frequency power output was measured at the antenna terminal by placing 30-dB attenuation in the antenna line and observing the emission with the spectrum analyzer. The spectrum analyzer and attenuation offered an impedance of 50Ω to match the impedance of the standard antenna. A Rohde & Schwarz ESU40 Spectrum Analyzer was used to measure the radio frequency power at the antenna port. Data was taken in dBm and converted to watts as shown in the following Table. Refer to Figures 1 through 3 showing plots of output power of the transmitter across the frequency band in each operational mode Wind Shear, Ground Map, and Weather. Data was taken per CFR47 Paragraph 2.1046(a) and applicable paragraphs of Part 87 .

P_{dBm} = power in dB above 1 milliwatt

Milliwatts = $10^{(PdBm/10)}$

Watts = (Milliwatts)(0.001)(W/mW)

Milliwatts = $10^{(46.84/10)}$

= 48,305.88 mW

= 48.31 Watts power

Table 1 Transmitter Power Results

Frequency	P _{dBm}	P _{mw}	P _w
Wind Shear			
9323.0	45.90	38,904.51	38.90
9403.0	45.96	39,445.72	39.45
9486.0	45.88	38,725.76	38.73
Ground Map			
9323.0	46.00	39,810.72	39.81
9403.0	46.09	40,644.33	40.64
9486.0	46.80	47,863.01	47.86
Weather			
9323.0	46.04	40,179.08	40.18
9403.0	46.03	40,068.22	40.07
9486.0	46.84	48,305.88	48.31

The EUT demonstrated compliance with specifications of CFR47 Paragraph 2.1046(a) and applicable Parts of 2 and 87.131. There are no deviations to the specifications.

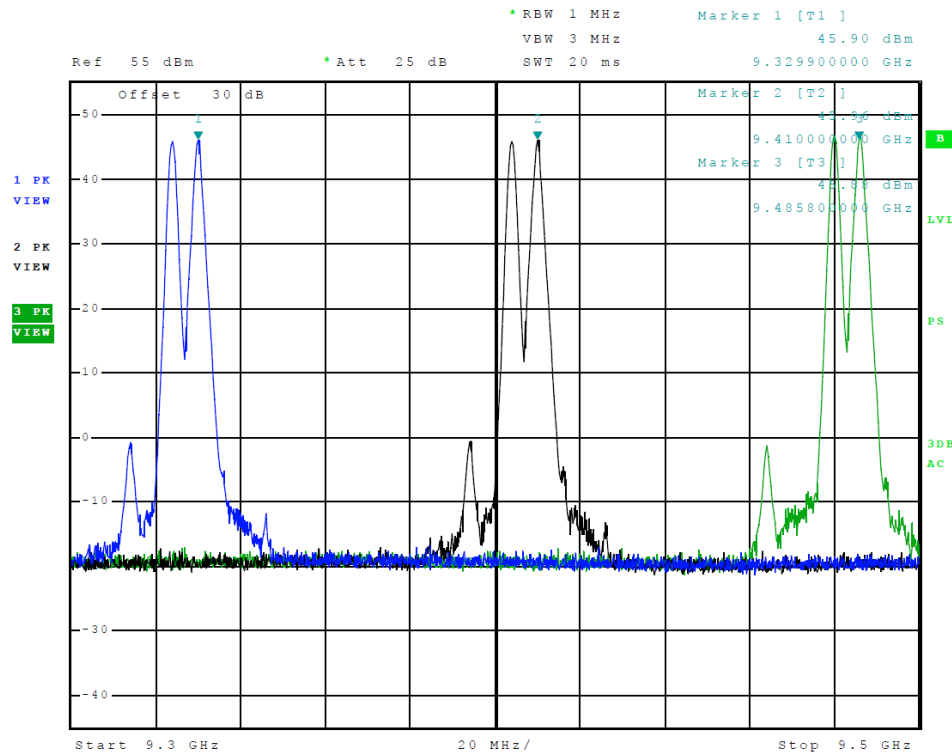


Figure 1 Power Output Across Frequency Band 9300-9500 MHz (Wind Shear)

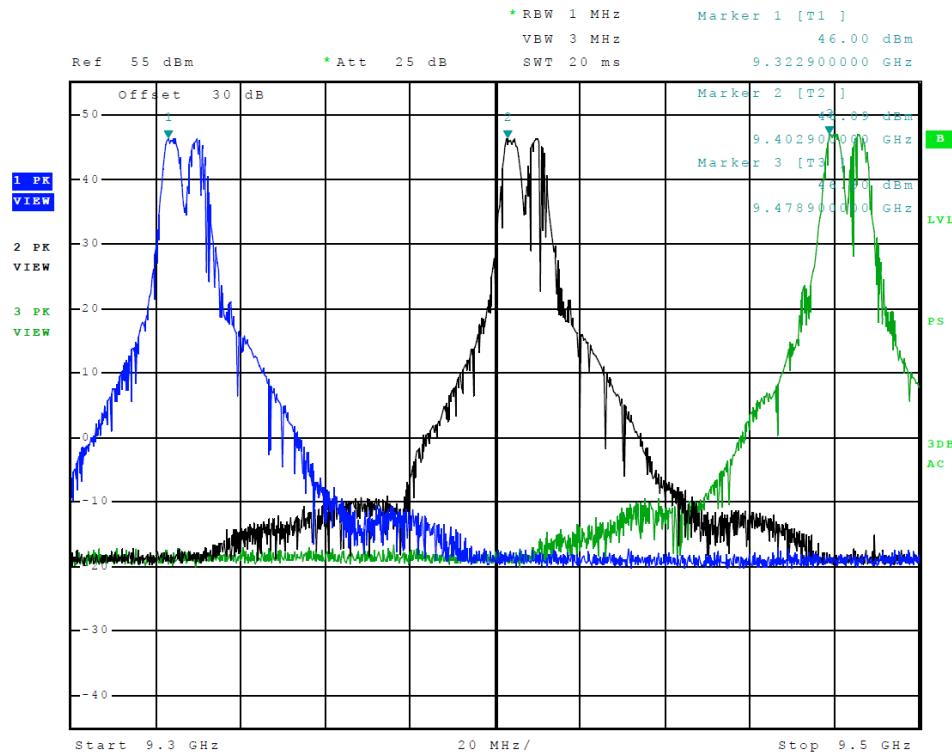


Figure 2 Power Output Across Frequency Band 9300-9500 MHz (Ground Map)

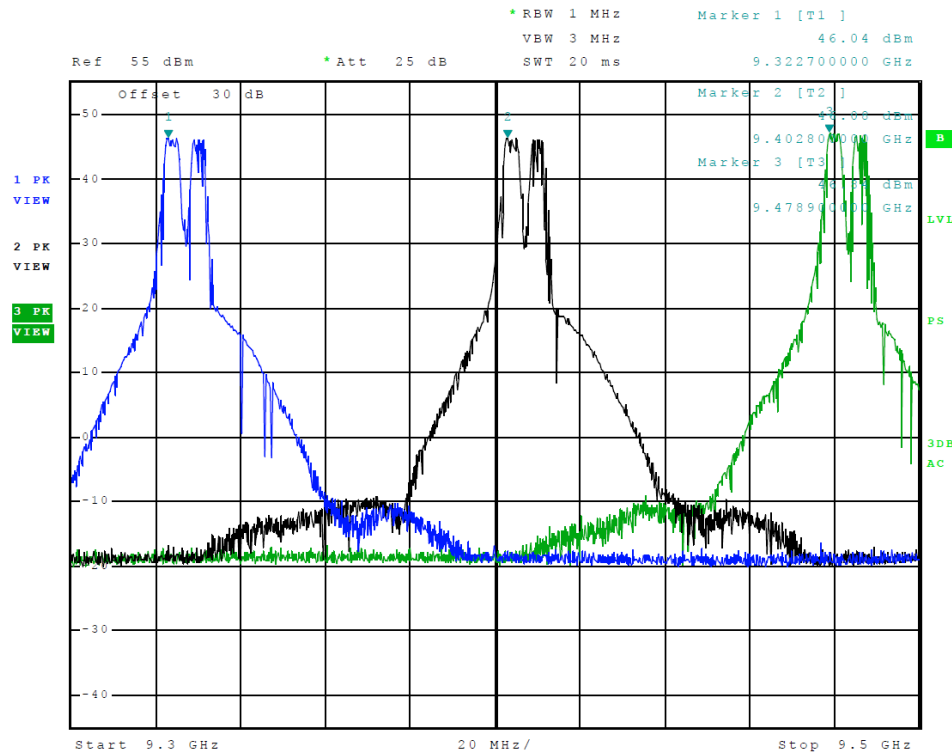


Figure 3 Power Output Across Frequency Band 9300-9500 MHz (Weather)

Modulation Characteristics

Measurements Required

A curve or equivalent data, which shows that the equipment will meet the modulation requirements of the rules, under which the equipment is licensed, shall be submitted.

The EUT transmits no message and utilizes no modulation. Therefore, no modulation curves are available or required.

Modulation Characteristic Results

The EUT transmits no message. Pulses of varying width and duration are transmitted but signal utilizes no modulation. Therefore, no modulation curves are available or required. The EUT demonstrated compliance with the specifications of CFR47 Paragraph 2.1046(a) and applicable Parts of 2 and 87.141. There are no deviations to the specifications


The EUT demonstrated compliance with specifications of CFR47 Paragraph 2.1046(a) and applicable Parts of 2 and 87.141 There are no deviations to the specifications.

Occupied Bandwidth

Measurements Required

The occupied bandwidth, that is the frequency bandwidth such that below its lower and above its upper frequency limits, the mean powers radiated are equal to 0.5 percent of the total mean power radiated by a given emission.

Test Arrangement

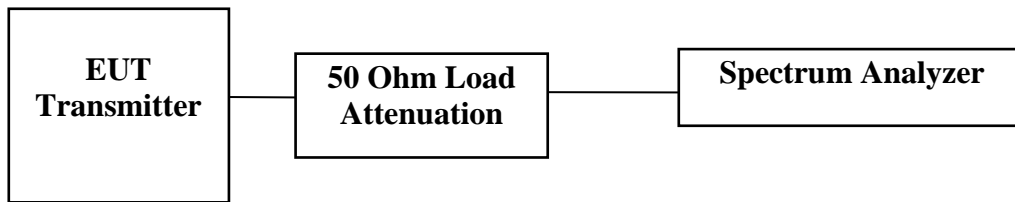

A Rohde & Schwarz ESU 40 spectrum analyzer was used to observe the radio frequency spectrum with the transmitter operating in normal modes. The power ratio in dB representing 99% of the total mean power was recorded from the spectrum analyzer measurements. Refer to figures 4 through 6 for plots of 99% power occupied bandwidth measurements.

Table 2 Occupied Bandwidth Results

Frequency (MHz)	Occupied bandwidth (MHz)
Wind shear	7.275
Ground Map	10.975
Weather	10.050

The EUT demonstrated compliance with specifications of CFR47 Paragraph 2.1046(a) and applicable Parts of 2 and 87.135. There are no deviations to the specifications.

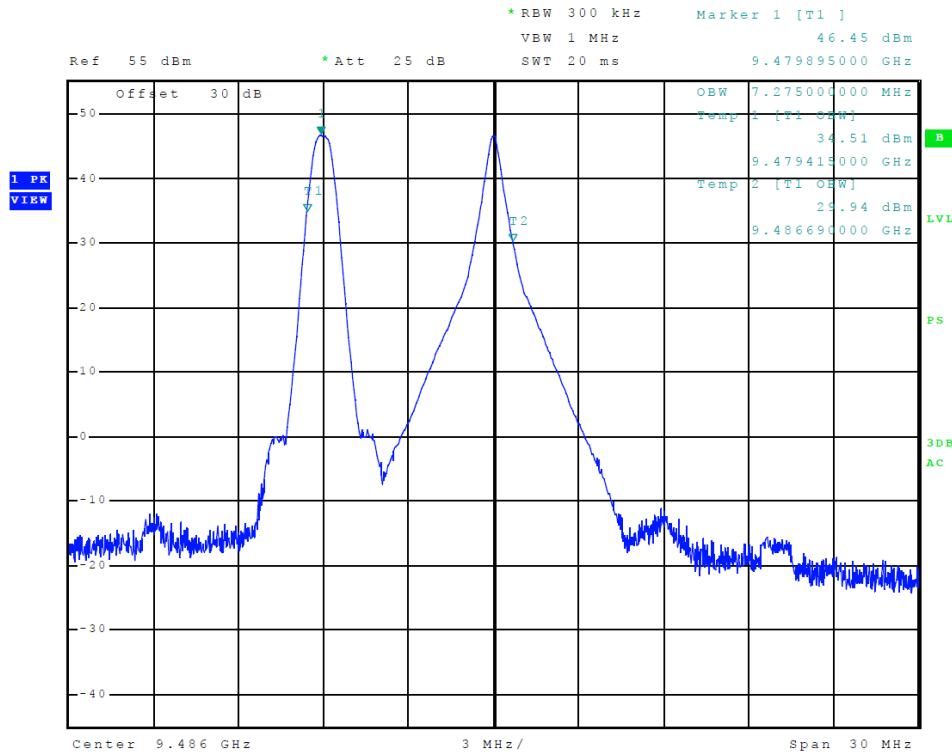


Figure 4 Occupied Band Width (Wind Shear)

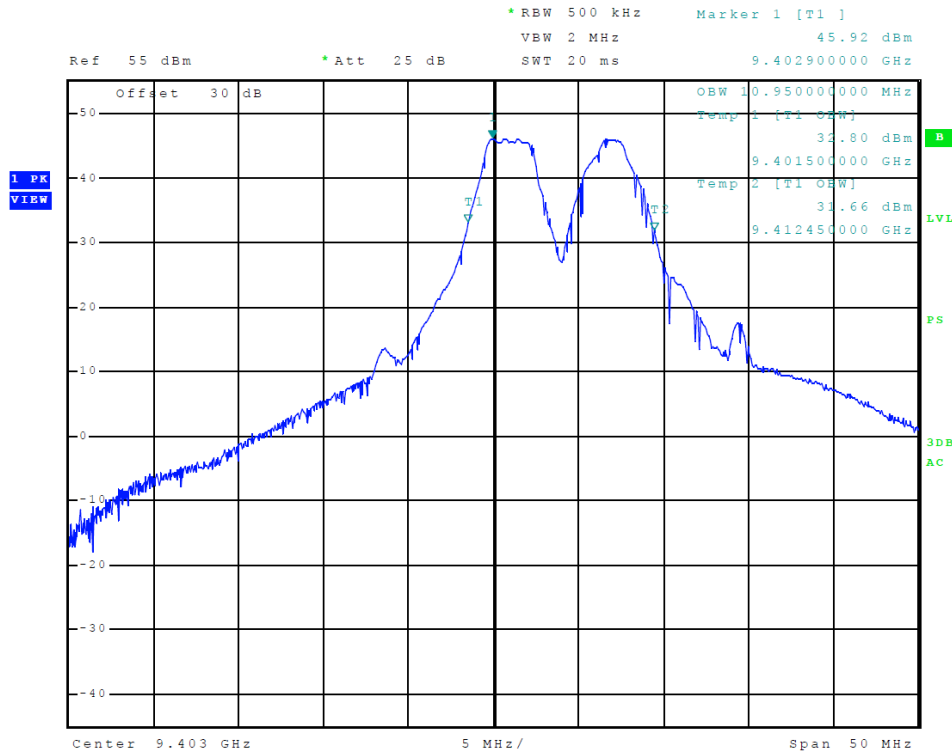


Figure 5 Occupied Band Width (Ground Map)

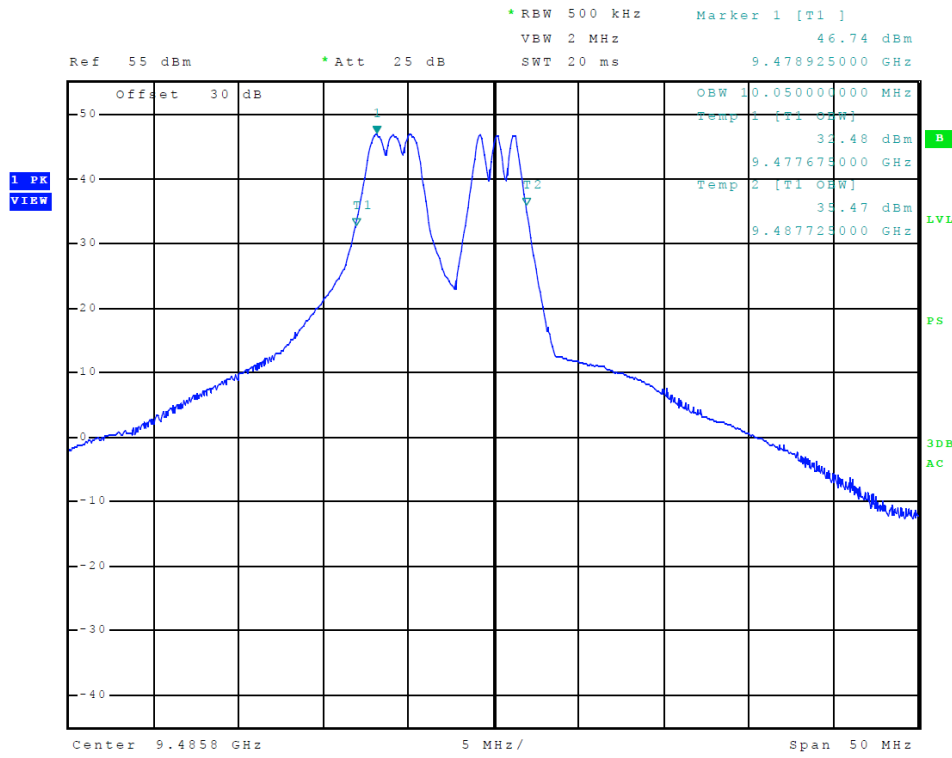


Figure 6 Occupied Band Width (Weather)


Spurious Emissions at Antenna Terminals

Measurements Required

The radio frequency voltage or power generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. All spurious emissions must be attenuated at least $43 + 10 \log (P_o)$ below the fundamental emission power level. The following equations represent the calculated attenuation level for the equipment operating with rated average output power of 4.8 Watts.

$$\begin{aligned} \text{Limit (dBc)} &= 43 + 10 \text{ Log } (P_o) \\ &= 43 + 10 \text{ Log } (4.8) \\ &= 49.8 \text{ dBc} \end{aligned}$$

Test Arrangement

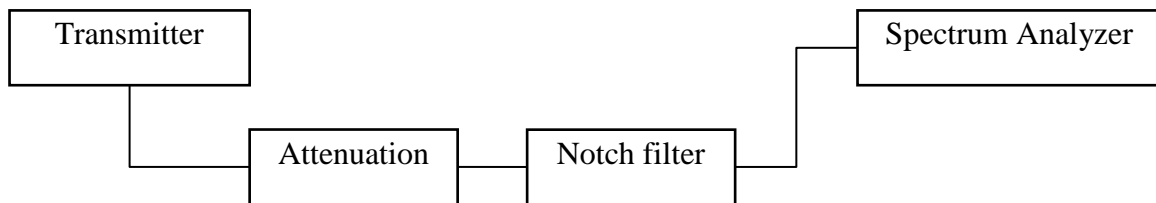

The radio frequency output was coupled to a Rohde & Schwarz ESU40 Spectrum Analyzer during antenna port conducted emissions measurements. The spectrum analyzer was used to observe the radio frequency spectrum with the transmitter operated in all normal modes. The frequency spectrum from 30 MHz to 40,000 MHz was observed and plots produced of the frequency spectrum displayed on the test equipment. Refer to figures seven through ten for plots of the spurious emissions at antenna port. Data was taken per CFR47 2.1051, 2.1057, and applicable paragraphs of Part 87.139. There are no deviations to the specifications.

Table 3 Spurious Emissions at Antenna Terminal Results (Wind Shear)

Channel MHz	Spurious Freq. (MHz)	Measured Level (dBm)	Level Below Carrier (dBc)
9323.00	18646.0	-41.98	-87.9
	27969.0	-45.38	-91.3
	37292.0	-45.32	-91.2
9410.00	18820.0	-43.14	-89.1
	28230.0	-45.58	-91.5
	37640.0	-44.60	-90.6
9486.00	18972.0	-43.71	-89.6
	28458.0	-44.64	-90.5
	37944.0	-44.33	-90.2

Table 4 Spurious Emissions at Antenna Terminal Results (Ground Map)

Channel MHz	Spurious Freq. (MHz)	Measured Level (dBm)	Level Below Carrier (dBc)
9323.00	18646.0	-43.58	-89.5
	27969.0	-45.37	-91.3
	37292.0	-45.03	-90.9
9410.00	18820.0	-44.53	-90.5
	28230.0	-43.51	-89.5
	37640.0	-44.47	-90.4
9486.00	18972.0	-44.79	-90.7
	28458.0	-45.29	-91.2
	37944.0	-44.54	-90.4

Table 5 Spurious Emissions at Antenna Terminal Results (Weather)

Channel MHz	Spurious Freq. (MHz)	Measured Level (dBm)	Level Below Carrier (dBc)
9323.00	18646.0	-41.98	-87.9
	27969.0	-44.36	-90.3
	37292.0	-44.40	-90.3
9410.00	18820.0	-43.69	-89.7
	28230.0	-45.28	-91.2
	37640.0	-44.15	-90.1
9486.00	18972.0	-44.13	-90.0
	28458.0	-45.06	-90.9
	37944.0	-44.65	-90.5

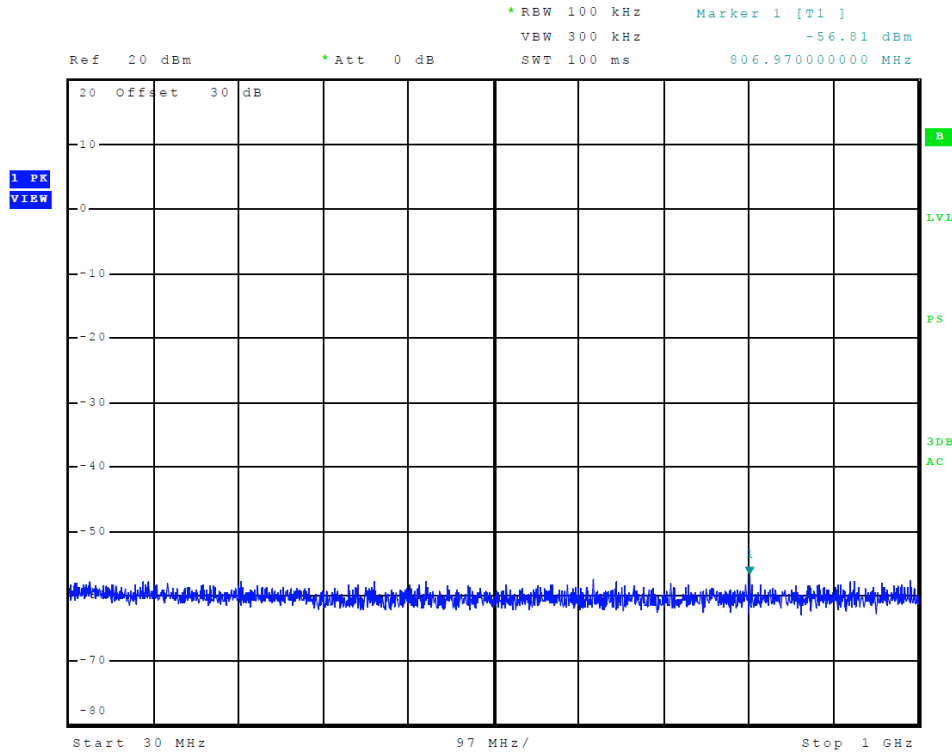


Figure 7 Spurious Emissions at Antenna Terminal

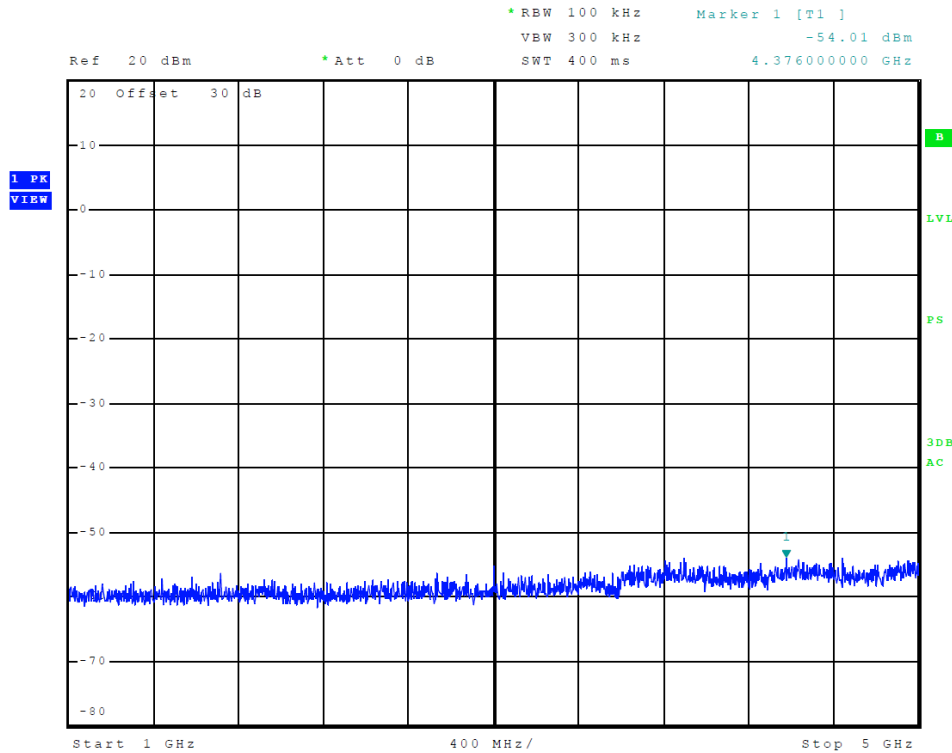


Figure 8 Spurious Emissions at Antenna Terminal

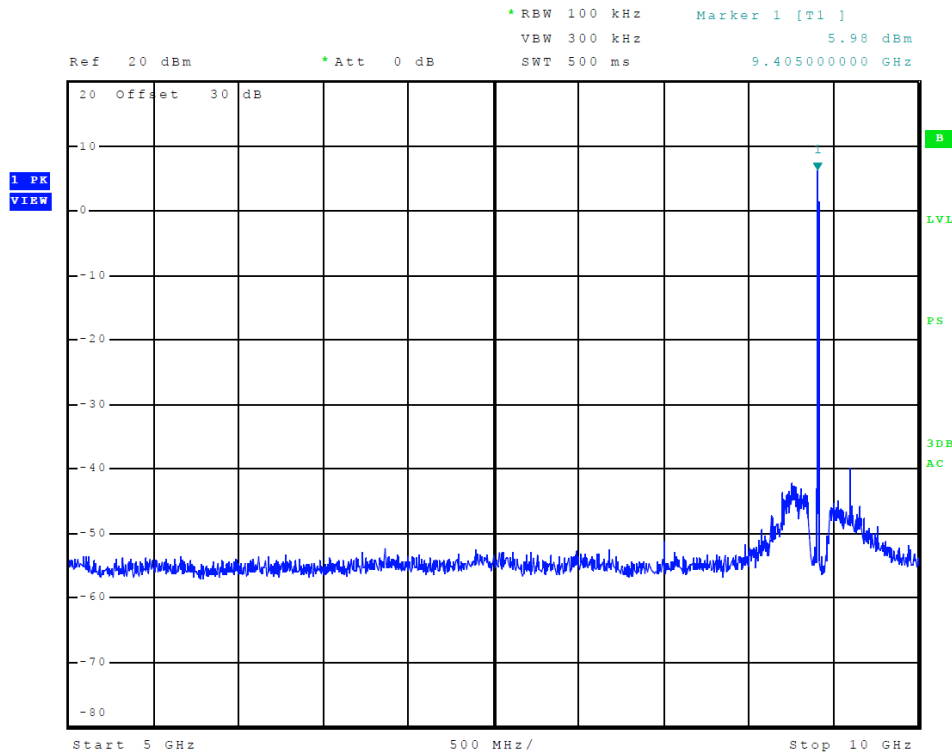


Figure 9 Spurious Emissions at Antenna Terminal

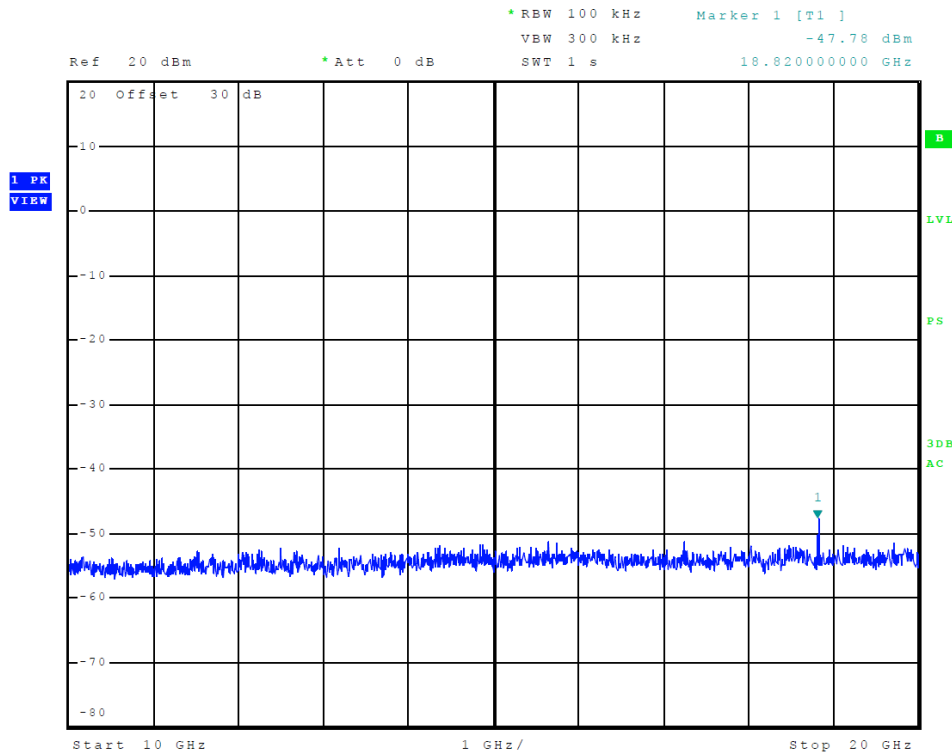



Figure 10 Spurious Emissions at Antenna Terminal

Field Strength of Spurious Radiation (Unwanted Emissions)

Measurements Required

Measurements shall be made to detect spurious emissions that may be radiated directly from the cabinet, control circuits, power leads, or intermediate circuit elements under normal conditions of installation and operation. This equipment is typically remote mounted with interface cabling connecting the display control unit to the transmitter. The sample offered for testing required interfacing with laptop computer providing operational control with all functions of the transmitter.

Test Arrangement

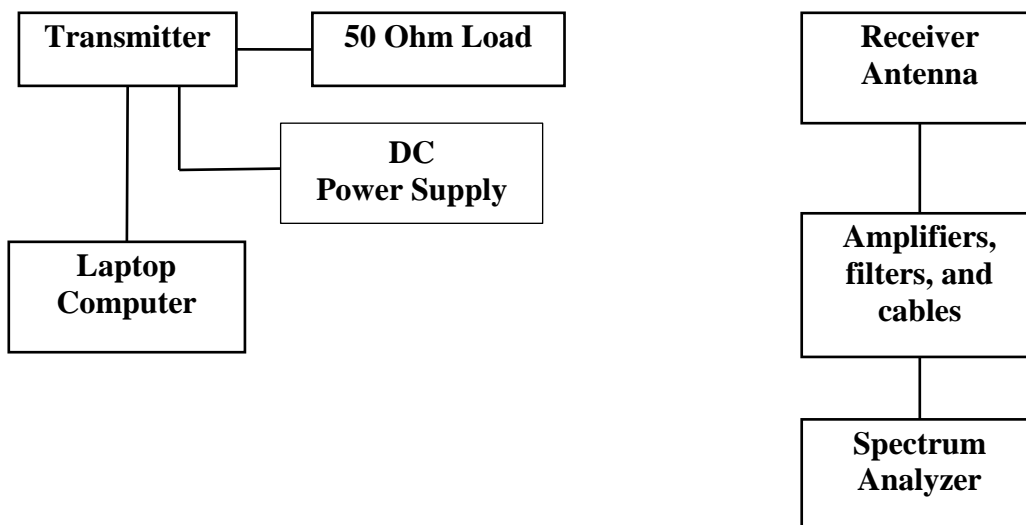

The test setup was assembled in a screen room for preliminary screening. The transmitter was placed on a supporting platform 0.8 meters above the ground plane and at a distance of 1 meter from the receive antenna, plots were taken of the general radiated emissions. A final radiated emission testing was performed with the transmitter placed on a supporting turntable platform 0.8 meters above the ground plane and at a distance of 3 meters from the Field Strength Measuring (FSM) antenna. The EUT was operational and radiating into a 50Ω load during testing. The receiving antenna was raised and lowered from 1m to 4m in height to obtain the maximum reading of spurious radiation from the EUT, cabinet, and interface cabling. The

turntable was rotated though 360 degrees to locate the position registering the highest amplitude of emission. The frequency spectrum was then searched for spurious emissions generated from the transmitter, interface cabling, and test setup. The amplitude of each spurious emission was maximized by raising and lowering the FSM antenna, and rotating the turntable before final data was recorded. The frequency spectrum from 30 MHz to 95,000 MHz was investigated during radiated emissions testing. A loop antenna was used for measuring frequencies from 9 kHz to 30 MHz, a Biconilog antenna was used for frequency measurements of 30 to 1000 MHz. Double-ridge horns and external mixers were used for measuring frequencies from 1000 MHz to 95,000 MHz. Emission levels were measured and recorded from the spectrum analyzer in dBµV. Data was taken at the Rogers Labs, Inc. 3 meters open area test site (OATS). The transmitter was then removed and replaced with a substitution antenna, amplification as required, and signal generator. The signal from the generator was then adjusted such that the amplitude received was the same as that previously recorded for each frequency. This step was repeated for both horizontal and vertical polarizations. The power in dBm required to produce the desired signal level was then recorded from the signal generator. The power in dBm was then calculated by reducing the previous readings by the gain in the substitution antenna. A description of the test facility is on file with the accrediting body, FCC and Industry Canada (refer to annex for site registration letters).

All spurious emissions must be attenuated at least $43 + 10 \log (P_o)$ below the fundamental emission power level. The following equation represents the calculated attenuation levels for the equipment.

$$\begin{aligned} \text{Limit (dBc)} &= 43 + 10 \text{ Log } (P_o) \\ &= 43 + 10 \text{ Log } (4.8) \\ &= 49.8 \text{ dBc} \end{aligned}$$

Requirement 46.84 dBm less the requirement 49.8 dBc equates to an absolute level of -13 dBm

Table 6 General Spurious Radiated Emission Results

Frequency MHz	Amplitude of Emission (dBµV)		Signal Level to dipole required to Reproduce(dBm)		Emission level below carrier (dBc)		Limit (dBm)
	Horizontal	Vertical	Horizontal	Vertical	Horizontal	Vertical	
64.2	27.2	28.2	-67.03	-108.03	-113.9	-154.9	-13
64.7	26.4	30.1	-65.13	-108.83	-112.0	-155.7	-13
74.2	34.7	30.2	-65.03	-100.53	-111.9	-147.4	-13
83.1	26.8	26.5	-68.73	-111.93	-115.6	-158.8	-13
83.4	26.8	26.1	-69.13	-111.93	-116.0	-158.8	-13
160.0	29.7	24.5	-70.73	-111.53	-117.6	-158.4	-13
223.2	15.9	18.2	-77.03	-125.33	-123.9	-172.2	-13
236.8	33.6	25.1	-70.13	-107.63	-117.0	-154.5	-13
240.0	31.3	28.2	-67.03	-103.93	-113.9	-150.8	-13
270.0	46.0	45.0	-50.23	-89.23	-97.1	-136.1	-13
287.0	41.4	41.2	-54.03	-93.83	-100.9	-140.7	-13
480.0	34.0	33.1	-62.13	-104.73	-109.0	-151.6	-13
869.8	41.0	43.5	-51.73	-97.73	-98.6	-144.6	-13
955.0	23.9	23.9	-71.33	-114.83	-118.2	-161.7	-13
960.0	37.9	39.1	-56.13	-103.33	-103.0	-150.2	-13

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded above for frequencies below 1000 MHz. Peak and Average amplitude emissions are recorded above for frequencies above 1000 MHz.

The EUT demonstrated compliance with specifications of CFR47 Paragraph 2.1046(a) and applicable Parts of 2 and 87.139. There are no deviations to the specifications. There are no deviations or exceptions to the specifications.

Table 7 Spurious Radiated Emission Results Harmonics

Frequency MHz	Amplitude of Emission (dBμV)		Signal Level to dipole required to Reproduce(dBm)		Emission level below carrier (dBc)		Limit (dBm)
	Horizontal	Vertical	Horizontal	Vertical	Horizontal	Vertical	
18808.0	58.1	58.2	-37.03	-91.13	-83.9	-138.0	-13
28212.0	30.1	30.2	-65.03	-119.13	-111.9	-166.0	-13
37616.0	33.4	33.4	-61.83	-115.83	-108.7	-162.7	-13
47020.0	53.9	55.0	-40.23	-95.33	-87.1	-142.2	-13
56424.0	53.1	51.2	-44.03	-96.13	-90.9	-143.0	-13
65828.0	52.8	52.5	-42.73	-96.43	-89.6	-143.3	-13


Frequency Stability

Measurements Required

The frequency stability shall be measured with variations of ambient temperature from -30° to +50° centigrade. Measurements shall be made at the extremes of the temperature range and at intervals of not more than 10° centigrade through the range. A period sufficient to stabilize all of the components of the oscillator circuit at each temperature level shall be allowed prior to frequency measurement. In addition to temperature stability, the frequency stability shall be measured with variation of primary supply voltage as follows:

- (1) Vary primary supply voltage from 85 to 115 percent of the nominal value.
- (2) The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided.

Test Arrangement

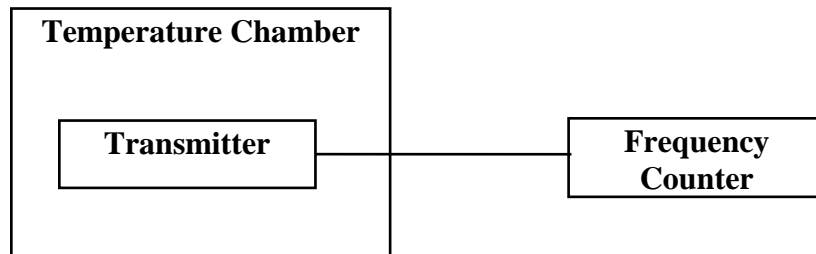

The measurement procedure outlined below shall be followed.

Step 1: The transmitter shall be installed in an environmental test chamber whose temperature is controllable. Provision shall be made to measure the frequency of the transmitter.

Step 2: With the transmitter inoperative (power switched “OFF”), the temperature of the test chamber shall be adjusted to +25°C. After a temperature stabilization period of one hour at +25°C, the transmitter shall be switched “ON” with standard test voltage applied.

Step 3: The carrier shall be keyed “ON”, and the transmitter shall be operated at full radio frequency power output at the duty cycle, for which it is rated, for duration of at least 5 minutes. The radio frequency carrier frequency shall be monitored and measurements shall be recorded.

Step 4: The test procedures outlined in Steps 2 and 3, shall be repeated after stabilizing the transmitter at the environmental temperatures specified, -30°C to +50°C in 10-degree increments.

The frequency stability was measured with variations in the power supply voltage from 85 to 115 percent of the nominal value. The frequency was measured and the variation in parts per million calculated. Data was taken per CFR47 Paragraphs 2.1055 and applicable paragraphs of part 87.133.

Table 8 Frequency Stability vs. Temperature Results

Frequency 9403.000 MHz)	Frequency Stability Vs. Temperature Ambient Frequency (9403.000000)								
	Temperature °C	-30	-20	-10	0	+10	+20	+30	+40
Change (Hz)	400	-1,200	-700	-2,800	-2,000	-4,200	-1,400	-2,600	1,100
PPM	0.043	-0.128	-0.075	-0.299	-0.213	-0.448	-0.149	-0.277	0.117
%	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Limit (PPM)	Note 1	Note 1	Note 1	Note 1	Note 1	Note 1	Note 1	Note 1	Note 1

Note 1: Per 47CFR 87.133, Where specific frequencies are not assigned to radar stations, the bandwidth occupied by the emissions of such stations must be maintained within the band allocated to the service and the indicated tolerance does not apply

Table 9 Frequency Stability vs. Input Power Supply Voltage Results

Frequency (9403.000 MHz)	Frequency Stability Vs. Voltage Variation 27.5 volts nominal; Results in Hz change		
	Voltage V _{dc}	23.375	27.5
Change (Hz)	0	0	0
PPM	0	0	0
%	0.000	0.000	0.000
Limit (PPM)	Note 1	Note 1	Note 1

The EUT demonstrated compliance with specifications of CFR47 Paragraph 2.1046(a) and applicable Parts of 87.133(d). There are no deviations or exceptions to the specifications.

Annex

- Annex A Measurement Uncertainty Calculations
- Annex B Rogers Labs Test Equipment List
- Annex C Rogers Qualifications
- Annex D Rogers Labs Certificate of Accreditation

Annex A Measurement Uncertainty Calculations

Annex A Measurement Uncertainty Calculations Measurement uncertainty calculations were made for the laboratory. Result of measurement uncertainty calculations are recorded below for AC line conducted and radiated emission measurements.

Measurement Uncertainty	$U_{(E)}$	$U_{(lab)}$
3 Meter Horizontal 30-200 MHz Measurements	2.08	4.16
3 Meter Vertical 30-200 MHz Measurements	2.16	4.33
3 Meter Vertical Measurements 200-1000 MHz	2.99	5.97
10 Meter Horizontal Measurements 30-200 MHz	2.07	4.15
10 Meter Vertical Measurements 30-200 MHz	2.06	4.13
10 Meter Horizontal Measurements 200-1000 MHz	2.32	4.64
10 Meter Vertical Measurements 200-1000 MHz	2.33	4.66
3 Meter Measurements 1-6 GHz	2.57	5.14
3 Meter Measurements 6-18 GHz	2.58	5.16
AC Line Conducted	1.72	3.43

Annex B Rogers Labs Test Equipment List

List of Test Equipment	Calibration	Date	Due
List of Test Equipment	Calibration	Date	Due
Spectrum Analyzer: Rohde & Schwarz ESU40		5/17	5/18
Spectrum Analyzer: HP 8562A, HP Adapters: 11518, 11519, and 11520		5/17	5/18
Mixers: 11517A, 11970A, 11970K, 11970U, 11970V, 11970W			
Spectrum Analyzer: HP 8591EM		5/17	5/18
Antenna: EMCO Biconilog Model: 3143		5/17	5/18
Antenna: Sunol Biconilog Model: JB6		10/16	10/17
Antenna: EMCO Log Periodic Model: 3147		10/16	10/17
Antenna: Com Power Model: AH-118		10/16	10/17
Antenna: Com Power Model: AH-840		5/17	5/18
Antenna: Antenna Research Biconical Model: BCD 235		10/16	10/17
Antenna: Com Power Model: AL-130		10/16	10/17
Antenna: EMCO 6509		10/16	10/17
LISN: Compliance Design Model: FCC-LISN-2.Mod.cd, 50 µHy/50 ohm/0.1 µf		10/16	10/17
R.F. Preamp CPPA-102		10/16	10/17
Attenuator: HP Model: HP11509A		10/16	10/17
Attenuator: Mini Circuits Model: CAT-3		10/16	10/17
Attenuator: Mini Circuits Model: CAT-3		10/16	10/17
Cable: Belden RG-58 (L1)		10/16	10/17
Cable: Belden RG-58 (L2)		10/16	10/17
Cable: Belden 8268 (L3)		10/16	10/17
Cable: Time Microwave: 4M-750HF290-750		10/16	10/17
Cable: Time Microwave: 10M-750HF290-750		10/16	10/17
Frequency Counter: Leader LDC825		2/17	2/18
Oscilloscope Scope: Tektronix 2230		2/17	2/18
Wattmeter: Bird 43 with Load Bird 8085		2/17	2/18
Power Supplies: Sorensen SRL 20-25, SRL 40-25, DCR 150, DCR 140		2/17	2/18
R.F. Generators: HP 606A, HP 8614A, HP 8640B		2/17	2/18
R.F. Power Amp 65W Model: 470-A-1010		2/17	2/18
R.F. Power Amp 50W M185- 10-501		2/17	2/18
R.F. Power Amp A.R. Model: 10W 1010M7		2/17	2/18
R.F. Power Amp EIN Model: A301		2/17	2/18
LISN: Compliance Eng. Model 240/20		2/17	2/18
LISN: Fischer Custom Communications Model: FCC-LISN-50-16-2-08		2/17	2/18
Antenna: EMCO Dipole Set 3121C		2/17	2/18
Antenna: C.D. B-101		2/17	2/18
Antenna: Solar 9229-1 & 9230-1		2/17	2/18
Audio Oscillator: H.P. 201CD		2/17	2/18
ESD Test Set 2010i		2/17	2/18
Fast Transient Burst Generator Model: EFT/B-101		2/17	2/18
Field Intensity Meter: EFM-018		2/17	2/18
KEYTEK Ecat Surge Generator		2/17	2/18
Shielded Room 5 M x 3 M x 3.0 M			

Annex C Rogers Qualifications

Scot D. Rogers, Engineer

Rogers Labs, Inc.

Mr. Rogers has approximately 17 years' experience in the field of electronics. Engineering experience includes six years in the automated controls industry and remaining years working with the design, development and testing of radio communications and electronic equipment.

Positions Held


Systems Engineer: A/C Controls Mfg. Co., Inc. 6 Years

Electrical Engineer: Rogers Consulting Labs, Inc. 5 Years

Electrical Engineer: Rogers Labs, Inc. Current

Educational Background

- 1) Bachelor of Science Degree in Electrical Engineering from Kansas State University.
- 2) Bachelor of Science Degree in Business Administration Kansas State University.
- 3) Several Specialized Training courses and seminars pertaining to Microprocessors and Software programming.



Scot D. Rogers

Annex D Rogers Labs Certificate of Accreditation

United States Department of Commerce
National Institute of Standards and Technology

NVLAP®

Certificate of Accreditation to ISO/IEC 17025:2005

NVLAP LAB CODE: 200087-0

Rogers Labs, Inc.
Louisburg, KS

*is accredited by the National Voluntary Laboratory Accreditation Program for specific services,
listed on the Scope of Accreditation, for:*

Electromagnetic Compatibility & Telecommunications

*This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005.
This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality
management system (refer to joint ISO-ILAC-IAF Communique dated January 2009).*

2017-03-01 through 2018-03-31
Effective Dates




For the National Voluntary Laboratory Accreditation Program

Rogers Labs, Inc.
4405 West 259th Terrace
Louisburg, KS 66053
Phone/Fax: (913) 837-3214
Revision 2

Garmin International, Inc.
Model: GMN-01589
Test #: 170614
Test to: FCC Parts 2 and 87
File: GMN01589 TstRpt 170614 r2

SN: 4RR000042
FCC ID: IPH-0305600
Date: October 12, 2017
Page 36 of 36