

FDS

FCC/ISED Test Report

Client: Garmin International Inc.

EUT: 1200 E. 151st Street
Olathe, Kansas, 66062, USA

Product: A03346

Test Report No.: R20180716-20-03B

Approved By:




Nic S. Johnson, NCE
Technical Manager
iNARTE Certified EMC Engineer #EMC-003337-NE

Date: 12 December 2018

Total Pages: 27



The Nebraska Center for Excellence in Electronics (NCEE) authorizes the above named company to reproduce this report provided it is reproduced in its entirety for use by the company's employees only. Any use that a third party makes of this report, or any reliance on or decisions made based on it, are the responsibility of such third parties. NCEE accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report. This report applies only to the items tested.

	Report Number:	R20180716-20-03	Rev	B
	Prepared for:	Garmin		

Revision Page

Rev. No.	Date	Description
Original	11/26/2018	Original – Njohnson Prepared by KVepuri
A	12/5/2018	Added AC conducted emissions data, band edge measurements and note about RF absorber use. - NJ
B	12/12/2018	Data from channel 4 – 7 were removed as they will not be available in N. American models. Corrected 1 st harmonic to say 2 nd and 2 nd harmonic to say 3 rd . Corrected levels listed under the plots for bandedge measurements -NJ


	Report Number:	R20180716-20-03	Rev	B
	Prepared for:	Garmin		

Table of Contents


1	Summary of Test Results	4
1.1	Emissions Test Results	4
2	EUT Description	5
2.1	Equipment under Test (EUT).....	5
2.2	Laboratory Description	5
2.3	EUT Setup.....	5
3	Test Results	6
3.1	Fundamental Emissions	6
3.2	Bandedges	20
3.3	Conducted AC Mains Emissions	23
	Appendix A - Sample Calculation	25
	Annex B – Measurement Uncertainty	27

Tables

Table 1 - Emissions Test Results	4
Table 2 - Equipment under Test (EUT).....	5
Table 3 - Fundamental and Harmonic Emissions Data	7

Figures

Figure 1 - Analyzer Measurement – Fundamental, Channel 0	8
Figure 2 - Analyzer Measurement – Fundamental, Channel 1	9
Figure 3 - Analyzer Measurement – Fundamental, Channel 2	10
Figure 4 - Analyzer Measurement – Fundamental, Channel 3	11
Figure 5 - Analyzer Measurement – 2nd Harmonic, Channel 0.....	12
Figure 6 - Analyzer Measurement – 2nd Harmonic, Channel 1.....	13
Figure 7 - Analyzer Measurement – 2nd Harmonic, Channel 2.....	14
Figure 8 - Analyzer Measurement – 2nd Harmonic, Channel 3.....	15
Figure 9 - Analyzer Measurement – 3rd Harmonic, Channel 0	16
Figure 10 - Analyzer Measurement – 3rd Harmonic, Channel 1	17
Figure 11 - Analyzer Measurement – 3rd Harmonic, Channel 2	18
Figure 12 - Analyzer Measurement – 3rd Harmonic, Channel 3	19
Figure 13 - Conducted Emissions Plot.....	24

	Report Number:	R20180716-20-03	Rev	B
	Prepared for:	Garmin		

1 Summary of Test Results

1.1 Emissions Test Results


The EUT has been tested according to the following specifications:

- (1) US Code of Federal Regulations, Title 47, Part 15
- (2) ISED RSS-210, Issue 9

Testing was performance in accordance with the methods published in ANSI C63.10-2013

Table 1 - Emissions Test Results

Emissions Tests	Test Method and Limits	Result
Fundamental and Harmonic	FCC Part 15.245 RSS-210, Issue 9, Section F2	Complies

	Report Number:	R20180716-20-03	Rev	B
	Prepared for:	Garmin		

2 EUT Description

2.1 Equipment under Test (EUT)

Table 2 - Equipment under Test (EUT)

EUT	A03346
EUT Received	9/10/2018
EUT Tested	9/12/2018 - 11/26/2018 12/5/2018 (AC conducted emissions and band edge only)
Serial No.	3974983703
Operating Band	24 GHz
Device Type	Field Disturbance Sensor
Power Supply	YI Power Adapter (5 VDC output) MN: A8-501000 (Power supply used was a representative power supply only, unit doesn't ship with a power supply)

2.2 Laboratory Description

All testing was performed at the following Facility:

The Nebraska Center for Excellence in Electronics (NCEE Labs)
4740 Discovery Drive
Lincoln, NE 68521


A2LA Certificate Number: 1953.01
FCC Accredited Test Site Designation No: US1060
Industry Canada Test Site Registration No: 4294A-1
NCC CAB Identification No: US0177

Environmental conditions varied slightly throughout the tests:

Relative humidity of $32 \pm 4\%$
Temperature of $22 \pm 3^\circ$ Celsius

2.3 EUT Setup

The EUT was powered by 5 VDC unless specified and set to transmit continuously on the default frequency channel.

	Report Number:	R20180716-20-03	Rev	B
	Prepared for:	Garmin		

3 Test Results

3.1 Fundamental Emissions

Test: FCC Part 15.245; RSS-210, Issue 9, Section F2

Test Result: Complies Date: 11/21/2018- 11/26/2018

3.1.1 Test Description

Emissions measurements were made using a 26 GHz spectrum analyzer with an external mixer and horn antenna. Measurements were taken at a distance of 1 meter. The analyzer was set to a resolution bandwidth of 10 MHz and a video bandwidth of 10 MHz for the fundamental measurement. The resolution bandwidth was set to 1 MHz and video bandwidth set to 1 MHz for the harmonic measurement. The results were compared against the limits published in FCC Part 15.245

3.1.2 Test Results

No radiated emissions measurements were found in excess of the limits. Test result data can be seen below.

3.1.3 Test Environment

Testing was performed at the NCEE Labs Lincoln facility. Laboratory environmental conditions varied slightly throughout the test:

Relative humidity of $33 \pm 5\%$

Temperature of $22 \pm 2^\circ \text{C}$

3.1.4 Test Setup

For measurements from 24 – 100 GHz, RF absorber was not used. The antennas used were directional antennas and all measurements were performed line-of-sight. The measurements were performed at least 2 meters away from any other objects other than the non-conductive table and the test receiver. Reflections from the floor or any other surface were not a significant factor in the measurements. See Section 2.3 for further details.


3.1.5 Test Equipment Used

Serial No.	Manufacturer	Model	Description	Last Cal.	Calibration due
2576	ETS	3116	Horn Antenna	31 Jan 2018	31 Jan 2020
100037	Rhode & Schwarz	ESI26*	EMI Test Receiver	30 Jan 2018	30 Jan 2020
8077	Pasternack	PE13U1002	Mixer	28 Jan 2017	28 Jan 2019
32/2016	Pasternack	PE9881-24	Horn Antenna	CNR**	CNR**
1823	Pasternack	SMW22AC001-24F	Mixer	13 Aug 2018	13 Aug 2020
Ncee1	Pasternack	SH122-23	Horn Antenna	CNR**	CNR**
1618	Pasternack	PE-W15CA001	WR-19 to WR-28 adapter	28 Jan 2017	28 Jan 2019

*Note: spectrum analyzer included a firmware upgrade and internal local oscillator output upgrade for measurements above 26.5 GHz. Rohde and Schwarz F/W version 4.32.

**Calibration Not Required, internal verification

***Calibration not required, standard gain horn antenna.

	Report Number:	R20180716-20-03	Rev	B
	Prepared for:	Garmin		

All mixers and pre-amplifiers were calibrated with associated cables.

3.1.6 Test Pictures and/or Figures

Table 3 - Fundamental and Harmonic Emissions Data
Measurements made at 1m. Limits extrapolated to 1 meter using 20dB/dec

Channel	Frequency (f)	Level (E)	Fundamental Limit	Harmonic Limit	Margin
	GHz	dBmV/m	dBmV/m	dBmV/m	dB
0	24.09	49.25	77.5	-	28.25
1	24.11	49.51	77.5	-	27.99
2	24.13	50.50	77.5	-	27.00
3	24.15	50.26	77.5	-	27.24
0	48.16	24.02*	-	37.5	13.48
1	48.21	23.53*	-	37.5	13.97
2	48.25	23.62*	-	37.5	13.88
3	48.29	23.14*	-	37.5	14.36
0	72.27	32.37*	-	37.5	5.13
1	72.33	32.61*	-	37.5	4.89
2	72.39	33.02*	-	37.5	4.48
3	72.45	33.06*	-	37.5	4.44

Sample measurements and antenna, cable factors used

Fundamental limit: 2500 mV/m at 3 meters = 67.96 dBmV/m = 77.50 dBmV/m at 1 meter.
Level Measurement: 5.73 dBmV/m + 46.01 dB corrections = 51.74dBmV/m.


Cable 0.50 dB
Antenna 45.51 dB

Harmonic limit: 25 mV/m at 3 meters = 27.95 dBmV/m = 37.50 dBmV/m at 1 meter.
Harmonic Measurement: -17.24 dBmV/m + 41.26 dB corrections = 24.02 dBmV/m.

Mixer 0.40 dB
Antenna factor 40.86 dB/m (standard gain horn, gain = 23 dBi)

Harmonic limit: 25 mV/m at 3 meters = 27.95 dBmV/m = 37.50 dBmV/m at 1 meter.
Harmonic Measurement: -18.69 dBmV/m + 51.06 dB corrections = 32.37 dBmV/m.

Mixer 7.0 dB at 72.00 GHz
WR-19 to WR-28 waveguide transition 0.55 dB
Antenna factor 43.51 dB/m (standard gain horn, gain = 24 dBi)

	Report Number:	R20180716-20-03	Rev	B
	Prepared for:	Garmin		

*Measurement was in the system noise floor

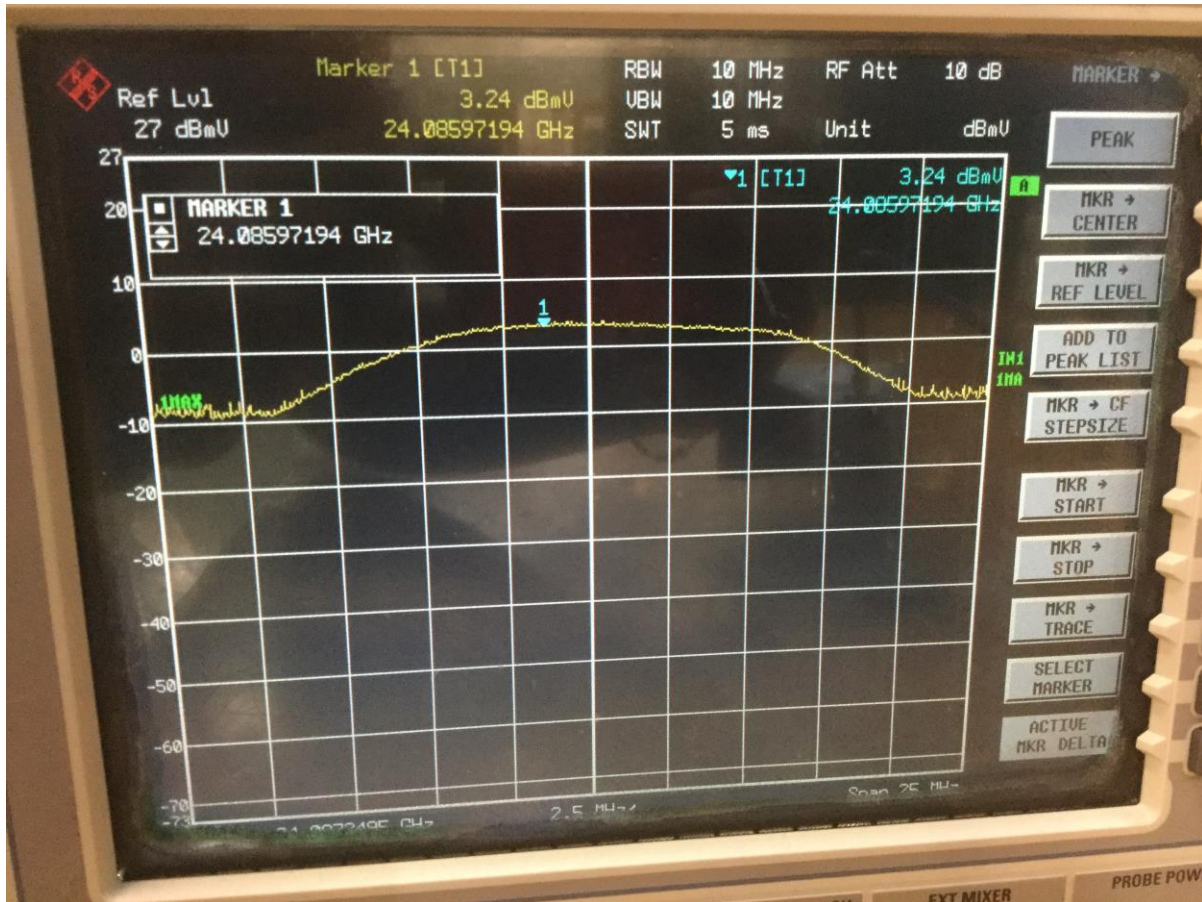



Figure 1 - Analyzer Measurement – Fundamental, Channel 0

Uncorrected measurement as recorded on spectrum analyzer

	Report Number:	R20180716-20-03	Rev	B
	Prepared for:	Garmin		

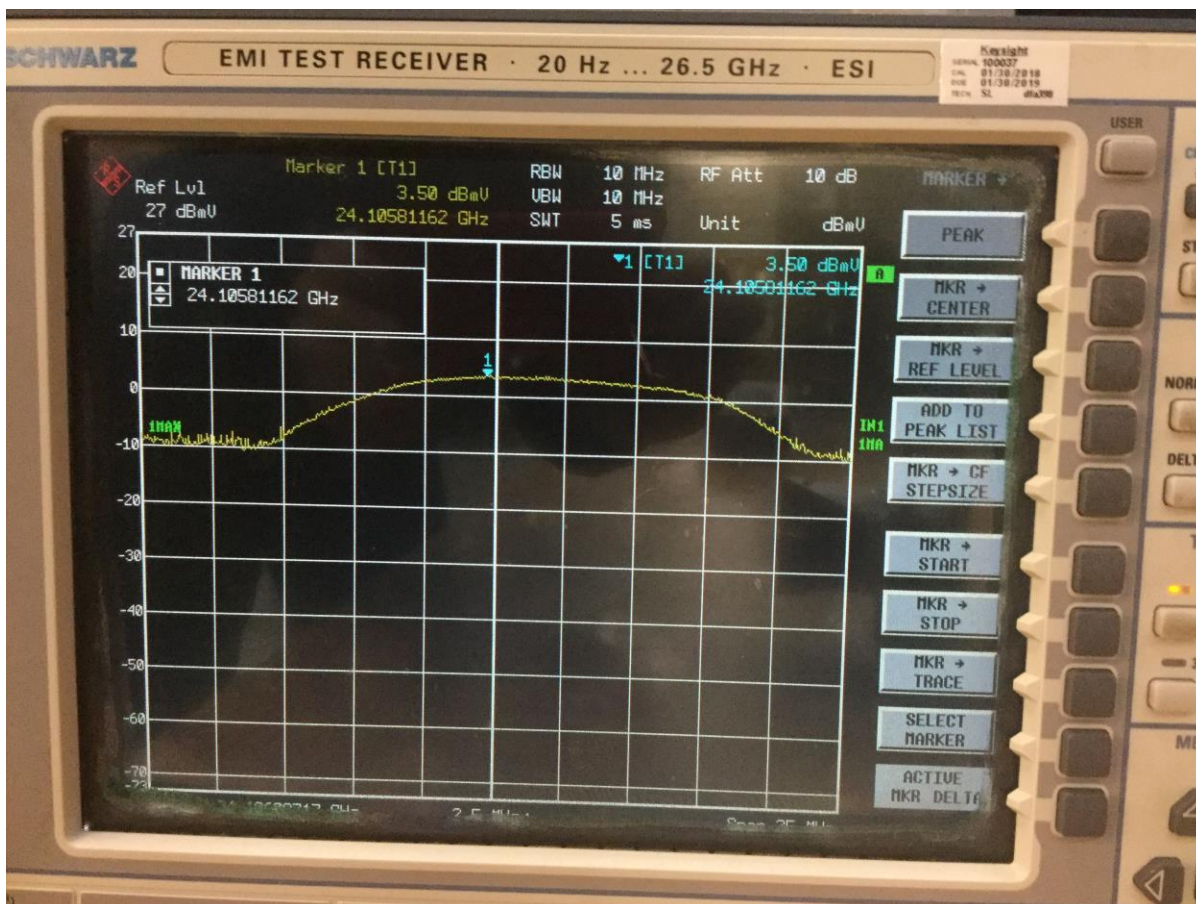


Figure 2 - Analyzer Measurement – Fundamental, Channel 1

Uncorrected measurement as recorded on spectrum analyzer

Report Number:	R20180716-20-03	Rev	B
Prepared for:	Garmin		

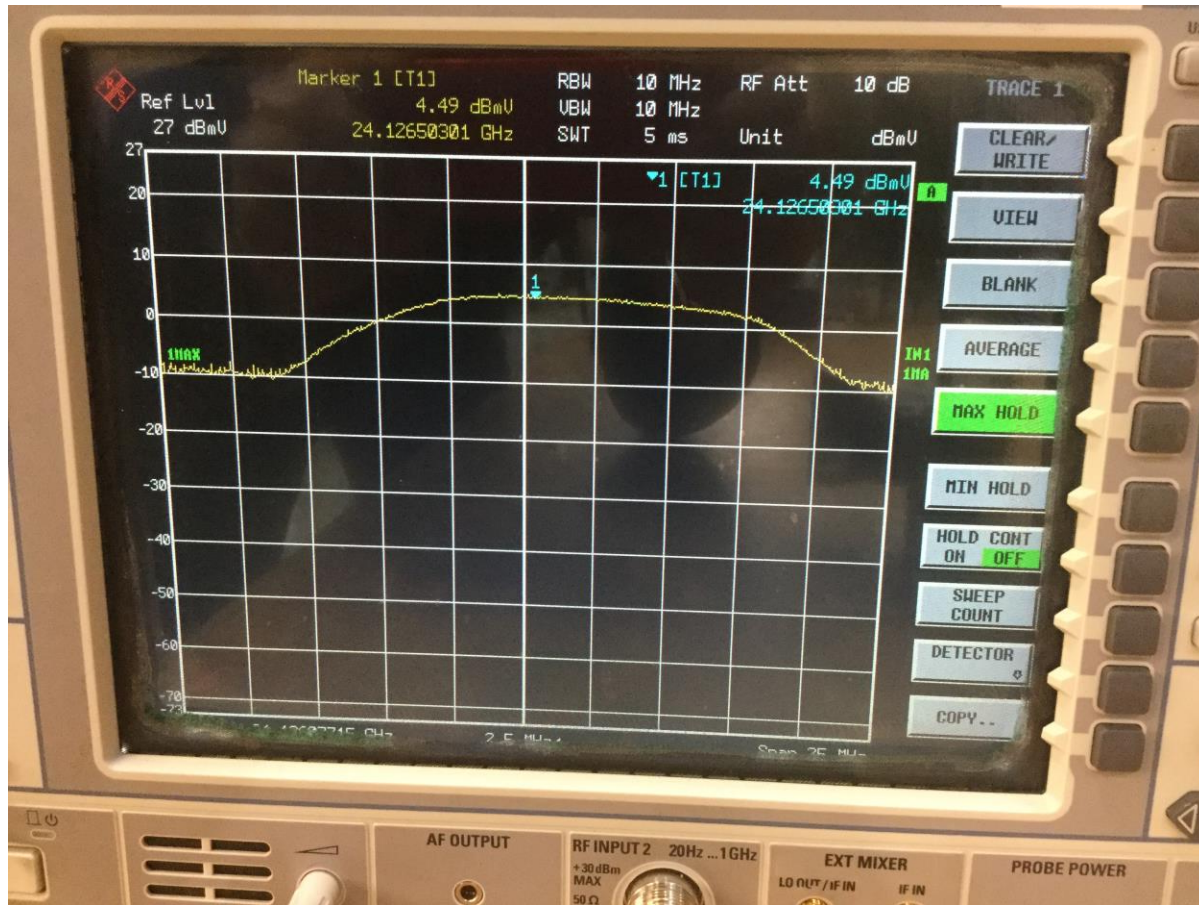



Figure 3 - Analyzer Measurement – Fundamental, Channel 2

Uncorrected measurement as recorded on spectrum analyzer

	Report Number:	R20180716-20-03	Rev	B
	Prepared for:	Garmin		

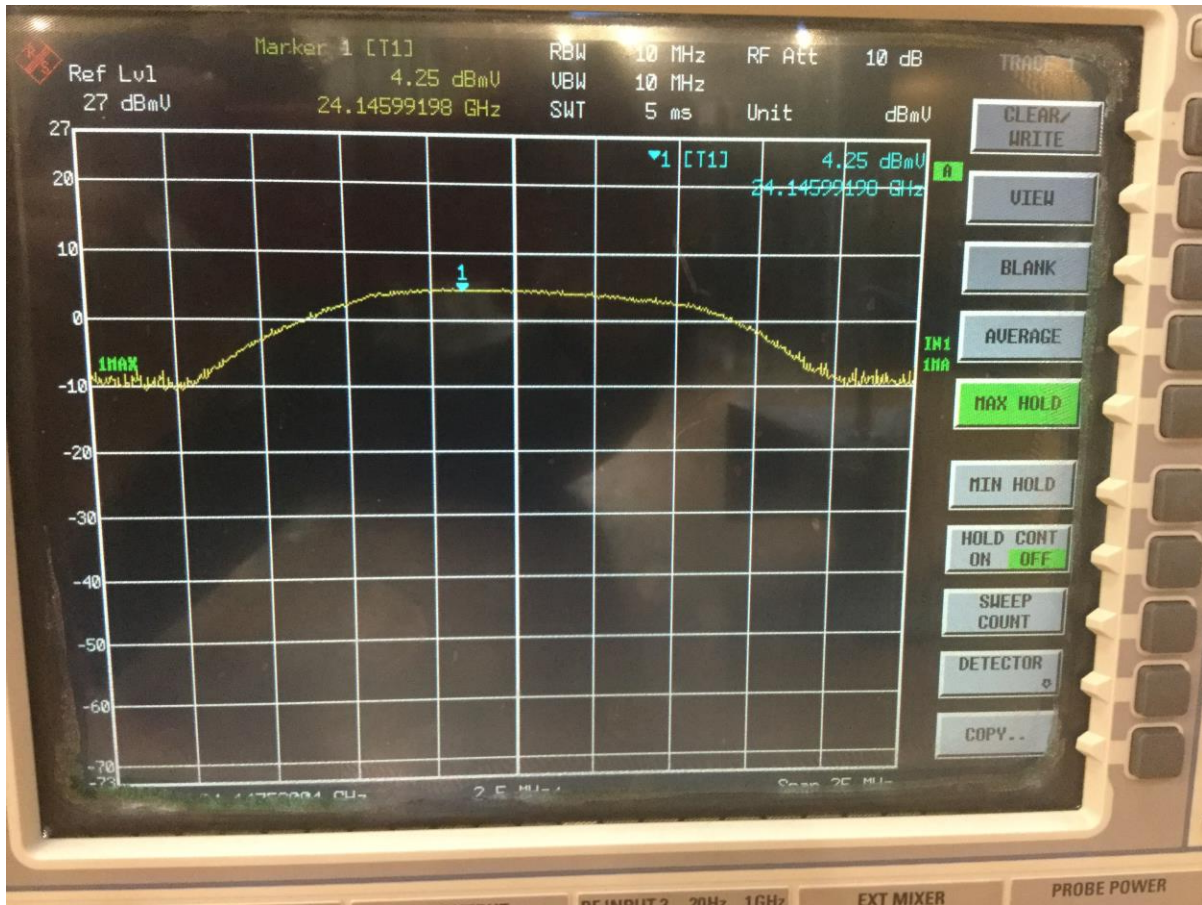



Figure 4 - Analyzer Measurement – Fundamental, Channel 3

Uncorrected measurement as recorded on spectrum analyzer

	Report Number:	R20180716-20-03	Rev	B
	Prepared for:	Garmin		

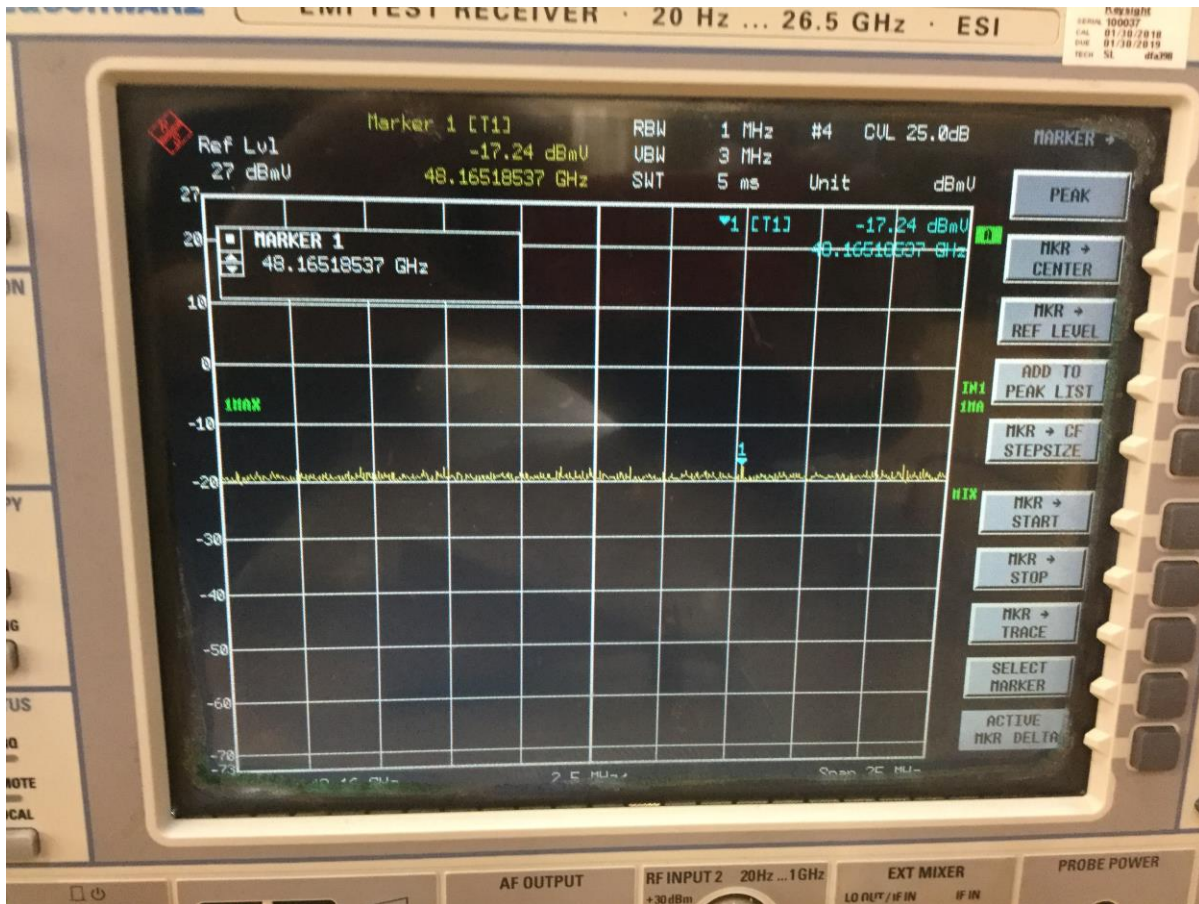



Figure 5 - Analyzer Measurement – 2nd Harmonic, Channel 0

Uncorrected measurement as recorded on spectrum analyzer

	Report Number:	R20180716-20-03	Rev	B
	Prepared for:	Garmin		

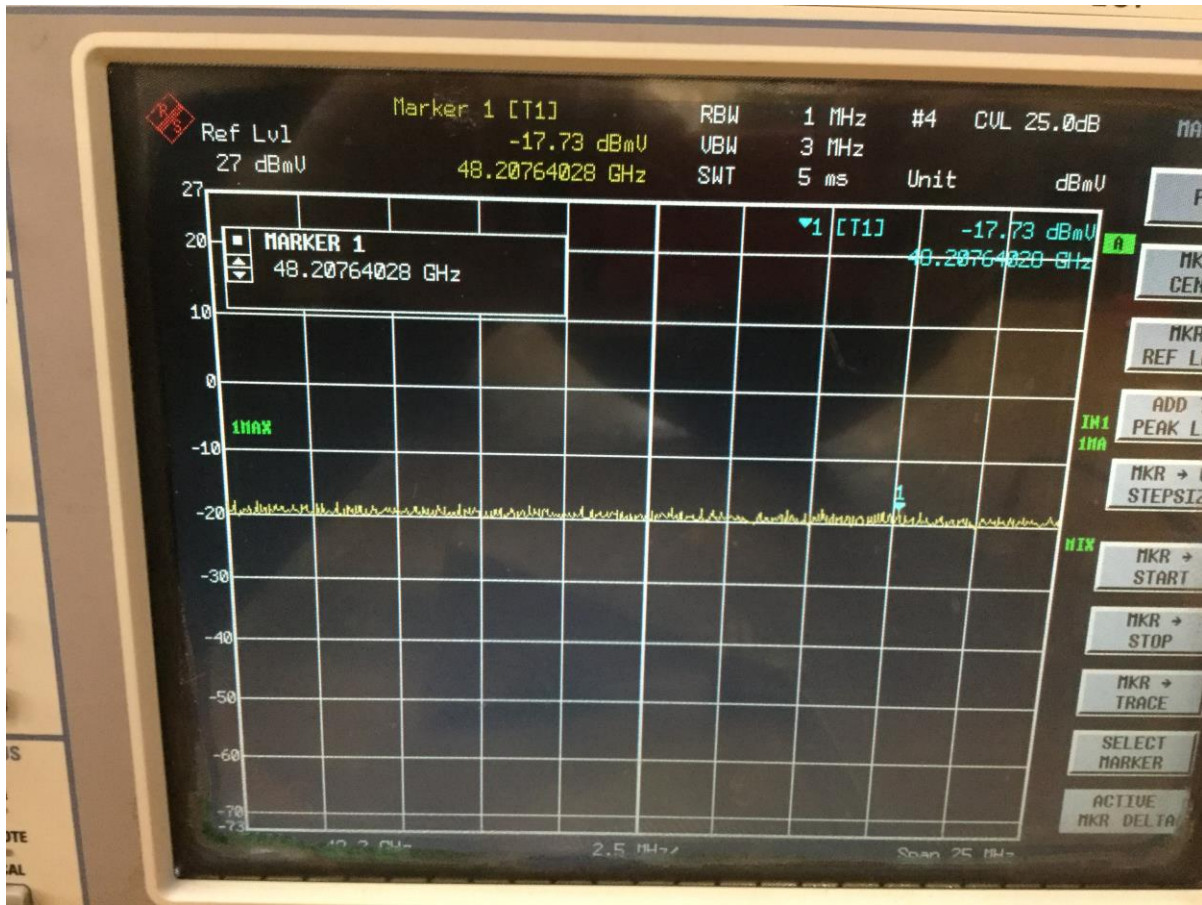


Figure 6 - Analyzer Measurement – 2nd Harmonic, Channel 1

Uncorrected measurement as recorded on spectrum analyzer



	Report Number:	R20180716-20-03	Rev	B
	Prepared for:	Garmin		



Figure 7 - Analyzer Measurement – 2nd Harmonic, Channel 2

Uncorrected measurement as recorded on spectrum analyzer

	Report Number:	R20180716-20-03	Rev	B
	Prepared for:	Garmin		

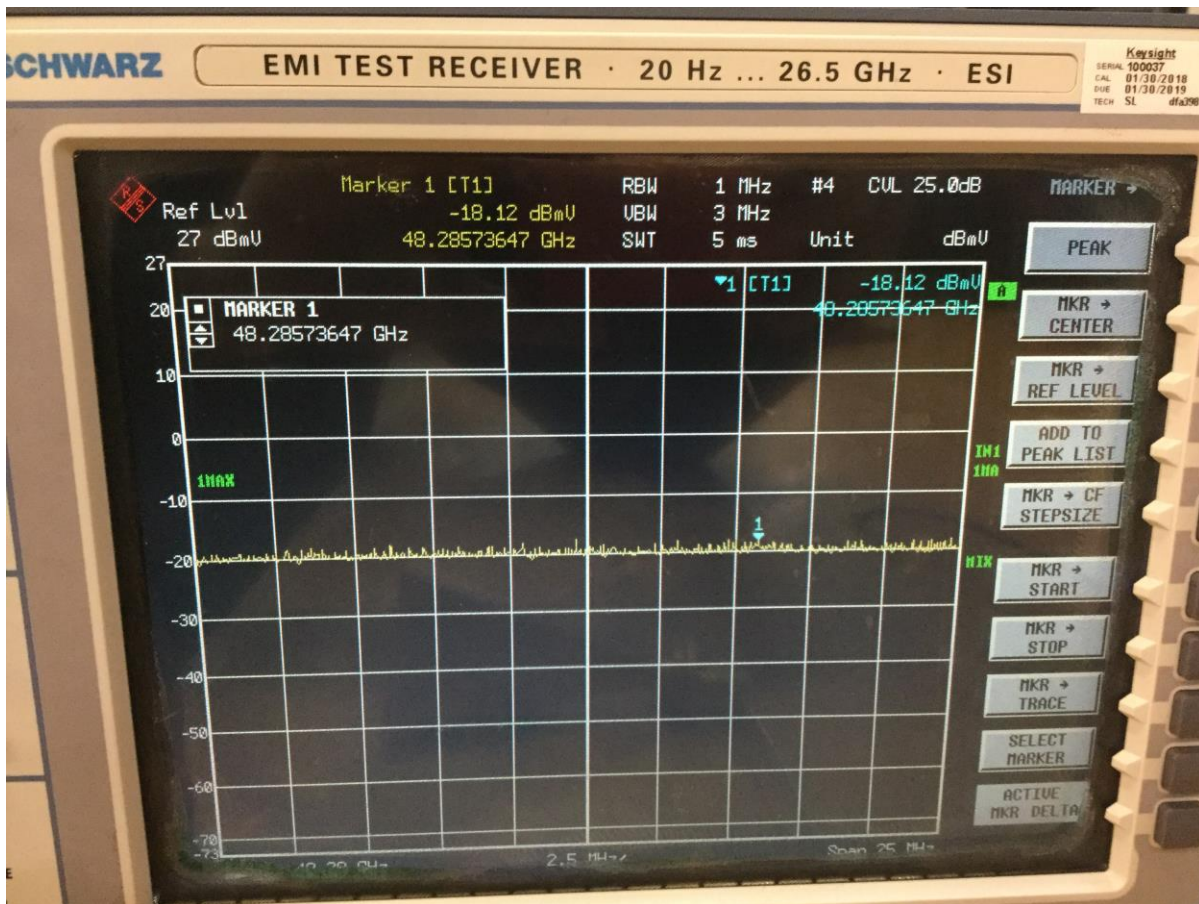



Figure 8 - Analyzer Measurement – 2nd Harmonic, Channel 3

Uncorrected measurement as recorded on spectrum analyzer

	Report Number:	R20180716-20-03	Rev	B
	Prepared for:	Garmin		

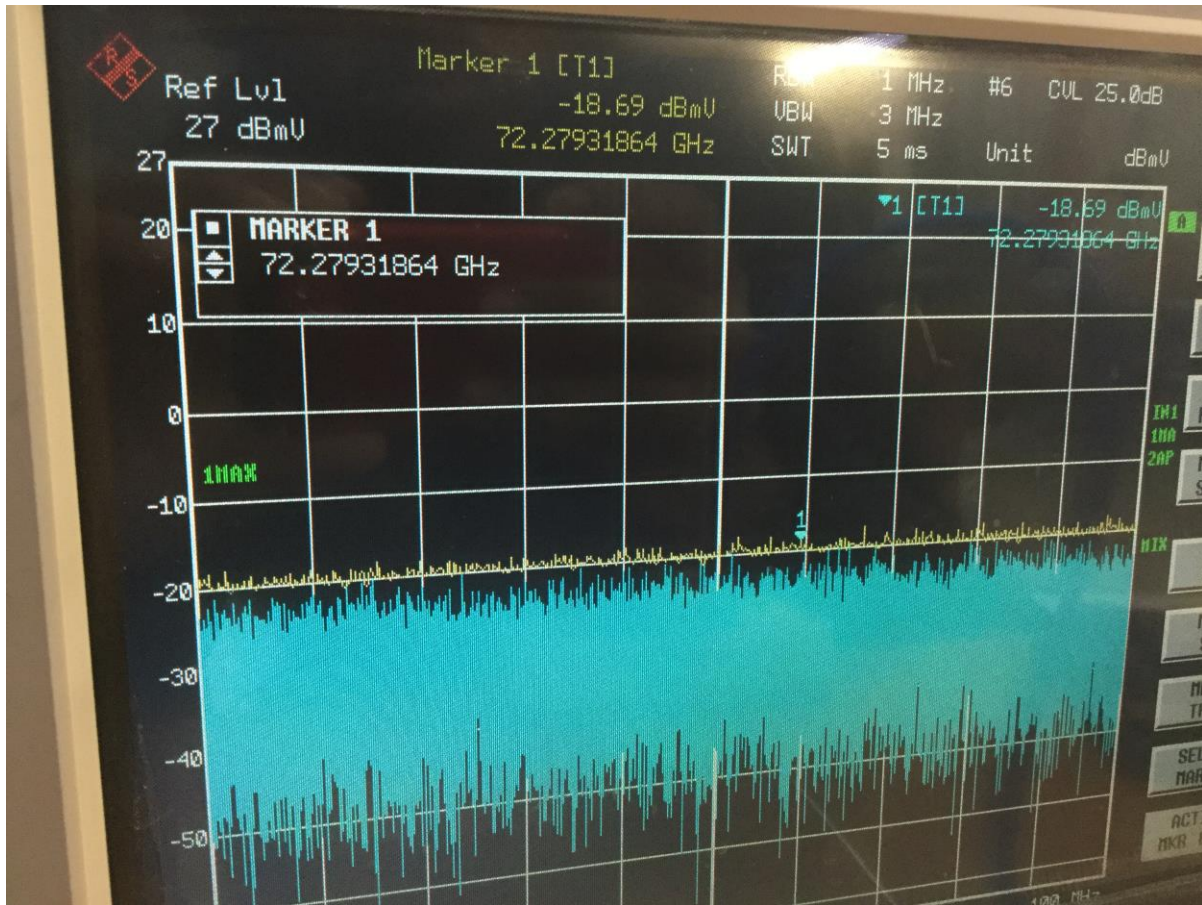


Figure 9 - Analyzer Measurement – 3rd Harmonic, Channel 0

Uncorrected measurement as recorded on spectrum analyzer

Report Number:	R20180716-20-03	Rev	B
Prepared for:	Garmin		

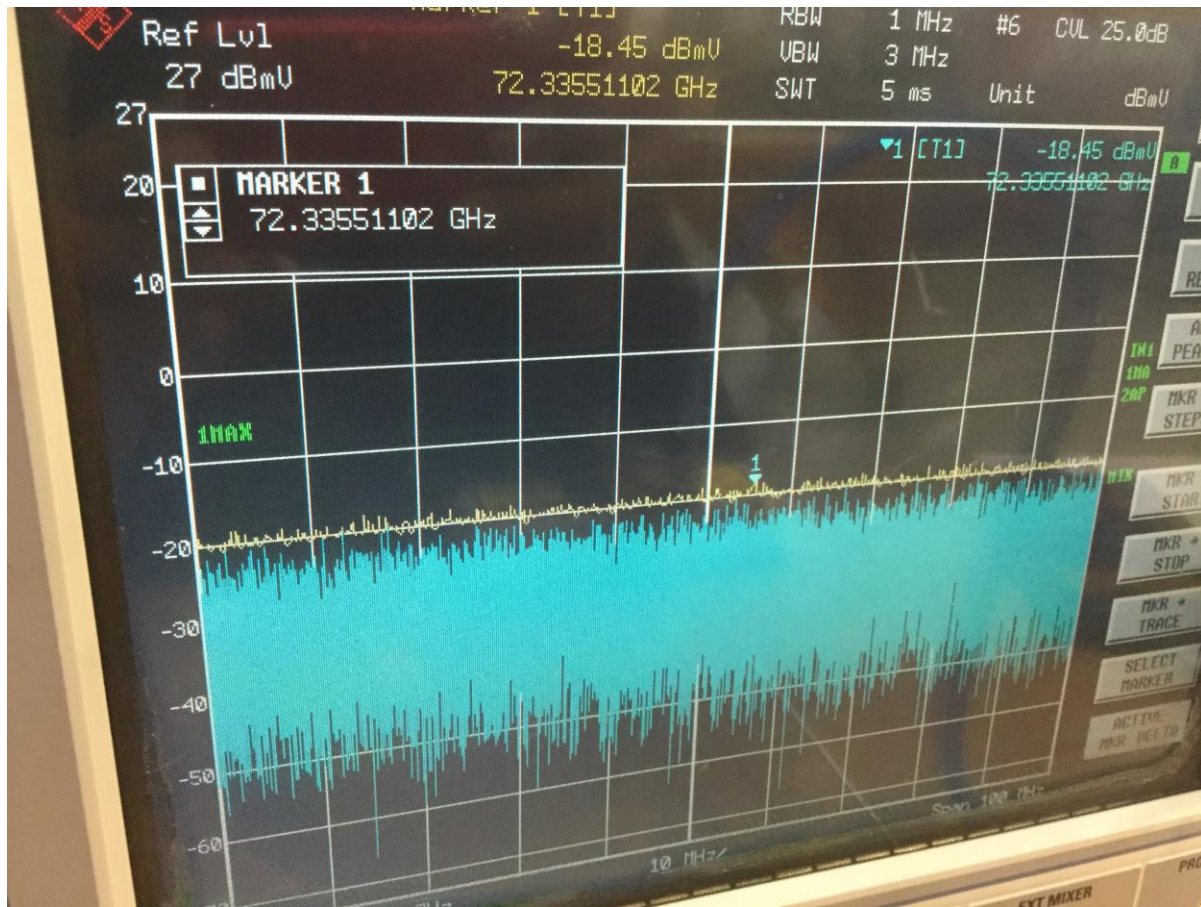


Figure 10 - Analyzer Measurement – 3rd Harmonic, Channel 1

Uncorrected measurement as recorded on spectrum analyzer

Report Number:	R20180716-20-03	Rev	B
Prepared for:	Garmin		

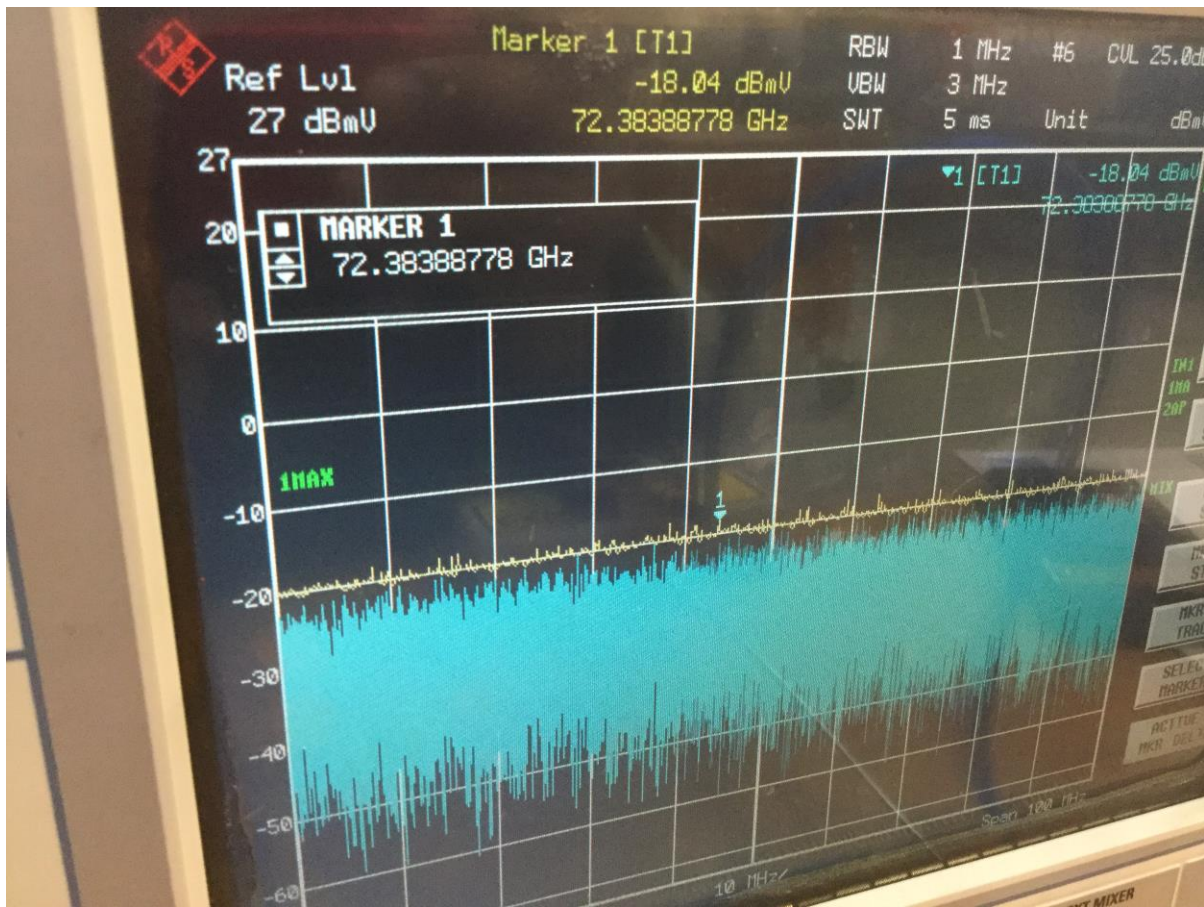


Figure 11 - Analyzer Measurement – 3rd Harmonic, Channel 2

Uncorrected measurement as recorded on spectrum analyzer

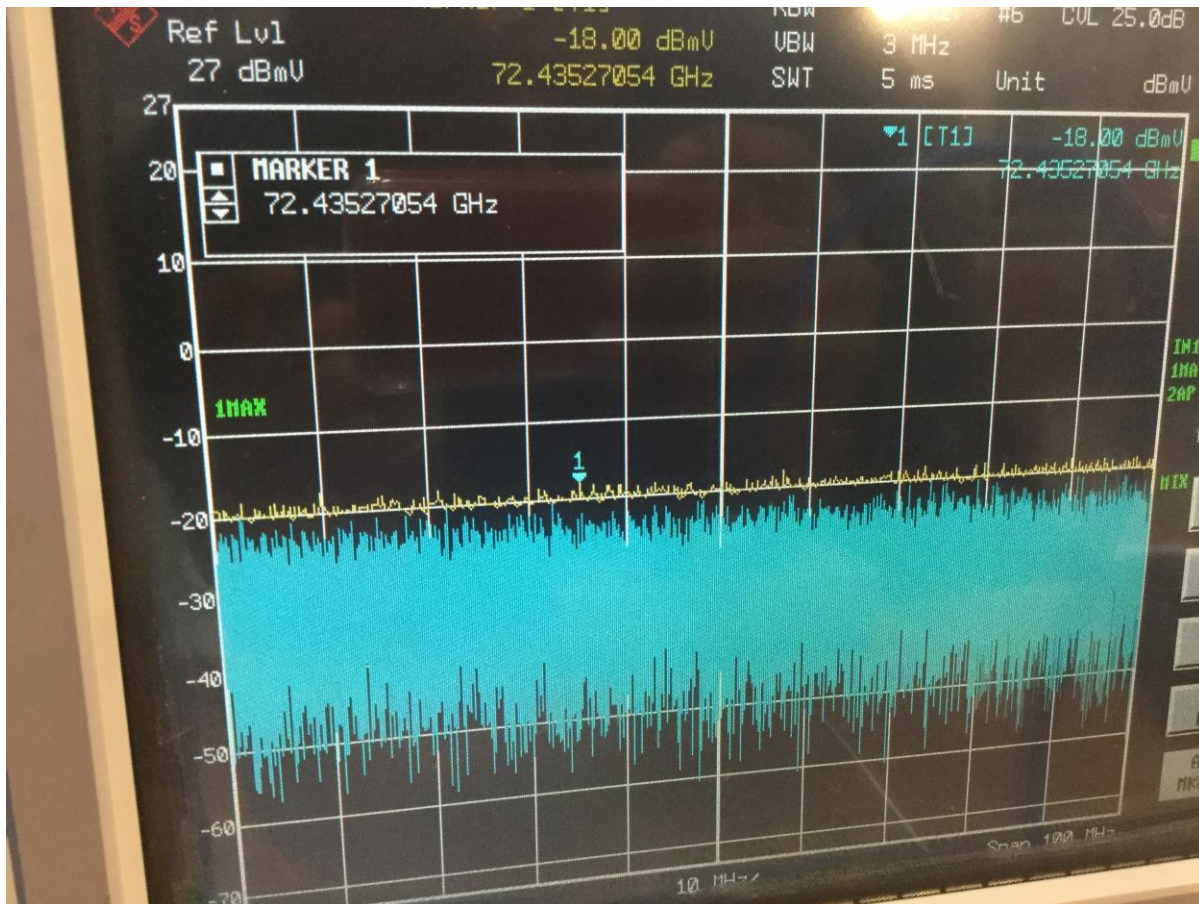



Figure 12 - Analyzer Measurement – 3rd Harmonic, Channel 3

Uncorrected measurement as recorded on spectrum analyzer

	Report Number:	R20180716-20-03	Rev	B
	Prepared for:	Garmin		

3.2 Bandedges

Test Method: ANSI C63.10-2013, Section(s) 6.10.6

Limits of bandedge measurements:

For emissions outside of the allowed band of operation, the emission level needs to be 20dB under the maximum fundamental field strength. However, if the emissions fall within one of the restricted bands from 15.205 the field strength levels need to be under that of the limits in 15.209.

Test procedures:

The EUT was oriented as to produce the maximum emission levels. The resolution bandwidth was set to 100kHz and the EMI receiver was used to scan from the bandedge to the fundamental frequency with a quasi-peak detector. The highest emissions level beyond the bandedge was measured and recorded. All band edge measurements were evaluated to the general limits in Part 15.209.

Measurements were performed as radiated measurements in the same manner as Section 3.1 of this report.

Deviations from test standard:

No deviation.

Test setup:

All the measurements were done at 3m test distance while an operator was trying to activate the hopping sequence manually.


EUT operating conditions:

The EUT was powered by 5 VDC unless specified and set to transmit continuously on the lowest frequency channel, and the highest frequency channel.



Report Number:	R20180716-20-03	Rev	B
Prepared for:	Garmin		

Test results:

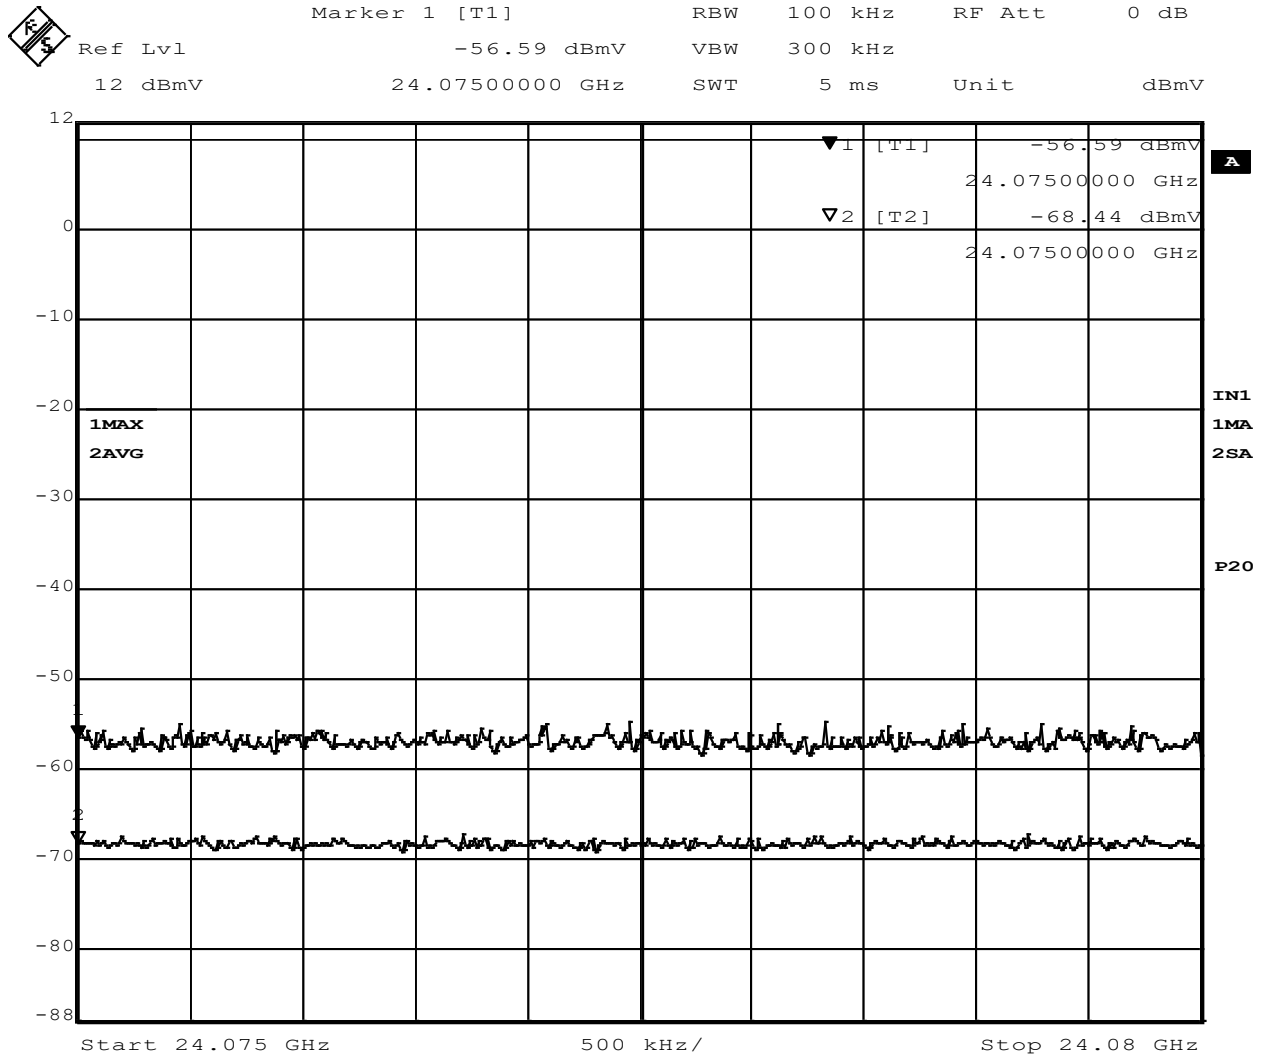

Date: 5.DEC.2018 17:11:58

Peak Level Measurement: $-56.59 \text{ dBmV/m} + 66.01 \text{ dB corrections} = 9.42 \text{ dBmV/m}$

Peak Limit = $74 \text{ dB}\mu\text{V/m at } 3\text{m} = 84 \text{ dB}\mu\text{V/m at } 1\text{m} = 24 \text{ dBmV/m at } 1\text{m}$

Avg Level Measurement: $-68.44 \text{ dBmV/m} + 66.01 \text{ dB corrections} = -2.43 \text{ dBmV/m}$


Avg Limit = $54 \text{ dB}\mu\text{V/m at } 3\text{m} = 64 \text{ dB}\mu\text{V/m at } 1\text{m} = 4 \text{ dBmV/m at } 1\text{m}$

Average performed with a trace average over 100 traces and sample detector

Cable	0.50 dB
Antenna	45.51 dB
100 kHz to 1MHz BW correction	20 dB



Report Number:	R20180716-20-03	Rev	B
Prepared for:	Garmin		

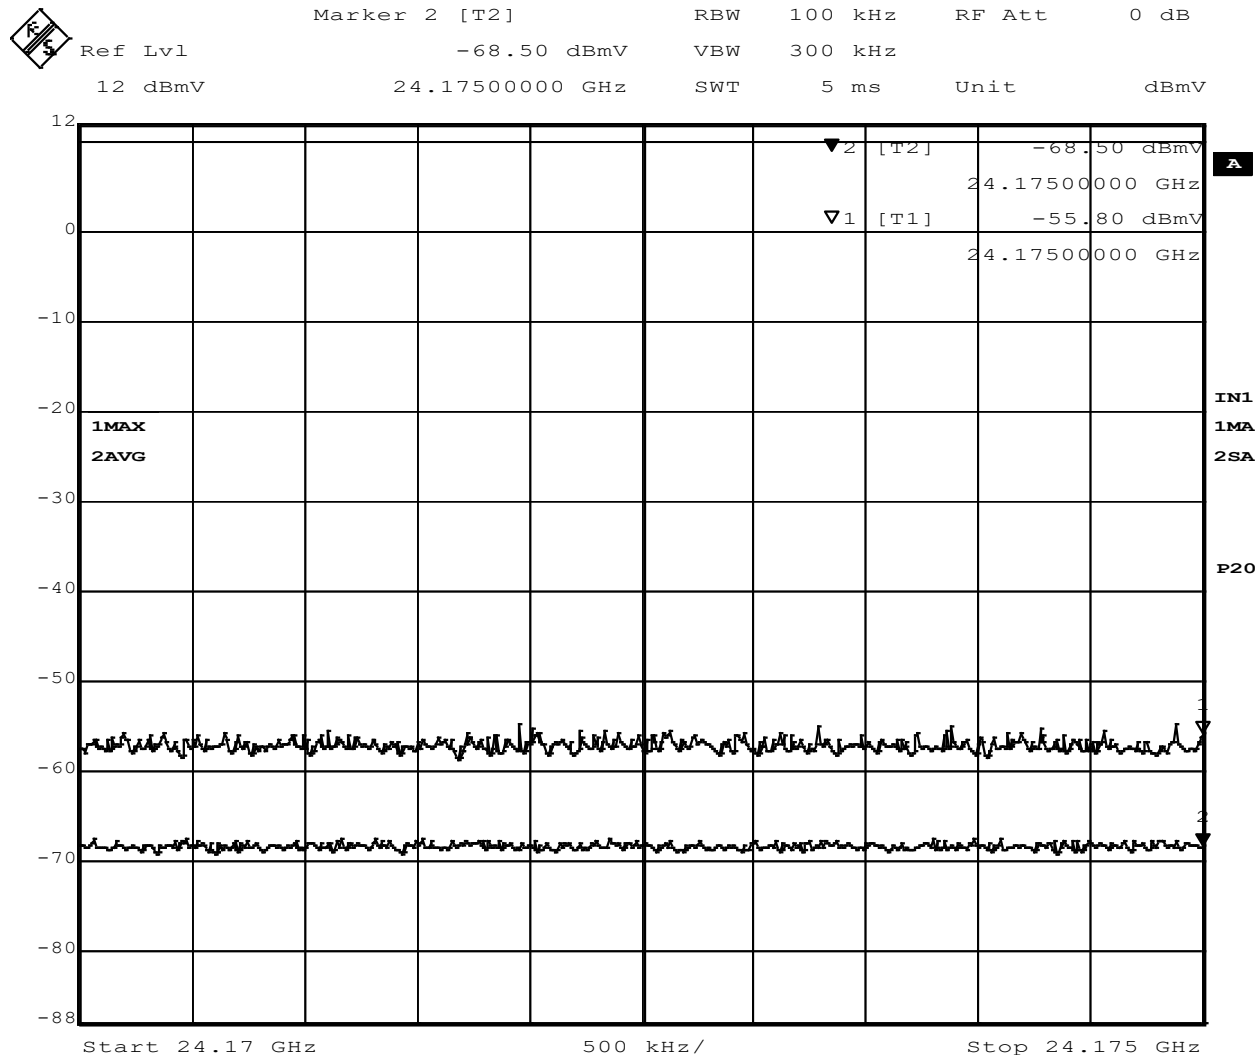


Date: 5.DEC.2018 17:09:44

Peak Level Measurement: -55.80 dBmV/m + 66.01 dB corrections = 10.21 dBmV/m
Peak Limit = 74 dBμV/m at 3m = 84 dBμV/m at 1m = 24 dBmV/m at 1m

Avg Level Measurement: -68.50 dBmV/m + 66.01 dB corrections = -2.49 dBmV/m
Avg Limit = 54 dBμV/m at 3m = 64 dBμV/m at 1m = 4 dBmV/m at 1m

Average performed with a trace average over 100 traces and sample detector

Cable	0.50 dB
Antenna	45.51 dB
100 kHz to 1MHz BW correction	20 dB

	Report Number:	R20180716-20-03	Rev	B
	Prepared for:	Garmin		

3.3 Conducted AC Mains Emissions

Test Method: ANSI C63.10-2013, Section(s) 6.2

Limits for conducted emissions measurements:

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

Notes:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

Test Procedures:

- a. The EUT was placed 0.8m above a ground reference plane and 0.4 meters from the conducting wall of a shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). The LISN provides 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference as well as the ground.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits are not reported.
- d. Results were compared to the 15.207 limits.

Deviation from the test standard:

No deviation

EUT operating conditions:

The EUT was powered by 5 VDC unless specified and set to transmit continuously on the middle channel.

Power Supply: YI Power Adapter (5 VDC output)
MN: A8-501000 (Power supply used was a representative power supply only, unit doesn't ship with a power supply)

The EUT does not ship with a power supply so a representative off-the-shelf power supply was used.

Test Results:

Report Number:	R20180716-20-03	Rev	B
Prepared for:	Garmin		

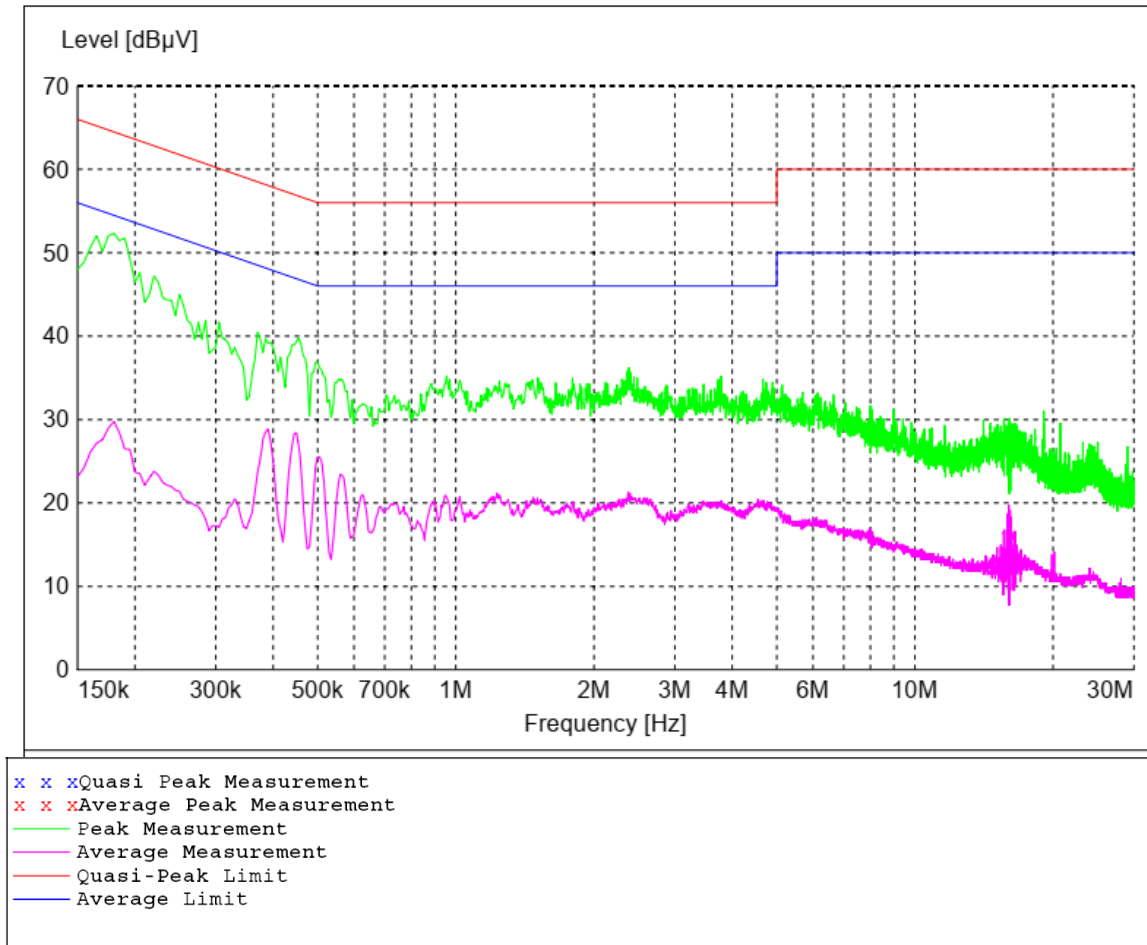


Figure 13 - Conducted Emissions Plot

All Measurements were found to be at least 10 dB below the limits.
The plot shows the composite maximum value of both the line and neutral conductors. It shows the worse-case at each frequency.



Report Number:	R20180716-20-03	Rev	B
Prepared for:	Garmin		

Appendix A - Sample Calculation

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF - (-CF + AG) + AV$$

where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

AG = Amplifier Gain

AV = Averaging Factor (if applicable)


Assume a receiver reading of 55 dB μ V is obtained. The Antenna Factor of 12 and a Cable Factor of 1.1 is added. The Amplifier Gain of 20 dB is subtracted, giving a field strength of 48.1 dB μ V/m.

$$FS = 55 + 12 - (-1.1 + 20) + 0 = 48.1 \text{ dB}\mu\text{V/m}$$

The 48.1 dB μ V/m value can be mathematically converted to its corresponding level in μ V/m.

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(48.1 \text{ dB}\mu\text{V/m})/20] = 254.1 \mu\text{V/m}$$

AV is calculated by the taking the $20 \cdot \log(T_{on}/100)$ where T_{on} is the maximum transmission time in any 100ms window.

	Report Number:	R20180716-20-03	Rev	B
	Prepared for:	Garmin		

EIRP Calculations

In cases where direct antenna port measurement is not possible or would be inaccurate, output power is measured in EIRP. The maximum field strength is measured at a specified distance and the EIRP is calculated using the following equation;

$$EIRP (Watts) = [Field Strength (V/m) \times antenna distance (m)]^2 / [30 \times Gain (numeric)]$$

$$Power (watts) = 10^{[Power (dBm)/10]} \times 1000$$

$$Field Strength (dB\mu V/m) = Field Strength (dBm) = 107 \text{ (for } 50\Omega \text{ measurement systems)}$$

$$Field Strength (V/m) = 10^{[Field Strength (dB\mu V/m) / 20]} / 10^6$$


$$Gain = 1 \text{ (numeric gain for isotropic radiator)}$$

Conversion from 3m field strength to EIRP (d=3):

$$EIRP = (FS \times d^2)/30 = FS [(d^2)/30] = FS [0.3]$$

$$EIRP(dBm) = FS(dB\mu V/m) - 10(\log 10^9) + 10\log[0.3] = -95.23$$

10log(10^9) is the conversion from micro to milli

	Report Number:	R20180716-20-03	Rev	B
	Prepared for:	Garmin		

Annex B – Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been for tests performed in this test report:

Test	Frequency Range	Uncertainty Value (dB)
Radiated Emissions, 3m	30MHz - 1GHz	3.82
Radiated Emissions, 3m	1GHz - 18GHz	4.44
Emissions limits, conducted	150kHz – 18GHz	±3.30 dB

Expanded uncertainty values are calculated to a confidence level of 95%.

CISPR 16-4-2:2011 was used to calculate the above values.