



Engineering Solutions & Electromagnetic Compatibility Services

**Certification Application Report
FCC Part 15.247 & Industry Canada RSS-247**

Test Lab: Rhein Tech Laboratories, Inc. Phone: 703-689-0368 360 Herndon Parkway Fax: 703-689-2056 Suite 1400 www.rheintech.com Herndon, VA 20170 E-Mail: atcbinfo@rheintech.com		Applicant: Garmin International Inc. Phone: 913-440-5471 1200 E. 151 st St. Olathe, Kansas 66062 Contact: William Pertner	
FCC/IC ID	IPH-03436 1792A-03436	Test Report Date	April 16, 2018
Platform	N/A	RTL Work Order #	2017240
Model/HVIN	A03436	RTL Quote #	QRRTL17-240A
American National Standard Institute:	ANSI C63.10-2013 American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices		
FCC Classification:	DTS – Part 15 Digital Transmission System (Wi-Fi, ANT+, BLE portion)		
	DSS - Part 15 Spread Spectrum Transmitter		
FCC Rule Part(s):	Part 15.247: Operation within the bands 920-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz (10/01/17)		
Industry Canada:	RSS-247 Issue 2: Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices RSS-Gen Issue 4: General Requirements for Compliance of Radio Apparatus		
Digital Interface Information	Digital Interface was found to be compliant		
Frequency Range (MHz)	Output Power (W)	Frequency Tolerance	Emission Designator
2412-2462 (Wi-Fi)	0.219	N/A	17M8F1D
2402-2480 (Bluetooth)	0.006	N/A	989KF1D
2402-2480 (ANT+)	0.012	N/A	1M01F1D
2402-2480 (BLE)	0.010	N/A	1M13F1D

I, the undersigned, hereby declare that the equipment tested and referenced in this report conforms to the identified standard(s) as described in this test report. No modifications were made to the equipment during testing in order to achieve compliance with these standards. Furthermore, there was no deviation from, additions to, or exclusions from, the applicable parts of FCC Part 2, FCC Part 15, ANSI C63.10, and Industry Canada RSS-247 and RSS-Gen.

Signature: 

Date: April 16, 2018

Typed/Printed Name: Desmond A. Fraser

Position: President

*These tests are accredited and meet the requirements of ISO/IEC 17025 as verified by ANAB.
Refer to certificate and scope of accreditation AT-1445.*

This report may not be reproduced, except in full, without the written approval of Rhein Tech Laboratories, Inc. and Garmin International Inc. The test results relate only to the item(s) tested.

Table of Contents

1	General Information.....	7
1.1	Scope	7
1.2	Description of EUT.....	7
1.3	Test Facility.....	7
1.4	Related Submittal(s)/Grant(s).....	7
1.5	Modifications.....	7
2	Test Information	8
2.1	Description of Test Modes.....	8
2.2	Exercising the EUT	8
2.3	Test Result Summary.....	9
2.4	Test System Details.....	9
2.5	Configuration of Tested System	9
3	Peak Output Power – FCC 15.247(b); RSS-247 5.4.....	10
3.1	Power Output Test Procedure	10
3.2	Power Output Test Data.....	10
4	Compliance with the Band Edge – FCC 15.247(d); RSS-247 2.2	12
4.1	Band Edge Test Procedure	12
4.2	Restricted Band Edge Test Results	12
4.2.1	Lower Band Edge.....	12
4.2.2	Upper Band Edge.....	19
5	Antenna Conducted Spurious Emissions – FCC 15.247(d); RSS-Gen.....	26
5.1	Antenna Conducted Spurious Emissions Test Procedures	26
5.2	Antenna Conducted Spurious Emissions Test Results.....	26
6	20 dB Bandwidth – FCC 15.247(a)(1); RSS-247 5.1	27
6.1	20 dB Bandwidth Test Procedure	27
6.2	20 dB Bandwidth Test Data.....	27
7	6 dB Bandwidth – FCC 15.247(a)(2); RSS-247 5.2	30
7.1	6 dB Bandwidth Test Procedure – Minimum 6 dB Bandwidth.....	30
7.2	6 dB Bandwidth Test Results	30
8	Power Spectral Density – FCC 15.247(e); RSS-247 5.2(b).....	43
8.1	Power Spectral Density Test Procedure	43
8.2	Power Spectral Density Test Data.....	43
9	Hopping Characteristics – FCC 15.247(a)(1); RSS-247 5.1.....	56
10	Radiated Emissions – FCC 15.209; RSS-247 6.2 and RSS-Gen.....	59
10.1	Limits of Radiated Emissions Measurement	59
10.2	Radiated Emissions Measurement Test Procedure	59
10.3	Radiated Emissions Test Results	60
11	Conclusion	71

Figure Index

Figure 2-1: Configuration of System Under Test9

Table Index

Table 2-1: Channels Tested for Wi-Fi – 802.11b (11 Mbps); 802.11g (54 Mbps); 802.11n (65 Mbps) 8
 Table 2-2: Channels Tested for ANT+ 8
 Table 2-3: Channels Tested for BLE 8
 Table 2-4: Channels Tested for Bluetooth..... 8
 Table 2-5: Test Result Summary – FCC Part 15, Subpart C (Section 15.247) 9
 Table 2-6: Equipment Under Test 9
 Table 3-1: Power Output Test Equipment 10
 Table 3-2: Power Output Test Data – Bluetooth 10
 Table 3-3: Power Output Test Data – ANT+ 10
 Table 3-4: Power Output Test Data – BLE 10
 Table 3-5: Power Output Test Data – 802.11b (11 Mbps) 10
 Table 3-6: Power Output Test Data – 802.11g (54 Mbps) 11
 Table 3-7: Power Output Test Data – 802.11n (65 Mbps) 11
 Table 4-1: Band Edge Test Equipment 25
 Table 5-1: Antenna Conducted Spurious Test Equipment 26
 Table 6-1: 20 dB Bandwidth Test Data – Bluetooth 27
 Table 6-2: 20 dB Bandwidth Test Equipment 29
 Table 7-1: 6 dB Bandwidth Test Data – ANT+ 30
 Table 7-2: 6 dB Bandwidth Test Data – BLE PRB29 30
 Table 7-3: 6 dB Bandwidth Test Data – BLE 0x0F 30
 Table 7-4: 6 dB Bandwidth Test Data – BLE 0x55 30
 Table 7-5: 6 dB Bandwidth Test Data – 802.11b (11 Mbps) 30
 Table 7-6: 6 dB Bandwidth Test Data – 802.11g (54 Mbps) 31
 Table 7-7: 6 dB Bandwidth Test Data – 802.11n (65 Mbps) 31
 Table 7-8: 6 dB Bandwidth Test Equipment 42
 Table 8-1: Power Spectral Density Test Data – ANT+ 43
 Table 8-2: Power Spectral Density Test Data – BLE PRB29 43
 Table 8-3: Power Spectral Density Test Data – BLE 0x0F 43
 Table 8-4: Power Spectral Density Test Data – BLE 0x55 43
 Table 8-5: Power Spectral Density Test Data – 802.11b (11 Mbps) 43
 Table 8-6: Power Spectral Density Test Data – 802.11g (54 Mbps) 44
 Table 8-7: Power Spectral Density Test Data – 802.11n (65 Mbps) 44
 Table 8-8: Power Spectral Density Test Equipment 55
 Table 9-1: Hopping Mode Characteristics Test Equipment 58
 Table 10-1: Radiated Emissions Harmonics/Spurious - 2412 MHz, 802.11b, Peak Detector 60
 Table 10-2: Radiated Emissions Harmonics/Spurious - 2412 MHz, 802.11b, Average Detector 60
 Table 10-3: Radiated Emissions Harmonics/Spurious- 2412 MHz, 802.11g, Peak Detector 60
 Table 10-4: Radiated Emissions Harmonics/Spurious - 2412 MHz, 802.11g, Average Detector 60
 Table 10-5: Radiated Emissions Harmonics/Spurious - 2412 MHz, 802.11n, Peak Detector 61
 Table 10-6: Radiated Emissions Harmonics/Spurious - 2412 MHz, 802.11n, Average Detector 61
 Table 10-7: Radiated Emissions Harmonics/Spurious - 2437 MHz, 802.11b, Peak Detector 61
 Table 10-8: Radiated Emissions Harmonics/Spurious - 2437 MHz, 802.11b, Average Detector 61
 Table 10-9: Radiated Emissions Harmonics/Spurious - 2437 MHz, 802.11g, Peak Detector 62
 Table 10-10: Radiated Emissions Harmonics/Spurious - 2437 MHz, 802.11g, Average Detector 62
 Table 10-11: Radiated Emissions Harmonics/Spurious - 2437 MHz, 802.11n, Peak Detector 62
 Table 10-12: Radiated Emissions Harmonics/Spurious - 2437 MHz, 802.11n, Average Detector 62

Table 10-13:	Radiated Emissions Harmonics/Spurious - 2462 MHz, 802.11b, Peak Detector.....	63
Table 10-14:	Radiated Emissions Harmonics/Spurious - 2462 MHz, 802.11b, Average Detector.....	63
Table 10-15:	Radiated Emissions Harmonics/Spurious - 2462 MHz, 802.11g, Peak Detector.....	63
Table 10-16:	Radiated Emissions Harmonics/Spurious - 2462 MHz, 802.11g, Average Detector.....	64
Table 10-17:	Radiated Emissions Harmonics/Spurious - 2462 MHz, 802.11n, Peak Detector.....	64
Table 10-18:	Radiated Emissions Harmonics/Spurious - 2462 MHz, 802.11n, Average Detector.....	64
Table 10-19:	Radiated Emissions Harmonics/Spurious - 2402 MHz, ANT+, Peak Detector	65
Table 10-20:	Radiated Emissions Harmonics/Spurious - 2402 MHz, ANT+, Average Detector	65
Table 10-21:	Radiated Emissions Harmonics/Spurious - 2441 MHz, ANT+, Peak Detector	65
Table 10-22:	Radiated Emissions Harmonics/Spurious - 2441 MHz, ANT+, Average Detector	65
Table 10-23:	Radiated Emissions Harmonics/Spurious - 2480 MHz, ANT+, Peak Detector	66
Table 10-24:	Radiated Emissions Harmonics/Spurious - 2480 MHz, ANT+, Average Detector	66
Table 10-25:	Radiated Emissions Harmonics/Spurious - 2402 MHz, BLE, Peak Detector.....	66
Table 10-26:	Radiated Emissions Harmonics/Spurious - 2402 MHz, BLE, Average Detector.....	66
Table 10-27:	Radiated Emissions Harmonics/Spurious - 2440 MHz, BLE, Peak Detector.....	67
Table 10-28:	Radiated Emissions Harmonics/Spurious - 2440 MHz, BLE, Average Detector.....	67
Table 10-29:	Radiated Emissions Harmonics/Spurious - 2480 MHz, BLE, Peak Detector.....	67
Table 10-30:	Radiated Emissions Harmonics/Spurious - 2480 MHz, BLE, Average Detector.....	67
Table 10-31:	Radiated Emissions Harmonics/Spurious - 2402 MHz, Bluetooth, Peak Detector	68
Table 10-32:	Radiated Emissions Harmonics/Spurious - 2402 MHz, Bluetooth, Average Detector	68
Table 10-33:	Radiated Emissions Harmonics/Spurious - 2440 MHz, Bluetooth, Peak Detector	68
Table 10-34:	Radiated Emissions Harmonics/Spurious - 2440 MHz, Bluetooth, Average Detector	68
Table 10-35:	Radiated Emissions Harmonics/Spurious - 2480 MHz, Bluetooth, Peak Detector	69
Table 10-36:	Radiated Emissions Harmonics/Spurious - 2480 MHz, Bluetooth, Average Detector	69
Table 10-37:	Radiated Emissions Test Equipment.....	70

Plot Index

Plot 4-1:	Lower Band Edge Average: Bluetooth]	12
Plot 4-2:	Lower Band Edge Peak: Bluetooth	13
Plot 4-3:	Lower Band Edge Average: ANT+	13
Plot 4-4:	Lower Band Edge Peak: ANT+	14
Plot 4-5:	Lower Band Edge Average: BLE.....	14
Plot 4-6:	Lower Band Edge Peak: BLE.....	15
Plot 4-7:	Lower Band Edge Average: Wi-Fi 802.11b (11 Mbps).....	15
Plot 4-8:	Lower Band Edge Peak: Wi-Fi 802.11b (11 Mbps).....	16
Plot 4-9:	Lower Band Edge Average: Wi-Fi 802.11g (54 Mbps).....	16
Plot 4-10:	Lower Band Edge Peak: Wi-Fi 802.11g (54 Mbps).....	17
Plot 4-11:	Lower Band Edge Average: Wi-Fi 802.11n (65 Mbps).....	17
Plot 4-12:	Lower Band Edge Peak: Wi-Fi 802.11n (65 Mbps).....	18
Plot 4-13:	Upper Band Edge Average: Bluetooth	19
Plot 4-14:	Upper Band Edge Peak: Bluetooth	20
Plot 4-15:	Upper Band Edge Average: ANT+	20
Plot 4-16:	Upper Band Edge Peak: ANT+	21
Plot 4-17:	Upper Band Edge Average: BLE.....	21
Plot 4-18:	Upper Band Edge Peak: BLE.....	22
Plot 4-19:	Upper Band Edge Average: Wi-Fi 802.11b (11 Mbps).....	22
Plot 4-20:	Upper Band Edge Peak: Wi-Fi 802.11b (11 Mbps).....	23
Plot 4-21:	Upper Band Edge Average: Wi-Fi 802.11g (54 Mbps).....	23
Plot 4-22:	Upper Band Edge Peak: Wi-Fi 802.11g (54 Mbps).....	24
Plot 4-23:	Upper Band Edge Average: Wi-Fi 802.11n (65 Mbps).....	24
Plot 4-24:	Upper Band Edge Peak: Wi-Fi 802.11n (65 Mbps).....	25

Plot 6-1:	20 dB Bandwidth Channel 2 (TX Frequency 2402 MHz) – Bluetooth	27
Plot 6-2:	20 dB Bandwidth Channel 40 (TX Frequency 2440 MHz) – Bluetooth	28
Plot 6-3:	20 dB Bandwidth Channel 80 (TX Frequency 2480 MHz) – Bluetooth	29
Plot 7-1:	6 dB Bandwidth Channel Low (TX Frequency 2402 MHz) - ANT+	31
Plot 7-2:	6 dB Bandwidth Channel Mid (TX Frequency 2441 MHz) - ANT+	32
Plot 7-3:	6 dB Bandwidth Channel High (TX Frequency 2480 MHz) - ANT+	32
Plot 7-4:	6 dB Bandwidth Channel 1 (TX Frequency 2402 MHz) – BLE (PRB29)	33
Plot 7-5:	6 dB Bandwidth Channel 19 (TX Frequency 2440 MHz) – BLE (PRB29)	33
Plot 7-6:	6 dB Bandwidth Channel 39 (TX Frequency 2480 MHz) – BLE (PRB29)	34
Plot 7-7:	6 dB Bandwidth Channel 1 (TX Frequency 2402 MHz) – BLE (0x0F)	34
Plot 7-8:	6 dB Bandwidth Channel 19 (TX Frequency 2440 MHz) – BLE (0x0F)	35
Plot 7-9:	6 dB Bandwidth Channel 39 (TX Frequency 2480 MHz) – BLE (0x0F)	35
Plot 7-10:	6 dB Bandwidth Channel 1 (TX Frequency 2402 MHz) – BLE (0x55)	36
Plot 7-11:	6 dB Bandwidth Channel 19 (TX Frequency 2440 MHz) – BLE (0x55)	36
Plot 7-12:	6 dB Bandwidth Channel 39 (TX Frequency 2480 MHz) – BLE (0x55)	37
Plot 7-13:	6 dB Bandwidth Channel 1 (TX Frequency 2412 MHz) - 802.11b (11 Mbps)	37
Plot 7-14:	6 dB Bandwidth Channel 6 (TX Frequency 2437 MHz) - 802.11b (11 Mbps)	38
Plot 7-15:	6 dB Bandwidth Channel 11 (TX Frequency 2462 MHz) - 802.11b (11 Mbps)	38
Plot 7-16:	6 dB Bandwidth Channel 1 (TX Frequency 2412 MHz) - 802.11g (54 Mbps)	39
Plot 7-17:	6 dB Bandwidth Channel 6 (TX Frequency 2437 MHz) - 802.11g (54 Mbps)	39
Plot 7-18:	6 dB Bandwidth Channel 11 (TX Frequency 2462 MHz) - 802.11g (54 Mbps)	40
Plot 7-19:	6 dB Bandwidth Channel 1 (TX Frequency 2412 MHz) - 802.11n (65 Mbps)	40
Plot 7-20:	6 dB Bandwidth Channel 6 (TX Frequency 2437 MHz) - 802.11n (65 Mbps)	41
Plot 7-21:	6 dB Bandwidth Channel 11 (TX Frequency 2462 MHz) - 802.11n (65 Mbps)	41
Plot 8-1:	Power Spectral Density: Channel Low (2402 MHz) - ANT+	44
Plot 8-2:	Power Spectral Density: Channel Mid (2441 MHz) - ANT+	45
Plot 8-3:	Power Spectral Density: Channel High (2480 MHz) - ANT+	45
Plot 8-4:	Power Spectral Density: Channel 0 (2402 MHz) – BLE (PRB29)	46
Plot 8-5:	Power Spectral Density: Channel 19 (2440 MHz) – BLE (PRB29)	46
Plot 8-6:	Power Spectral Density: Channel 39 (2480 MHz) – BLE (PRB29)	47
Plot 8-7:	Power Spectral Density: Channel 0 (2402 MHz) – BLE (0x0F)	47
Plot 8-8:	Power Spectral Density: Channel 19 (2440 MHz) – BLE (0x0F)	48
Plot 8-9:	Power Spectral Density: Channel 39 (2480 MHz) – BLE (0x0F)	48
Plot 8-10:	Power Spectral Density: Channel 0 (2402 MHz) – BLE (0x55)	49
Plot 8-11:	Power Spectral Density: Channel 19 (2440 MHz) – BLE (0x55)	49
Plot 8-12:	Power Spectral Density: Channel 39 (2480 MHz) – BLE (0x55)	50
Plot 8-13:	Power Spectral Density: Channel 1 (2412 MHz); 802.11b (11 Mbps)	50
Plot 8-14:	Power Spectral Density: Channel 6 (2437 MHz); 802.11b (11 Mbps)	51
Plot 8-15:	Power Spectral Density: Channel 11 (2462 MHz); 802.11b (11 Mbps)	51
Plot 8-16:	Power Spectral Density: Channel 1 (2412 MHz); 802.11g (54 Mbps)	52
Plot 8-17:	Power Spectral Density: Channel 6 (2437 MHz); 802.11g (54 Mbps)	52
Plot 8-18:	Power Spectral Density: Channel 11 (2462 MHz); 802.11g (54 Mbps)	53
Plot 8-19:	Power Spectral Density: Channel 1 (2412 MHz); 802.11n (65 Mbps)	53
Plot 8-20:	Power Spectral Density: Channel 6 (2437 MHz); 802.11n (65 Mbps)	54
Plot 8-21:	Power Spectral Density: Channel 11 (2462 MHz); 802.11n (65 Mbps)	54
Plot 9-1:	Number of Channels – Bluetooth (79 channels)	56
Plot 9-2:	Channel Separation – Bluetooth (1 MHz)	57
Plot 9-3:	Number of Pulses – Bluetooth (30)	57
Plot 9-4:	Pulse Width – Bluetooth (348 us)	58

Appendix Index

Appendix A: RF Exposure Compliance	72
Appendix B: Agency Authorization Letter	73
Appendix C: FCC & IC Confidentiality Request Letter	74
Appendix D: IC Letters.....	75
Appendix E: Canadian-Based Representative Letter.....	76
Appendix F: Label and Label Location.....	77
Appendix G: Technical Operational Description.....	78
Appendix H: Schematics.....	79
Appendix I: Block Diagram	80
Appendix J: Manual	81
Appendix K: Test Photographs	82
Appendix L: External Photographs	85
Appendix M: Internal Photographs.....	86

Photograph Index

Photograph 1: Radiated Emissions Testing – Front View (Above 1 GHz)	82
Photograph 2: Radiated Emissions Testing – Back View (Above 1 GHz).....	83
Photograph 3: Radiated Emissions Testing – Side View (Below 1 GHz).....	84

1 General Information

1.1 Scope

Applicable Standards:

FCC Rules Part 15.247: Operation within the bands 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz.

Industry Canada RSS-247: Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSS) and Licence-Exempt Local Area Network (LE-LAN) Devices

1.2 Description of EUT

Equipment Under Test	Body-worn transmitter
Model/HVIN	A03436
Power Supply	Battery operated
Modulation Type	Wi-Fi: CCK, DBPSK; DQPSK; BPSK; QPSK; 16-QAM; 64-QAM ANT+: GFSK BLE: GMSK PRB29, OxOF, Ox55 Bluetooth: GFSK
Frequency Range	Wi-Fi: 2412–2462 MHz ANT+, BLE and Bluetooth: 2402-2480 MHz
Antenna Connector	Internal

1.3 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data is located at 360 Herndon Parkway, Suite 1400, Herndon, Virginia 20170. This site has been fully described in a report and approved by the Federal Communications Commission to perform AC line conducted and radiated emissions testing (ANSI C63.10 2013).

1.4 Related Submittal(s)/Grant(s)

This is an original certification application for Garmin International Inc. Model/HVIN: A03436, FCC ID: IPH-03436, IC: 1792A-03436.

1.5 Modifications

No modifications were required for compliance.

2 Test Information

2.1 Description of Test Modes

In accordance with FCC 15.31(m), and because the EUT utilizes an operating band greater than 10 MHz, the following frequencies were tested.

Table 2-1: Channels Tested for Wi-Fi – 802.11b (11 Mbps); 802.11g (54 Mbps); 802.11n (65 Mbps)

Channel	Frequency (MHz)
1	2412
6	2437
11	2462

Table 2-2: Channels Tested for ANT+

Channel	Frequency (MHz)
Low	2402
Mid	2441
High	2480

Table 2-3: Channels Tested for BLE

Channel	Frequency (MHz)
0	2402
19	2440
39	2480

Table 2-4: Channels Tested for Bluetooth

Channel	Frequency (MHz)
2	2402
40	2440
80	2480

2.2 Exercising the EUT

The EUT was tested in all three orthogonal planes in order to determine worst-case emissions. The EUT was provided with software to continuously transmit during testing. The carrier was also checked to verify that information was being transmitted, and all modes were investigated and the worst-case mode was used for final testing. There were no deviations from the test standard(s) and/or methods. The test results reported relate only to the item tested.

2.3 Test Result Summary

Table 2-5: Test Result Summary – FCC Part 15, Subpart C (Section 15.247)

Standard	Test	Pass/Fail or N/A
FCC 15.209	Radiated Emissions	Pass
FCC 15.247(a)(2)	6 dB Bandwidth	Pass
FCC 15.247(a)(1)	20 dB Bandwidth	Pass
FCC 15.247(a)(1)	Hopping Characteristics	Pass
FCC 15.247(a)(1)	Average Time of Occupancy	Pass
FCC 15.247(b)	Maximum Peak Power Output	Pass
FCC 15.247(d)	Antenna Conducted Spurious Emissions	Pass
FCC 15.247(e)	Power Spectral Density	Pass
FCC 15.247(d)	Band Edge Measurement	Pass

2.4 Test System Details

The test sample was received on February 12, 2018. The FCC identifiers for all applicable equipment, plus descriptions of all cables used in the tested system, are identified in the following tables.

Table 2-6: Equipment Under Test

Part	Manufacturer	Model/HVIN	Serial Number	FCC ID	Cable Description	RTL Bar Code
Body-worn transmitter (radiated testing)	Garmin International Inc.	A03436	963336094	IPH-03436	N/A	22737
Body-worn transmitter (conducted testing)	Garmin International Inc.	A03436	963336112	IPH-03436	N/A	22738

2.5 Configuration of Tested System

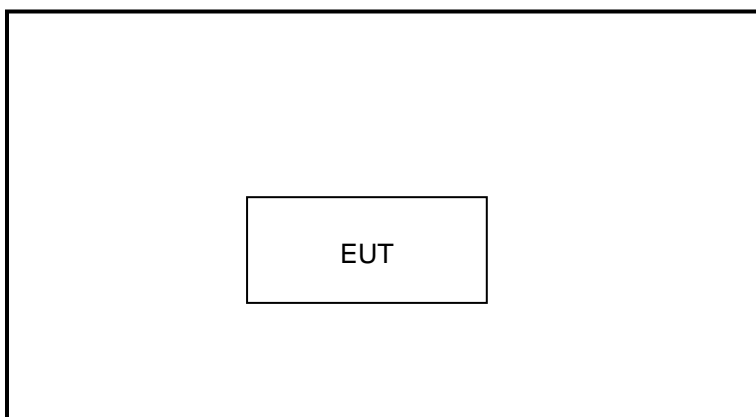


Figure 2-1: Configuration of System Under Test

3 Peak Output Power – FCC 15.247(b); RSS-247 5.4

3.1 Power Output Test Procedure

A conducted power measurement of the EUT was taken using an Agilent N9010A EXA Signal Analyzer with a 50 ohm attenuator.

Table 3-1: Power Output Test Equipment

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901583	Agilent Technologies	N9010A	EXA Signal Analyzer (10 Hz-26.5 GHz)	MY51250846	2/6/20
900948	Weinschel Corporation	47-10-43 DC-18GHz	Attenuator, 50W 10dB	BH1487	9/1/18

3.2 Power Output Test Data

Table 3-2: Power Output Test Data – Bluetooth

Channel	Frequency (MHz)	Peak Power Conducted Output (dBm)
2	2402	7.6
40	2440	6.6
80	2480	7.2

Table 3-3: Power Output Test Data – ANT+

Channel	Frequency (MHz)	Peak Power Conducted Output (dBm)
Low	2402	9.5
Mid	2441	10.6
High	2480	7.5

Table 3-4: Power Output Test Data – BLE

Channel	Frequency (MHz)	Peak Power Conducted Output (dBm)
0	2402	8.9
19	2440	9.9
39	2480	6.5

Table 3-5: Power Output Test Data – 802.11b (11 Mbps)

Channel	Frequency (MHz)	Peak Power Conducted Output (dBm)
1	2412	22.7
6	2437	21.5
11	2462	22.8

Table 3-6: Power Output Test Data – 802.11g (54 Mbps)

Channel	Frequency (MHz)	Peak Power Conducted Output (dBm)
1	2412	23.3
6	2437	22.8
11	2462	23.4

Table 3-7: Power Output Test Data – 802.11n (65 Mbps)

Channel	Frequency (MHz)	Peak Power Conducted Output (dBm)
1	2412	23.4
6	2437	21.8
11	2462	23.4

Measurement uncertainties shown for these tests are expanded Gaussian uncertainties expressed at 95% confidence level using a coverage factor $k = 1.96$. Measurement uncertainty = 0.5 dB.

PASS

Test Personnel:

Daniel W. Baltzell		February 21, 2018
Test Engineer	Signature	Date of Test

4 Compliance with the Band Edge – FCC 15.247(d); RSS-247 2.2


4.1 Band Edge Test Procedure

The transmitter output was connected to its appropriate antenna. 1 MHz integrated peak (100 kHz RBW/1 MHz VBW) and 1 MHz integrated average (100 MHz RBW/1 MHz VBW) corrected measurements were taken within the restricted band to show compliance.


4.2 Restricted Band Edge Test Results

4.2.1 Lower Band Edge


Plot 4-1: Lower Band Edge Average: Bluetooth]

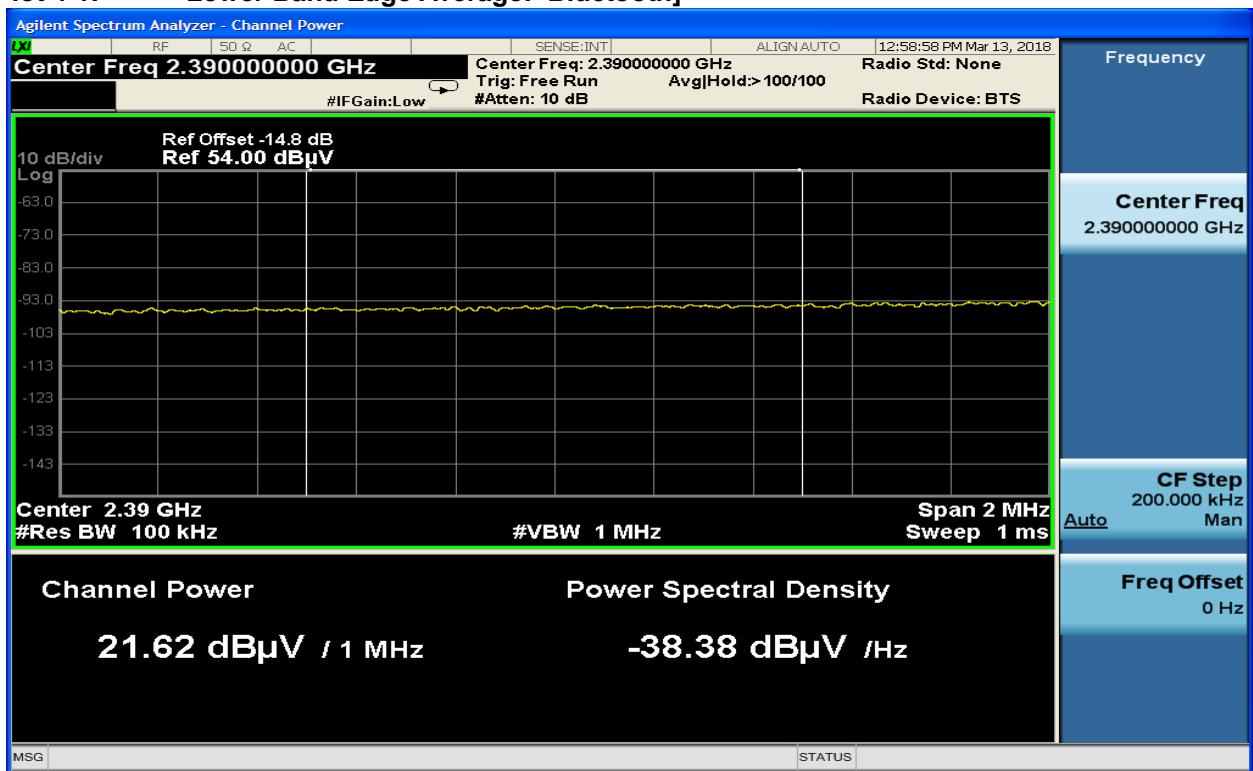


Plot 4-2: Lower Band Edge Peak: Bluetooth

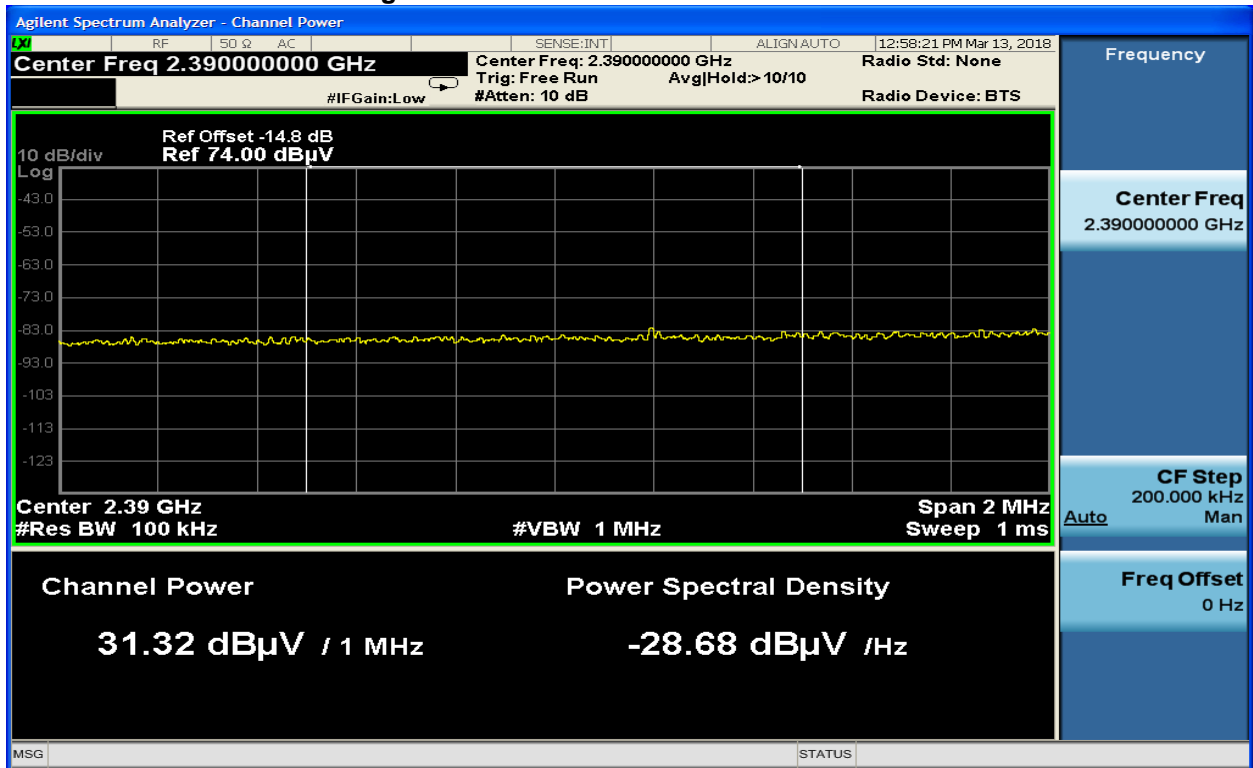


Plot 4-3: Lower Band Edge Average: ANT+

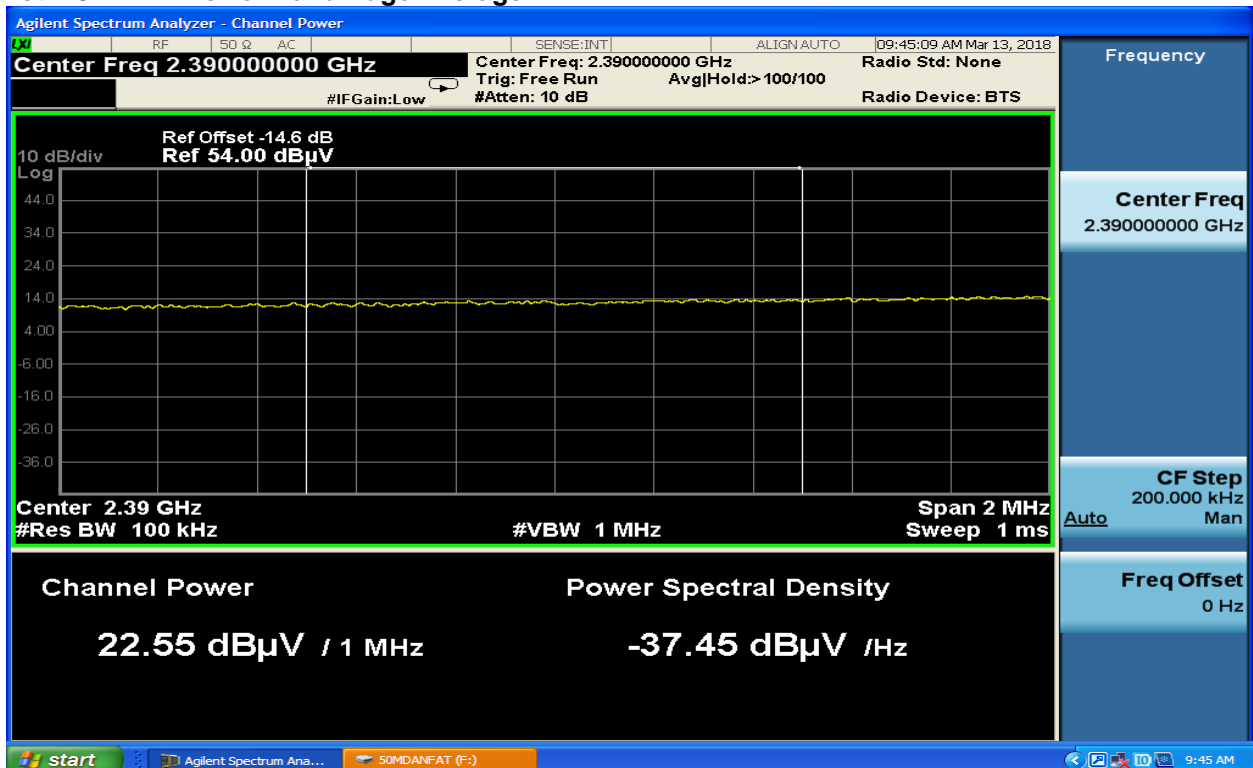


Plot 4-4: Lower Band Edge Peak: ANT+

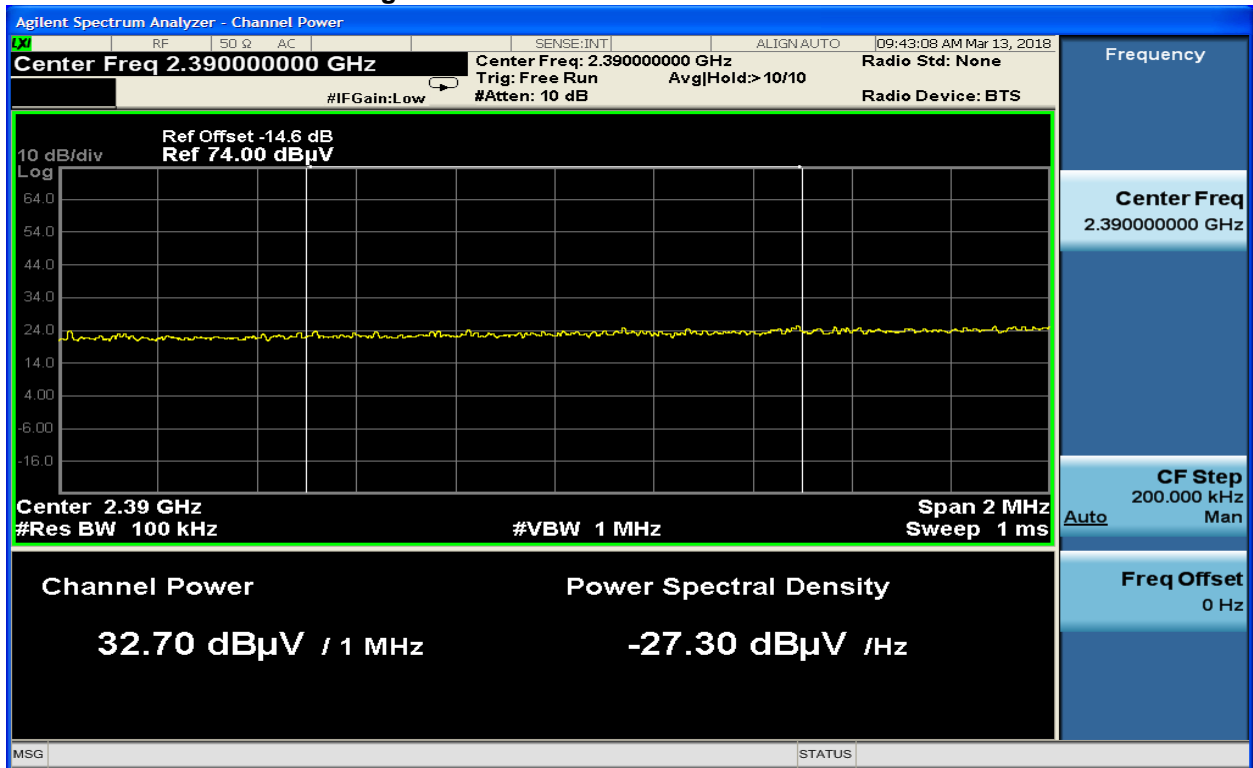


Plot 4-5: Lower Band Edge Average: BLE

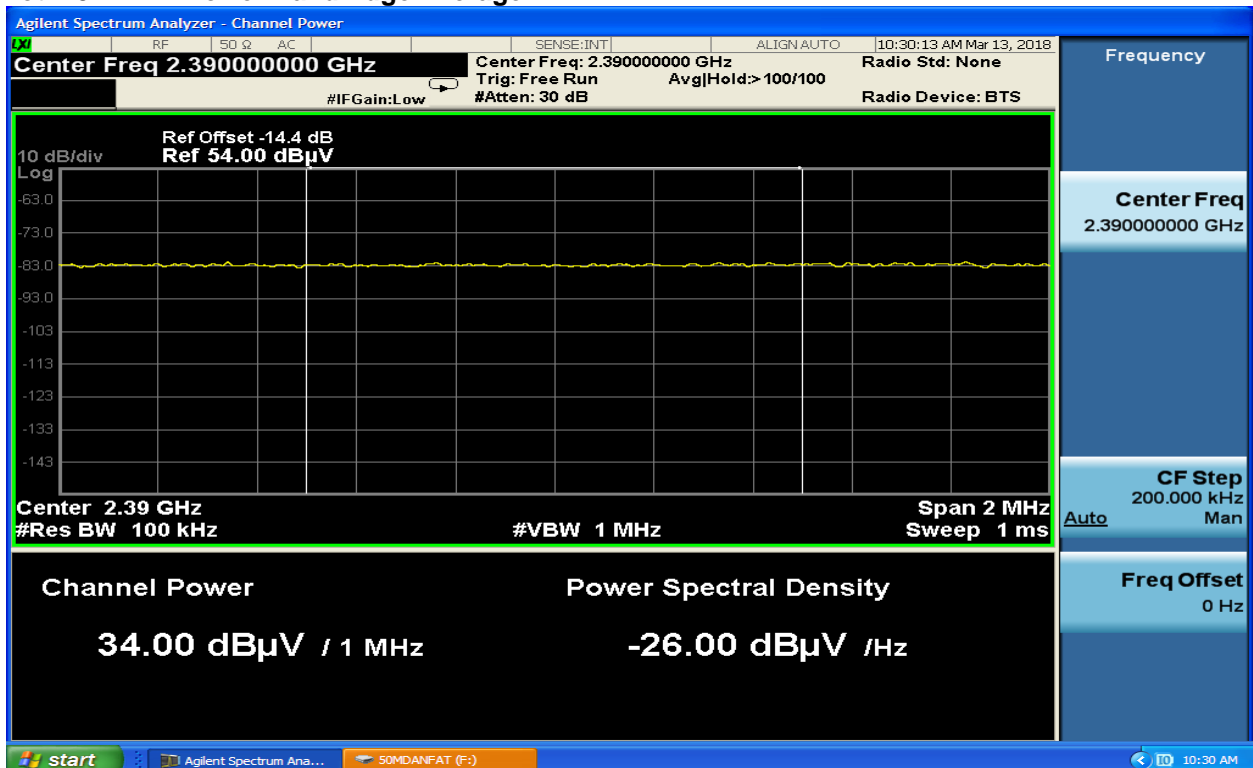


Plot 4-6: Lower Band Edge Peak: BLE

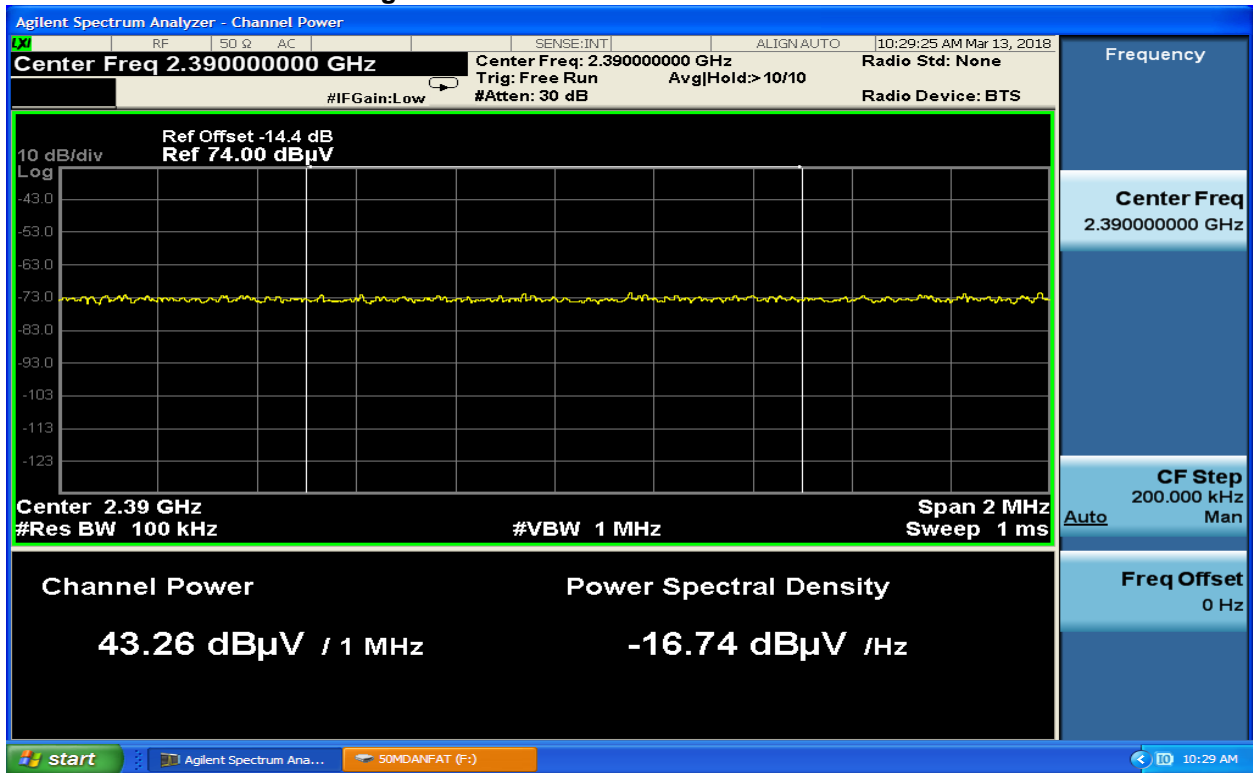


Plot 4-7: Lower Band Edge Average: Wi-Fi 802.11b (11 Mbps)

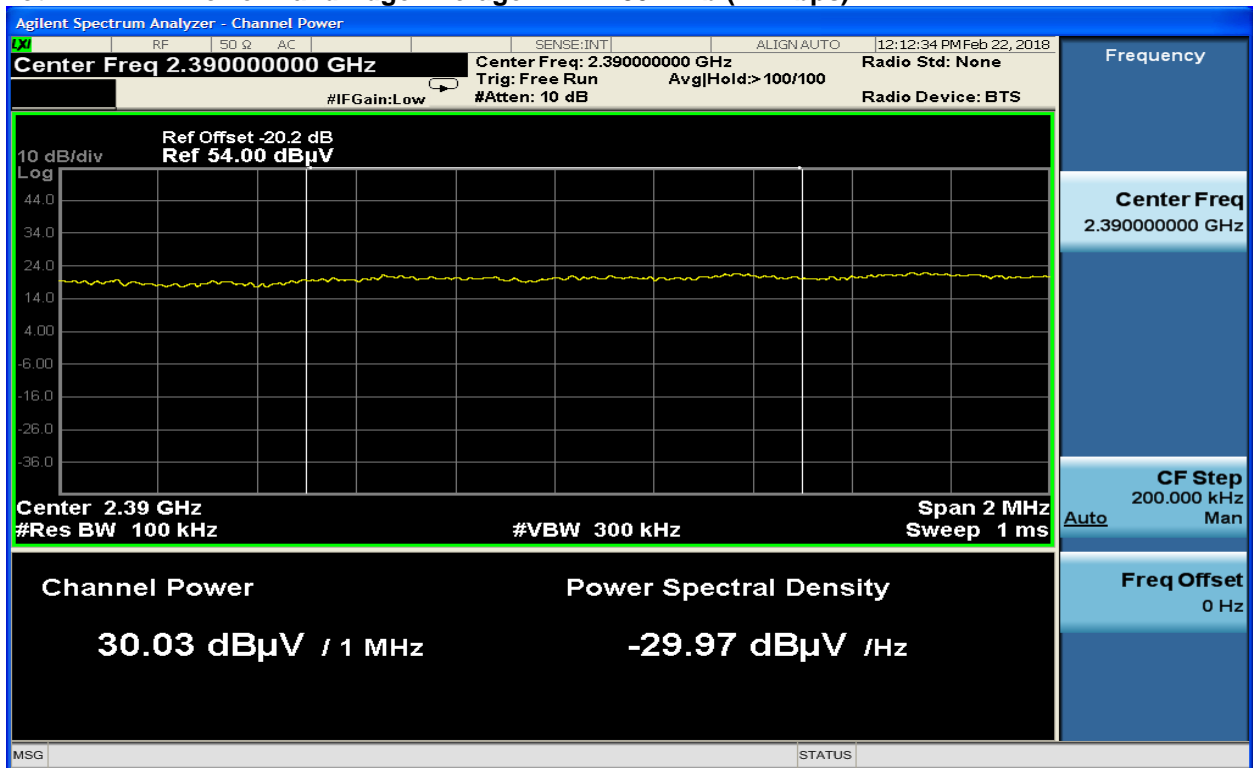


Plot 4-8: Lower Band Edge Peak: Wi-Fi 802.11b (11 Mbps)

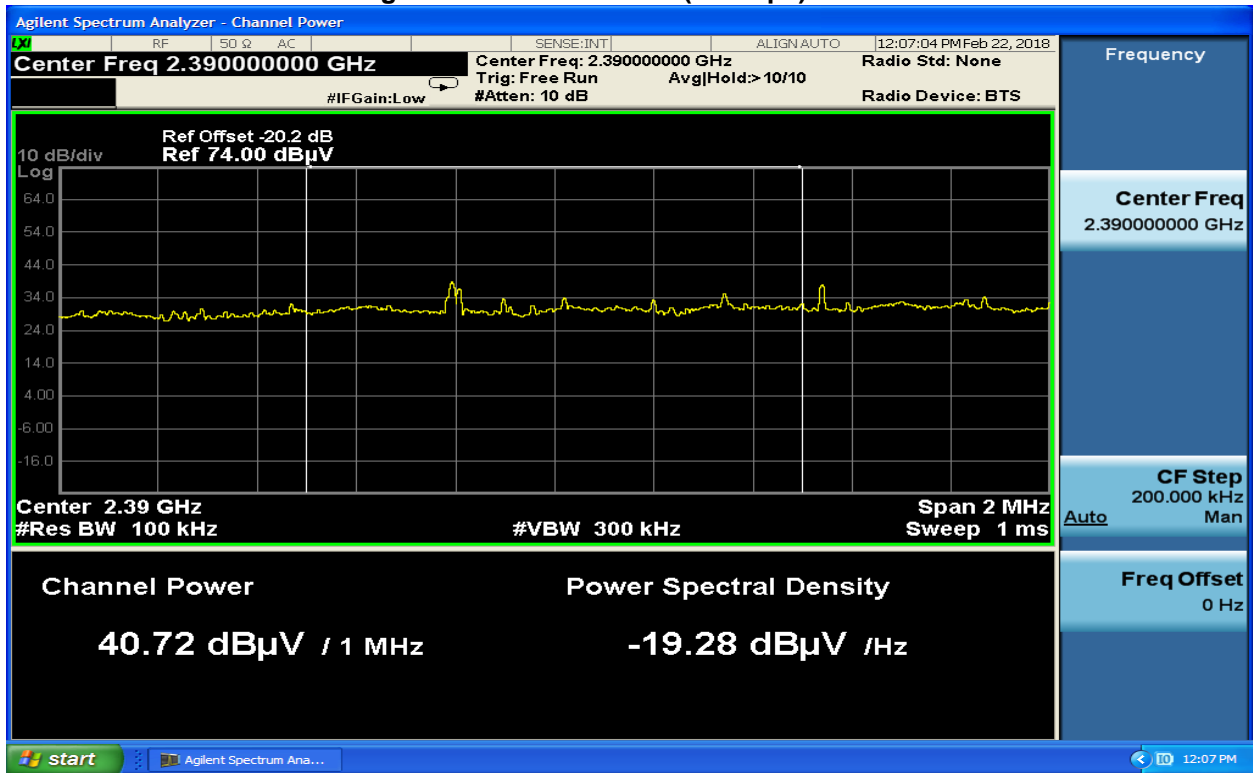


Plot 4-9: Lower Band Edge Average: Wi Fi 802.11g (54 Mbps)

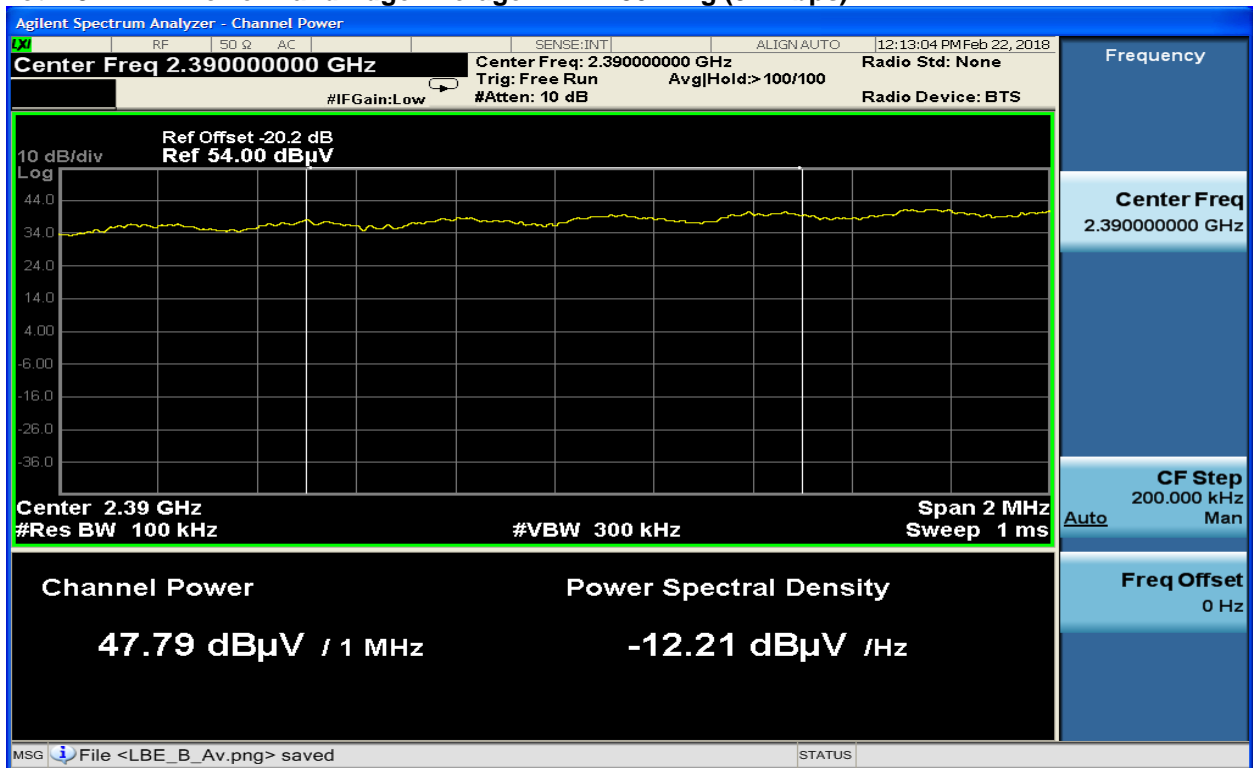


Plot 4-10: Lower Band Edge Peak: Wi-Fi 802.11g (54 Mbps)

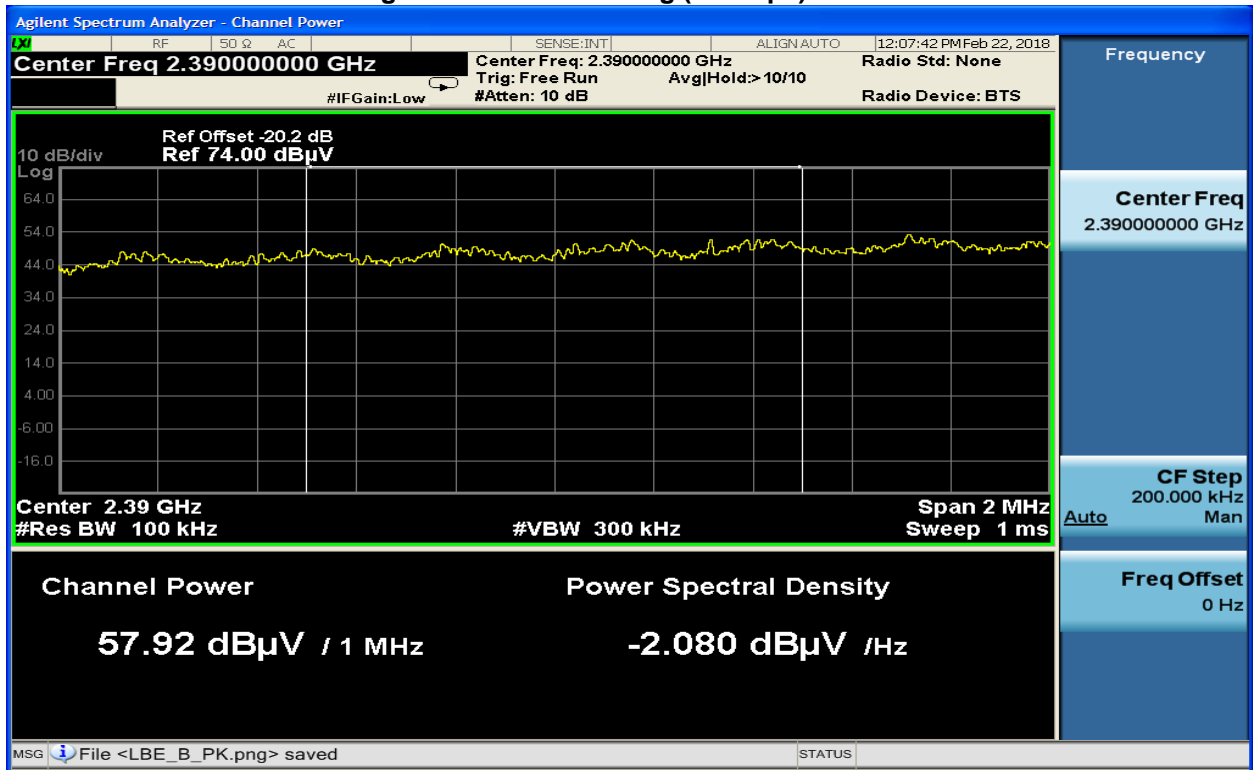

Plot 4-11: Lower Band Edge Average: Wi-Fi 802.11n (65 Mbps)

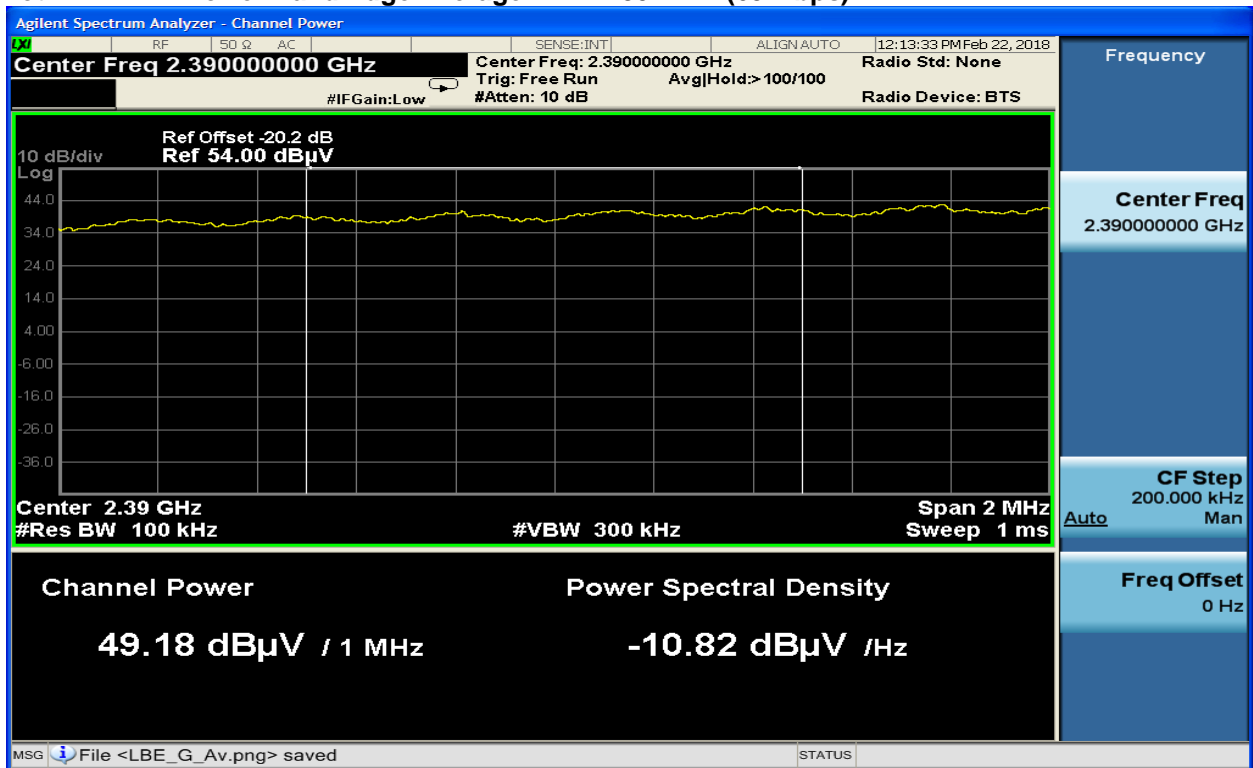


Plot 4-12: Lower Band Edge Peak: Wi-Fi 802.11n (65 Mbps)

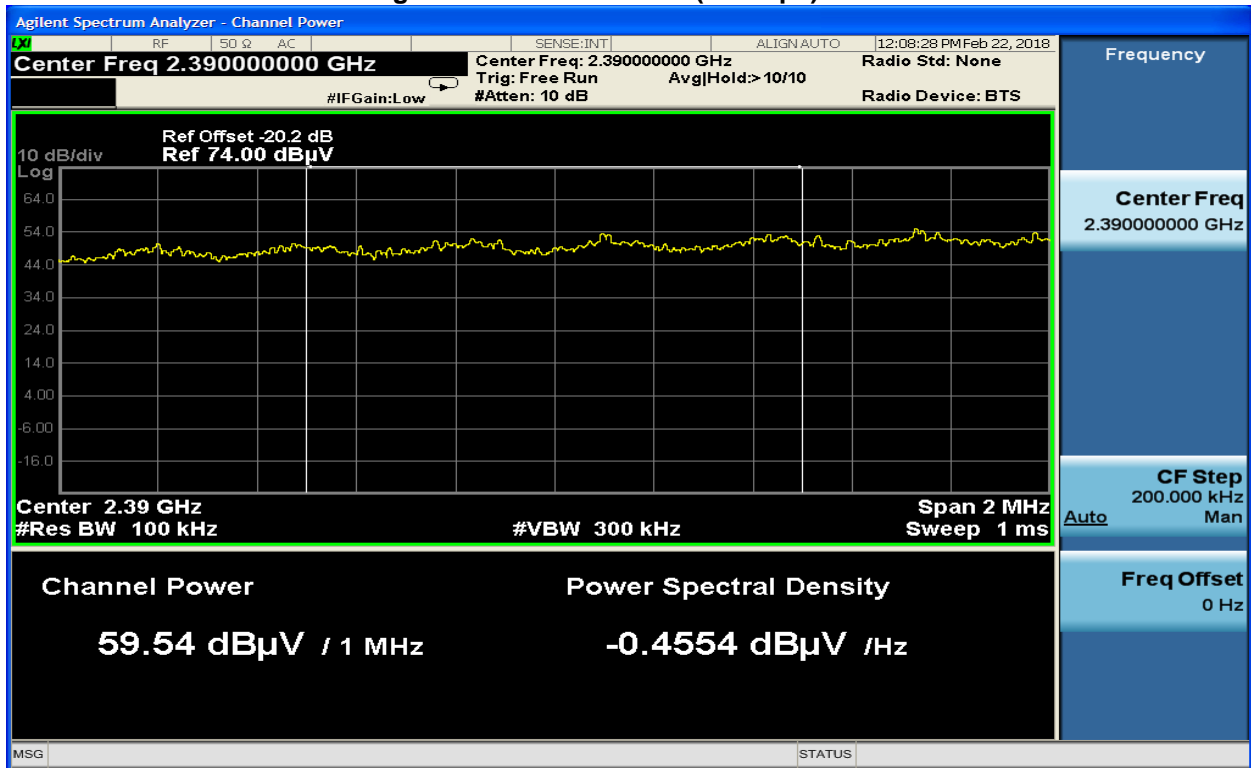


4.2.2 Upper Band Edge


Plot 4-13: Upper Band Edge Average: Bluetooth

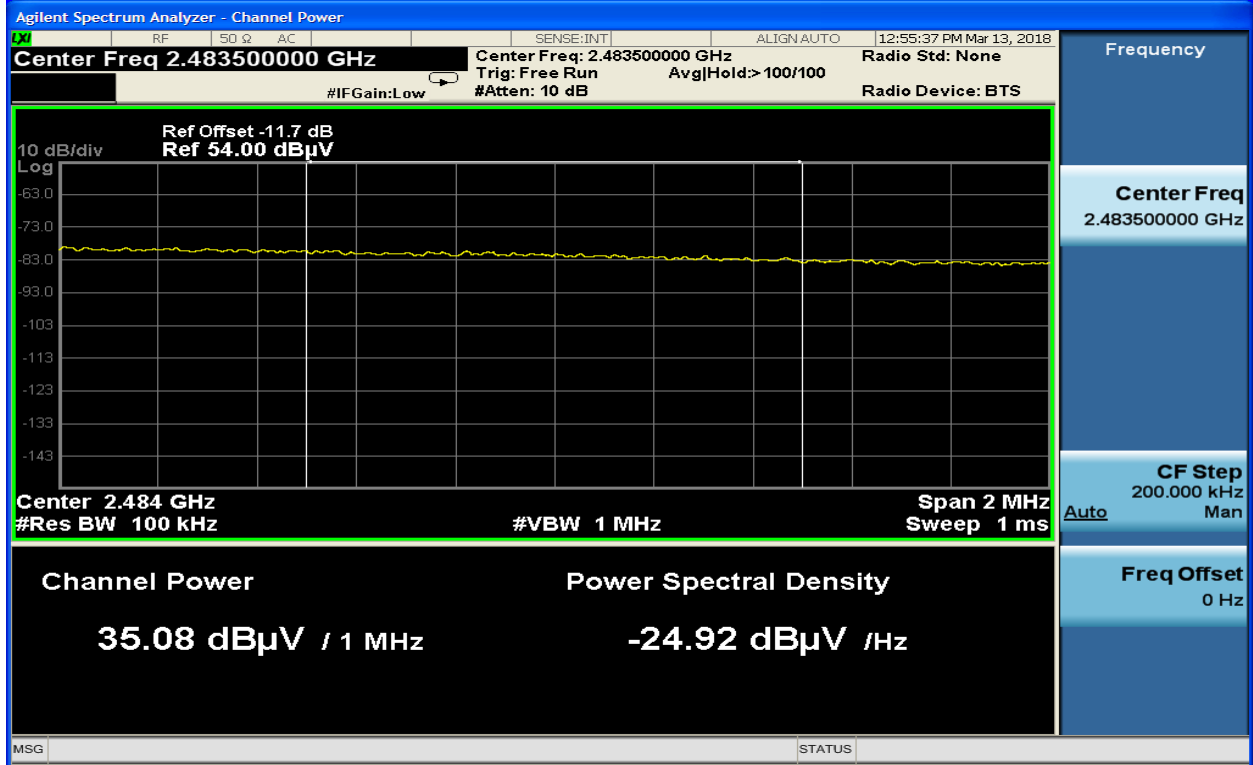


Plot 4-14: Upper Band Edge Peak: Bluetooth

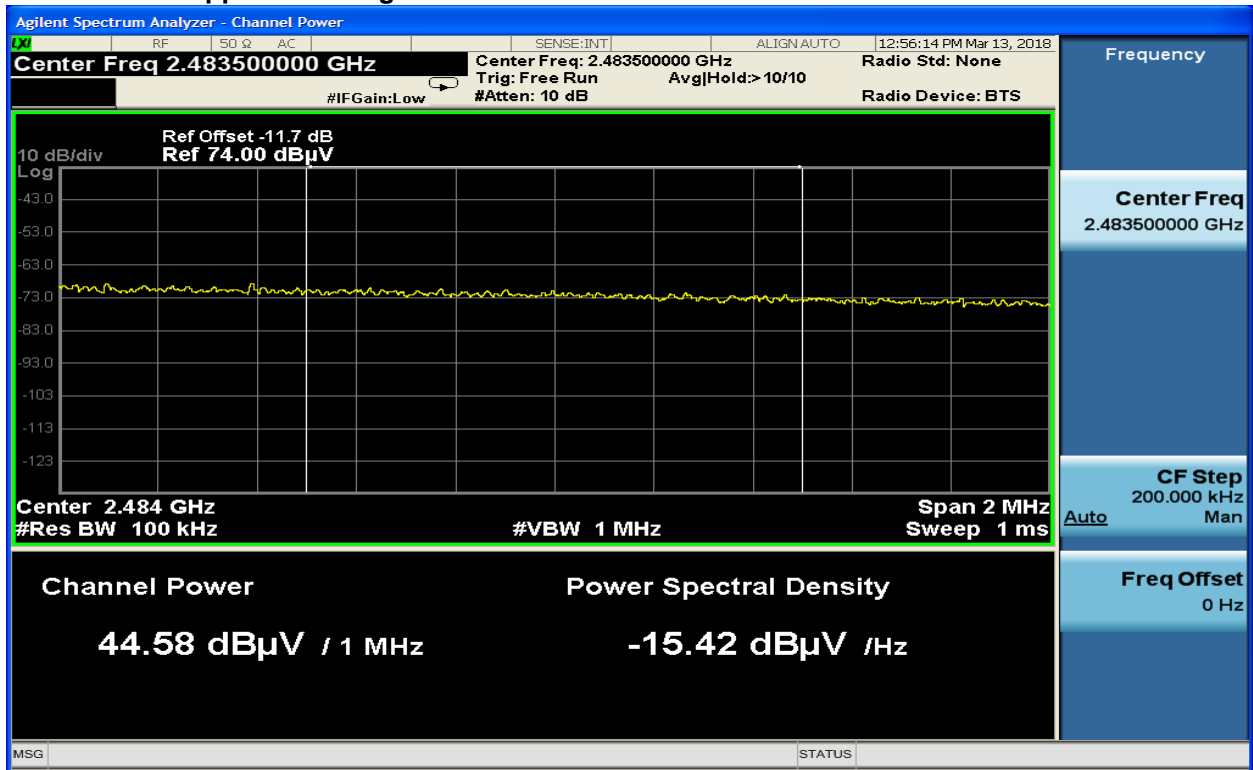


Plot 4-15: Upper Band Edge Average: ANT+

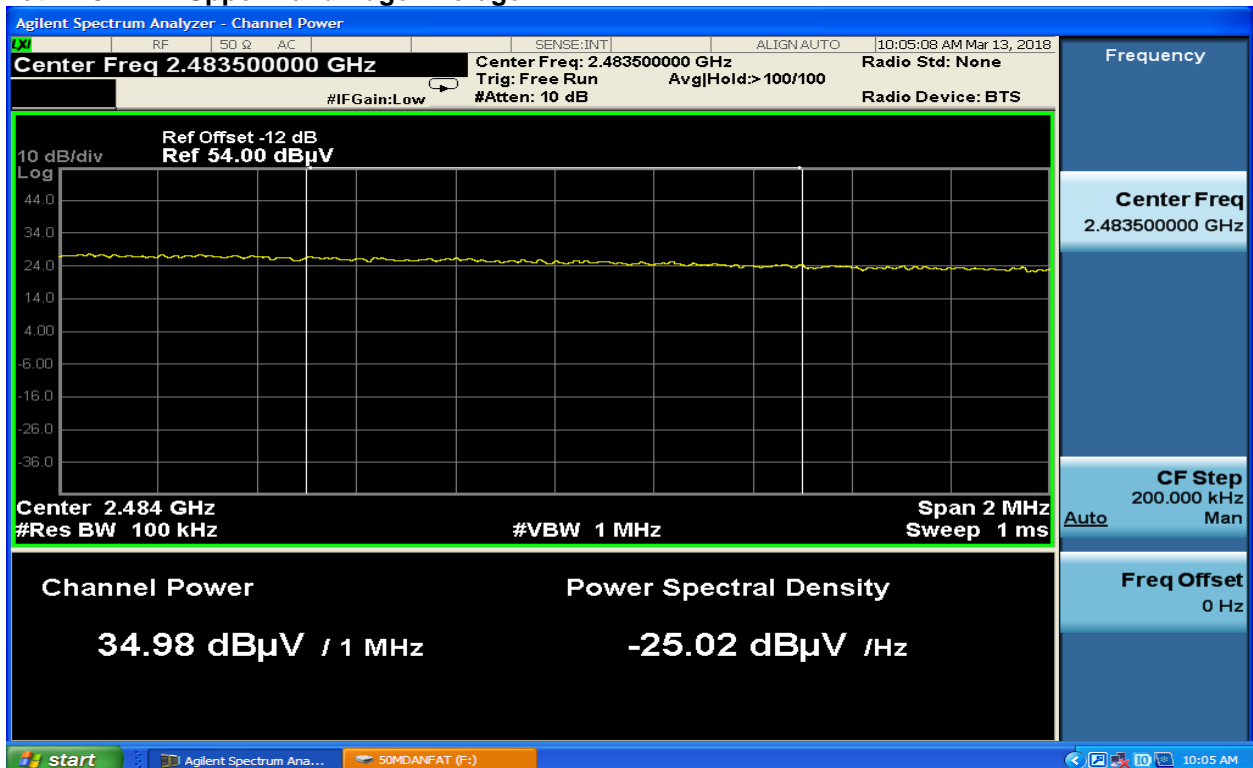


Plot 4-16: Upper Band Edge Peak: ANT+

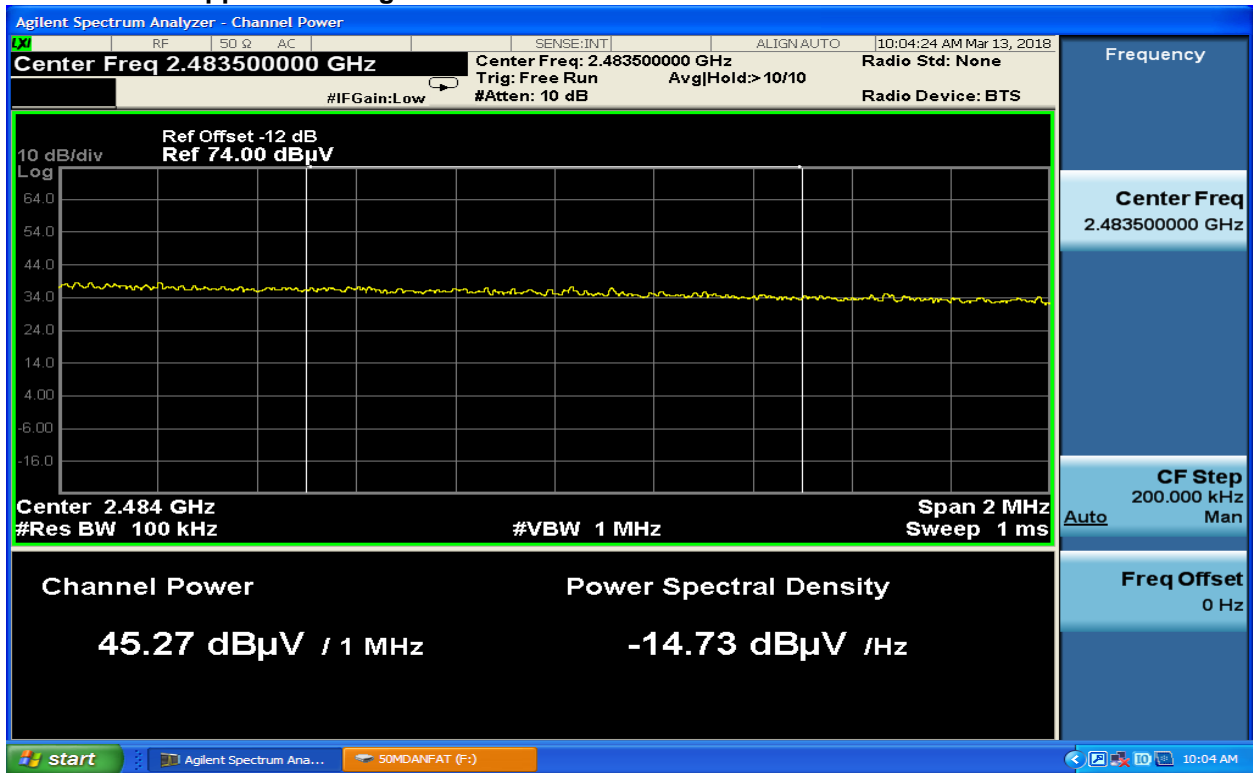


Plot 4-17: Upper Band Edge Average: BLE

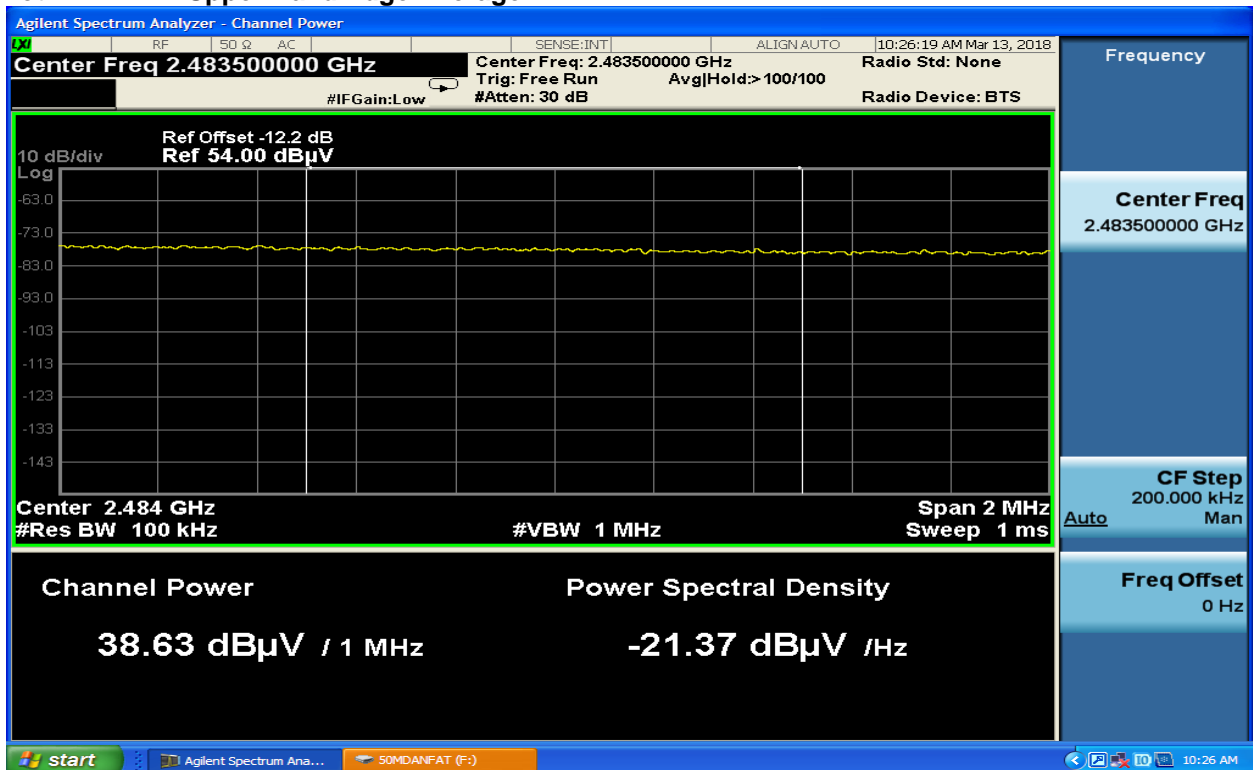


Plot 4-18: Upper Band Edge Peak: BLE

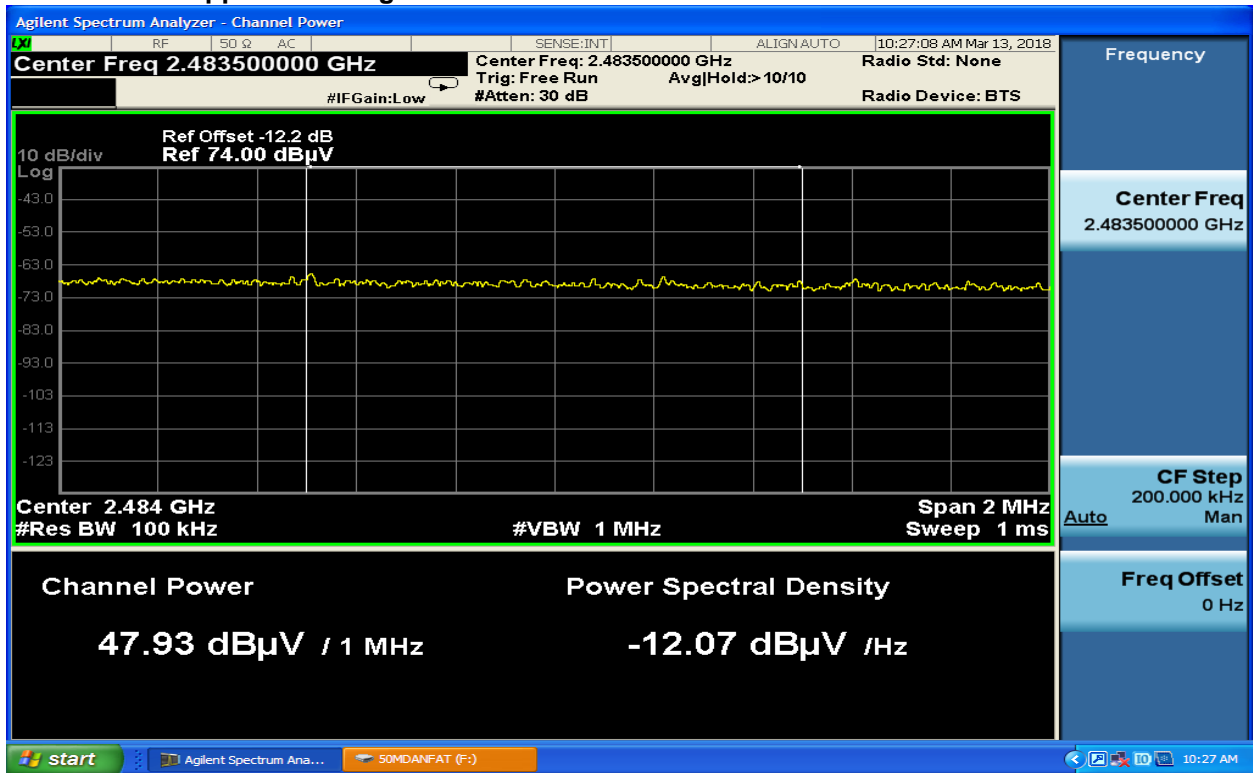


Plot 4-19: Upper Band Edge Average: Wi-Fi 802.11b (11 Mbps)

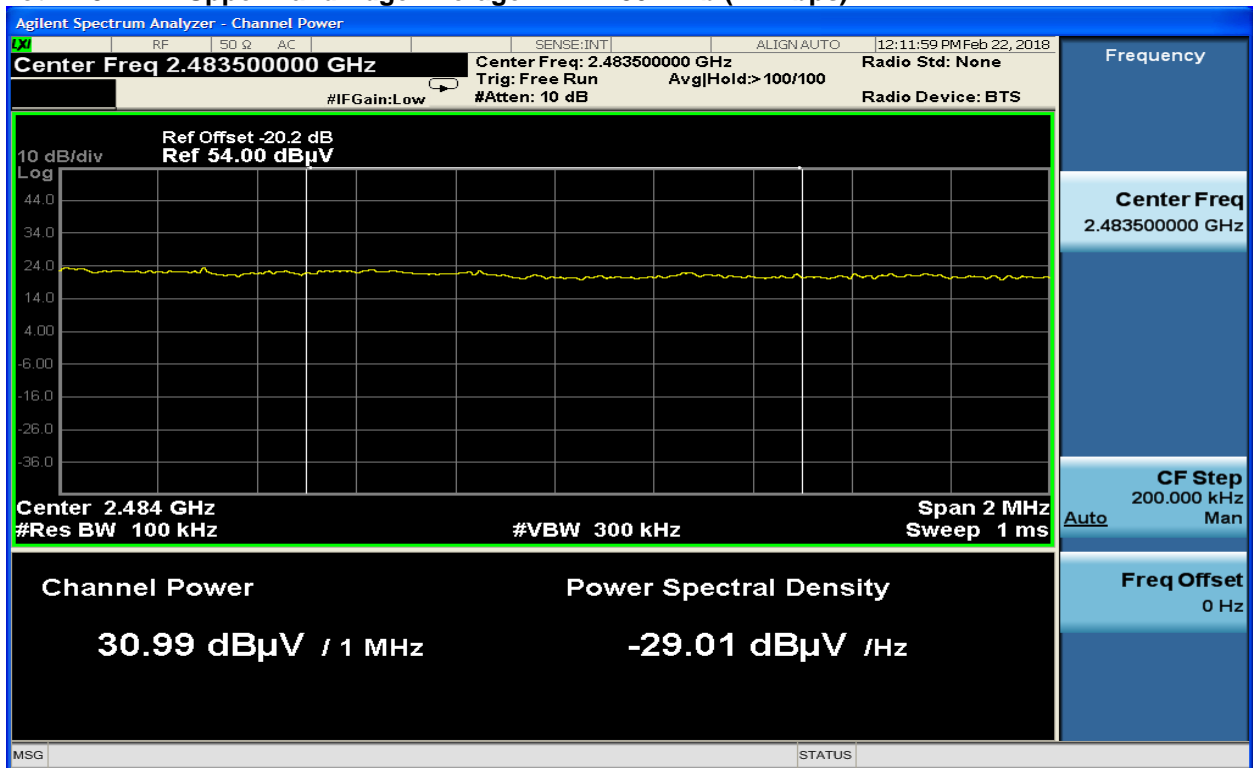


Plot 4-20: Upper Band Edge Peak: Wi-Fi 802.11b (11 Mbps)

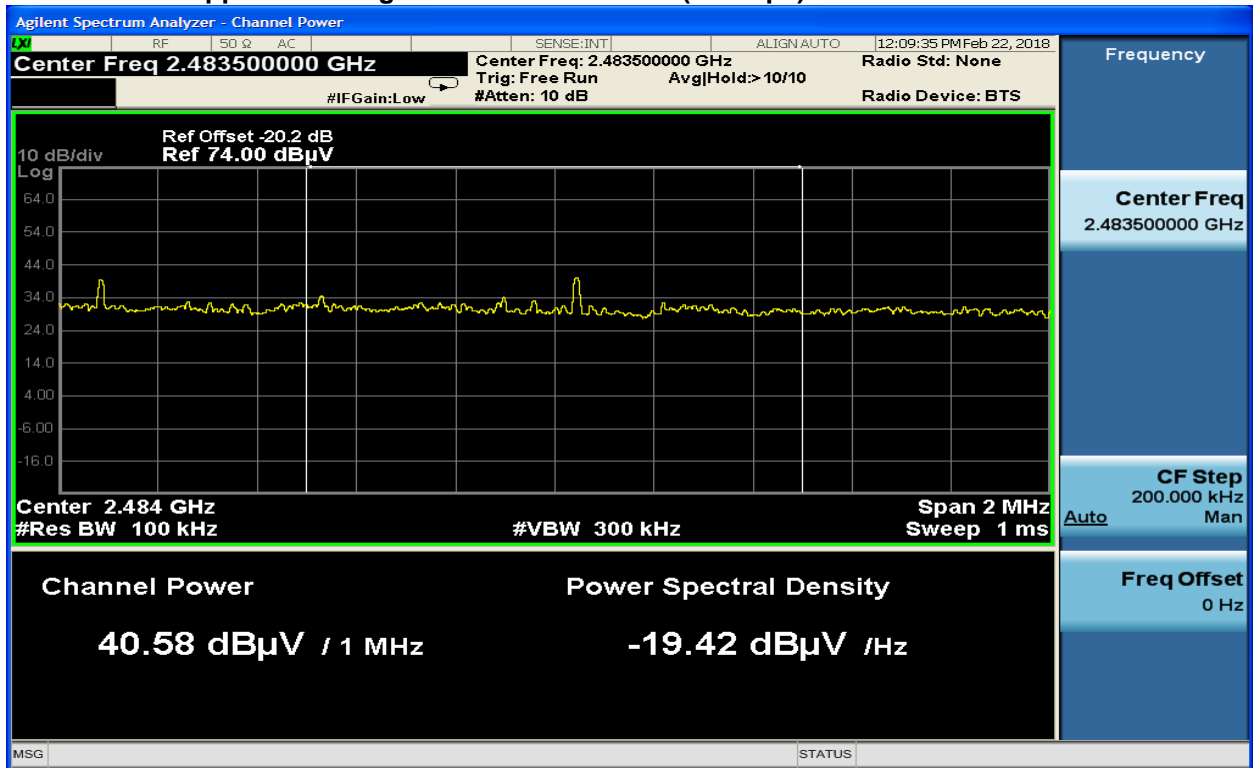


Plot 4-21: Upper Band Edge Average: Wi-Fi 802.11g (54 Mbps)

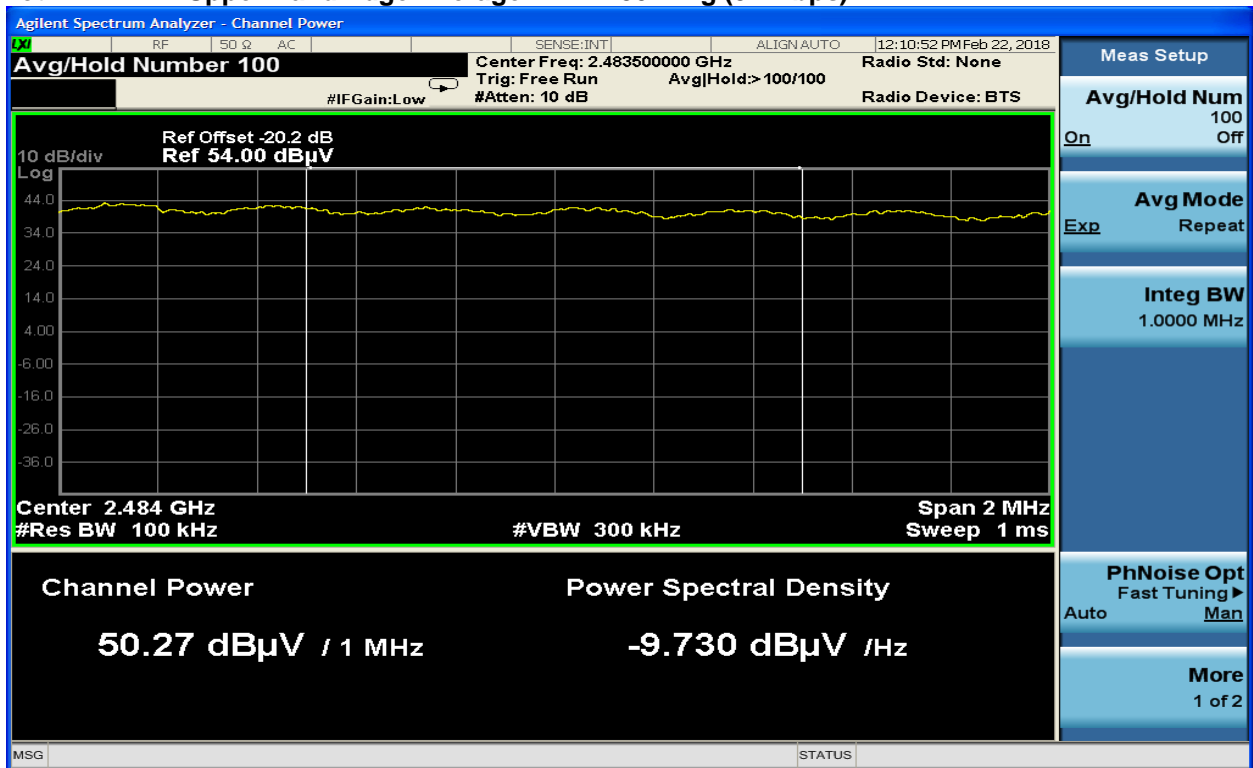


Plot 4-22: Upper Band Edge Peak: Wi-Fi 802.11g (54 Mbps)

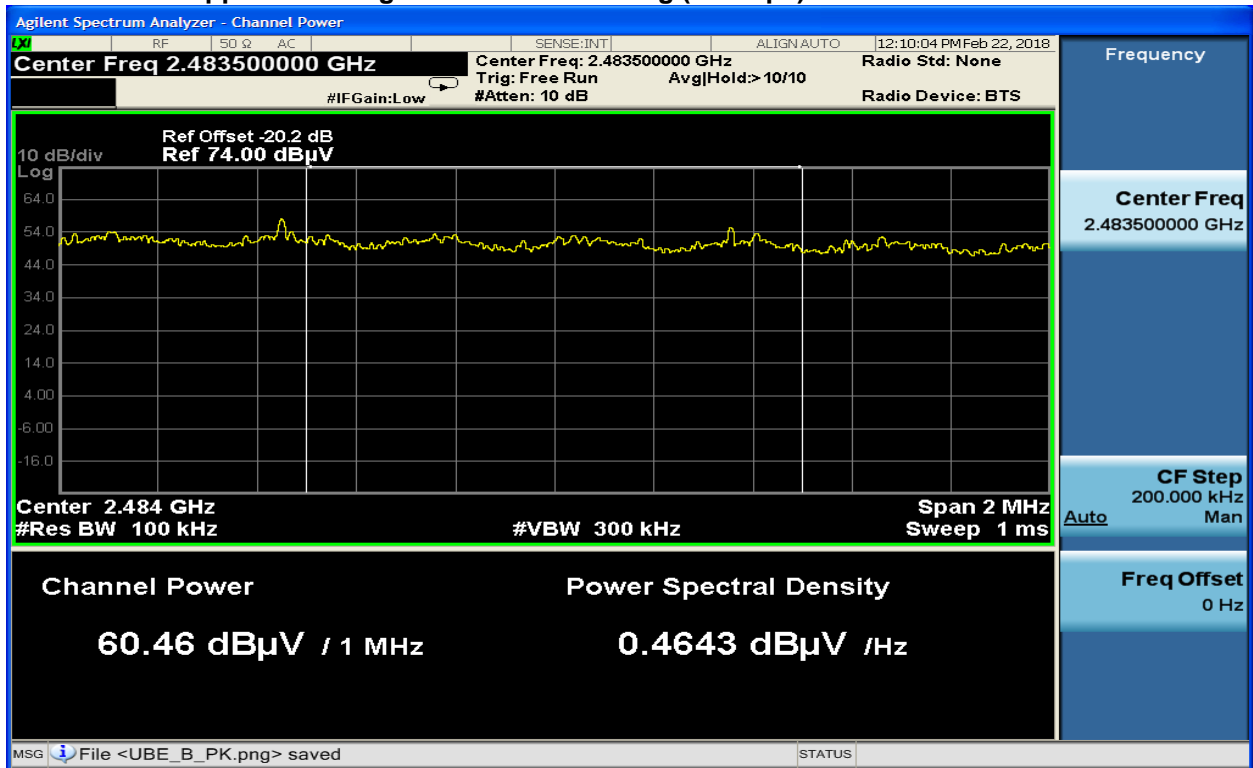

Plot 4-23: Upper Band Edge Average: Wi-Fi 802.11n (65 Mbps)

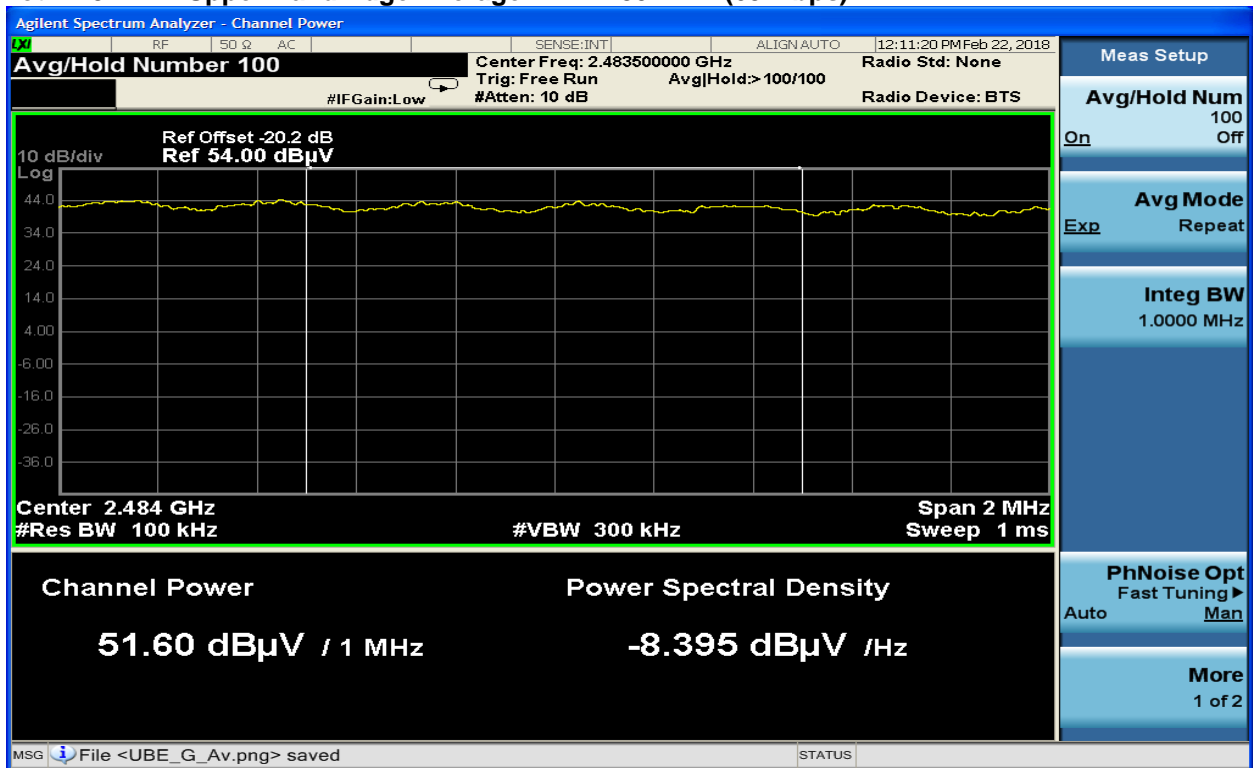

Plot 4-24: Upper Band Edge Peak: Wi-Fi 802.11n (65 Mbps)

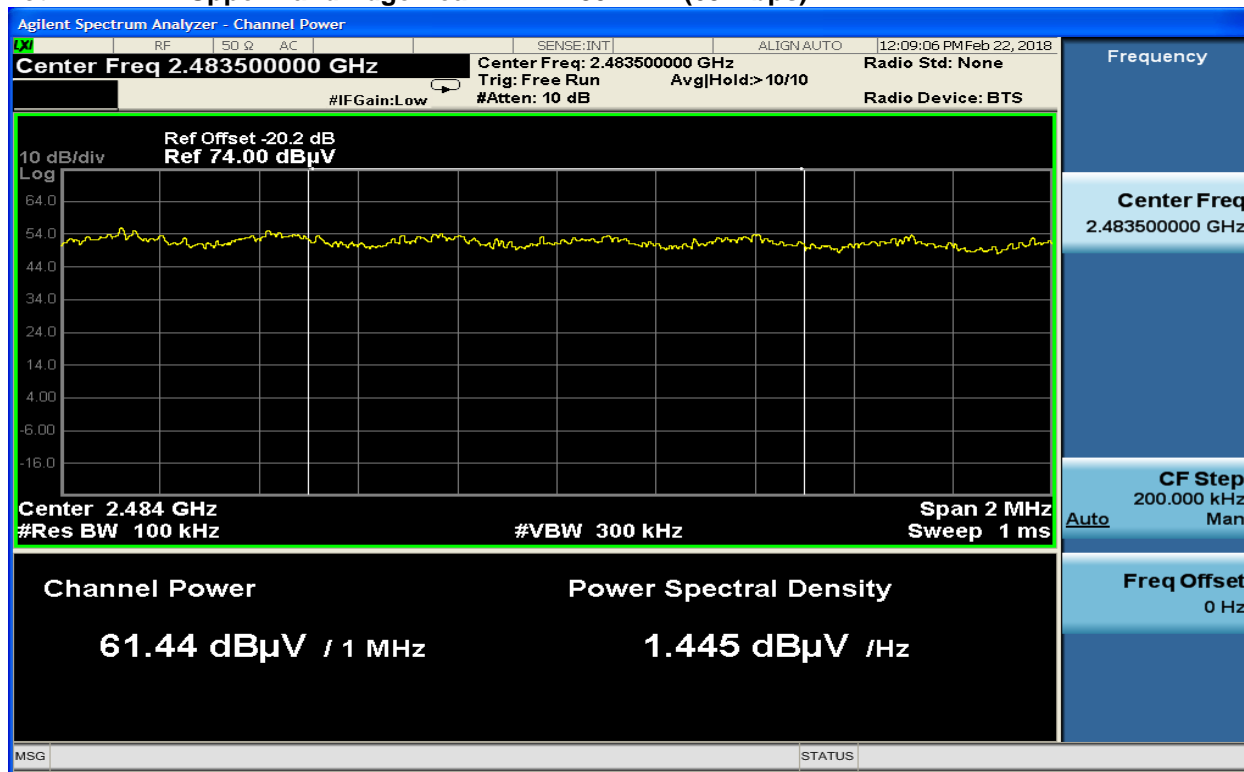

Measurement uncertainty: $\pm 1.4\%$. This measurement uncertainty is an expanded uncertainty for 95.45% confidence level received with a coverage factor $k=2$.

Table 4-1: Band Edge Test Equipment

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901583	Agilent Technologies	N9010A	EXA Signal Analyzer (10 Hz-26.5 GHz)	MY51250846	2/6/20

PASS

Test Personnel:

Daniel W. Baltzell Test Engineer	 Signature	February 22, 2018 Date of Test
-------------------------------------	--	-----------------------------------

5 Antenna Conducted Spurious Emissions – FCC 15.247(d); RSS-Gen

5.1 Antenna Conducted Spurious Emissions Test Procedures

Antenna conducted spurious emissions per FCC 15.247(d) were measured from the EUT antenna port using a 50-ohm spectrum analyzer with the resolution bandwidth set at 100 kHz, and the video bandwidth set at 300 kHz. The modulated carrier was identified at the following frequencies: 2412 MHz, 2437 MHz and 2462 MHz for Wi-Fi; 2402 MHz, 2441 MHz and 2480 MHz for ANT+; 2402 MHz, 2440 MHz and 2480 MHz for BLE and Bluetooth modes.

5.2 Antenna Conducted Spurious Emissions Test Results

No harmonics or spurs were found within 20 dB (note that we are reporting power as peak) of the carrier level from the carrier to the 10th harmonic of the carrier frequency. Per FCC 15.31(o), no data is being reported.


Table 5-1: Antenna Conducted Spurious Test Equipment

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due 1
901583	Agilent Technologies	N9010A	EXA Signal Analyzer (10 Hz-26.5 GHz)	MY51250846	2/6/20

Measurement uncertainty: Measurement uncertainties shown for these tests are expanded uncertainties expressed at 95% confidence level using a coverage factor k = 2. Measurement uncertainty= -2 dB / +2 dB.

PASS

Test Personnel:

Daniel W. Baltzell		February 21-March 13, 2018
Test Engineer	Signature	Dates of Test

6 20 dB Bandwidth – FCC 15.247(a)(1); RSS-247 5.1

6.1 20 dB Bandwidth Test Procedure


The minimum 20 dB bandwidths per FCC 15.247(a)(1) were measured using a 50-ohm spectrum analyzer with the resolution bandwidth set at 100 kHz, and the video bandwidth set at $\geq 3 \times \text{RBW}$. The device was modulated. The minimum 20 dB bandwidths are presented below.

6.2 20 dB Bandwidth Test Data


Table 6-1: 20 dB Bandwidth Test Data – Bluetooth

Channel	Frequency (MHz)	20 dB Bandwidth (MHz)
2	2402	1.110
40	2440	1.147
80	2480	1.146

Plot 6-1: 20 dB Bandwidth Channel 2 (TX Frequency 2402 MHz) – Bluetooth

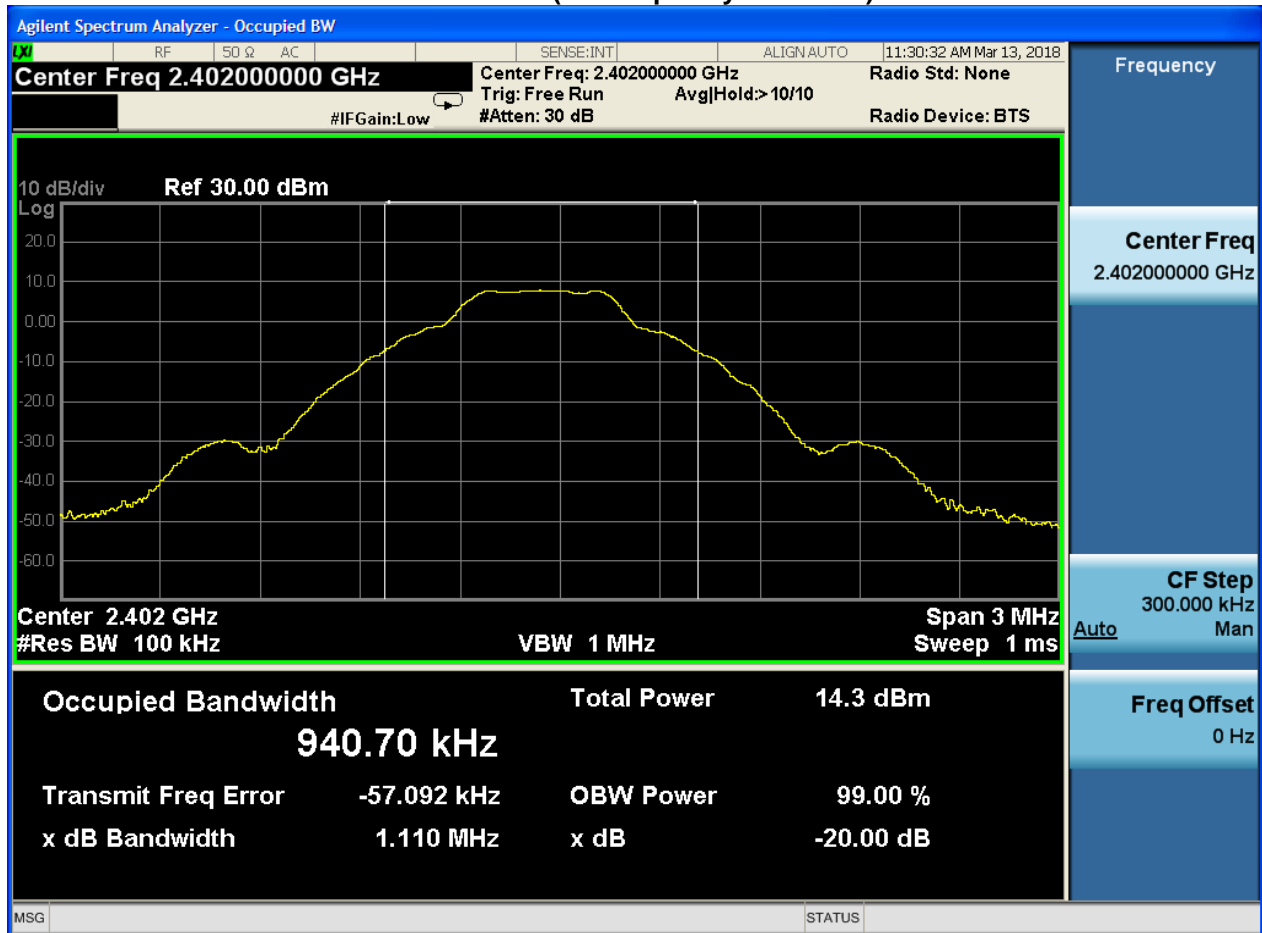

Plot 6-2: 20 dB Bandwidth Channel 40 (TX Frequency 2440 MHz) – Bluetooth

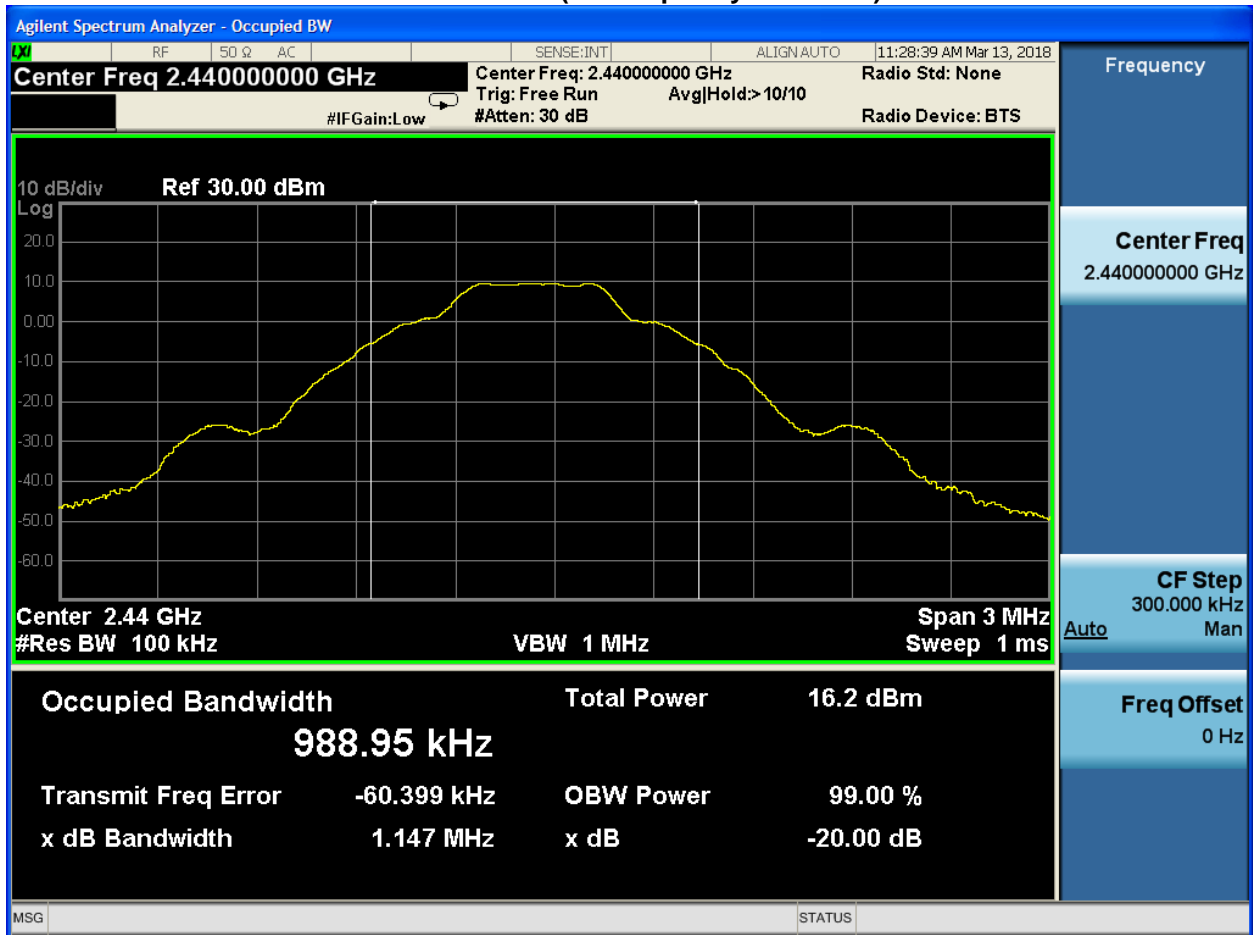

Plot 6-3: 20 dB Bandwidth Channel 80 (TX Frequency 2480 MHz) – Bluetooth

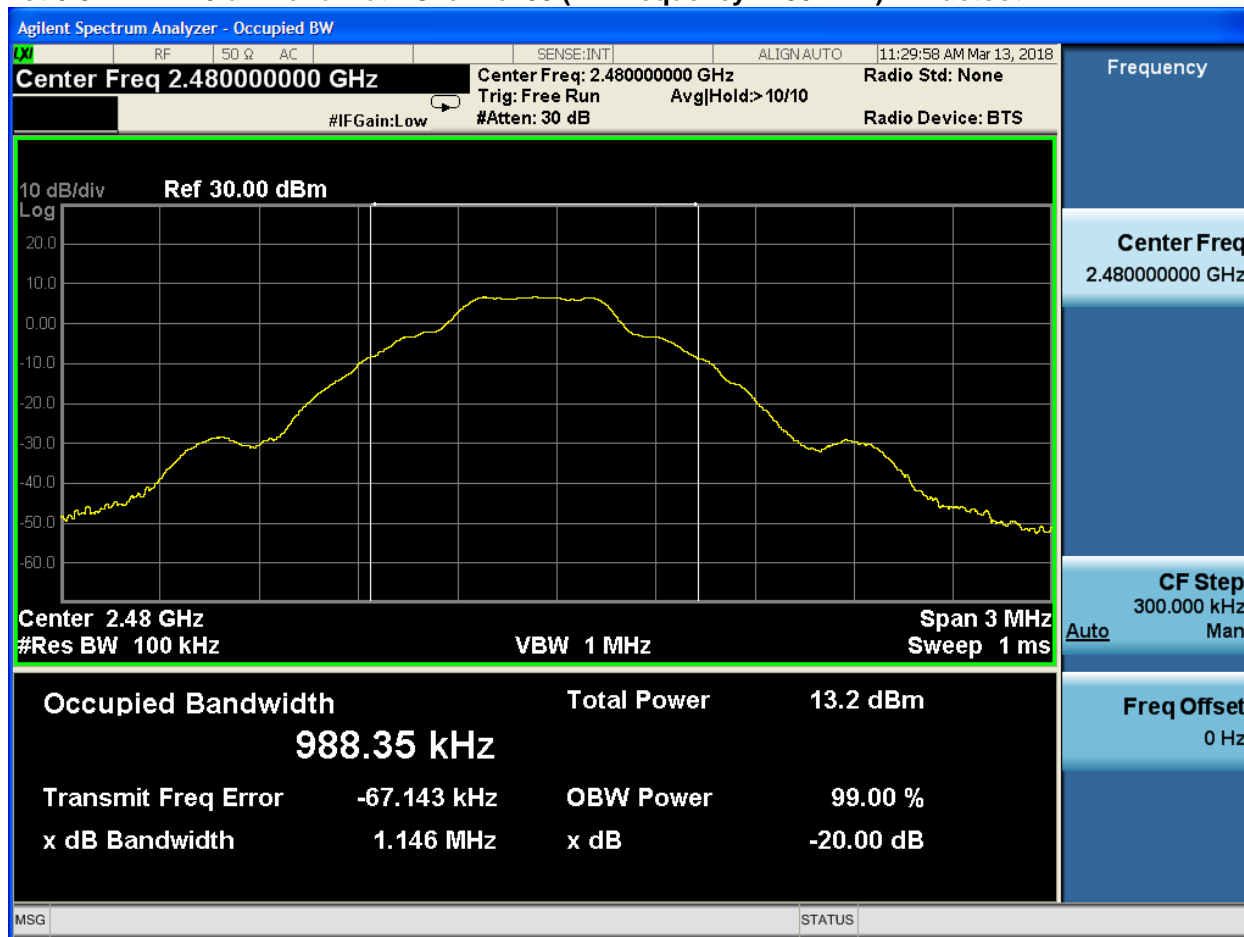


Table 6-2: 20 dB Bandwidth Test Equipment

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901583	Agilent Technologies	N9010A	EXA Signal Analyzer (10 Hz-26.5 GHz)	MY51250846	2/6/20

Measurement uncertainty: Measurement uncertainties shown for these tests are expanded uncertainties expressed at 95% confidence level using a coverage factor k = 2. Measurement uncertainty = -2 dB/+2 dB.

PASS

Test Personnel:

Daniel W. Baltzell Test Engineer	 Signature	March 13, 2018 Date of Test
-------------------------------------	---------------	--------------------------------

7 6 dB Bandwidth – FCC 15.247(a)(2); RSS-247 5.2

7.1 6 dB Bandwidth Test Procedure – Minimum 6 dB Bandwidth

The minimum 6 dB bandwidths per FCC 15.247(a)(2) were measured using a 50-ohm spectrum analyzer with the resolution bandwidth set at 100 kHz, and the video bandwidth set at $\geq 3xRBW$. The device was modulated. The minimum 6 dB bandwidths are presented below.

7.2 6 dB Bandwidth Test Results

Table 7-1: 6 dB Bandwidth Test Data – ANT+

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass/Fail
Low	2402	0.515	0.5	Pass
Mid	2441	0.516	0.5	Pass
High	2480	0.516	0.5	Pass

Table 7-2: 6 dB Bandwidth Test Data – BLE PRB29

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass/Fail
0	2402	0.556	0.5	Pass
19	2440	0.560	0.5	Pass
39	2480	0.551	0.5	Pass

Table 7-3: 6 dB Bandwidth Test Data – BLE 0x0F

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass/Fail
0	2402	0.723	0.5	Pass
19	2440	0.716	0.5	Pass
39	2480	0.705	0.5	Pass

Table 7-4: 6 dB Bandwidth Test Data – BLE 0x55

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass/Fail
0	2402	0.610	0.5	Pass
19	2440	0.607	0.5	Pass
39	2480	0.601	0.5	Pass

Table 7-5: 6 dB Bandwidth Test Data – 802.11b (11 Mbps)

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass/Fail
1	2412	11.86	0.5	Pass
6	2437	11.68	0.5	Pass
11	2462	11.40	0.5	Pass


Table 7-6: 6 dB Bandwidth Test Data – 802.11g (54 Mbps)

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass/Fail
1	2412	16.55	0.5	Pass
6	2437	16.56	0.5	Pass
11	2462	16.57	0.5	Pass


Table 7-7: 6 dB Bandwidth Test Data – 802.11n (65 Mbps)

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass/Fail
1	2412	17.80	0.5	Pass
6	2437	17.75	0.5	Pass
11	2462	17.77	0.5	Pass


Plot 7-1: 6 dB Bandwidth Channel Low (TX Frequency 2402 MHz) - ANT+

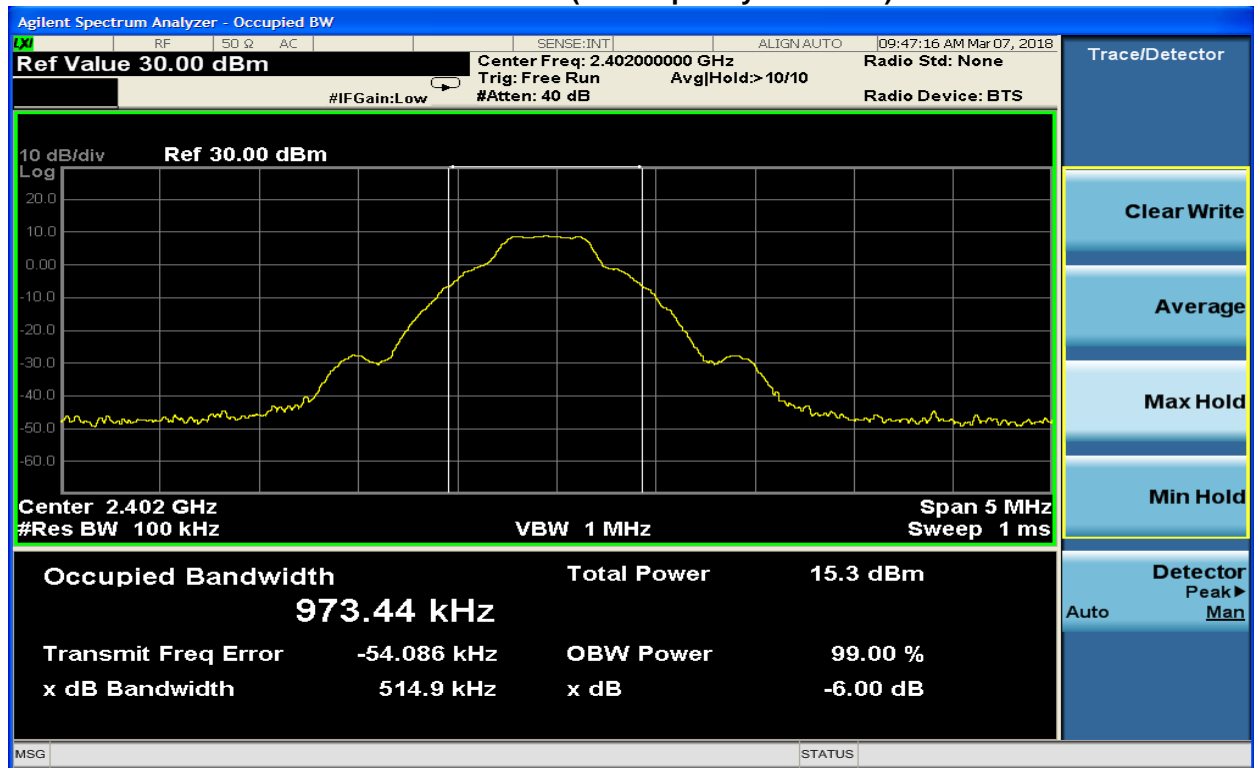


Plot 7-2: 6 dB Bandwidth Channel Mid (TX Frequency 2441 MHz) - ANT+

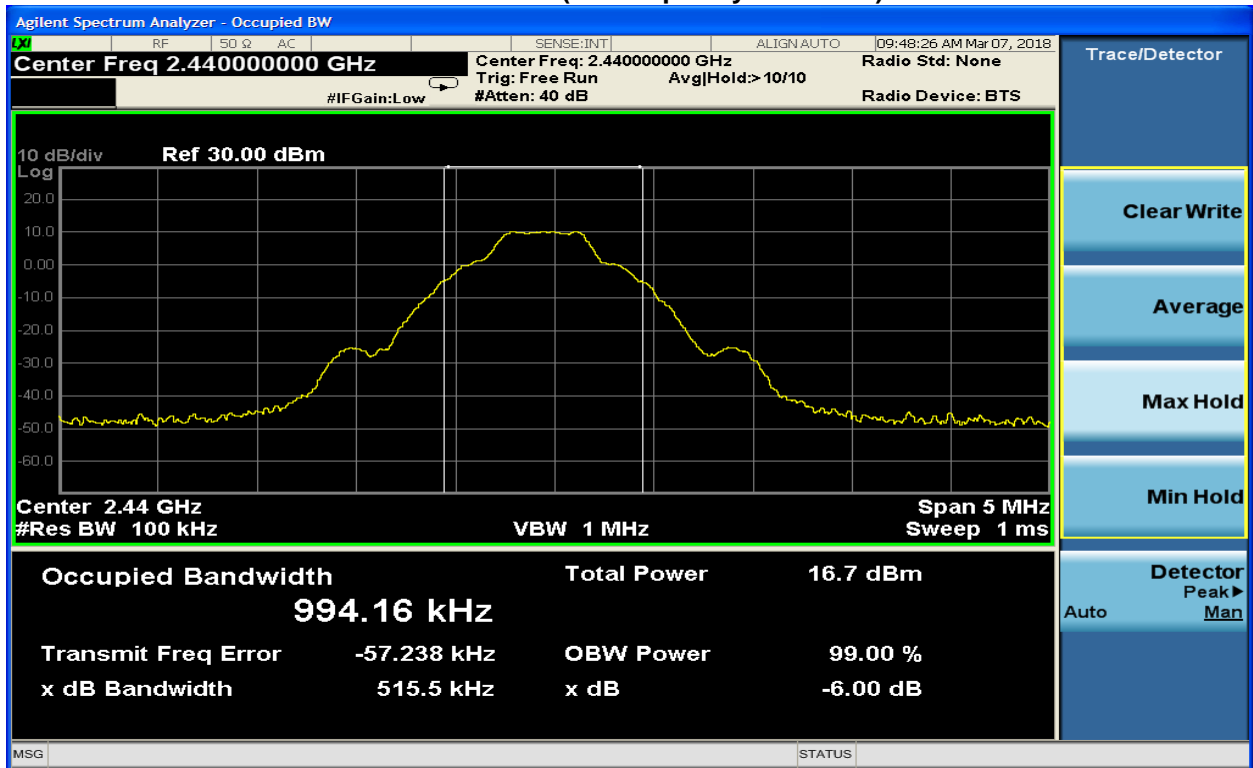


Plot 7-3: 6 dB Bandwidth Channel High (TX Frequency 2480 MHz) - ANT+

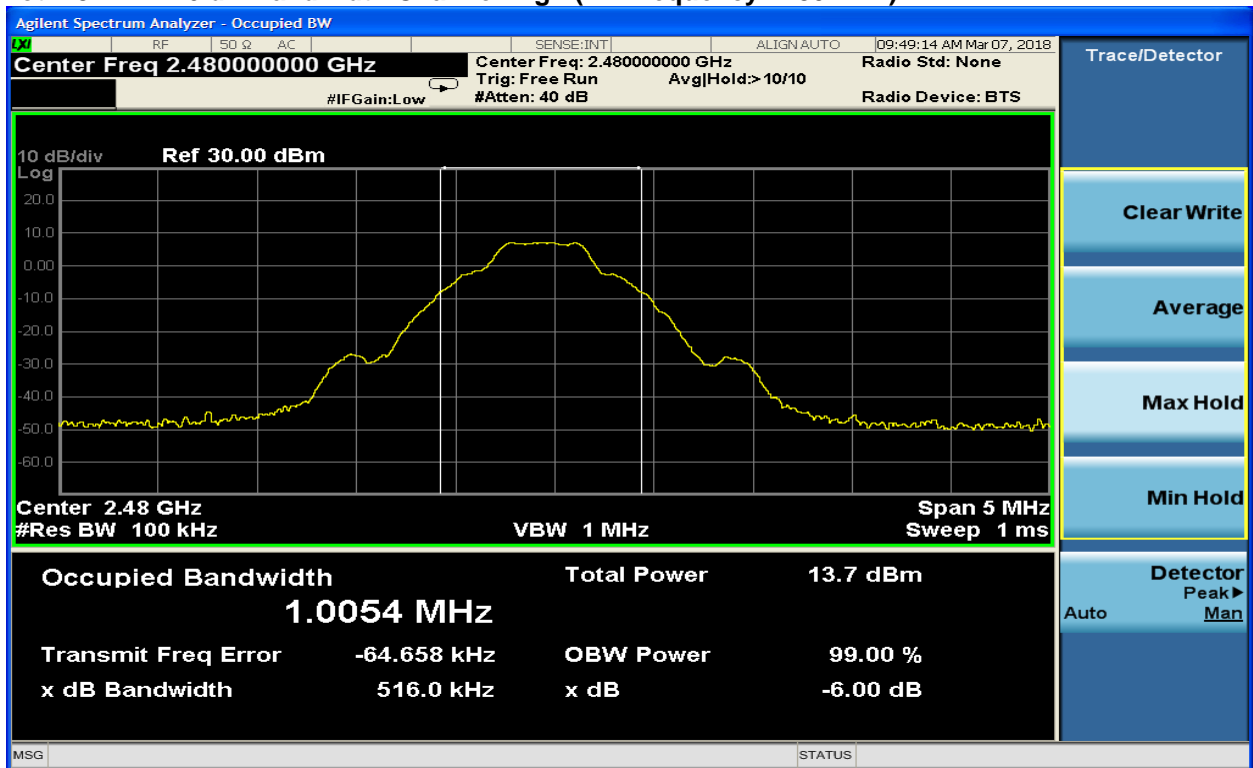


Plot 7-4: 6 dB Bandwidth Channel 1 (TX Frequency 2402 MHz) – BLE (PRB29)

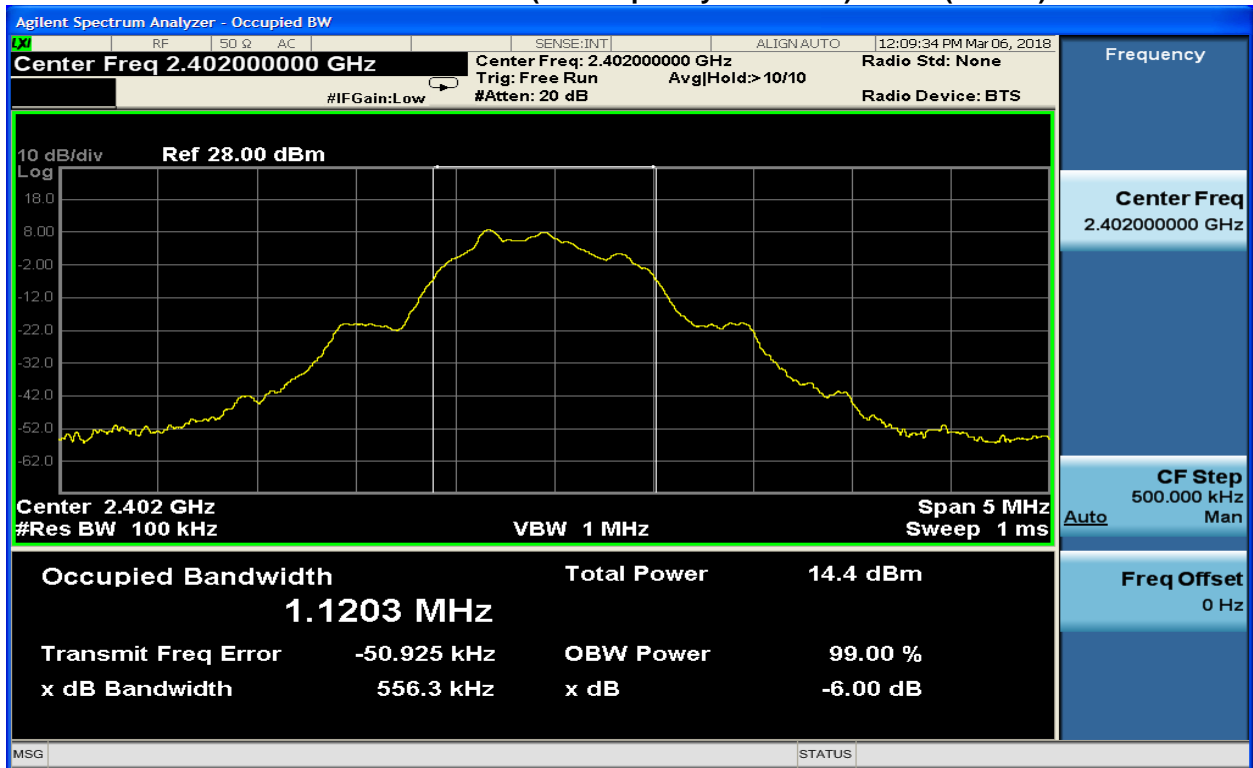


Plot 7-5: 6 dB Bandwidth Channel 19 (TX Frequency 2440 MHz) – BLE (PRB29)

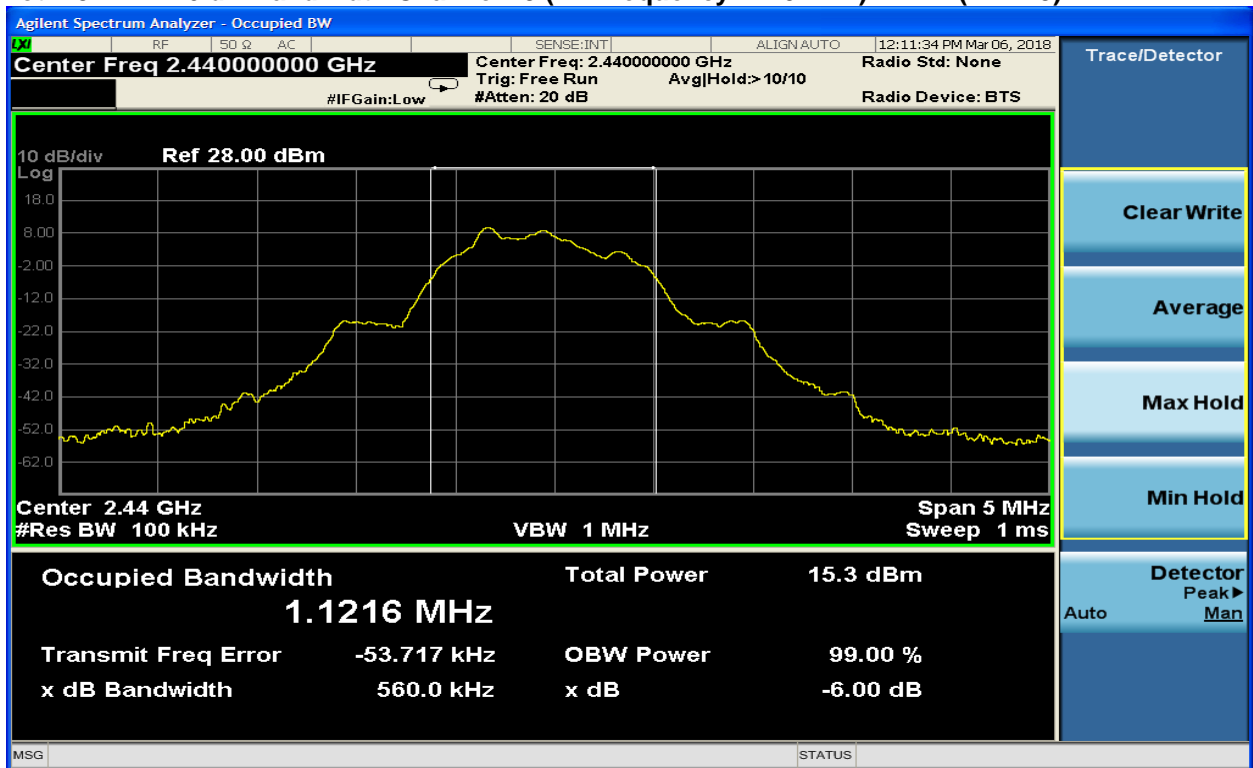


Plot 7-6: 6 dB Bandwidth Channel 39 (TX Frequency 2480 MHz) – BLE (PRB29)

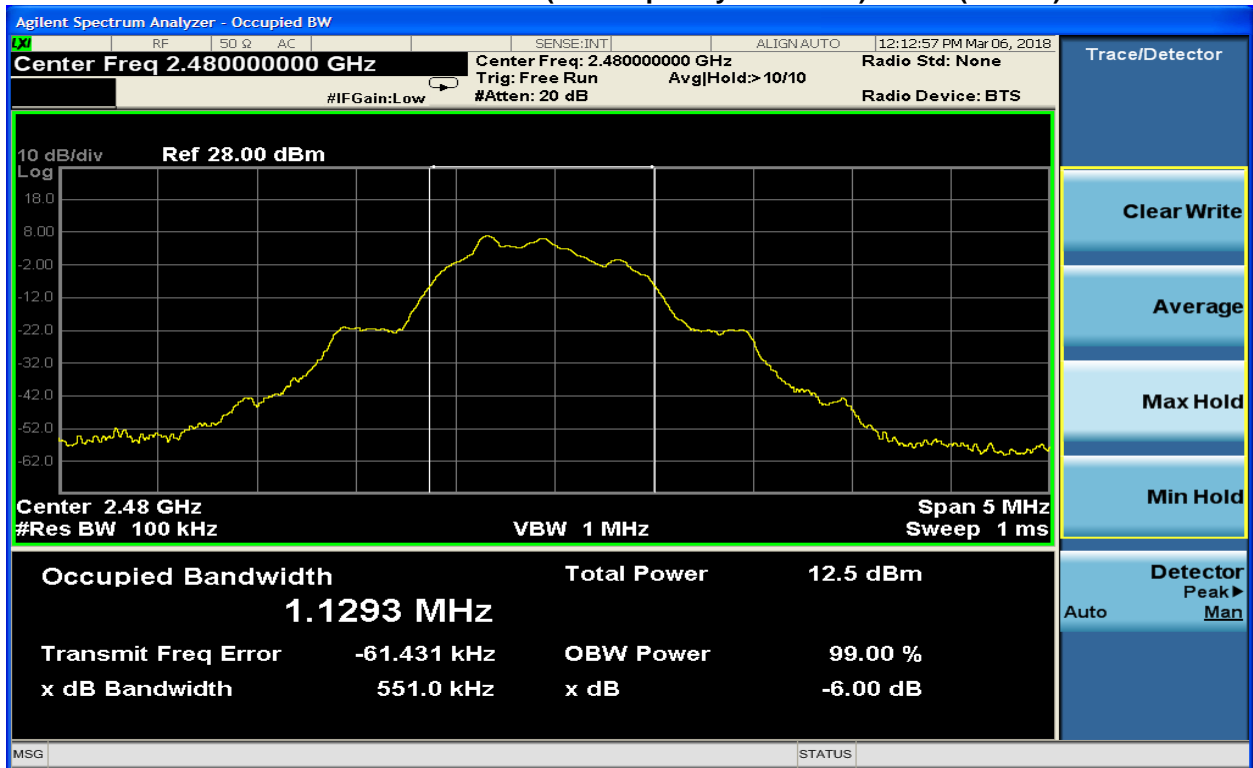


Plot 7-7: 6 dB Bandwidth Channel 1 (TX Frequency 2402 MHz) – BLE (0x0F)

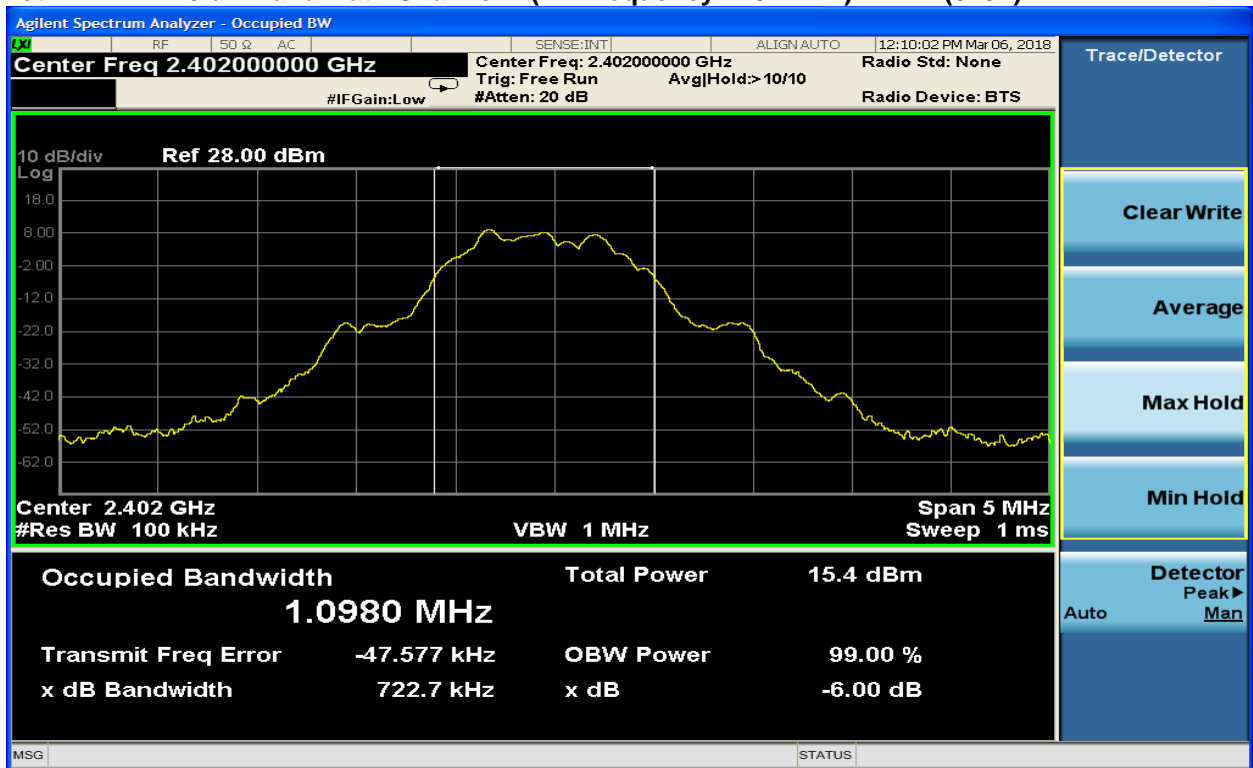


Plot 7-8: 6 dB Bandwidth Channel 19 (TX Frequency 2440 MHz) – BLE (0x0F)

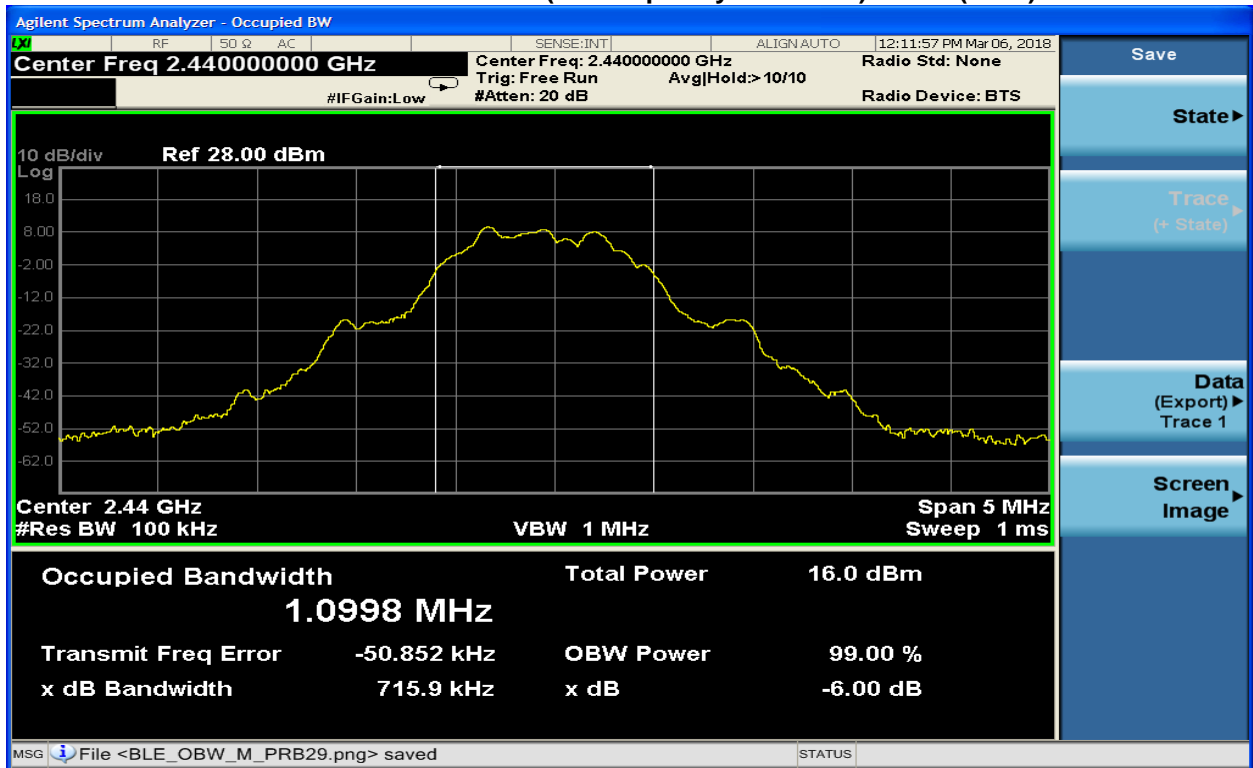


Plot 7-9: 6 dB Bandwidth Channel 39 (TX Frequency 2480 MHz) – BLE (0x0F)

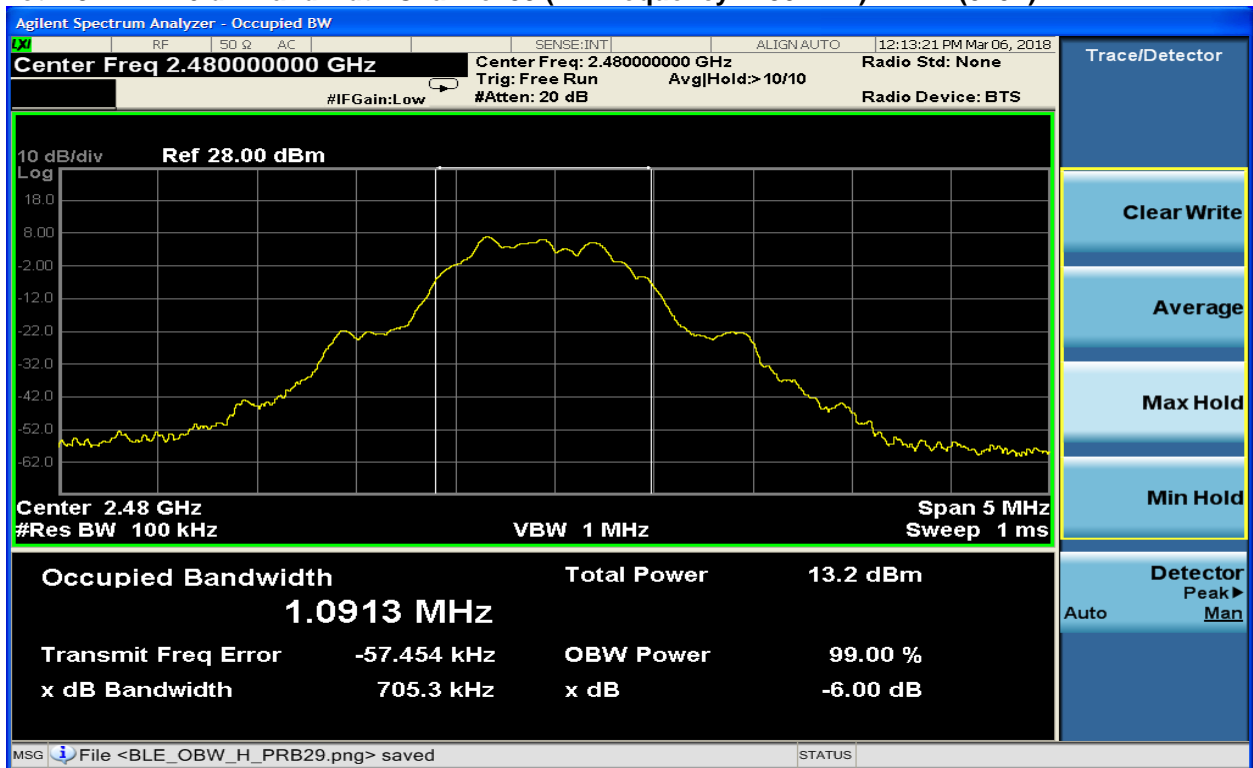


Plot 7-10: 6 dB Bandwidth Channel 1 (TX Frequency 2402 MHz) – BLE (0x55)

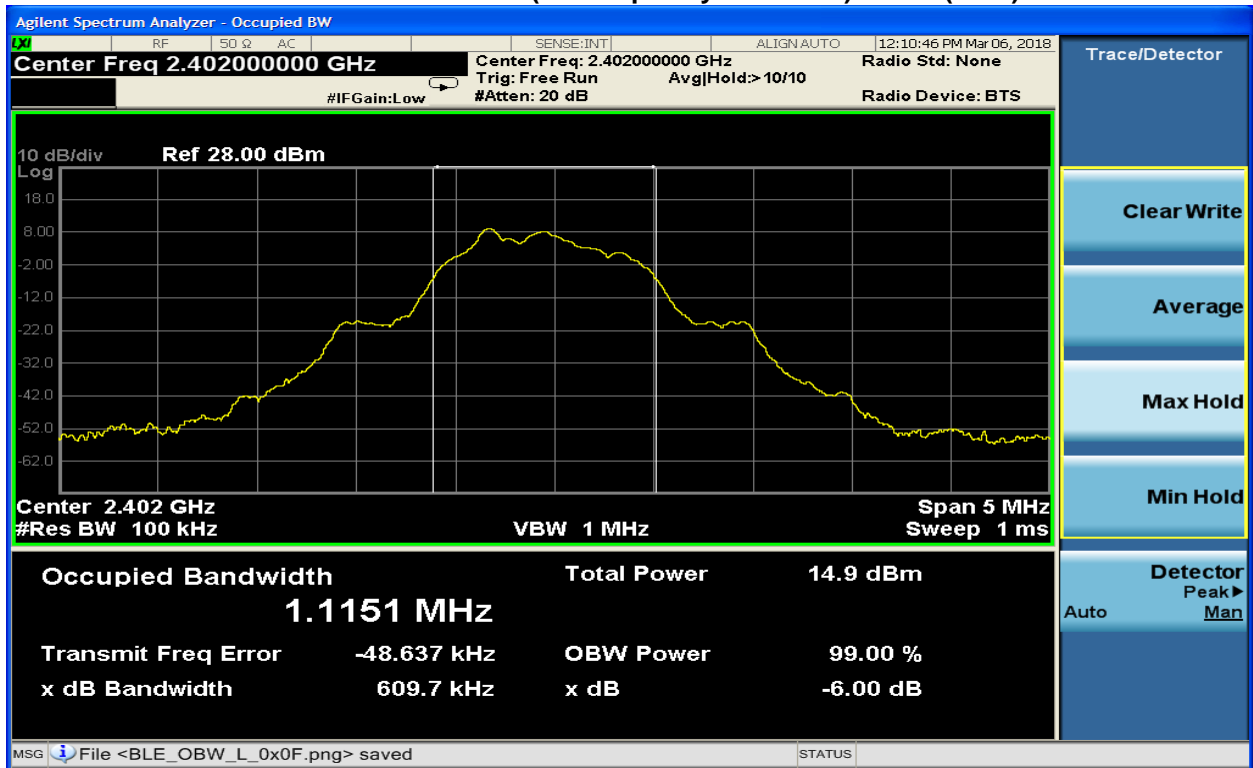


Plot 7-11: 6 dB Bandwidth Channel 19 (TX Frequency 2440 MHz) – BLE (0x55)

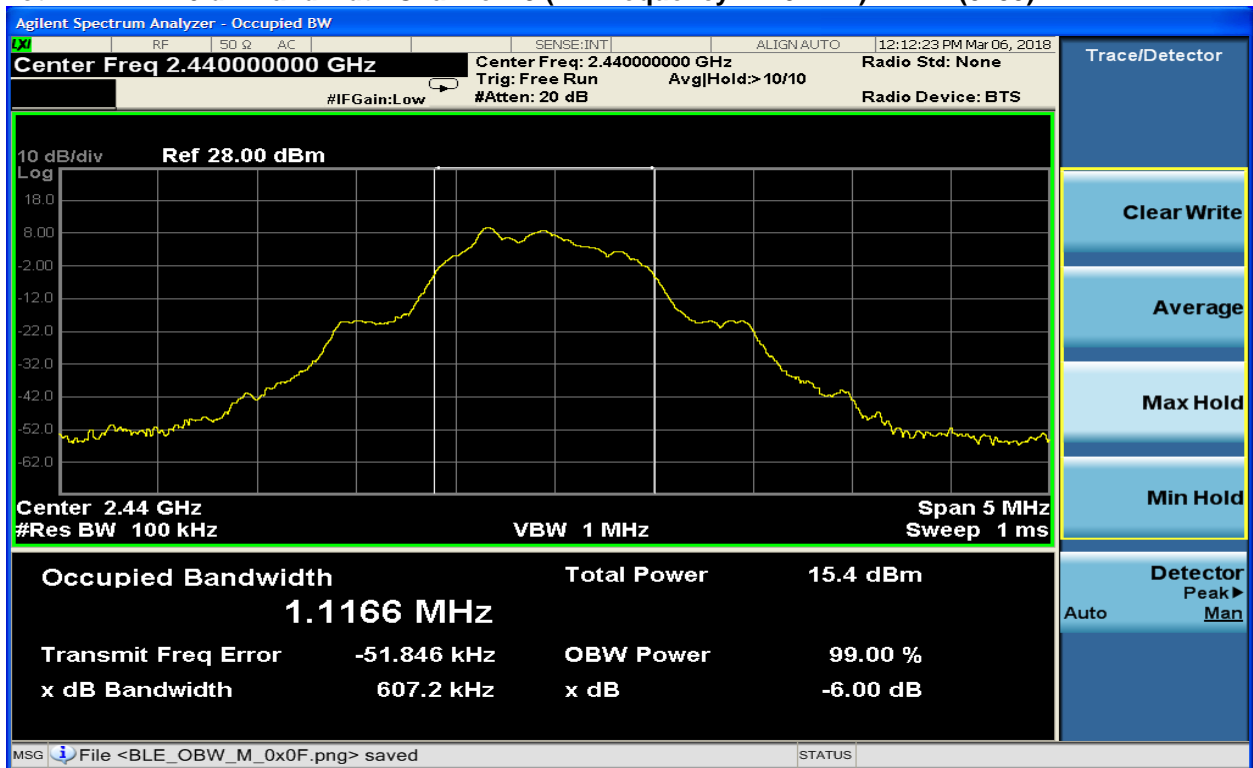


Plot 7-12: 6 dB Bandwidth Channel 39 (TX Frequency 2480 MHz) – BLE (0x55)

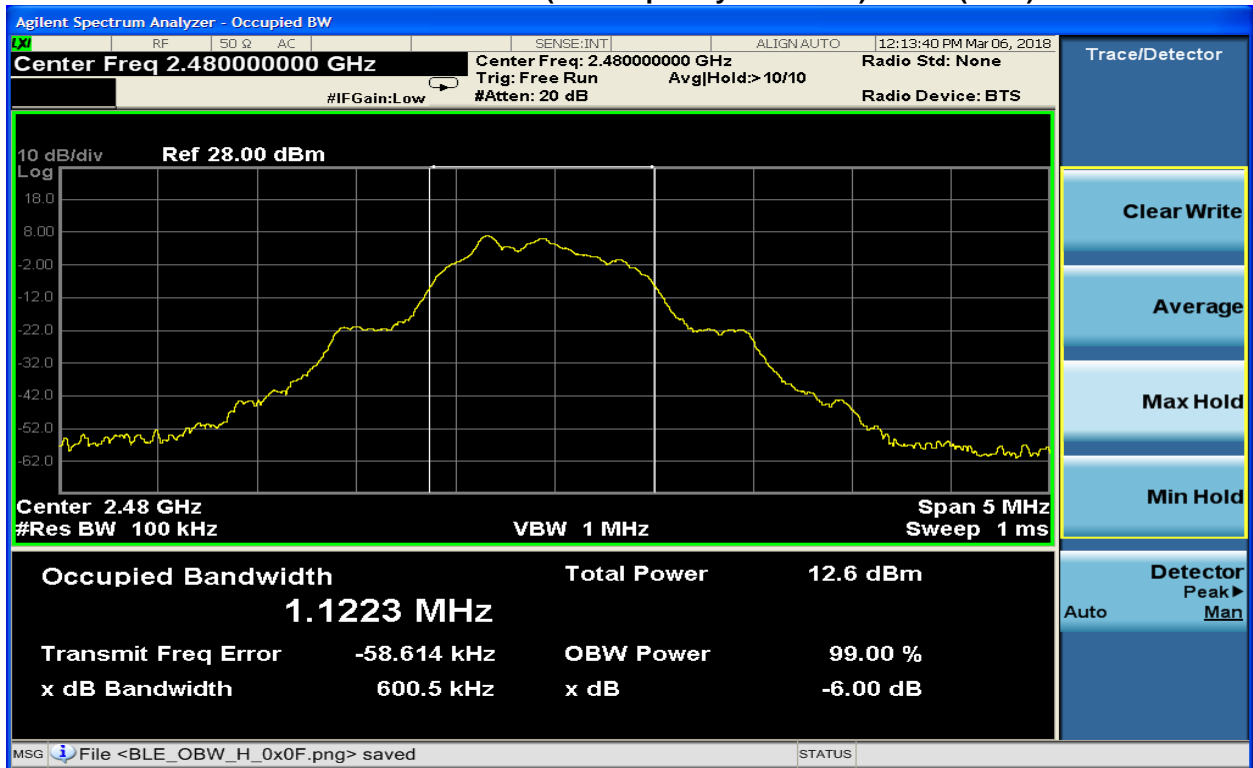


Plot 7-13: 6 dB Bandwidth Channel 1 (TX Frequency 2412 MHz) - 802.11b (11 Mbps)

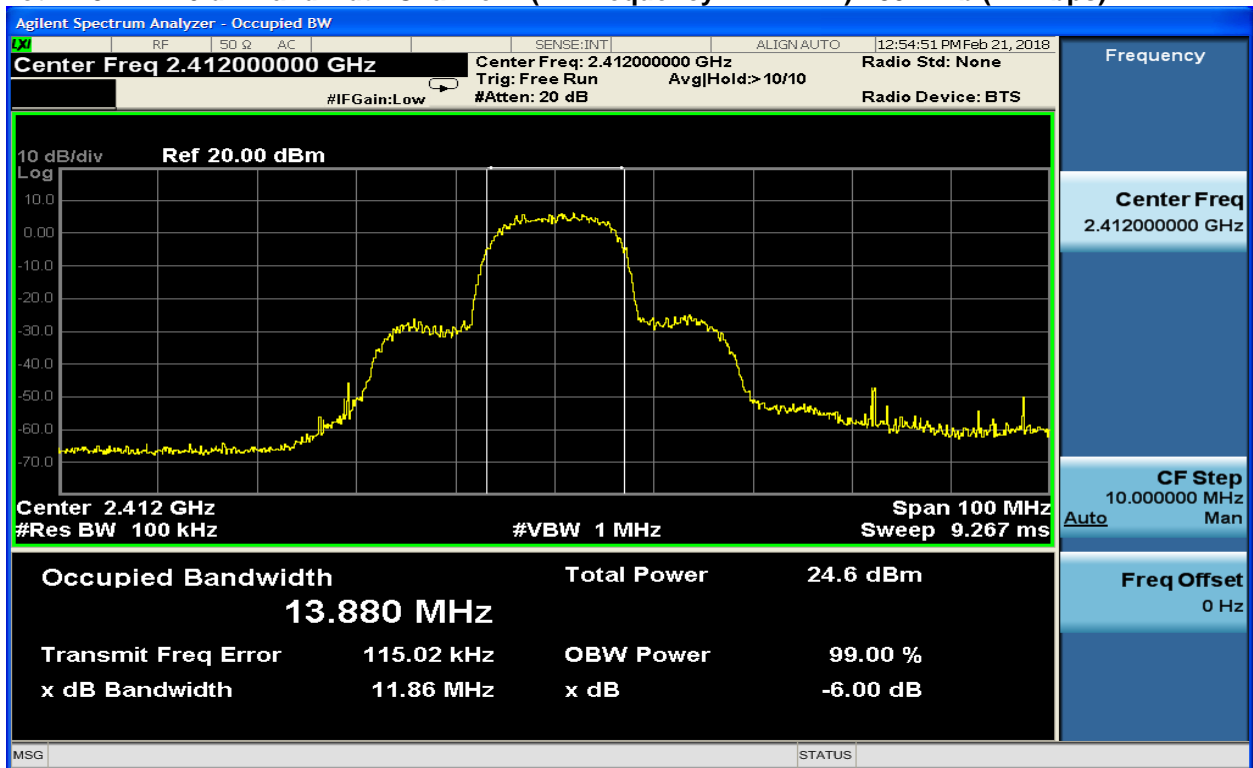


Plot 7-14: 6 dB Bandwidth Channel 6 (TX Frequency 2437 MHz) - 802.11b (11 Mbps)

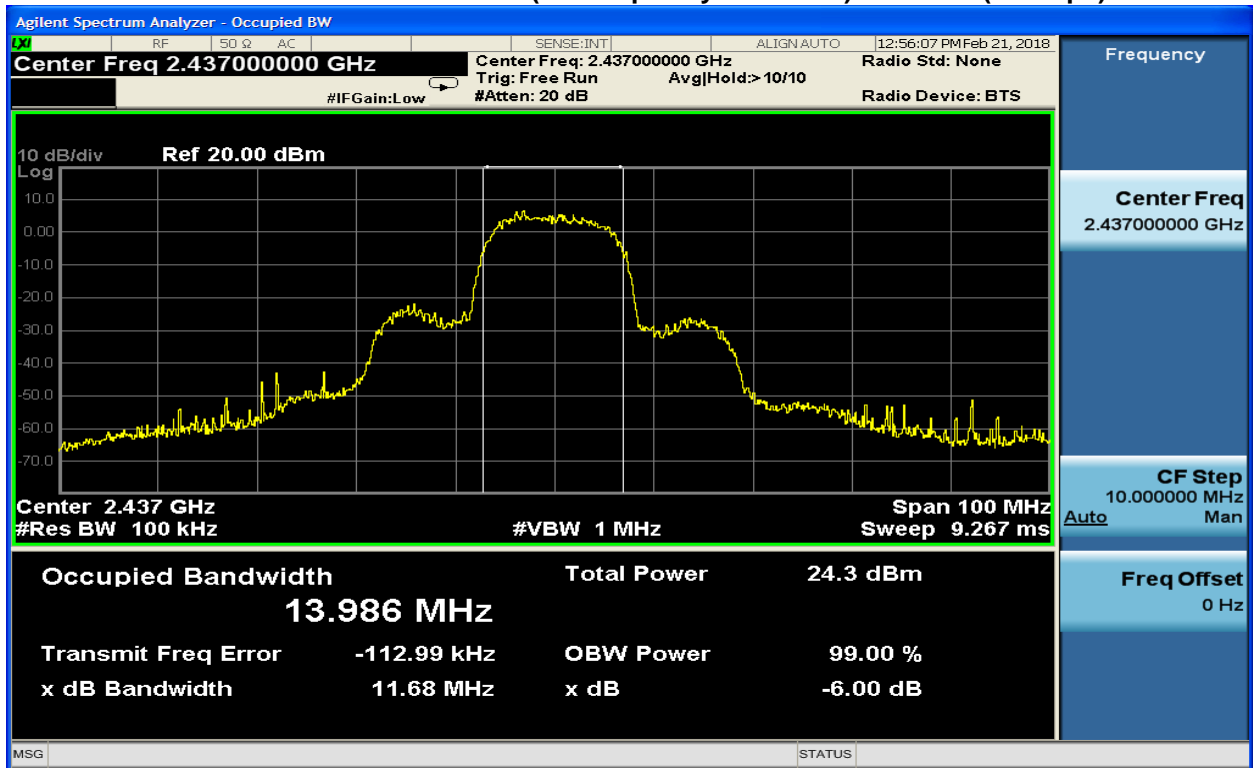


Plot 7-15: 6 dB Bandwidth Channel 11 (TX Frequency 2462 MHz) - 802.11b (11 Mbps)

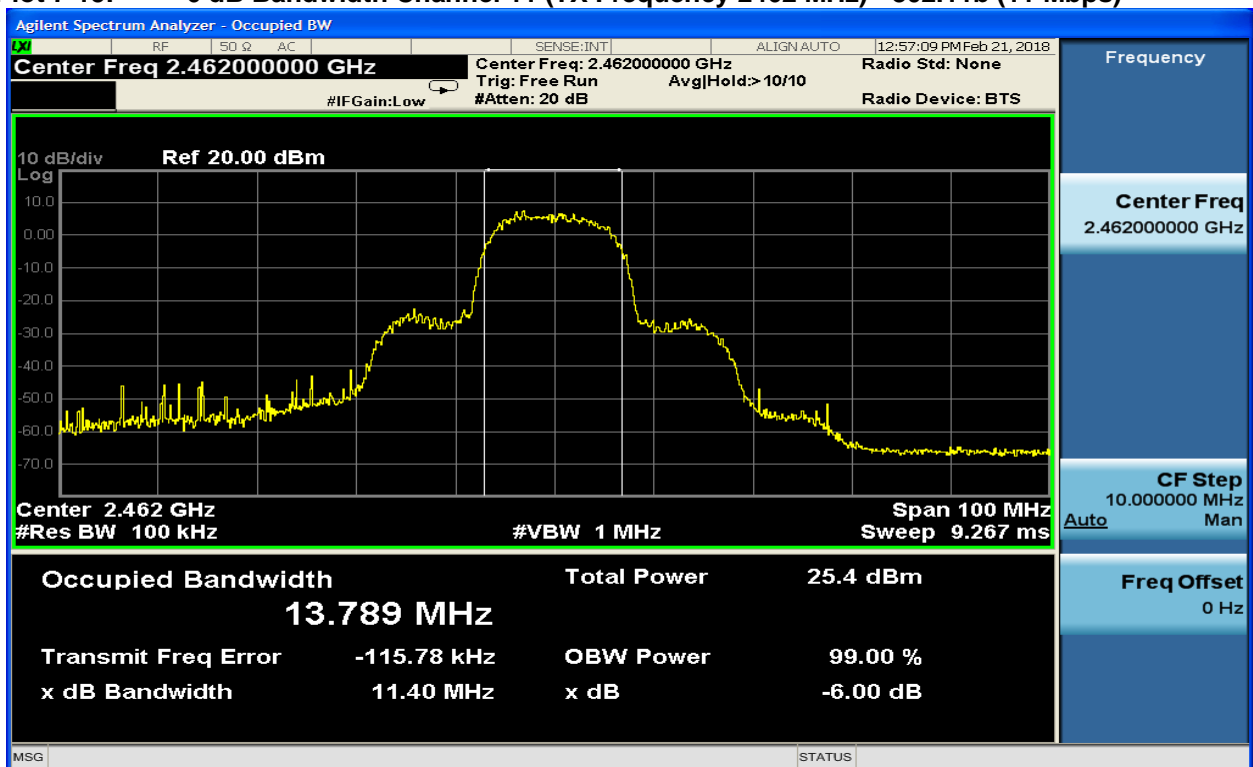


Plot 7-16: 6 dB Bandwidth Channel 1 (TX Frequency 2412 MHz) - 802.11g (54 Mbps)

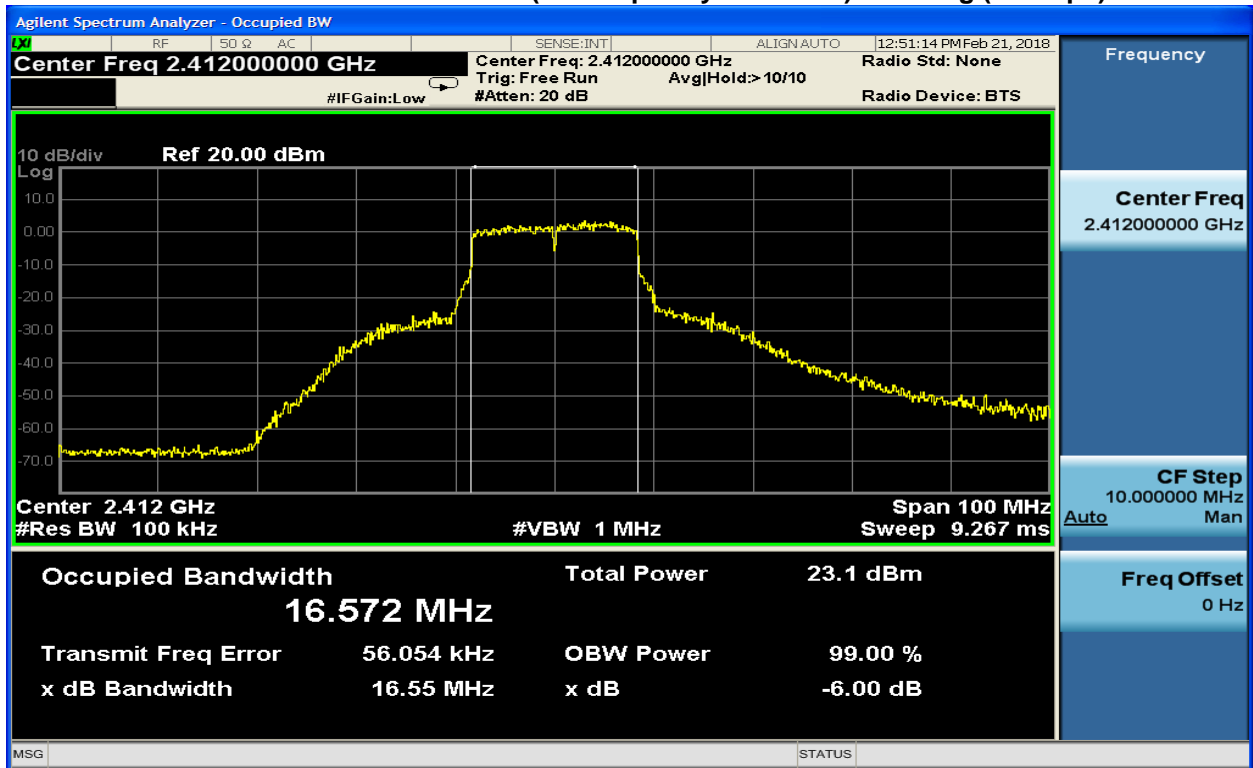


Plot 7-17: 6 dB Bandwidth Channel 6 (TX Frequency 2437 MHz) - 802.11g (54 Mbps)

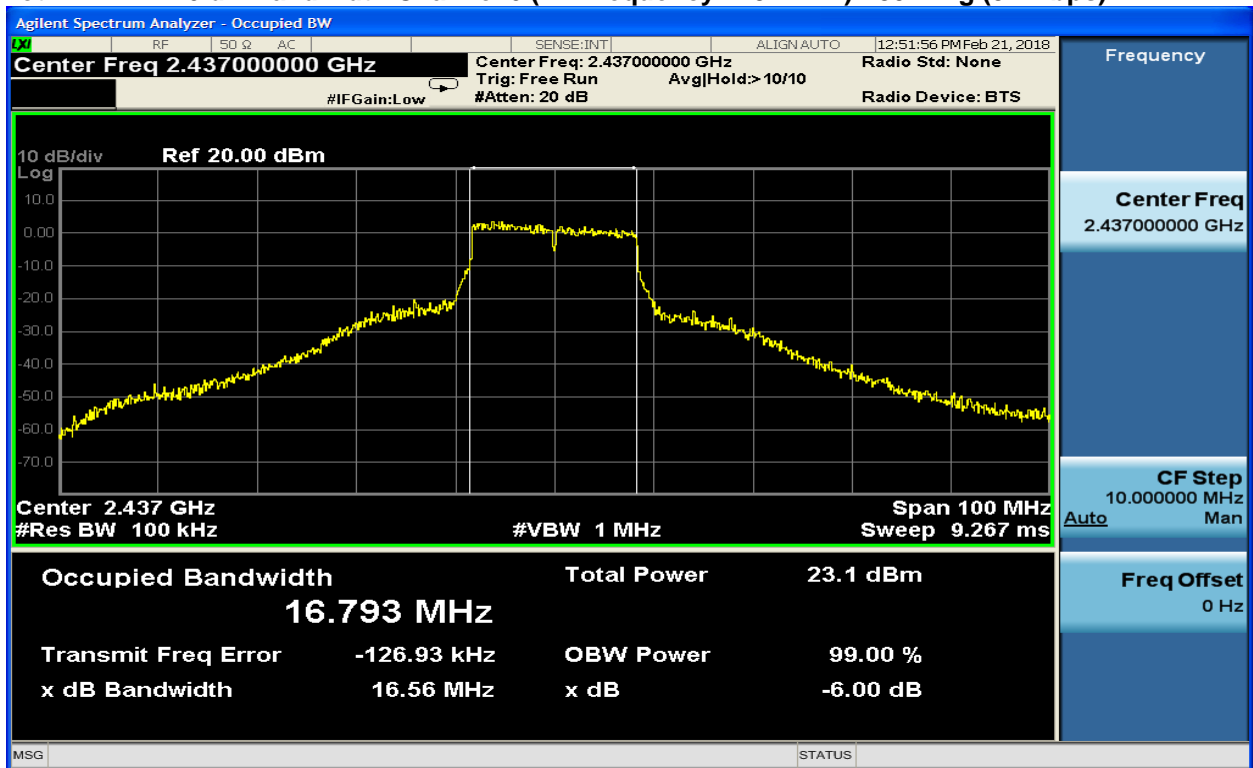


Plot 7-18: 6 dB Bandwidth Channel 11 (TX Frequency 2462 MHz) - 802.11g (54 Mbps)

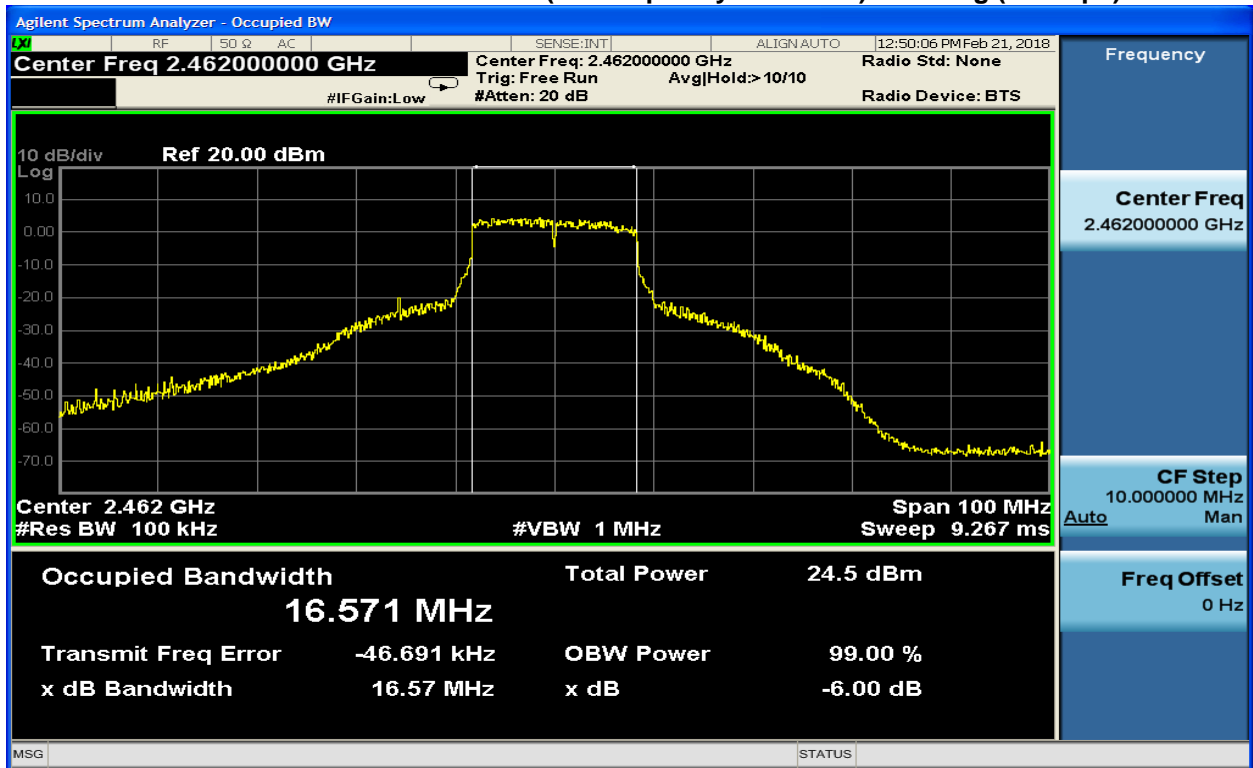


Plot 7-19: 6 dB Bandwidth Channel 1 (TX Frequency 2412 MHz) - 802.11n (65 Mbps)

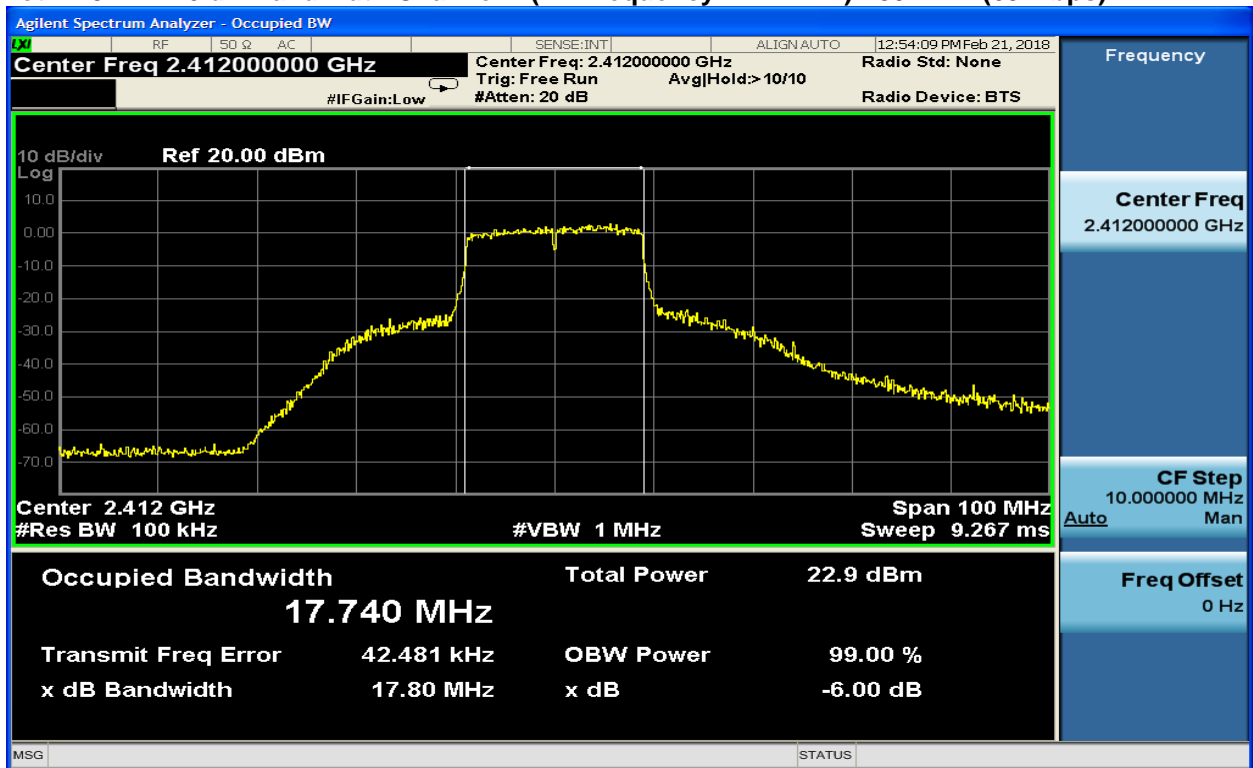

Plot 7-20: 6 dB Bandwidth Channel 6 (TX Frequency 2437 MHz) - 802.11n (65 Mbps)

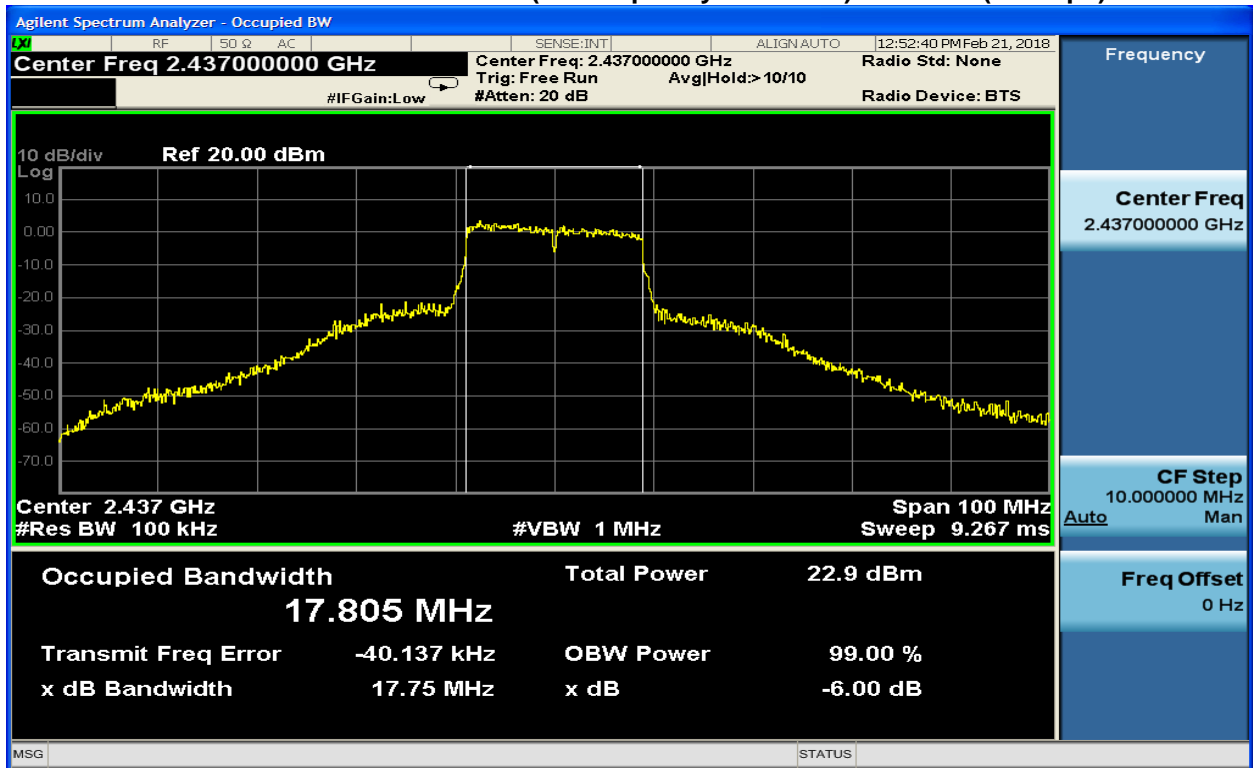

Plot 7-21: 6 dB Bandwidth Channel 11 (TX Frequency 2462 MHz) - 802.11n (65 Mbps)

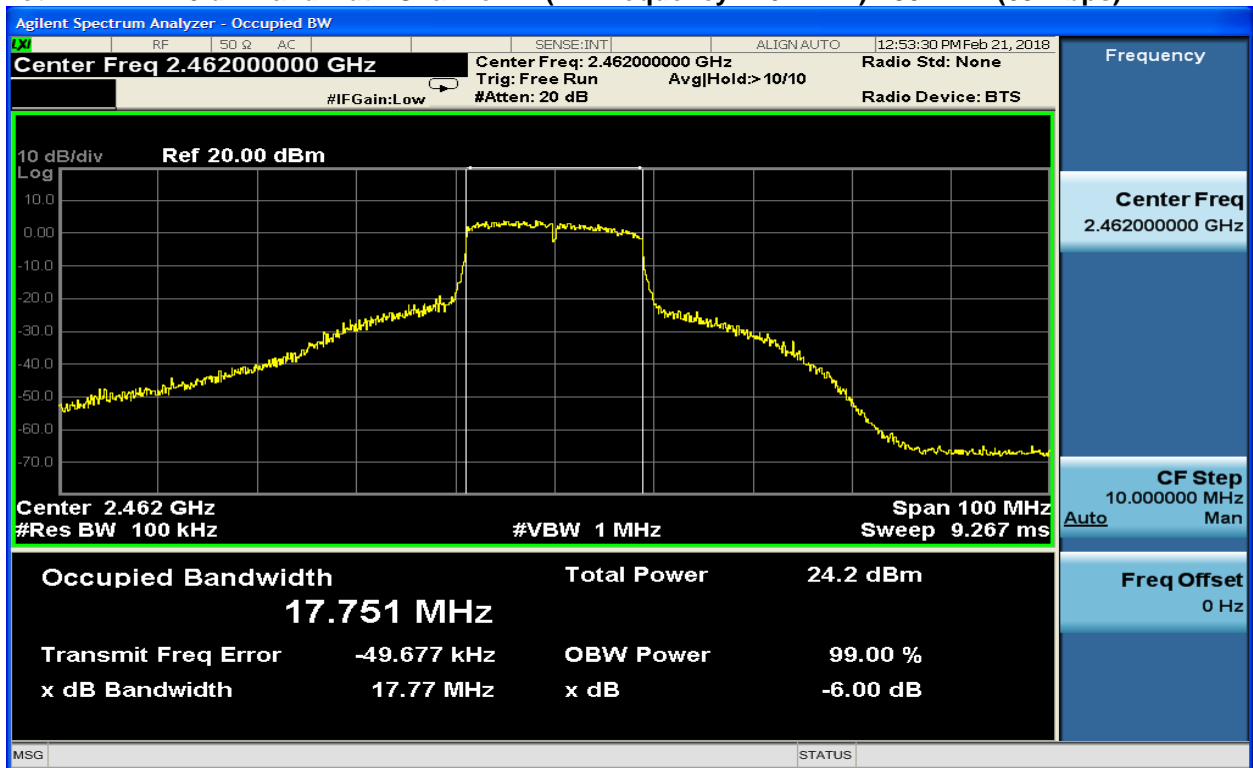

Measurement uncertainty: Measurement uncertainties shown for these tests are expanded uncertainties expressed at 95% confidence level using a coverage factor $k = 2$. Measurement uncertainty = $-2 \text{ dB}/+2 \text{ dB}$.

Table 7-8: 6 dB Bandwidth Test Equipment

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901583	Agilent Technologies	N9010A	EXA Signal Analyzer (10 Hz-26.5 GHz)	MY51250846	2/6/20

PASS

Test Personnel:

Daniel W. Baltzell Test Engineer	 Signature	February 21, March 6 & 7, 2018 Dates of Test
-------------------------------------	--	---

8 Power Spectral Density – FCC 15.247(e); RSS-247 5.2(b)

8.1 Power Spectral Density Test Procedure

The power spectral density per FCC 15.247(e) was measured using a 50-ohm spectrum analyzer with the resolution bandwidth set at 3 kHz, the video bandwidth set at 30 kHz, and the auto sweep time. The spectral lines were resolved for the modulated carriers at 2412 MHz, 2437 MHz and 2462 MHz. These levels are below the +8 dBm limit. See the power spectral density table and plots.

8.2 Power Spectral Density Test Data

Table 8-1: Power Spectral Density Test Data – ANT+

Channel	Frequency (MHz)	RF Power Level (dBm)	Maximum Limit +8dBm	Pass/Fail
Low	2402	-2.7	8	Pass
Mid	2441	-1.5	8	Pass
High	2480	-4.3	8	Pass

Table 8-2: Power Spectral Density Test Data – BLE PRB29

Channel	Frequency (MHz)	RF Power Level (dBm)	Maximum Limit +8dBm	Pass/Fail
0	2402	-9.9	8	Pass
19	2440	-9.4	8	Pass
39	2480	-12.1	8	Pass

Table 8-3: Power Spectral Density Test Data – BLE 0x0F

Channel	Frequency (MHz)	RF Power Level (dBm)	Maximum Limit +8dBm	Pass/Fail
0	2402	-8.1	8	Pass
19	2440	-7.5	8	Pass
39	2480	-10.4	8	Pass

Table 8-4: Power Spectral Density Test Data – BLE 0x55

Channel	Frequency (MHz)	RF Power Level (dBm)	Maximum Limit +8dBm	Pass/Fail
0	2402	-9.9	8	Pass
19	2440	-9.4	8	Pass
39	2480	-12.2	8	Pass

Table 8-5: Power Spectral Density Test Data – 802.11b (11 Mbps)

Channel	Frequency (MHz)	RF Power Level (dBm)	Maximum Limit +8dBm	Pass/Fail
1	2412	-7.4	8	Pass
6	2437	-8.4	8	Pass
11	2462	-6.2	8	Pass


Table 8-6: Power Spectral Density Test Data – 802.11g (54 Mbps)

Channel	Frequency (MHz)	RF Power Level (dBm)	Maximum Limit +8dBm	Pass/Fail
1	2412	-9.1	8	Pass
6	2437	-11.1	8	Pass
11	2462	-8.6	8	Pass


Table 8-7: Power Spectral Density Test Data – 802.11n (65 Mbps)

Channel	Frequency (MHz)	RF Power Level (dBm)	Maximum Limit +8dBm	Pass/Fail
1	2412	-10.6	8	Pass
6	2437	-11.2	8	Pass
11	2462	-9.0	8	Pass


Plot 8-1: Power Spectral Density: Channel Low (2402 MHz) - ANT+

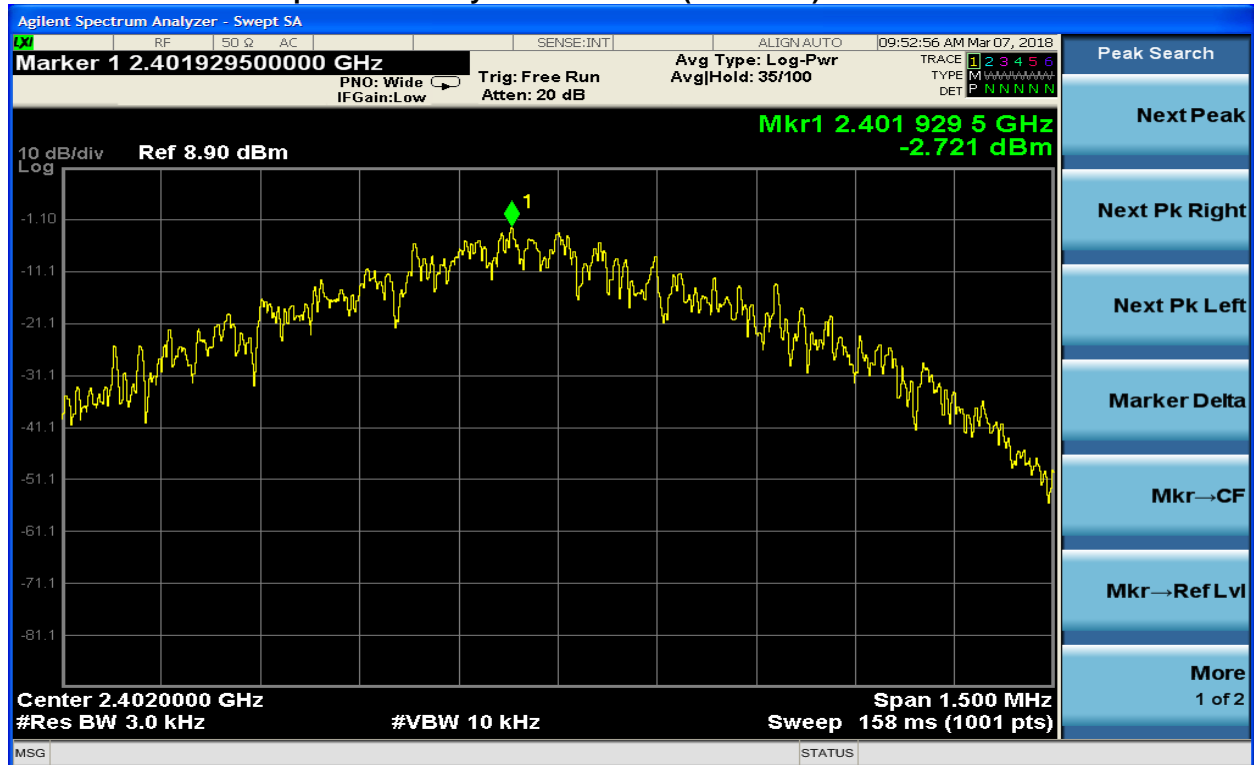


Plot 8-2: Power Spectral Density: Channel Mid (2441 MHz) - ANT+

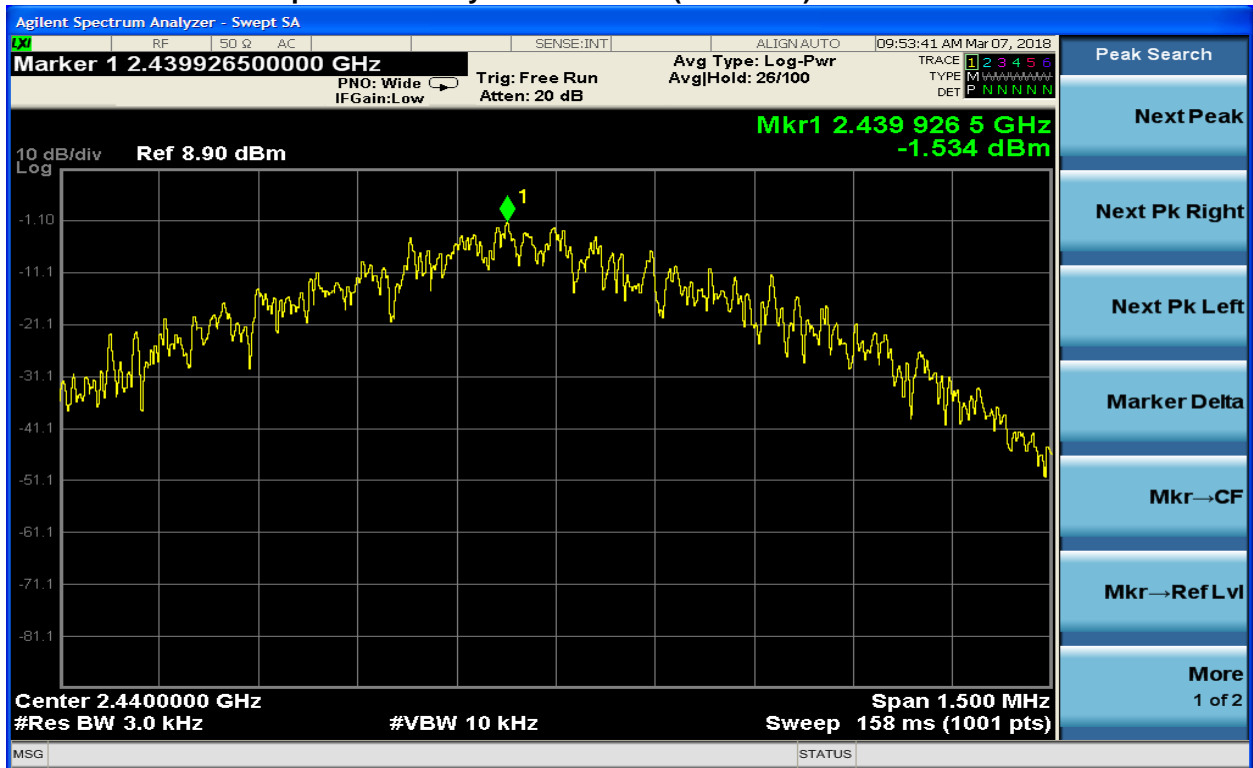

Plot 8-3: Power Spectral Density: Channel High (2480 MHz) - ANT+

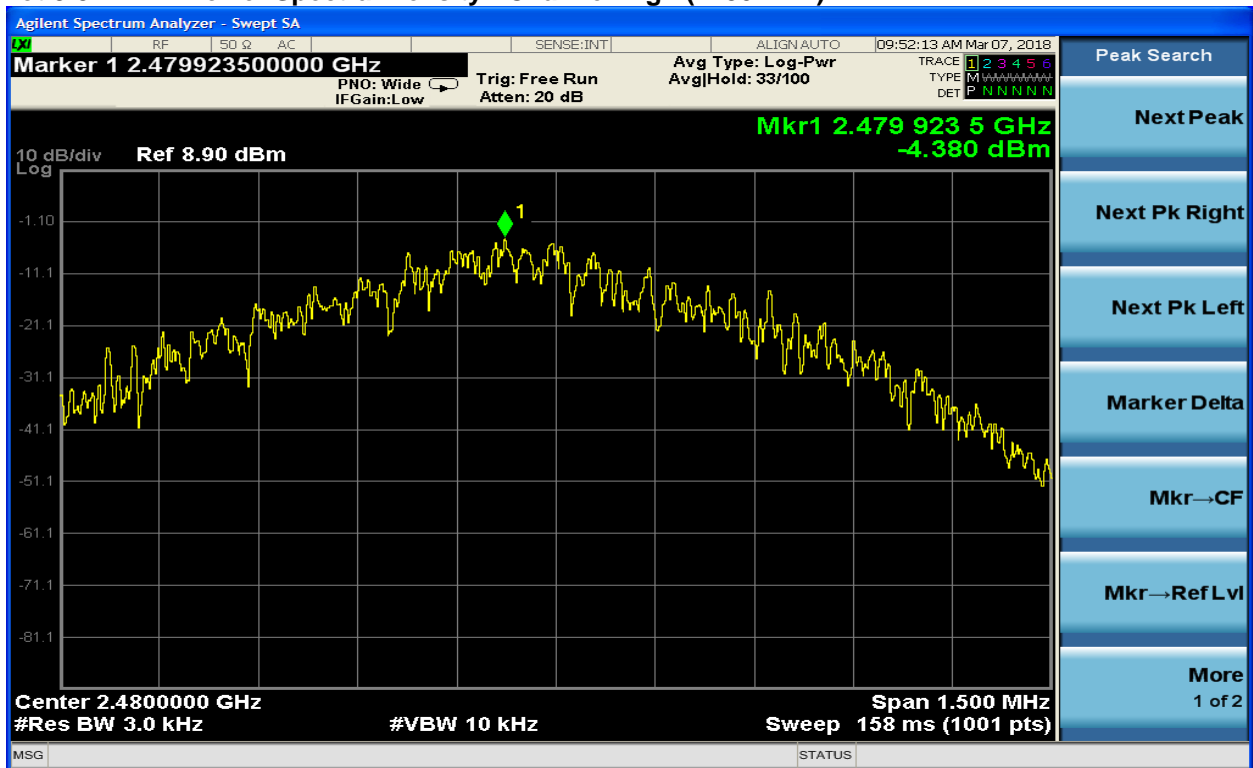

Plot 8-6: Power Spectral Density: Channel 39 (2480 MHz) – BLE (PRB29)

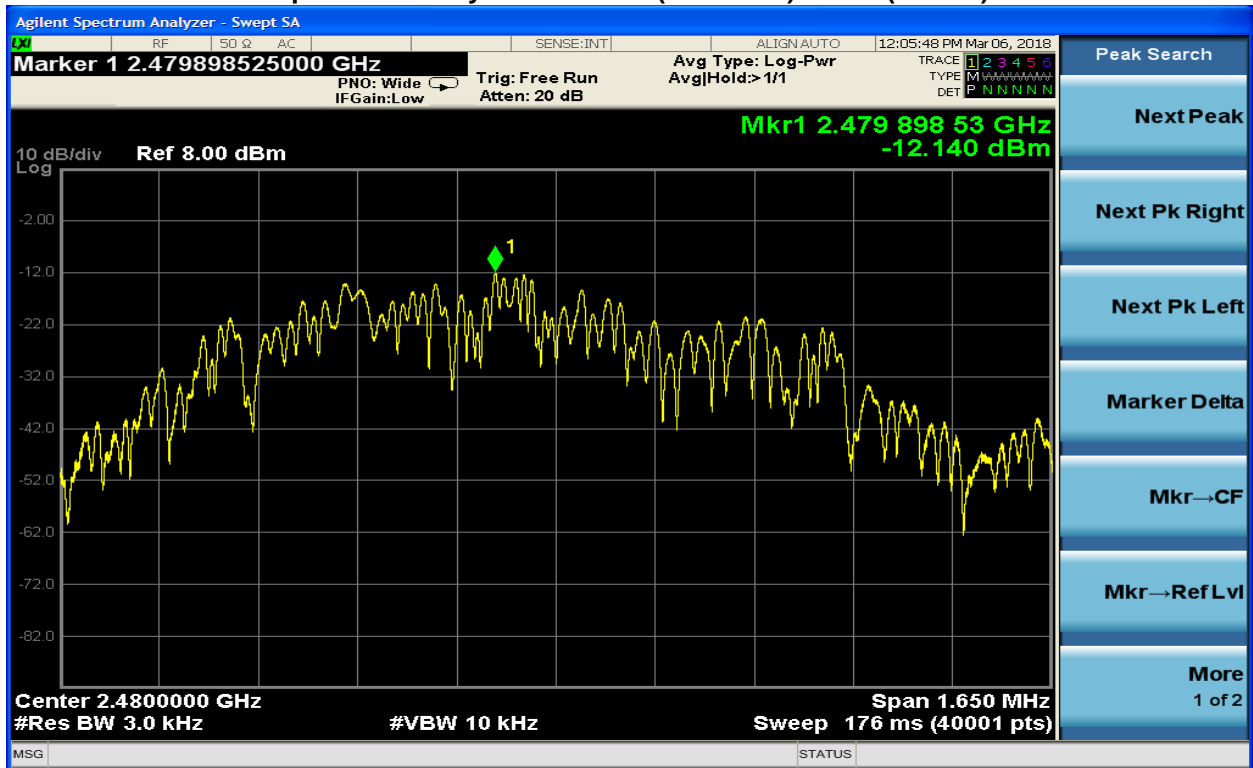

Plot 8-7: Power Spectral Density: Channel 0 (2402 MHz) – BLE (0x0F)



Plot 8-8: Power Spectral Density: Channel 19 (2440 MHz) – BLE (0x0F)



Plot 8-9: Power Spectral Density: Channel 39 (2480 MHz) – BLE (0x0F)




Plot 8-10: Power Spectral Density: Channel 0 (2402 MHz) – BLE (0x55)




Plot 8-11: Power Spectral Density: Channel 19 (2440 MHz) – BLE (0x55)




Plot 8-12: Power Spectral Density: Channel 39 (2480 MHz) – BLE (0x55)

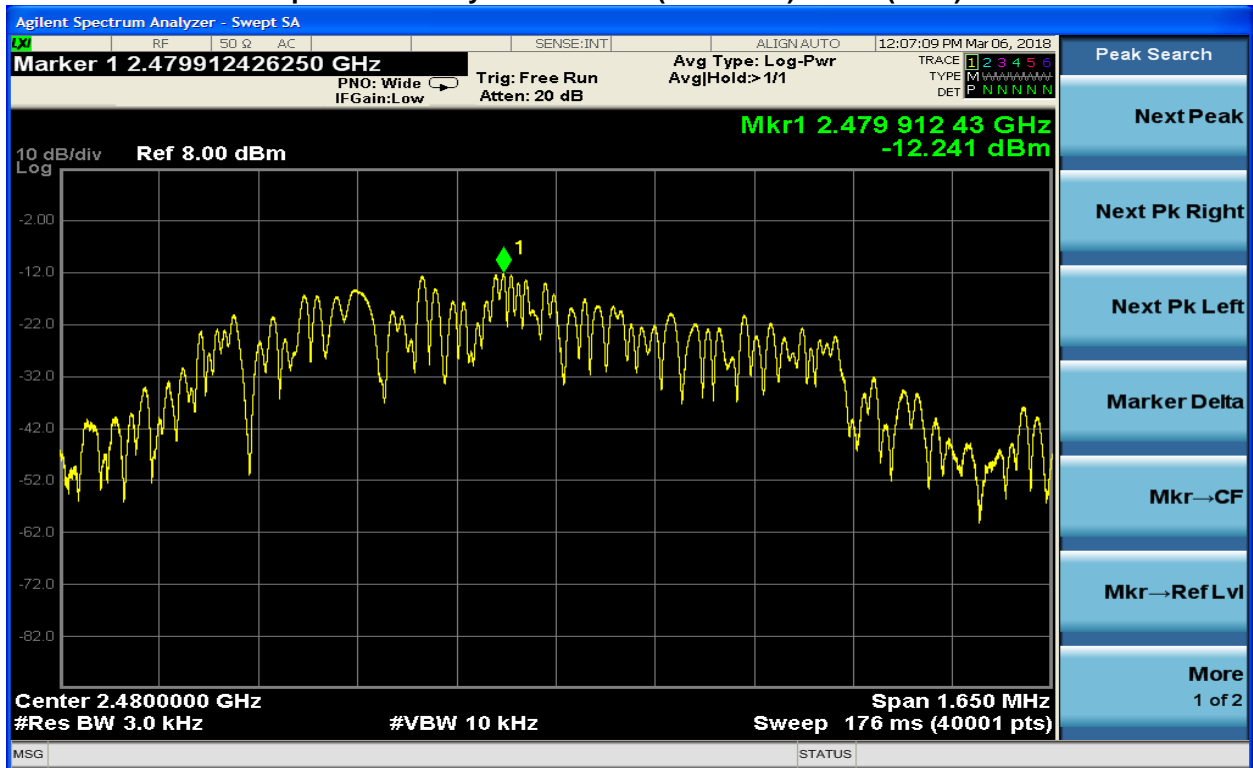


Plot 8-13: Power Spectral Density: Channel 1 (2412 MHz); 802.11b (11 Mbps)

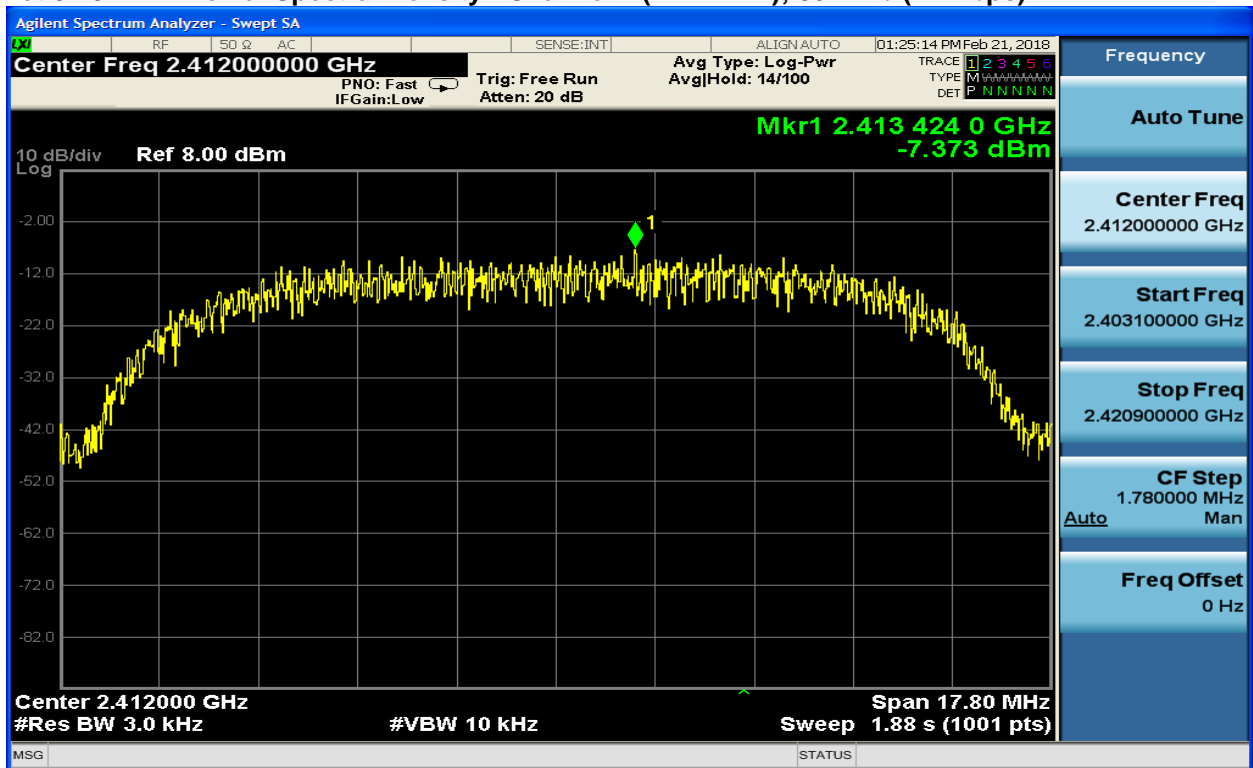


Plot 8-14: Power Spectral Density: Channel 6 (2437 MHz); 802.11b (11 Mbps)

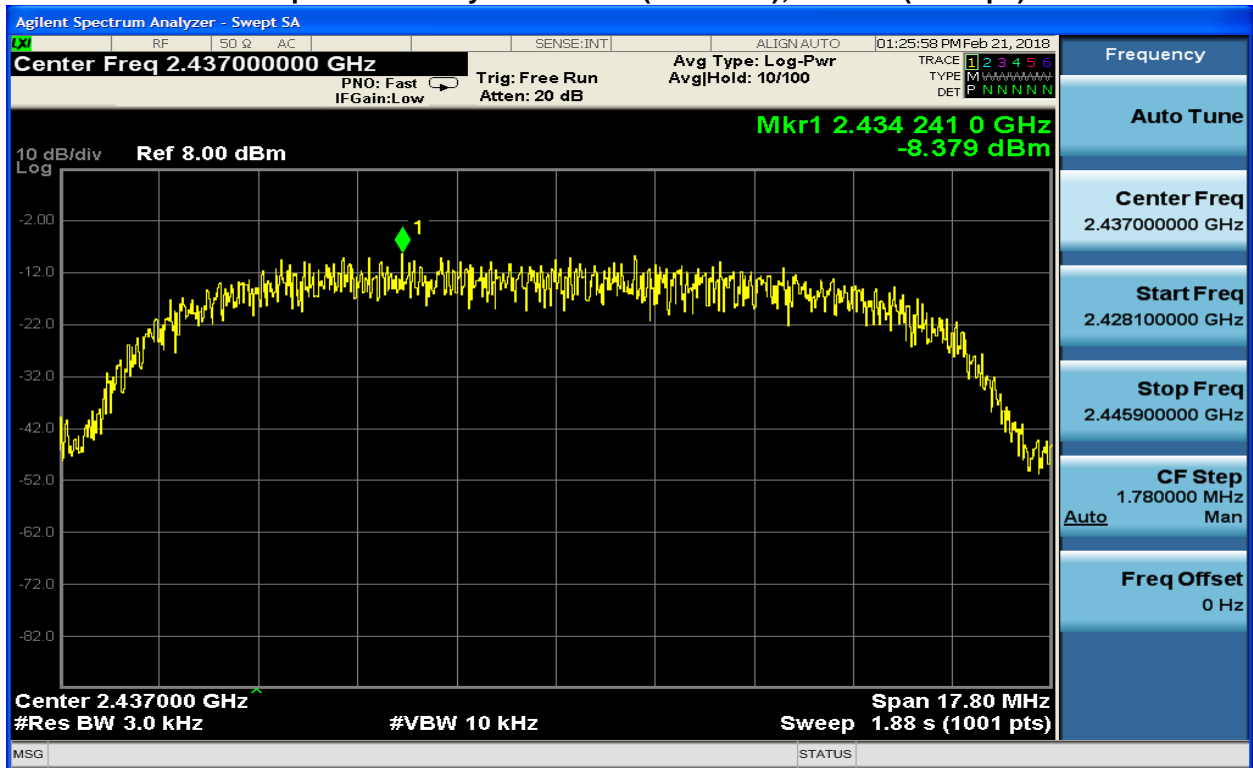


Plot 8-15: Power Spectral Density: Channel 11 (2462 MHz); 802.11b (11 Mbps)

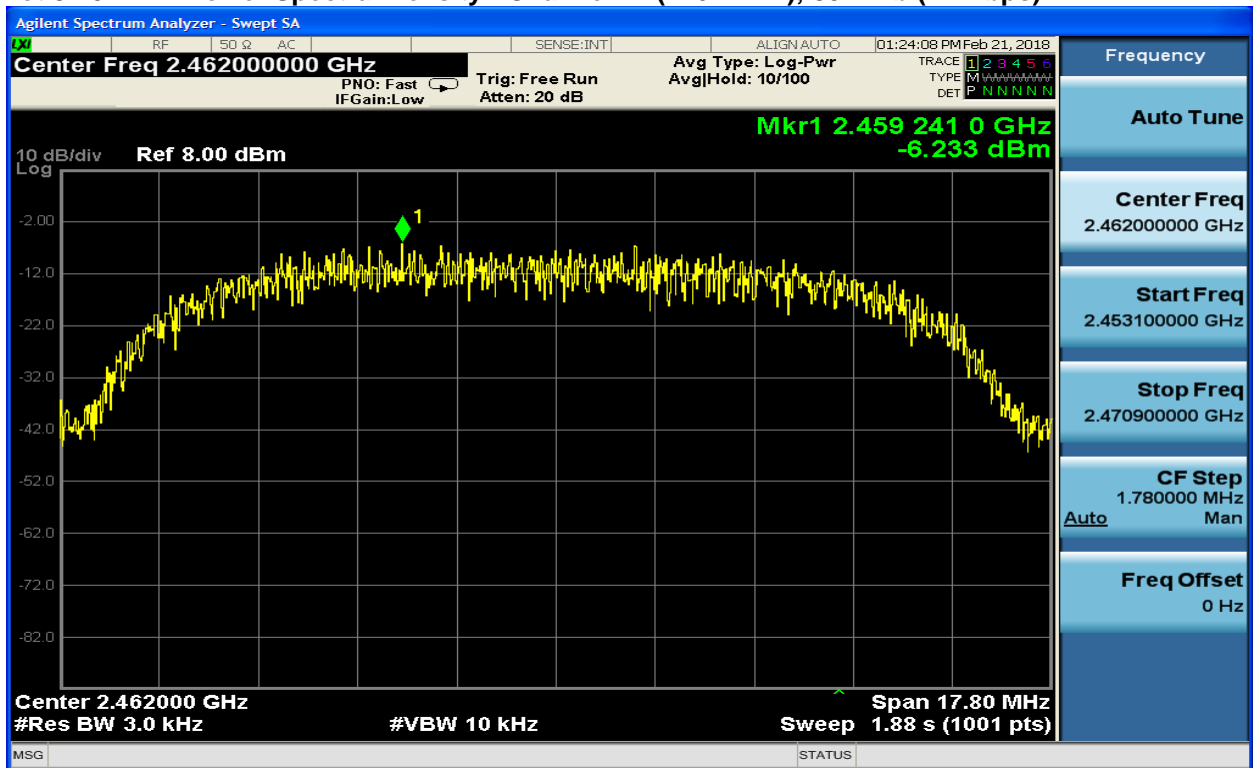


Plot 8-16: Power Spectral Density: Channel 1 (2412 MHz); 802.11g (54 Mbps)

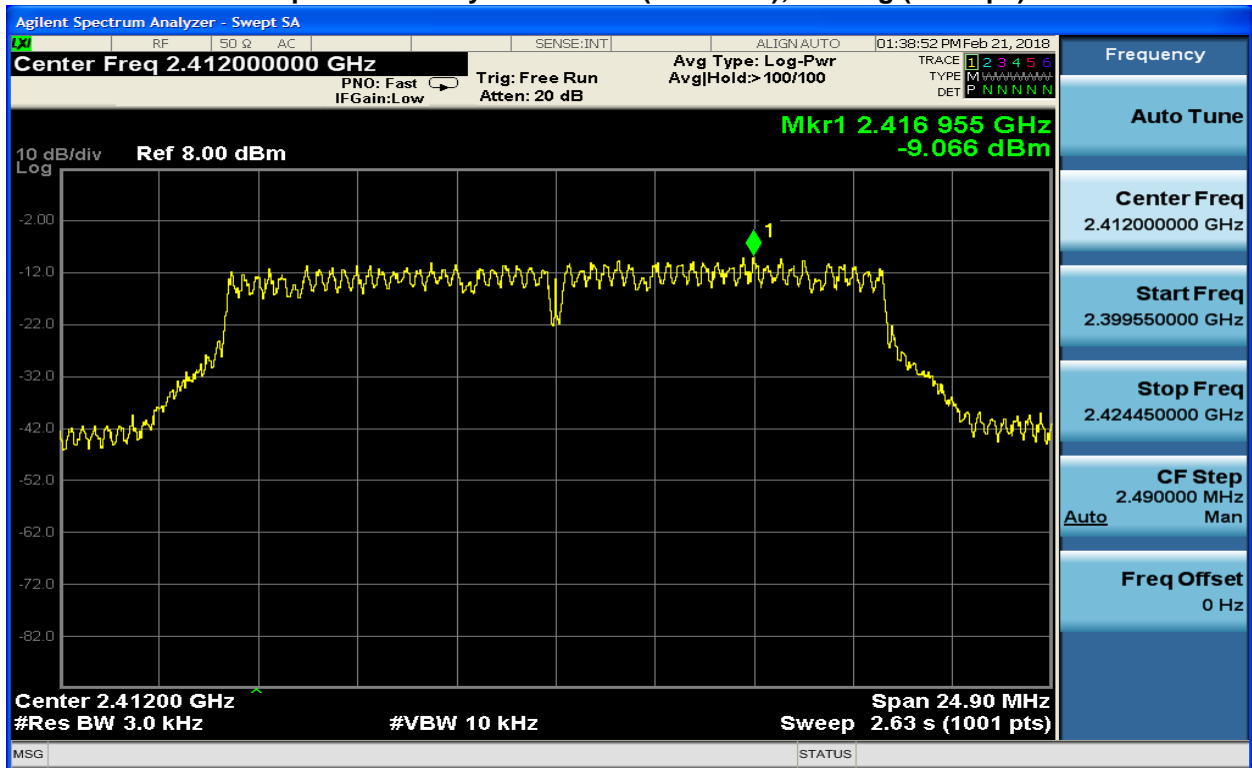


Plot 8-17: Power Spectral Density: Channel 6 (2437 MHz); 802.11g (54 Mbps)

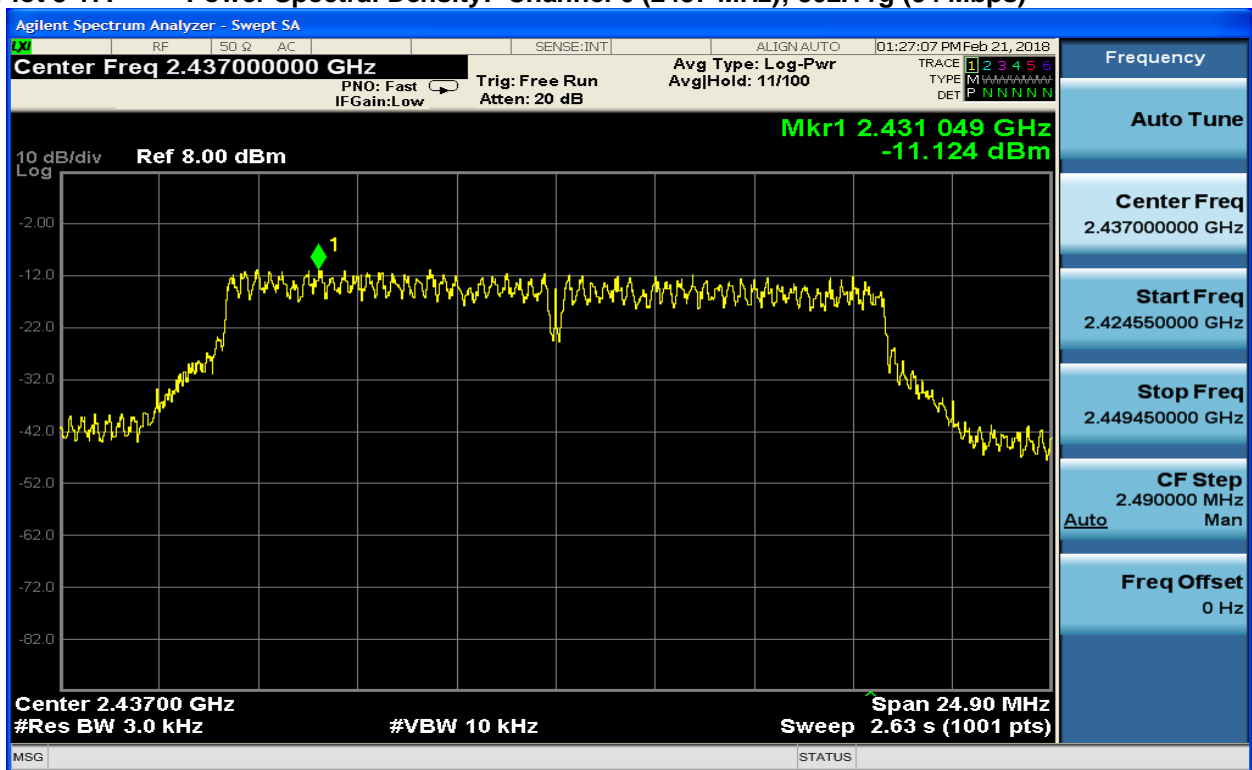


Plot 8-18: Power Spectral Density: Channel 11 (2462 MHz); 802.11g (54 Mbps)

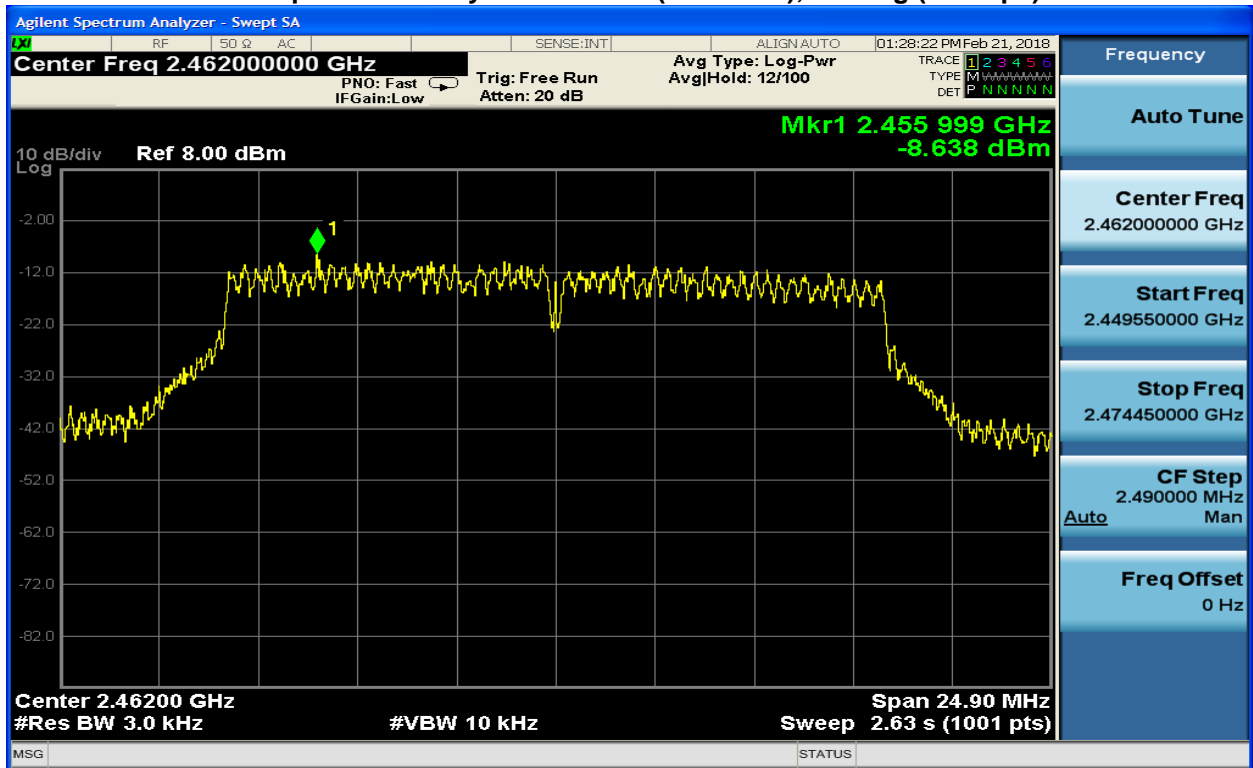


Plot 8-19: Power Spectral Density: Channel 1 (2412 MHz); 802.11n (65 Mbps)

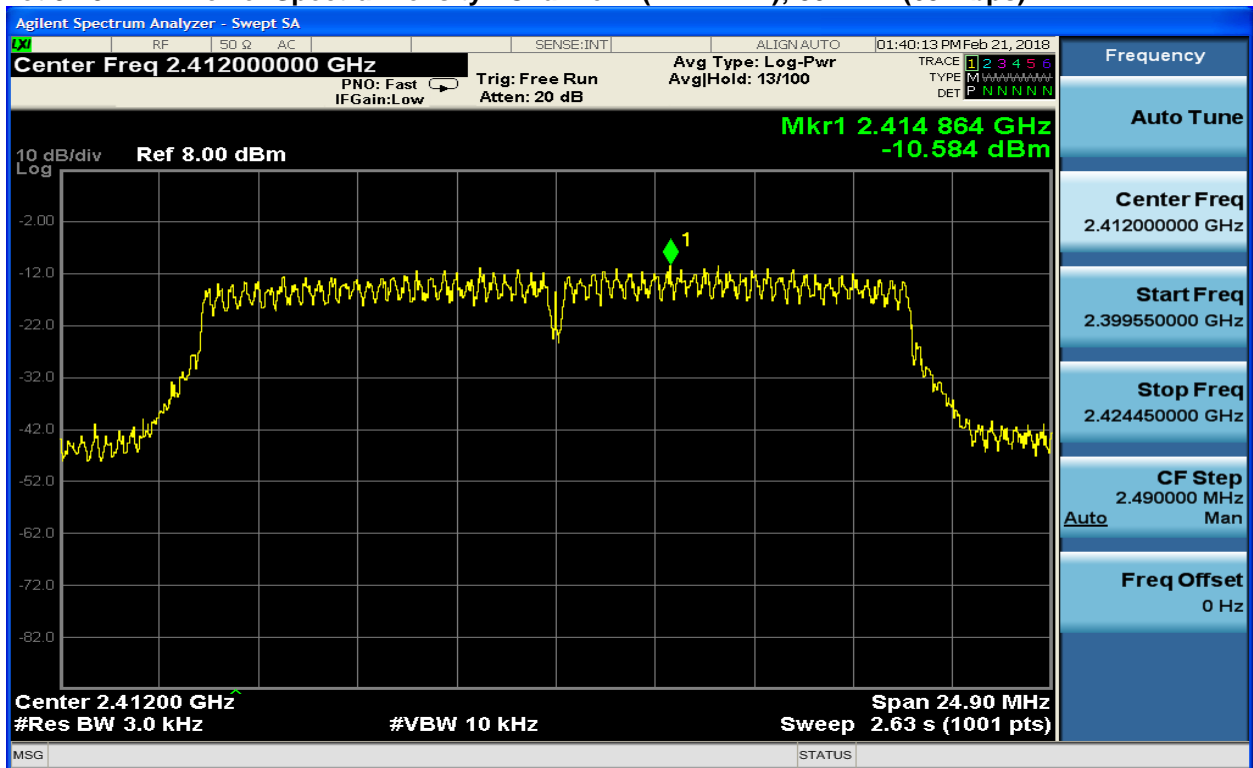

Plot 8-20: Power Spectral Density: Channel 6 (2437 MHz); 802.11n (65 Mbps)

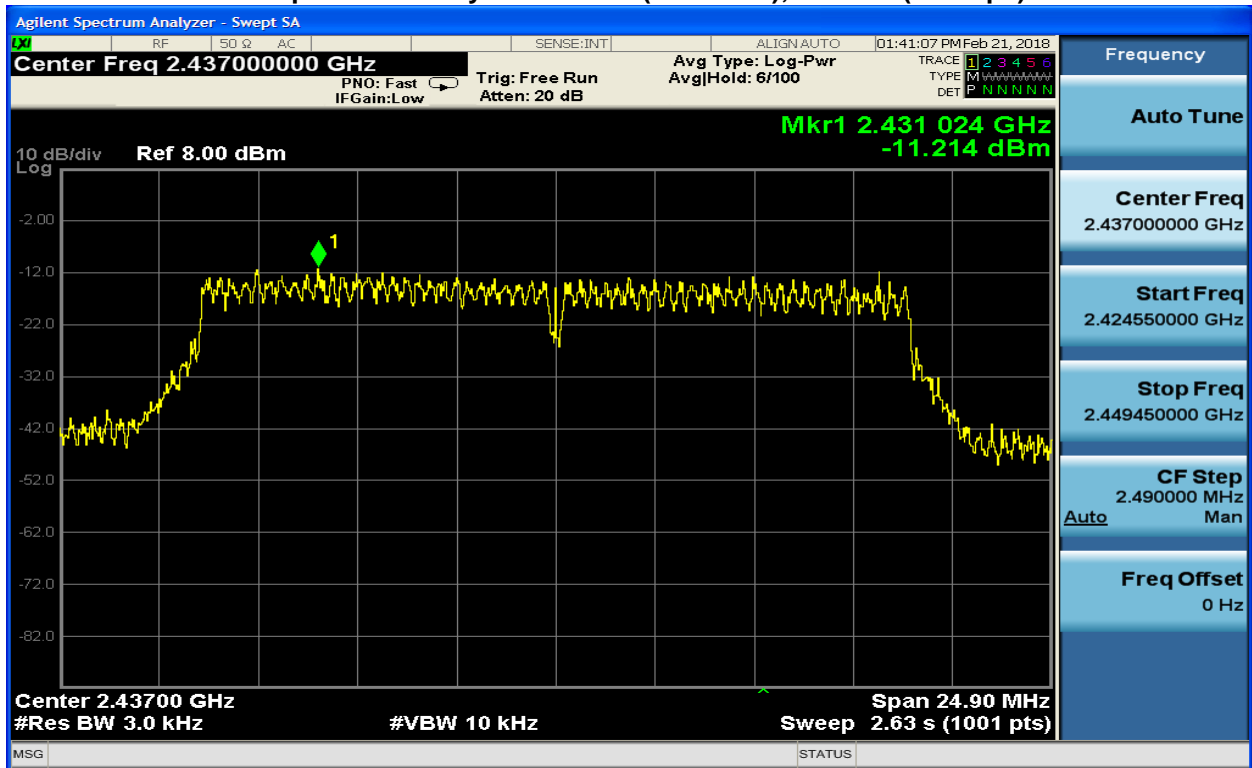

Plot 8-21: Power Spectral Density: Channel 11 (2462 MHz); 802.11n (65 Mbps)

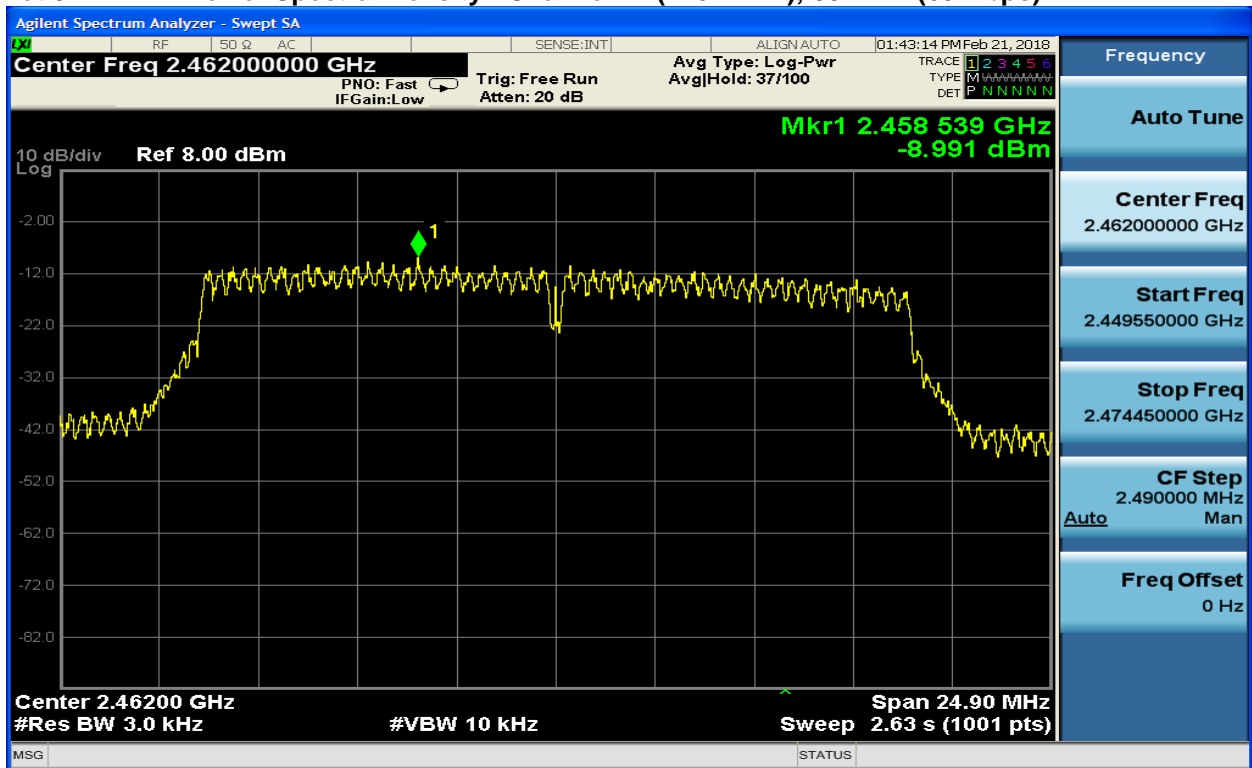



Measurement uncertainties shown for these tests are expanded Gaussian uncertainties expressed at 95% confidence level using a coverage factor $k = 1.96$. Measurement uncertainty = 0.5 dB.

PASS

Table 8-8: Power Spectral Density Test Equipment

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901583	Agilent Technologies	N9010A	EXA Signal Analyzer (10 Hz-26.5 GHz)	MY51250846	2/6/20

Test Personnel:


Daniel W. Baltzell Test Engineer	 Signature	February 21, 2018 Date of Test
Khue Do Test Engineer	 Signature	March 6-7, 2018 Dates of Test

9 Hopping Characteristics – FCC 15.247(a)(1); RSS-247 5.1


15.247(a)(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter.

15.247(a)(1)(iii) Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Plot 9-1: Number of Channels – Bluetooth (79 channels)

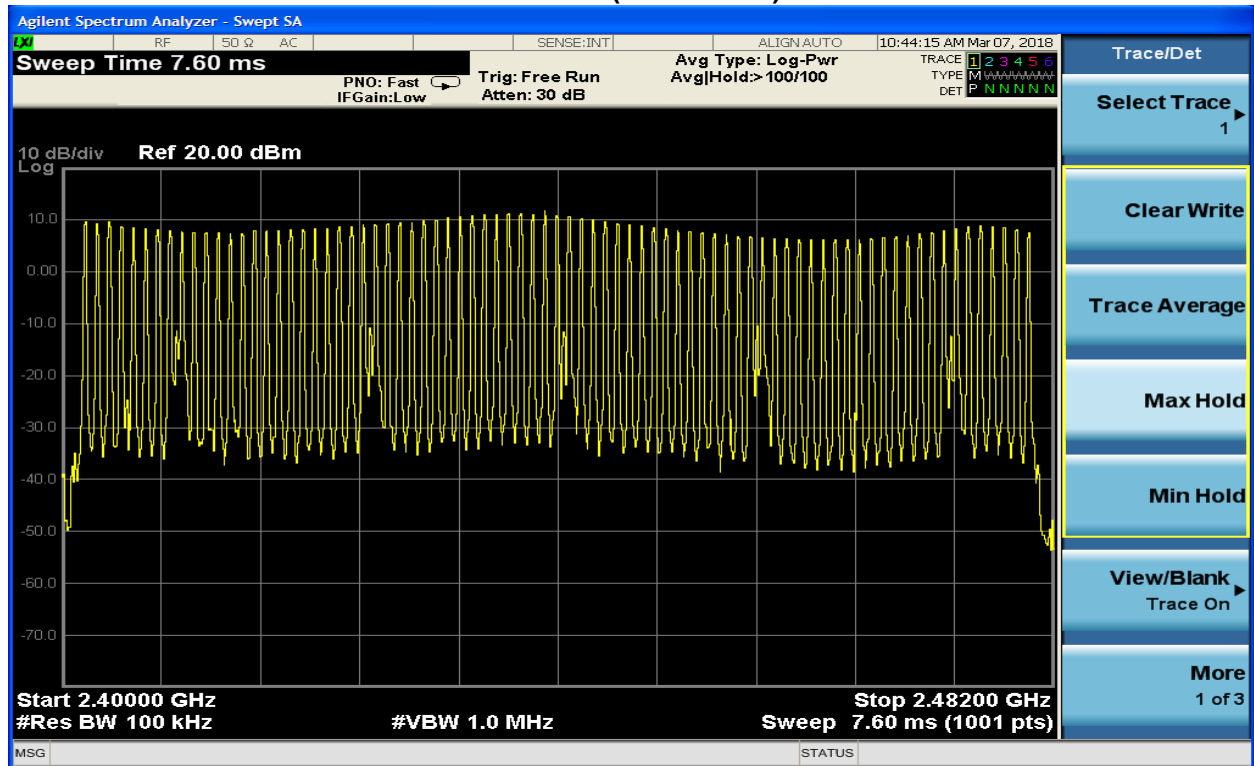

Plot 9-4: Pulse Width – Bluetooth (348 us)

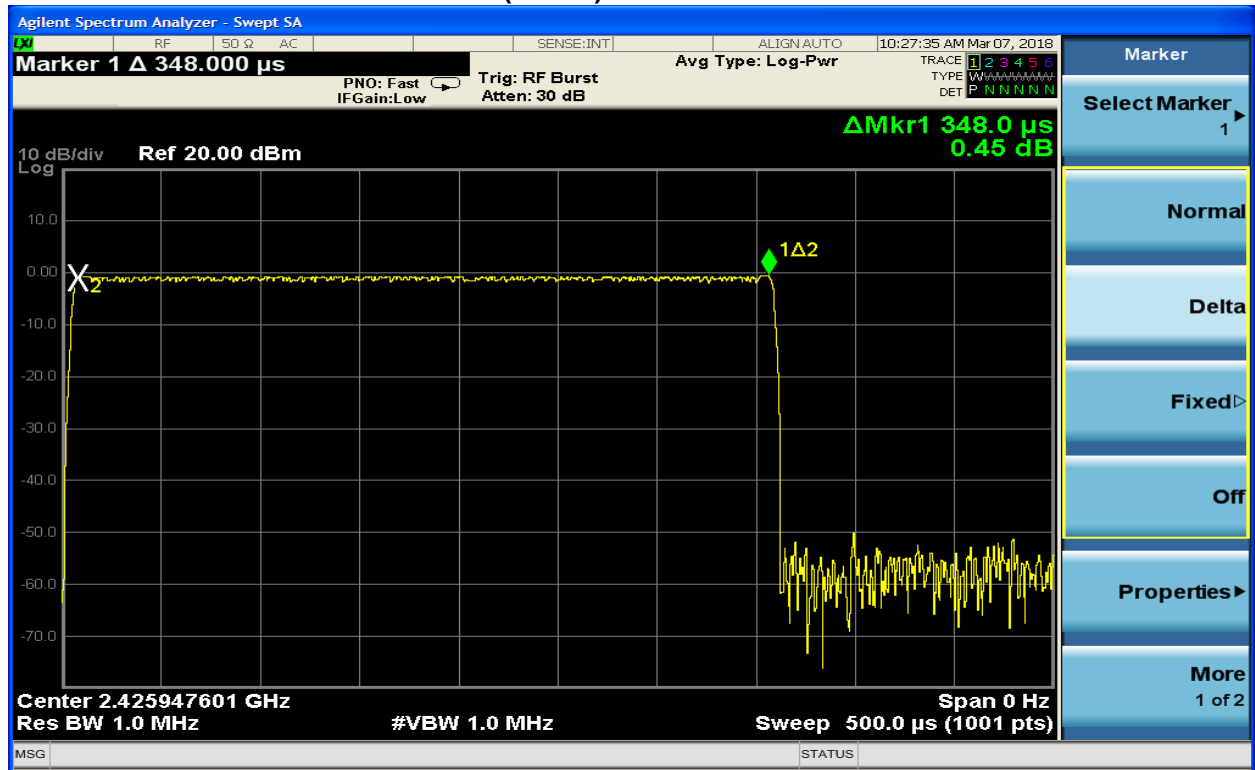

Number of pulses in 79 * 0.4 (31.6) seconds = 30
 Pulse width 348 us x 30 = 0.01 s which is less than 0.400s (limit)

Measurement uncertainty: $\pm 1.4\%$. This measurement uncertainty is an expanded uncertainty for 95.45% confidence level received with a coverage factor k=2.

Pass

Table 9-1: Hopping Mode Characteristics Test Equipment

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901583	Agilent Technologies	N9010A	EXA Signal Analyzer (10 Hz-26.5 GHz)	MY51250846	2/6/20

PASS

Test Personnel:

Khue Do
 Test Engineer

[Handwritten Signature]
 Signature

March 7, 2018
 Date of Test

10 Radiated Emissions – FCC 15.209; RSS-247 6.2 and RSS-Gen

10.1 Limits of Radiated Emissions Measurement

Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009-0.490	2400/f (kHz)	300
0.490-1.705	2400/f (kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

As shown in 15.35(b), for frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any circumstances of modulation.

10.2 Radiated Emissions Measurement Test Procedure

Before final measurements of radiated emissions were made on the open-field three/ten meter range, the EUT was scanned indoors at one and three meter distances. This was done in order to determine its emissions spectrum signature. The physical arrangement of the test system and associated cabling was varied in order to determine the effect on the EUT's emissions in amplitude, direction and frequency. This process was repeated during final radiated emissions measurements on the open-field range, at each frequency, in order to ensure that maximum emission amplitudes were attained.

Final radiated emissions measurements were made on the three/ten-meter, open-field test site. The EUT was placed on a nonconductive turntable 0.8 meters above the ground plane. The spectrum was examined from 9 kHz to the 10th harmonic of the highest fundamental transmitter frequency (24.8 GHz) for the 2.4 GHz band.

At each frequency, the EUT was rotated 360°, and the antenna was raised and lowered from 1 to 4 meters in order to determine the emission's maximum level. Measurements were taken using both horizontal and vertical antenna polarizations. For frequencies between 30 and 1000 MHz, the spectrum analyzer's 6 dB bandwidth was set to 120 kHz, and the analyzer was operated in the CISPR quasi-peak detection mode. For emissions above 1000 MHz, emissions are measured using the average detector function with a minimum resolution bandwidth of 1 MHz. No video filter less than 10 times the resolution bandwidth was used. The highest emission amplitudes relative to the appropriate limit were measured and recorded in this report.

10.3 Radiated Emissions Test Results

Table 10-1: Radiated Emissions Harmonics/Spurious - 2412 MHz, 802.11b, Peak Detector

Frequency (MHz)	Peak Analyzer (dBuV/m)	Site Correction Factor (dB/m)	Peak Corrected (dBuV/m)	Peak Limit (dBuV/m)	Peak Margin (dB)
4824.0	39.3	0.2	39.5	74.0	-34.5
12060.0	44.3	3.2	47.5	74.0	-26.5
14472.0	42.5	8.6	51.1	74.0	-22.9
19296.0	33.0	13.2	46.2	74.0	-27.8

Table 10-2: Radiated Emissions Harmonics/Spurious - 2412 MHz, 802.11b, Average Detector

Frequency (MHz)	Average Analyzer (dBuV/m)	Site Correction Factor (dB/m)	Average Corrected (dBuV/m)	Average Limit (dBuV/m)	Average Margin (dB)
4824.0	37.7	0.2	37.9	54.0	-16.1
12060.0	39.4	3.2	42.6	54.0	-11.4
14472.0	35.4	8.6	44.0	54.0	-10.0
19296.0	30.3	13.2	43.5	54.0	-10.5

Table 10-3: Radiated Emissions Harmonics/Spurious- 2412 MHz, 802.11g, Peak Detector

Frequency (MHz)	Peak Analyzer (dBuV/m)	Site Correction Factor (dB/m)	Peak Corrected (dBuV/m)	Peak Limit (dBuV/m)	Peak Margin (dB)
4824.0	37.8	0.2	38.0	74.0	-36.0
12060.0	44.5	3.2	47.7	74.0	-26.3
14472.0	45.0	8.6	53.6	74.0	-20.4
19296.0	35.9	13.2	49.1	74.0	-24.9

Table 10-4: Radiated Emissions Harmonics/Spurious - 2412 MHz, 802.11g, Average Detector

Frequency (MHz)	Average Analyzer (dBuV/m)	Site Correction Factor (dB/m)	Average Corrected (dBuV/m)	Average Limit (dBuV/m)	Average Margin (dB)
4824.0	35.6	0.2	35.8	54.0	-18.2
12060.0	38.2	3.2	41.4	54.0	-12.6
14472.0	36.3	8.6	44.9	54.0	-9.1
19296.0	33.2	13.2	46.4	54.0	-7.6

Table 10-5: Radiated Emissions Harmonics/Spurious - 2412 MHz, 802.11n, Peak Detector

Frequency (MHz)	Peak Analyzer (dBuV/m)	Site Correction Factor (dB/m)	Peak Corrected (dBuV/m)	Peak Limit (dBuV/m)	Peak Margin (dB)
4824.0	37.6	0.2	37.8	74.0	-36.2
12060.0	44.7	3.2	47.9	74.0	-26.1
14472.0	43.1	8.6	51.7	74.0	-22.3
19296.0	35.8	13.2	49.0	74.0	-25.0

Table 10-6: Radiated Emissions Harmonics/Spurious - 2412 MHz, 802.11n, Average Detector

Frequency (MHz)	Average Analyzer (dBuV/m)	Site Correction Factor (dB/m)	Average Corrected (dBuV/m)	Average Limit (dBuV/m)	Average Margin (dB)
4824.0	34.8	0.2	35.0	54.0	-19.0
12060.0	38.5	3.2	41.7	54.0	-12.3
14472.0	35.0	8.6	43.6	54.0	-10.4
19296.0	33.0	13.2	46.2	54.0	-7.8

Table 10-7: Radiated Emissions Harmonics/Spurious - 2437 MHz, 802.11b, Peak Detector

Frequency (MHz)	Peak Analyzer (dBuV/m)	Site Correction Factor (dB/m)	Peak Corrected (dBuV/m)	Peak Limit (dBuV/m)	Peak Margin (dB)
4874.0	38.5	0.2	38.7	74.0	-35.3
7311.0	42.9	-1.5	41.4	74.0	-32.6
12185.0	43.7	3.2	46.9	74.0	-27.1
19496.0	35.2	13.2	48.4	74.0	-25.6

Table 10-8: Radiated Emissions Harmonics/Spurious - 2437 MHz, 802.11b, Average Detector

Frequency (MHz)	Average Analyzer (dBuV/m)	Site Correction Factor (dB/m)	Average Corrected (dBuV/m)	Average Limit (dBuV/m)	Average Margin (dB)
4874.0	36.5	0.2	36.7	54.0	-17.3
7311.0	34.2	-1.5	32.7	54.0	-21.3
12185.0	39.0	3.2	42.2	54.0	-11.8
19496.0	32.5	13.2	45.7	54.0	-8.3

Table 10-9: Radiated Emissions Harmonics/Spurious - 2437 MHz, 802.11g, Peak Detector

Frequency (MHz)	Peak Analyzer (dBuV/m)	Site Correction Factor (dB/m)	Peak Corrected (dBuV/m)	Peak Limit (dBuV/m)	Peak Margin (dB)
4874.0	37.6	0.2	37.8	74.0	-36.2
7311.0	41.5	-1.5	40.0	74.0	-34.0
12185.0	45.1	3.2	48.3	74.0	-25.7
19496.0	36.4	13.2	49.6	74.0	-24.4

Table 10-10: Radiated Emissions Harmonics/Spurious - 2437 MHz, 802.11g, Average Detector

Frequency (MHz)	Average Analyzer (dBuV/m)	Site Correction Factor (dB/m)	Average Corrected (dBuV/m)	Average Limit (dBuV/m)	Average Margin (dB)
4874.0	35.5	0.2	35.7	54.0	-18.3
7311.0	31.9	-1.5	30.4	54.0	-23.6
12185.0	38.5	3.2	41.7	54.0	-12.3
19496.0	32.3	13.2	45.5	54.0	-8.5

Table 10-11: Radiated Emissions Harmonics/Spurious - 2437 MHz, 802.11n, Peak Detector

Frequency (MHz)	Peak Analyzer (dBuV/m)	Site Correction Factor (dB/m)	Peak Corrected (dBuV/m)	Peak Limit (dBuV/m)	Peak Margin (dB)
4874.0	37.7	0.2	37.9	74.0	-36.1
7311.0	41.8	-1.5	40.3	74.0	-33.7
12185.0	41.8	3.2	45.0	74.0	-29.0
19496.0	36.5	13.2	49.7	74.0	-24.3

Table 10-12: Radiated Emissions Harmonics/Spurious - 2437 MHz, 802.11n, Average Detector

Frequency (MHz)	Average Analyzer (dBuV/m)	Site Correction Factor (dB/m)	Average Corrected (dBuV/m)	Average Limit (dBuV/m)	Average Margin (dB)
4874.0	35.3	0.2	35.5	54.0	-18.5
7311.0	32.6	-1.5	31.1	54.0	-22.9
12185.0	35.6	3.2	38.8	54.0	-15.2
19496.0	34.1	13.2	47.3	54.0	-6.7

Table 10-13: Radiated Emissions Harmonics/Spurious - 2462 MHz, 802.11b, Peak Detector

Frequency (MHz)	Peak Analyzer (dBuV/m)	Site Correction Factor (dB/m)	Peak Corrected (dBuV/m)	Peak Limit (dBuV/m)	Peak Margin (dB)
4924.0	38.8	0.2	39.0	74.0	-35.0
7386.0	42.9	-1.5	41.4	74.0	-32.6
12310.0	42.8	3.2	46.0	74.0	-28.0
19696.0	34.1	13.2	47.3	74.0	-26.7
22158.0	18.1	12.0	30.1	74.0	-43.9

Table 10-14: Radiated Emissions Harmonics/Spurious - 2462 MHz, 802.11b, Average Detector

Frequency (MHz)	Average Analyzer (dBuV/m)	Site Correction Factor (dB/m)	Average Corrected (dBuV/m)	Average Limit (dBuV/m)	Average Margin (dB)
4924.0	36.8	0.2	37.0	54.0	-17.0
7386.0	32.4	-1.5	30.9	54.0	-23.1
12310.0	36.5	3.2	39.7	54.0	-14.3
19696.0	31.2	13.2	44.4	54.0	-9.6
22158.0	9.4	12.0	21.4	54.0	-32.6

Table 10-15: Radiated Emissions Harmonics/Spurious - 2462 MHz, 802.11g, Peak Detector

Frequency (MHz)	Peak Analyzer (dBuV/m)	Site Correction Factor (dB/m)	Peak Corrected (dBuV/m)	Peak Limit (dBuV/m)	Peak Margin (dB)
4924.0	37.7	0.2	37.9	74.0	-36.1
7386.0	41.2	-1.5	39.7	74.0	-34.3
12310.0	42.1	3.2	45.3	74.0	-28.7
19696.0	35.5	13.2	48.7	74.0	-25.3
22158.0	16.4	12.0	28.4	74.0	-45.6

Table 10-16: Radiated Emissions Harmonics/Spurious - 2462 MHz, 802.11g, Average Detector

Frequency (MHz)	Average Analyzer (dBuV/m)	Site Correction Factor (dB/m)	Average Corrected (dBuV/m)	Average Limit (dBuV/m)	Average Margin (dB)
4924.0	36.5	0.2	36.7	54.0	-17.3
7386.0	31.8	-1.5	30.3	54.0	-23.7
12310.0	37.1	3.2	40.3	54.0	-13.7
19696.0	32.2	13.2	45.4	54.0	-8.6
22158.0	9.5	12.0	21.5	54.0	-32.5

Table 10-17: Radiated Emissions Harmonics/Spurious - 2462 MHz, 802.11n, Peak Detector

Frequency (MHz)	Peak Analyzer (dBuV/m)	Site Correction Factor (dB/m)	Peak Corrected (dBuV/m)	Peak Limit (dBuV/m)	Peak Margin (dB)
4924.0	38.3	0.2	38.5	74.0	-35.5
7386.0	40.7	-1.5	39.2	74.0	-34.8
12310.0	41.6	3.2	44.8	74.0	-29.2
19696.0	34.9	13.2	48.1	74.0	-25.9
22158.0	17.1	12.0	29.1	74.0	-44.9

Table 10-18: Radiated Emissions Harmonics/Spurious - 2462 MHz, 802.11n, Average Detector

Frequency (MHz)	Average Analyzer (dBuV/m)	Site Correction Factor (dB/m)	Average Corrected (dBuV/m)	Average Limit (dBuV/m)	Average Margin (dB)
4924.0	36.7	0.2	36.9	54.0	-17.1
7386.0	31.8	-1.5	30.3	54.0	-23.7
12310.0	36.0	3.2	39.2	54.0	-14.8
19696.0	32.6	13.2	45.8	54.0	-8.2
22158.0	9.4	12.0	21.4	54.0	-32.6

Table 10-19: Radiated Emissions Harmonics/Spurious - 2402 MHz, ANT+, Peak Detector

Frequency (MHz)	Peak Analyzer (dBuV/m)	Site Correction Factor (dB/m)	Peak Corrected (dBuV/m)	Peak Limit (dBuV/m)	Peak Margin (dB)
4804.0	47.6	0.2	47.8	74.0	-26.2
12010.0	39.0	3.2	42.2	74.0	-31.8
19216.0	41.8	13.2	55.0	74.0	-19.0

Table 10-20: Radiated Emissions Harmonics/Spurious - 2402 MHz, ANT+, Average Detector

Frequency (MHz)	Average Analyzer (dBuV/m)	Site Correction Factor (dB/m)	Average Corrected (dBuV/m)	Average Limit (dBuV/m)	Average Margin (dB)
4804.0	45.7	0.2	45.9	54.0	-8.1
12010.0	35.9	3.2	39.1	54.0	-14.9
19216.0	38.1	13.2	51.3	54.0	-2.7

Table 10-21: Radiated Emissions Harmonics/Spurious - 2441 MHz, ANT+, Peak Detector

Frequency (MHz)	Peak Analyzer (dBuV/m)	Site Correction Factor (dB/m)	Peak Corrected (dBuV/m)	Peak Limit (dBuV/m)	Peak Margin (dB)
4882.0	46.6	0.6	47.2	74.0	-26.8
7323.0	42.1	-2.3	39.8	74.0	-34.2
12205.0	38.0	3.4	41.4	74.0	-32.6
19528.0	25.8	13.3	39.1	74.0	-34.9

Table 10-22: Radiated Emissions Harmonics/Spurious - 2441 MHz, ANT+, Average Detector

Frequency (MHz)	Average Analyzer (dBuV/m)	Site Correction Factor (dB/m)	Average Corrected (dBuV/m)	Average Limit (dBuV/m)	Average Margin (dB)
4882.0	44.3	0.6	44.9	54.0	-9.1
7323.0	39.1	-2.3	36.8	54.0	-17.2
12205.0	32.8	3.4	36.2	54.0	-17.8
19528.0	22.8	13.3	36.1	54.0	-17.9

Table 10-23: Radiated Emissions Harmonics/Spurious - 2480 MHz, ANT+, Peak Detector

Frequency (MHz)	Peak Analyzer (dBuV/m)	Site Correction Factor (dB/m)	Peak Corrected (dBuV/m)	Peak Limit (dBuV/m)	Peak Margin (dB)
4960.0	47.6	0.8	48.4	74.0	-25.6
7440.0	38.9	-2.4	36.5	74.0	-37.5
12400.0	40.3	3.7	44.0	74.0	-30.0
19840.0	26.9	13.1	40.0	74.0	-34.0
22320.0	19.6	12.0	31.6	74.0	-42.4

Table 10-24: Radiated Emissions Harmonics/Spurious - 2480 MHz, ANT+, Average Detector

Frequency (MHz)	Average Analyzer (dBuV/m)	Site Correction Factor (dB/m)	Average Corrected (dBuV/m)	Average Limit (dBuV/m)	Average Margin (dB)
4960.0	44.3	0.8	45.1	54.0	-8.9
7440.0	34.6	4.6	32.2	54.0	-21.8
12400.0	37.8	4.9	41.5	54.0	-12.5
19840.0	22.0	6.2	35.1	54.0	-18.9
22320.0	12.9	12.0	24.9	54.0	-29.1

Table 10-25: Radiated Emissions Harmonics/Spurious - 2402 MHz, BLE, Peak Detector

Frequency (MHz)	Peak Analyzer (dBuV/m)	Site Correction Factor (dB/m)	Peak Corrected (dBuV/m)	Peak Limit (dBuV/m)	Peak Margin (dB)
4804.0	46.7	0.2	46.9	74.0	-27.1
12010.0	45.0	3.2	48.2	74.0	-25.8
19216.0	38.5	13.2	51.7	74.0	-22.3

Table 10-26: Radiated Emissions Harmonics/Spurious - 2402 MHz, BLE, Average Detector

Frequency (MHz)	Average Analyzer (dBuV/m)	Site Correction Factor (dB/m)	Average Corrected (dBuV/m)	Average Limit (dBuV/m)	Average Margin (dB)
4804.0	45.0	0.2	45.2	54.0	-8.8
12010.0	42.5	3.2	45.7	54.0	-8.3
19216.0	37.4	13.2	50.6	54.0	-3.4

Table 10-27: Radiated Emissions Harmonics/Spurious - 2440 MHz, BLE, Peak Detector

Frequency (MHz)	Peak Analyzer (dBuV/m)	Site Correction Factor (dB/m)	Peak Corrected (dBuV/m)	Peak Limit (dBuV/m)	Peak Margin (dB)
4880.0	46.2	0.6	46.8	74.0	-27.2
7320.0	40.4	-2.3	38.1	74.0	-35.9
12200.0	38.7	3.4	42.1	74.0	-31.9
19520.0	27.6	13.3	40.9	74.0	-33.1

Table 10-28: Radiated Emissions Harmonics/Spurious - 2440 MHz, BLE, Average Detector

Frequency (MHz)	Average Analyzer (dBuV/m)	Site Correction Factor (dB/m)	Average Corrected (dBuV/m)	Average Limit (dBuV/m)	Average Margin (dB)
4880.0	44.7	0.6	45.3	54.0	-8.7
7320.0	37.7	-2.3	35.4	54.0	-18.6
12200.0	34.0	3.4	37.4	54.0	-16.6
19520.0	25.8	13.3	39.1	54.0	-14.9

Table 10-29: Radiated Emissions Harmonics/Spurious - 2480 MHz, BLE, Peak Detector

Frequency (MHz)	Peak Analyzer (dBuV/m)	Site Correction Factor (dB/m)	Peak Corrected (dBuV/m)	Peak Limit (dBuV/m)	Peak Margin (dB)
4960.0	46.8	0.8	47.6	74.0	-26.4
7440.0	38.0	-2.4	35.6	74.0	-38.4
12400.0	36.6	3.7	40.3	74.0	-33.7
19840.0	28.6	13.1	41.7	74.0	-32.3
22320.0	20.5	12.0	32.5	74.0	-41.5

Table 10-30: Radiated Emissions Harmonics/Spurious - 2480 MHz, BLE, Average Detector

Frequency (MHz)	Average Analyzer (dBuV/m)	Site Correction Factor (dB/m)	Average Corrected (dBuV/m)	Average Limit (dBuV/m)	Average Margin (dB)
4960.0	44.8	0.8	45.6	54.0	-8.4
7440.0	34.4	-2.4	32.0	54.0	-22.0
12400.0	30.0	3.7	33.7	54.0	-20.3
19840.0	25.4	13.1	38.5	54.0	-15.5
22320.0	13.3	12.0	25.3	54.0	-28.7

Table 10-31: Radiated Emissions Harmonics/Spurious - 2402 MHz, Bluetooth, Peak Detector

Frequency (MHz)	Peak Analyzer (dBuV/m)	Site Correction Factor (dB/m)	Peak Corrected (dBuV/m)	Peak Limit (dBuV/m)	Peak Margin (dB)
4804.0	47.7	0.2	47.9	74.0	-26.1
12010.0	42.4	3.2	45.6	74.0	-28.4
19216.0	42.6	13.2	55.8	74.0	-18.2

Table 10-32: Radiated Emissions Harmonics/Spurious - 2402 MHz, Bluetooth, Average Detector

Frequency (MHz)	Average Analyzer (dBuV/m)	Site Correction Factor (dB/m)	Average Corrected (dBuV/m)	Average Limit (dBuV/m)	Average Margin (dB)
4804.0	44.5	0.2	44.7	54.0	-9.3
12010.0	38.7	3.2	41.9	54.0	-12.1
19216.0	40.0	13.2	53.2	54.0	-0.8

Table 10-33: Radiated Emissions Harmonics/Spurious - 2440 MHz, Bluetooth, Peak Detector

Frequency (MHz)	Peak Analyzer (dBuV/m)	Site Correction Factor (dB/m)	Peak Corrected (dBuV/m)	Peak Limit (dBuV/m)	Peak Margin (dB)
4880.0	46.1	0.6	46.7	74.0	-27.3
7320.0	40.6	-2.3	38.3	74.0	-35.7
12200.0	37.9	3.4	41.3	74.0	-32.7
19520.0	25.0	13.3	38.3	74.0	-35.7

Table 10-34: Radiated Emissions Harmonics/Spurious - 2440 MHz, Bluetooth, Average Detector

Frequency (MHz)	Average Analyzer (dBuV/m)	Site Correction Factor (dB/m)	Average Corrected (dBuV/m)	Average Limit (dBuV/m)	Average Margin (dB)
4880.0	43.9	0.6	44.5	54.0	-9.5
7320.0	37.3	-2.3	35.0	54.0	-19.0
12200.0	33.0	3.4	36.4	54.0	-17.6
19520.0	19.9	13.3	33.2	54.0	-20.8

Table 10-35: Radiated Emissions Harmonics/Spurious - 2480 MHz, Bluetooth, Peak Detector

Frequency (MHz)	Peak Analyzer (dBuV/m)	Site Correction Factor (dB/m)	Peak Corrected (dBuV/m)	Peak Limit (dBuV/m)	Peak Margin (dB)
4960.0	46.3	0.8	47.1	74.0	-26.9
7440.0	39.7	-2.4	37.3	74.0	-36.7
12400.0	37.1	3.7	40.8	74.0	-33.2
19840.0	26.4	13.1	39.5	74.0	-34.5
22320.0	19.8	12.0	31.8	74.0	-42.2

Table 10-36: Radiated Emissions Harmonics/Spurious - 2480 MHz, Bluetooth, Average Detector

Frequency (MHz)	Average Analyzer (dBuV/m)	Site Correction Factor (dB/m)	Average Corrected (dBuV/m)	Average Limit (dBuV/m)	Average Margin (dB)
4960.0	44.3	0.8	45.1	54.0	-8.9
7440.0	34.7	-2.4	32.3	54.0	-21.7
12400.0	31.7	3.7	35.4	54.0	-18.6
19840.0	21.5	13.1	34.6	54.0	-19.4
22320.0	13.8	12.0	25.8	54.0	-28.2

Measurement uncertainty: Measurement uncertainties shown for these tests are expanded uncertainties expressed at 95% confidence level using a coverage factor k = 2. +4.0 dB/-2.65 dB

Table 10-37: Radiated Emissions Test Equipment

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901663	Rohde and Schwarz	HFH2-Z2	Loop Antenna (9 kHz-30 MHz)	827525/019	5/1/19
900932	Hewlett Packard	8449B OPT H02	Preamplifier (1-26.5 GHz)	3008A00505	8/18/18
900905	Rhein Tech Laboratories	PR-1040	OATS 1 Preamplifier 40dB (30 MHz-2 GHz)	1006	8/18/18
900878	Rhein Tech Laboratories	AM3-1197-0005	3 meter Antenna mast, polarizing	Outdoor Range 1	Not Required
901592	Insulated Wire Inc.	KPS-1503-3600-KPR	SMK RF Cables 20'	NA	8/21/18
901593	Insulated Wire Inc.	KPS-1503-360-KPR	SMK RF Cables 36"	NA	8/18/18
901242	Rhein Tech Laboratories	WRT-000-0003	Wood rotating table	N/A	Not Required
900913	Hewlett Packard	85462A	EMI Receiver RF Section (9 kHz-6.5 GHz)	3325A00159	4/4/19
900914	Hewlett Packard	85460A	RF Filter Section (100 kHz-6.5 GHz)	3330A00107	4/4/19
900772	EMCO	3161-02	Horn Antenna (2-4 GHz)	9804-1044	4/9/18
900321	EMCO	3161-03	Horn Antenna (4.0-8.2 GHz)	9508-1020	4/9/18
900323	EMCO	3160-07	Horn Antenna (8.2-12.4 GHz)	9605-1054	4/9/18
900356	EMCO	3160-08	Horn Antenna (12.4-18 GHz)	9607-1044	4/9/18
901218	EMCO	3160-09	Horn Antenna (18-26.5 GHz)	960281-003	4/4/18
901581	Rohde & Schwarz	FSU	Spectrum Analyzer	1166.1660.50	3/22/18
900791	Antenna Research Associates, Inc.	LPB-2520	BiLog Antenna (25-1000 MHz)	1037	10/4/20

PASS

Test Personnel:

Khue N. Do
 Test Engineer



Signature

February 15-27, 2018
 Dates of Test

Rhein Tech Laboratories, Inc.
360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Client: Garmin Int'l Inc.
Model: A03436
Standards: FCC 15.247/IC RSS-247
ID's: IPH-03436, 1792A-03436
Report #: 2017240

11 Conclusion

The data in this measurement report shows that the EUT as tested, Garmin International Inc. Model/HVIN A03436, FCC ID: IPH-03436, IC: 1792A-03436, complies with all the applicable requirements of Parts 2 and 15 of the FCC Rules and Regulations, and IC RSS-247 and RSS-Gen.