



Engineering Solutions & Electromagnetic Compatibility Services

**FCC Part 15.225 & Industry Canada RSS-210
Certification Application Report**

Test Lab: Rhein Tech Laboratories, Inc. Phone: 703-689-0368 360 Herndon Parkway Fax: 703-689-2056 Suite 1400 www.rheintech.com Herndon, VA 20170 E-Mail: atcbinfo@rheintech.com		Applicant: Garmin International Inc. Phone: 913-440-5471 1200 E. 151 st Street Olathe, Kansas 66062 Contact: William Pertner	
FCC/IC ID	IPH-03438/ 1792A-03438	Test Report Date	April 9, 2018
Platform	N/A	RTL Work Order #	2017241
Model/HVIN	A03438	RTL Quote #	QRTL17-241A
American National Standard Institute	ANSI C63.10-2013: American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices		
FCC Classification	DXX – Part 15 Low Power Communication Device Transmitter		
FCC Rule Part(s)/Guidance	Part 15.225: Operation within the band 13.110-14.010 MHz (10-01-17)		
Industry Canada	RSS-210 Issue 9: Licence-Exempt Radio Apparatus: Category I Equipment RSS-Gen: Issue 4: General Requirements for Compliance of Radio Apparatus		
Frequency Range (MHz)	Output Power (W)	Frequency Tolerance	Emission Designator
13.56	N/A	N/A	2M48A1D

I, the undersigned, hereby declare that the equipment tested and referenced in this report conforms to the identified standard(s) as described in this test report. No modifications were made to the equipment during testing in order to achieve compliance with these standards. Furthermore, there was no deviation from, additions to, or exclusions from, the applicable parts of FCC Part 2, FCC Part 15, RSS-210, and ANSI C63.10.

Signature: 

Date: April 9, 2018

Typed/Printed Name: Desmond A. Fraser

Position: President

*These tests are accredited and meet the requirements of ISO/IEC 17025 as verified by ANAB.
Refer to certificate and scope of accreditation AT-1445.*

This report may not be reproduced, except in full, without the written approval of Rhein Tech Laboratories, Inc. and Garmin International Inc. The test results relate only to the item(s) tested.

Table of Contents

1	General Information.....	5
1.1	Scope	5
1.2	Description of EUT	5
1.3	Test Facility.....	5
1.4	Related Submittal(s)/Grant(s)	5
1.5	Modifications	5
2	Test Information	6
2.1	Description of Test Modes	6
2.2	Exercising the EUT.....	6
2.3	Test Result Summary.....	6
2.4	Test System Details	6
2.5	Configuration of Tested System.....	7
3	Radiated Emissions – FCC 15.209, 15.225(a) & (d); IC RSS-210 B.6; RSS-Gen.....	8
3.1	Limits of Radiated Emissions Measurement.....	8
3.2	Radiated Emissions Measurement Test Procedure.....	8
3.3	Radiated Emissions Test Data.....	9
3.4	Radiated Emissions Harmonics/Spurious Test Data	10
3.5	Radiated Emissions Digital Test Data.....	13
4	AC Conducted Emissions - FCC 15.207; IC RSS-Gen 8.8: Conducted Limits.....	14
4.1	Site and Test Description.....	14
4.2	Test Limits.....	14
4.3	Conducted Emissions Test Data.....	15
5	Occupied Bandwidth – IC RSS-Gen 6.6.....	17
5.1	99% Bandwidth Test Procedure	17
5.2	99% Bandwidth Test Data	17
5.3	99% Bandwidth Plots	18
6	Frequency Stability – FCC 2.1055, 15.225(e): Frequency Stability; IC RSS-210 B.6 Transmitter Frequency Stability	27
6.1	Test Procedure.....	27
6.2	Test Data	27
7	Conclusion	28

Figure Index

Figure 2-1: Configuration of System Under Test7

Table Index

Table 2-1: Channels Tested6
 Table 2-2: Test Result Summary6
 Table 2-3: Equipment Under Test6
 Table 3-1: Radiated Emissions Test Data (Fundamental)9
 Table 3-2: Radiated Emissions Harmonics/Spurious: TVDD 4.75V, Type A10
 Table 3-3: Radiated Emissions Harmonics/Spurious: TVDD 4.75V, Type B10
 Table 3-4: Radiated Emissions Harmonics/Spurious: TVDD 4.75V, Type A&B.....10
 Table 3-5: Radiated Emissions Harmonics/Spurious: TVDD 3.90V, Type A11
 Table 3-6: Radiated Emissions Harmonics/Spurious: TVDD 3.90V, Type B11
 Table 3-7: Radiated Emissions Harmonics/Spurious: TVDD 3.90V, Type A&B.....11
 Table 3-8: Radiated Emissions Harmonics/Spurious: TVDD 3.20V, Type A12
 Table 3-9: Radiated Emissions Harmonics/Spurious: TVDD 3.20V, Type B12
 Table 3-10: Radiated Emissions Harmonics/Spurious: TVDD 3.20V, Type A&B.....12
 Table 3-11: Digital Radiated Emissions Test Data13
 Table 3-12: Radiated Emissions Test Equipment.....13
 Table 4-1: Conducted Emissions Test Equipment.....16
 Table 5-1: 99% Bandwidth Test Data17
 Table 5-2: 99% Bandwidth Test Equipment26
 Table 6-1: Temperature Frequency Stability27
 Table 6-2: TVDD Voltage Frequency Stability at 20°C27
 Table 6-3: External Voltage Frequency Stability at 20°C27
 Table 6-4: Frequency Stability Test Equipment.....28

Plot Index

Plot 4-1: Conducted Emissions Receive – Neutral15
 Plot 4-2: Conducted Emissions Receive – Phase.....15
 Plot 5-1: 99% Bandwidth – 4.75V – Type A.....18
 Plot 5-2: 99% Bandwidth – 4.75V – Type B.....19
 Plot 5-3: 99% Bandwidth – 4.75V – Type A&B.....20
 Plot 5-4: 99% Bandwidth – 3.2V – Type A21
 Plot 5-5: 99% Bandwidth – 3.2V – Type B22
 Plot 5-6: 99% Bandwidth – 3.2V – Type A&B.....23
 Plot 5-7: 99% Bandwidth – 3.9V – Type A24
 Plot 5-8: 99% Bandwidth – 3.9V – Type B25
 Plot 5-9: 99% Bandwidth – 3.9V – Type A&B.....26

Appendix Index

Appendix A: Test Configuration Photographs.....29

Photograph Index

Photograph 1: Radiated Testing – Front View 29
Photograph 2: Radiated Testing – Side View (Below 30 MHz)..... 30
Photograph 3: Conducted Testing – Front View 31

1 General Information

1.1 Scope

Applicable Standards:

- FCC Part 15.225: Operation within the band 13.110-14.010 MHz
- Industry Canada RSS-210: Low Power License-Exempt Communications Devices
- Industry Canada RSS-Gen: Issue 4: General Requirements for Compliance of Radio Apparatus

1.2 Description of EUT

Equipment Under Test	Body-worn transmitter
Model/HVIN	A03438
Power Supply	Battery operated
Modulation Type	ASK
Frequency Range	13.56 MHz
Antenna Connector Type	Magnet Loop
Antenna Type	Internal

1.3 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data is located at 360 Herndon Parkway, Suite 1400, Herndon, Virginia 20170. This site has been fully described in a report and approved by the Federal Communications Commission to perform AC line conducted and radiated emissions testing.

1.4 Related Submittal(s)/Grant(s)

This is an original certification application for Garmin International Inc. Model/HVIN: A03438, FCC ID: IPH-03438, IC: 1792A-03438.

1.5 Modifications

No modifications were made to the equipment during testing in order to achieve compliance with these standards.

2 Test Information

2.1 Description of Test Modes

Table 2-1: Channels Tested

Frequency (MHz)
13.56

2.2 Exercising the EUT

The EUT was supplied with test firmware programmed with modulation types and rates. The EUT was tested in all three orthogonal planes in order to determine worst-case emissions. The EUT was provided with software to continuously transmit during testing. The carrier was also checked to verify that information was being transmitted.

2.3 Test Result Summary

Table 2-2: Test Result Summary

FCC Standard	IC Standard	Test	Pass/Fail or N/A
FCC 15.207	RSS-Gen 8.8	AC Power Conducted Emissions	Pass
FCC 15.209	RSS-Gen	Radiated Emissions	Pass
FCC 15.225(a), (d)	RSS-210	Field Strength of Fundamental and Harmonics	Pass
	RSS-Gen 6.6	99% Bandwidth	Pass
2.1055, 15.225(e)	RSS-210 B.6	Frequency Stability	Pass

2.4 Test System Details

The test samples were received on February 27, 2018. The FCC identifiers for all applicable equipment, plus descriptions of all cables used in the tested system, are identified in the following table.

Table 2-3: Equipment Under Test

Part	Manufacturer	Model	Serial Number	FCC ID	Cable Description	RTL Bar Code
Body-worn transmitter	Garmin International Inc.	A03438	5G5000042	IPH-03438	N/A	22866
Body-worn transmitter	Garmin International Inc.	A03438	5G5000048	IPH-03438	N/A	22867

2.5 Configuration of Tested System




Figure 2-1: Configuration of System Under Test

3 Radiated Emissions – FCC 15.209, 15.225(a) & (d); IC RSS-210 B.6; RSS-Gen

3.1 Limits of Radiated Emissions Measurement

Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009-0.490	2400/f (kHz)	300
0.490-1.705	2400/f (kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

As shown in 15.35(b), for frequencies above 1000 MHz, the field strength limits are based on average detector however, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 99% under any circumstances of modulation.

15.225(a) states “The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.”

$20\log(15,848)=84$ dBuV/m at 30 m.

3.2 Radiated Emissions Measurement Test Procedure

Before final measurements of radiated emissions were made on the open-field three/ten meter range, the EUT was scanned indoors at one and three meter distances. This was done in order to determine its emissions spectrum signature. The physical arrangement of the test system and associated cabling was varied in order to determine the effect on the EUT's emissions in amplitude, direction and frequency. This process was repeated during final radiated emissions measurements on the open-field range, at each frequency, in order to ensure that maximum emission amplitudes were attained.

Final radiated emissions measurements were made on the three/ten-meter, open-field test site. The EUT was placed on a nonconductive turntable 0.8 meters above the ground plane. The spectrum was examined from 9 kHz to the 10th harmonic of the highest fundamental transmitter frequency (135.6 MHz).

At each frequency, the EUT was rotated 360°, and the antenna was raised and lowered from 1 to 4 meters in order to determine the emission's maximum level. Measurements were taken using both horizontal and vertical antenna polarizations. For frequencies between 30 and 1000 MHz, the spectrum analyzer's 6 dB bandwidth was set to 120 kHz, and the analyzer was operated in the CISPR quasi-peak detection mode. For emissions above 1000 MHz, emissions are measured using the average detector function with a minimum resolution bandwidth of 1 MHz. No video filter less than 10 times the resolution bandwidth was used. The highest emission amplitudes relative to the appropriate limit were measured and recorded in this report.

3.3 Radiated Emissions Test Data

Table 3-1: Radiated Emissions Test Data (Fundamental)

TVDD (V)	Technology Type (A, B, A&B)	Emission Frequency (MHz)	Quasi-Peak Reading (dBuV/m)	Site Correction Factor (dB/m)	Quasi-Peak Corrected (dBuV/m)	Quasi-Peak Limit (dBuV/m)	Quasi-Peak Margin (dB)
4.75	A	13.56	-17.1	21.0	3.9	84.0	-80.1
	B	13.56	-18.3	21.0	2.7	84.0	-81.3
	A & b	13.56	-18.9	21.0	2.1	84.0	-81.9
3.9	A	13.56	-17.4	21.0	3.6	84.0	-80.4
	B	13.56	-19.1	21.0	1.9	84.0	-82.1
	A & b	13.56	-18.3	21.0	2.7	84.0	-81.3
3.2	A	13.56	-18.0	21.0	3.0	84.0	-81.0
	B	13.56	-18.0	21.0	3.0	84.0	-81.0
	A & b	13.56	-17.1	21.0	3.9	84.0	-80.1

Note: Levels were extrapolated to 30 m from 1 m (-59.1dB)

Part 15.225(a), (b), and (c) state:

The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.

Within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.

Within the bands 13.110-13.410 MHz and 13.710-14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.

The 30 meter readings were interpolated from 1 meter by subtracting $40 \log(30\text{m}/1\text{m})$ from the field strength.

The corrected measured fundamental levels in Table 3-1 are less than Part 15.225(b) and (c).

3.4 Radiated Emissions Harmonics/Spurious Test Data

Table 3-2: Radiated Emissions Harmonics/Spurious: TVDD 4.75V, Type A

Emission Frequency (MHz)	Analyzer Reading (dBuV/m)	Site Correction Factor (dB/m)	Corrected (dBuV/m)	Limit (dBuV/m)	Margin (dB)
27.12	-25.2	22.9	-2.3	29.5	-31.8
40.68	24.2	-16.3	7.9	40.0	-32.1
54.24	26.7	-22.1	4.6	40.0	-35.4
67.80	29.0	-23.1	5.9	40.0	-34.1
81.36	27.2	-21.1	6.1	40.0	-33.9
94.92	31.8	-18.5	13.3	43.5	-30.2
108.48	24.4	-17.1	7.3	43.5	-36.2
122.04	24.5	-16.7	7.8	43.5	-35.7
135.60	24.8	-17.2	7.6	43.5	-35.9

Table 3-3: Radiated Emissions Harmonics/Spurious: TVDD 4.75V, Type B

Emission Frequency (MHz)	Analyzer Reading (dBuV/m)	Site Correction Factor (dB/m)	Corrected (dBuV/m)	Limit (dBuV/m)	Margin (dB)
27.12	-25.2	22.9	-2.3	29.5	-31.8
40.68	24.2	-16.3	7.9	40.0	-32.1
54.24	26.5	-22.1	4.4	40.0	-35.6
67.80	28.8	-23.1	5.7	40.0	-34.3
81.36	27.5	-21.1	6.4	40.0	-33.6
94.92	33.7	-18.5	15.2	43.5	-28.3
108.48	23.4	-17.1	6.3	43.5	-37.2
122.04	23.8	-16.7	7.1	43.5	-36.4
135.60	24.9	-17.2	7.7	43.5	-35.8

Table 3-4: Radiated Emissions Harmonics/Spurious: TVDD 4.75V, Type A&B

Emission Frequency (MHz)	Analyzer Reading (dBuV/m)	Site Correction Factor (dB/m)	Corrected (dBuV/m)	Limit (dBuV/m)	Margin (dB)
27.12	-25.2	22.9	-2.3	29.5	-31.8
40.68	24.2	-16.3	7.9	40.0	-32.1
54.24	26.7	-22.1	4.6	40.0	-35.4
67.80	29.0	-23.1	5.9	40.0	-34.1
81.36	27.2	-21.1	6.1	40.0	-33.9
94.92	30.6	-18.5	12.1	43.5	-31.4
108.48	24.4	-17.1	7.3	43.5	-36.2
122.04	24.5	-16.7	7.8	43.5	-35.7
135.60	24.8	-17.2	7.6	43.5	-35.9

Table 3-5: Radiated Emissions Harmonics/Spurious: TVDD 3.90V, Type A

Emission Frequency (MHz)	Analyzer Reading (dBuV/m)	Site Correction Factor (dB/m)	Corrected (dBuV/m)	Limit (dBuV/m)	Margin (dB)
27.12	-25.2	22.9	-2.3	29.5	-31.8
40.68	24.7	-16.3	8.4	40.0	-31.6
54.24	26.4	-22.1	4.3	40.0	-35.7
67.80	28.0	-23.1	4.9	40.0	-35.1
81.36	27.1	-21.1	6.0	40.0	-34.0
94.92	33.6	-18.5	15.1	43.5	-28.4
108.48	25.1	-17.1	8.0	43.5	-35.5
122.04	25.6	-16.7	8.9	43.5	-34.6
135.60	24.5	-17.2	7.3	43.5	-36.2

Table 3-6: Radiated Emissions Harmonics/Spurious: TVDD 3.90V, Type B

Emission Frequency (MHz)	Analyzer Reading (dBuV/m)	Site Correction Factor (dB/m)	Corrected (dBuV/m)	Limit (dBuV/m)	Margin (dB)
27.12	-25.2	22.9	-2.3	29.5	-31.8
40.68	24.6	-16.3	8.3	40.0	-31.7
54.24	26.4	-22.1	4.3	40.0	-35.7
67.80	28.0	-23.1	4.9	40.0	-35.1
81.36	27.1	-21.1	6.0	40.0	-34.0
94.92	31.3	-18.5	12.8	43.5	-30.7
108.48	25.7	-17.1	8.6	43.5	-34.9
122.04	24.2	-16.7	7.5	43.5	-36.0
135.60	25.1	-17.2	7.9	43.5	-35.6

Table 3-7: Radiated Emissions Harmonics/Spurious: TVDD 3.90V, Type A&B

Emission Frequency (MHz)	Analyzer Reading (dBuV/m)	Site Correction Factor (dB/m)	Corrected (dBuV/m)	Limit (dBuV/m)	Margin (dB)
27.12	-25.2	22.9	-2.3	29.5	-31.8
40.68	24.9	-16.3	8.6	40.0	-31.4
54.24	25.9	-22.1	3.8	40.0	-36.2
67.80	27.3	-23.1	4.2	40.0	-35.8
81.36	27.1	-21.1	6.0	40.0	-34.0
94.92	33.8	-18.5	15.3	43.5	-28.2
108.48	25.5	-17.1	8.4	43.5	-35.1
122.04	25.5	-16.7	8.8	43.5	-34.7
135.60	24.8	-17.2	7.6	43.5	-35.9

Table 3-8: Radiated Emissions Harmonics/Spurious: TVDD 3.20V, Type A

Emission Frequency (MHz)	Analyzer Reading (dBuV/m)	Site Correction Factor (dB/m)	Corrected (dBuV/m)	Limit (dBuV/m)	Margin (dB)
27.12	-25.2	22.9	-2.3	29.5	-31.8
40.68	25.9	-16.3	9.6	40.0	-30.4
54.24	26.7	-22.1	4.6	40.0	-35.4
67.80	28.4	-23.1	5.3	40.0	-34.7
81.36	27.5	-21.1	6.4	40.0	-33.6
94.92	31.3	-18.5	12.8	43.5	-30.7
108.48	25.1	-17.1	8.0	43.5	-35.5
122.04	25.1	-16.7	8.4	43.5	-35.1
135.60	25.0	-17.2	7.8	43.5	-35.7

Table 3-9: Radiated Emissions Harmonics/Spurious: TVDD 3.20V, Type B

Emission Frequency (MHz)	Analyzer Reading (dBuV/m)	Site Correction Factor (dB/m)	Corrected (dBuV/m)	Limit (dBuV/m)	Margin (dB)
27.12	-25.2	22.9	-2.3	29.5	-31.8
40.68	26.2	-16.3	9.9	40.0	-30.1
54.24	26.8	-22.1	4.7	40.0	-35.3
67.80	28.6	-23.1	5.5	40.0	-34.5
81.36	27.5	-21.1	6.4	40.0	-33.6
94.92	31.0	-18.5	12.5	43.5	-31.0
108.48	25.3	-17.1	8.2	43.5	-35.3
122.04	25.1	-16.7	8.4	43.5	-35.1
135.60	25.4	-17.2	8.2	43.5	-35.3

Table 3-10: Radiated Emissions Harmonics/Spurious: TVDD 3.20V, Type A&B

Emission Frequency (MHz)	Analyzer Reading (dBuV/m)	Site Correction Factor (dB/m)	Corrected (dBuV/m)	Limit (dBuV/m)	Margin (dB)
27.12	-25.2	22.9	-2.3	29.5	-31.8
40.68	26.3	-16.3	10.0	40.0	-30.0
54.24	26.8	-22.1	4.7	40.0	-35.3
67.80	28.8	-23.1	5.7	40.0	-34.3
81.36	27.5	-21.1	6.4	40.0	-33.6
94.92	30.7	-18.5	12.2	43.5	-31.3
108.48	25.1	-17.1	8.0	43.5	-35.5
122.04	24.9	-16.7	8.2	43.5	-35.3
135.60	25.0	-17.2	7.8	43.5	-35.7

3.5 Radiated Emissions Digital Test Data

Table 3-11: Digital Radiated Emissions Test Data

Temperature: 73.9°F Humidity: 52%										
Emission Frequency (MHz)	Test Detector	Antenna Polarity (H/V)	Turntable Azimuth (deg)	Antenna Height (m)	Analyzer Reading (dBuV)	Site Correction Factor (dB/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pass/Fail
241.0	QP	H	90	1.0	53.2	-27.6	25.6	46.0	-20.4	PASS
391.8	QP	H	90	1.0	46.7	-23.5	23.2	46.0	-22.8	PASS
420.0	QP	H	90	1.0	39.5	-22.5	17.0	46.0	-29.0	PASS
574.0	QP	H	90	1.0	49.3	-19.5	29.8	46.0	-16.2	PASS
683.5	QP	H	90	1.0	39.1	-19.3	19.8	46.0	-26.2	PASS
691.0	QP	H	90	1.0	39.4	-19.3	20.1	46.0	-25.9	PASS
764.0	QP	H	90	1.0	56.5	-17.9	38.6	46.0	-7.4	PASS
774.0	QP	H	90	1.0	54.2	-17.8	36.4	46.0	-9.6	PASS
784.0	QP	H	90	1.0	45.8	-17.8	28.0	46.0	-18.0	PASS
794.0	QP	H	90	1.0	47.0	-18.0	29.0	46.0	-17.0	PASS
804.0	QP	H	90	1.0	44.6	-17.9	26.7	46.0	-19.3	PASS
814.0	QP	H	90	1.0	48.9	-17.6	31.3	46.0	-14.7	PASS

Table 3-12: Radiated Emissions Test Equipment

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901663	Rohde and Schwarz	HFH2-Z2	Loop Antenna (9 kHz-30 MHz)	827525/019	5/1/19
900905	Rhein Tech Laboratories	PR-1040	OATS 1 Preamp 40dB (30 MHz-2 GHz)	1006	8/18/18
900878	Rhein Tech Laboratories	AM3-1197-0005	3 meter antenna mast, polarizing	Outdoor Range 1	Not Required
901242	Rhein Tech Laboratories	WRT-000-0003	Wood rotating table	N/A	Not Required
901583	Agilent Technologies	N9010A	Spectrum Analyzer (10 Hz-26.5 GHz)	MY51250846	2/6/20
900791	Chase	CBL6111B	Bilog Antenna (30 MHz-2000 MHz)	N/A	10/4/20
900913	Hewlett Packard	85462A	EMI Receiver RF Section (9 kHz-6.5 GHz)	3325A00159	4/4/19
900914	Hewlett Packard	85460A	RF Filter Section, (100 kHz-6.5 GHz)	3330A00107	4/4/19
Test Software	Rhein Tech Laboratories	N/A	RTL Emission Software	1.1	N/A

Test Personnel:

Khue N. Do
 Test Engineer



Signature

February 28, 2018
 Date of Test

4 AC Conducted Emissions - FCC 15.207; IC RSS-Gen 8.8: Conducted Limits

4.1 Site and Test Description

The power line conducted emissions measurements were performed in a Series 81 type shielded enclosure manufactured by Rayproof. The EUT was assembled on a wooden table 80 centimeters high. Power was fed to the EUT through a 50-ohm/50 microhenry Line Impedance Stabilization Network (LISN). The EUT LISN was fed power through an A.C. filter box on the outside of the shielded enclosure. The filter box and EUT LISN housing are bonded to the ground plane of the shielded enclosure. A second LISN, the peripheral LISN, provides isolation for the EUT test peripherals. This peripheral LISN was also fed A.C. power. A metal power outlet box, which is bonded to the ground plane and electrically connected to the peripheral LISN, powers the EUT host peripherals.

The spectrum analyzer was connected to the AC line through an isolation transformer. The 50-ohm output of the EUT LISN was connected to the spectrum analyzer input through a Solar 100 kHz high-pass filter. The filter is used to prevent overload of the spectrum analyzer from noise below 100 kHz. Conducted emission levels were measured on each current-carrying line with the spectrum analyzer operating in the CISPR quasi-peak mode (or peak mode if applicable).


The analyzer's 6 dB bandwidth was set to 9 kHz. Video filter less than 10 times the resolution bandwidth is not used. Average measurements are performed in linear mode using a 10 kHz resolution bandwidth, a 1 Hz video bandwidth, and by increasing the sweep time in order to obtain a calibrated measurement. The emission spectrum was scanned from 150 kHz to 30 MHz. The highest emission amplitudes relative to the appropriate limits were measured and have been recorded.

4.2 Test Limits

Line-Conducted Emissions		
Limit (dB μ V)		
Frequency (MHz)	Quasi-Peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5.00	56	46
5.00 to 30.00	60	50

4.3 Conducted Emissions Test Data

Plot 4-1: Conducted Emissions Receive – Neutral

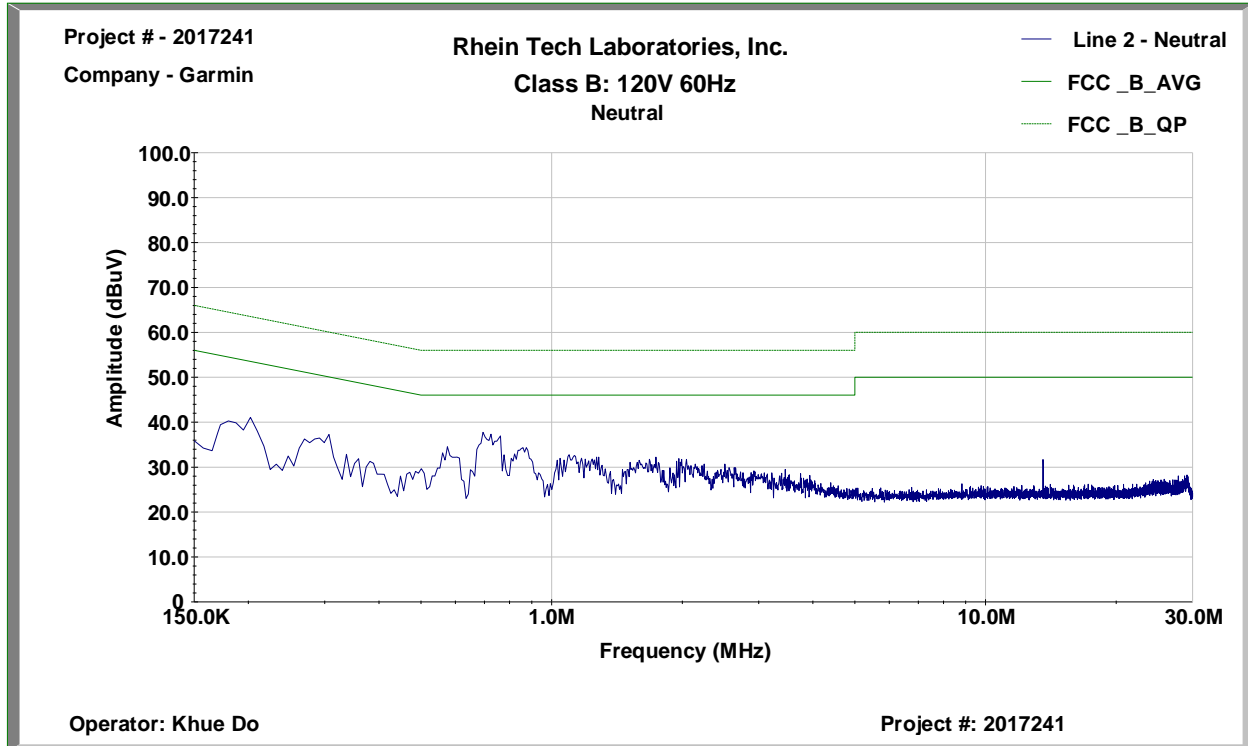

Plot 4-2: Conducted Emissions Receive – Phase

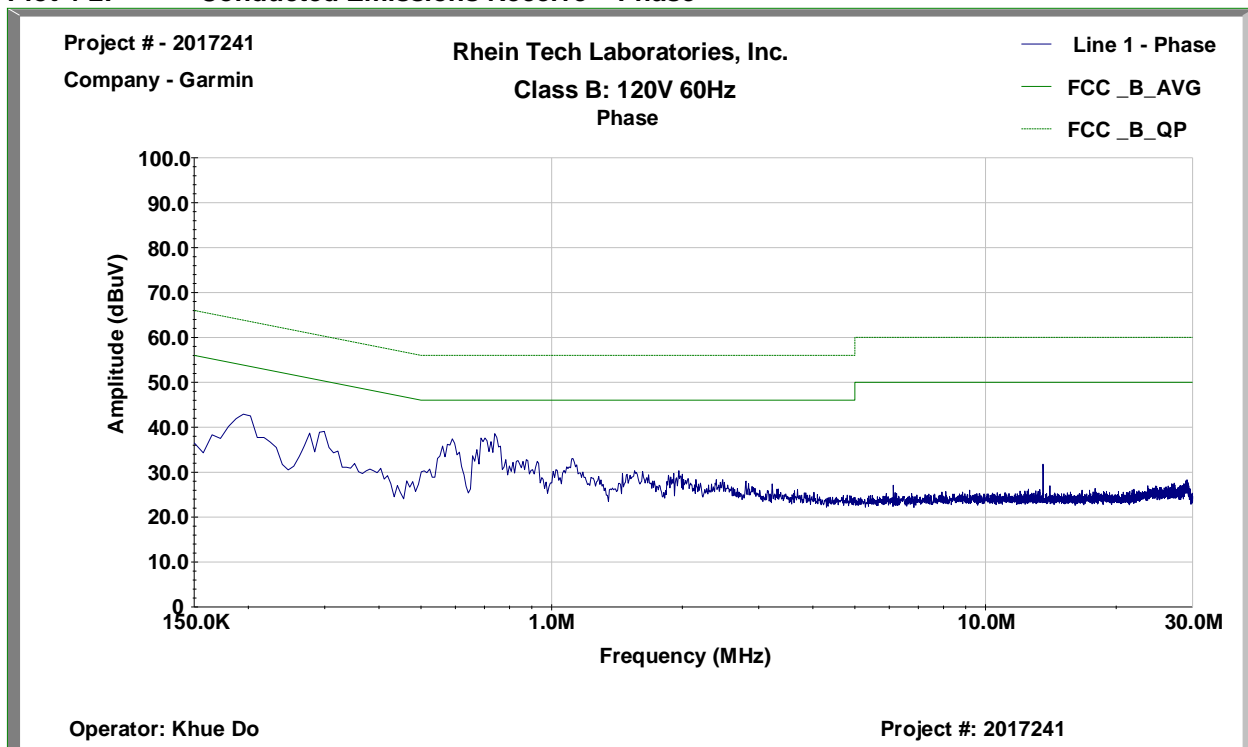


Table 4-1: Conducted Emissions Test Equipment

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
900968	Hewlett Packard	8567A	Spectrum Analyzer (10 kHz-1.5 GHz)	2602A00160	4/26/19
900339	Hewlett Packard	85650A	Quasi-Peak Adapter (30 Hz-1 GHz)	2521A00743	4/26/19
900970	Hewlett Packard	85662A	Spectrum Analyzer Display	2542A11239	4/26/19
901082	AFJ International	LS16	16A LISN	16010020081	2/13/21
Test Software	Quantum Change	TILE!7	TILE! Test Software	7.1.3.20	N/A

Test Personnel:

Khue N. Do
 Test Engineer



Signature

March 20, 2018
 Date of Test

5 Occupied Bandwidth – IC RSS-Gen 6.6

5.1 99% Bandwidth Test Procedure

The 99% bandwidths per RSS-Gen 6.6 were measured using a 50-ohm spectrum analyzer. The modulated carrier was adjusted on the analyzer so that it was displayed entirely on the spectrum analyzer. The sweep time was auto and allowed through several sweeps with the max hold function used in peak detector mode.

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the occupied bandwidth (OBW) and video bandwidth (VBW) shall be approximately 3x RBW.

Note: Video averaging is not permitted.


5.2 99% Bandwidth Test Data

Table 5-1: 99% Bandwidth Test Data


Mode	99% Bandwidth (MHz)
4.75V – Type A	2.5
4.75V – Type B	2.4
4.75V – Type A&B	2.4
3.2V – Type A	2.4
3.2V – Type B	2.4
3.2V – Type A&B	2.4
3.9V – Type A	2.4
3.9V – Type B	2.5
3.9V – Type A&B	2.4

5.3 99% Bandwidth Plots


Plot 5-1: 99% Bandwidth – 4.75V – Type A

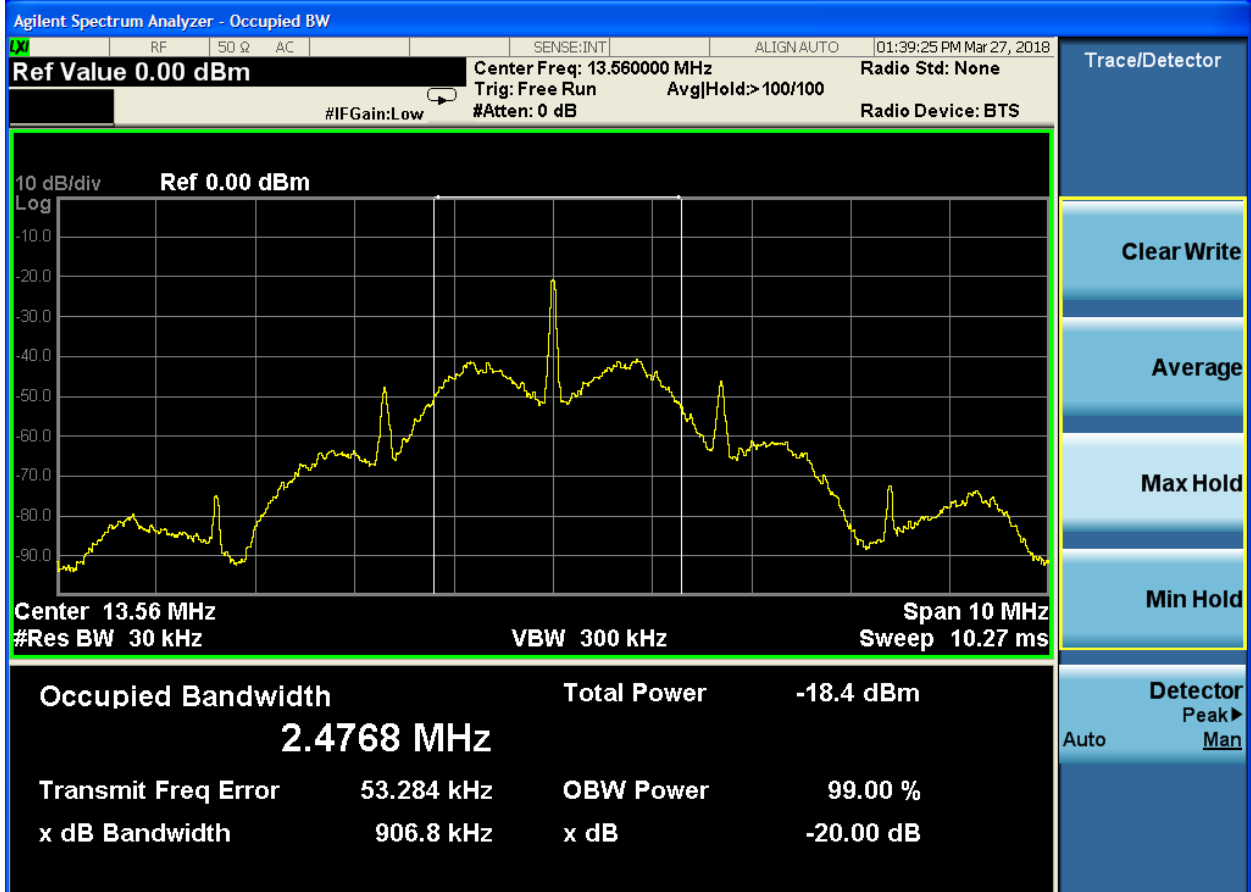


Plot 5-2: 99% Bandwidth – 4.75V – Type B

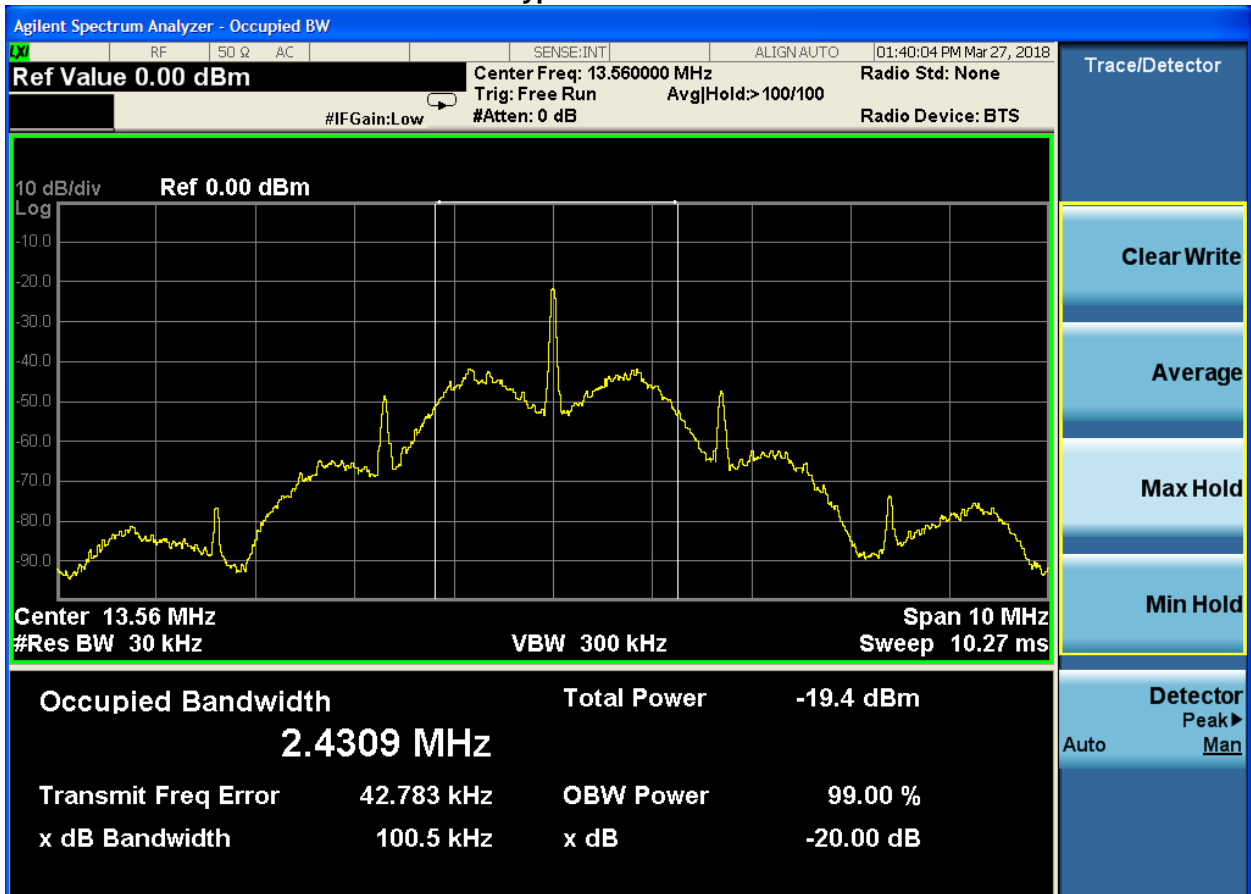


Plot 5-3: 99% Bandwidth – 4.75V – Type A&B

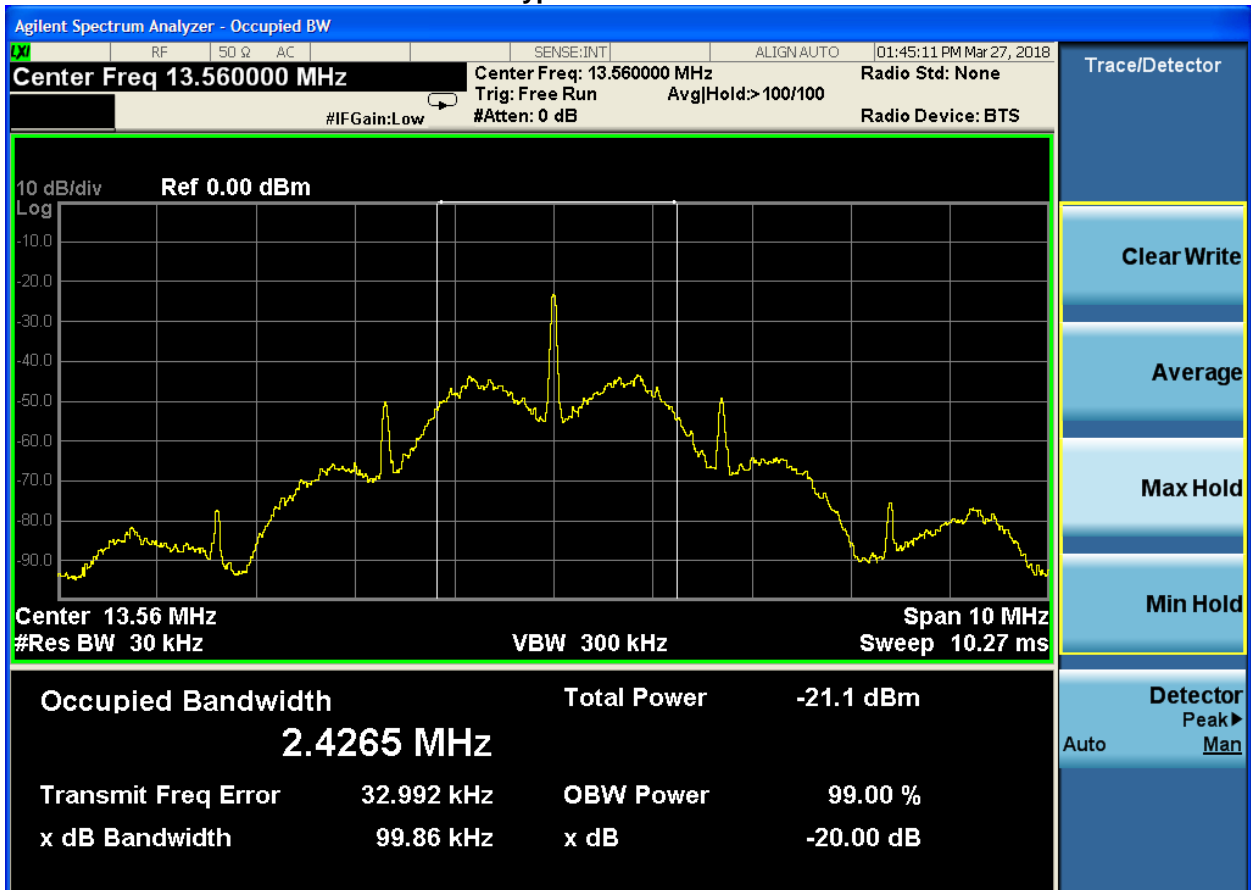


Plot 5-4: 99% Bandwidth – 3.2V – Type A

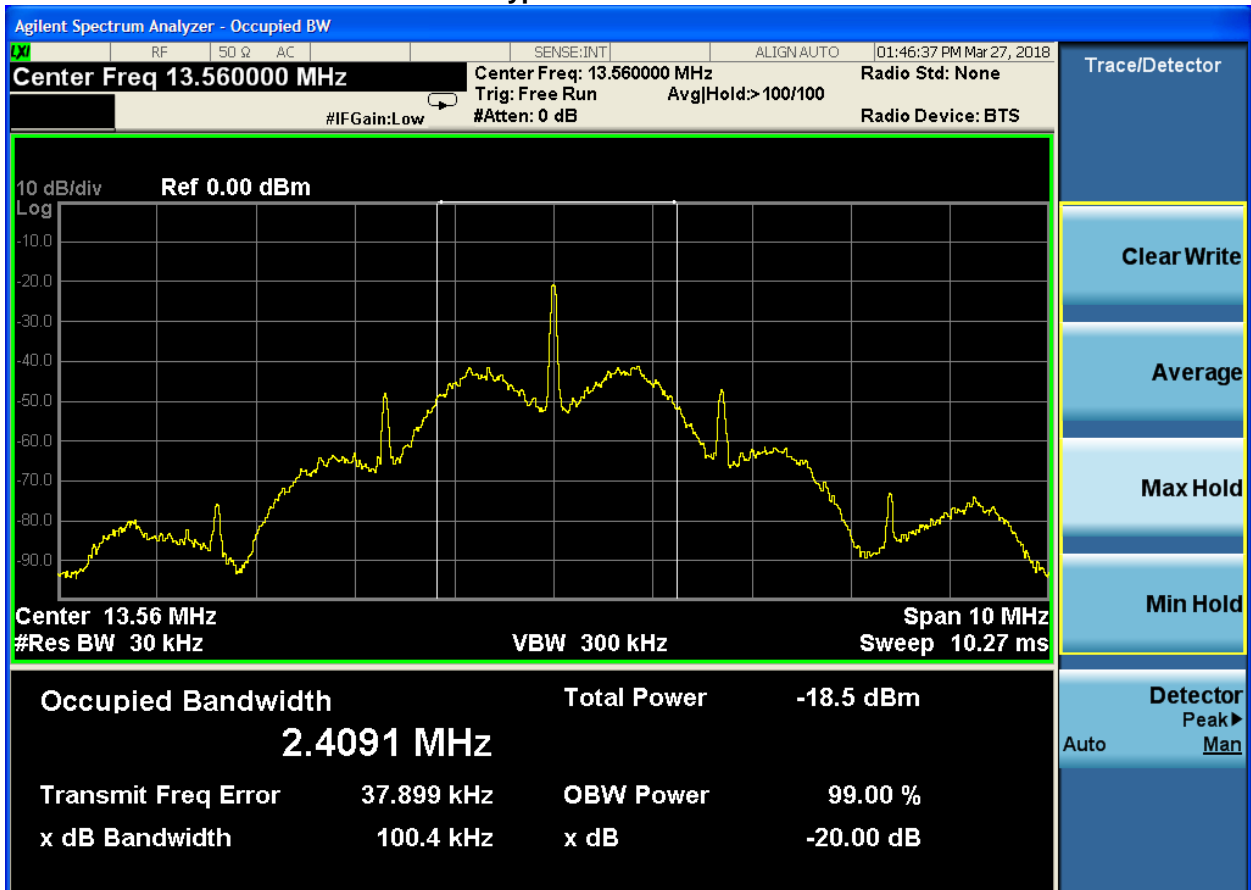


Plot 5-5: 99% Bandwidth – 3.2V – Type B

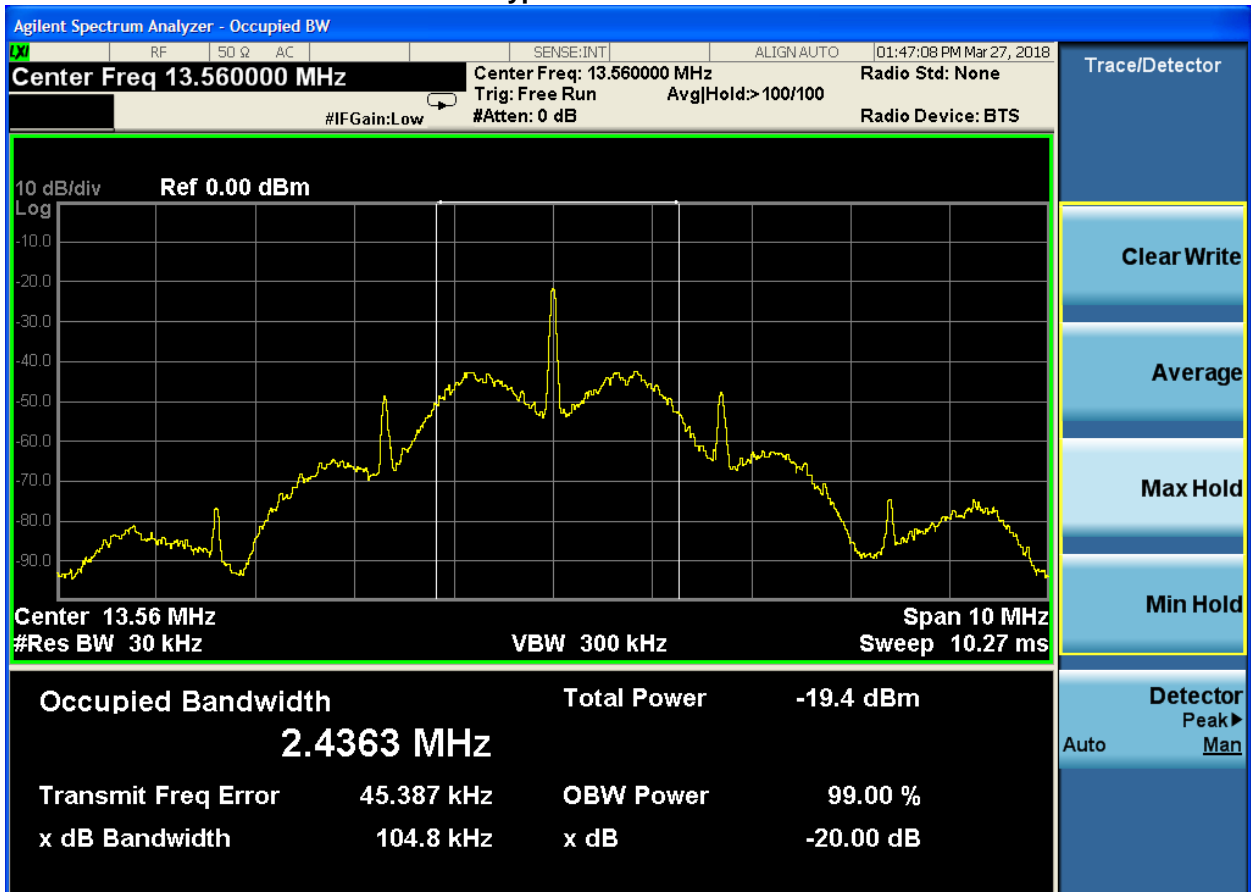


Plot 5-6: 99% Bandwidth – 3.2V – Type A&B

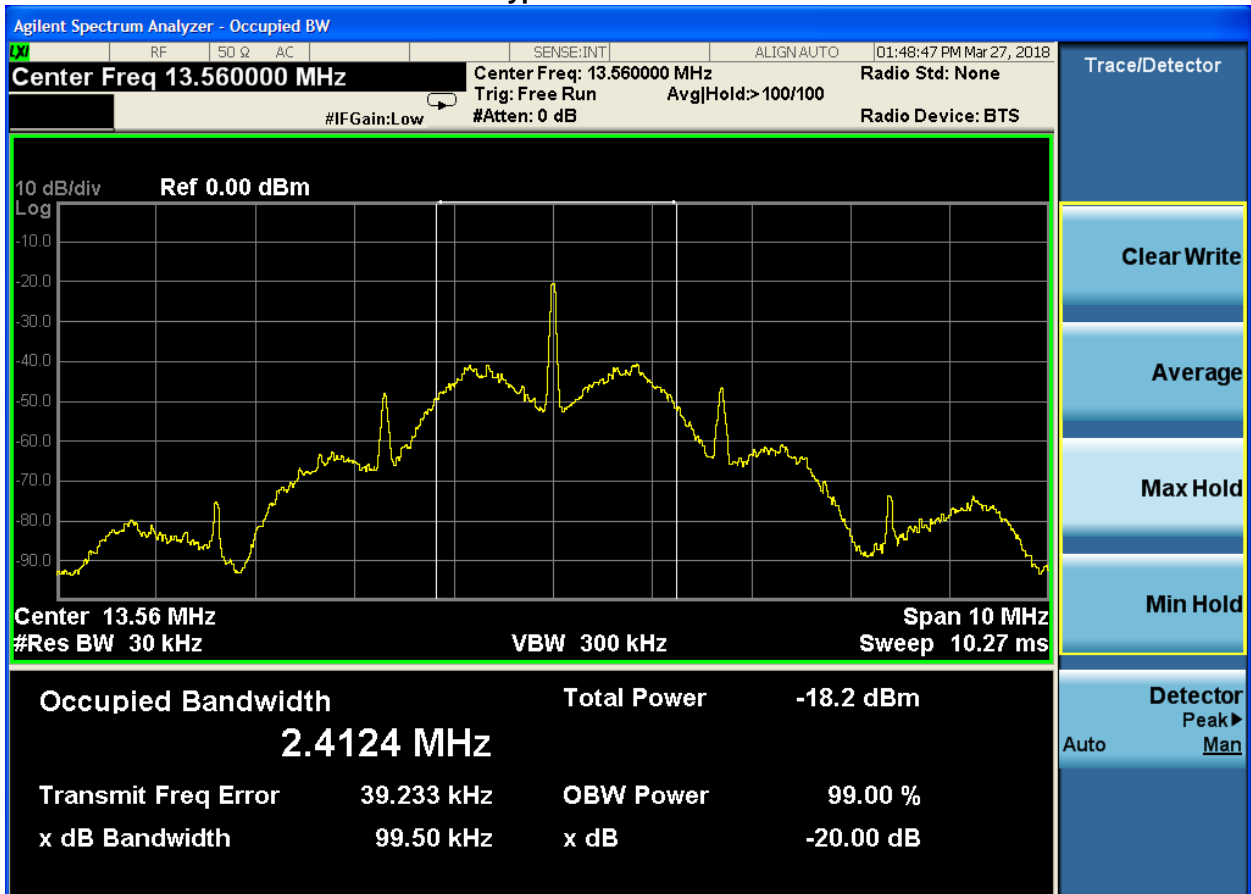

Plot 5-7: 99% Bandwidth – 3.9V – Type A

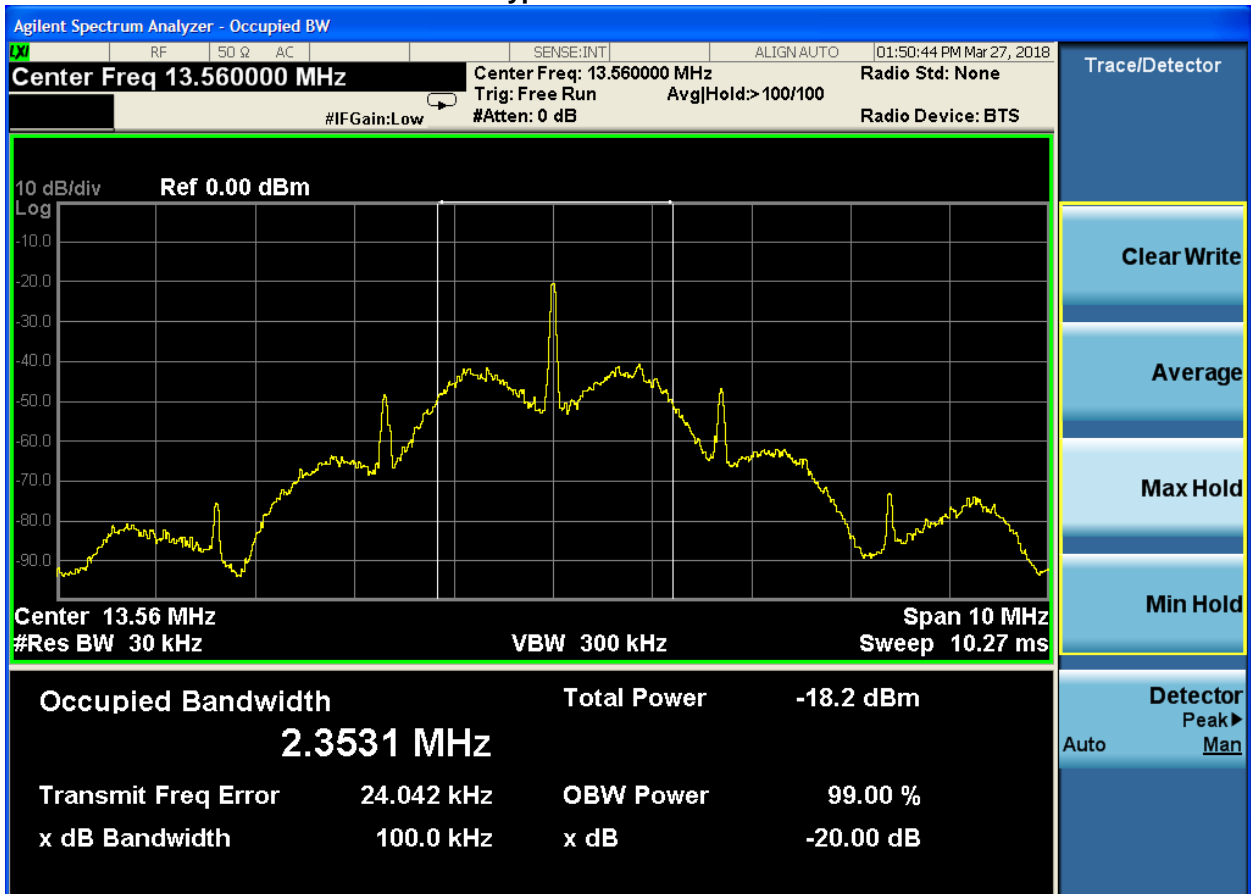

Plot 5-8: 99% Bandwidth – 3.9V – Type B

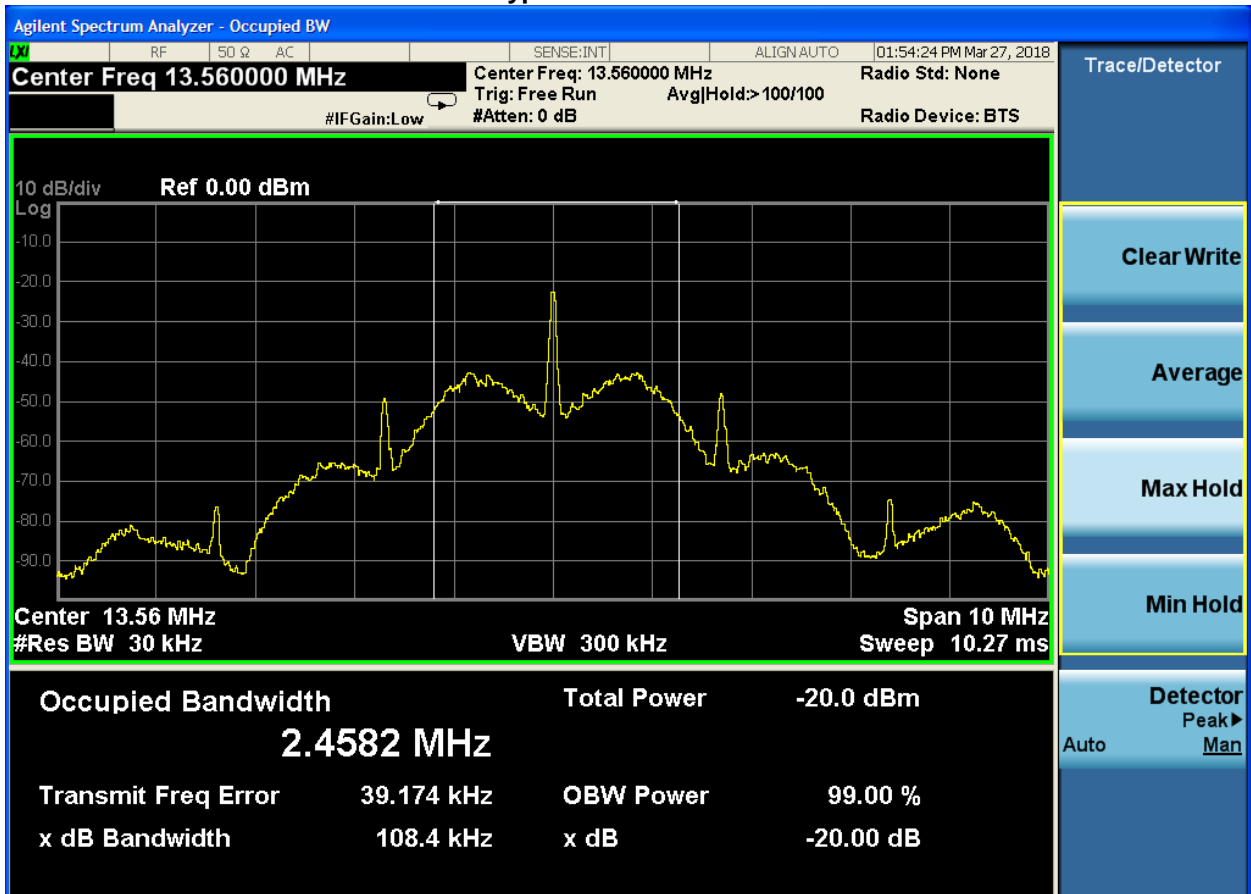

Plot 5-9: 99% Bandwidth – 3.9V – Type A&B

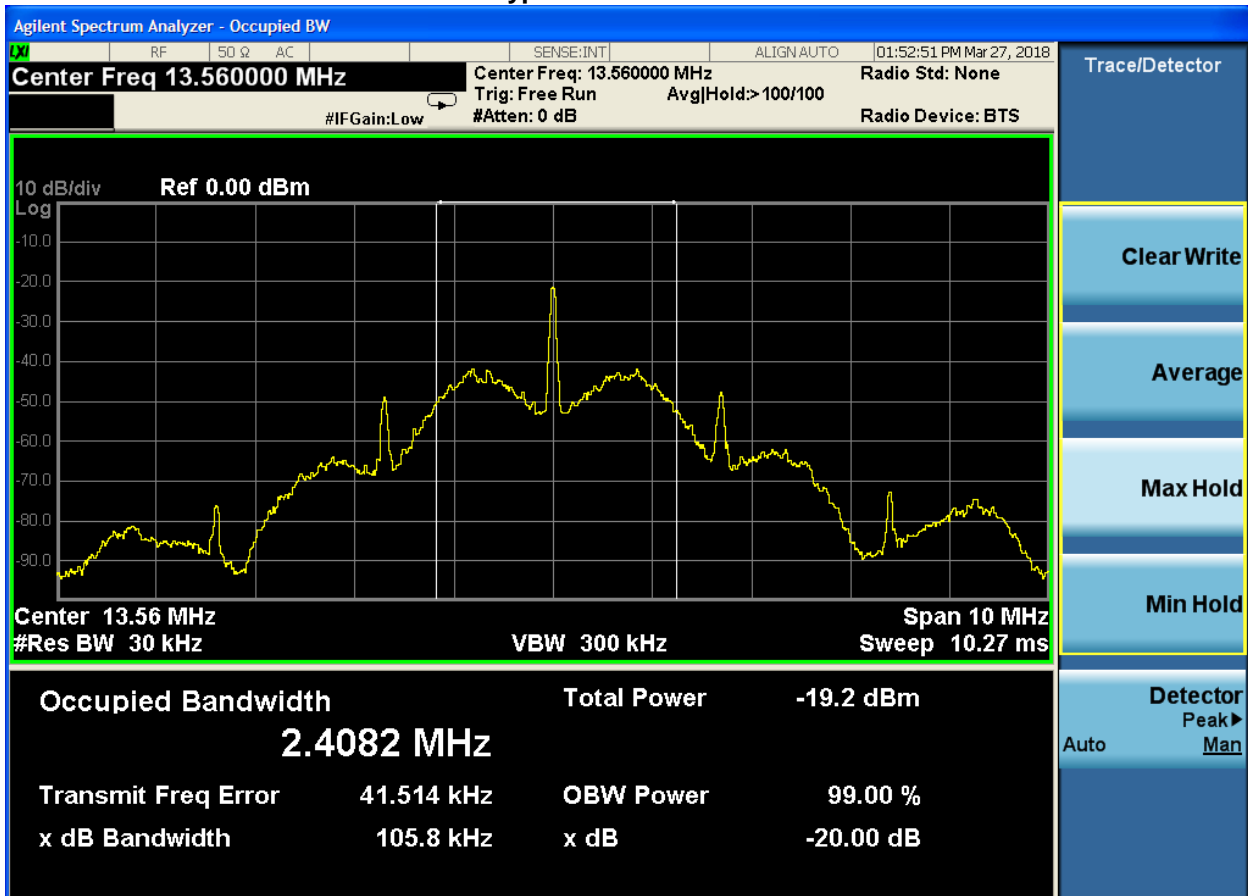


Table 5-2: 99% Bandwidth Test Equipment

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901583	Agilent Technologies	N9010A	EXA Signal Analyzer (10 Hz - 26.5 GHz)	MY51250846	2/6/20

Test Personnel:

Dan Baltzell
 Test Engineer

Signature

March 27, 2018
 Date of Test

6 Frequency Stability – FCC 2.1055, 15.225(e): Frequency Stability; IC RSS-210 B.6 Transmitter Frequency Stability

6.1 Test Procedure

The carrier frequency stability is the ability of the transmitter to maintain an assigned carrier frequency.

15.225(e): The frequency tolerance of the carrier signal shall be maintained within $\pm .01\%$ of the operating frequency over a temperature variation of -20°C to $+50^{\circ}\text{C}$ at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20°C . For battery-operated equipment, the equipment tests shall be performed using a new battery.

IC RSS-210 B.6: Carrier frequency stability shall be maintained to $\pm 0.01\%$ (± 100 ppm).

The EUT was evaluated over the temperature range -20°C to $+50^{\circ}\text{C}$.

The temperature was initially set to -20°C and a 1-hour period was observed for stabilization of the EUT. The frequency stability was measured within one minute after application of primary power to the transmitter. The temperature was raised at intervals of 10 degrees centigrade through the range. A $\frac{1}{2}$ -hour period was observed to stabilize the EUT at each measurement step and the frequency stability was measured within one minute after application of primary power to the transmitter. Additionally, the power supply voltage of the EUT was varied $\pm 15\%$ nominal input voltage.

6.2 Test Data

Table 6-1: Temperature Frequency Stability

Temperature ($^{\circ}\text{C}$)	Measured Frequency (MHz)	Percent of Operating Frequency
-20	13.560000	0.0000
-10	13.560000	0.0000
0	13.560000	0.0000
10	13.560001	0.0000
20 (reference)	13.560001	0.0000
30	13.560000	0.0000
40	13.560000	0.0000
50	13.560000	0.0000

Table 6-2: TVDD Voltage Frequency Stability at 20°C

Voltage (TVDD)	Measured Frequency (MHz)	Percent of Operating Frequency
3.2	13.560001	0.0000
3.9(reference)	13.560000	0.0000
4.75	13.560001	0.0000

Table 6-3: External Voltage Frequency Stability at 20°C


Voltage (VDC)	Measured Frequency (MHz)	Percent of Operating Frequency
4.25	13.560001	0.0000
5 (reference)	13.560000	0.0000
5.75	13.560000	0.0000

Results: The EUT is compliant.

Table 6-4: Frequency Stability Test Equipment

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
900946	Tenney Engineering, Inc.	TH65	Temperature Chamber with Humidity	11380	3/26/19
901583	Agilent Technologies	N9010A	EXA Signal Analyzer (10 Hz-26.5 GHz)	MY51250846	2/6/20
901672	Rohde&Schwarz	FSEM30	Spectrum Analyzer	1079.8500.30	4/17/19
901627	Meterman	34XR-A	Multimeter	040402802	4/19/18
N/A	Hewlett Packard	6024A	DC Power Supply	1912A00331	N/A

Test Personnel:



Daniel Baltzell
 Test Engineer

Signature

February 28, 2018
 Date of Tests

7 Conclusion

The data in this measurement report shows that the EUT as tested, Garmin International Inc. Model/HVIN A03438, FCC ID: IPH-03438, IC: 1792A-03438, complies with the applicable requirements of Parts 2 and 15 of the FCC Rules and Regulations, and IC RSS-210 and RSS-Gen.