

FCC/ISED Test Report

Prepared for: Garmin International Inc.

Address: 1200 E. 151st Street
Olathe, Kansas, 66062, USA

Product: A03644

Test Report No: R20181212-20-02B

Approved by:



Nic S. Johnson, NCE

Technical Manager

iNARTE Certified EMC Engineer #EMC-003337-NE

DATE: 11 April 2019

Total Pages: 56

The Nebraska Center for Excellence in Electronics (NCEE) authorizes the above named company to reproduce this report provided it is reproduced in its entirety for use by the company's employees only. Any use that a third party makes of this report, or any reliance on or decisions made based on it, are the responsibility of such third parties. NCEE accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report. This report applies only to the items tested.

	Report Number:	R20181212-20-02A	Rev	A
	Prepared for:	Garmin		

REVISION PAGE

Rev. No.	Date	Description
0	27 February 2019	Original – NJohnson Prepared by KVepuri/CFarrington
A	13 March 2019	Updated antenna description – NJohnson Includes NCEE Labs report R20181212-20-02 and its amendment in full. -NJ
B	11 April 2019	Section 4.1 was updated to show duty cycle for each modulation type. Section 4.4 was modified to show peak measurement are compliant with average limit for measurements aboe 1 GHz with 100% duty cycle. GFSK Low channel at 14919 MHz, GFSK mid channel at at 14227 and TGFSK High channel at 14629 MHz were re-measured and verified to be within the labs measurement noise floor and at least 6 dB below the average limit with a peak detector and removed from dataset. Includes NCEE Labs report R20181212-20-02A and its amendment in full. -NJ



Report Number:	R20181212-20-02	Rev	B
Prepared for:	Garmin		

CONTENTS

Revision Page	2
1.0 Summary of test results	4
2.0 EUT Description	5
2.1 Equipment under test	5
2.2 Description of test modes	6
2.3 Description of support units	6
3.0 Laboratory description.....	7
3.1 Laboratory description.....	7
3.2 Test personnel.....	7
3.3 Test equipment.....	8
4.0 Detailed results.....	9
4.1 Duty Cycle	9
4.2 Peak Output Power	10
4.3 Bandwidth.....	17
4.4 Radiated emissions.....	25
4.5 Band edges	44
4.6 Conducted AC Mains Emissions	50
Appendix A: Sample Calculation	53
Appendix B – Measurement Uncertainty	55
REPORT END.....	56



Report Number:	R20181212-20-02	Rev	B
Prepared for:	Garmin		

1.0 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

- (1) US Code of Federal Regulations, Title 47, Part 15
- (2) ISED RSS-Gen, Issue 5
- (3) ISED RSS-210, Issue 9

SUMMARY			
Requirement	Test Type and Limit	Result	Remark
FCC 15.203	Unique Antenna Requirement	Pass	Sheet metal antenna mounted directly to PCB
FCC 15.35 RSS-Gen, 6.10	Duty cycle of pulsed emissions	N/A	Not required
NA	Maximum Peak Output Power	N/A	Informational Purpose Only
NA	Minimum Bandwidth	N/A	Informational Purpose Only
FCC 15.209 RSS-Gen, 7.1	Receiver Radiated Emissions	Pass	Meets the requirement of the limit.
FCC 15.209 RSS-Gen, 8.9 RSS-210 A1.2 FCC 15.249(a)	Transmitter Radiated Emissions	Pass	Meets the requirement of the limit.
FCC 15.209, 15.205, 15.249(d) RSS-Gen, 8.9 RSS-210, 5.5	Band Edge Measurement	Pass	Meets the requirement of the limit.
FCC 15.207 RSS-Gen. 8.8	Conducted AC Emissions	N/A	Meets the requirement of the limit.

Report Number:	R20181212-20-02	Rev	B
Prepared for:	Garmin		

2.0 EUT DESCRIPTION

2.1 EQUIPMENT UNDER TEST

Summary

The Equipment Under Test (EUT) was a battery powered wearable GMSK and GFSK transceiver manufactured by GARMIN inc.

EUT	A03644
EUT Received	4 February 2019
EUT Tested	5 February 2019- 27 February 2019
Serial No.	3987106354 (radiated) 3987105383 (radiated) 03987106209 (conducted)
Operating Band	2400 – 2483.5 MHz
Device Type	GMSK, GFSK
Power Supply	Internal Battery/ Charger: Garmin (Phi Hong) MN: PSAl105R-050QL6

NOTE: For more detailed features description, please refer to the manufacturer's specifications or user's manual.



Report Number:	R20181212-20-02	Rev	B
Prepared for:	Garmin		

2.2 DESCRIPTION OF TEST MODES

The EUT operates on, and was tested at the frequencies below:

Channel	Frequency
Low	2402 MHz
Mid	2440 MHz
High	2480 MHz

These are the only three representative channels tested in the frequency range according to FCC Part 15.31 and RSS-Gen Table A1. See the operational description for a list of all channel frequency and designations.

This EUT was set to transmit in a worse-case scenario with modulation on. The manufacturer modified the unit to transmit continuously on the lowest, middle and highest frequency channels.

The EUT was tested for spurious emissions while running off of battery power.

2.3 DESCRIPTION OF SUPPORT UNITS

None

3.0 LABORATORY DESCRIPTION

3.1 LABORATORY DESCRIPTION

All testing was performed at the following Facility:

The Nebraska Center for Excellence in Electronics (NCEE Labs)
 4740 Discovery Drive
 Lincoln, NE 68521

A2LA Certificate Number:	1953.01
FCC Accredited Test Site Designation No:	US1060
Industry Canada Test Site Registration No:	4294A-1
NCC CAB Identification No:	US0177

Environmental conditions varied slightly throughout the tests:

Relative humidity of $35 \pm 4\%$
 Temperature of $22 \pm 3^\circ$ Celsius



3.2 TEST PERSONNEL

No.	PERSONNEL	TITLE	ROLE
1	Nic Johnson	Technical Manager	Review/editing
2	Karthik Vepuri	Test Engineer	Testing and report
3	Caleb Farrington	Test Technician	Testing and report

Notes:

All personnel are permanent staff members of NCEE Labs. No testing or review was sub-contracted or performed by sub-contracted personnel.



Report Number:	R20181212-20-02	Rev	B
Prepared for:	Garmin		

3.3 TEST EQUIPMENT

DESCRIPTION AND MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CALIBRATION DATE	CALIBRATION DUE DATE
Rohde & Schwarz Test Receiver	ES126	100037	30 Jan 2018	30 Jan 2019
EMCO Biconilog Antenna	3142B	1647	02 Aug 2017	02 Aug 2019
EMCO Horn Antenna	3115	6416	26 Jan 2018	26 Jan 2020
EMCO Horn Antenna	3116	2576	31 Jan 2018	31 Jan 2020
Rohde & Schwarz Preamplifier	TS-PR18	3545700803	09 Mar 2018*	09 Mar 2019*
Trilithic High Pass Filter	6HC330	23042	09 Mar 2018*	09 Mar 2019*
Rohde & Schwarz LISN	ESH3-Z5	836679/010	26 Jul 2018	26 Jul 2019
RF Cable (preamplifier to antenna)	MFR-57500	01-07-002	09 Mar 2018*	09 Mar 2019*
RF Cable (antenna to 10m chamber bulkhead)	FSCM 64639	01E3872	09 Mar 2018*	09 Mar 2019*
RF Cable (10m chamber bulkhead to control room bulkhead)	FSCM 64639	01E3874	09 Mar 2018*	09 Mar 2019*
RF Cable (Control room bulkhead to RF switch)	FSCM 64639	01E3871	09 Mar 2018*	09 Mar 2019*
RF Cable (RF switch to test receiver)	FSCM 64639	01F1206	09 Mar 2018*	09 Mar 2019*
RF switch – Rohde and Schwarz	TS-RSP	1113.5503.14	09 Mar 2018*	09 Mar 2019*
N connector bulkhead (10m chamber)	PE9128	NCEEBH1	09 Mar 2018*	09 Mar 2019*
N connector bulkhead (control room)	PE9128	NCEEBH2	09 Mar 2018*	09 Mar 2019*
Rohde and Schwarz Software Version 1.60	ESK-1	2575	N/A	N/A

*Internal Characterization

Notes:

All equipment is owned by NCEE Labs and stored permanently at NCEE Labs facilities.



Report Number:	R20181212-20-02	Rev	B
Prepared for:	Garmin		

4.0 DETAILED RESULTS

4.1 DUTY CYCLE

Test Method: NA

GFSK Modulation

Maximum duty cycle declared by the manufacturer = 13 ms in 100ms window

Duty cycle correction factor = $20 \cdot \log((13)/100) = -17.72$ dB

GMSK Modulation:

Up to 100%

Report Number:	R20181212-20-02	Rev	B
Prepared for:	Garmin		

4.2 PEAK OUTPUT POWER

Test Method: N/A

For Informational Purposes only

Test procedures:

1. The EUT was connected to the spectrum analyzer directly with a low-loss shielded coaxial cable
2. The resolution bandwidth was set to 10 MHz and the video bandwidth was set to 10 MHz to capture the signal. The analyzer used a peak detector in max hold mode.

Deviations from test standard:

No deviation.

Test setup:

The field strength was measured by connecting the EUT directly to the spectrum analyzer. See Section 4.2.

EUT operating conditions:

The EUT was powered by internal battery power unless specified and set to transmit continuously on the lowest frequency channel, highest frequency channel and one in the middle of its operating range. EUT was set to transmit in GFSK and GMSK.

Test results:

Peak Output Power

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK OUTPUT POWER (dBm)	PEAK OUTPUT POWER (mW)	Method	Transmitter
1	2402	6.43	4.40	Conducted	GMSK
2	2440	5.67	3.69	Conducted	GMSK
3	2480	4.77	3.00	Conducted	GMSK
1	2402	2.91	1.95	Conducted	GFSK
2	2440	2.26	1.68	Conducted	GFSK
3	2480	1.35	1.36	Conducted	GFSK



Marker 1 [T1]	RBW	10 MHz	RF Att	40 dB
Ref Lvl	6.43 dBm	VBW	10 MHz	
30 dBm	2.40173948 GHz	SWT	5 ms	Unit dBm

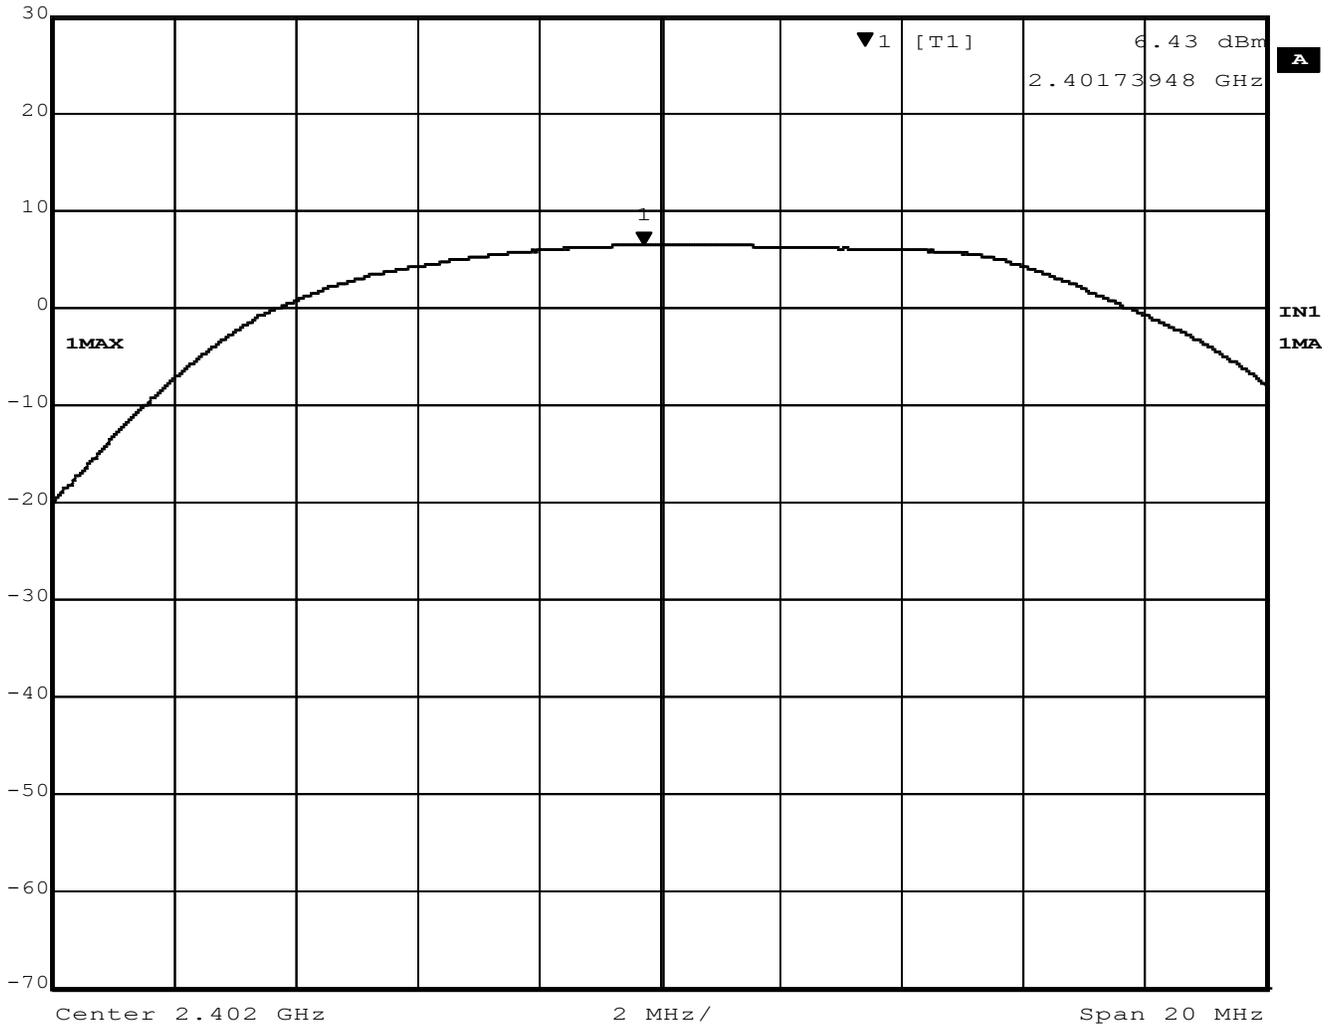


Figure 1 – Output Power, Low Channel, GMSK

Output power 6.43 dBm

Cable loss was less than 0.1 dB and not included



Marker 1 [T1]	RBW	10 MHz	RF Att	40 dB
Ref Lvl	4.77 dBm	VBW	10 MHz	
30 dBm	2.47929860 GHz	SWT	5 ms	Unit dBm

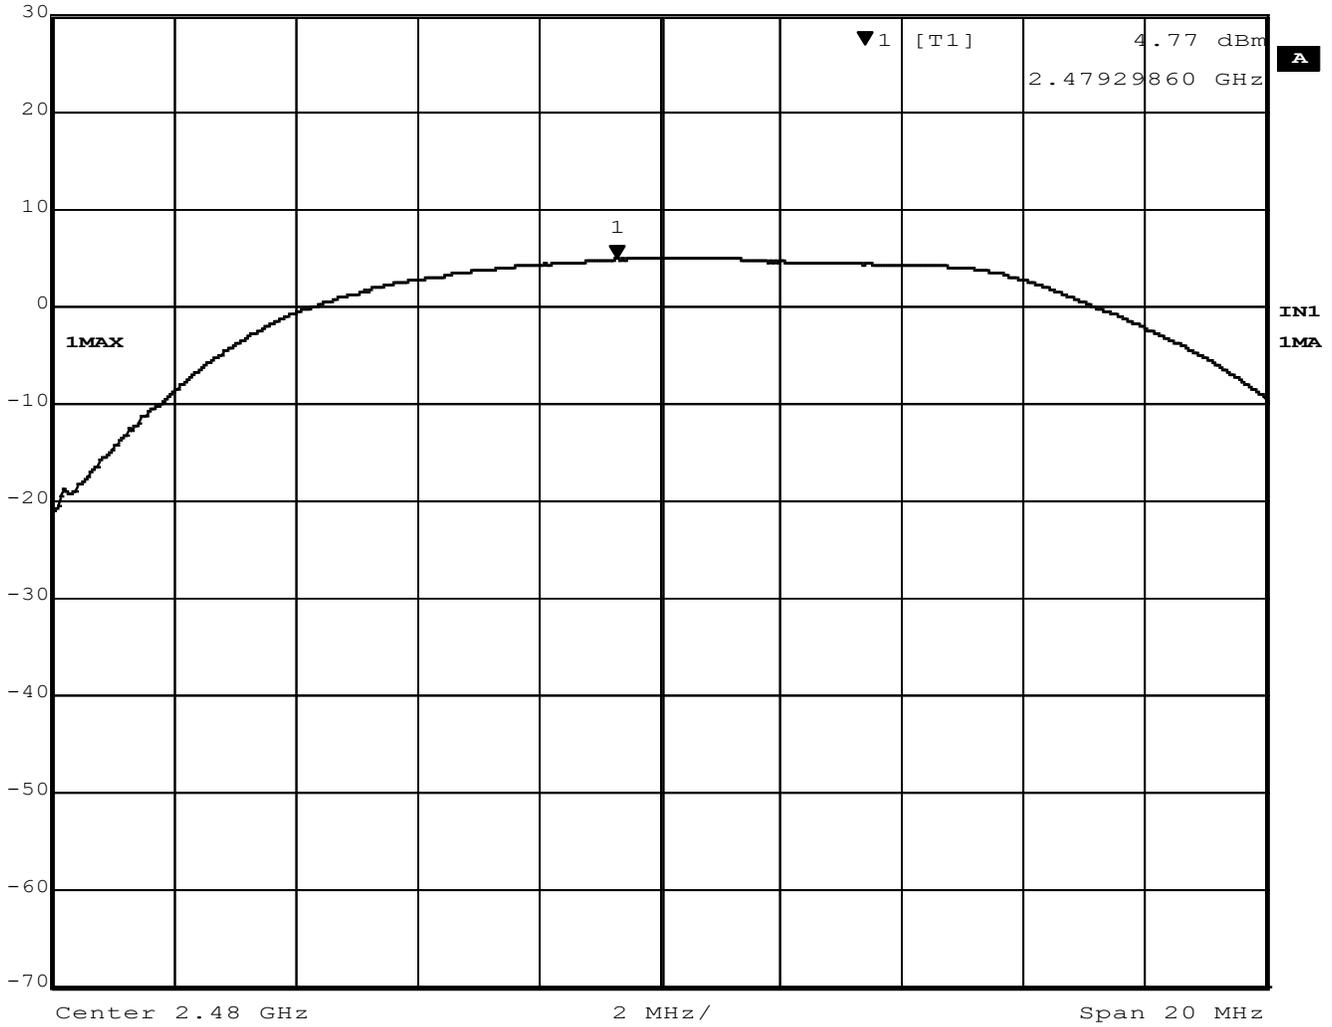


Figure 3 – Output Power, High Channel, GMSK

Output power = 4.77 dBm

Cable loss was less than 0.1 dB and not included



Marker 1 [T1]	RBW	10 MHz	RF Att	40 dB
Ref Lvl	2.91 dBm	VBW	10 MHz	
24 dBm	2.40165932 GHz	SWT	5 ms	Unit dBm

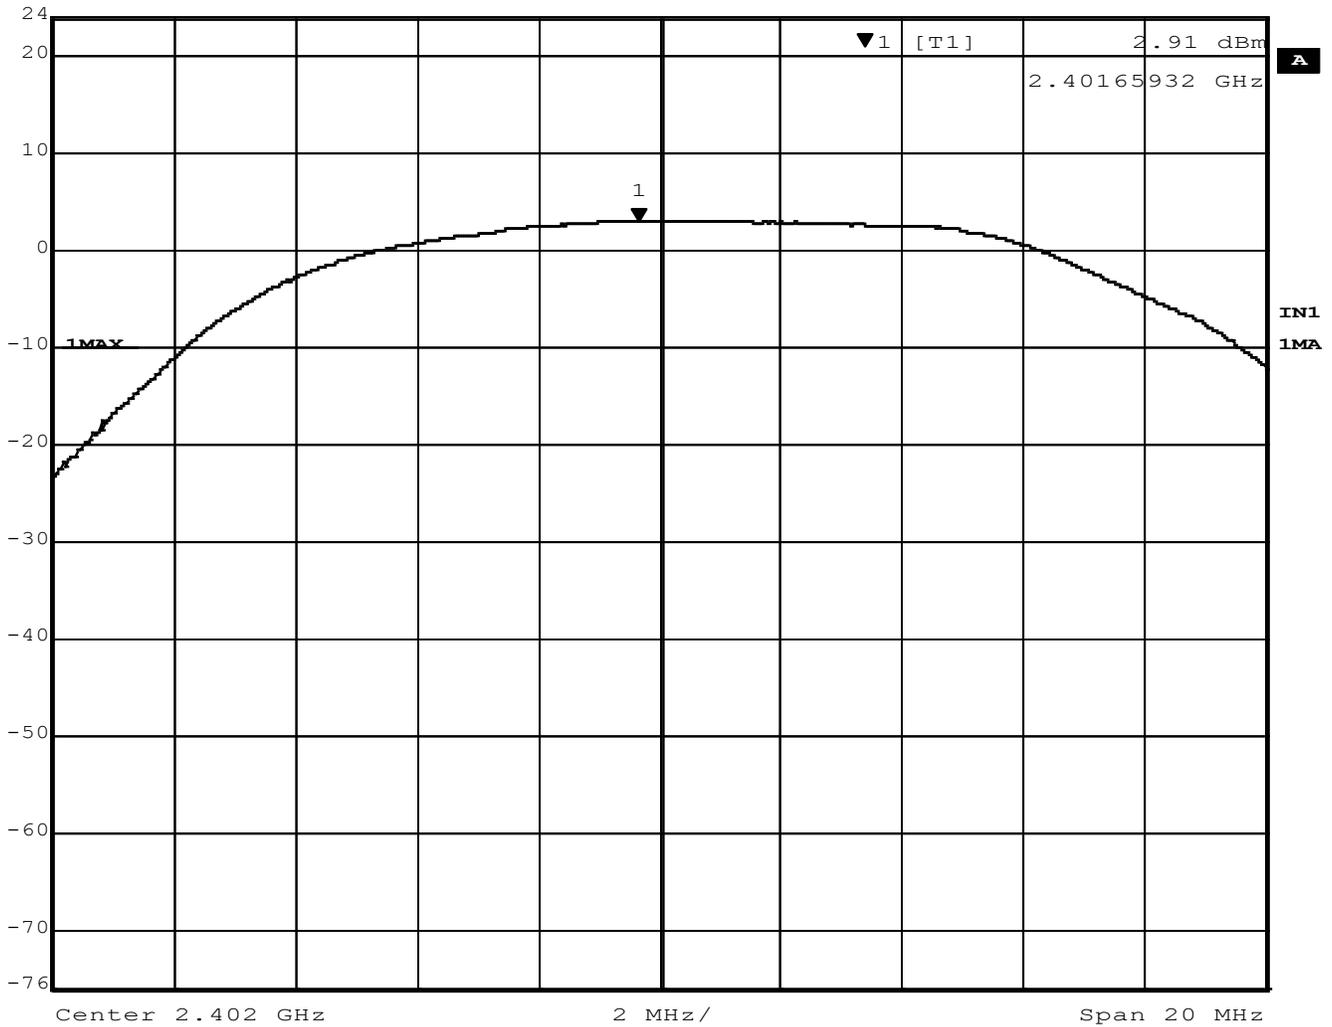


Figure 4 - Output Power, Low Channel, GFSK

Output power = 2.91 dBm

Cable loss was less than 0.1 dB and not included



Marker 1 [T1]	RBW	10 MHz	RF Att	40 dB
Ref Lvl	2.26 dBm	VBW	10 MHz	
24 dBm	2.44118236 GHz	SWT	5 ms	Unit dBm

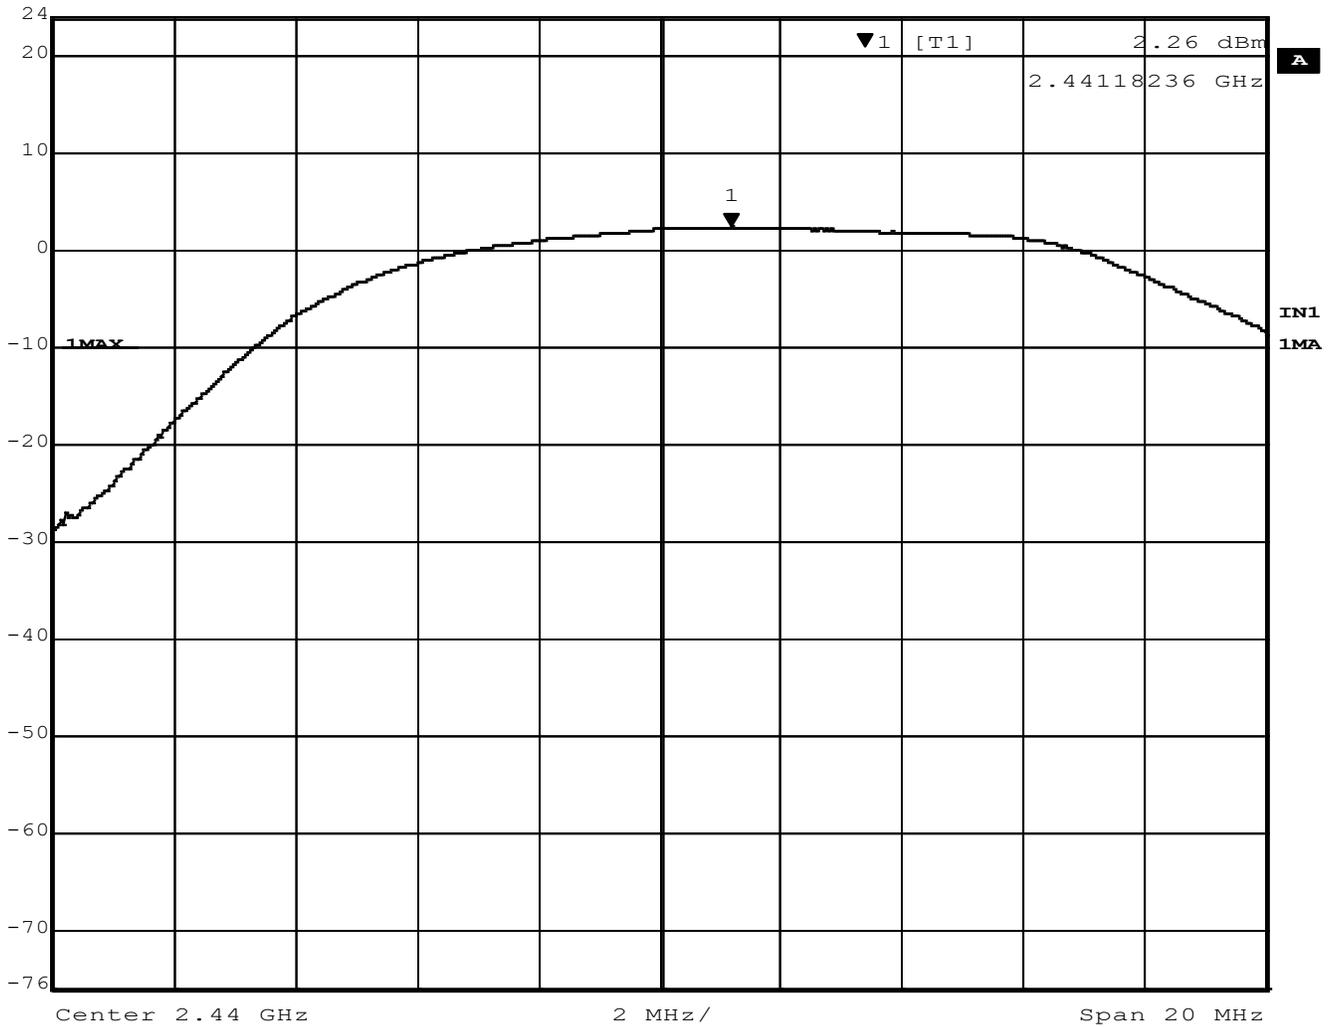


Figure 5 - Output Power, Mid Channel, GFSK

Output power = 2.26 dBm

Cable loss was less than 0.1 dB and not included



Marker 1 [T1]	RBW	10 MHz	RF Att	40 dB
Ref Lvl	1.35 dBm	VBW	10 MHz	
24 dBm	2.47953908 GHz	SWT	5 ms	Unit dBm

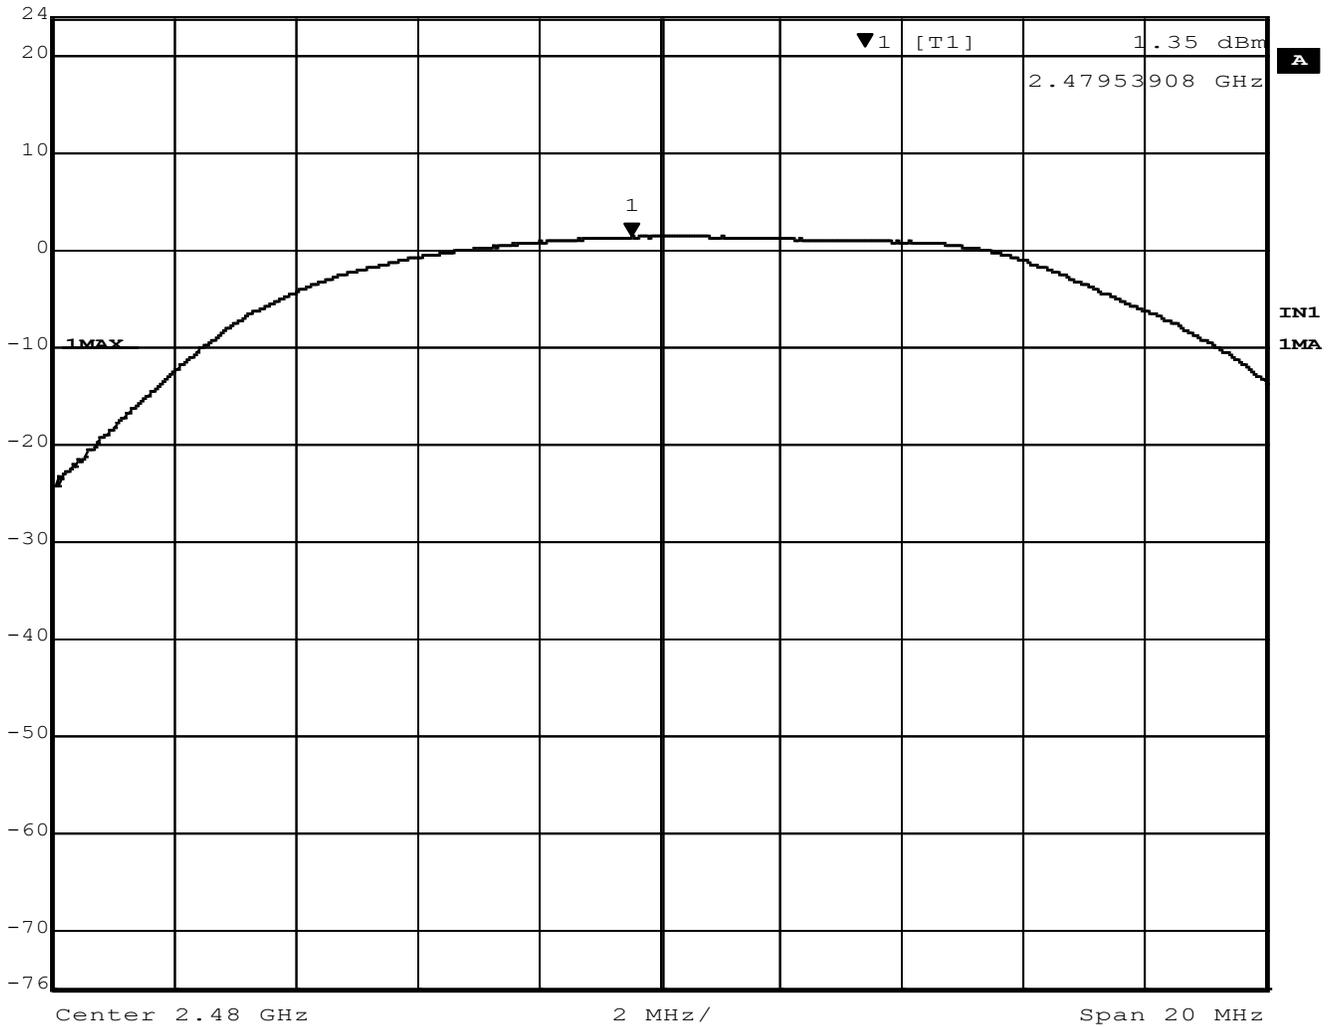


Figure 6 - Output Power, High Channel, GFSK

Output power = 1.35 dBm

Cable loss was less than 0.1 dB and not included



Report Number:	R20181212-20-02	Rev	B
Prepared for:	Garmin		

4.3 BANDWIDTH

Test Method: ANSI C63.10, Section(s) 6.9.2

Limits of bandwidth measurements:

For Informational Purposes only

Test procedures:

1. The EUT was connected to the spectrum analyzer directly with a low-loss shielded coaxial cable
2. The resolution bandwidth was set to 100 kHz and the video bandwidth was set to 300 kHz to capture the signal. The analyzer used a peak detector in max hold mode.
3. The Occupied Bandwidth function of the spectrum analyzer was used to measure the value

Test setup:

The field strength was measured by connecting the EUT directly to the spectrum analyzer.

Deviations from test standard:

No deviation.

Test setup:

Figure 7 - Bandwidth Measurements Test Setup
EUT operating conditions:

The EUT was powered by internal battery power unless specified and set to transmit continuously on the lowest frequency channel, highest frequency channel and one in the middle of its operating range. EUT was set to transmit in GFSK and GMSK.

Test results:
Occupied Bandwidth

CHANNEL	Mode	CHANNEL FREQUENCY (MHz)	OBW (MHz)
Low	GMSK	2402	1.09
Mid	GMSK	2440	1.09
High	GMSK	2480	1.10
Low	GFSK	2402	1.03
Mid	GFSK	2440	1.02
High	GFSK	2480	1.03



Marker 1 [T1] RBW 100 kHz RF Att 40 dB

Ref Lvl 6.32 dBm VBW 300 kHz
 30 dBm 2.40177455 GHz SWT 5 ms Unit dBm

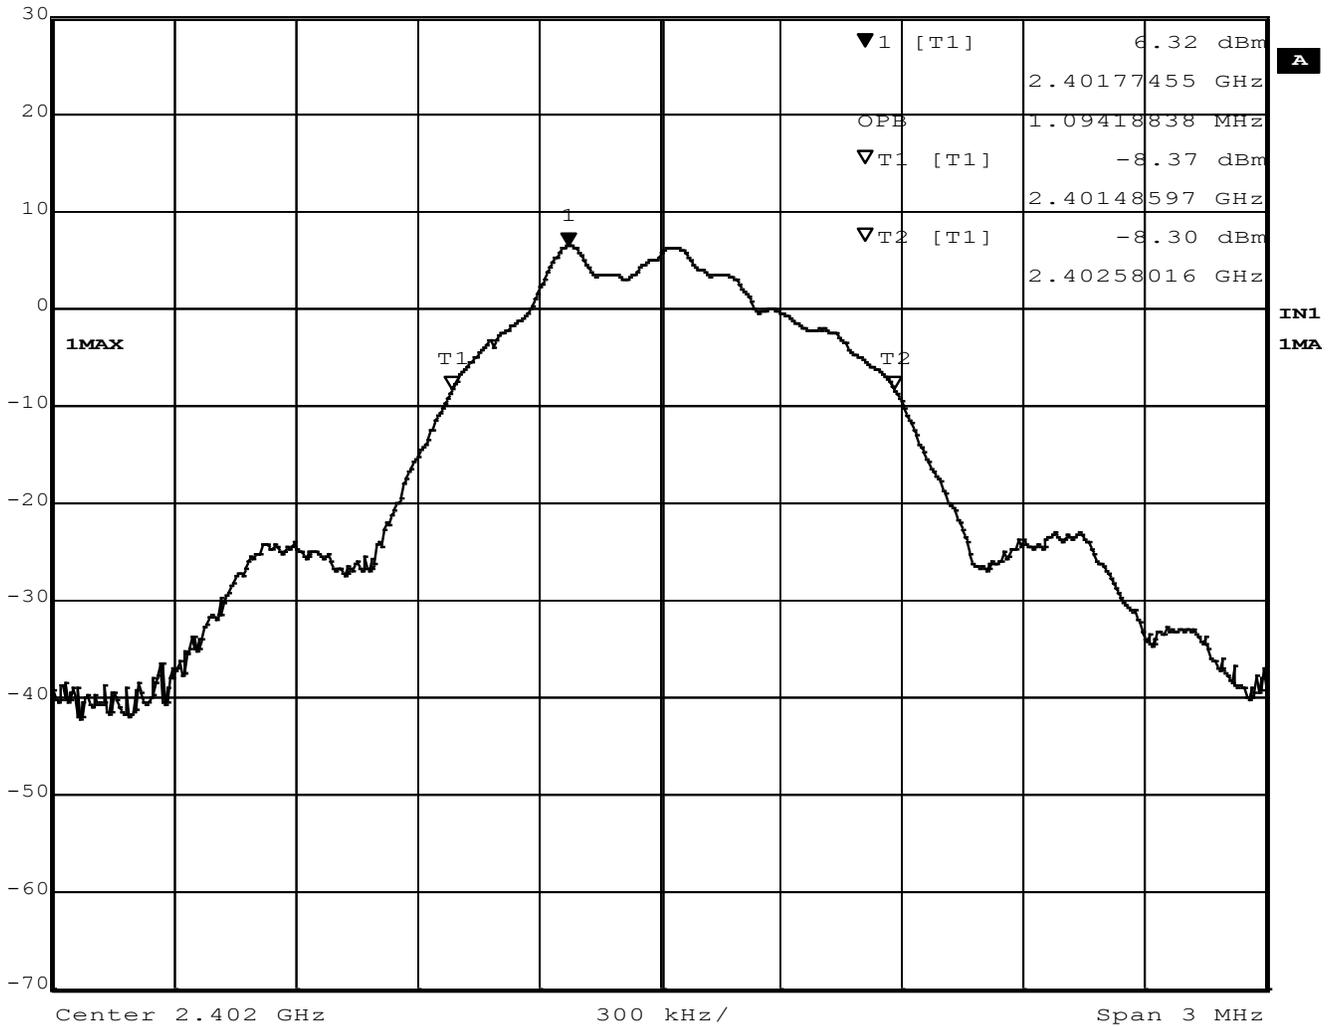


Figure 8 – Occupied Bandwidth, Low Channel, GMSK



Marker 1 [T1] RBW 100 kHz RF Att 40 dB
 Ref Lvl 5.65 dBm VBW 300 kHz
 30 dBm 2.43977455 GHz SWT 5 ms Unit dBm

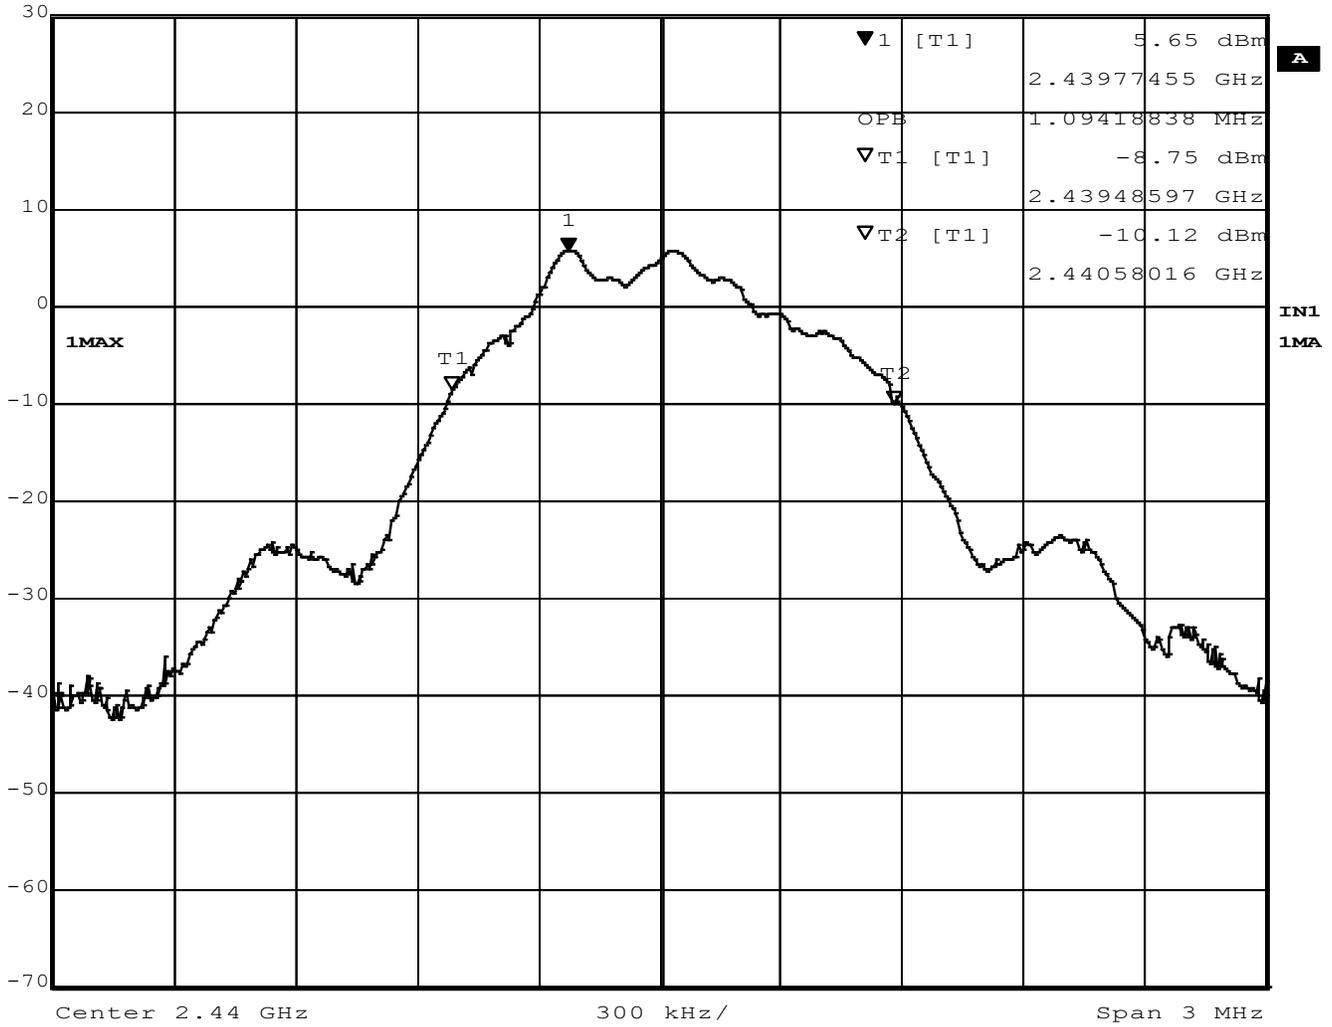


Figure 9 - Occupied Bandwidth, Mid Channel, GMSK



Marker 1 [T1] RBW 100 kHz RF Att 40 dB
 Ref Lvl 4.72 dBm VBW 300 kHz
 30 dBm 2.47977455 GHz SWT 5 ms Unit dBm

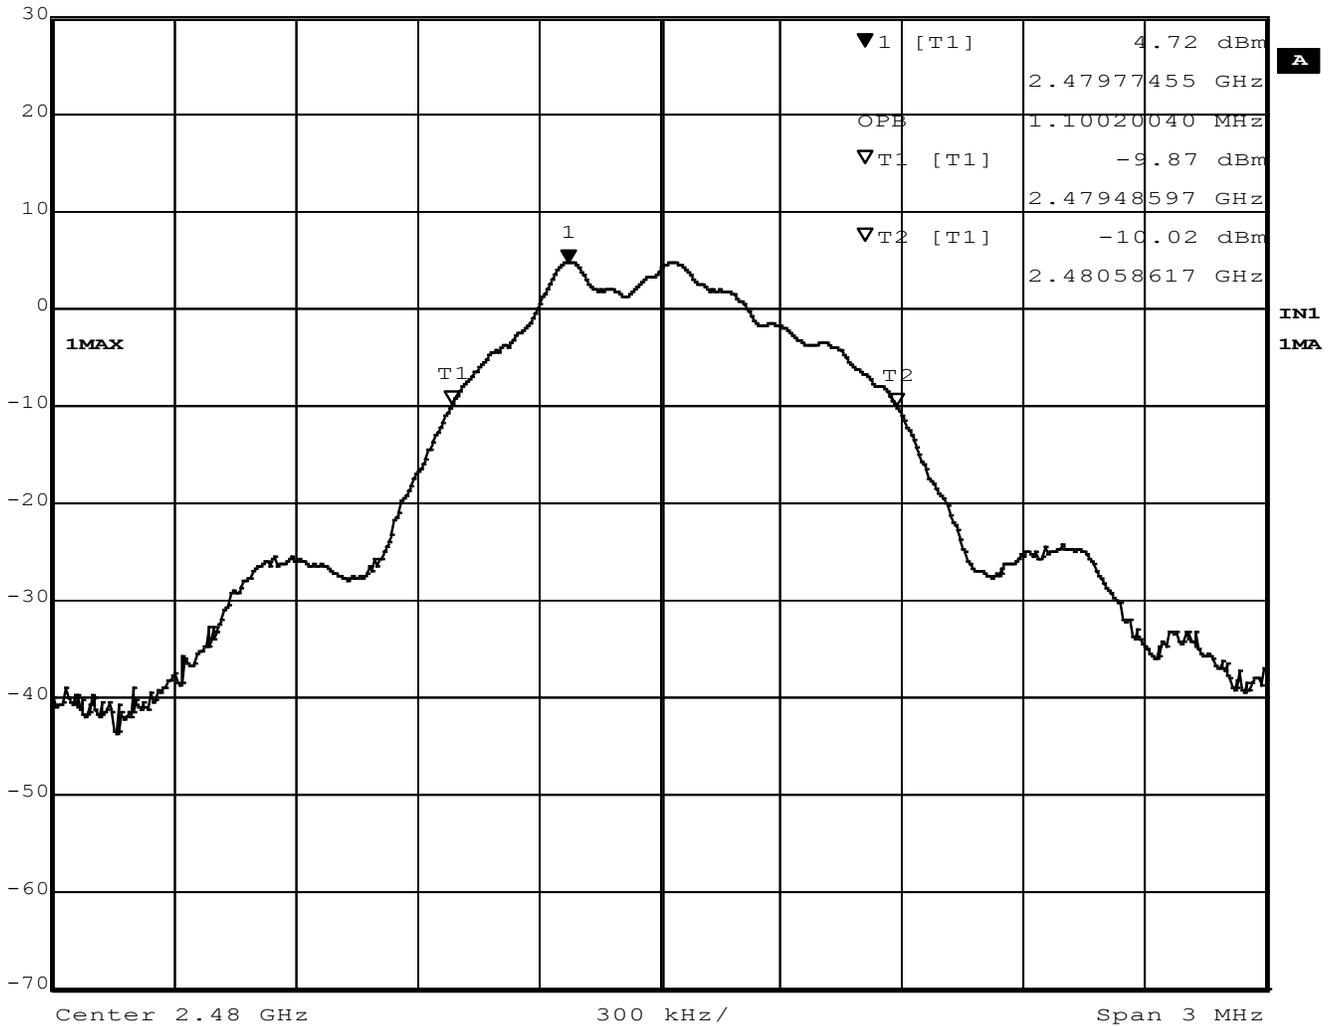


Figure 10 - Occupied Bandwidth, High Channel, GMSK



Marker 1 [T1] RBW 100 kHz RF Att 40 dB
 Ref Lvl 3.24 dBm VBW 300 kHz
 24 dBm 2.40186473 GHz SWT 5 ms Unit dBm

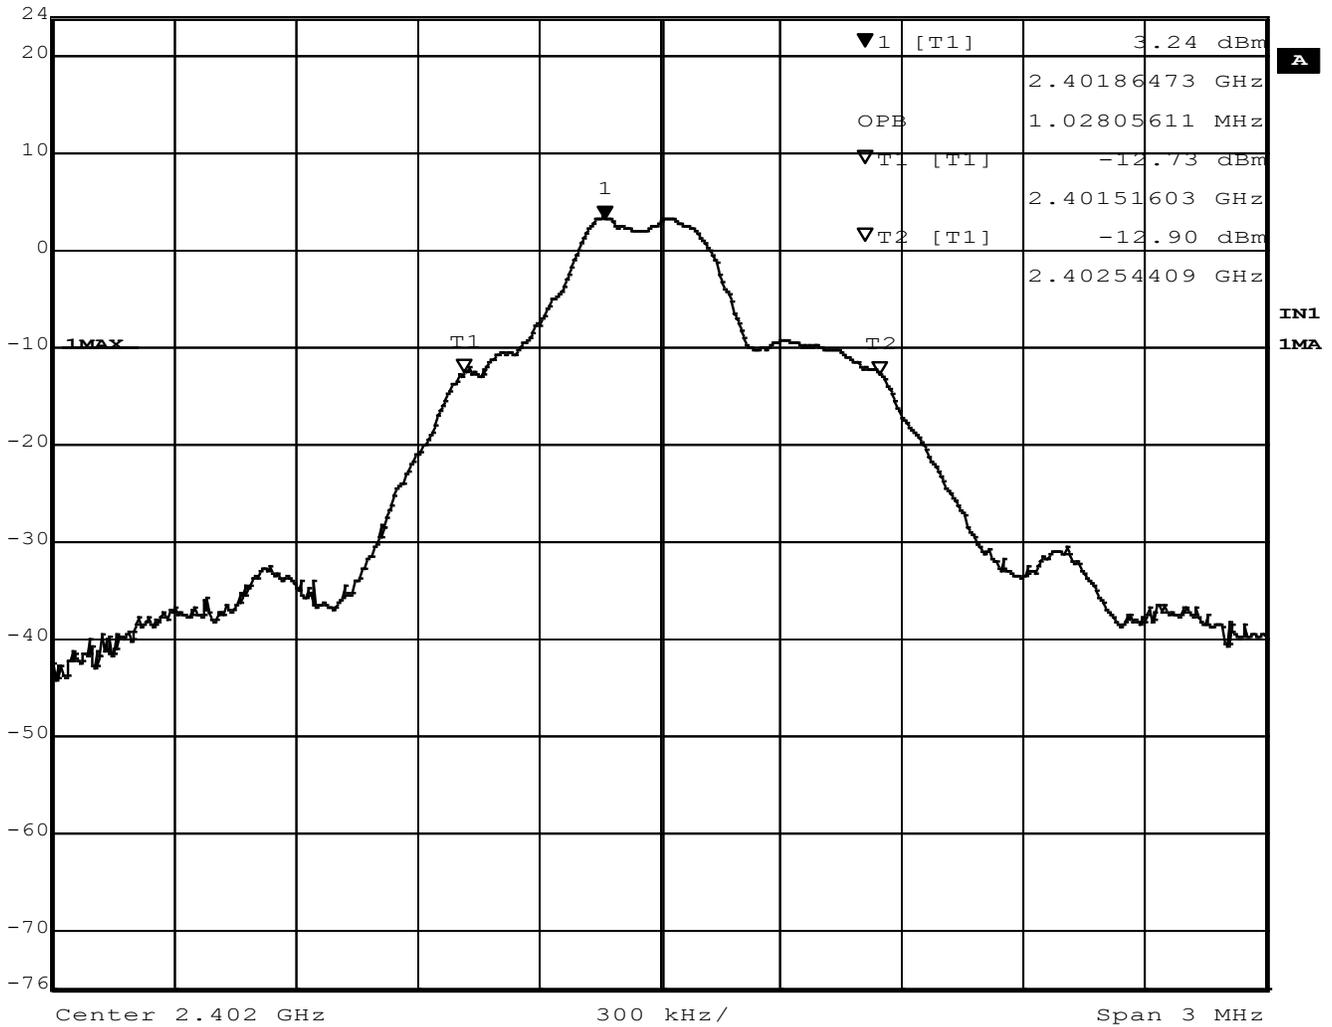


Figure 11 – Occupied Bandwidth, Low Channel, GFSK



Marker 1 [T1] RBW 100 kHz RF Att 40 dB
 Ref Lvl 2.35 dBm VBW 300 kHz
 24 dBm 2.44085872 GHz SWT 5 ms Unit dBm

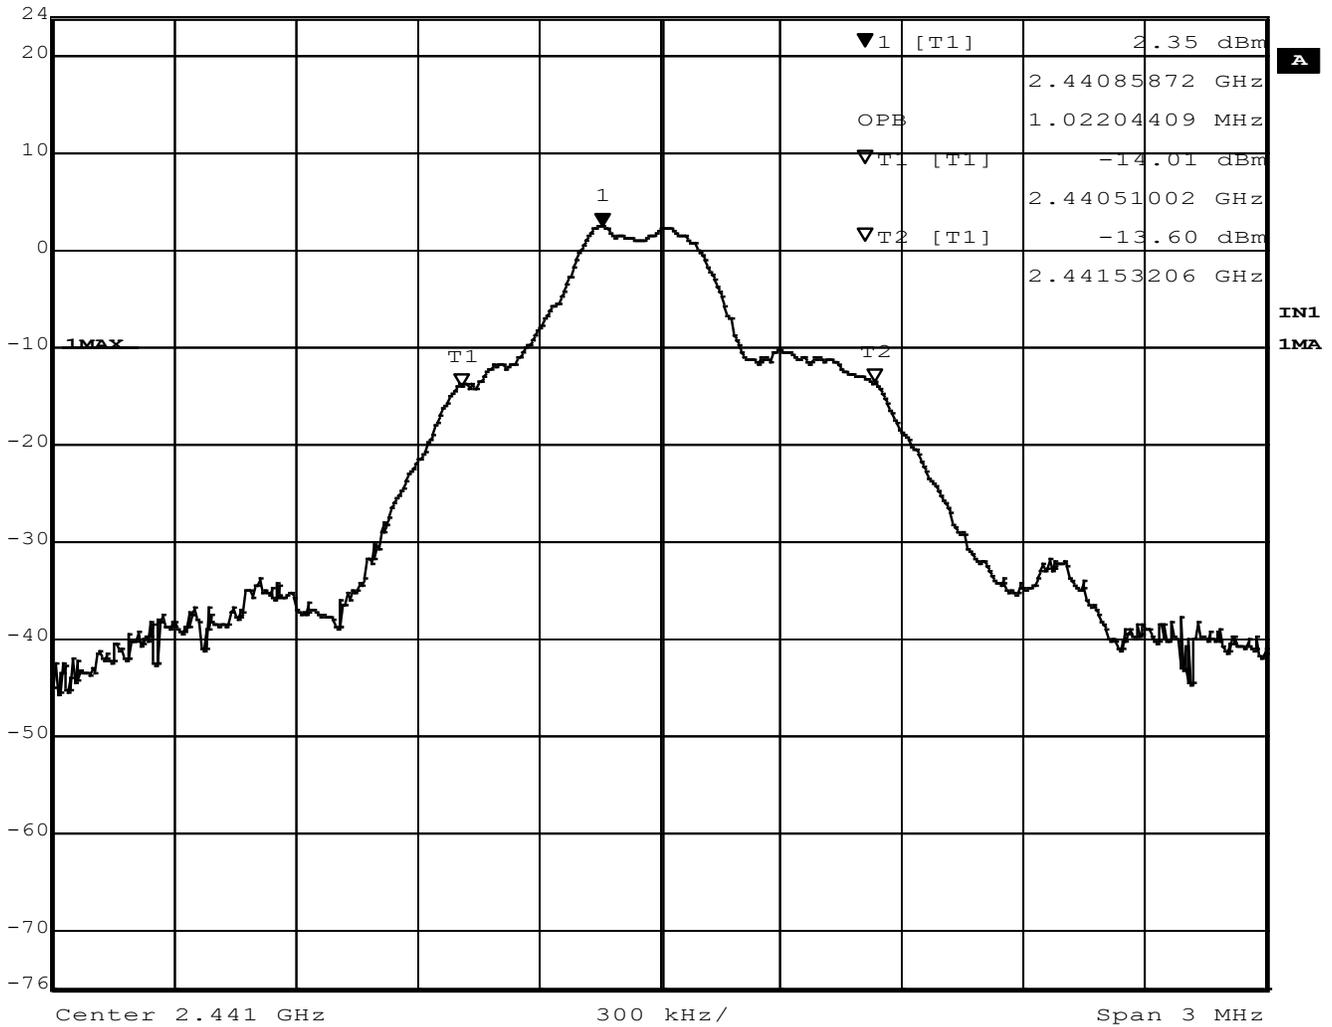


Figure 12 - Occupied Bandwidth, Mid Channel, GFSK



Marker 1 [T1] RBW 100 kHz RF Att 40 dB
 Ref Lvl 1.45 dBm VBW 300 kHz
 24 dBm 2.47985271 GHz SWT 5 ms Unit dBm

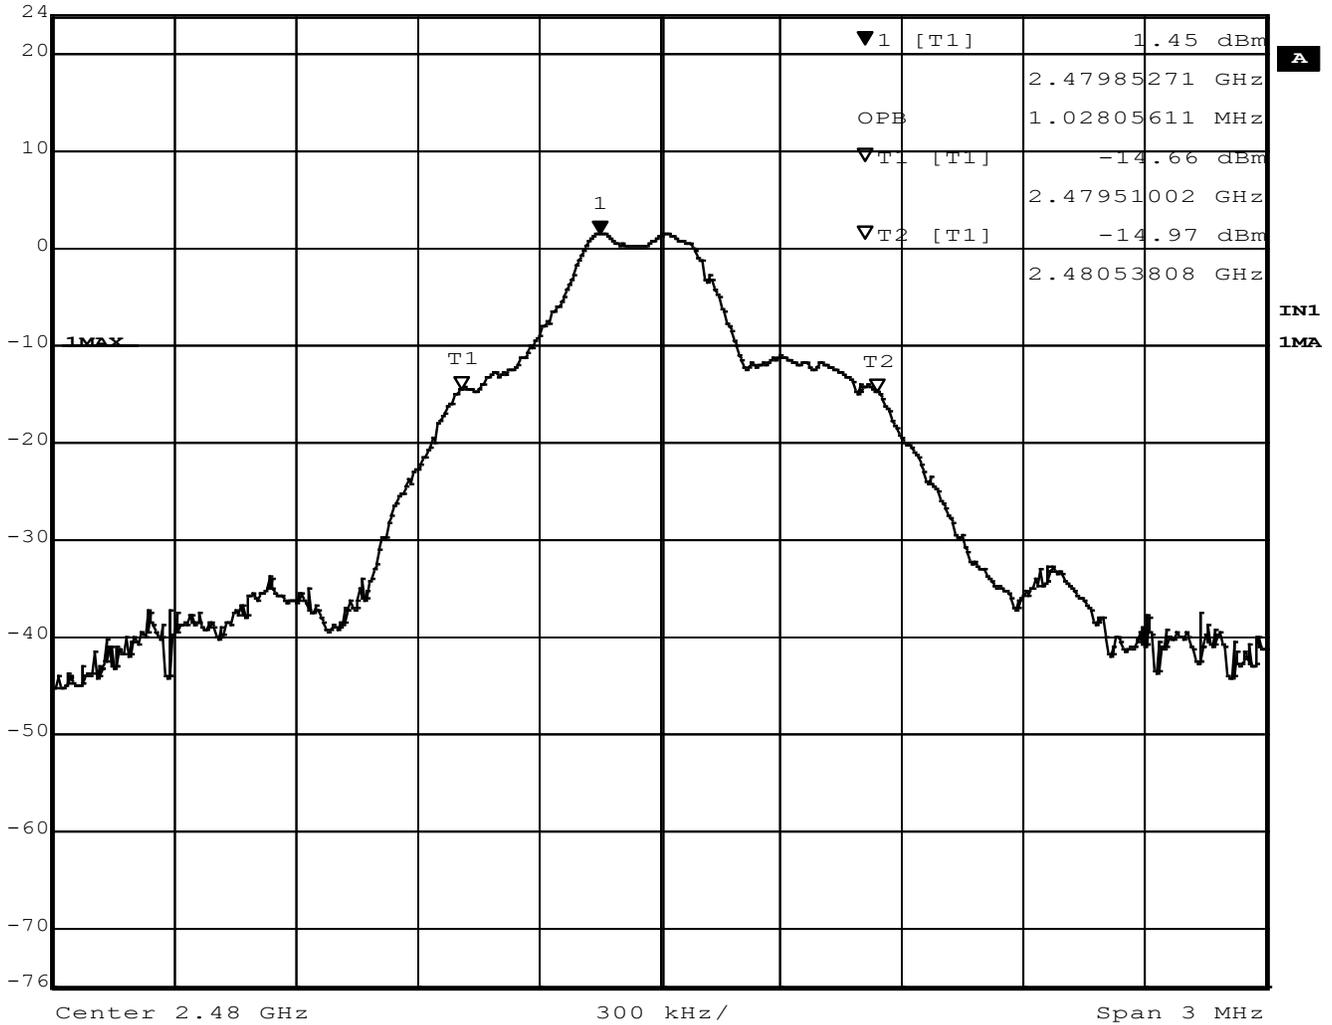


Figure 13 - Occupied Bandwidth, High Channel, GFSK

4.4 RADIATED EMISSIONS

Test Method: ANSI C63.10, Section 6.5, 6.6

Limits for radiated emissions measurements:

Emissions radiated outside of the specified bands shall be applied to the limits in 15.209 as followed:

FREQUENCIES (MHz)	FIELD STRENGTH ($\mu\text{V/m}$)	MEASUREMENT DISTANCE (m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	3
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = $20 * \log * \text{Emission level } (\mu\text{V/m})$.
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits by more than 20dB under any condition of modulation.
4. The EUT was tested for spurious emissions while running off of battery power and external USB power. The worse-case emissions were produced while running off of USB power, so results from this mode are presented.

Test procedures:

- a. The EUT was placed on the top of a rotating table above the ground plane in a 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. The table was 0.8m high for measurements from 30MHz-1GHz and 1.5m for measurements from 1GHz and higher.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna was a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are used to make the measurement.
- d. For each suspected emission, the EUT was arranged to maximize its emissions and then the antenna height was varied from 1 meter to 4 meters and the rotating table was turned from 0 degrees to 360 degrees to find the maximum emission reading.
- e. The test-receiver system was set to use a peak detector with a specified resolution bandwidth. For spectrum analyzer measurements, the composite maximum of several analyzer sweeps was used for final measurements.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. The EUT was maximized in all 3 orthogonal positions. The results are presented for the axis that had the highest emissions.

Test setup:

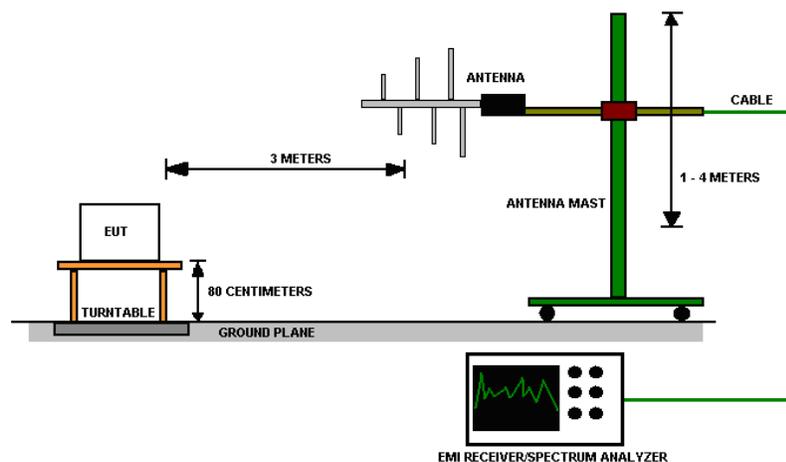


Figure 14 - Radiated Emissions Test Setup



Report Number:	R20181212-20-02	Rev	B
Prepared for:	Garmin		

NOTE:

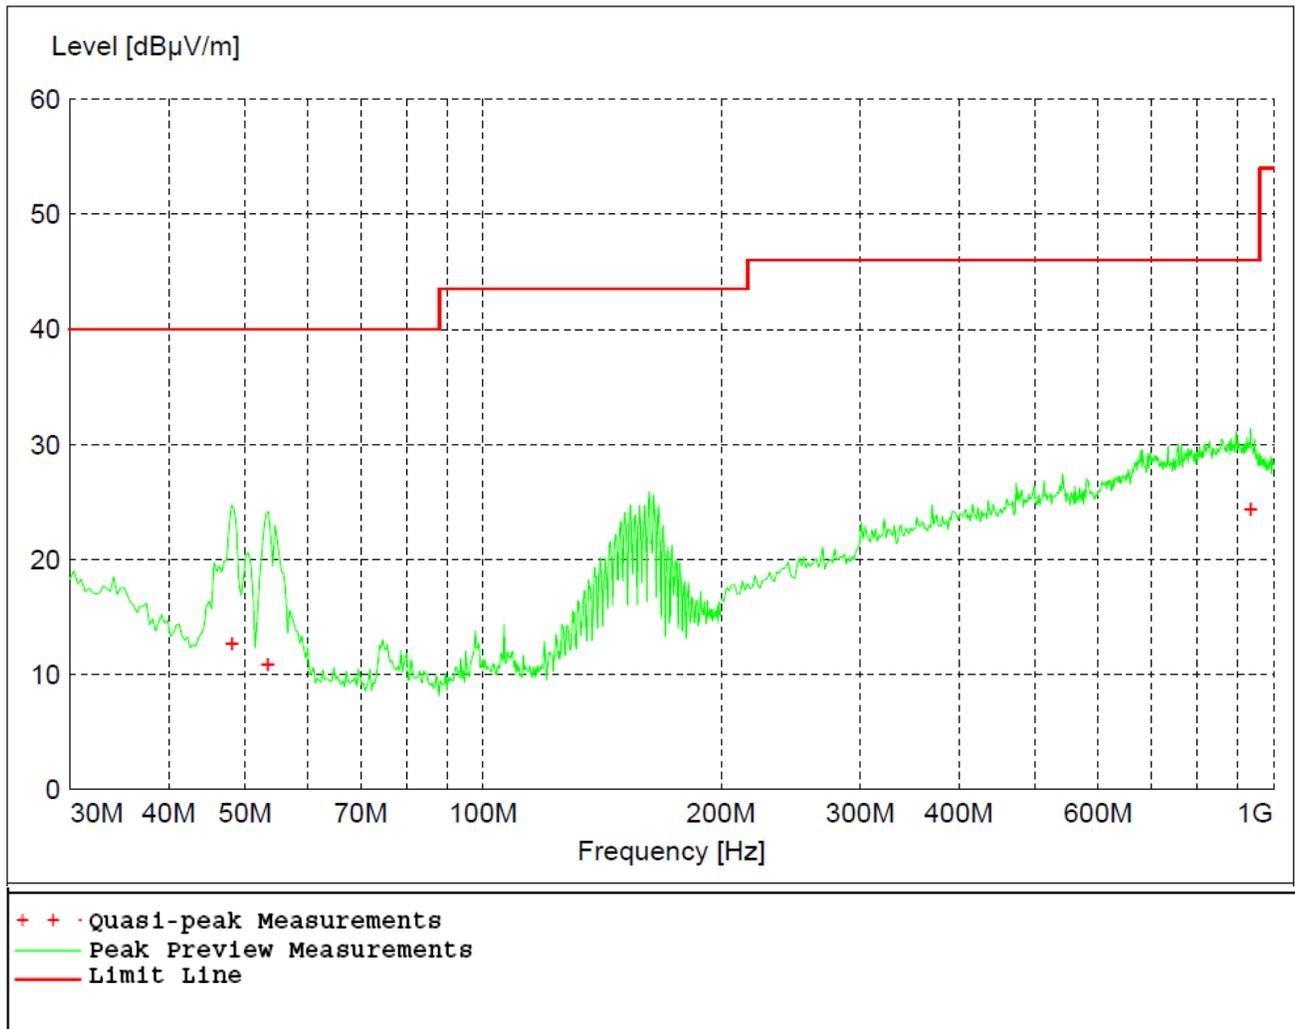
1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequencies below 1GHz.
2. The resolution bandwidth 1 MHz for all measurements and at frequencies above 1GHz, A peak detector was used for all measurements above 1GHz. Measurements were made with an EMI Receiver.

Deviations from test standard:

No deviation.

EUT operating conditions

The EUT was powered by internal battery power unless specified and set to transmit continuously on the lowest frequency channel, highest frequency channel and one in the middle of its operating range. EUT was set to transmit in GFSK and GMSK.

Test results:

Figure 15 - Radiated Emissions Plot, Receive, GFSK
REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value



Report Number:	R20181212-20-02	Rev	B
Prepared for:	Garmin		

Table 1 - Radiated Emissions Quasi-peak Measurements, Receive, GFSK

Frequency	Level	Limit	Margin	Height	Angle	Pol
MHz	dB μ V/m	dB μ V/m	dB	cm.	deg.	
48.180000	12.76	40.00	27.20	397	184	VERT
53.400000	10.92	40.00	29.10	100	93	VERT
937.140000	24.45	46.00	21.60	400	258	HORI

Table 2 - Radiated Emissions Average Measurement, Receive, GFSK

Frequency	Level	Limit	Margin	Height	Angle	Pol
MHz	dB μ V/m	dB μ V/m	dB	cm.	deg.	
2443.600000	19.39	54.00	34.61	108	17	VERT
5965.800000	26.31	54.00	27.69	308	76	VERT
7783.000000	30.14	54.00	23.86	391	59	VERT

Table 3 - Radiated Emissions Peak Measurement, Receive, GFSK

Frequency	Level	Limit	Margin	Height	Angle	Pol
MHz	dB μ V/m	dB μ V/m	dB	cm.	deg.	
2443.600000	37.11	74.00	36.89	108	17	VERT
5965.800000	44.03	74.00	29.97	308	76	VERT
7783.000000	47.86	74.00	26.14	391	59	VERT

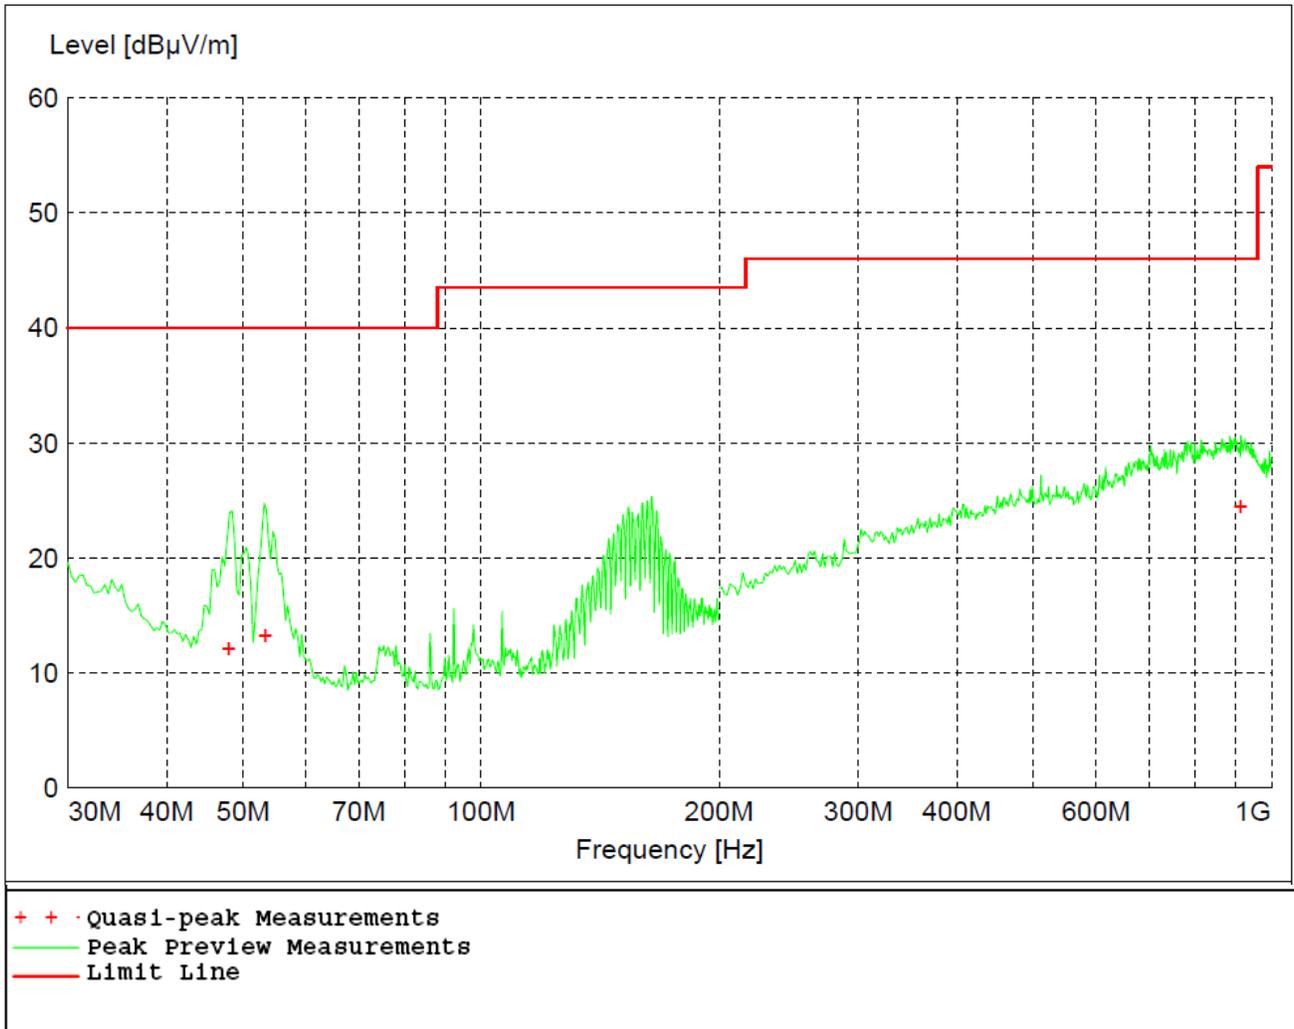


Figure 16 - Radiated Emissions Plot, Receive, GMSK

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value



Report Number:	R20181212-20-02	Rev	B
Prepared for:	Garmin		

Table 4 - Radiated Emissions Quasi-peak Measurements, Receive, GMSK

Frequency	Level	Limit	Margin	Height	Angle	Pol
MHz	dB μ V/m	dB μ V/m	dB	cm.	deg.	
48.000000	12.16	40.00	27.80	100	67	VERT
53.340000	13.30	40.00	26.70	396	283	VERT
914.760000	24.46	46.00	21.50	143	251	HORI

The EUT was maximized in all 3 orthogonal axis. The worst-case is shown in the table above.

Table 5 - Radiated Emissions Average Measurement, Receive, GMSK

Frequency	Level	Limit	Margin	Height	Angle	Pol
MHz	dB μ V/m	dB μ V/m	dB	cm.	deg.	
2455.800000	26.53	54.00	27.47	150	150	VERT
10922.600000	31.89	54.00	22.11	356	346	HORI

Table 6 - Radiated Emissions Peak Measurement, Receive, GMSK

Frequency	Level	Limit	Margin	Height	Angle	Pol
MHz	dB μ V/m	dB μ V/m	dB	cm.	deg.	
2455.800000	44.25	74.00	29.75	150	150	VERT
10922.600000	49.61	74.00	24.39	356	346	HORI

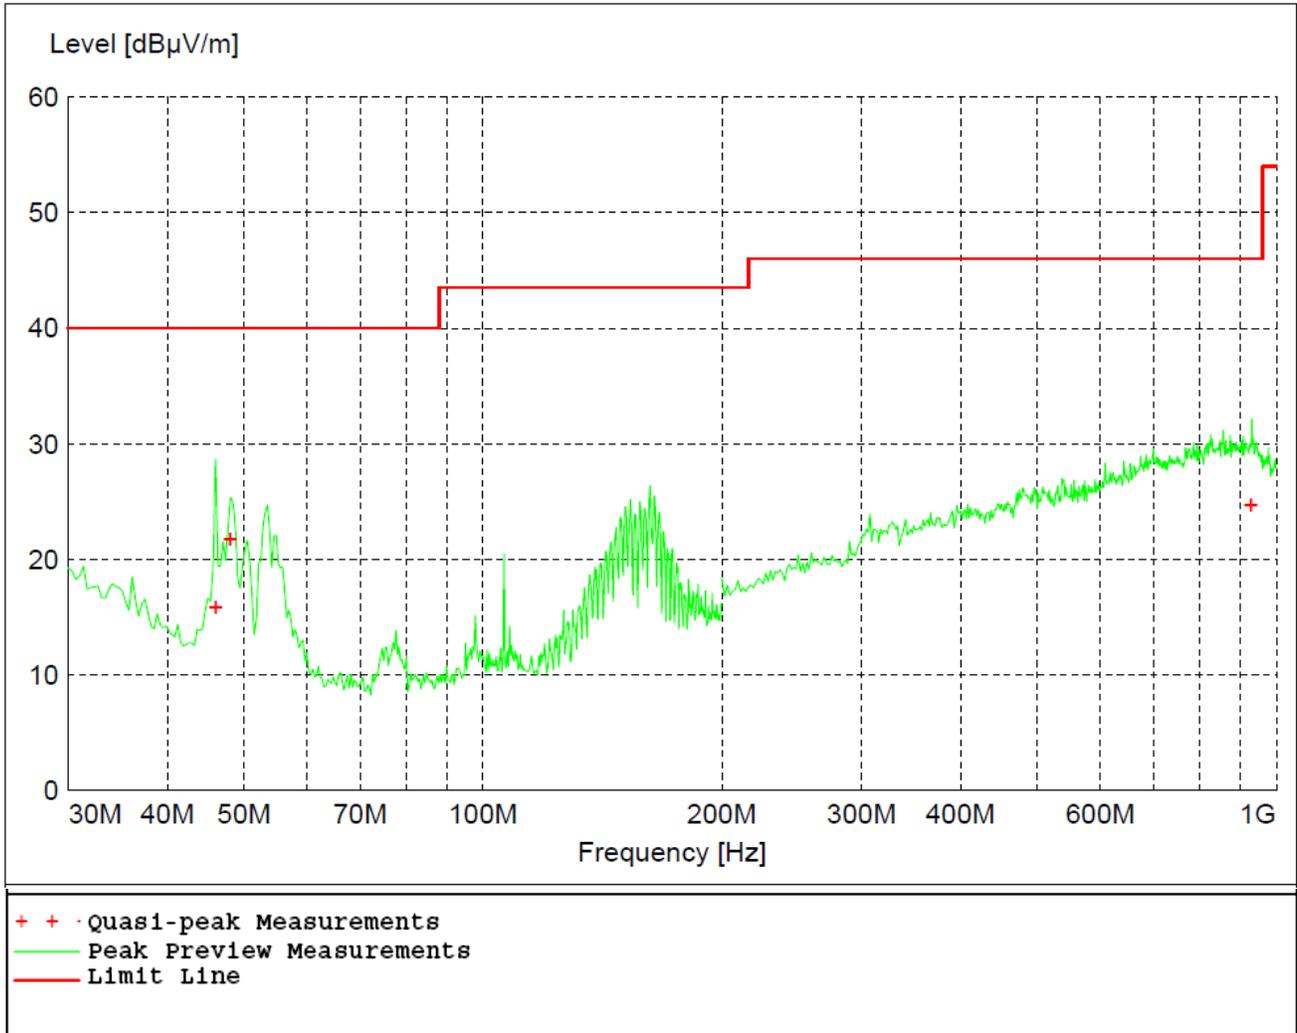


Figure 17 - Radiated Emissions Plot, Low Channel, GFSK

REMARKS:

1. Emission level (dBµV/m) = Raw Value (dBµV) + Correction Factor (dB)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value



Report Number:	R20181212-20-02	Rev	B
Prepared for:	Garmin		

Table 7 - Radiated Emissions Quasi-peak Measurements, Low Channel, GFSK

Frequency	Level	Limit	Margin	Height	Angle	Pol
MHz	dB μ V/m	dB μ V/m	dB	cm.	deg.	
46.080000	15.84	40.00	24.20	100	359	VERT
48.060000	21.81	40.00	18.20	100	2	VERT
929.760000	24.74	46.00	21.30	230	177	HORI

The EUT was maximized in all 3 orthogonal axis. The worst-case is shown in the table above.

Table 8 - Radiated Emissions Peak Measurements vs. Average Limit, Low Channel, GFSK

Frequency	Level	Limit	Margin	Height	Angle	Pol
MHz	dB μ V/m	dB μ V/m	dB	cm.	deg.	
2402.000000	92.31	94.00	1.69	173	106	VERT
4807.800000	43.08	54.00	10.92	168	126	VERT
7199.800000	46.74	54.00	7.26	385	33	HORI
9587.600000	49.44	54.00	4.56	217	9	VERT

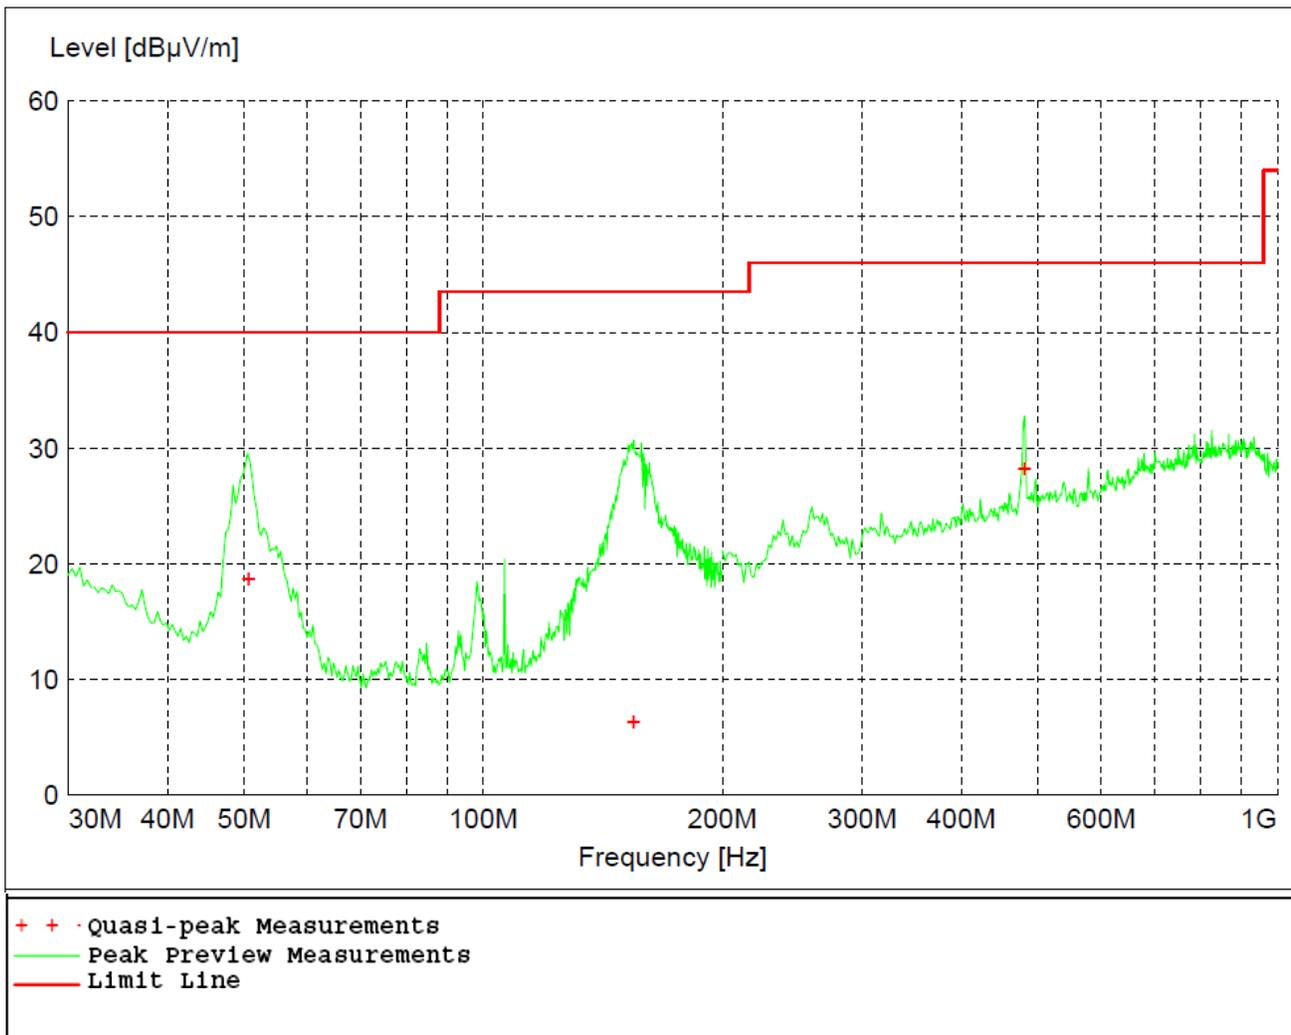


Figure 18 - Radiated Emissions Plot, Mid Channel, GFSK

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value



Report Number:	R20181212-20-02	Rev	B
Prepared for:	Garmin		

Table 9 - Radiated Emissions Quasi-peak Measurements, Mid Channel, GFSK

Frequency	Level	Limit	Margin	Height	Angle	Pol
MHz	dB μ V/m	dB μ V/m	dB	cm.	deg.	
50.640000	18.76	40.00	21.20	100	29	VERT
154.680000	6.42	43.50	37.10	394	40	HORI
480.540000	28.27	46.00	17.70	390	322	VERT

The EUT was maximized in all 3 orthogonal axis. The worst-case is shown in the table above.

Table 10 - Radiated Emissions Peak Measurements vs. Average Limit, Mid Channel, GFSK

Frequency	Level	Limit	Margin	Height	Angle	Pol
MHz	dB μ V/m	dB μ V/m	dB	cm.	deg.	
2441.000000	92.08	94.00	21.92	231	41	VERT
14277.400000	54.41	54.00	19.59	394	136	HORI

The EUT was maximized in all 3 orthogonal axis. The worst-case is shown in the table above

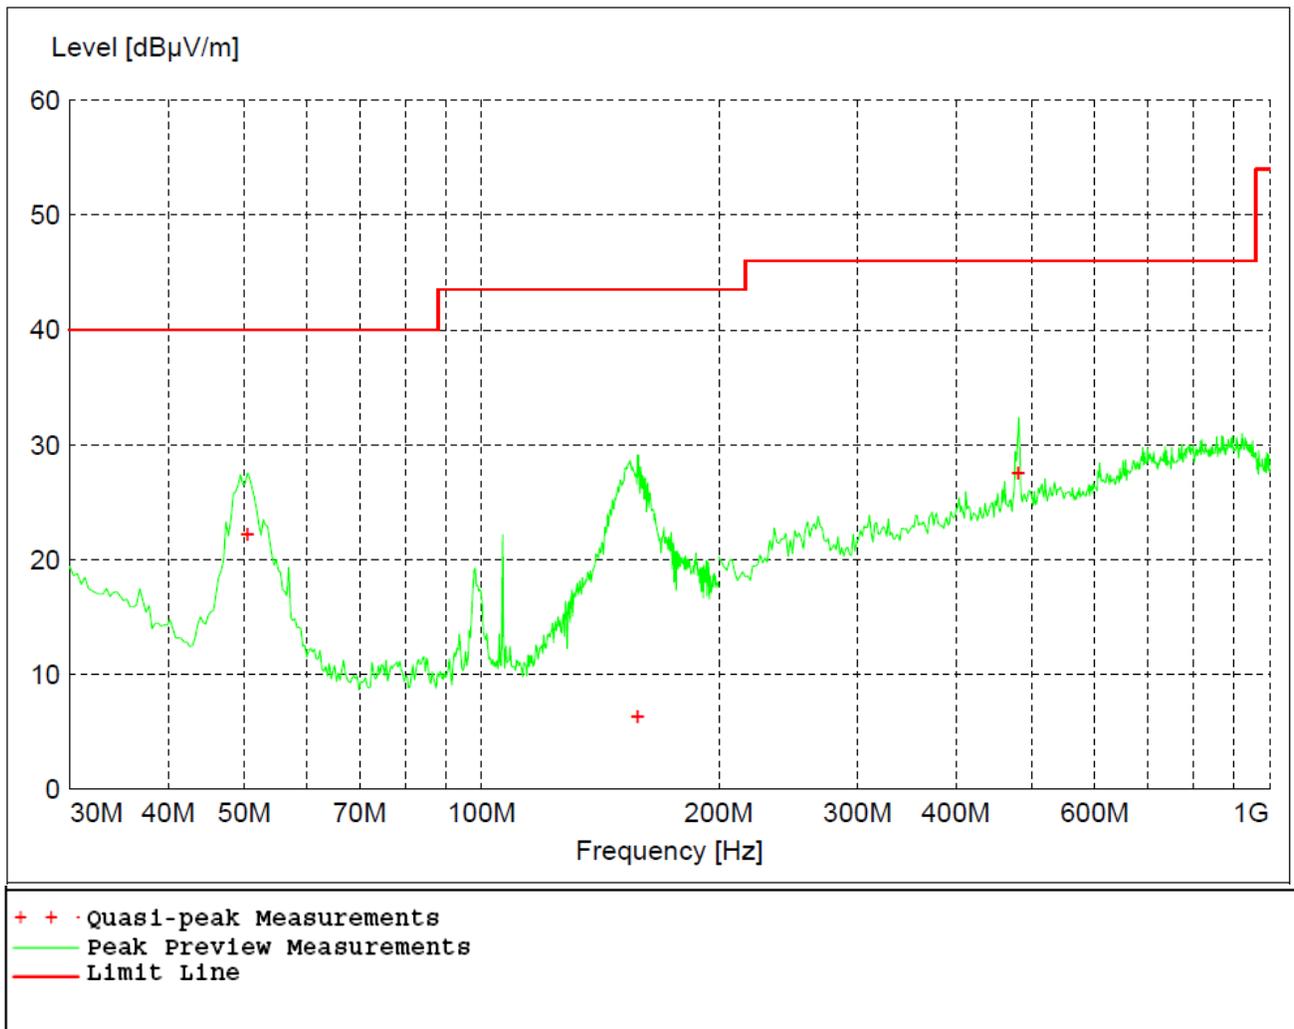


Figure 19 - Radiated Emissions Plot, High Channel, GFSK

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



Report Number:	R20181212-20-02	Rev	B
Prepared for:	Garmin		

Table 11 - Radiated Emissions Quasi-peak Measurements, High Channel, GFSK

Frequency	Level	Limit	Margin	Height	Angle	Pol
MHz	dB μ V/m	dB μ V/m	dB	cm.	deg.	
50.460000	22.23	40.00	17.80	100	51	VERT
157.800000	6.39	43.50	37.10	400	91	HORI
480.060000	27.59	46.00	18.40	400	61	HORI

The EUT was maximized in all 3 orthogonal axis. The worst-case is shown in the table above.

Table 12 - Radiated Emissions Peak Measurements vs. Average Limit, High Channel, GFSK

Frequency	Level	Limit	Margin	Height	Angle	Pol
MHz	dB μ V/m	dB μ V/m	dB	cm.	deg.	
2480.000000	89.36	114.00	24.64	234	349	HORI
4809.000000	43.32	74.00	30.68	231	199	VERT

The EUT was maximized in all 3 orthogonal axis. The worst-case is shown in the table above

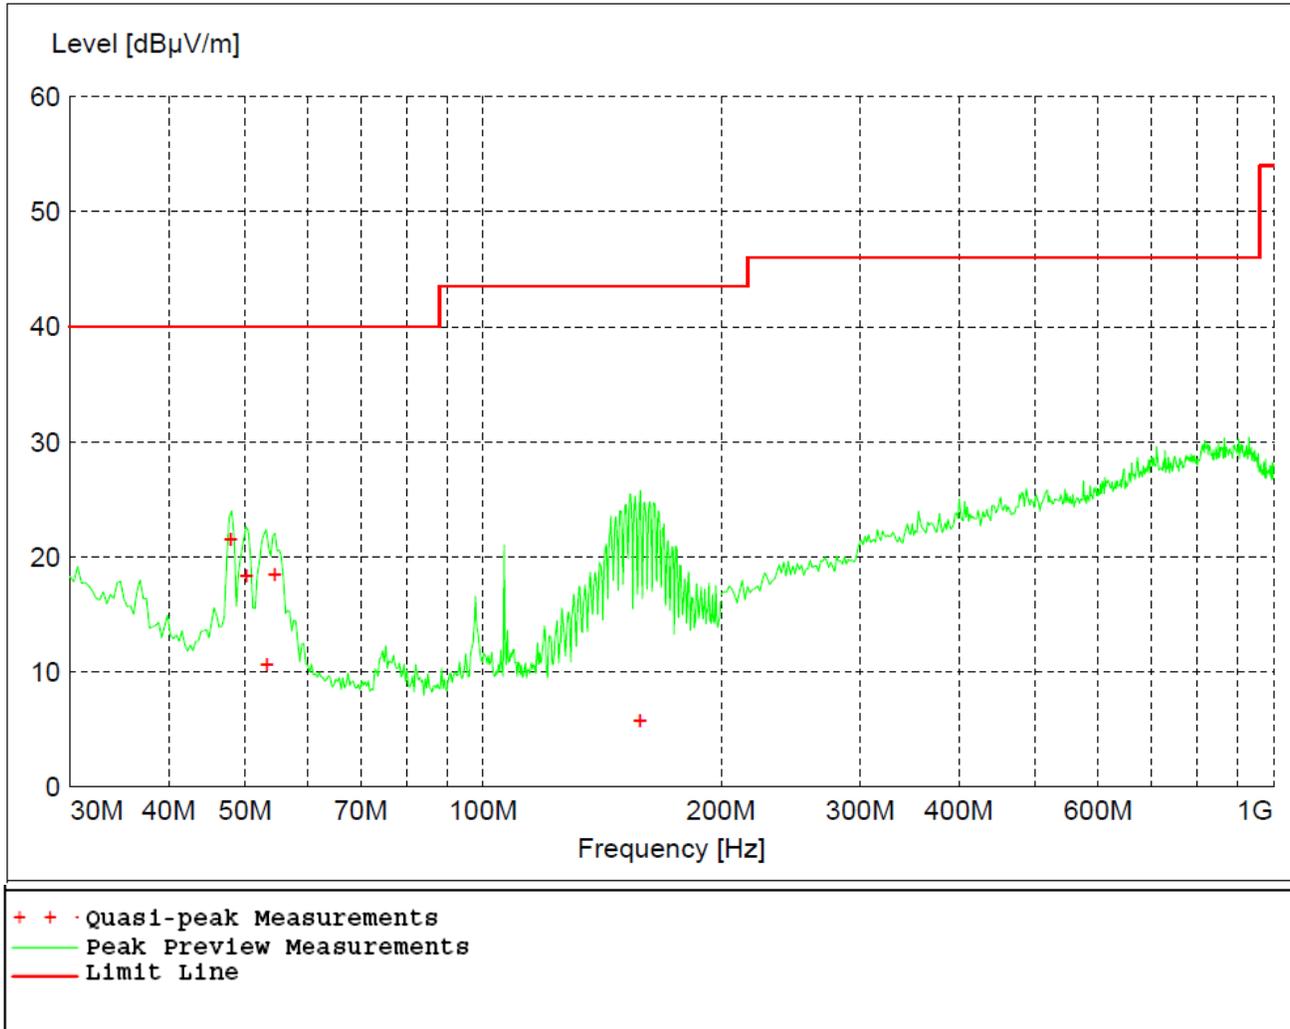


Figure 20 - Radiated Emissions Plot, Low Channel, GMSK

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value

Report Number:	R20181212-20-02	Rev	B
Prepared for:	Garmin		

Table 13 - Radiated Emissions Quasi-peak Measurements, Low Channel, GMSK

Frequency	Level	Limit	Margin	Height	Angle	Pol
MHz	dB μ V/m	dB μ V/m	dB	cm.	deg.	
48.000000	21.61	40.00	18.40	119	132	VERT
50.220000	18.34	40.00	21.70	100	140	VERT
53.280000	10.65	40.00	29.40	109	164	VERT
54.540000	18.52	40.00	21.50	115	231	VERT
158.040000	5.77	43.50	37.70	99	309	VERT

The EUT was maximized in all 3 orthogonal axis. The worst-case is shown in the table above.

Table 14 - Radiated Emissions Peak Measurements vs. Average Limit, Low Channel, GMSK

Frequency	Level	Limit	Margin	Height	Angle	Pol
MHz	dB μ V/m	dB μ V/m	dB	cm.	deg.	
2402.000000	91.80	114.00	22.2	187	297	VERT
4804.600000	47.38	74.00	26.62	167	312	VERT
7205.200000	54.32	74.00	19.68	244	165	HORI

The EUT was maximized in all 3 orthogonal axis. The worst-case is shown in the table above

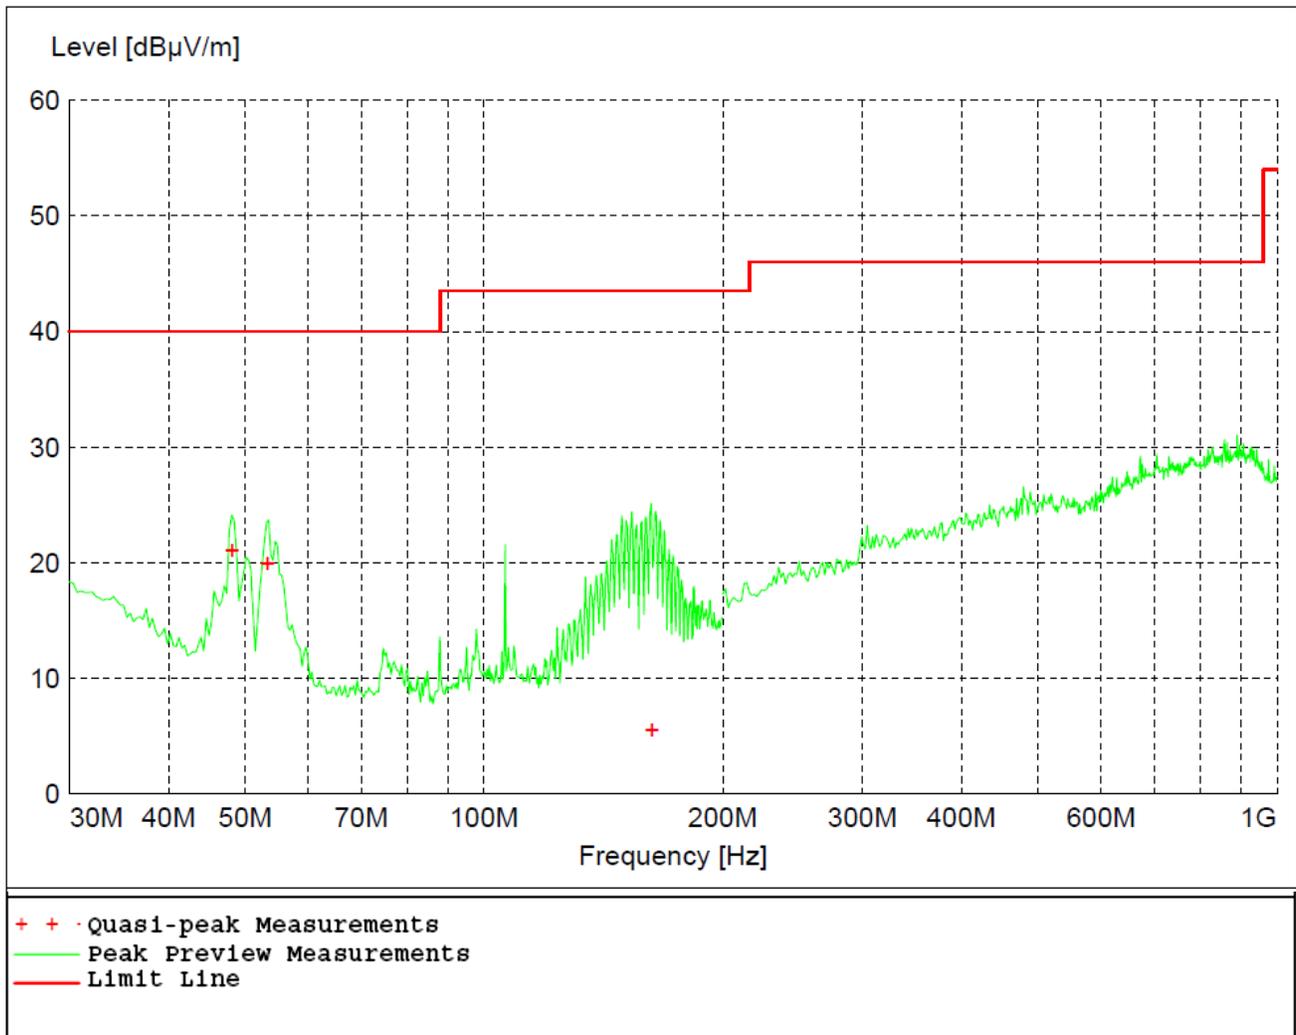


Figure 21 - Radiated Emissions Plot, Mid Channel, GMSK

REMARKS:

1. Emission level (dBµV/m) = Raw Value (dBµV) + Correction Factor (dB)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value



Report Number:	R20181212-20-02	Rev	B
Prepared for:	Garmin		

Table 15 - Radiated Emissions Quasi-peak Measurements, Mid Channel, GMSK

Frequency	Level	Limit	Margin	Height	Angle	Pol
MHz	dB μ V/m	dB μ V/m	dB	cm.	deg.	
48.180000	21.06	40.00	18.90	100	2	VERT
53.340000	19.97	40.00	20.00	99	200	VERT
162.840000	5.60	43.50	37.90	361	129	VERT

The EUT was maximized in all 3 orthogonal axis. The worst-case is shown in the table above.

Table 16 - Radiated Emissions Peak Measurements vs. Average Limit, Mid Channel, GMSK

Frequency	Level	Limit	Margin	Height	Angle	Pol
MHz	dB μ V/m	dB μ V/m	dB	cm.	deg.	
2440.000000	91.45	114.00	22.55	155	304	VERT
7319.200000	51.76	74.00	22.24	217	165	HORI

The EUT was maximized in all 3 orthogonal axis. The worst-case is shown in the table above.

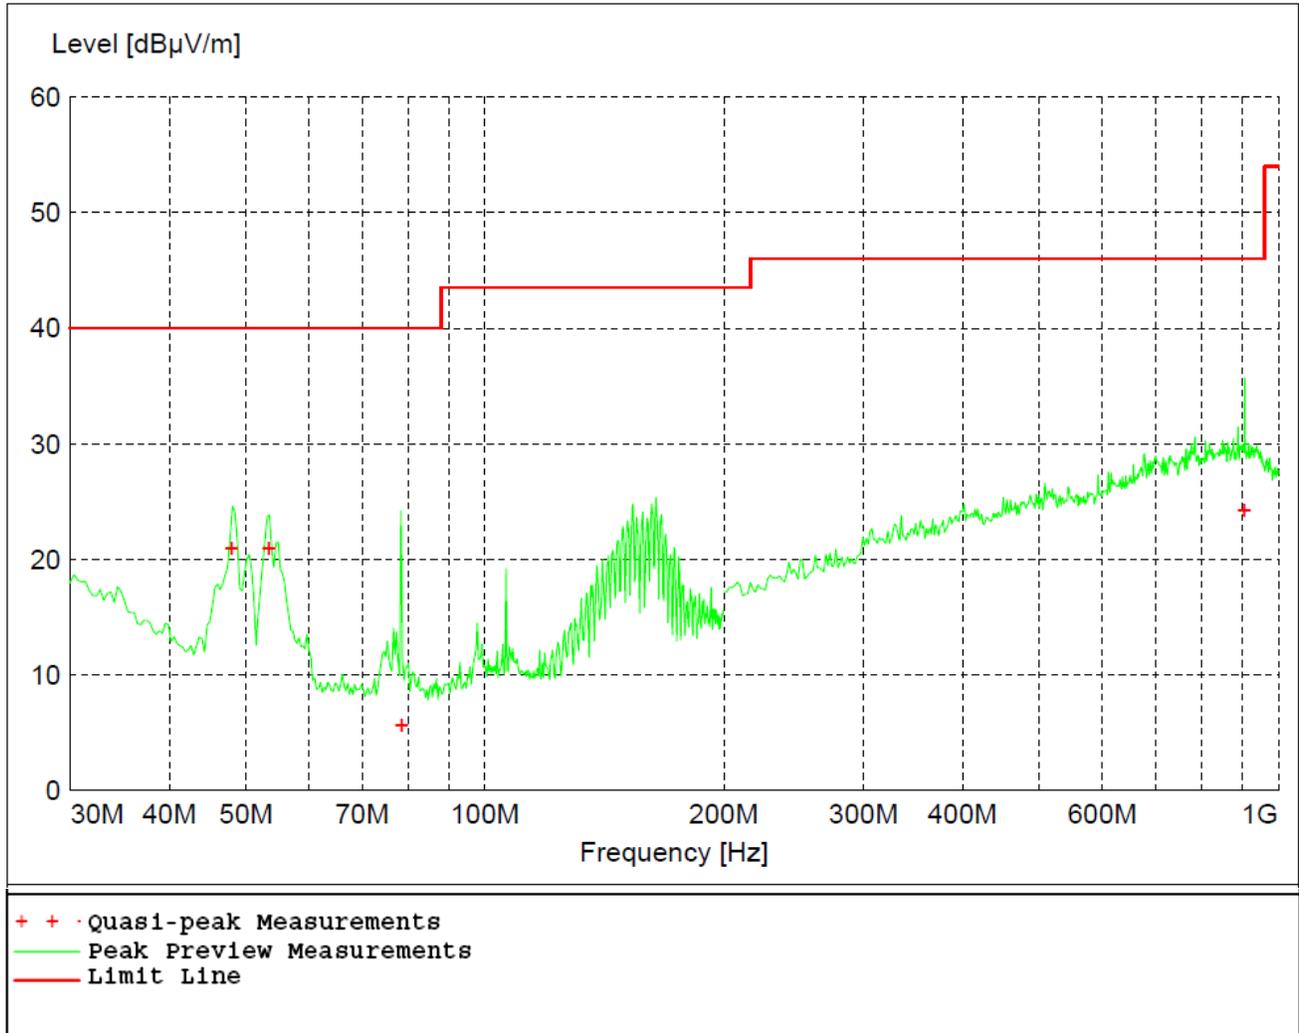


Figure 22 - Radiated Emissions Plot, High Channel, GMSK

REMARKS:

1. Emission level (dBµV/m) = Raw Value (dBµV) + Correction Factor (dB)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value



Report Number:	R20181212-20-02	Rev	B
Prepared for:	Garmin		

Table 17 - Radiated Emissions Quasi-peak Measurements, High Channel, GMSK

Frequency	Level	Limit	Margin	Height	Angle	Pol
MHz	dB μ V/m	dB μ V/m	dB	cm.	deg.	
48.000000	20.95	40.00	19.10	100	144	VERT
53.400000	20.99	40.00	19.00	100	226	VERT
78.600000	5.73	40.00	34.30	100	231	VERT
906.120000	24.31	46.00	21.70	143	79	HORI

The EUT was maximized in all 3 orthogonal axis. The worst-case is shown in the table above.

Table 18 - Radiated Emissions Peak Measurements vs. Average Limit, High Channel, GMSK

Frequency	Level	Limit	Margin	Height	Angle	Pol
MHz	dB μ V/m	dB μ V/m	dB	cm.	deg.	
2480.000000	90.27	94.00	3.73	178	297	VERT
7417.600000	44.98	54.00	9.02	99	0	VERT

The EUT was maximized in all 3 orthogonal axis. The worst-case is shown in the table above.



Report Number:	R20181212-20-02	Rev	B
Prepared for:	Garmin		

4.5 BAND EDGES

Test Method: ANSI C63.10-2013, Section(s) 6.10.5

Limits of bandedge measurements:

For emissions outside of the allowed band of operation, the emission level needs to be 20dB under the maximum fundamental field strength. However, if the emissions fall within one of the restricted bands from 15.205 the field strength levels need to be under that of the limits in 15.209.

Test procedures:

Measurements were performed by connecting the output of the transmitter directly into a spectrum analyzer using an impedance matched cable and connector soldered to the EUT in place of the antenna. The resolution bandwidth was set to 100kHz and the EMI receiver was used to scan from the bandedge to the fundamental frequency with a peak detector. The highest emissions level beyond the bandedge was measured and recorded. All band edge measurements were evaluated to the general limits in Part 15.209.

To calculate the level at the bandedge frequencies, the difference between the peak and the band edge level was subtracted from the peak radiated value at the fundamental. This value was compared to the 15.209 radiated limits for compliance.

Deviations from test standard:

No deviation.

Test setup:

The field strength was measured by connecting the EUT directly to the spectrum analyzer.

EUT operating conditions:

The EUT was powered by internal battery power unless specified and set to transmit continuously on the lowest frequency channel, highest frequency channel and one in the middle of its operating range. EUT was set to transmit in GFSK and GMSK.



Report Number:	R20181212-20-02	Rev	B
Prepared for:	Garmin		

Test results:

CHANNEL	Mode	Band edge /Measurement Frequency (MHz)	Relative Highest out of band level dBm	Relative Fundamental dBm	Delta (dB)	Min Delta (dB)	Result
Low, Continuous	GMSK	2400	-41.84	6.37	48.21	37.80	PASS
Low, Continuous	GFSK	2400	-36.62	2.68	39.30	36.27	PASS
High, Continuous	GMSK	2483.5	-44.77	4.81	49.58	38.31	PASS
High, Continuous	GFSK	2483.5	-44.93	1.40	46.33	35.36	PASS

*Minimum delta = [highest fundamental peak field strength from Section 4.4] – [Part 15.209 radiated emissions limit.]

From Section 4.2

Fundamental peak field strength at Low Channel GMSK = 91.80 dBμV/m
 Fundamental peak field strength at High Channel GMSK = 90.27 dBμV/m
 Fundamental peak field strength at Low Channel GFSK = 92.31 dBμV/m
 Fundamental peak field strength at High Channel GFSK = 89.36 dBμV/m

Low Channel minimum delta GMSK = 91.80 – 54.0 dBμV/m = 37.80 dBc
 High Channel minimum delta GMSK = 90.27 – 54.0 dBμV/m = 36.27 dBc
 Low Channel minimum delta GFSK = 92.31 – 54.0 dBμV/m = 38.31 dBc
 High Channel minimum delta GFSK = 89.36 – 54.0 dBμV/m = 35.36 dBc

FCC Part 15.249 requires the attenuation of all emissions outside of the specified band to be at least 50 dB or below the 15.209 limits, whichever is the lesser. In this case, the 15.209 limits were the lesser and used to show compliance.



Marker 1 [T1] RBW 100 kHz RF Att 40 dB

Ref Lvl 6.37 dBm VBW 300 kHz
 30 dBm 2.40182365 GHz SWT 5 ms Unit dBm

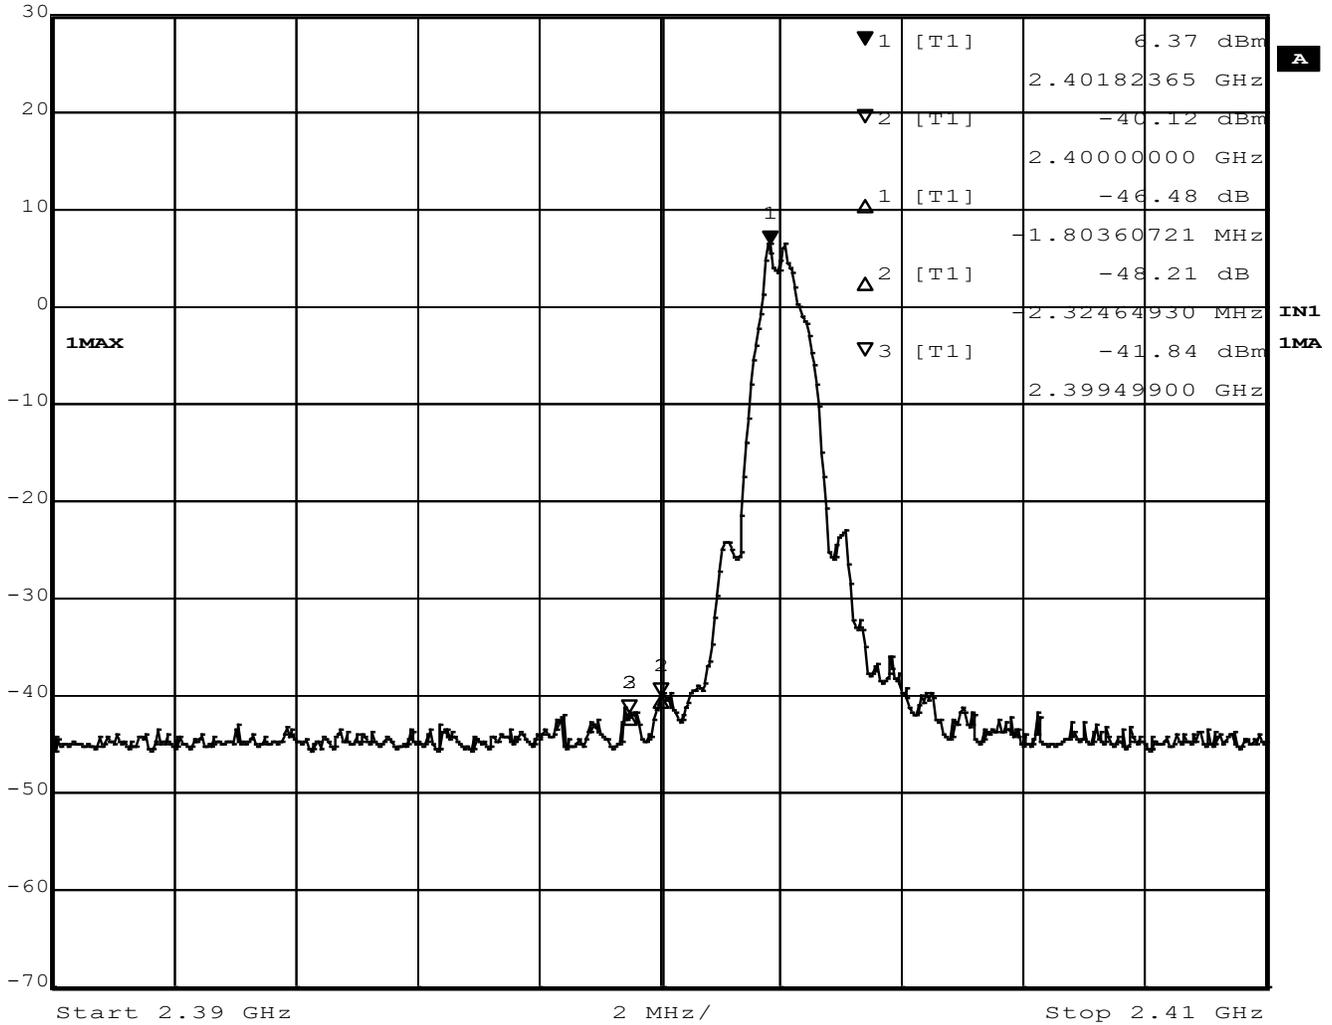


Figure 23 - Band Edge, Low Channel, GMSK



Marker 1 [T1]	RBW	100 kHz	RF Att	40 dB
Ref Lvl	4.81 dBm	VBW	300 kHz	
30 dBm	2.47977555 GHz	SWT	5 ms	Unit dBm

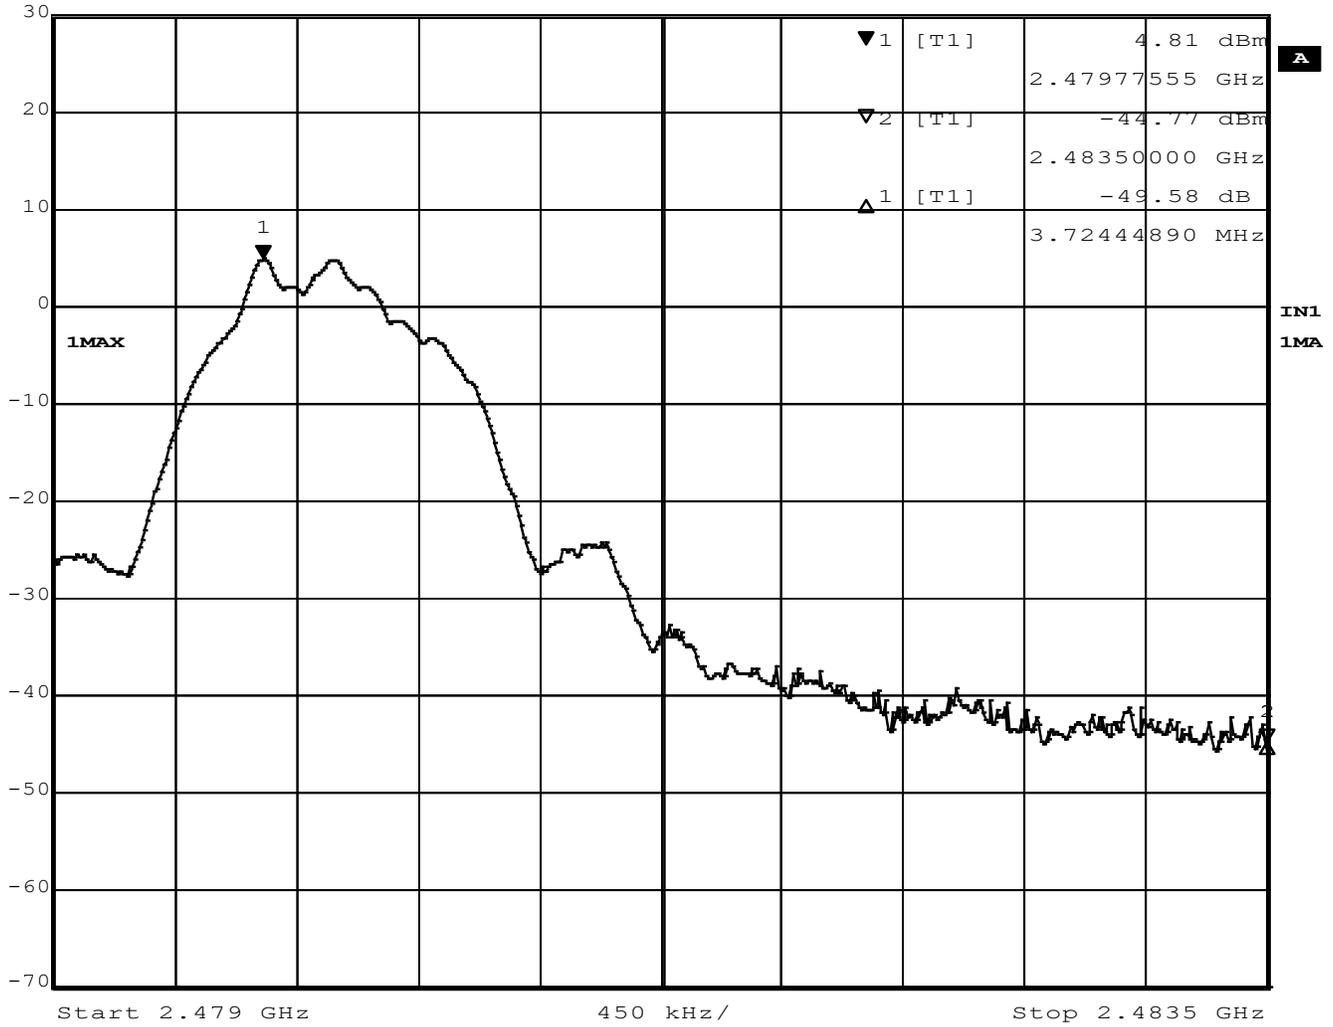


Figure 24 –Band Edge Measurement, High Channel, GMSK



Marker 1 [T1]

RBW 500 kHz RF Att 40 dB

Ref Lvl 2.68 dBm

VBW 300 kHz

24 dBm

2.40186373 GHz

SWT 5 ms

Unit

dBm

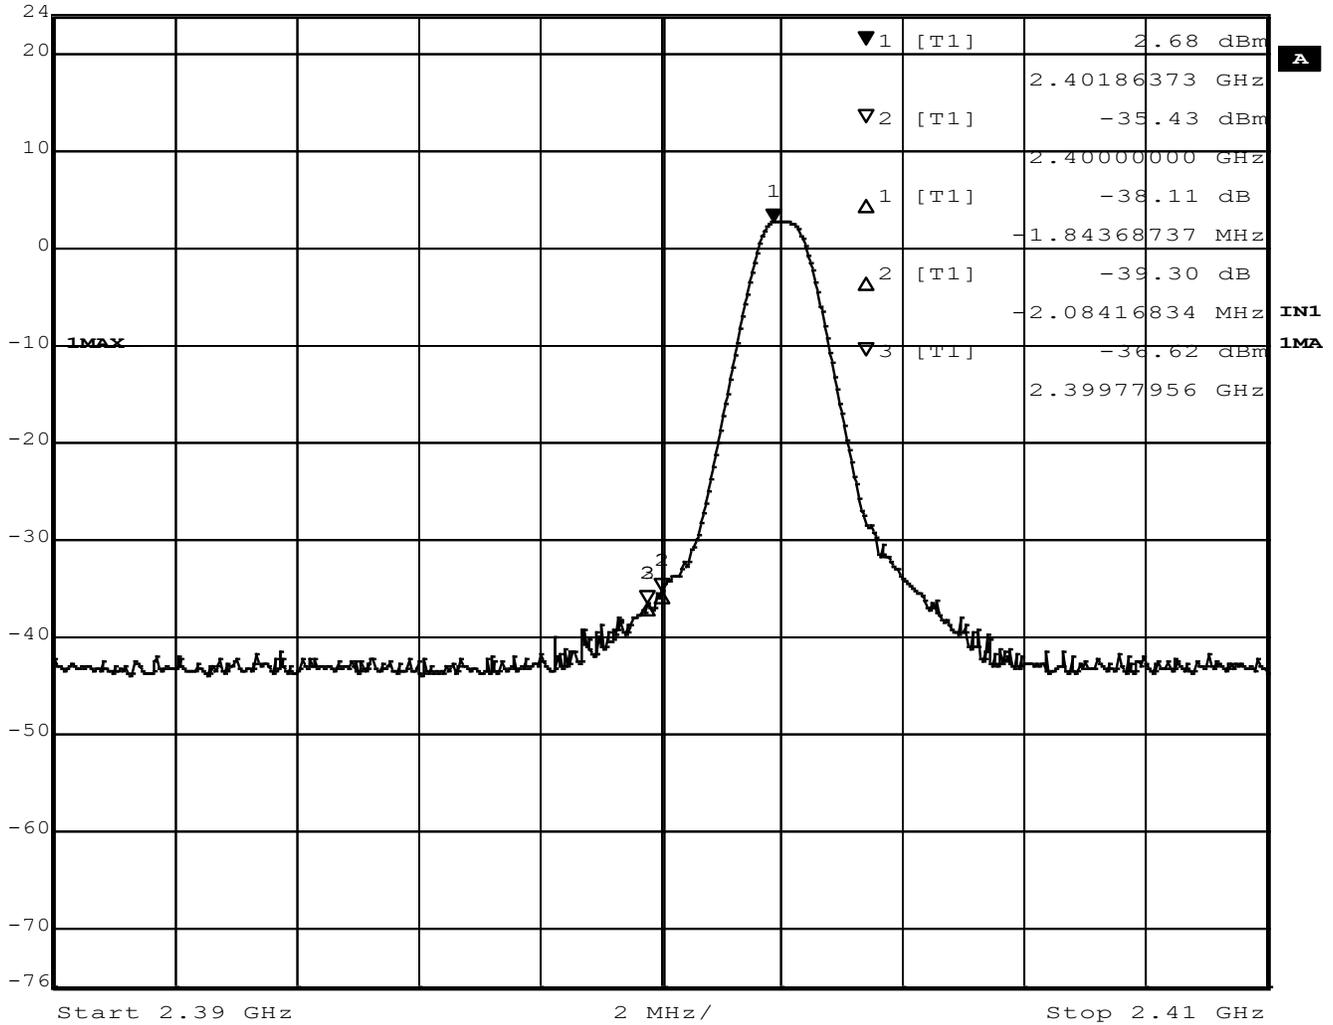


Figure 25 –Band Edge, Low Channel, GFSK



Marker 1 [T1] RBW 100 kHz RF Att 40 dB
 Ref Lvl 1.40 dBm VBW 300 kHz
 24 dBm 2.47985671 GHz SWT 5 ms Unit dBm

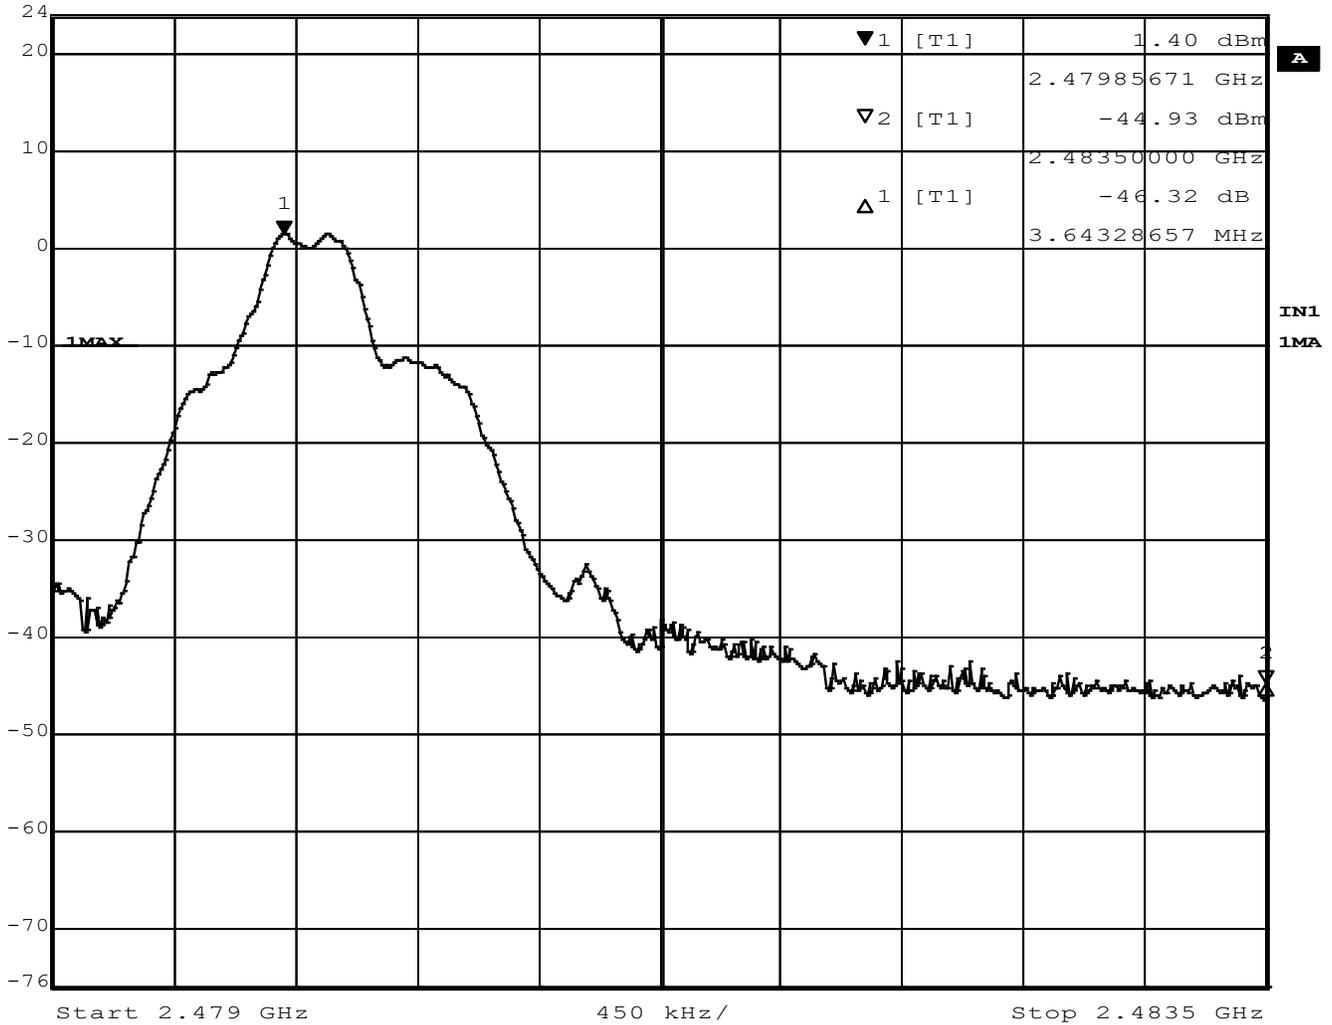


Figure 26 – Band Edge Measurement, High Channel, GFSK

4.6 CONDUCTED AC MAINS EMISSIONS

Test Method: ANSI C63.10-2013, Section(s) 6.2

Limits for conducted emissions measurements:

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

Notes:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz
3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

Test Procedures:

- a. The EUT was placed 0.8m above a ground reference plane and 0.4 meters from the conducting wall of a shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). The LISN provides 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference as well as the ground.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits are not reported.
- d. Results were compared to the 15.207 limits.

Deviation from the test standard:

No deviation


EUT operating conditions:

The EUT was powered by 5 VDC unless specified and set to transmit continuously on the middle channel.

Test Results:



Att 10 dB AUTO	Marker 2 [T2]	Det	AV Trd	ES-K1
INPUT 2	24.98 dBV	ResBW	9 kHz	
	510.0000000 kHz	Meas T	100 ms Unit	dBV

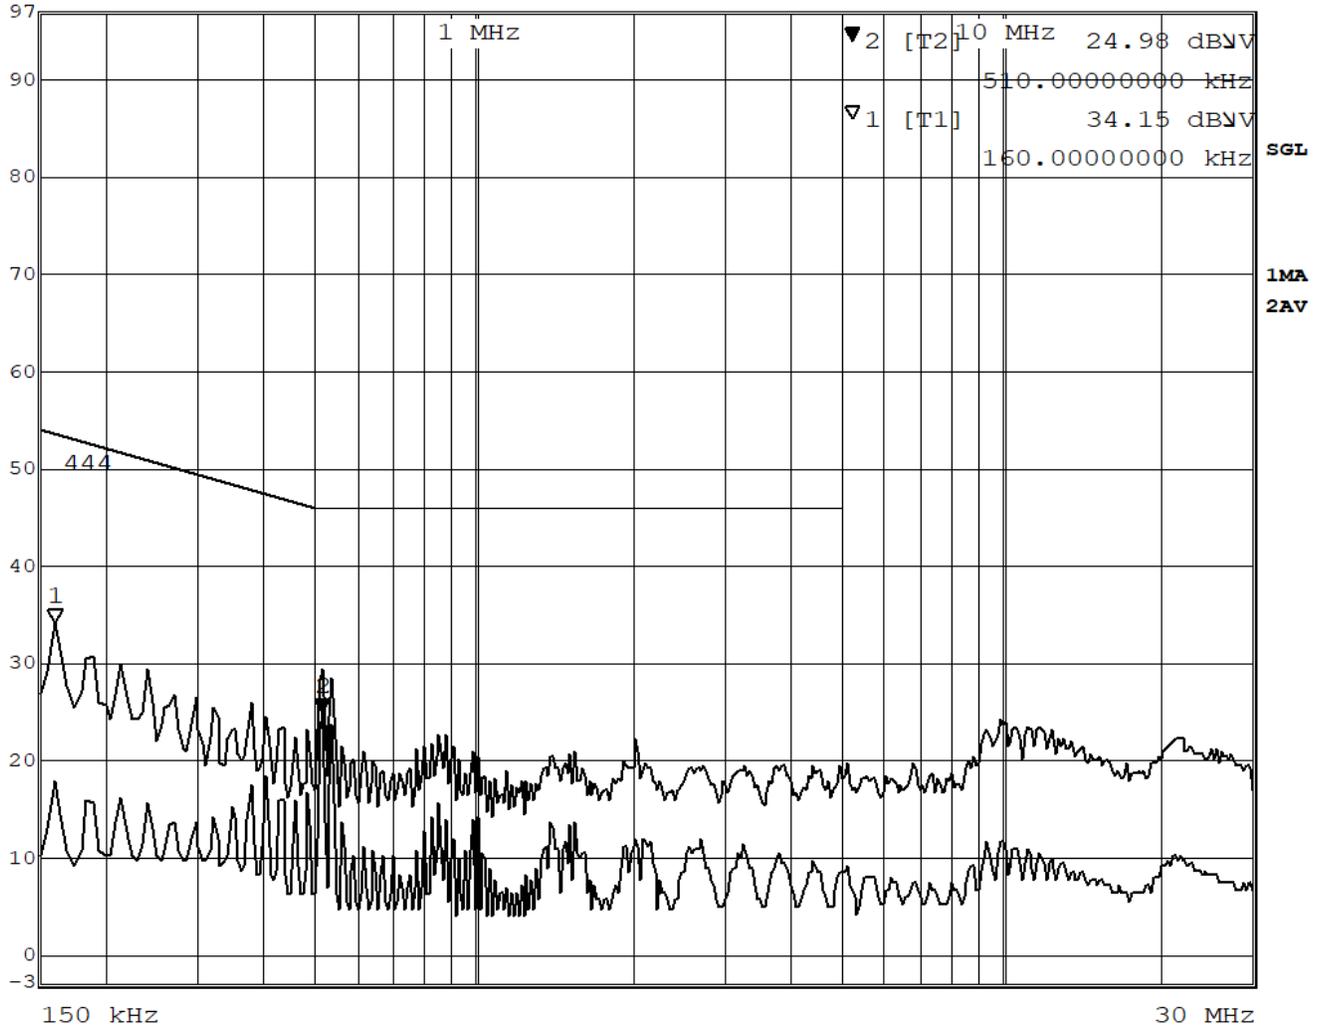


Date: 27.FEB.2019 11:26:21

Figure 27 - Conducted Emissions Plot, L-F

All Measurements were found to be at least 10 dB below the limits.



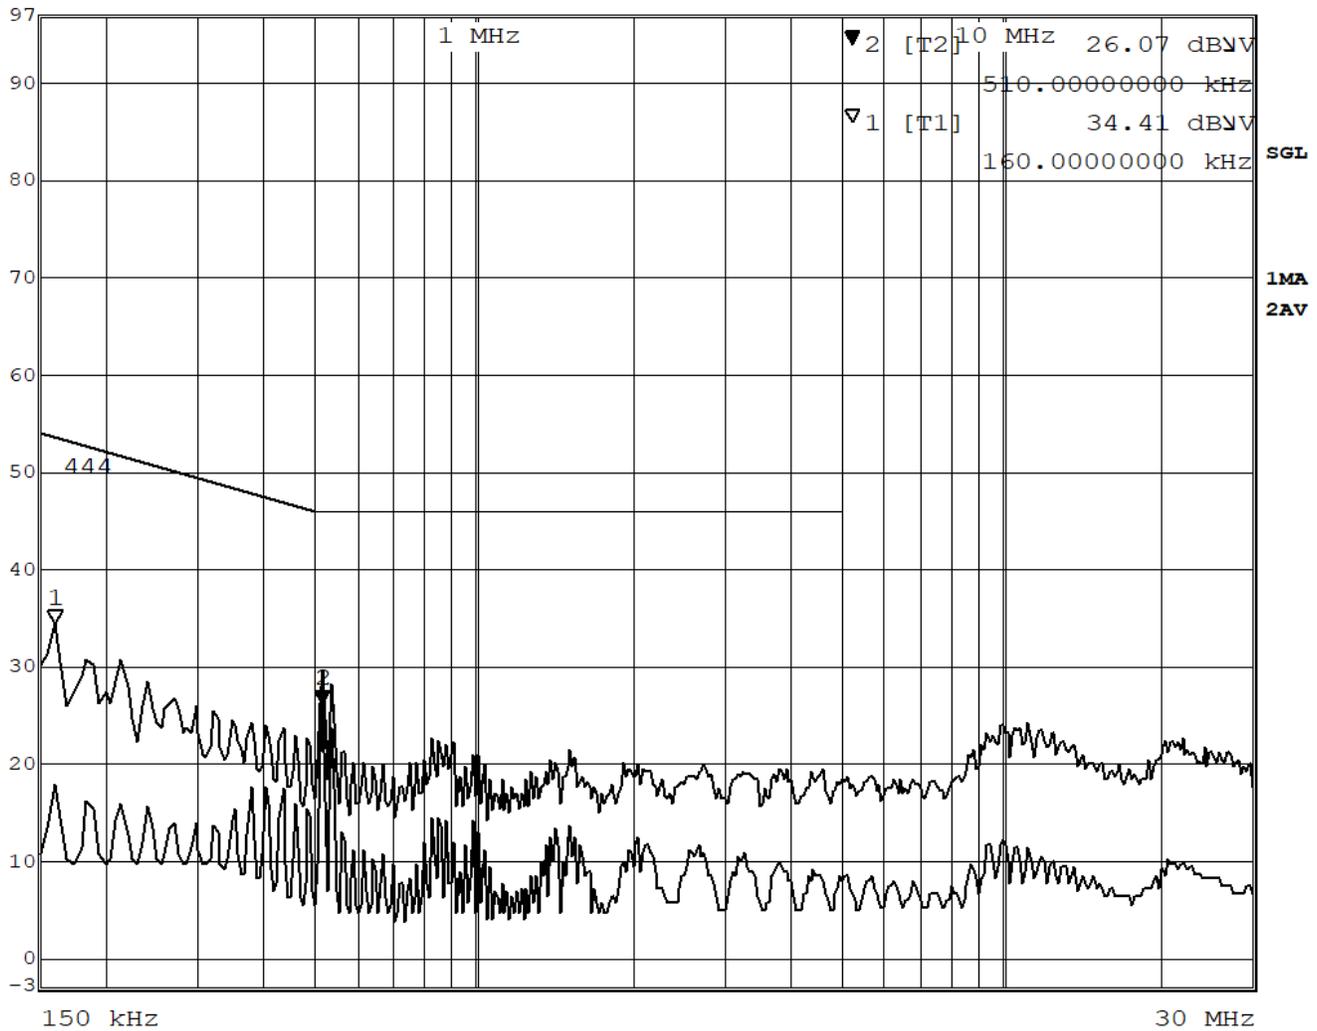Marker 2 [T2] Det AV Trd ES-K1
 Att 10 dB AUTO 26.07 dBµV ResBW 9 kHz
 INPUT 2 510.0000000 kHz Meas T 100 ms Unit dBµV



Date: 27.FEB.2019 10:18:14

Figure 28 - Conducted Emissions Plot, N-F

All Measurements were found to be at least 10 dB below the limits.



Report Number:	R20181212-20-02	Rev	B
Prepared for:	Garmin		

APPENDIX A: SAMPLE CALCULATION

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF - (-CF + AG) + AV$$

where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

AG = Amplifier Gain

AV = Averaging Factor (if applicable)

Assume a receiver reading of 55 dB μ V is obtained. The Antenna Factor of 12 and a Cable Factor of 1.1 is added. The Amplifier Gain of 20 dB is subtracted, giving a field strength of 48.1 dB μ V/m.

$$FS = 55 + 12 - (-1.1 + 20) + 0 = 48.1 \text{ dB}\mu\text{V/m}$$

The 48.1 dB μ V/m value can be mathematically converted to its corresponding level in μ V/m.

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(48.1 \text{ dB}\mu\text{V/m})/20] = 254.1 \mu\text{V/m}$$

AV is calculated by taking the $20 \cdot \log(T_{on}/100)$ where T_{on} is the maximum transmission time in any 100ms window.



Report Number:	R20181212-20-02	Rev	B
Prepared for:	Garmin		

EIRP Calculations

In cases where direct antenna port measurement is not possible or would be inaccurate, output power is measured in EIRP. The maximum field strength is measured at a specified distance and the EIRP is calculated using the following equation;

$$EIRP (Watts) = [Field Strength (V/m) \times antenna distance (m)]^2 / 30$$

$$Power (watts) = 10^{[Power (dBm)/10]} / 1000$$

$$Voltage (dB\mu V) = Power (dBm) + 107 \text{ (for } 50\Omega \text{ measurement systems)}$$

$$Field Strength (V/m) = 10^{[Field Strength (dB\mu V/m) / 20]} / 10^6$$

$$Gain = 1 \text{ (numeric gain for isotropic radiator)}$$

Conversion from 3m field strength to EIRP (d=3):

$$EIRP = [FS(V/m) \times d^2]/30 = FS [0.3] \quad \text{for } d = 3$$

$$EIRP(dBm) = FS(dB\mu V/m) - 10(\log 10^9) + 10\log[0.3] = FS(dB\mu V/m) - 95.23$$

10log(10^9) is the conversion from micro to milli



Report Number:	R20181212-20-02	Rev	B
Prepared for:	Garmin		

APPENDIX B – MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been for tests performed in this test report:

Test	Frequency Range	Uncertainty Value (dB)
Radiated Emissions, 3m	30MHz - 1GHz	3.82
Radiated Emissions, 3m	1GHz - 18GHz	4.44
Emissions limits, conducted	30MHz – 18GHz	±3.30 dB

Expanded uncertainty values are calculated to a confidence level of 95%.



Report Number:	R20181212-20-02	Rev	B
Prepared for:	Garmin		

REPORT END