



Test Report Serial Number:	45461512 R3.0
Test Report Date:	14 August 2019
Project Number:	1431

SAR Test Report - New Certification

Applicant:



Garmin International Inc.
1200 East 151 St.
Olathe, KS, 66062
USA

Maximum Reported 10g SAR			
FCC	Extremity DTS	0.53	W/kg
ISED	Extremity DTS	0.53	
General Pop. Limit:		4.00	

FCC ID:

IPH-03645

Product Model Number / HVIN

A03645

ISED Certification Number

1792A-03645

Product Name / PMN

A03645

In Accordance With:

FCC 47 CFR §2.1093

Radiofrequency Radiation Exposure Evaluation: Portable Devices

IC RSS-102 Issue 5

Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)

Approved By:

Ben Hewson, President

Celltech Labs Inc.
 21-364 Loughheed Rd.
 Kelowna, BC, V1X 7R8
 Canada



Test Lab Certificate: 2470.01



IC Registration 3874A-1



FCC Registration: CA3874

This report shall not be reproduced in any form without the expressed written consent of Celltech Labs Inc.

Table of Contents

1.0 DOCUMENT CONTROL.....	4
2.0 CLIENT AND DEVICE INFORMATION.....	5
3.0 SCOPE OF EVALUATION.....	6
4.0 NORMATIVE REFERENCES.....	7
5.0 STATEMENT OF COMPLIANCE.....	8
6.0 SAR MEASUREMENT SYSTEM.....	9
7.0 RF CONDUCTED POWER MEASUREMENT.....	10
TABLE 7.0 CONDUCTED POWER MEASUREMENTS.....	10
TABLE 7.1 CONDUCTED POWER MEASUREMENTS.....	11
8.0 NUMBER OF TEST CHANNELS (N_C) AND CONFIGURATIONS.....	12
9.0 ACCESSORIES EVALUATED.....	13
TABLE 9.0 ACCESSORIES EVALUATED.....	13
10.0 SAR MEASUREMENT SUMMARY.....	14
TABLE 10.0: MEASURED RESULTS.....	14
11.0 SCALING OF MAXIMUM MEASURED SAR.....	15
TABLE 11.0 SAR SCALING.....	15
12.0 SAR EXPOSURE LIMITS.....	17
TABLE 12.0 EXPOSURE LIMITS.....	17
13.0 DETAILS OF SAR EVALUATION.....	18
13.0 DAY LOG.....	18
13.1 DUT SETUP AND CONFIGURATION.....	19
13.2 DUT POSITIONING.....	20
13.3 GENERAL PROCEDURES AND REPORT.....	21
13.4 FLUID DIELECTRIC AND SYSTEMS PERFORMANCE CHECK.....	22
13.5 SCAN RESOLUTION 100MHZ TO 2GHZ.....	22
13.6 SCAN RESOLUTION 2GHZ TO 3GHZ.....	23
13.7 SCAN RESOLUTION 5GHZ TO 6GHZ.....	23
14.0 MEASUREMENT UNCERTAINTIES.....	24
TABLE 14.0 MEASUREMENT UNCERTAINTY.....	24
TABLE 14.1 CALCULATION OF DEGREES OF FREEDOM.....	25
15.0 FLUID DIELECTRIC PARAMETERS.....	26
TABLE 15.0 FLUID DIELECTRIC PARAMETERS 2450MHZ BODY TSL.....	26
TABLE 15.1 FLUID DIELECTRIC PARAMETERS 2450MHZ BODY TSL.....	28
TABLE 15.2 FLUID DIELECTRIC PARAMETERS 2450MHZ BODY TSL.....	30
16.0 SYSTEM VERIFICATION TEST RESULTS.....	32
TABLE 16.0 SYSTEM VERIFICATION RESULTS 2450MHZ BODY TSL.....	32
TABLE 16.1 SYSTEM VERIFICATION RESULTS 2450MHZ BODY TSL.....	33
TABLE 16.2 SYSTEM VERIFICATION RESULTS 2450MHZ BODY TSL.....	34
.....	34
17.0 SYSTEM VALIDATION SUMMARY.....	35

TABLE 17.0 SYSTEM VALIDATION SUMMARY.....	35
18.0 MEASUREMENT SYSTEM SPECIFICATIONS.....	36
TABLE 18.0 MEASUREMENT SYSTEM SPECIFICATIONS.....	36
19.0 TEST EQUIPMENT LIST.....	38
TABLE 19.0 EQUIPMENT LIST AND CALIBRATION.....	38
20.0 FLUID COMPOSITION.....	39
TABLE 20.0 FLUID COMPOSITION 2450MHz BODY TSL.....	39
APPENDIX A – SYSTEM VERIFICATION PLOTS.....	40
SPC-2450B MAY 17 2019.....	40
SPC-2450B MAY 21 2019.....	42
APPENDIX B – MEASUREMENT PLOTS OF MAXIMUMUM MEASURED SAR.....	46
GARMIN A03645-2450B MAY 21 2019.....	46
GARMIN A03645-2450B JUN 03 2019.....	48
APPENDIX C - SETUP PHOTOS.....	50
APPENDIX D – DUT AND ACCESSORY PHOTOS.....	53
APPENDIX E – PROBE CALIBRATION.....	58
APPENDIX F – DIPOLE CALIBRATION.....	59
APPENDIX G - PHANTOM.....	60

1.0 DOCUMENT CONTROL

Samples Tested By:	Trevor Whillock		
Report Prepared By:	Trevor Whillock		
Report Reviewed By:	Ben Hewson		
Report Issue Number	Description	By	Report Issue Date
R0.0	Draft	Trevor Whillock	12 June 2019
R0.1	Section 2.0,7.0 & 11.0- Revised Rated Power	Trevor Whillock	21 June 2019
	Cover Page-Revised Max SAR		
R1.0	Initial Release	Trevor Whillock	26 June 2019
	Section 2.0 -Added Reference to Manufacturer		
R2.0	Section 16.0,16.1,16.2 -Revised Normalized Target Values and Deviation in SPC Report	Trevor Whillock	15 July 2019
R3.0	Appendix B-Revised SAR Plot B5 to display 1g &10g Measured SAR Values	Trevor Whillock	14 August 2019

2.0 CLIENT AND DEVICE INFORMATION

Client Information	
Applicant Name	Garmin International Inc.
Applicant Address	1200 East 151 St.
	Olathe, KS,66062
	USA
Manufacturer Name	Garmin Corporation
Manufacturer Address	No.68, Zhangshu 2nd Rd., Xizhi Dist.
	New Taipei City 221
	Taiwan, R.O.C
DUT Information	
Device Identifier(s):	FCC ID: IPH-03645
	IC: 1792A-03645
Type of Equipment:	Digital Transmission System (DTS) FCC Part 15, RSS 247
	Low Power Communication Device Transmitter (DXX) FCC Part 15
Device Model(s) / HVIN:	A03645
Device Marketing Name / PMN:	A03645
Test Sample Serial No.:	T/A Sample - Identical Prototype
Transmit Frequency Range:	WiFi: 2412 - 2462 MHz
	BT: 2402 - 2480 MHz
	NFC: 13.56 MHz
Number of Channels:	See Section 8.0
Manuf. Max. Avg Rated Output Power:	WiFi 2.4GHz: 802.11b: 11.07 dBm Avg. / 802.11g: 12.35 dBm Avg. / 802.11n: 13.62dBm avg.
	BT:GFSK: 13.40 dBm Avg. / PI/4-DQPSK: 7.57 dBm Avg. / 8-DPSK: 7.67 dBm Avg.
	BLE: GMSK:1.95 dBm Avg.
	ANT: GFSK:1.81 dBm Avg.
Modulation:	WiFi 802.11b/g/n: DSSS, OFDM, MCS0-7
	BT: GFSK, PI/4-DQPSK
	BLE: GMSK
	ANT: GFSK
Duty Cycle:	100.0%
DUT Power Source:	5V USB, Internal Li-ion battery
Deviation(s) from standard/procedure:	None
Modification of DUT:	None

3.0 SCOPE OF EVALUATION

The A03645, FCC ID: IPH-03645 ISED ID: 1792A-03645, is a wrist-worn transceiver that is capable of operating in the 2.4GHz WiFi and Bluetooth frequency bands with an additional NFC feature that operates at a fixed frequency of 13.56MHz. The device is intended for General Population Use. The product operates from an internal proprietary Li-ion rechargeable battery which can be connected to a compliant USB interface port, AC or DC adapter for charging. Test samples provided by the manufacturer were capable of transmitting at select frequencies and modulations preset by the manufacturer. An additional antenna modification was prepared for one sample allowing the ability to connect test equipment for antenna port conducted power analysis. The DUT was evaluated for SAR at the maximum conducted output power level, preset by the manufacturer and in accordance with the procedures described in IEEE 1528, IEC 62209-2, FCC KDB 865646, 447498, 248227 and RSS 102.

4.0 NORMATIVE REFERENCES


Normative References*	
ANSI / ISO 17025:2017	General Requirements for competence of testing and calibration laboratories
FCC CFR Title 47 Part 2 Title 47: Part 2.1093:	Code of Federal Regulations Telecommunication Radiofrequency Radiation Exposure Evaluation: Portable Devices
Health Canada Safety Code 6 (2015)	Limits of Human Exposure to Radiofrequency Electromagnetic Energy in the Frequency Range from 3kHz to 300GHz
Industry Canada Spectrum Management & Telecommunications Policy RSS-102 Issue 5:	Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)
IEEE International Committee on Electromagnetic Safety IEEE 1528-2013:	IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
IEC International Standard IEC 62209-2 2010	Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Part 2
FCC KDB KDB 865664 D01v01r04	SAR Measurement Requirements for 100MHz to 6GHz
FCC KDB KDB 447498 D01v06	Mobile and Portable Devices RF Exposure Procedures and Equipment Authorization Policies
FCC KDB KDB 248227 D01v02r02	SAR Test Guidance for IEEE 802.11 (WiFi) Transmitters
* When the issue number or issue date is omitted, the latest version is assumed.	

5.0 STATEMENT OF COMPLIANCE

This measurement report demonstrates that samples of the product model(s) were evaluated for Specific Absorption Rate (SAR) on the date(s) shown, in accordance with the Measurement Procedures cited and were found to comply with the Standard(s) Applied based on the Exposure Limits of the Use Group indicated for which the product is intended to be used.

Applicant: Garmin International Inc.	Model / HVIN: A03645
Standard(s) Applied: FCC 47 CFR §2.1093 Health Canada's Safety Code 6	Measurement Procedure(s): FCC KDB 865664, FCC KDB 447498, FCC KDB248227 Industry Canada RSS-102 Issue 5 IEEE Standard 1528-2013, IEC 62209-2
Reason For Issue: <input checked="" type="checkbox"/> New Certification <input type="checkbox"/> Class I Permissive Change <input type="checkbox"/> Class II Permissive Change	Use Group: <input checked="" type="checkbox"/> General Population / Uncontrolled <input type="checkbox"/> Occupational / Controlled
Reason for Change: Original Filing	Limits Applied: <input type="checkbox"/> 1.6W/kg - 1g Volume <input type="checkbox"/> 8.0W/kg - 1g Volume <input checked="" type="checkbox"/> 4.0W/kg - 10g Volume
	Date(s) Evaluated: May 17th, 21st and June 3rd, 2019

The results of this investigation are based solely on the test sample(s) provided by the applicant which was not adjusted, modified or altered in any manner whatsoever except as required to carry out specific tests or measurements. A description of the device, operating configuration, detailed summary of the test results, methodologies and procedures used during this evaluation, the equipment used and the various provisions of the rules are included in this test report.

<p>I attest that the data reported herein is true and accurate within the tolerance of the Measurement Instrument Uncertainty; that all tests and measurements were performed in accordance with accepted practices or procedures; and that all tests and measurements were performed by me or by trained personnel under my direct supervision. The results of this investigation are based solely on the test sample(s) provided by the client which were not adjusted, modified or altered in any manner whatsoever, except as required to carry out specific tests or measurements. This test report has been completed in accordance with ISO/IEC 17025.</p>	 <hr/> Trevor Whillock Test Lab Engineer Celltech Labs Inc. <hr/> 14 August 2019 Date
---	---

6.0 SAR MEASUREMENT SYSTEM

SAR Measurement System

Celltech Labs Inc. SAR measurement facility employs a Dosimetric Assessment System (DASY™) manufactured by Schmid & Partner Engineering AG (SPEAG™) of Zurich, Switzerland. The DASY6 measurement system is comprised of the measurement server, a robot controller, a computer, a near-field probe, a probe alignment sensor, an Elliptical Planar Phantom (ELI) phantom and a specific anthropomorphic mannequin (SAM) phantom for Head and/or Body SAR evaluations. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF). A cell controller system contains the power supply, robot controller and a teach pendant (Joystick) to control the robot's servo motors. The Staubli robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical form the DAE to digital electronic signal and transfers data to the DASY6 measurement server. The DAE4 utilizes a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16-bit AD-converter, a command decoder and a control logic unit. Transmission to the DASY6 measurement server is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe-mounting device includes two different sensor systems for frontal and sidewise probe contacts. The sensor systems are also used for mechanical surface detection and probe collision detection. The robot utilizes a controller with built in VME-bus computer.



DASY 6 SAR System



DASY 6 Measurement Controller

7.0 RF CONDUCTED POWER MEASUREMENT

Table 7.0 Conducted Power Measurements

Conducted Power Measurements									
Channel	Frequency (MHz)	Measured Power (dBm)	Rated Power (dBm)	Rated Power (W)	Delta (dB)	SAR Test Channel (Y/N)	Mode	Modulation	
1	2412	10.37	11.07	0.01	-0.70		WLAN 2.4G	DSS-1Mbps	802.11b
2	2417	10.30	11.07	0.01	-0.77			DSS-1Mbps	
3	2422	10.12	11.07	0.01	-0.95			DSS-1Mbps	
4	2427	9.97	11.07	0.01	-1.10			DSS-1Mbps	
5	2432	9.94	11.07	0.01	-1.13			DSS-1Mbps	
6	2437	10.30	11.07	0.01	-0.77			DSS-1Mbps	
7	2442	10.10	11.07	0.01	-0.97			DSS-1Mbps	
8	2447	9.87	11.07	0.01	-1.20			DSS-1Mbps	
9	2452	9.64	11.07	0.01	-1.43			DSS-1Mbps	
10	2457	9.59	11.07	0.01	-1.48			DSS-1Mbps	
11	2462	9.46	11.07	0.01	-1.61			DSS-1Mbps	
1	2412	10.04	11.07	0.01	-1.03		WLAN 2.4G	DSS-2Mbps	802.11g
		9.44	11.07	0.01	-1.63			DSS-5.5Mbps	
		8.99	11.07	0.01	-2.08			DSS-11Mbps	
		11.00	12.35	0.02	-1.35			OFDM-6Mbps	
		11.08	12.35	0.02	-1.27			OFDM-54Mbps	
		11.40	13.62	0.02	-2.22			MCS-0	
		11.75	13.62	0.02	-1.87	Y		MCS-6	
9.68	10.37	0.01	-0.69		DSS-2Mbps	802.11b			
9.28	10.37	0.01	-1.09		DSS-5.5Mbps				
8.67	10.37	0.01	-1.70		DSS-11Mbps				
10.51	12.35	0.02	-1.84		OFDM-6Mbps			802.11g	
10.55	12.35	0.02	-1.80		OFDM-54Mbps				
10.57	13.62	0.02	-3.05		MCS-0		802.11n		
11.08	13.62	0.02	-2.54	Y	MCS-6				
11	2467	9.35	10.37	0.01	-1.02		WLAN 2.4G	DSS-2Mbps	802.11b
		8.79	10.37	0.01	-1.58			DSS-5.5Mbps	
		8.19	10.37	0.01	-2.18			DSS-11Mbps	
		10.01	12.35	0.02	-2.34			OFDM-6Mbps	802.11g
		10.13	12.35	0.02	-2.22			OFDM-54Mbps	
		10.14	13.62	0.02	-3.48			MCS-0	802.11n
		10.45	13.62	0.02	-3.17	Y		MCS-6	

Table 7.1 Conducted Power Measurements

Conducted Power Measurements								
Channel	Frequency (MHz)	Measured Power (dBm)	Rated Power (dBm)	Rated Power (W)	Delta (dB)	SAR Test Channel (Y/N)	Mode	Modulation
2	2402	13.40	13.40	0.02	0.00	Y	BT/BLE/ANT	
41	2441	13.03	13.40	0.02	-0.37	-		BT BR GFSK
80	2480	13.07	13.40	0.02	-0.33	-		BT 2EDR(PI/4)
2	2402	7.57	7.57	0.01	0.00	-		BT 3EDR(8-DPSK)
		7.67	7.67	0.01	0.00	-		BLE(GMSK)
		0.37	1.95	0.002	-1.58	-		ANT(GFSK)
		-1.20	1.81	0.002	-3.01	-		

The rated power and tolerance are stated for typical transmission modes and data rates. Some modes and data rates may produce lower than rated conducted power levels. Power measurements taken across the various channels, modes and data rates did not produce levels in excess of the Rated Power plus Tolerance. SAR was evaluated using the power level setting and duty cycle specified by the manufacturer to be the max output power and produce the most conservative SAR. SAR was evaluated at the maximum average tune up tolerance. See section 2.0 Client and Device Information for details. The reported SAR was not scaled down.

8.0 NUMBER OF TEST CHANNELS (N_c) AND CONFIGURATIONS

This device is a wrist-worn device and was evaluated for extremity SAR. Although the intended use is to be wrist-worn with the back side of the device in contact with the human skin, the device was additionally evaluated to the worst case setup configuration leveraged from a previous EU evaluation. The Front side (Screen) of the device was found to be the worst case setup configuration and produced the highest SAR.

WiFi SAR Evaluation:

SAR was evaluated in MCS-6 mode at a 100% duty cycle. The power level setting selected was specified by the manufacturer to be the max output power and produce the most conservative SAR.

As per FCC KDB 24827, the required 802.11 test channels are Ch1, Ch6 and Ch 11. Highest conducted output power was found on channel 1. Based on evaluated SAR level of the highest output channel; SAR test reduction methodology was applied to reduce the total number of required test channels and exclude channel 6 and channel 11 from SAR test evaluation.

When applicable, SAR test reduction methods may be utilized.

The initial test configuration for 2.4 GHz transmission modes is determined by the 802.11 configuration with the highest maximum output power specified for production units, including tune-up tolerance, in each standalone and aggregated frequency band.

When the reported SAR of the initial test configuration is > 0.8 W/kg, SAR measurement is required for subsequent next highest measured output power channel(s) in the initial test configuration until reported SAR is ≤ 1.2 W/kg or all required channels are tested.

While 1-g SAR thresholds are specified in the procedures for SAR test reduction and exclusion, these thresholds should be multiplied by 2.5 when 10-g extremity SAR is considered.

Therefore; Channel 6 and 11 was not required for evaluation in any exposure configuration.

BT/BLE/ANT SAR Test Evaluation:

Bluetooth was evaluated in GFSK mode at a 100% duty cycle in the worst-case configuration from the WiFi test evaluation.

General SAR Test Reduction Considerations

As per KDB 447498D01,

Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid band or highest output power channel is:

c) ≤ 0.4 W/kg or 1.0W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 Mh

BLE/ANT was not evaluated for SAR.

Per FCC KDB 447498 4.3.1 the BLE/ANT transmitter meets the standalone SAR test exclusion criteria. See section 11.0 for details.

NOTE: This device is not capable of simultaneous transmission between the BT/BLE/ANT and WiFi transmitters.

NFC:

The RFID transmitter is a low power communication device transmitter and does not require standalone SAR evaluation. Simultaneous transmission evaluation with it and the 802.11b/g/n or BT 802.15 is not required.

9.0 ACCESSORIES EVALUATED

Table 9.0 Accessories Evaluated

Manufacturer's Accessory List				
Test Report ID Number	Manufacturer's Part Number	Description	SAR Evaluated	SAR Tested
B1	011-04878-0X	20mm Watch Band, Grey Silicone Strap	Y	Y
B2	011-04878-1X	20mm Watch Band, Stainless Steel Metal Business Strap	Y	Y
P1	362-00087-00	AC Adapter, 5.0V, 1.0A, USB-A Recpt	n/a	n/a
P2	320-01069-20	USB Charging Cable	n/a	n/a

10.0 SAR MEASUREMENT SUMMARY

Table 10.0: Measured Results

Measured SAR Results (10g) - BODY(FCC/ISED)															
Date	Plot ID #	DUT Model	Test Type	Test Freq. (MHz)	Modulation	Accessories				DUT Spacing		Meas. Cond. Power (dBm)	Measured SAR 10g (W/kg)	SAR Drift (dB)	
						Antenna ID	Battery ID	Body ID	Audio ID	DUT (mm)	Antenna (mm)				
Extremity SAR															
WiFi & BT 2.4 GHz															
17 May 2019	B1	A03645	BODY-Back	2412	MCS-6	n/a	n/a	B1	n/a	0	0	11.75	0.203	-0.470	
17 May 2019	B2	A03645	BODY-Back	2412	MCS-6	n/a	n/a	B2	n/a	0	0	11.75	0.172	-0.380	
21 May 2019	B3	A03645	BODY-Front	2412	MCS-6	n/a	n/a	B1	n/a	0	0	11.75	0.306	-0.520	
03 June 2019	B4	A03645	BODY-Back	2402	BT-GFSK	n/a	n/a	B1	n/a	0	0	13.40	0.386	0.050	
03 June 2019	B5	A03645	BODY-Front	2402	BT-GFSK	n/a	n/a	B1	n/a	0	0	13.40	0.533	0.200	
FCC 47 CFR 2.1093					Health Canada Safety Code 6				Extremity	10g Average	4.0 W/kg		General Population		

Reference Section 8.0 for details

11.0 SCALING OF MAXIMUM MEASURED SAR

Table 11.0 SAR Scaling

Scaling of Maximum Measured SAR ⁽¹⁾								
Plot ID	Configuration	Freq	Measured Fluid Deviation		Measured Conducted Power	Measured Drift	Measured SAR (10g)	
		(MHz)	Permittivity	Conductivity	(dBm)	(dB)	(W/kg)	
B3	BODY-Front Side	2412	-3.56%	1.05%	11.75	-0.520	0.306	
B5	BODY-Front Side	2402	-4.63%	-1.17%	13.40	0.200	0.533	
Step 1								
Fluid Sensitivity Adjustment								
Plot ID	Scale Factor		X	Measured SAR	=	Step 1 Adjusted SAR (10g)		
	(%)			(W/kg)		(W/kg)		
B3	n/a		X	0.306	=	0.306		
B5	n/a		X	0.533	=	0.533		
Step 2								
Manufacturer's Tune-Up Tolerance								
Plot ID	Measured Conducted Power	Rated Power	Delta	+	Step 1 Adjusted SAR	=	Step 2 Adjusted SAR (10g)	
	(dBm)	(dBm)	(dB)		(W/kg)		(W/kg)	
B3	11.75	13.62	-1.9	+	0.306	=	0.474	
B5	13.40	13.40	0.0	+	0.533	=	0.533	
Step 3 (ISED)								
Drift Adjustment								
Plot ID	Measured Drift	+	Step 2 Adjusted SAR	=	Step 3 Adjusted SAR (10g)			
	(dB)		(W/kg)		(W/kg)			
B3	-0.520	+	0.474	=	0.534			
B5	0.200	+	0.533	=	0.533			
Step 4 (FCC)								
Simultaneous Transmission - Bluetooth and/or WiFi								
Plot ID	Rated Output Power (Pmax)	Freq	Separation Distance	Estimated SAR SAR	+	Step 2 Adjusted SAR	=	Step 4 Adjusted SAR (10g)
	(mW)	(MHz)	(mm)	(W/kg)		(W/kg)		(W/kg)
B3	n/a	n/a	n/a	n/a	+	0.474	=	0.474
B5	n/a	n/a	n/a	n/a	+	0.533	=	0.533
Step 5								
Reported SAR								
Plot ID	FCC From Steps 1 and 2			ISED From Steps 1 through 3				
	1g SAR (W/kg)			1g SAR (W/kg)				
B3	0.474			0.534				
B5	0.533			0.533				

The SAR test exclusion threshold for the BLE/ANT transmitter as per FCC KDB 447498 4.3.1 is as follows:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \times [\sqrt{f(\text{GHz})}] \leq 7.5 \text{ for 10-g SAR}$$

$$[(1.57)/(5)] \times [\sqrt{2.402}] = 0.487 \leq 7.5$$

Where:

max. power of channel, including tune-up tolerance, mW = 1.57 mW

min. test separation distance, mm = 5mm


f(GHz) = 2.402 GHz

Therefore; the BLE/ANT Transmitter meets the SAR test exclusion criteria.

NOTE: This device is not capable of simultaneous transmission between the BT/BLE/ANT and WiFi transmitters.

The RFID transmitter is a low power communication device transmitter and does not require standalone SAR evaluation. Simultaneous transmission evaluation with it and the 802.11b/g/n or BT 802.15 is not required.

NOTES to Table 11.0	
(1) Scaling of the Maximum Measured SAR is based on the highest, 100% duty cycle, Face, Body and/or Head SAR measured of ALL test channels, configurations and accessories used during THIS evaluation. The Measured Fluid Deviation parameters apply only to deviation of the tissue equivalent fluids used at the frequencies which produced the highest measured SAR. The Measured Conducted Power applies to the Conducted Power measured at the frequencies producing the highest Face and Body SAR. The Measured Drift is the SAR drift associated with that specific SAR measurement. The Reported SAR is the accumulation of all SAR Adjustments from the applicable Steps 1 through 4. The Plot ID is for identification of the SAR Measurement Plots in Annex A of this report. NOTE: Some of the scaling factors in Steps 1 through 4 may not apply and are identified by light gray text.	
Step 1	Per IEC-62209-1 and FCC KDB 865664. Scaling required only when Measured Fluid Deviation is greater than 5%. If the Measured Fluid Deviation is greater than 5%, Table 9.1 will be shown and will indicate the SAR scaling factor in percent (%). SAR is MULTIPLIED by this scaling factor only when the scaling factor is positive (+).
Step 2	Per KDB 447498. Scaling required only when the difference (Delta) between the Measured Conducted Power and the Manufacturer's Rated Conducted Power is (-) Negative. The absolute value of Delta is ADDED to the SAR.
Step 3	Per IEC 62209-1. Scaling required only when Measured Drift is (-) Negative. The absolute value of Measured Drift is added to Reported or Simultaneous Reported SAR.
Step 4	Per KDB 447498 4.3.2. The SAR, either measured or calculated, of ANY and ALL simultaneous transmitters must be added together and includes all contributors.
Step 5	The Reported SAR is the Maximum Final Adjusted Cumulative SAR from the applicable Steps 1 through 4 and are reported on Page 1 of this report.

I attest that the data reported herein is true and accurate within the tolerance of the Measurement Instrument Uncertainty; that all tests and measurements were performed in accordance with accepted practices or procedures; and that all tests and measurements were performed by me or by trained personnel under my direct supervision. The results of this investigation are based solely on the test sample(s) provided by the client which were not adjusted, modified or altered in any manner whatsoever, except as required to carry out specific tests or measurements. This test report has been completed in accordance with ISO/IEC 17025.	
	Trevor Whillock Test Lab Engineer Celltech Labs Inc.
	14 August 2019 Date

12.0 SAR EXPOSURE LIMITS

Table 12.0 Exposure Limits

SAR RF EXPOSURE LIMITS			
FCC 47 CFR§2.1093	Health Canada Safety Code 6	General Population / Uncontrolled Exposure ⁽⁴⁾	Occupational / Controlled Exposure ⁽⁵⁾
Spatial Average ⁽¹⁾ (averaged over the whole body)		0.08 W/kg	0.4 W/kg
Spatial Peak ⁽²⁾ (Head and Trunk averaged over any 1 g of tissue)		1.6 W/kg	8.0 W/kg
Spatial Peak ⁽³⁾ (Hands/Wrists/Feet/Ankles averaged over 10 g)		4.0 W/kg	20.0 W/kg
(1) The Spatial Average value of the SAR averaged over the whole body.			
(2) The Spatial Peak value of the SAR averaged over any 1 gram of tissue, defined as a tissue volume in the shape of a cube and over the appropriate averaging time.			
(3) The Spatial Peak value of the SAR averaged over any 10 grams of tissue, defined as a tissue volume in the shape of a cube and over the appropriate averaging time.			
(4) Uncontrolled environments are defined as locations where there is potential exposure to individuals who have no knowledge or control of their potential exposure.			
(5) Controlled environments are defined as locations where there is potential exposure to individuals who have knowledge of their potential exposure and can exercise control over their exposure.			

13.0 DETAILS OF SAR EVALUATION

13.0 Day Log

DAY LOG						Fluid Dielectric	SPC	Test
Date	Ambient Temp °C	Fluid Temp °C	Pressure (kPa)	Humidity	TSL			
17 May 2019	23	23.4	100.5	29%	2450B	X	X	X
21 May 2019	23	22.9	100.6	27%	2450B	X	X	X
03 June 2019	24	23.7	101.1	25%	2450B	X	X	X

*Per 1528 2013, test series was started within 24 hours of Fluid Parameter Measurement and was completed within a 48hr period.

13.1 DUT Setup and Configuration

DUT Setup and Configuration	
1	The DUT was evaluated for SAR in accordance with the procedures described in IEEE 1528, FCC KDB 865646, 447498, 248277, and RSS-102. The device was evaluated at a phantom separation distance of 0mm with the back side of the device against the phantom.
2	The Device was capable of transmitting at various modulations and data rates. The Conducted Power was higher when measured in MCS-6 mode at 100% duty cycle than any other 2.4 GHz WiFi configuration. The DUT was evaluated for SAR in MCS-6 mode at the maximum conducted output power level, preset by the manufacturer.
3	The Device was capable of transmitting at various modulations and data rates. The Conducted Power was higher when measured in GFSK Mode for 2.4GHz Bluetooth band than any other configuration. SAR was evaluated in GFSK mode at a 100% duty cycle using power level setting specified by the manufacturer to be the max output power and produce the most conservative SAR. The highest measured maximum output power was measured on Ch 2 in GFSK mode.
4	Each SAR evaluation was performed with a fully charged battery.

13.2 DUT Positioning

DUT Positioning	
Positioning	The DUT Positioner was securely fastened to the Phantom Platform. Registration marks were placed on the DUT and the Positioner to ensure consistent positioning of the DUT for each test evaluation.
FACE Configuration	This device is not intended to be held to the face and was not tested in the FACE configuration.
BODY Configuration	The DUT was securely clamped into the device holder with the surface of the DUT normally in contact with the body in direct contact with the bottom of the phantom, or 0mm separation from the DUT's accessory to the phantom surface.
HEAD Configuration	This device is not intended to be held to the ear and was not tested in the HEAD configuration.
Limb Worn Configuration	The DUT was positioned with the back side directly against the phantom surface with the strap opened to allow direct contact or 0mm of the DUT and watch band to the phantom surface.

13.3 General Procedures and Report

General Procedures and Reporting	
General Procedures	<p>The fluid dielectric parameters of the Active Tissue Simulating Liquid (TSL) were measured as described in this Section, recorded and entered into the DASY Measurement Server. Active meaning the TSL used during the SAR evaluation of the DUT. The temperature of the Active TSL was measured and recorded prior to performing a System Performance Check (SPC). An SPC was performed with the Active TSL prior to the start of the test series. The temperature of the Active TSL was measured throughout the day and the Active TSL temperature was maintained to $\pm 0.5^{\circ}\text{C}$. The Active TSL temperature was maintained to within $\pm 2.0^{\circ}\text{C}$ throughout the test series. The liquid parameters shall be measured within 24 hours before the start of a test series and if it takes longer than 48 hours, the liquid parameters shall also be measured at the end of the test series.</p> <p>An Area Scan exceeding the length and width of the DUT projection was performed and the locations of all maximas within 2dB of the Peak SAR recorded. A Zoom Scan centered over the Peak SAR location(s) was performed and the 1g and 10g SAR values recorded. The resolutions of the Area Scan and Zoom Scan are described in the Scan Resolution table(s) in this Section. A Power Reference Measurement was taken at the phantom reference point immediately prior to the Area Scan. A Power Drift measurement was taken at the phantom reference point immediately following the Zoom Scan to determine the power drift. A Z-Scan from the <u>Maximum Distance to Phantom Surface</u> to the fluid surface was performed following the power drift measurement.</p>
Reporting	<p>The 1g SAR, 10g SAR and power drift measurements are recorded in the SAR Measurement Summary tables in the SAR Measurement Summary Section of this report. The SAR values shown in the 100% DC (Duty Cycle) column are the SAR values reported by the SAR Measurement Server with the DUT operating at 100% transmit duty cycle. These tables also include other information such as transmit channel and frequency, modulation, accessories tested and DUT-phantom separation distance.</p> <p>In the Scaling of Maximum Measured SAR Section of this report, the highest measured SAR in the BODY configuration, within the entire scope of this assessment, are, when applicable, scaled for Fluid Sensitivity, Manufacturer's Tune-Up Tolerance, Simultaneous Transmission and Drift. With the exception of Duty Cycle correction/compensation, SAR values are <u>ONLY</u> scaled up, not down. The final results of this scaling is the <u>reported SAR</u> which appears on the Cover Page of this report.</p>

13.4 Fluid Dielectric and Systems Performance Check

Fluid Dielectric and Systems Performance Check	
Fluid Dielectric Measurement Procedure	<p>The fluid dielectric parameters of the Tissue Simulating Liquid (TSL) are measured using the Open-Ended Coax Method connected to an Agilent 8753ET Network Analyzer connected to a measurement server running April Dielectric Property Measurement System. A frequency range of $\pm 100\text{MHz}$ for frequencies $> 300\text{MHz}$ and $\pm 50\text{MHz}$ for frequencies $\leq 300\text{MHz}$ with frequency step size of 10MHz is used. The center frequency is centered around the SAR measurement probe's calibration point for that TSL frequency range. A calibration of the setup is performed using a short-open-deionized water (at 23°C in a 300ml beaker) method. A sample of the TSL is placed in a 300ml beaker and the open-ended coax is submerged approximately 8mm below the fluid surface in the approximate center of the beaker. A check of the setup is made to ensure no air is trapped under the open-ended coax. The sample of TSL is measured and compared to the FCC KDB 865664 targets for HEAD or BODY for the entire fluid measurement range. Fluid adjustment are made if the dielectric parameters are $> 5\%$ in range that the DUT is to be tested. If the adjustments fail to bring the parameters to $\leq 5\%$ but are $< 10\%$, the SAR Fluid Sensitivity as per IEC 62201-1 and FCC KDB 865664 are applied to the highest measured SAR. A TSL with dielectric parameters $> 10\%$ in the DUT test frequency range are not used.</p>
Systems Performance Check	<p>The fluid dielectric parameters of the Active TSL are entered into the DASY Measurement Server at each of the 10MHz step size intervals. Active meaning the TSL used during the SAR evaluation of the DUT. The DASY Measurement System will automatically interpolate the dielectric parameters for DUT test frequencies that fall between the 10MHz step intervals.</p> <p>A Systems Performance Check (SPC) is performed in accordance with IEEE 1528 "System Check" and FCC KDB 865664 "System Verification". A validation source, dipole or Confined Loop Antenna (CLA), is placed under the geometric center of the phantom and separated from the phantom in accordance to the validation source's Calibration Certificate data. A CW signal set to the frequency of the validate source's and SAR measurement probe's calibration frequency with a forward power set to the validation source's Calibration Certificate data power setting is applied to the validation source. An Area Scan is centered over the projection of the validation source's feed point and an Area Scan is taken. A Zoom Scan centered over the Peak SAR measurement of the Area Scan and the 1g and 10g SAR is measured. The measured 1g and 10g SAR is compared to the 1g and 10g SAR measurements from the validation source's Calibration Certificate. When required, the measured SAR is normalized to 1.0W and compared to the normalized SAR indicated on the validation source's Calibration Certificate. The SPC is considered valid when the measured and normalized SAR is $\leq 10\%$ of the measured and normalize SAR of the validation source's Calibration Certificate.</p> <p>The fluid dielectric parameters of the Active TSL and SPC are repeated when the Active TSL has been in use for greater than 84 hours or if the Active TSL temperature has exceed $\pm 1^\circ\text{C}$ of the initial fluid analysis.</p>

13.5 Scan Resolution 100MHz to 2GHz

Scan Resolution 100MHz to 2GHz	
Maximum distance from the closest measurement point to phantom surface: (Geometric Center of Probe Center)	$4 \pm 1 \text{ mm}$
Maximum probe angle normal to phantom surface. (Flat Section ELI Phantom)	$5^\circ \pm 1^\circ$
Area Scan Spatial Resolution $\Delta X, \Delta Y$	15 mm
Zoom Scan Spatial Resolution $\Delta X, \Delta Y$	7.5 mm
Zoom Scan Spatial Resolution ΔZ (Uniform Grid)	5 mm
Zoom Scan Volume X, Y, Z	30 mm
Phantom	ELI
Fluid Depth	$150 \pm 5 \text{ mm}$
An Area Scan with an area extending beyond the device was used to locate the candidate maximas within 2dB of the global maxima.	
A Zoom Scan centered over the peak SAR location(s) determined by the Area Scan was used to determine the 1-gram and 10-gram peak spatial-average SAR	

13.6 Scan Resolution 2GHz to 3GHz

Scan Resolution 2GHz to 3GHz	
Maximum distance from the closest measurement point to phantom surface: (Geometric Center of Probe Center)	4 ± 1 mm
Maximum probe angle normal to phantom surface. (Flat Section ELI Phantom)	5° ± 1°
Area Scan Spatial Resolution ΔX, ΔY	12 mm
Zoom Scan Spatial Resolution ΔX, ΔY	5 mm
Zoom Scan Spatial Resolution ΔZ (Uniform Grid)	5 mm
Zoom Scan Volume X, Y, Z	30 mm
Phantom	ELI
Fluid Depth	150 ± 5 mm
An Area Scan with an area extending beyond the device was used to locate the candidate maximas within 2dB of the global maxima.	
A Zoom Scan centered over the peak SAR location(s) determined by the Area Scan was used to determine the 1-gram and 10-gram peak spatial-average SAR	

13.7 Scan Resolution 5GHz to 6GHz

Scan Resolution 5GHz to 6GHz	
Maximum distance from the closest measurement point to phantom surface: (Geometric Center of Probe Center)	4 ± 1 mm
Maximum probe angle normal to phantom surface. (Flat Section ELI Phantom)	5° ± 1°
Area Scan Spatial Resolution ΔX, ΔY	10 mm
Zoom Scan Spatial Resolution ΔX, ΔY	4 mm
Zoom Scan Spatial Resolution ΔZ (Uniform Grid)	2 mm
Zoom Scan Volume X, Y, Z	22 mm
Phantom	ELI
Fluid Depth	100 ± 5 mm
An Area Scan with an area extending beyond the device was used to locate the candidate maximas within 2dB of the global maxima.	
A Zoom Scan centered over the peak SAR location(s) determined by the Area Scan was used to determine the 1-gram and 10-gram peak spatial-average SAR	

14.0 MEASUREMENT UNCERTAINTIES

Table 14.0 Measurement Uncertainty

UNCERTAINTY BUDGET FOR DEVICE EVALUATION (IEEE 1528-2013 Table 9)									
Source of Uncertainty	IEEE 1528 Section	Toler ±%	Prob Dist	Div	c _i	c _i	Stand Unct ±%	Stand Unct ±%	V _i or V _{eff}
Measurement System					(1g)	(10g)	(1g)	(10g)	
EX3DV4 Probe Calibration** (k=1)	E.2.1	6.7	N	1	1	1	6.7	6.7	∞
Axial Isotropy** (k=1)	E.2.2	0.6	R	√3	0.7	0.7	0.2	0.2	∞
Hemispherical Isotropy** (k=1)	E.2.2	3.2	R	√3	0.7	0.7	1.3	1.3	∞
Boundary Effect*	E.2.3	1.0	R	√3	1	1	0.6	0.6	∞
Linearity** (k=1)	E.2.4	0.5	R	√3	1	1	0.3	0.3	∞
System Detection Limits*	E.2.4	1.0	R	√3	1	1	0.6	0.6	∞
Modulation Response** (k=1)	E.2.5	8.3	R	√3	1	1	4.8	4.8	∞
Readout Electronics*	E.2.6	0.3	N	1	1	1	0.3	0.3	∞
Response Time*	E.2.7	0.8	R	√3	1	1	0.5	0.5	∞
Integration Time*	E.2.8	2.6	R	√3	1	1	1.5	1.5	∞
RF Ambient Conditions - Noise	E.6.1	0.0	R	√3	1	1	0.0	0.0	10
RF Ambient Conditions - Reflection	E.6.1	0.0	R	√3	1	1	0.0	0.0	10
Probe Positioner Mechanical Tolerance*	E.6.2	0.0	R	√3	1	1	0.0	0.0	∞
Probe Positioning wrt Phantom Shell*	E.6.3	0.4	R	√3	1	1	0.2	0.2	∞
Post-processing*	E.5	2.0	R	√3	1	1	1.2	1.2	∞
Test Sample Related									
Test Sample Positioning	E.4.2	2.2	N	1	1	1	2.2	2.2	5
Device Holder Uncertainty*	E.4.1	3.6	N	1	1	1	3.6	3.6	∞
SAR Drift Measurement ⁽²⁾	E.2.9	0.0	R	√3	1	1	0.0	0.0	∞
SAR Power Scaling ⁽³⁾	E.6.5	0.0	R	√3	1	1	0.0	0.0	∞
Phantom and Tissue Parameters									
Phantom Uncertainty*	E.3.1	6.1	R	√3	1	1	3.5	3.5	∞
SAR Correction Uncertainty	E.3.2	1.6	N	1	1	0.84	1.6	1.3	∞
Liquid Conductivity (measurement)	E.3.3	5.0	N	1	0.78	0.71	3.9	3.6	10
Liquid Permittivity (measurement)	E.3.3	5.0	N	1	0.23	0.26	1.2	1.3	10
Liquid Conductivity (Temperature)	E.3.2	0.4	R	√3	0.78	0.71	0.2	0.2	10
Liquid Permittivity Temperature)	E.3.2	0.2	R	√3	0.23	0.26	0.0	0.0	10
Effective Degrees of Freedom⁽¹⁾								V_{eff} =	1141
Combined Standard Uncertainty			RSS				11.1	11.0	
Expanded Uncertainty (95% Confidence Interval)			k=2				22.2	21.9	
Measurement Uncertainty Table in accordance with IEEE Standard 1528-2003									

(1) The Effective Degrees of Freedom is > 30

Therefore a coverage factor of k=2 represents an approximate confidence level of 95%.

(2) The SAR Value is compensated for Drift

(3) SAR Power Scaling not Required

* Provided by SPEAG for DASY4

Table 14.1 Calculation of Degrees of Freedom

Calculation of the Degrees and Effective Degrees of Freedom	
$v_i = n - 1$	$v_{\text{eff}} = \frac{u_c^4}{m \sum_{i=1} \frac{c_i^4 u_i^4}{v_i}}$

15.0 FLUID DIELECTRIC PARAMETERS

Table 15.0 Fluid Dielectric Parameters 2450MHz BODY TSL

```

*****
                Aprel Laboratory
                Test Result for UIM Dielectric Parameter
                Fri 17/May/2019 11:56:23
                Freq      Frequency(GHz)
                FCC_eH FCC Bulletin 65 Supplement C ( June 2001) Limits for Head Epsilon
                FCC_sH FCC Bulletin 65 Supplement C (June 2001) Limits for Head Sigma
                FCC_eB FCC Limits for Body Epsilon
                FCC_sB FCC Limits for Body Sigma
                Test_e  Epsilon of UIM
                Test_s  Sigma of UIM
*****

```

Freq	FCC_eB	FCC_sB	Test_e	Test_s
2.3500	52.83	1.85	51.96	1.83
2.3600	52.82	1.86	51.89	1.86
2.3700	52.81	1.87	51.87	1.88
2.3800	52.79	1.88	51.88	1.88
2.3900	52.78	1.89	52.13	1.91
2.4000	52.77	1.90	52.07	1.95
2.4100	52.75	1.91	52.14	1.93
2.4200	52.74	1.92	51.95	1.93
2.4300	52.73	1.93	51.78	1.91
2.4400	52.71	1.94	51.59	1.95
2.4500	52.70	1.95	51.57	1.96
2.4600	52.69	1.96	51.49	1.96
2.4700	52.67	1.98	51.45	1.98
2.4800	52.66	1.99	51.56	1.99
2.4900	52.65	2.01	51.50	2.03
2.5000	52.64	2.02	51.44	2.07
2.5100	52.62	2.04	51.62	2.06
2.5200	52.61	2.05	51.61	2.09
2.5300	52.60	2.06	51.41	2.07
2.5400	52.59	2.08	51.25	2.09
2.5500	52.57	2.09	51.19	2.09

FLUID DIELECTRIC PARAMETERS							
Date:	17 May 2019	Fluid Temp:	23.4	Frequency:	2450MHz	Tissue:	Body
Freq (MHz)	Test_e	Test_s	Target_e	Target_s	Deviation Permittivity	Deviation Conductivity	
2350.0000		51.9600	1.8300	52.8300	1.85	-1.65%	-1.08%
2360.0000		51.8900	1.8600	52.8200	1.86	-1.76%	0.00%
2370.0000		51.8700	1.8800	52.8100	1.87	-1.78%	0.53%
2380.0000		51.8800	1.8800	52.7900	1.88	-1.72%	0.00%
2390.0000		52.1300	1.9100	52.7800	1.89	-1.23%	1.06%
2400.0000		52.0700	1.9500	52.7700	1.90	-1.33%	2.63%
2402.0000	*	52.0840	1.9460	52.7660	1.90	-1.29%	2.31%
2410.0000		52.1400	1.9300	52.7500	1.91	-1.16%	1.05%
2412.0000	*	52.1020	1.9300	52.7480	1.91	-1.22%	0.94%
2420.0000		51.9500	1.9300	52.7400	1.92	-1.50%	0.52%
2430.0000		51.7800	1.9100	52.7300	1.93	-1.80%	-1.04%
2432.0000		51.7420	1.9180	52.7260	1.93	-1.87%	-0.72%
2437.0000	*	51.6470	1.9380	52.7160	1.94	-2.03%	0.05%
2440.0000		51.5900	1.9500	52.7100	1.94	-2.12%	0.52%
2450.0000		51.5700	1.9600	52.7000	1.95	-2.14%	0.51%
2460.0000		51.4900	1.9600	52.6900	1.96	-2.28%	0.00%
2462.0000	*	51.4820	1.9640	52.6860	1.96	-2.29%	0.00%
2467.0000		51.4620	1.9740	52.6760	1.97	-2.30%	0.00%
2470.0000		51.4500	1.9800	52.6700	1.98	-2.32%	0.00%
2480.0000		51.5600	1.9900	52.6600	1.99	-2.09%	0.00%
2490.0000		51.5000	2.0300	52.6500	2.01	-2.18%	1.00%
2500.0000		51.4400	2.0700	52.6400	2.02	-2.28%	2.48%
2510.0000		51.6200	2.0600	52.6200	2.04	-1.90%	0.98%
2520.0000		51.6100	2.0900	52.6100	2.05	-1.90%	1.95%
2530.0000		51.4100	2.0700	52.6000	2.06	-2.26%	0.49%
2540.0000		51.2500	2.0900	52.5900	2.08	-2.55%	0.48%
2550.0000		51.1900	2.0900	52.5700	2.09	-2.63%	0.00%

*Channel Frequency Tested

Table 15.1 Fluid Dielectric Parameters 2450MHz BODY TSL

```

*****
Aprel Laboratory
Test Result for UIM Dielectric Parameter
Tue 21/May/2019 09:41:00
Freq Frequency(GHz)
FCC_eHFCC Bulletin 65 Supplement C ( June 2001) Limits for Head Epsilon
FCC_sHFCC Bulletin 65 Supplement C (June 2001) Limits for Head Sigma
FCC_eB FCC Limits for Body Epsilon
FCC_sB FCC Limits for Body Sigma
Test_e Epsilon of UIM
Test_s Sigma of UIM
*****

```

Freq	FCC_eB	FCC_sB	Test_e	Test_s
2.3500	52.83	1.85	50.82	1.87
2.3600	52.82	1.86	50.70	1.93
2.3700	52.81	1.87	50.81	1.94
2.3800	52.79	1.88	50.86	1.92
2.3900	52.78	1.89	51.06	1.92
2.4000	52.77	1.90	50.94	1.98
2.4100	52.75	1.91	50.88	1.93
2.4200	52.74	1.92	50.83	1.94
2.4300	52.73	1.93	50.51	1.95
2.4400	52.71	1.94	50.42	1.96
2.4500	52.70	1.95	50.44	1.98
2.4600	52.69	1.96	50.31	2.00
2.4700	52.67	1.98	50.40	2.04
2.4800	52.66	1.99	50.39	2.06
2.4900	52.65	2.01	50.39	2.08
2.5000	52.64	2.02	50.51	2.10
2.5100	52.62	2.04	50.74	2.09
2.5200	52.61	2.05	50.47	2.12
2.5300	52.60	2.06	50.33	2.10
2.5400	52.59	2.08	50.20	2.09
2.5500	52.57	2.09	49.99	2.10

FLUID DIELECTRIC PARAMETERS								
Date:	21 May 2019	Fluid Temp:		22.9	Frequency:	2450MHz	Tissue:	Body
Freq (MHz)	Test_e	Test_s	Target_e	Target_s	Deviation Permittivity	Deviation Conductivity		
2350.0000		50.8200	1.8700	52.8300	1.85	-3.80%	1.08%	
2360.0000		50.7000	1.9300	52.8200	1.86	-4.01%	3.76%	
2370.0000		50.8100	1.9400	52.8100	1.87	-3.79%	3.74%	
2380.0000		50.8600	1.9200	52.7900	1.88	-3.66%	2.13%	
2390.0000		51.0600	1.9200	52.7800	1.89	-3.26%	1.59%	
2400.0000		50.9400	1.9800	52.7700	1.90	-3.47%	4.21%	
2402.0000	*	50.9280	1.9700	52.7660	1.90	-3.48%	3.58%	
2410.0000		50.8800	1.9300	52.7500	1.91	-3.55%	1.05%	
2412.0000	*	50.8700	1.9320	52.7480	1.91	-3.56%	1.05%	
2420.0000		50.8300	1.9400	52.7400	1.92	-3.62%	1.04%	
2430.0000		50.5100	1.9500	52.7300	1.93	-4.21%	1.04%	
2432.0000		50.4920	1.9520	52.7260	1.93	-4.24%	1.04%	
2437.0000	*	50.4470	1.9570	52.7160	1.94	-4.30%	1.03%	
2440.0000		50.4200	1.9600	52.7100	1.94	-4.34%	1.03%	
2450.0000		50.4400	1.9800	52.7000	1.95	-4.29%	1.54%	
2460.0000		50.3100	2.0000	52.6900	1.96	-4.52%	2.04%	
2462.0000	*	50.3280	2.0080	52.6860	1.96	-4.48%	2.24%	
2467.0000		50.3730	2.0280	52.6760	1.97	-4.37%	2.74%	
2470.0000		50.4000	2.0400	52.6700	1.98	-4.31%	3.03%	
2480.0000		50.3900	2.0600	52.6600	1.99	-4.31%	3.52%	
2490.0000		50.3900	2.0800	52.6500	2.01	-4.29%	3.48%	
2500.0000		50.5100	2.1000	52.6400	2.02	-4.05%	3.96%	
2510.0000		50.7400	2.0900	52.6200	2.04	-3.57%	2.45%	
2520.0000		50.4700	2.1200	52.6100	2.05	-4.07%	3.41%	
2530.0000		50.3300	2.1000	52.6000	2.06	-4.32%	1.94%	
2540.0000		50.2000	2.0900	52.5900	2.08	-4.54%	0.48%	
2550.0000		49.9900	2.1000	52.5700	2.09	-4.91%	0.48%	

*Channel Frequency Tested

Table 15.2 Fluid Dielectric Parameters 2450MHz BODY TSL

```

*****
Aprel Laboratory
Test Result for UIM Dielectric Parameter
Mon 03/Jun/2019 10:59:04
Freq      Frequency(GHz)
FCC_eH FCC Bulletin 65 Supplement C ( June 2001) Limits for Head Epsilon
FCC_sH FCC Bulletin 65 Supplement C (June 2001) Limits for Head Sigma
FCC_eB FCC Limits for Body Epsilon
FCC_sB FCC Limits for Body Sigma
Test_e Epsilon of UIM
Test_s Sigma of UIM
*****

```

Freq	FCC_eB	FCC_sB	Test_e	Test_s
2.3500	52.83	1.85	52.51	1.74
2.3600	52.82	1.86	52.29	1.78
2.3700	52.81	1.87	52.26	1.74
2.3800	52.79	1.88	52.27	1.76
2.3900	52.78	1.89	52.13	1.78
2.4000	52.77	1.90	52.15	1.81
2.4100	52.75	1.91	52.13	1.83
2.4200	52.74	1.92	51.92	1.86
2.4300	52.73	1.93	51.84	1.86
2.4400	52.71	1.94	51.93	1.89
2.4500	52.70	1.95	51.93	1.87
2.4600	52.69	1.96	51.94	1.89
2.4700	52.67	1.98	52.04	1.88
2.4800	52.66	1.99	52.07	1.91
2.4900	52.65	2.01	51.76	1.90
2.5000	52.64	2.02	51.73	1.96
2.5100	52.62	2.04	51.64	1.95
2.5200	52.61	2.05	51.58	2.00
2.5300	52.60	2.06	51.63	2.02
2.5400	52.59	2.08	51.69	2.05
2.5500	52.57	2.09	51.51	2.05

FLUID DIELECTRIC PARAMETERS							
Date:	3 Jun 2019	Fluid Temp:	23.7	Frequency:	2450MHz	Tissue:	Body
Freq (MHz)	Test_e	Test_s	Target_e	Target_s	Deviation Permittivity	Deviation Conductivity	
2350.0000		52.5100	1.7400	52.8300	1.85	-0.61%	-5.95%
2360.0000		52.2900	1.7800	52.8200	1.86	-1.00%	-4.30%
2370.0000		52.2600	1.7400	52.8100	1.87	-1.04%	-6.95%
2380.0000		52.2700	1.7600	52.7900	1.88	-0.99%	-6.38%
2390.0000		52.1300	1.7800	52.7800	1.89	-1.23%	-5.82%
2400.0000		52.1500	1.8100	52.7700	1.90	-1.17%	-4.74%
2402.0000	*	52.1460	1.8140	52.7660	1.90	-1.17%	-4.63%
2410.0000		52.1300	1.8300	52.7500	1.91	-1.18%	-4.19%
2412.0000	*	52.0880	1.8360	52.7480	1.91	-1.25%	-3.97%
2420.0000		51.9200	1.8600	52.7400	1.92	-1.55%	-3.12%
2430.0000		51.8400	1.8600	52.7300	1.93	-1.69%	-3.63%
2437.0000	*	51.9030	1.8810	52.7160	1.94	-1.54%	-2.89%
2440.0000		51.9300	1.8900	52.7100	1.94	-1.48%	-2.58%
2450.0000		51.9300	1.8700	52.7000	1.95	-1.46%	-4.10%
2460.0000		51.9400	1.8900	52.6900	1.96	-1.42%	-3.57%
2462.0000	*	51.9600	1.8880	52.6860	1.96	-1.38%	-3.87%
2467.0000		52.0100	1.8830	52.6760	1.97	-1.26%	-4.61%
2470.0000		52.0400	1.8800	52.6700	1.98	-1.20%	-5.05%
2480.0000		52.0700	1.9100	52.6600	1.99	-1.12%	-4.02%
2490.0000		51.7600	1.9000	52.6500	2.01	-1.69%	-5.47%
2500.0000		51.7300	1.9600	52.6400	2.02	-1.73%	-2.97%
2510.0000		51.6400	1.9500	52.6200	2.04	-1.86%	-4.41%
2520.0000		51.5800	2.0000	52.6100	2.05	-1.96%	-2.44%
2530.0000		51.6300	2.0200	52.6000	2.06	-1.84%	-1.94%
2540.0000		51.6900	2.0500	52.5900	2.08	-1.71%	-1.44%
2550.0000		51.5100	2.0500	52.5700	2.09	-2.02%	-1.91%

*Channel Frequency Tested

16.0 SYSTEM VERIFICATION TEST RESULTS

Table 16.0 System Verification Results 2450MHz BODY TSL

System Verification Test Results					
Date		Frequency (MHz)	Validation Source		
			P/N		S/N
17 May 2019		2450	D2450V2		825
Fluid Type	Fluid Temp °C	Ambient Temp °C	Ambient Humidity (%)	Forward Power (mW)	Source Spacing (mm)
Body	23.4	23	29%	250	10
Fluid Parameters					
Permittivity			Conductivity		
Measured	Target	Deviation	Measured	Target	Deviation
51.57	52.70	-2.14%	1.96	1.95	0.51%
Measured SAR					
1 gram			10 gram		
Measured	Target	Deviation	Measured	Target	Deviation
12.70	12.80	-0.78%	5.86	6.05	-3.14%
Measured SAR Normalized to 1.0W					
1 gram			10 gram		
Normalized	Target	Deviation	Normalized	Target	Deviation
50.80	50.40	0.79%	23.44	23.70	-1.10%
<p>Prior to the SAR evaluations, system checks were performed on the planar section of the phantom and a SPEAG validation dipole in accordance with the procedures described in IEEE 1528-2013, FCC KDB 846224 and IEC 62209-1.</p> <p>The dielectric parameters of the simulated tissue mixture were measured prior to the system performance check using a Dielectric Probe Kit and a Network Analyzer.</p> <p>The forward power was applied to the dipole and the system was verified to a tolerance of +10% from the system manufacturer's dipole calibration target SAR value.</p> <p>The forward power applied was same forward power applied by the calibration lab during the calibration of this validation source.</p>					

Table 16.1 System Verification Results 2450MHz BODY TSL

System Verification Test Results					
Date		Frequency (MHz)	Validation Source		
			P/N		S/N
21 May 2019		2450	D2450V2		825
Fluid Type	Fluid Temp °C	Ambient Temp °C	Ambient Humidity (%)	Forward Power (mW)	Source Spacing (mm)
Body	22.9	23	27%	250	10
Fluid Parameters					
Permittivity			Conductivity		
Measured	Target	Deviation	Measured	Target	Deviation
50.44	52.70	-4.29%	1.98	1.95	1.54%
Measured SAR					
1 gram			10 gram		
Measured	Target	Deviation	Measured	Target	Deviation
13.00	12.80	1.56%	5.98	6.05	-1.16%
Measured SAR Normalized to 1.0W					
1 gram			10 gram		
Normalized	Target	Deviation	Normalized	Target	Deviation
52.00	50.40	3.17%	23.92	23.70	0.93%
<p>Prior to the SAR evaluations, system checks were performed on the planar section of the phantom and a SPEAG validation dipole in accordance with the procedures described in IEEE 1528-2013, FCC KDB 846224 and IEC 62209-1.</p> <p>The dielectric parameters of the simulated tissue mixture were measured prior to the system performance check using a Dielectric Probe Kit and a Network Analyzer.</p> <p>The forward power was applied to the dipole and the system was verified to a tolerance of +10% from the system manufacturer's dipole calibration target SAR value.</p> <p>The forward power applied was same forward power applied by the calibration lab during the calibration of this validation source.</p>					

Table 16.2 System Verification Results 2450MHz BODY TSL

System Verification Test Results					
Date		Frequency (MHz)	Validation Source		
			P/N		S/N
03 Jun 2019		2450	D2450V2		825
Fluid Type	Fluid Temp °C	Ambient Temp °C	Ambient Humidity (%)	Forward Power (mW)	Source Spacing (mm)
Body	23.7	24	25%	250	10
Fluid Parameters					
Permittivity			Conductivity		
Measured	Target	Deviation	Measured	Target	Deviation
51.93	52.70	-1.46%	1.87	1.95	-4.10%
Measured SAR					
1 gram			10 gram		
Measured	Target	Deviation	Measured	Target	Deviation
13.00	12.80	1.56%	6.04	6.05	-0.17%
Measured SAR Normalized to 1.0W					
1 gram			10 gram		
Normalized	Target	Deviation	Normalized	Target	Deviation
52.00	50.40	3.17%	24.16	23.70	1.94%
<p>Prior to the SAR evaluations, system checks were performed on the planar section of the phantom and a SPEAG validation dipole in accordance with the procedures described in IEEE 1528-2013, FCC KDB 846224 and IEC 62209-1.</p> <p>The dielectric parameters of the simulated tissue mixture were measured prior to the system performance check using a Dielectric Probe Kit and a Network Analyzer.</p> <p>The forward power was applied to the dipole and the system was verified to a tolerance of +10% from the system manufacturer's dipole calibration target SAR value.</p> <p>The forward power applied was same forward power applied by the calibration lab during the calibration of this validation source.</p>					

17.0 SYSTEM VALIDATION SUMMARY

Table 17.0 System Validation Summary

System Validation Summary											
Frequency (MHz)	Validation Date	Probe Model	Probe S/N	Validation Source	Source S/N	Tissue	Tissue Dielectrics		Validation Results		
							Permittivity	Conductivity	Sensitivity	Linearity	Isotropy
30	24-Sep-18	EX3DV4	3600	CLA-30	1005	Head	50.15	0.72	Pass	Pass	Pass
150	27-Jun-18	EX3DV4	3600	CLA-150	4007	Body	66.48	0.79	Pass	Pass	Pass
150	11-Jul-18	EX3DV4	3600	CLA-150	4007	Head	51.51	0.81	Pass	Pass	Pass
450	08-May-17	EX3DV4	3600	D450V3	1068	Body	54.65	0.95	Pass	Pass	Pass
450	16-May-17	EX3DV4	3600	D450V3	1068	Head	43.70	0.83	Pass	Pass	Pass
835	03-May-18	EX3DV4	3600	D835V2	4d075	Body	53.31	1.00	Pass	Pass	Pass
835	19-May-17	EX3DV4	3600	D835V2	4d075	Head	42.01	0.89	Pass	Pass	Pass
900	08-May-18	EX3DV4	3600	D900V2	045	Body	54.46	1.10	Pass	Pass	Pass
900	02-Aug-17	EX3DV4	3600	D900V2	045	Head	39.10	0.93	Pass	Pass	Pass
1640	06-May-18	EX3DV4	3600	1620-S-2	207-00102	Body	39.87	1.27	Pass	Pass	Pass
1640	07-May-18	EX3DV4	3600	1620-S-2	207-00102	Head	39.87	1.27	Pass	Pass	Pass
1800	21-Jul-17	EX3DV4	3600	D1800V2	247	Body	54.77	1.53	Pass	Pass	Pass
1800	18-Jul-17	EX3DV4	3600	D1800V2	247	Head	40.70	1.33	Pass	Pass	Pass
2450	05-Apr-19	EX3DV4	3600	D2450V2	825	Body	51.55	1.90	Pass	Pass	Pass
2450	02-Apr-19	EX3DV4	3600	D2450V2	825	Head	36.58	1.85	Pass	Pass	Pass
5250	24-Jul-18	EX3DV4	3600	D5GHzV2	1031	Body	46.42	5.69	Pass	Pass	Pass
5250	24-Jul-18	EX3DV4	3600	D5GHzV2	1031	Head	35.96	4.99	Pass	Pass	Pass
5750	25-Jul-18	EX3DV4	3600	D5GHzV2	1031	Body	47.10	5.60	Pass	Pass	Pass

18.0 MEASUREMENT SYSTEM SPECIFICATIONS

Table 18.0 Measurement System Specifications

Measurement System Specification	
Specifications	
Positioner	Stäubli Unimation Corp. Robot Model: TX90XL
Repeatability	+/- 0.035 mm
No. of axis	6.0
Data Acquisition Electronic (DAE) System	
Cell Controller	
Processor	Intel(R) Core(TM) i7-7700
Clock Speed	3.60 GHz
Operating System	Windows 10 Professional
Data Converter	
Features	Signal Amplifier, multiplexer, A/D converter, and control logic
Software	Measurement Software: DASY6, V 6.4.0.12171 / DASY52 V52.10.0.1446
	Postprocessing Software: SEMCAD X, V14.6.10(Deployment Build)
Connecting Lines	Optical downlink for data and status info., Optical uplink for commands and clock
DASY Measurement Server	
Function	Real-time data evaluation for field measurements and surface detection
Hardware	Intel ULV Celeron CPU 400 MHz; 128 MB chip disk; 128 MB RAM
Connections	COM1, COM2, DAE, Robot, Ethernet, Service Interface
E-Field Probe	
Model	EX3DV4
Serial No.	3600
Construction	Triangular core fiber optic detection system
Frequency	10 MHz to 6 GHz
Linearity	±0.2 dB (30 MHz to 3 GHz)
Phantom	
Type	SAM Phantom
Shell Material	Fiberglass
Thickness	2mm +/- .2mm
Volume	> 30 Liter

Measurement System Specification		
Probe Specification		
Construction:	Symmetrical design with triangular core; Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, glycol)	
Calibration:	In air from 10 MHz to 2.5 GHz In head simulating tissue at frequencies of 900 MHz and 1.8 GHz (accuracy $\pm 8\%$)	
Frequency:	10 MHz to > 6 GHz; Linearity: ± 0.2 dB (30 MHz to 3 GHz)	
Directivity:	± 0.2 dB in head tissue (rotation around probe axis) ± 0.4 dB in head tissue (rotation normal to probe axis)	
Dynamic Range:	5 μ W/g to > 100 mW/g; Linearity: ± 0.2 dB	
Surface Detect:	± 0.2 mm repeatability in air and clear liquids over diffuse reflecting surfaces	
Dimensions:	Overall length: 330 mm; Tip length: 16 mm; Body diameter: 12 mm; Tip diameter: 6.8 mm Distance from probe tip to dipole centers: 2.7 mm	
Application:	General dosimetry up to 3 GHz; Compliance tests of mobile phone	
Phantom Specification		
<p>The SAM V5.0 phantom is an elliptical planar fiberglass shell phantom with a shell thickness of 2.0mm +/- .2mm at the planar area. This phantom conforms to OET Bulletin 65, Supplement C, IEEE 1528-2013, IEC 62209-1 and IEC 62209-2.</p>		
		SAM Phantom
Device Positioner Specification		
<p>The DASY device positioner has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of 65°. The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections.</p>		
		Device Positioner

19.0 TEST EQUIPMENT LIST

Table 19.0 Equipment List and Calibration

Test Equipment List				
DESCRIPTION	ASSET NO.	SERIAL NO.	DATE CALIBRATED	CALIBRATION DUE
Schmid & Partner DASY 6 System	-	-	-	-
-DASY Measurement Server	00158	1078	CNR	CNR
-Robot	00046	599396-01	CNR	CNR
-DAE4	00019	353	19-Mar-19	19-Mar-20
-EX3DV4 E-Field Probe	00213	3600	26-Mar-19	26-Mar-20
-CLA 30 Validation Dipole	00300	1005	23-Nov-17	23-Nov-20
-CLA 150 Validation Dipole	00251	4007	27-Apr-17	27-Apr-20
-D450V3 Validation Dipole	00221	1068	23-Apr-18	23-Apr-21
-D750V3 Validation Dipole	00238	1061	19-Mar-19	19-Mar-22
-D835V2 Validation Dipole	00217	4D075	20-Apr-18	20-Apr-21
-D900V2 Validation Dipole	00020	54	24-Apr-17	24-Apr-20
-D1640/1620-S-2 Validation Dipole	00299	207-00102	07-Nov-17	07-Nov-20
-D2450V2 Validation Dipole*	00219	825	24-Apr-18	24-Apr-21
-D5GHzV2 Validation Dipole	00126	1031	26-Apr-18	26-Apr-21
ELI Phantom	00247	1234	CNR	CNR
SAM Phantom	00154	1033	CNR	CNR
HP 85070C Dielectric Probe Kit	00033	none	CNR	CNR
Gigatronics 8652A Power Meter	00007	1835801	26-Mar-19	26-Mar-22
Gigatronics 80701A Power Sensor	00248	1833687	26-Mar-19	26-Mar-22
Gigatronics 80334A Power Sensor	00237	1837001	26-Mar-19	26-Mar-22
HP 8753ET Network Analyzer	00134	US39170292	29-Dec-17	29-Dec-20
Rohde & Schwarz SMR20 Signal Generator	00006	100104	29-May-17	29-May-20
Amplifier Research 10W1000C Power Amplifier	00041	27887	CNR	CNR
Amplifier Research 5S1G4 Power Amplifier	00106	26235	CNR	CNR
Narda Directional Coupler 3020A	00064	-	CNR	CNR
Traceable VWR Thermometer	00291	-	19-Nov-16	19-Nov-19
Traceable VWR Jumbo Humidity/Thermometer	00295	170120555	17-Feb-17	17-Feb-20
DC-18G 10W 30db Attenuator	00102	-	COU	COU
R&S FSP40 Spectrum Analyzer	00241	100500	15-May-18	15-May-21
RF Cable-SMA	00311	-	CNR	CNR
HP Calibration Kit	00145	-	10-Feb-17	10-Feb-20

CNR = Calibration Not Required

SB=Stand By

COU = Calibrate on Use

* Per KDB 865664 3.2.2; Supporting documentation is included in the report for validation dipoles exceeding the recommended annual calibration cycle.

When applicable, reference Appendix F

20.0 FLUID COMPOSITION

Table 20.0 Fluid Composition 2450MHz BODY TSL

Tissue Simulating Liquid (TSL) Composition				
Component by Percent Weight				
Water	Glycol	Salt ⁽¹⁾	HEC ⁽²⁾	Bacteriacide ⁽³⁾
69.98	30.0	0.02	0.0	0.0

(1) Non-Iodized

(2) HydroxyEthyl-Cellulose: Sigma-Aldrich P/N 54290-500g

(3) Dow Chemical Dowicil 75 Antimicrobial Preservative

APPENDIX A – SYSTEM VERIFICATION PLOTS

Date/Time: 5/17/2019 12:18:49 PM

Test Laboratory: Celltech Labs

SPC-2450B May 17 2019

DUT: Dipole 2450 MHz D2450V2; Type: D2450V2; Serial: D2450V2 - SN:825

Communication System: UID 0, CW (0); Communication System Band: FullSpan (0.0 - 6000.0 MHz); Frequency: 2450 MHz; Communication System PAR: 0 dB; PMF: 1

Medium: TSL_2450B[17MY19]

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.96$ S/m; $\epsilon_r = 51.57$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3600; ConvF(6.49, 6.49, 6.49); Calibrated: 3/26/2019, ConvF(6.49, 6.49, 6.49); Calibrated: 3/26/2019, ConvF(6.49, 6.49, 6.49); Calibrated: 3/26/2019;
 - Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -1.5, 31.0, 151.0$
- Electronics: DAE4 Sn353; Calibrated: 3/19/2019
- Phantom: Twin-SAM V4.0 (30deg probe tilt); Type: QD 000 P40 CC;
- DASYS2 52.10.1(1476);

Frequency: 2450 MHz

SPC/SPC 2450B Input=250mW, Target=12.8W/kg/Area Scan (4x9x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 13.0 W/kg

SPC/SPC 2450B Input=250mW, Target=12.8W/kg/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 78.97 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 25.9 W/kg


SAR(1 g) = 12.7 W/kg; SAR(10 g) = 5.86 W/kg


Maximum value of SAR (measured) = 14.6 W/kg

SPC/SPC 2450B Input=250mW, Target=12.8W/kg/Z Scan (1x1x22): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Penetration depth = 8.042 (7.818, 8.085) [mm]

Maximum value of SAR (interpolated) = 19.5 W/kg

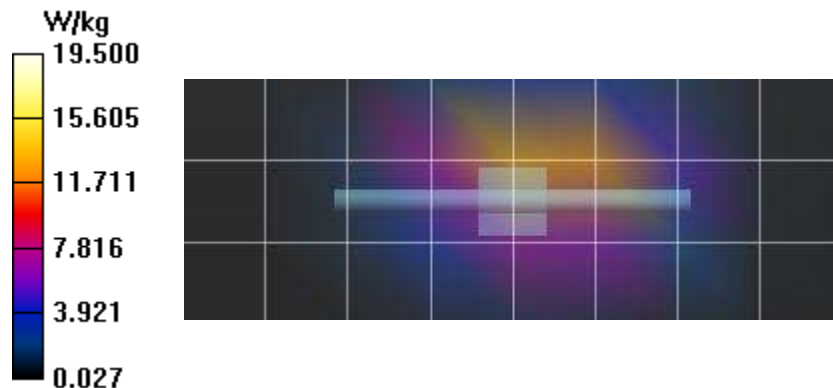

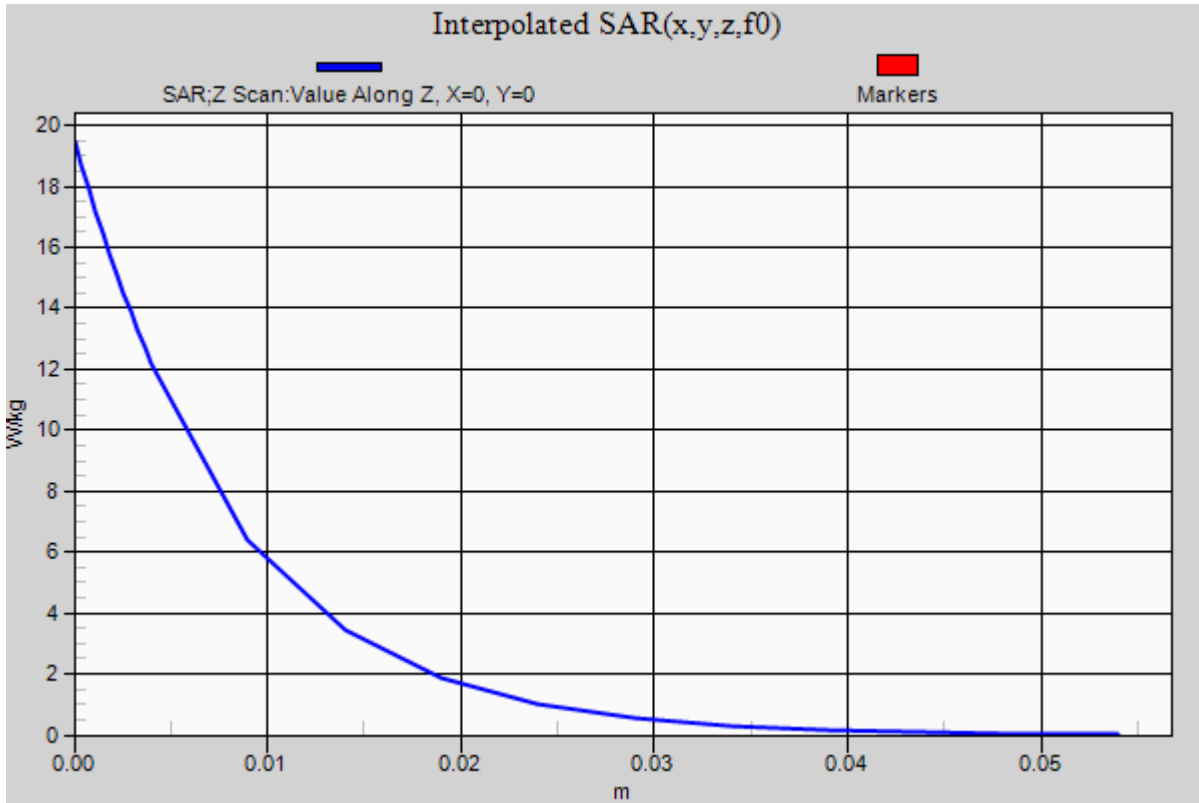

Date/Time: 5/21/2019 10:13:34 AM

Test Laboratory: Celltech Labs

SPC-2450B May 21 2019

DUT: Dipole 2450 MHz D2450V2; Type: D2450V2; Serial: D2450V2 - SN:825

Communication System: UID 0, CW (0); Communication System Band: FullSpan (0.0 - 6000.0 MHz); Frequency: 2450 MHz; Communication System PAR: 0 dB; PMF: 1

Medium: TSL_2450B[21MY19]
 Medium parameters used: $f = 2450$ MHz; $\sigma = 1.98$ S/m; $\epsilon_r = 50.44$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:


- Probe: EX3DV4 - SN3600; ConvF(6.49, 6.49, 6.49); Calibrated: 3/26/2019, ConvF(6.49, 6.49, 6.49); Calibrated: 3/26/2019, ConvF(6.49, 6.49, 6.49); Calibrated: 3/26/2019;
 - Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -1.5, 31.0, 151.0$
- Electronics: DAE4 Sn353; Calibrated: 3/19/2019
- Phantom: Twin-SAM V4.0 (30deg probe tilt); Type: QD 000 P40 CC;
- DASYS2 52.10.1(1476);


Frequency: 2450 MHz

SPC/SPC 2450B Input=250mW, Target=12.8W/kg/Area Scan (4x9x1): Measurement grid: dx=12mm, dy=12mm
 Maximum value of SAR (measured) = 12.7 W/kg

SPC/SPC 2450B Input=250mW, Target=12.8W/kg/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 85.07 V/m; Power Drift = 0.01 dB
 Peak SAR (extrapolated) = 26.9 W/kg
SAR(1 g) = 13 W/kg; SAR(10 g) = 5.98 W/kg
 Maximum value of SAR (measured) = 14.8 W/kg

SPC/SPC 2450B Input=250mW, Target=12.8W/kg/Z Scan (1x1x22): Measurement grid: dx=20mm, dy=20mm, dz=5mm
 Penetration depth = 7.634 (7.314, 7.783) [mm]
 Maximum value of SAR (interpolated) = 23.5 W/kg

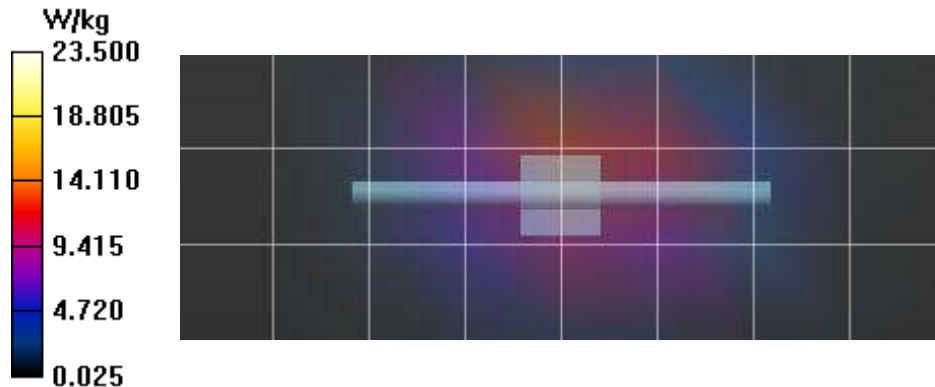

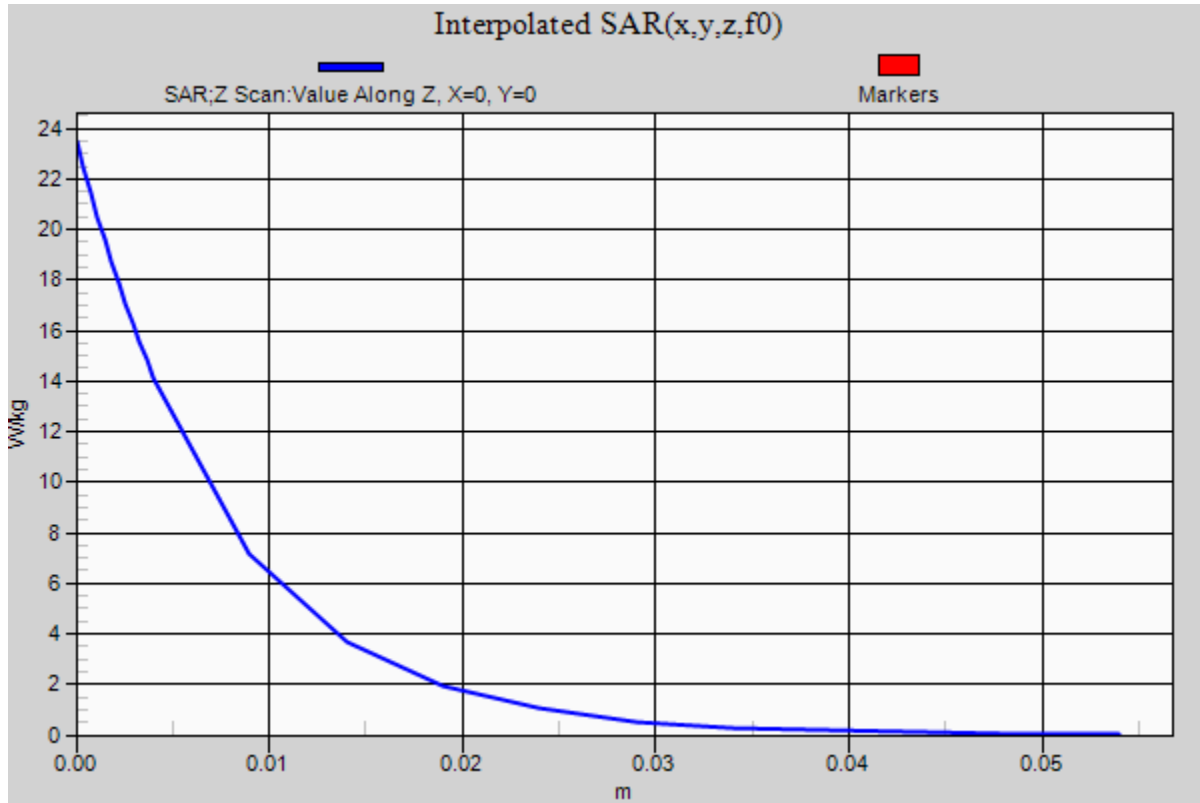

Date/Time: 6/3/2019 11:44:04 AM

Test Laboratory: Celltech Labs

SPC-2450B Jun 03 2019

DUT: Dipole 2450 MHz D2450V2; Type: D2450V2; Serial: D2450V2 - SN:825

Communication System: UID 0, CW (0); Communication System Band: FullSpan (0.0 - 6000.0 MHz); Frequency: 2450 MHz; Communication System PAR: 0 dB; PMF: 1

Medium: TSL_2450B[03JN19]
 Medium parameters used: $f = 2450$ MHz; $\sigma = 1.87$ S/m; $\epsilon_r = 51.93$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section
 Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2011)


DASY Configuration:


- Probe: EX3DV4 - SN3600; ConvF(6.49, 6.49, 6.49); Calibrated: 3/26/2019, ConvF(6.49, 6.49, 6.49); Calibrated: 3/26/2019, ConvF(6.49, 6.49, 6.49); Calibrated: 3/26/2019;
 - Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -1.5, 31.0, 151.0$
- Electronics: DAE4 Sn353; Calibrated: 3/19/2019
- Phantom: Twin-SAM V4.0 (30deg probe tilt); Type: QD 000 P40 CC;
- DASYS52 52.10.1(1476); **Frequency: 2450 MHz**

SPC/SPC 2450B Input=250mW, Target=12.8W/kg/Area Scan (4x9x1): Measurement grid: dx=12mm, dy=12mm
 Maximum value of SAR (measured) = 14.3 W/kg

SPC/SPC 2450B Input=250mW, Target=12.8W/kg/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 82.89 V/m; Power Drift = 0.04 dB
 Peak SAR (extrapolated) = 26.6 W/kg
SAR(1 g) = 13 W/kg; SAR(10 g) = 6.04 W/kg
 Maximum value of SAR (measured) = 14.8 W/kg

SPC/SPC 2450B Input=250mW, Target=12.8W/kg/Z Scan (1x1x22): Measurement grid: dx=20mm, dy=20mm, dz=5mm
 Penetration depth = 8.055 (7.876, 8.117) [mm]
 Maximum value of SAR (interpolated) = 20.0 W/kg

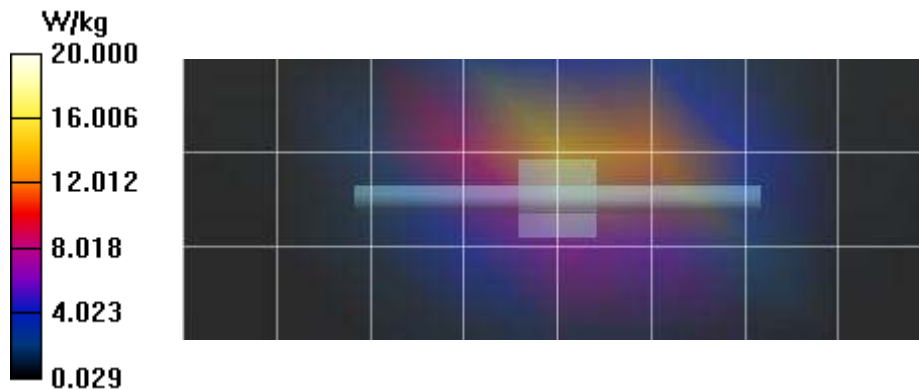

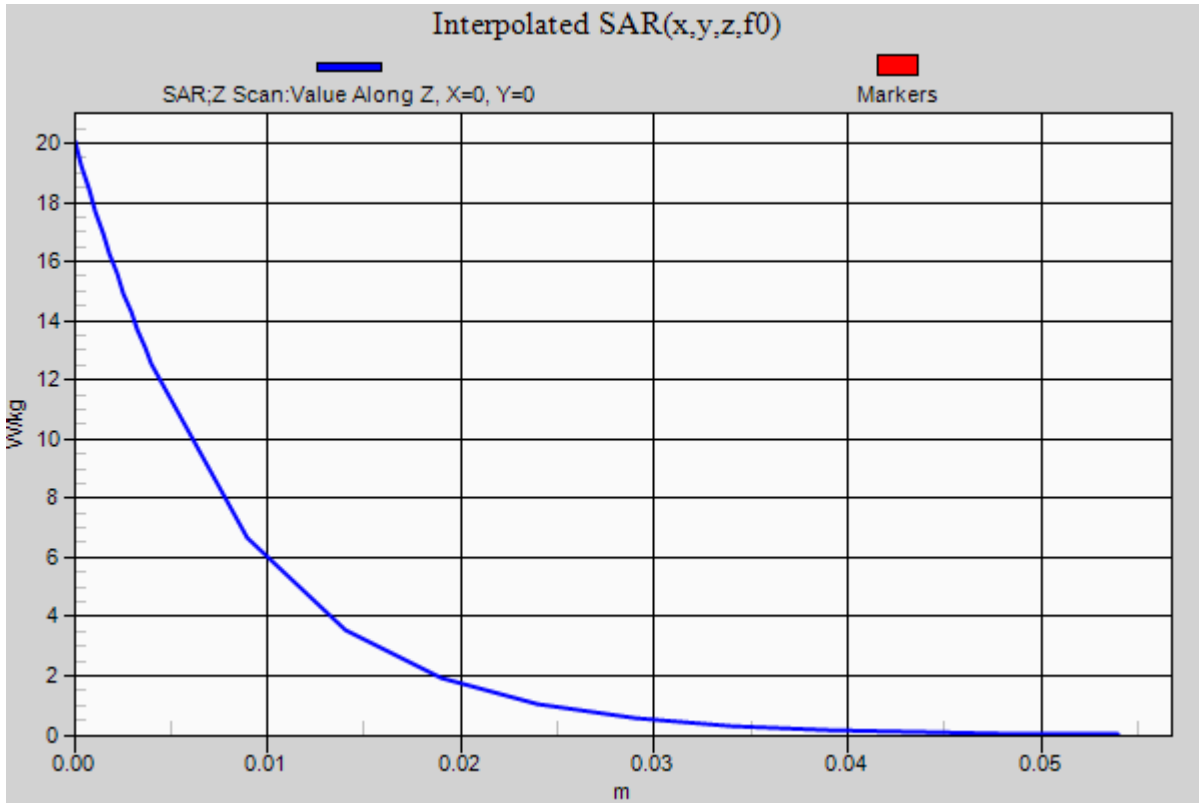

APPENDIX B – MEASUREMENT PLOTS OF MAXIMUM MEASURED SAR

Plot B3

Date/Time: 5/21/2019 11:07:53 AM

Test Laboratory: Celltech Labs

Garmin A03645-2450B May 21 2019

DUT: A03645; Type: Sports Watch

Communication System: UID 10605 - AAB, IEEE 802.11n (HT Mixed, 40MHz, MCS6); Communication System Band: WLAN 2.4GHz (2412.0 - 2484.0 MHz); Frequency: 2412 MHz; Communication System PAR: 8.97 dB; PMF: 1.07275

Medium: TSL_2450B[21MY19]

Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.932$ S/m; $\epsilon_r = 50.87$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3600; ConvF(6.49, 6.49, 6.49); Calibrated: 3/26/2019, ConvF(6.49, 6.49, 6.49); Calibrated: 3/26/2019, ConvF(6.49, 6.49, 6.49); Calibrated: 3/26/2019;
 - Modulation Compensation: PMR for UID 10605 - AAB, Calibrated: 3/26/2019
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -1.5, 31.0, 151.0$
- Electronics: DAE4 Sn353; Calibrated: 3/19/2019
- Phantom: Twin-SAM V4.0 (30deg probe tilt); Type: QD 000 P40 CC;
- DASYS2 52.10.1(1476);

Frequency: 2412 MHz

2450B/B3 A03645, Body-Front, 2412 MHz, Silicone Band-WIFI/Area Scan (8x7x1): Measurement grid: dx=12mm, dy=12mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.715 W/kg

2450B/B3 A03645, Body-Front, 2412 MHz, Silicone Band-WIFI/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.69 V/m; Power Drift = -0.53 dB

Peak SAR (extrapolated) = 1.13 W/kg

SAR(1 g) = 0.649 W/kg; SAR(10 g) = 0.306 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)



Maximum value of SAR (measured) = 0.763 W/kg

2450B/B3 A03645, Body-Front, 2412 MHz, Silicone Band-WIFI/Z Scan (1x1x22): Measurement grid: dx=20mm, dy=20mm, dz=5mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Penetration depth = 8.126 (8.262, 8.519) [mm]

Maximum value of SAR (interpolated) = 0.699 W/kg

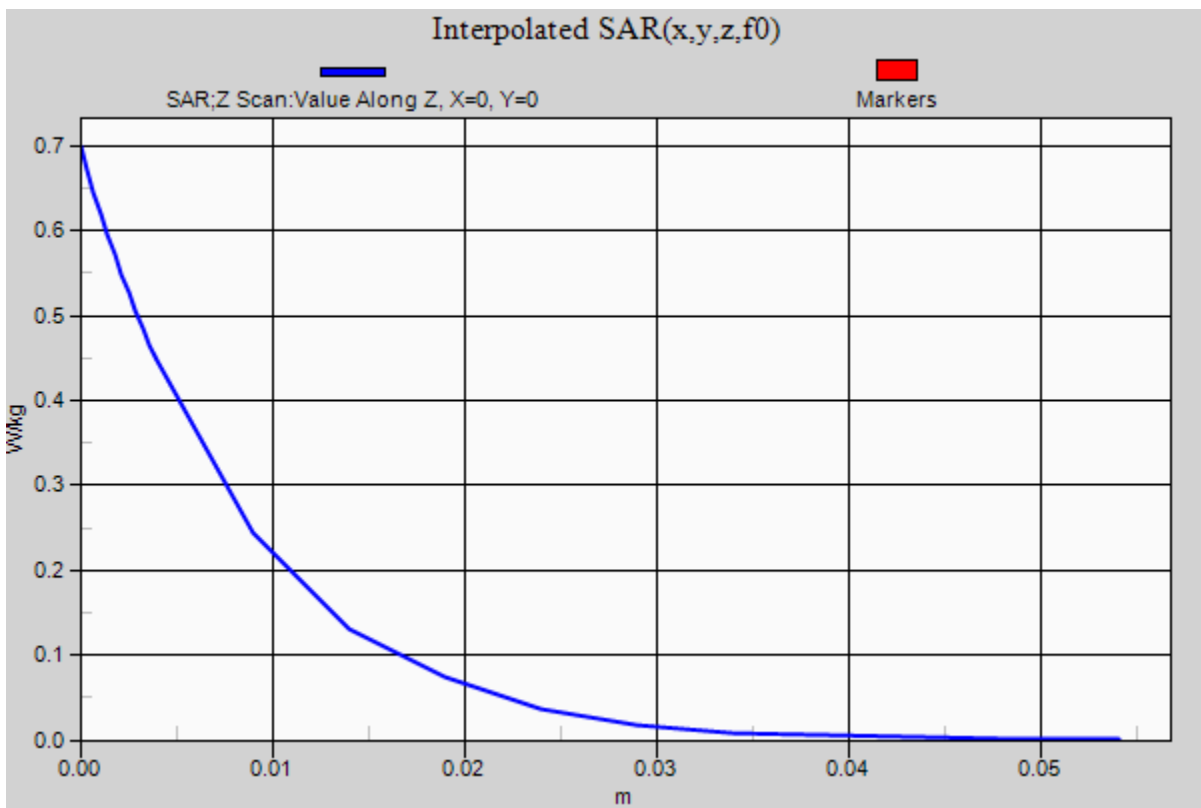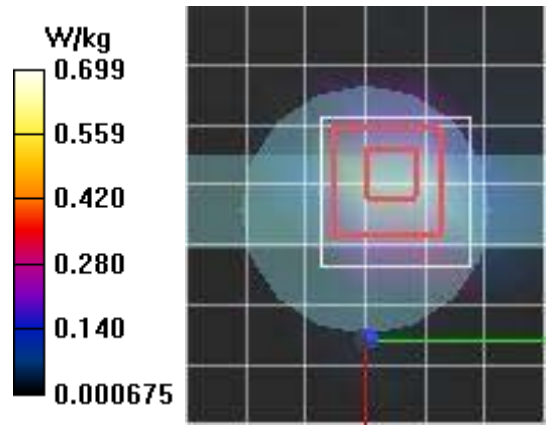

Plot B5

Date/Time: 6/3/2019 12:21:14 PM

Test Laboratory: Celltech Labs

Garmin A03645-2450B Jun 03 2019

DUT: A03645; Type: Sports Watch;

Communication System: UID 10030 - CAA, IEEE 802.15.1 Bluetooth (GFSK, DH1); Communication System Band: ISM 2.4 GHz Band (2400.0 - 2483.5 MHz); Frequency: 2402 MHz; Communication System PAR: 5.3 dB; PMF: 1.83865

Medium: TSL_2450B[03JN19]

Medium parameters used (interpolated): $f = 2402$ MHz; $\sigma = 1.814$ S/m; $\epsilon_r = 52.146$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3600; ConvF(6.49, 6.49, 6.49); Calibrated: 3/26/2019, ConvF(6.49, 6.49, 6.49); Calibrated: 3/26/2019, ConvF(6.49, 6.49, 6.49);
 - Modulation Compensation: PMR for UID 10030 - CAA, Calibrated: 3/26/2019
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -1.5, 31.0, 151.0$
- Electronics: DAE4 Sn353; Calibrated: 3/19/2019
- Phantom: Twin-SAM V4.0 (30deg probe tilt); Type: QD 000 P40 CC;
- DASYS2 52.10.1(1476);

Frequency: 2402 MHz

2450B/B5 A03645, Body-Front, 2402 MHz, Silicone Band-BT 2/Area Scan (8x7x1): Measurement grid: dx=12mm, dy=12mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.01 W/kg

2450B/B5 A03645, Body-Front, 2402 MHz, Silicone Band-BT 2/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.86 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 2.05 W/kg

SAR(1 g) = 1.17 W/kg; SAR(10 g) = 0.533 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.33 W/kg

2450B/B5 A03645, Body-Front, 2402 MHz, Silicone Band-BT 2/Z Scan (1x1x19): Measurement grid: dx=20mm, dy=20mm, dz=20mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Penetration depth = n/a (n/a, 10.39) [mm]

Maximum value of SAR (interpolated) = 1.65 W/kg

