

FCC/ISED Test Report

Prepared for: Garmin International Inc.

Address: 1200 E. 151st Street
Olathe, Kansas, 66062, USA

Product: A03645

Test Report No: R20181219-20-11B

Approved by:



Nic S. Johnson, NCE


Technical Manager

iNARTE Certified EMC Engineer #EMC-003337-NE

DATE: 13 August 2019

Total Pages: 45

The Nebraska Center for Excellence in Electronics (NCEE) authorizes the above named company to reproduce this report provided it is reproduced in its entirety for use by the company's employees only. Any use that a third party makes of this report, or any reliance on or decisions made based on it, are the responsibility of such third parties. NCEE accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report. This report applies only to the items tested.

| | | | | |
|--|----------------|-----------------|-----|---|
|  | Report Number: | R20181219-20-11 | Rev | B |
| | Prepared for: | Garmin | | |

REVISION PAGE

| Rev. No. | Date | Description |
|----------|----------------|--|
| 0 | 20 June 2019 | Original – NJohnson Prepared by KVepuri/CFarrington/FLane |
| A | 15 July 2019 | Includes NCEE Labs test report R20181219-20-11 and its amendment in full. -NJ |
| B | 13 August 2019 | Includes NCEE Labs test report R20181219-20-11A and its amendment in full. -NJ |



| | | | |
|----------------|-----------------|-----|---|
| Report Number: | R20181219-20-11 | Rev | B |
| Prepared for: | Garmin | | |

CONTENTS

| | |
|---|-----------|
| Revision Page | 2 |
| 1.0 Summary of test results | 4 |
| 2.0 EUT Description | 5 |
| 2.1 Equipment under test | 5 |
| 2.2 Description of test modes | 6 |
| 2.3 Description of support units | 6 |
| 3.0 Laboratory description..... | 7 |
| 3.1 Laboratory description..... | 7 |
| 3.2 Test personnel..... | 7 |
| 3.3 Test equipment..... | 8 |
| 4.0 Detailed results..... | 9 |
| 4.1 Duty Cycle | 9 |
| 4.2 Peak Output Power | 10 |
| 4.3 Bandwidth..... | 17 |
| 4.4 Radiated emissions..... | 25 |
| 4.5 Band edges | 33 |
| 4.6 Conducted AC Mains Emissions | 39 |
| Appendix A: Sample Calculation | 42 |
| Appendix B – Measurement Uncertainty | 44 |
| REPORT END..... | 45 |



| | | | |
|----------------|-----------------|-----|---|
| Report Number: | R20181219-20-11 | Rev | B |
| Prepared for: | Garmin | | |

1.0 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

- (1) US Code of Federal Regulations, Title 47, Part 15
- (2) ISED RSS-Gen, Issue 5
- (3) ISED RSS-210, Issue 9

| SUMMARY | | | |
|--|--------------------------------|--------|--|
| Requirement | Test Type and Limit | Result | Remark |
| FCC 15.203 | Unique Antenna Requirement | Pass | PCB Antenna |
| FCC 15.35 RSS-Gen, 6.10 | Duty cycle of pulsed emissions | N/A | Not required |
| NA | Maximum Peak Output Power | N/A | Informational Purpose Only |
| NA | Minimum Bandwidth | N/A | Informational Purpose Only |
| FCC 15.209 RSS-Gen, 7.1 | Receiver Radiated Emissions | Pass | Meets the requirement of the limit. |
| FCC 15.209 RSS-Gen, 8.9 RSS-210 A1.2 FCC 15.249(a) | Transmitter Radiated Emissions | Pass | Meets the requirement of the limit. |
| FCC 15.209, 15.205, 15.249(d) RSS-Gen, 8.9 RSS-210, 5.5 | Band Edge Measurement | Pass | Meets the requirement of the limit. |
| FCC 15.207 RSS-Gen. 8.8 | Conducted AC Emissions | Pass | No provisions for connection to AC mains |



| | | | |
|----------------|-----------------|-----|---|
| Report Number: | R20181219-20-11 | Rev | B |
| Prepared for: | Garmin | | |

2.0 EUT DESCRIPTION

2.1 EQUIPMENT UNDER TEST

Summary

The Equipment Under Test (EUT) was a battery powered GFSK transceiver manufactured by GARMIN inc.

| | |
|----------------|--|
| EUT | A03645 |
| EUT Received | 16 April 2019 |
| EUT Tested | 16 April 2019- 20 May 2019 |
| Serial No. | 3991631270 (radiated unit); 3991631460 (conducted unit) |
| Operating Band | 2400 – 2483.5 MHz |
| Device Type | GFSK, GMSK |
| Power Supply | Internal Battery/ Charger: Garmin (Phi Hong) MN: PSAI10R-050Q (Representative Power Supply) |

NOTE: For more detailed features description, please refer to the manufacturer's specifications or user's manual.



| | | | |
|----------------|-----------------|-----|---|
| Report Number: | R20181219-20-11 | Rev | B |
| Prepared for: | Garmin | | |

2.2 DESCRIPTION OF TEST MODES

The EUT operates on, and was tested at the frequencies below:

| Channel | Frequency |
|---------|-----------|
| Low | 2402 MHz |
| Mid | 2440 MHz |
| High | 2480 MHz |

These are the only three representative channels tested in the frequency range according to FCC Part 15.31 and RSS-Gen Table A1. See the operational description for a list of all channel frequency and designations.

This EUT was set to transmit in a worse-case scenario with modulation on. The manufacturer modified the unit to transmit continuously on the lowest, middle and highest frequency channels.

The EUT was tested for spurious emissions while running off of battery power.

2.3 DESCRIPTION OF SUPPORT UNITS

None

3.0 LABORATORY DESCRIPTION

3.1 LABORATORY DESCRIPTION

All testing was performed at the following Facility:

The Nebraska Center for Excellence in Electronics (NCEE Labs)
 4740 Discovery Drive
 Lincoln, NE 68521

| | |
|--|---------|
| A2LA Certificate Number: | 1953.01 |
| FCC Accredited Test Site Designation No: | US1060 |
| Industry Canada Test Site Registration No: | 4294A-1 |
| NCC CAB Identification No: | US0177 |

Environmental conditions varied slightly throughout the tests:

Relative humidity of $35 \pm 4\%$
 Temperature of $22 \pm 3^\circ$ Celsius



3.2 TEST PERSONNEL

| No. | PERSONNEL | TITLE | ROLE |
|-----|------------------|-------------------|--------------------|
| 1 | Nic Johnson | Technical Manager | Review/editing |
| 2 | Karthik Vepuri | Test Engineer | Testing and report |
| 3 | Caleb Farrington | Test Technician | Testing and report |
| 4 | Fox Lane | Test Technician | Testing and report |

Notes:

All personnel are permanent staff members of NCEE Labs. No testing or review was sub-contracted or performed by sub-contracted personnel.

3.3 TEST EQUIPMENT

| DESCRIPTION AND MANUFACTURER | MODEL NO. | SERIAL NO. | LAST CALIBRATION DATE | CALIBRATION DUE DATE |
|--|------------|--------------|-----------------------|----------------------|
| Rohde & Schwarz Test Receiver | ES126 | 100037 | 30 Jan 2018 | 30 Jan 2020 |
| Keysight EXA Signal Analyzer | N9010A | MY56070862 | 14 Dec 2018 | 14 Dec 2020 |
| EMCO Biconilog Antenna | 3142B | 1647 | 02 Aug 2017 | 02 Aug 2019 |
| EMCO Horn Antenna | 3115 | 6416 | 26 Jan 2018 | 26 Jan 2020 |
| EMCO Horn Antenna | 3116 | 2576 | 31 Jan 2018 | 31 Jan 2020 |
| Rohde & Schwarz Preamplifier | TS-PR18 | 3545700803 | 09 Mar 2018* | 09 Mar 2020* |
| Trilithic High Pass Filter | 6HC330 | 23042 | 09 Mar 2018* | 09 Mar 2020* |
| Rohde & Schwarz LISN | ESH3-Z5 | 836679/010 | 26 Jul 2018 | 26 Jul 2019 |
| Rohde & Schwarz Test Software | ES-K1 | 12575 | NA | NA |
| RF Cable (preamplifier to Antenna) | MFR-57500 | 01-07-002 | 09 Mar 2018* | 09 Mar 2020* |
| RF Cable (Antenna to 10m chamber bulkhead) | FSCM 64639 | 01E3872 | 09 Mar 2018* | 09 Mar 2020* |
| RF Cable (10m chamber bulkhead to control room bulkhead) | FSCM 64639 | 01E3874 | 09 Mar 2018* | 09 Mar 2020* |
| RF Cable (Control room bulkhead to RF switch) | FSCM 64639 | 01E3871 | 09 Mar 2018* | 09 Mar 2020* |
| RF Cable (RF switch to test receiver) | FSCM 64639 | 01F1206 | 09 Mar 2018* | 09 Mar 2020* |
| RF switch – Rohde and Schwarz | TS-RSP | 1113.5503.14 | 09 Mar 2018* | 09 Mar 2020* |
| N connector bulkhead (10m chamber) | PE9128 | NCEEBH1 | 09 Mar 2018* | 09 Mar 2020* |
| N connector bulkhead (control room) | PE9128 | NCEEBH2 | 09 Mar 2018* | 09 Mar 2020* |

*Internal Characterization

Notes:

All equipment is owned by NCEE Labs and stored permanently at NCEE Labs facilities.



| | | | |
|----------------|-----------------|-----|---|
| Report Number: | R20181219-20-11 | Rev | B |
| Prepared for: | Garmin | | |

4.0 DETAILED RESULTS

4.1 DUTY CYCLE

Test Method: NA

4.2 PEAK OUTPUT POWER

Test Method: N/A

For Informational Purposes only

Test procedures:

1. The EUT was connected to the spectrum analyzer directly with a low-loss shielded coaxial cable
2. The resolution bandwidth was set to 10 MHz and the video bandwidth was set to 10 MHz to capture the signal. The analyzer used a peak detector in max hold mode.

Deviations from test standard:

No deviation.

Test setup:

The field strength was measured by connecting the EUT directly to the spectrum analyzer. See Section 4.2.

EUT operating conditions:

The EUT was powered by internal battery power unless specified and set to transmit continuously on the lowest frequency channel, highest frequency channel and one in the middle of its operating range. EUT was set to transmit in GFSK and GMSK.

Test results:

Peak Output Power

| CHANNEL | CHANNEL FREQUENCY (MHz) | PEAK OUTPUT POWER (dBm) | PEAK OUTPUT POWER (mW) | Method | Transmitter |
|---------|-------------------------|-------------------------|------------------------|-----------|-------------|
| Low | 2402 | 1.95 | 1.57 | Conducted | GFSK |
| Mid | 2440 | 0.60 | 1.15 | Conducted | GFSK |
| High | 2480 | -0.50 | 0.89 | Conducted | GFSK |
| Low | 2402 | 1.81 | 1.52 | Conducted | GMSK |
| Mid | 2440 | 0.08 | 1.02 | Conducted | GMSK |
| High | 2480 | -0.62 | 0.87 | Conducted | GMSK |



| | | | | |
|---------------|----------------|--------|--------|----------|
| Marker 1 [T1] | RBW | 10 MHz | RF Att | 30 dB |
| Ref Lvl | 1.95 dBm | VBW | 10 MHz | |
| 20 dBm | 2.40173948 GHz | SWT | 5 ms | Unit dBm |

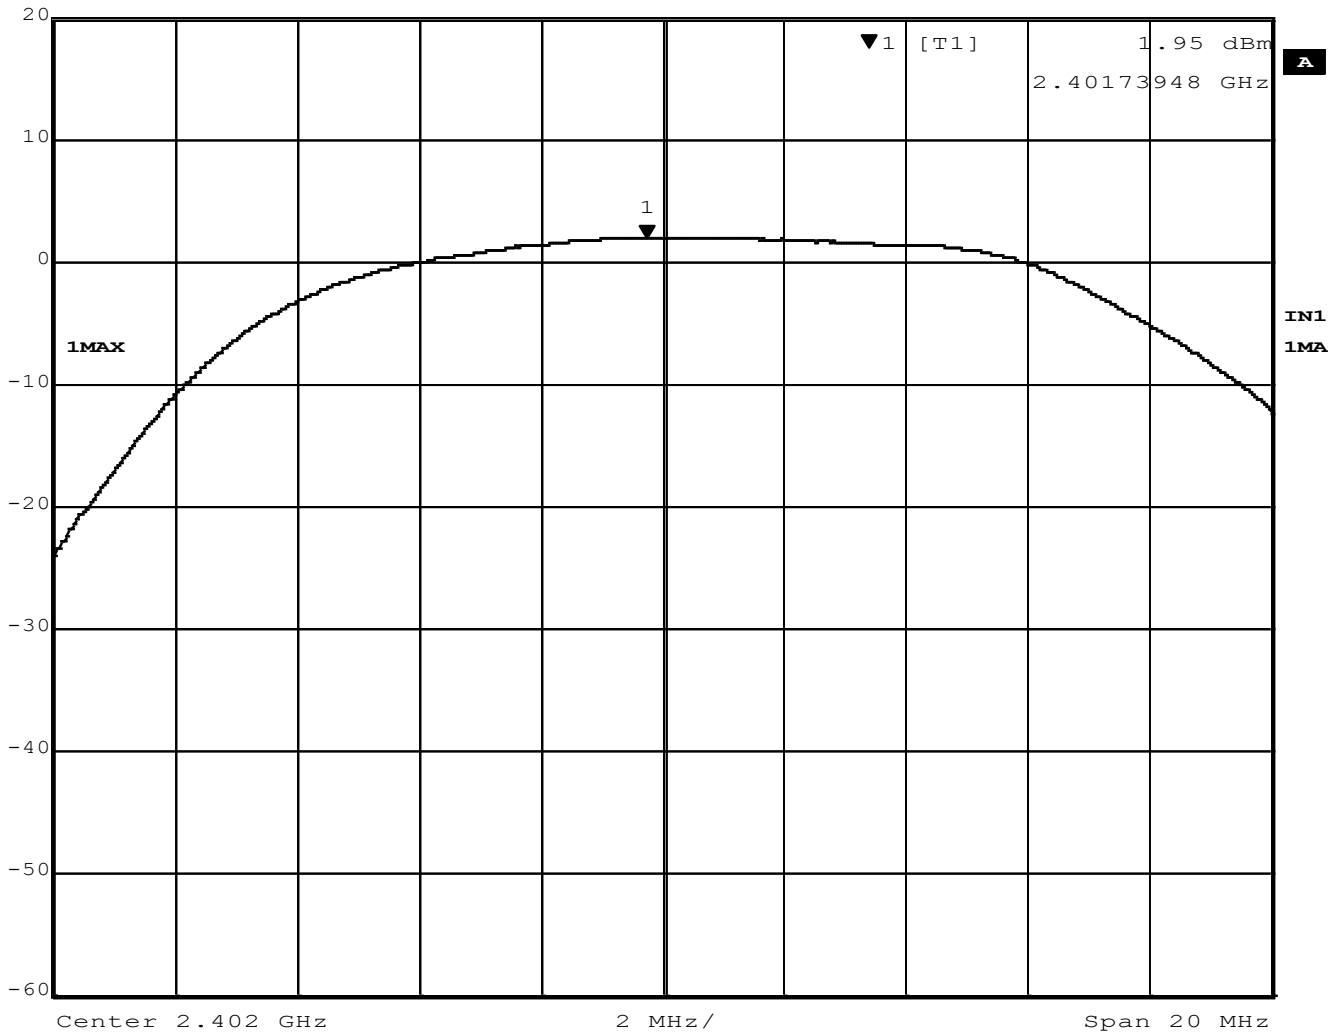


Figure 1 – Output Power, Low Channel, GFSK



| | | | | |
|---------------|----------------|--------|--------|----------|
| Marker 1 [T1] | RBW | 10 MHz | RF Att | 30 dB |
| Ref Lvl | 0.60 dBm | VBW | 10 MHz | |
| 20 dBm | 2.43913828 GHz | SWT | 5 ms | Unit dBm |

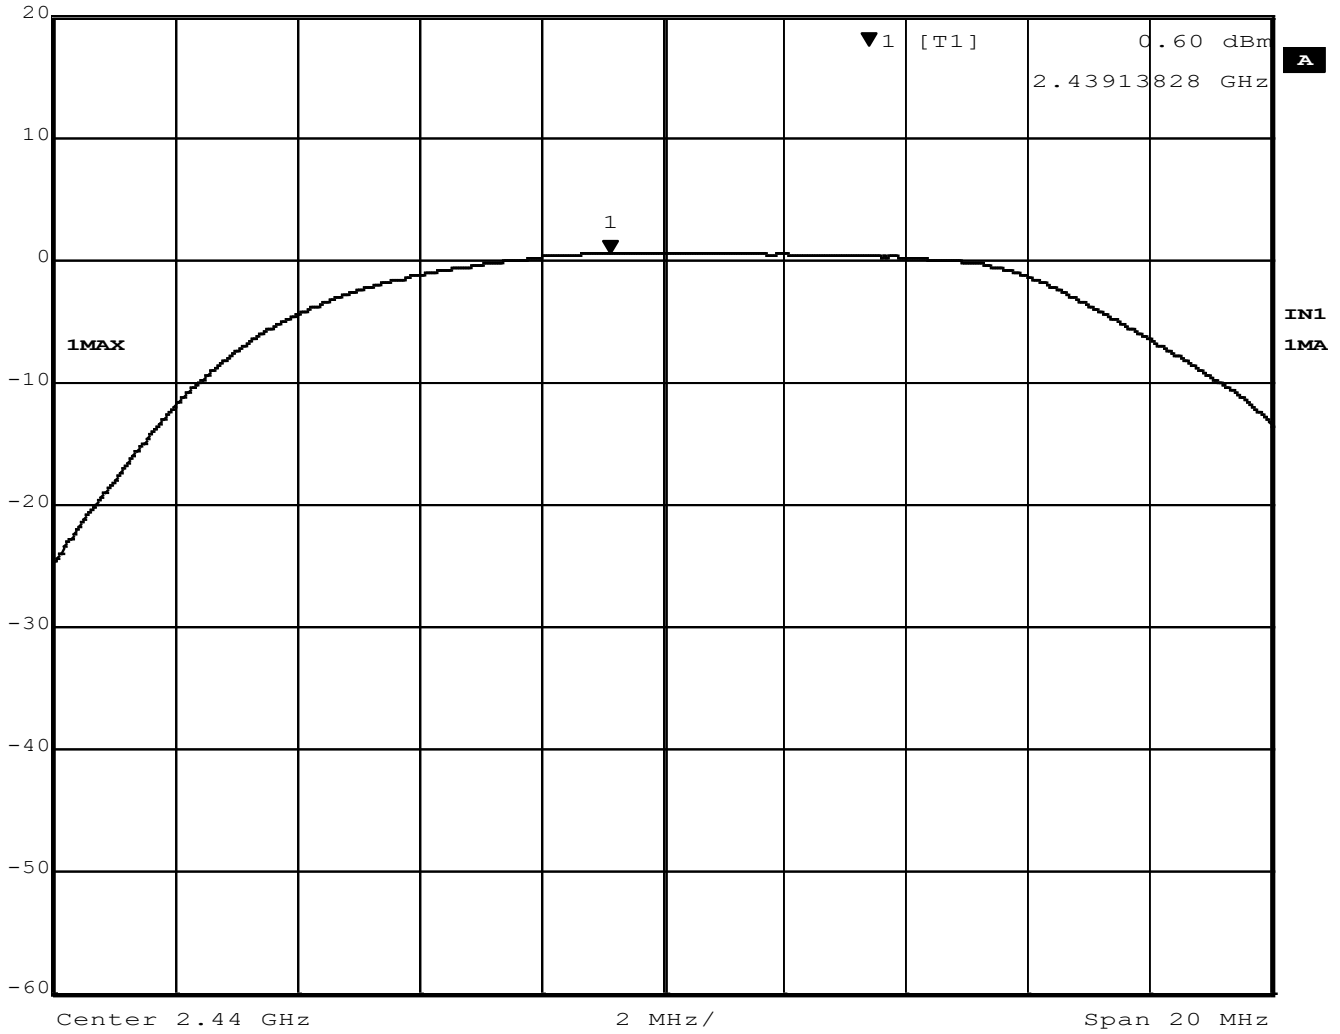


Figure 2 – Output Power, Mid Channel, GFSK



| | | | | |
|---------------|----------------|--------|--------|--------|
| Marker 1 [T1] | RBW | 10 MHz | RF Att | 30 dB |
| | | | VBW | 10 MHz |
| Ref Lvl | -0.50 dBm | | SWT | 5 ms |
| 20 dBm | 2.47969940 GHz | | Unit | dBm |

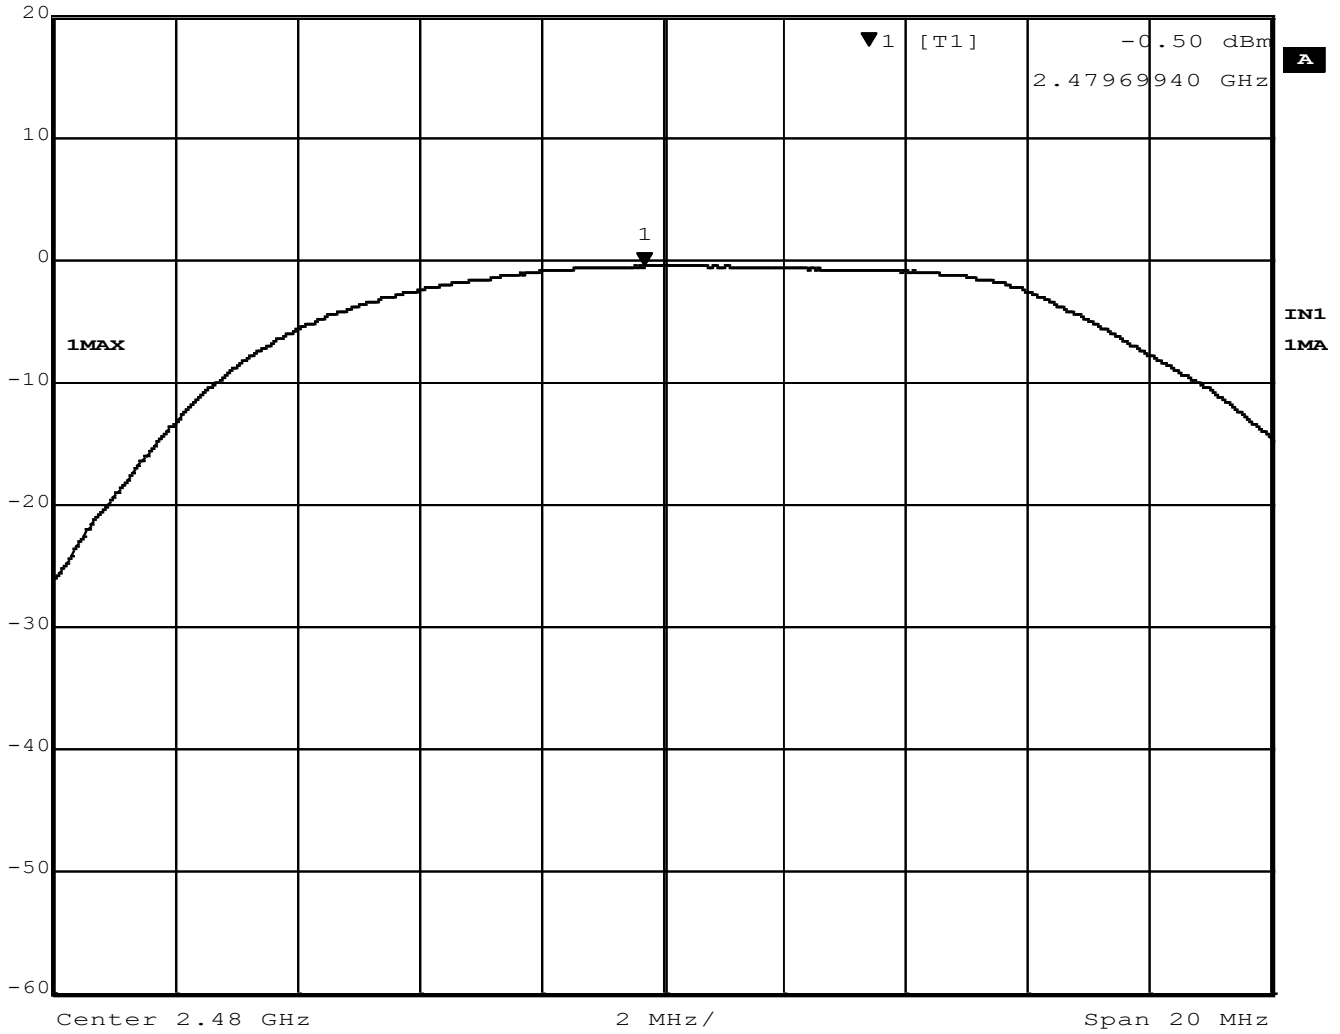


Figure 3 – Output Power, High Channel, GFSK



| | | | | | |
|---------|----------------|-----|--------|--------|-------|
| Ref Lvl | Marker 1 [T1] | RBW | 10 MHz | RF Att | 30 dB |
| 20 dBm | 1.81 dBm | VBW | 10 MHz | | |
| | 2.40129860 GHz | SWT | 5 ms | Unit | dBm |

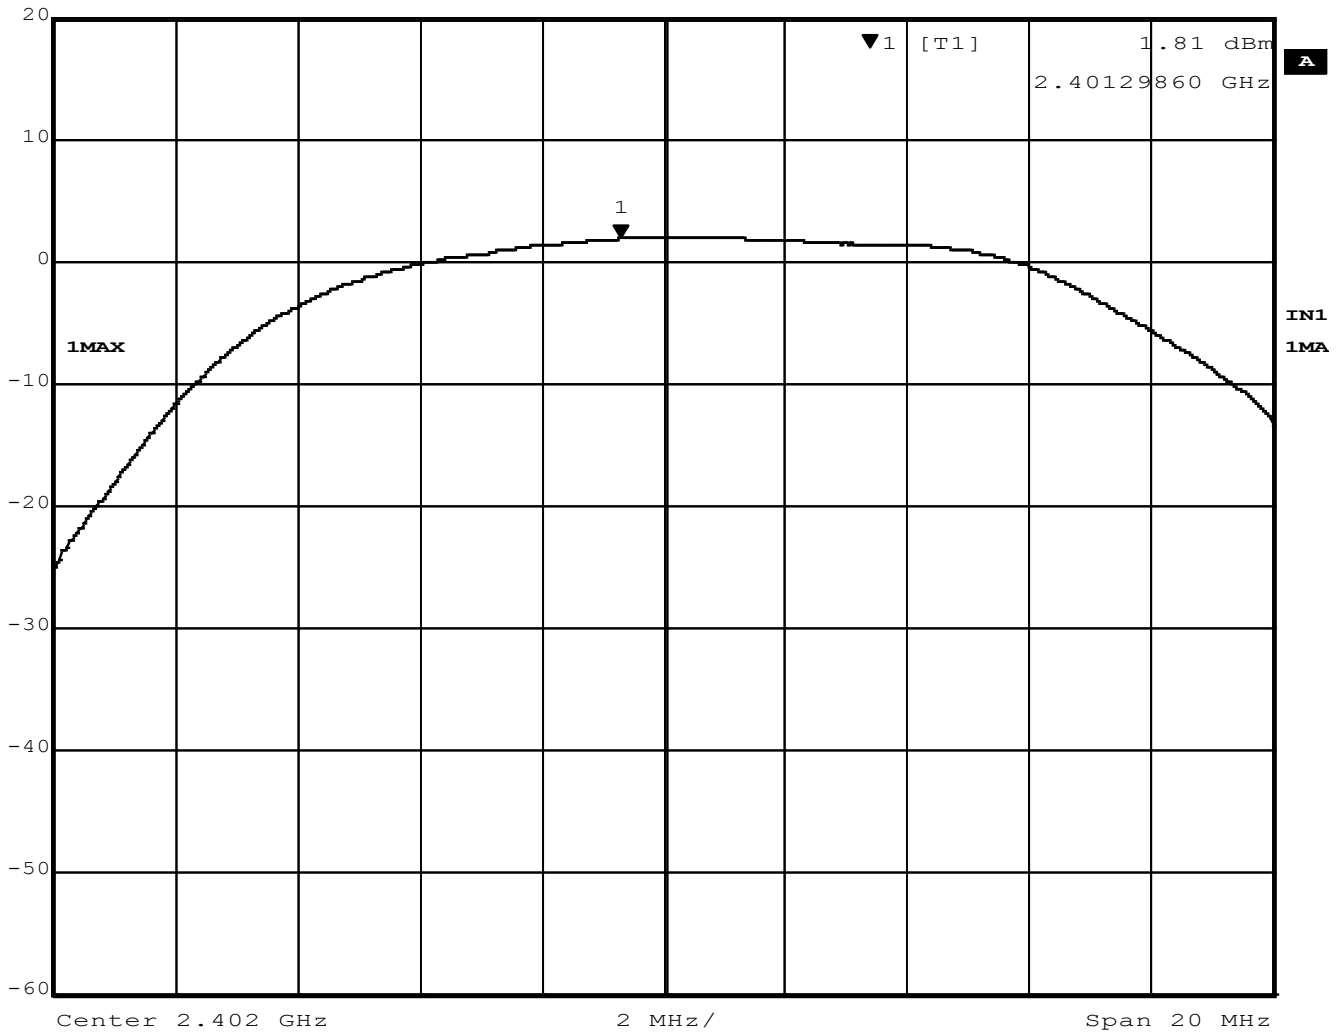


Figure 4 – Output Power, Low Channel, GMSK



| | | | | |
|---------------|----------------|--------|--------|----------|
| Marker 1 [T1] | RBW | 10 MHz | RF Att | 30 dB |
| Ref Lvl | 0.08 dBm | VBW | 10 MHz | |
| 20 dBm | 2.43929860 GHz | SWT | 5 ms | Unit dBm |

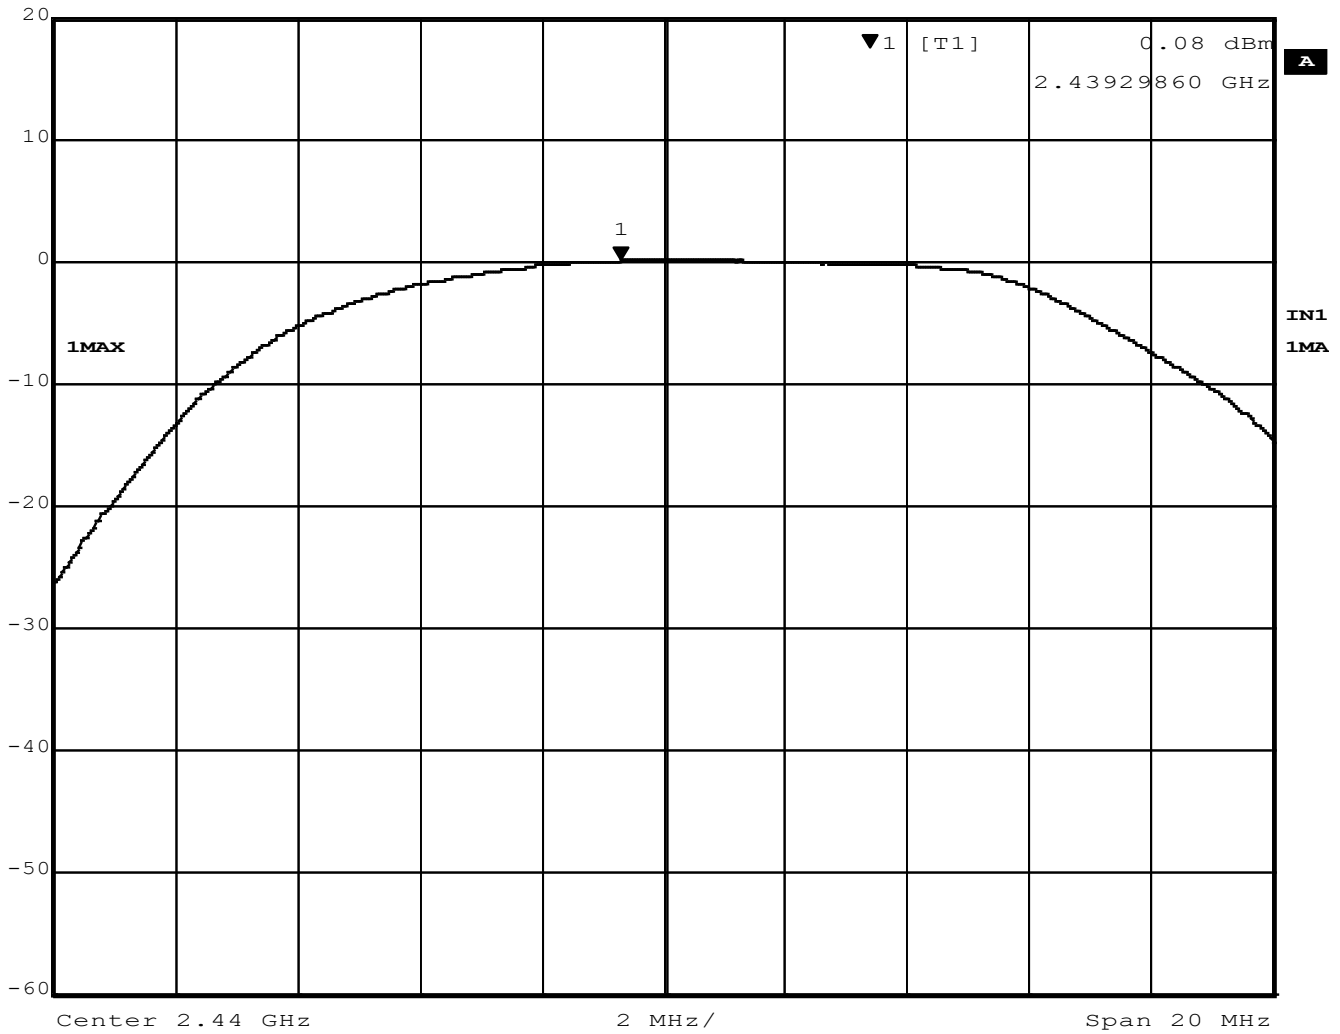


Figure 5 – Output Power, Mid Channel, GMSK



| | | | | |
|---------------|-----|----------------|--------|--------|
| Marker 1 [T1] | RBW | 10 MHz | RF Att | 30 dB |
| | | | VBW | 10 MHz |
| Ref Lvl | | -0.62 dBm | SWT | 5 ms |
| 20 dBm | | 2.47929860 GHz | Unit | dBm |

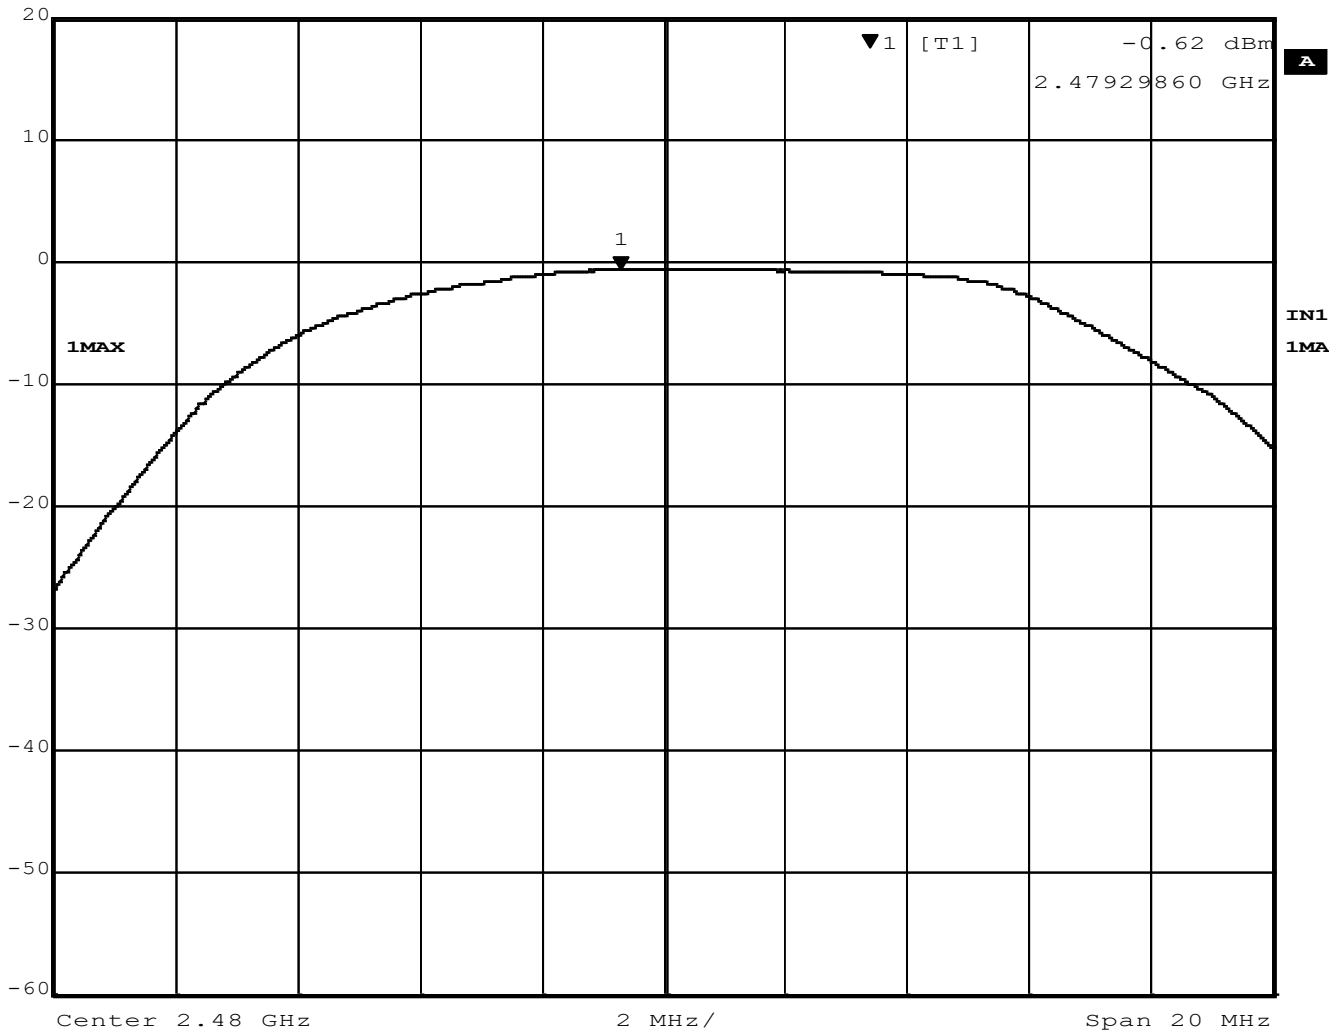


Figure 6 – Output Power, High Channel, GMSK



| | | | |
|----------------|-----------------|-----|---|
| Report Number: | R20181219-20-11 | Rev | B |
| Prepared for: | Garmin | | |

4.3 BANDWIDTH

Test Method: ANSI C63.10-2013, Section(s) 6.9.2

Limits of bandwidth measurements:

For Informational Purposes only

Test procedures:

1. The EUT was connected to the spectrum analyzer directly with a low-loss shielded coaxial cable
2. The resolution bandwidth was set to 100 kHz and the video bandwidth was set to 300 kHz to capture the signal. The analyzer used a peak detector in max hold mode.
3. The Occupied Bandwidth is defined as the bandwidth of which is higher than peak power minus 20dB.

Test setup:

The Bandwidth was measured by connecting the EUT directly to the spectrum analyzer.

Deviations from test standard:

No deviation.

Test setup:

Figure 7 - Bandwidth Measurements Test Setup
EUT operating conditions:

The EUT was powered by internal battery power unless specified and set to transmit continuously on the lowest frequency channel, highest frequency channel and one in the middle of its operating range. EUT was set to transmit in GFSK.

Test results:
Occupied Bandwidth

| CHANNEL | Mode | CHANNEL FREQUENCY (MHz) | OBW (KHz) |
|---------|------|-------------------------|-----------|
| Low | GFSK | 2402 | 1123.50 |
| Mid | GFSK | 2440 | 1129.00 |
| High | GFSK | 2480 | 1126.50 |
| Low | GMSK | 2402 | 1012.80 |
| Mid | GMSK | 2440 | 1005.40 |
| High | GMSK | 2480 | 965.68 |

6dB Bandwidth

| CHANNEL | Mode | CHANNEL FREQUENCY (MHz) | 6 dB (KHz) |
|---------|------|-------------------------|------------|
| Low | GFSK | 2402 | 784.60 |
| Mid | GFSK | 2440 | 786.20 |
| High | GFSK | 2480 | 782.70 |
| Low | GMSK | 2402 | 514.90 |
| Mid | GMSK | 2440 | 515.50 |
| High | GMSK | 2480 | 511.20 |

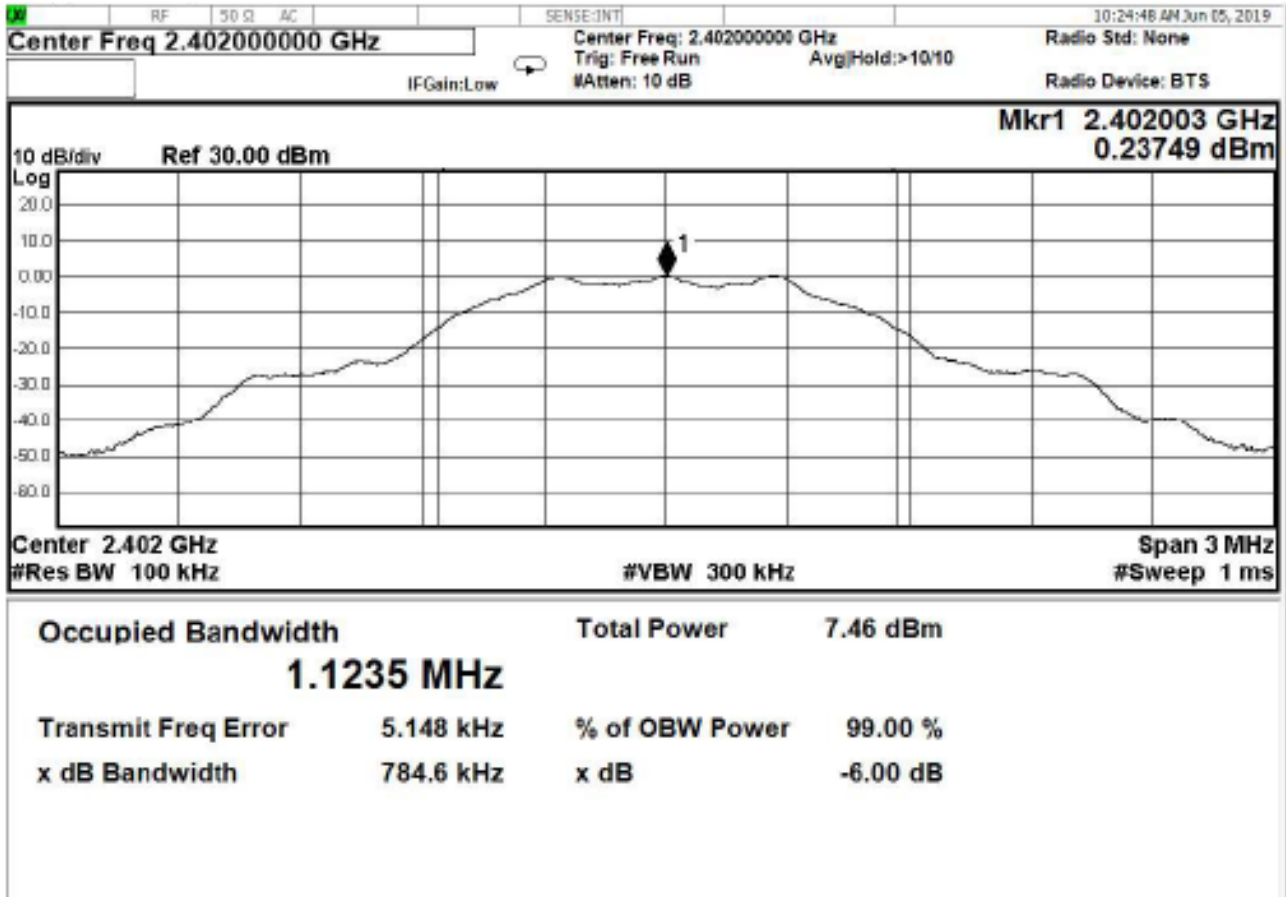


Figure 8 – Occupied Bandwidth and 6dB Bandwidth, Low Channel, GFSK

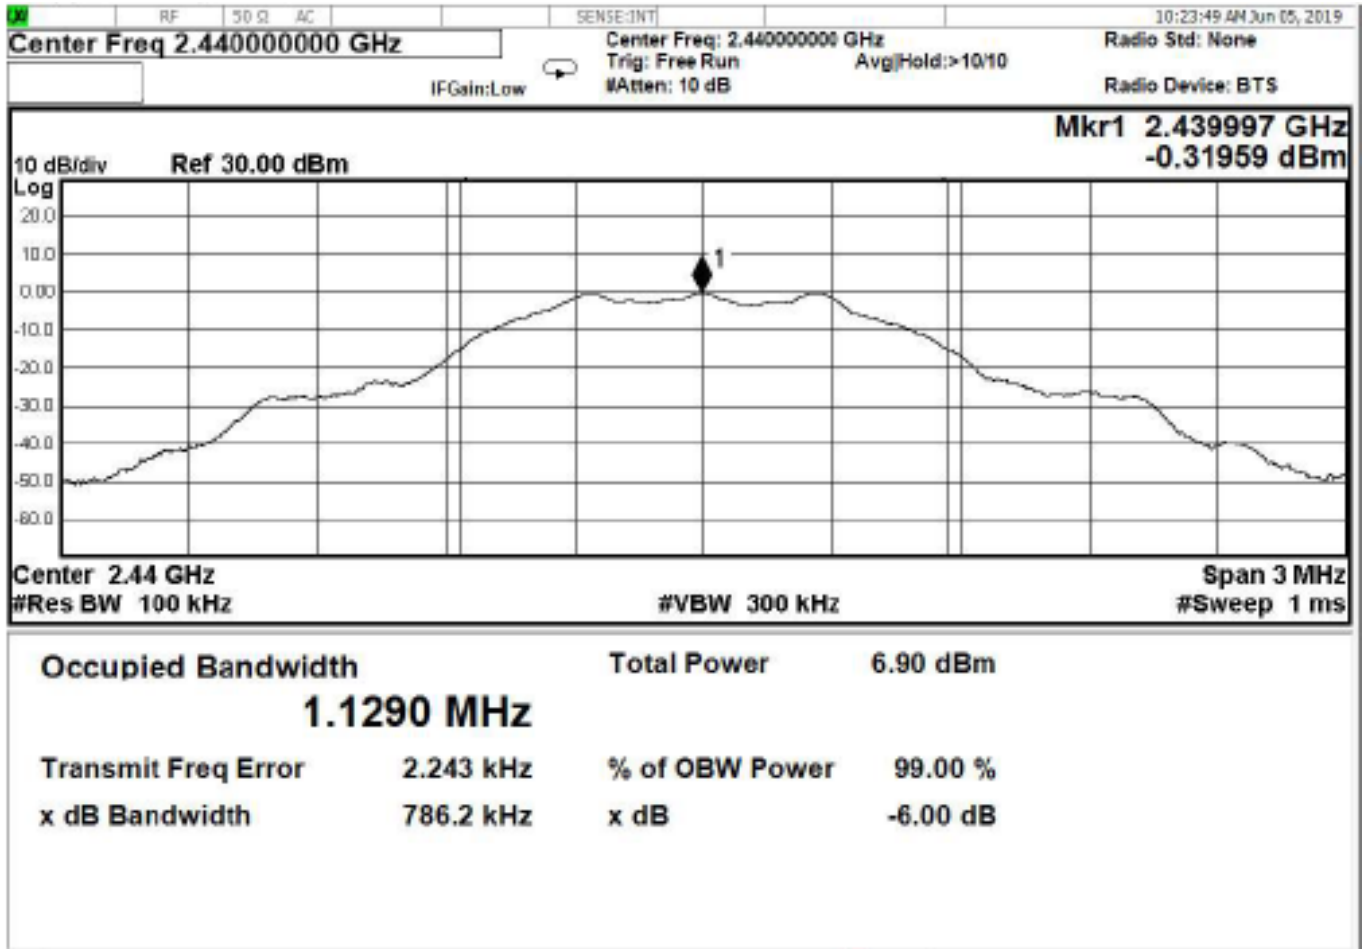


Figure 9 - Occupied Bandwidth and 6dB Bandwidth, Mid Channel, GFSK

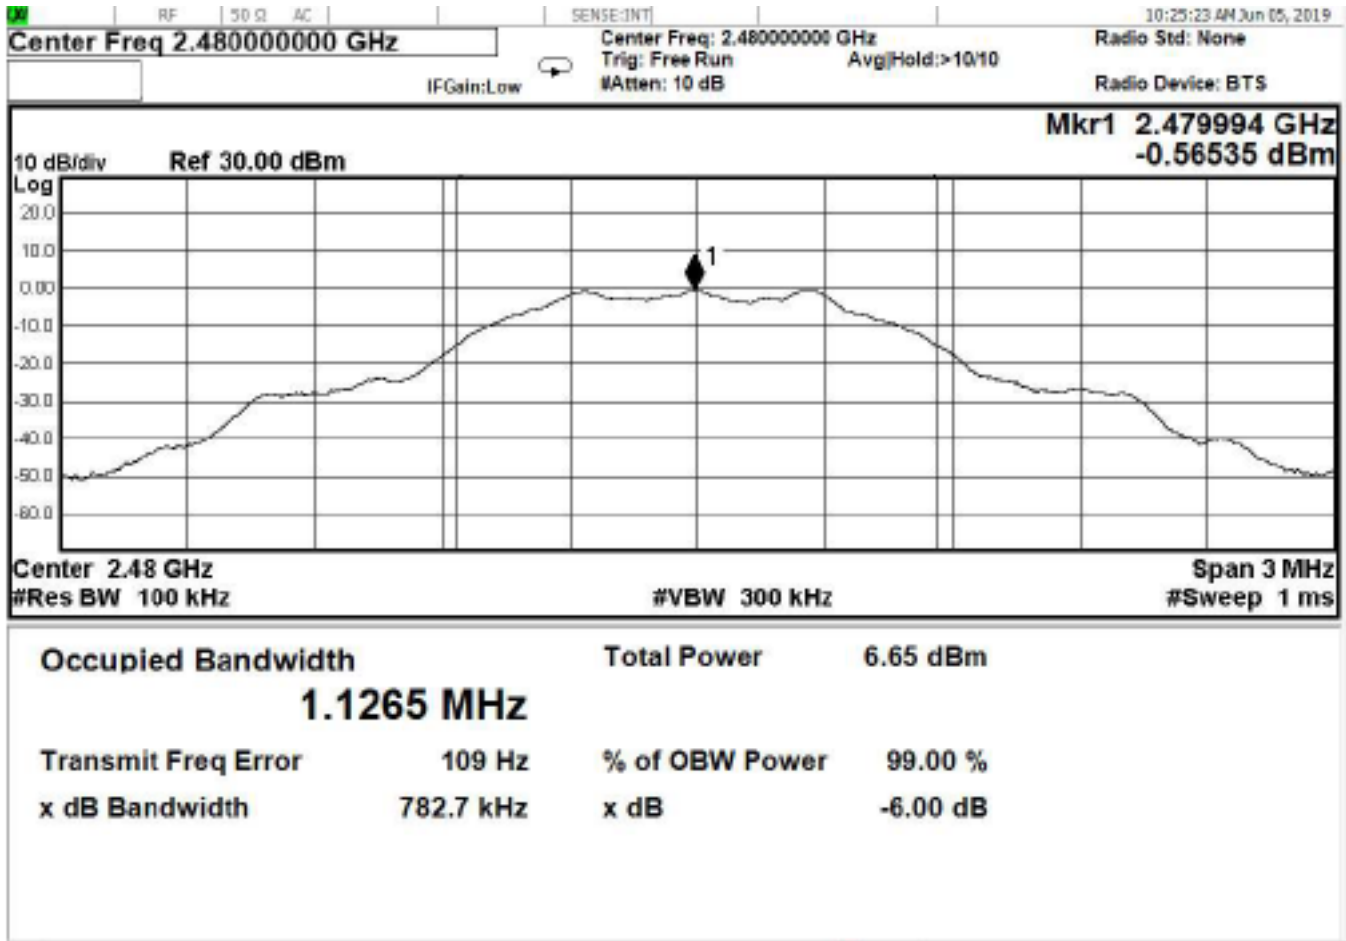


Figure 10 – Occupied Bandwidth and 6dB Bandwidth, High Channel, GFSK

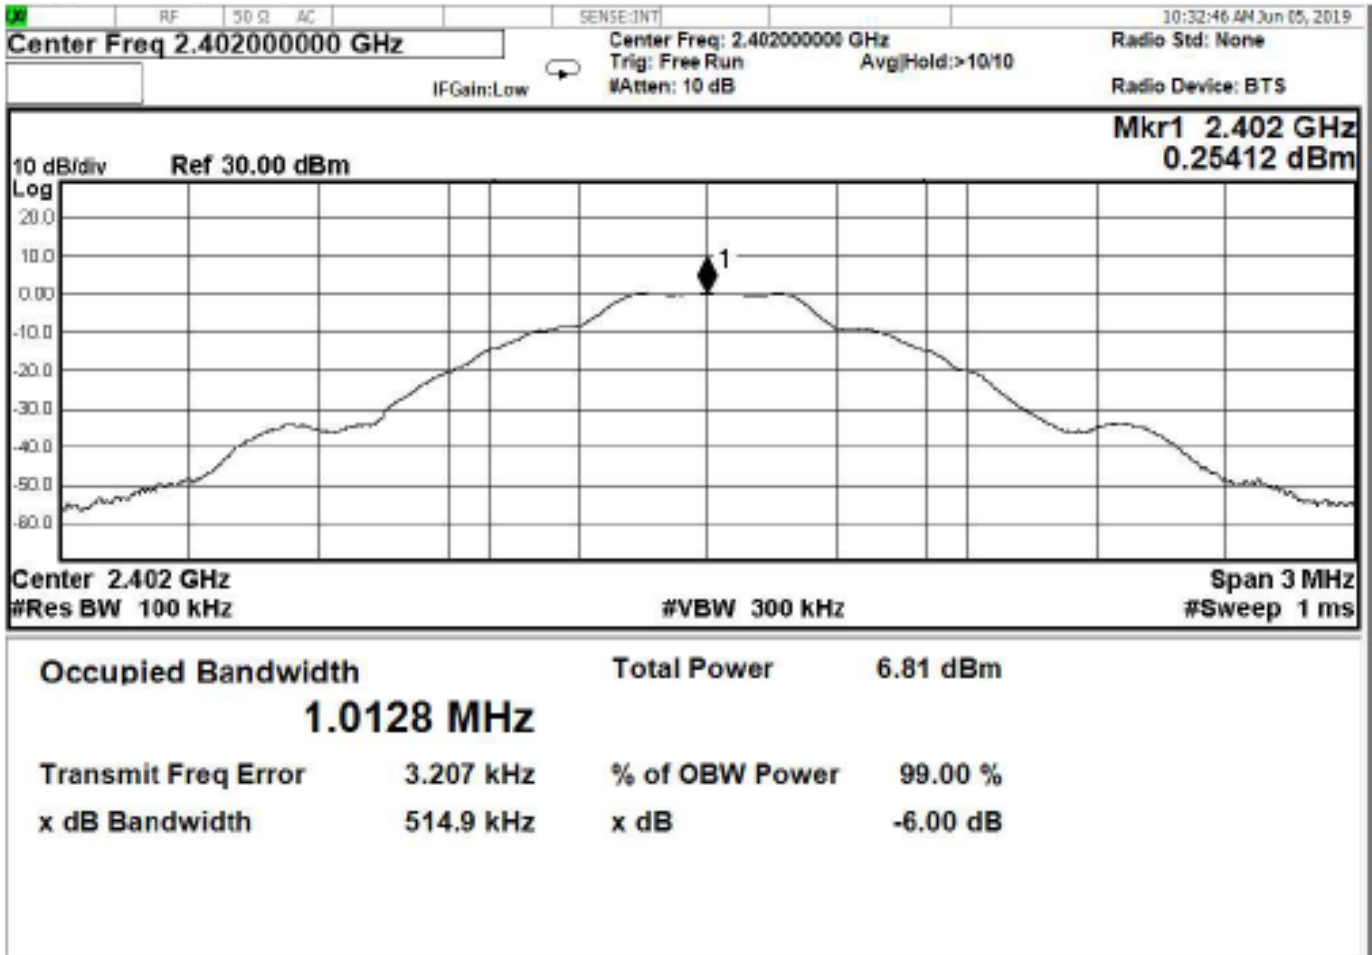


Figure 11 – Occupied Bandwidth and 6dB Bandwidth, Low Channel, GMSK

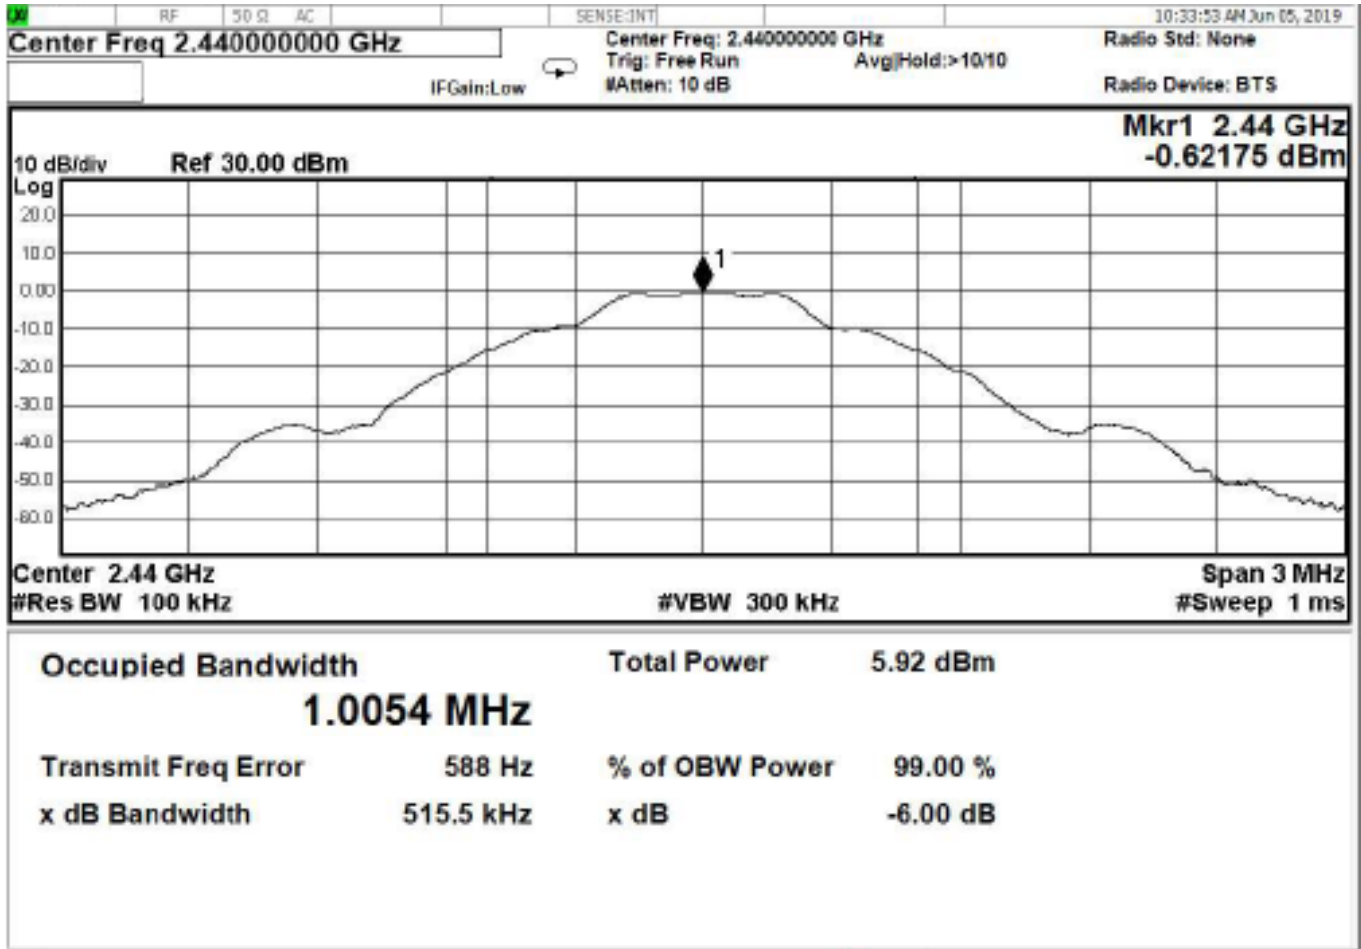


Figure 12 – Occupied Bandwidth and 6dB Bandwidth, Mid Channel, GMSK

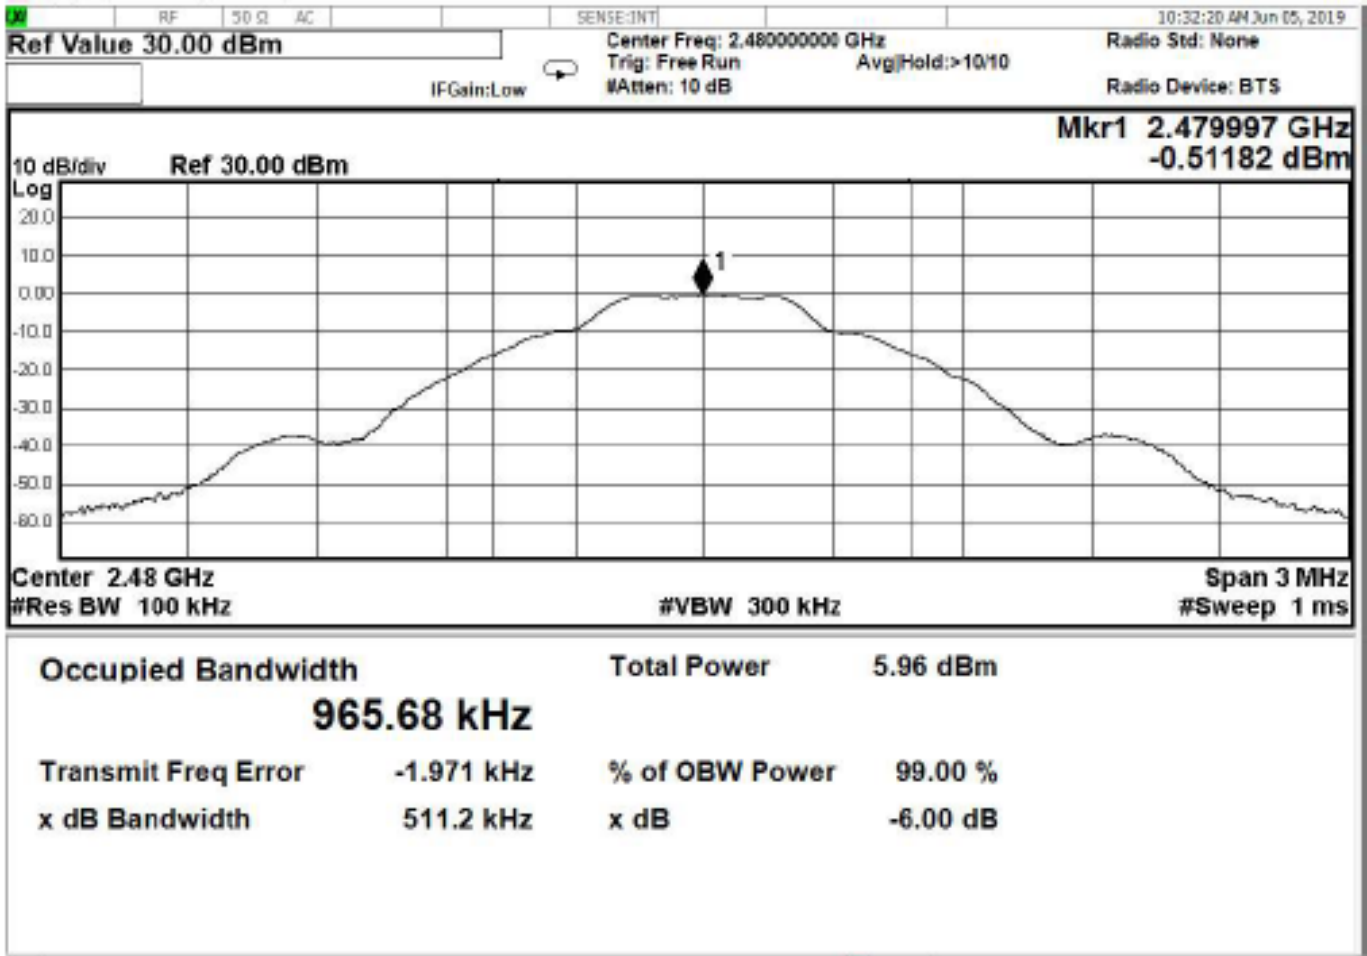


Figure 13 – Occupied Bandwidth and 6dB Bandwidth, High Channel, GMSK

4.4 RADIATED EMISSIONS

Test Method: ANSI C63.10-2013, Section 6.5, 6.6

Limits for radiated emissions measurements:

Emissions radiated outside of the specified bands shall be applied to the limits in 15.209 as followed:

| FREQUENCIES (MHz) | FIELD STRENGTH ($\mu\text{V/m}$) | MEASUREMENT DISTANCE (m) |
|-------------------|------------------------------------|--------------------------|
| 0.009-0.490 | 2400/F(kHz) | 300 |
| 0.490-1.705 | 24000/F(kHz) | 30 |
| 1.705-30.0 | 30 | 3 |
| 30-88 | 100 | 3 |
| 88-216 | 150 | 3 |
| 216-960 | 200 | 3 |
| Above 960 | 500 | 3 |

NOTE:


1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = $20 * \log * \text{Emission level } (\mu\text{V/m})$.
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits by more than 20dB under any condition of modulation.
4. The EUT was tested for spurious emissions while running off of battery power and external USB power. The worse-case emissions were produced while running off of USB power, so results from this mode are presented.



| | | | |
|----------------|-----------------|-----|---|
| Report Number: | R20181219-20-11 | Rev | B |
| Prepared for: | Garmin | | |

Test procedures:

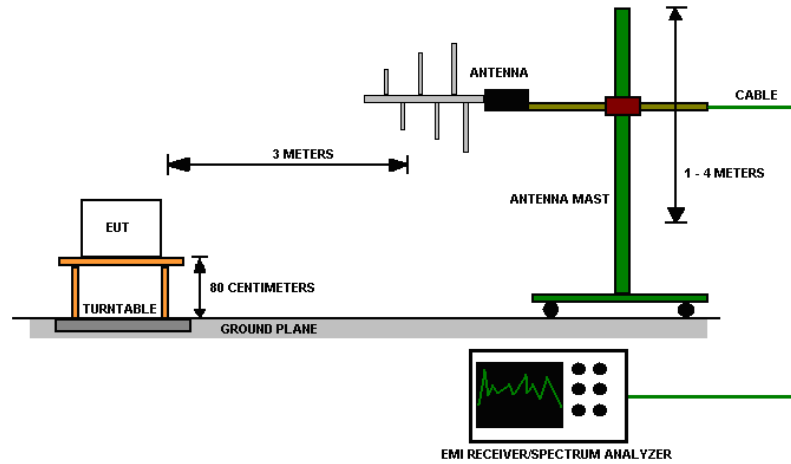- a. The EUT was placed on the top of a rotating table above the ground plane in a 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. The table was 0.8m high for measurements from 30MHz-1Ghz and 1.5m for measurements from 1GHz and higher.
- b. The EUT was set 3 meters away from the interference-receiving Antenna, which was mounted on the top of a variable-height Antenna tower.
- c. The Antenna was a broadband Antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the Antenna are used to make the measurement.
- d. For each suspected emission, the EUT was arranged to maximize its emissions and then the Antenna height was varied from 1 meter to 4 meters and the rotating table was turned from 0 degrees to 360 degrees to find the maximum emission reading.
- e. The test-receiver system was set to use a peak detector with a specified resolution bandwidth. For spectrum analyzer measurements, the composite maximum of several analyzer sweeps was used for final measurements.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. The EUT was maximized in all 3 orthogonal positions. The results are presented for the axis that had the highest emissions.
- h. Intermodulation products were investigated by measuring spurious emissions with each of the two 2.4 GHz radios running in parallel with the NFC radio. No intermodulation products were found above the labs system sensitivity.

Test setup:

Figure 14 - Radiated Emissions Test Setup
NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequencies below 1GHz.
2. The resolution bandwidth 1 MHz for all measurements and at frequencies above 1GHz, A peak detector was used for all measurements above 1GHz. Measurements were made with an EMI Receiver.

Deviations from test standard:

No deviation.

EUT operating conditions

The EUT was powered by internal battery power unless specified and set to transmit continuously on the lowest frequency channel, highest frequency channel and one in the middle of its operating range. EUT was set to transmit in GFSK and GMSK.

Test results:

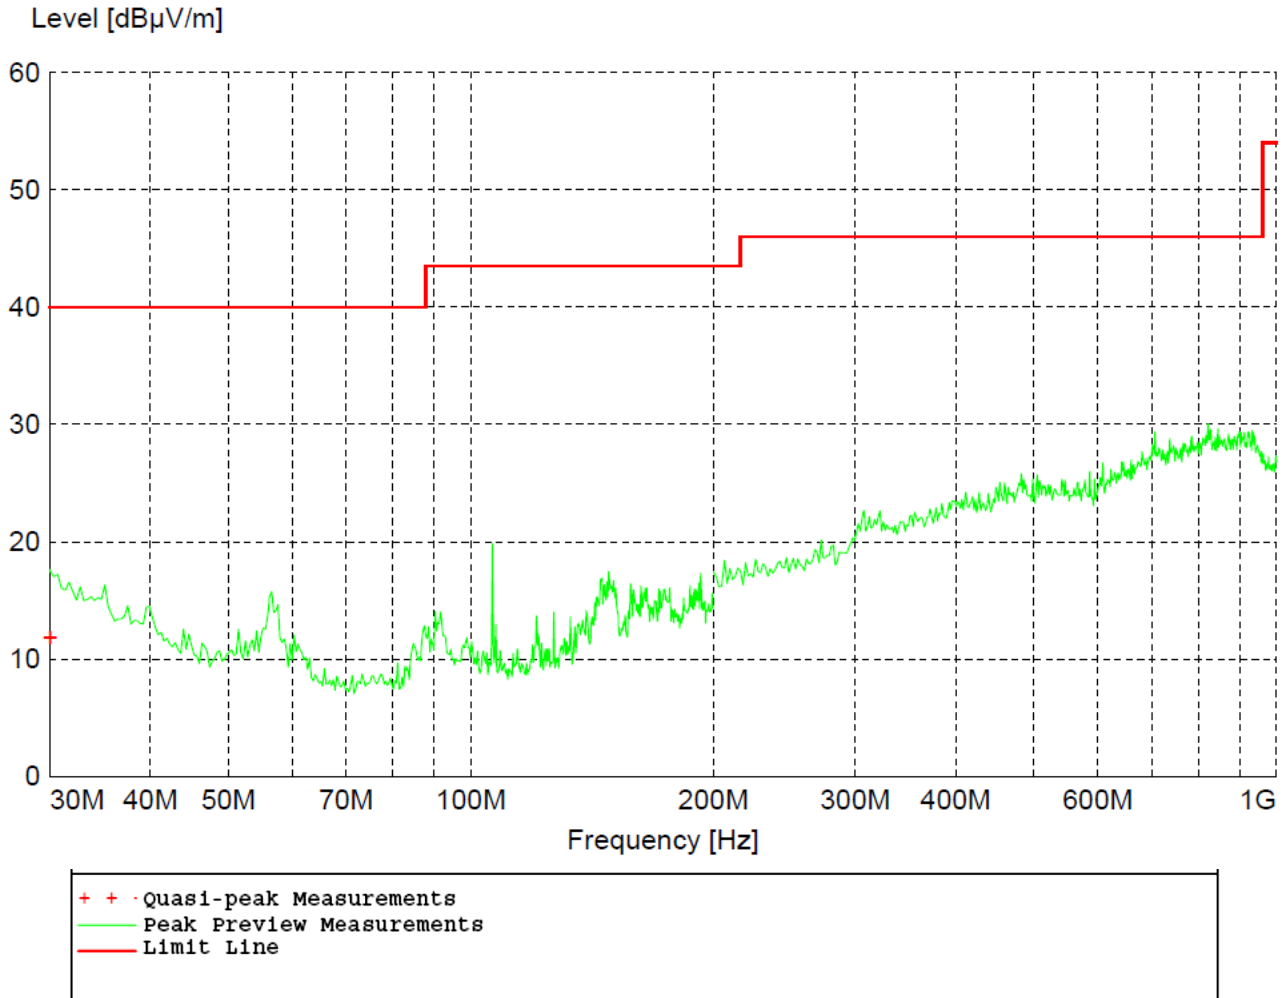


Figure 15 - Radiated Emissions Plot, Receive

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value

Table 1 - Radiated Emissions Quasi-peak Measurements, Receive

| Frequency | Level | Limit | Margin | Height | Angle | Pol |
|-----------|--------|--------|--------|--------|-------|------|
| MHz | dBµV/m | dBµV/m | dB | cm. | deg. | |
| 30.060000 | 11.82 | 40.00 | 28.18 | 246.00 | 4.00 | VERT |

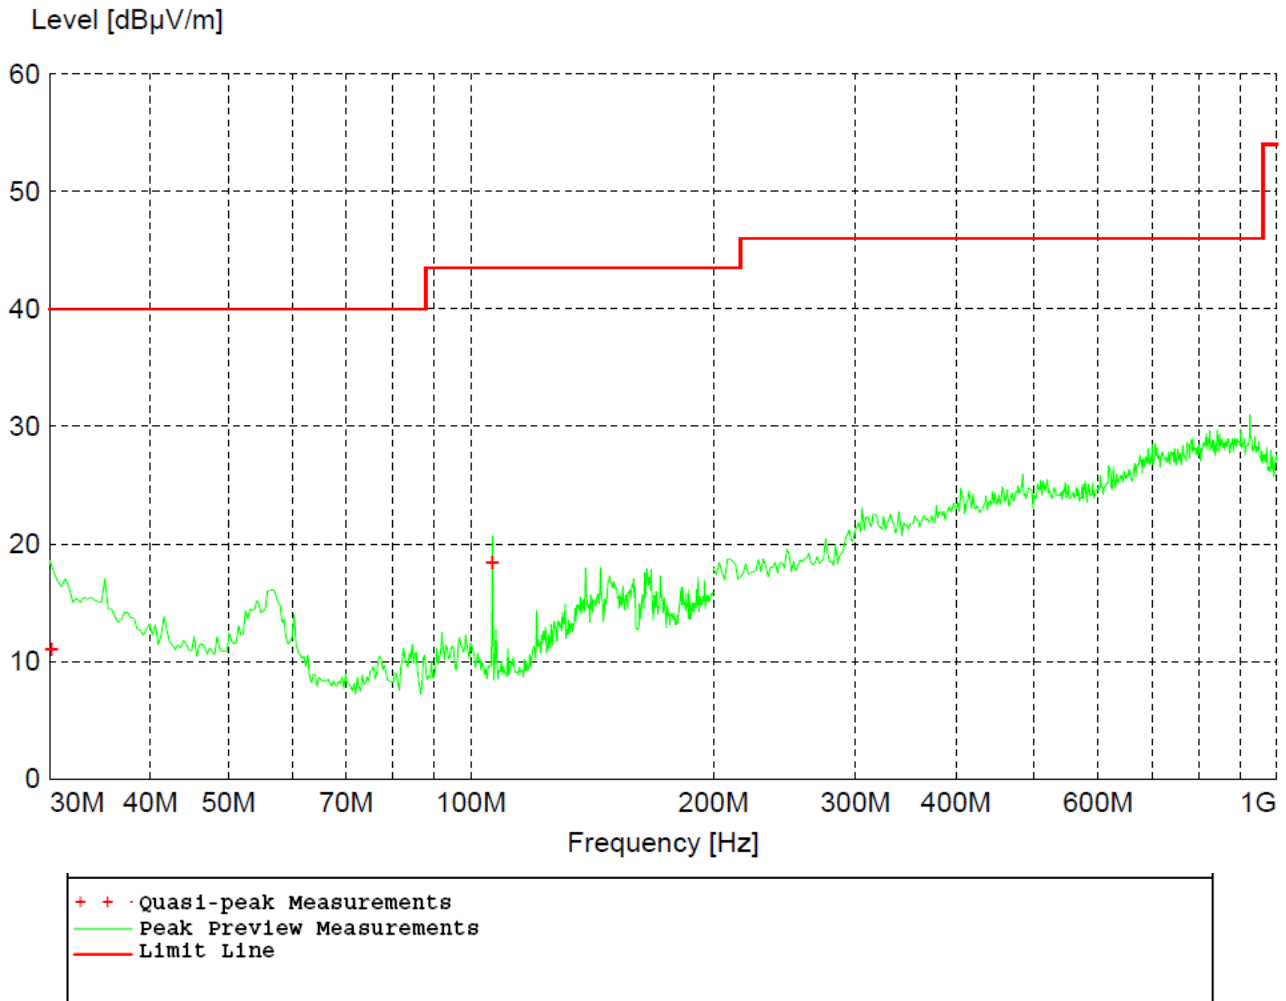


Figure 16 - Radiated Emissions Plot, GFSK

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value

Table 2 - Radiated Emissions Quasi-peak Measurements, GFSK

| Frequency | Level | Limit | Margin | Height | Angle | Pol |
|------------|--------|--------|--------|--------|--------|------|
| MHz | dBµV/m | dBµV/m | dB | cm. | deg. | |
| 30.180000 | 11.03 | 40.00 | 28.97 | 400.00 | 36.00 | VERT |
| 106.320000 | 18.45 | 43.50 | 25.05 | 103.00 | 112.00 | VERT |

The EUT was maximized in all 3 orthogonal axis. The worst-case is shown in the table above.

Table 3 - Radiated Emissions Peak Measurements, GFSK

| Frequency | Level | Limit | Margin | Height | Angle | Pol | Channel |
|-------------|--------------|--------------|--------|--------|--------|------|---------|
| MHz | dB μ V/m | dB μ V/m | dB | cm. | deg. | | |
| 2402.000000 | 94.77 | 114.00 | 19.23 | 197.00 | 10.00 | VERT | Low |
| 2440.000000 | 94.04 | 114.00 | 19.96 | 197.00 | 10.00 | VERT | Mid |
| 2480.000000 | 92.39 | 114.00 | 21.61 | 197.00 | 10.00 | VERT | High |
| 4803.400000 | 43.20 | 74.00 | 30.80 | 132.00 | 113.00 | VERT | Low |
| 4880.000000 | 44.46 | 74.00 | 29.54 | 100.00 | 8.00 | VERT | Mid |
| 4960.600000 | 42.62 | 74.00 | 31.38 | 354.00 | 0.00 | VERT | High |
| 7205.200000 | 54.46 | 74.00 | 19.54 | 126.00 | 218.00 | VERT | Low |
| 7319.200000 | 53.47 | 74.00 | 20.53 | 208.00 | 226.00 | VERT | Mid |
| 7439.200000 | 53.18 | 74.00 | 20.82 | 99.00 | 217.00 | VERT | High |
| 9607.000000 | 56.37 | 74.00 | 17.63 | 117.00 | 215.00 | VERT | Low |
| 9759.800000 | 56.71 | 74.00 | 17.29 | 100.00 | 184.00 | VERT | Mid |
| 9918.800000 | 56.25 | 74.00 | 17.75 | 100.00 | 173.00 | VERT | High |

The EUT was maximized in all 3 orthogonal axis. The worst-case is shown in the table above

Table 4 - Radiated Emissions Average Measurements, GFSK

| Frequency | Level | Limit | Margin | Height | Angle | Pol | Channel |
|-------------|--------------|--------------|--------|--------|--------|------|---------|
| MHz | dB μ V/m | dB μ V/m | dB | cm. | deg. | | |
| 2402.000000 | 89.06 | 94.00 | 4.94 | 197.00 | 10.00 | VERT | Low |
| 2440.000000 | 88.02 | 94.00 | 3.98 | 197.00 | 10.00 | VERT | Mid |
| 2480.000000 | 86.17 | 94.00 | 7.83 | 197.00 | 10.00 | VERT | High |
| 4803.400000 | 28.99 | 74.00 | 45.01 | 132.00 | 113.00 | VERT | Low |
| 4880.000000 | 30.96 | 74.00 | 43.04 | 100.00 | 8.00 | VERT | Mid |
| 4960.600000 | 28.93 | 74.00 | 45.07 | 354.00 | 0.00 | VERT | High |
| 7205.200000 | 42.51 | 74.00 | 31.49 | 126.00 | 218.00 | VERT | Low |
| 7319.200000 | 41.60 | 74.00 | 32.40 | 208.00 | 226.00 | VERT | Mid |
| 7439.200000 | 41.61 | 74.00 | 32.39 | 99.00 | 217.00 | VERT | High |
| 9607.000000 | 44.07 | 74.00 | 29.93 | 117.00 | 215.00 | VERT | Low |
| 9759.800000 | 41.18 | 74.00 | 32.82 | 100.00 | 184.00 | VERT | Mid |
| 9918.800000 | 43.88 | 74.00 | 30.12 | 100.00 | 173.00 | VERT | High |

The EUT was maximized in all 3 orthogonal axis. The worst-case is shown in the table above

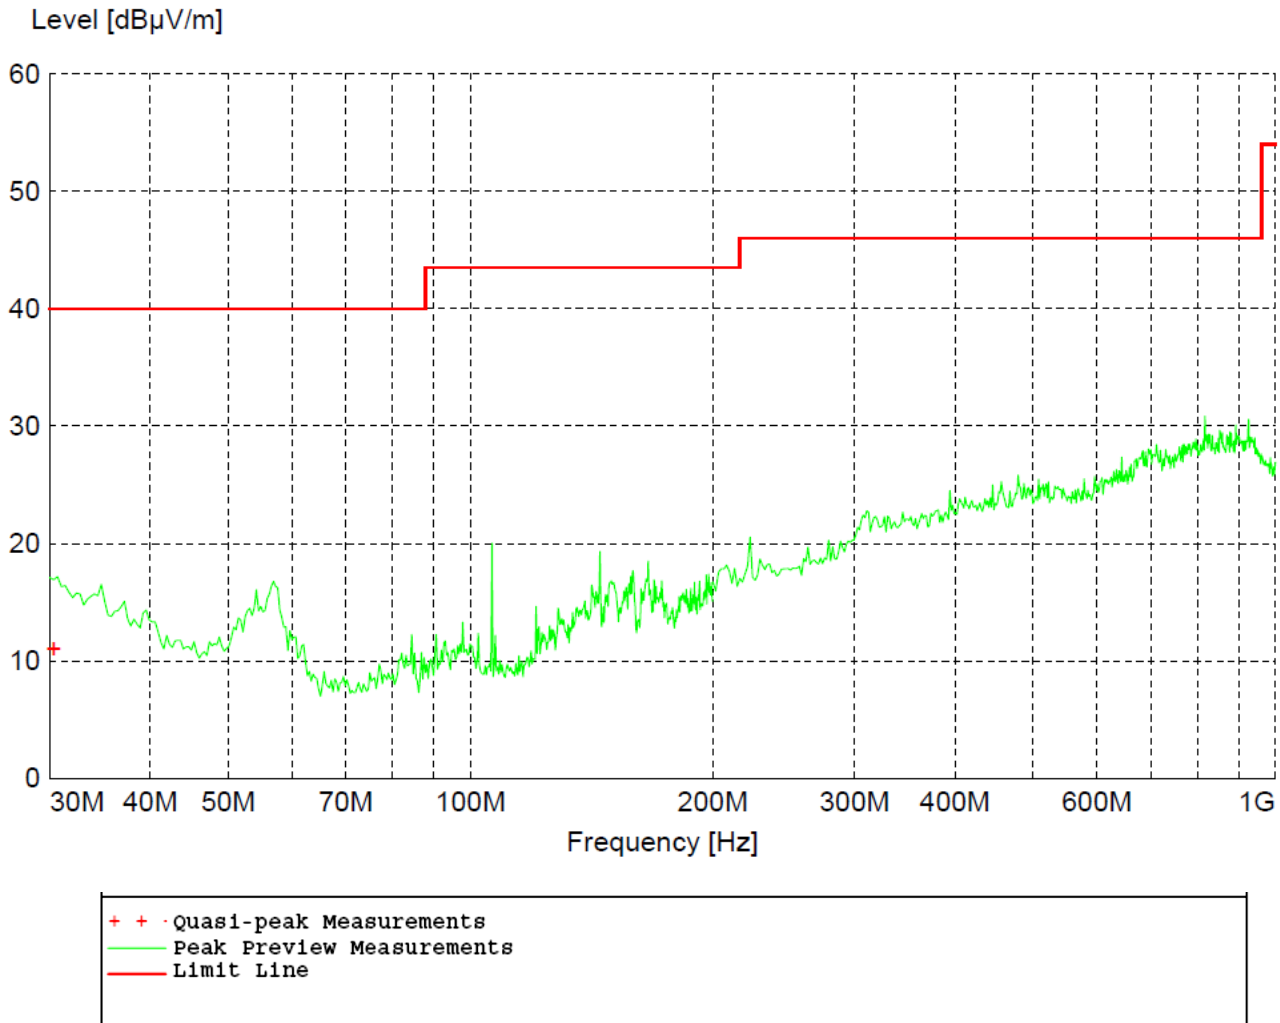


Figure 17 - Radiated Emissions Plot, GMSK

REMARKS:

1. Emission level (dBµV/m) = Raw Value (dBµV) + Correction Factor (dB)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value

Table 5 - Radiated Emissions Quasi-peak Measurements, GMSK

| Frequency | Level | Limit | Margin | Height | Angle | Pol |
|-----------|--------|--------|--------|--------|--------|------|
| MHz | dBµV/m | dBµV/m | dB | cm. | deg. | |
| 30.360000 | 11.03 | 40.00 | 28.97 | 399.00 | 199.00 | VERT |

The EUT was maximized in all 3 orthogonal axis. The worst-case is shown in the table above.

Table 6 - Radiated Emissions Peak Measurements, GMSK

| Frequency MHz | Level dBµV/m | Limit dBµV/m | Margin dB | Height cm. | Angle deg. | Pol | Channel |
|------------------|-----------------|-----------------|--------------|---------------|---------------|------|---------|
| 2402.000000 | 94.64 | 114.00 | 19.36 | 197.00 | 10.00 | VERT | Low |
| 2440.000000 | 93.65 | 114.00 | 20.35 | 197.00 | 10.00 | VERT | Mid |
| 2480.000000 | 91.67 | 114.00 | 22.33 | 197.00 | 10.00 | VERT | High |
| 4804.400000 | 50.16 | 74.00 | 23.84 | 100.00 | 155.00 | VERT | Low |
| 4880.400000 | 45.11 | 74.00 | 28.89 | 100.00 | 0.00 | VERT | Mid |
| 4959.800000 | 43.34 | 74.00 | 30.66 | 100.00 | 114.00 | VERT | High |
| 7205.400000 | 54.19 | 74.00 | 19.81 | 100.00 | 221.00 | VERT | Low |
| 7319.400000 | 53.20 | 74.00 | 20.80 | 100.00 | 219.00 | VERT | Mid |
| 7439.600000 | 53.56 | 74.00 | 20.44 | 228.00 | 216.00 | VERT | High |
| 9607.200000 | 56.51 | 74.00 | 17.49 | 100.00 | 209.00 | VERT | Low |
| 9759.200000 | 57.62 | 74.00 | 16.38 | 100.00 | 170.00 | VERT | Mid |
| 9920.600000 | 55.97 | 74.00 | 18.03 | 100.00 | 162.00 | VERT | High |

The EUT was maximized in all 3 orthogonal axis. The worst-case is shown in the table above

Table 7 - Radiated Emissions Average Measurements, GMSK

| Frequency MHz | Level dBµV/m | Limit dBµV/m | Margin dB | Height cm. | Angle deg. | Pol | Channel |
|------------------|-----------------|-----------------|--------------|---------------|---------------|------|---------|
| 2402.000000 | 93.87 | 94.00 | 0.13 | 197.00 | 10.00 | VERT | Low |
| 2440.000000 | 92.41 | 94.00 | 1.59 | 197.00 | 10.00 | VERT | Mid |
| 2480.000000 | 90.82 | 94.00 | 3.18 | 197.00 | 10.00 | VERT | High |
| 4804.400000 | 41.60 | 74.00 | 32.40 | 100.00 | 155.00 | VERT | Low |
| 4880.400000 | 31.08 | 74.00 | 42.92 | 100.00 | 0.00 | VERT | Mid |
| 4959.800000 | 29.47 | 74.00 | 44.53 | 100.00 | 114.00 | VERT | High |
| 7205.400000 | 44.43 | 74.00 | 29.57 | 100.00 | 221.00 | VERT | Low |
| 7319.400000 | 43.63 | 74.00 | 30.37 | 100.00 | 219.00 | VERT | Mid |
| 7439.600000 | 45.78 | 74.00 | 28.22 | 228.00 | 216.00 | VERT | High |
| 9607.200000 | 46.99 | 74.00 | 27.01 | 100.00 | 209.00 | VERT | Low |
| 9759.200000 | 48.40 | 74.00 | 25.60 | 100.00 | 170.00 | VERT | Mid |
| 9920.600000 | 47.27 | 74.00 | 26.73 | 100.00 | 162.00 | VERT | High |

The EUT was maximized in all 3 orthogonal axis. The worst-case is shown in the table above



| | | | |
|----------------|-----------------|-----|---|
| Report Number: | R20181219-20-11 | Rev | B |
| Prepared for: | Garmin | | |

4.5 BAND EDGES

Test Method: ANSI C63.10-2013, Section(s) 6.10.5

Limits of band-edge measurements:

For emissions outside of the allowed band of operation, the emission level needs to be 50dB under the maximum fundamental field strength. However, if the emissions fall within one of the restricted bands from 15.205 the field strength levels need to be under that of the limits in 15.209.

Test procedures:

Measurements were performed by connecting the output of the transmitter directly into a spectrum analyzer using an impedance matched cable and connector soldered to the EUT in place of the Antenna. The resolution bandwidth was set to 100 kHz and the EMI receiver was used to scan from the band-edge to the fundamental frequency with a peak detector. The highest emissions level beyond the band-edge was measured and recorded. All band edge measurements were evaluated to the general limits in Part 15.209.

To calculate the level at the band-edge frequencies, the difference between the peak and the band edge level was subtracted from the peak radiated value at the fundamental. This value was compared to the 15.209 radiated limits for compliance.

Deviations from test standard:

No deviation.

Test setup:

The field strength was measured by connecting the EUT directly to the spectrum analyzer.

EUT operating conditions:

The EUT was powered by internal battery power unless specified and set to transmit continuously on the lowest frequency channel, highest frequency channel and one in the middle of its operating range. EUT was set to transmit in GFSK and GMSK.



| | | | |
|----------------|-----------------|-----|---|
| Report Number: | R20181219-20-11 | Rev | B |
| Prepared for: | Garmin | | |

Test results:

| CHANNEL | Mode | Band edge /Measurement Frequency (MHz) | Relative Highest out of band level dBm | Relative Fundamental dBm | Delta (dB) | Min Delta (dB) | Result |
|------------------|------|--|--|--------------------------|------------|----------------|--------|
| Low, Continuous | GMSK | 2400.0 | -52.595 | 0.103 | 52.698 | 40.77 | PASS |
| Low, Continuous | GFSK | 2400.0 | -54.616 | -0.018 | 54.597 | 40.64 | PASS |
| High, Continuous | GMSK | 2483.5 | -58.748 | 0.612 | 58.136 | 38.39 | PASS |
| High, Continuous | GFSK | 2483.5 | -60.037 | -0.661 | 59.376 | 37.67 | PASS |

*Minimum delta = [highest fundamental peak field strength from Section 4.2] – [Part 15.209 radiated emissions limit.]

From Section 4.2

Fundamental peak field strength at Low Channel GFSK = 94.77 dBμV/m
 Fundamental peak field strength at High Channel GFSK = 92.39 dBμV/m
 Fundamental peak field strength at Low Channel GMSK = 94.64 dBμV/m
 Fundamental peak field strength at High Channel GMSK = 91.67 dBμV/m

Low Channel minimum delta GFSK = 94.77 – 54.0 dBμV/m = 40.77 dBc
 High Channel minimum delta GFSK = 92.39 – 54.0 dBμV/m = 38.39 dBc
 Low Channel minimum delta GMSK = 94.64 – 54.0 dBμV/m = 40.64 dBc
 High Channel minimum delta GMSK = 91.67 – 54.0 dBμV/m = 37.67 dBc

FCC Part 15.249 requires the attenuation of all emissions outside of the specified band to be at least 50 dB or below the 15.209 limits, whichever is the lesser. In this case, the 15.209 limits were the lesser and used to show compliance.

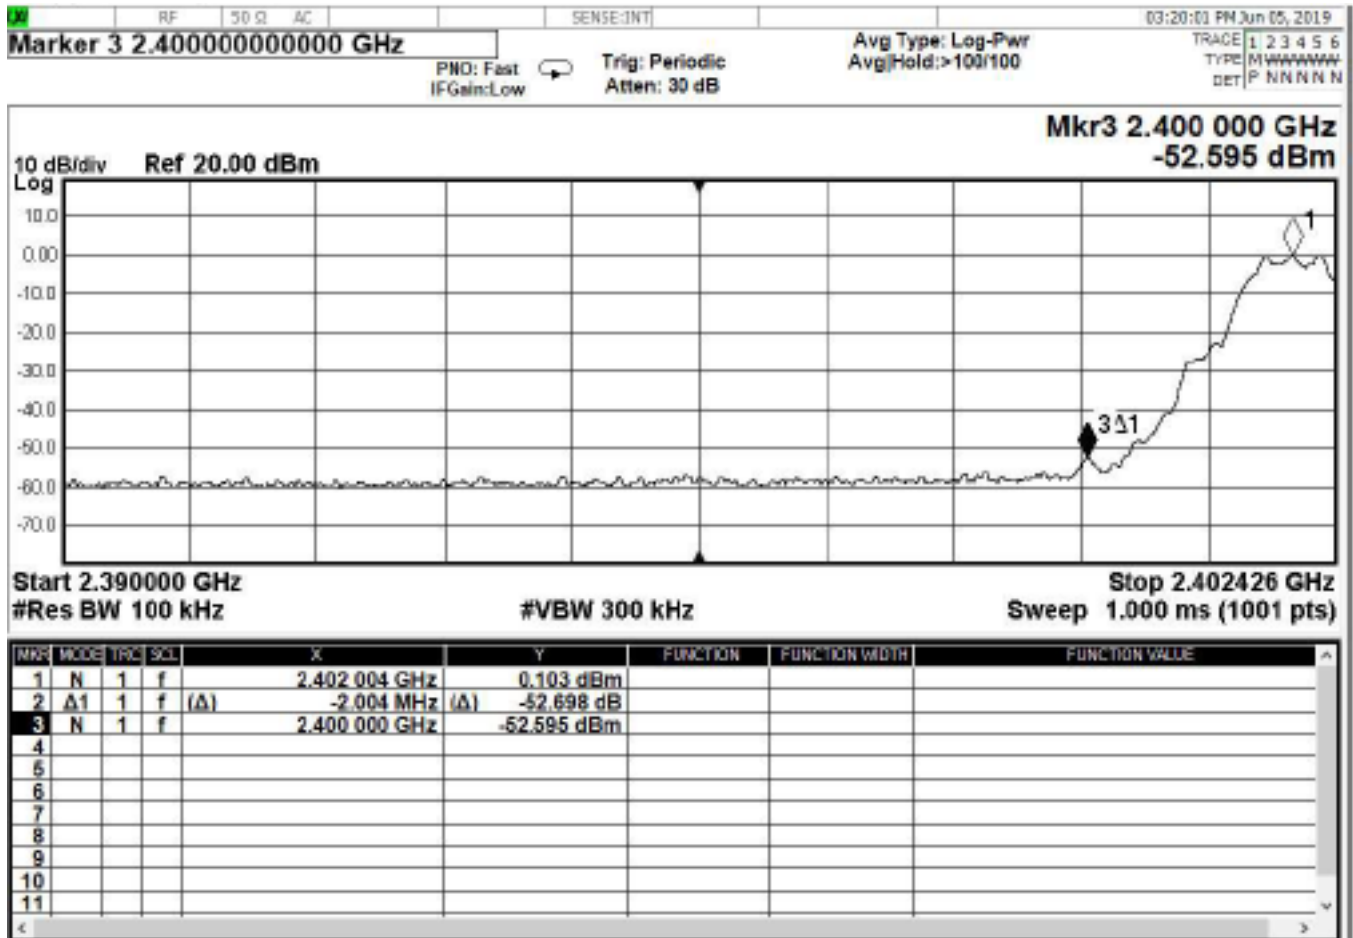


Figure 18 –Band Edge Measurement, Low Channel, GFSK

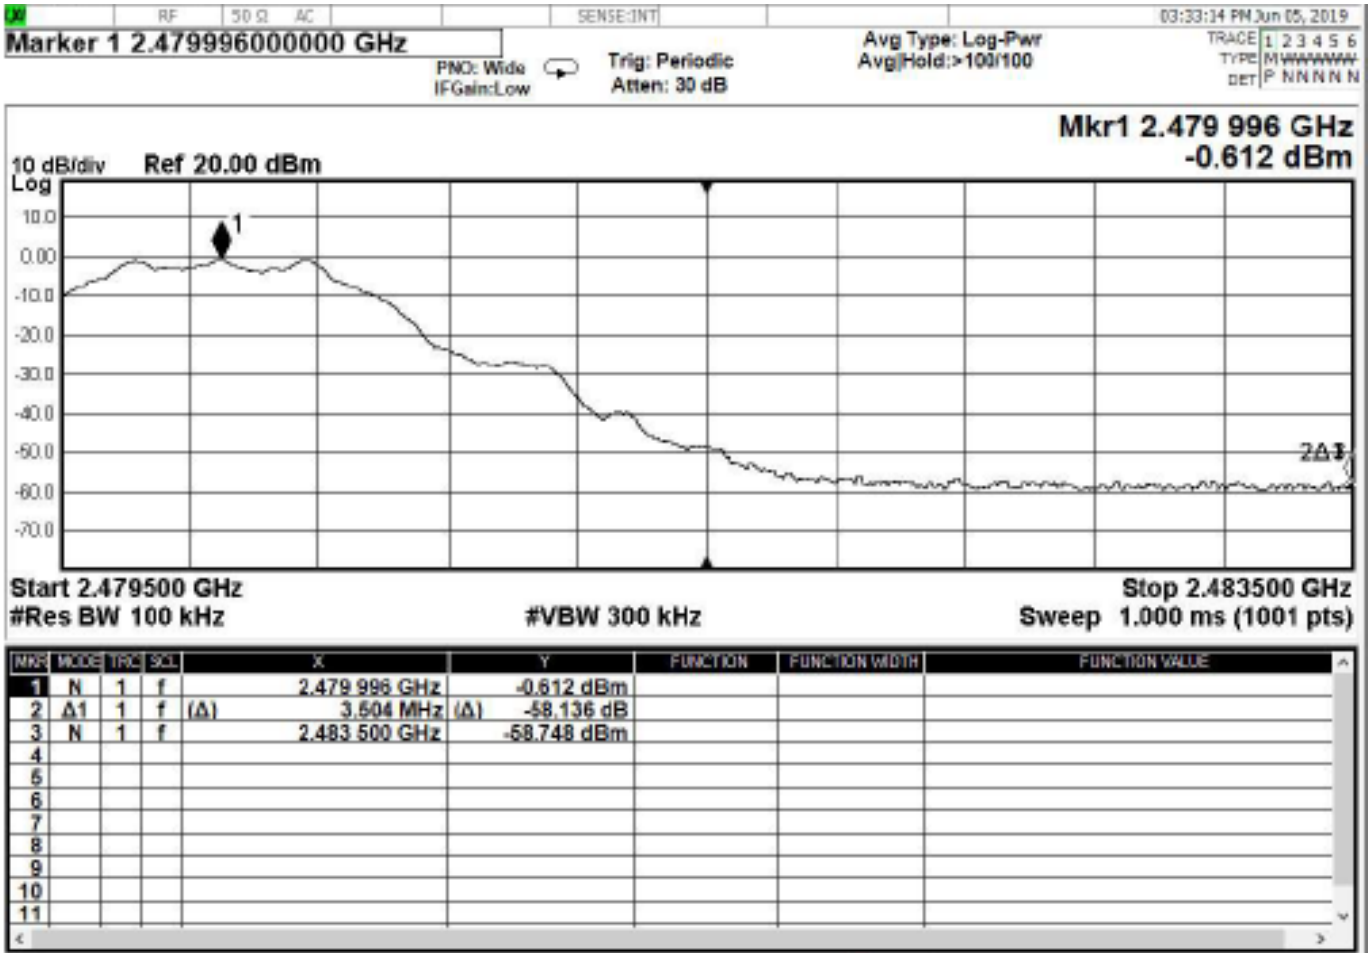


Figure 19 –Band Edge Measurement, High Channel, GFSK

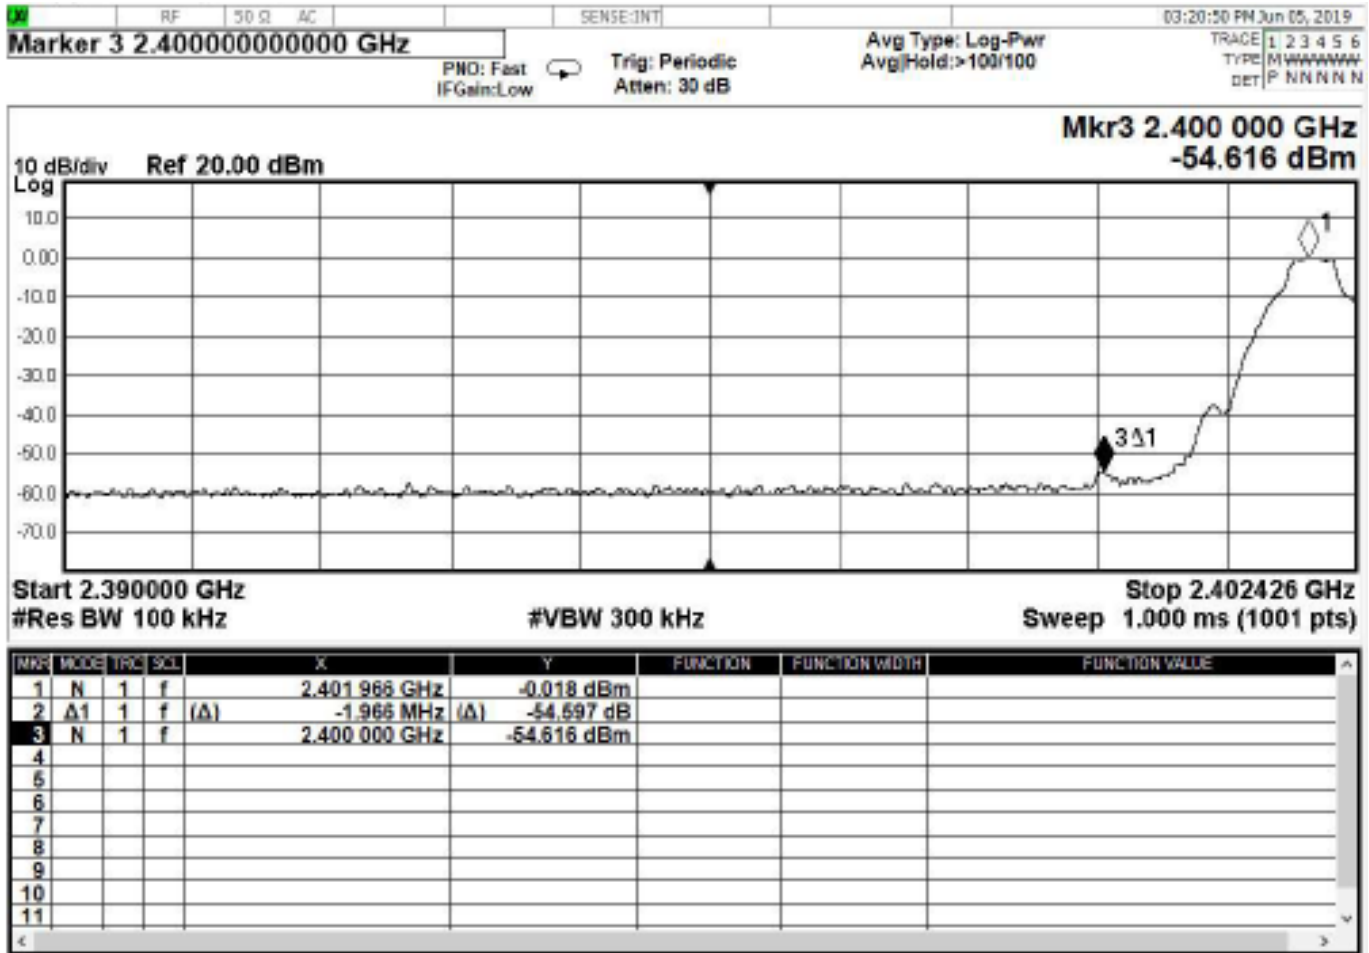


Figure 20 –Band Edge Measurement, Low Channel, GMSK

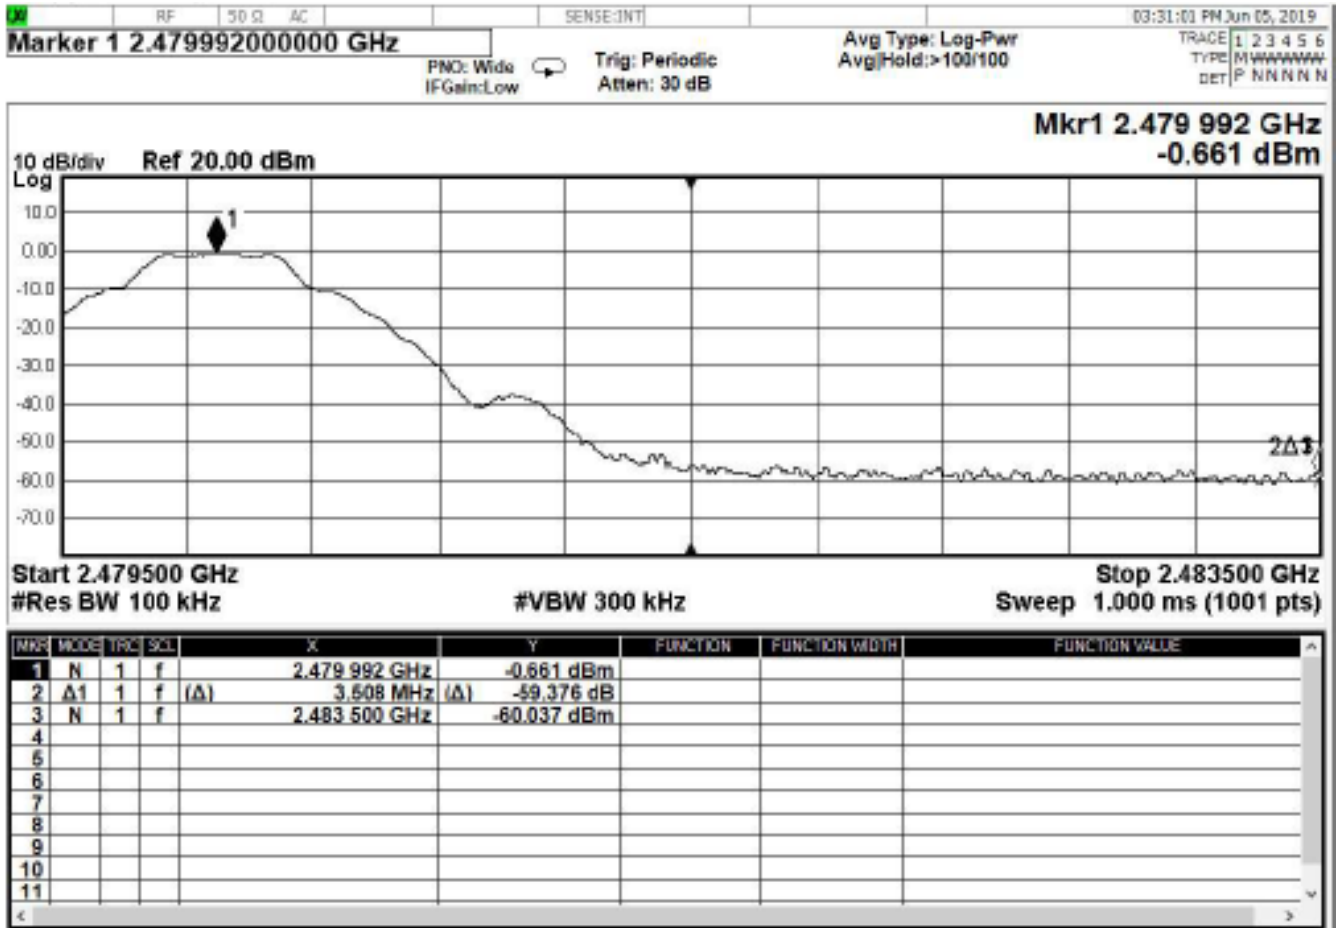


Figure 21 –Band Edge Measurement, High Channel, GMSK

4.6 CONDUCTED AC MAINS EMISSIONS

Test Method: ANSI C63.10-2013, Section(s) 6.2

Limits for conducted emissions measurements:

| FREQUENCY OF EMISSION (MHz) | CONDUCTED LIMIT (dB μ V) | |
|--------------------------------|---------------------------------|----------|
| | Quasi-peak | Average |
| 0.15-0.5 | 66 to 56 | 56 to 46 |
| 0.5-5 | 56 | 46 |
| 5-30 | 60 | 50 |

Notes:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz
3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

Test Procedures:

- a. The EUT was placed 0.8m above a ground reference plane and 0.4 meters from the conducting wall of a shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). The LISN provides 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference as well as the ground.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits are not reported.
- d. Results were compared to the 15.207 limits.

Deviation from the test standard:

No deviation


EUT operating conditions:

The EUT was powered by 5 VDC unless specified and set to transmit continuously on the middle channel.

Test Results:



| | | | | |
|----------------|-----------------|--------|-------------|-------|
| | Marker 1 [T2] | Det | AV Trd | ES-K1 |
| Att 10 dB AUTO | 23.82 dBV | ResBW | 9 kHz | |
| INPUT 2 | 685.0000000 kHz | Meas T | 100 ms Unit | dBV |

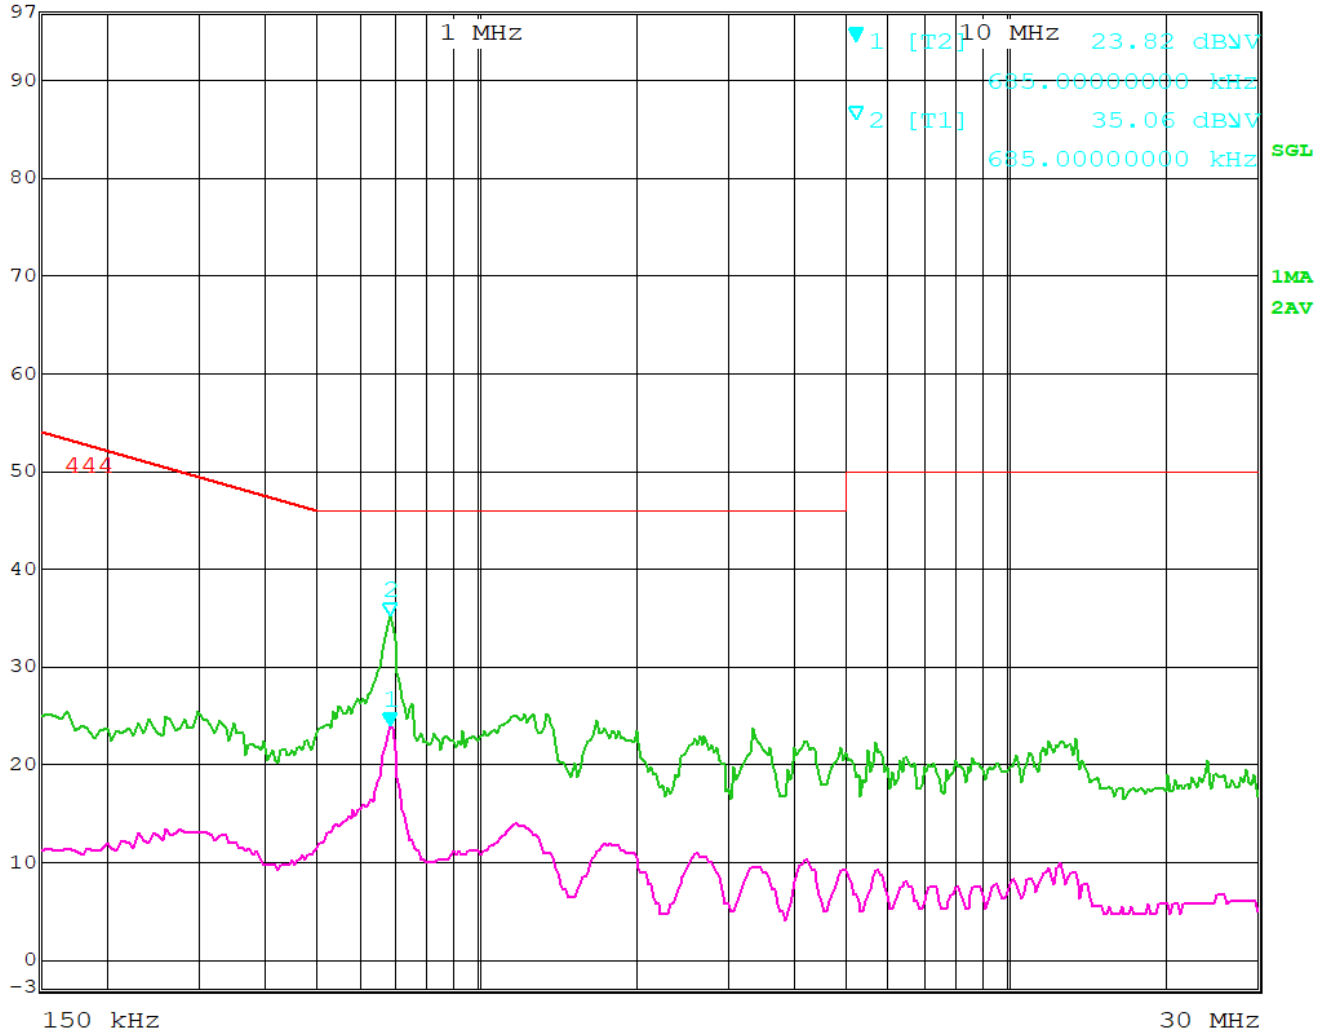


Date: 7.JUN.2019 11:02:20

Figure 22 - Conducted Emissions Plot, Line

All Measurements were found to be at least 10 dB below the limits.



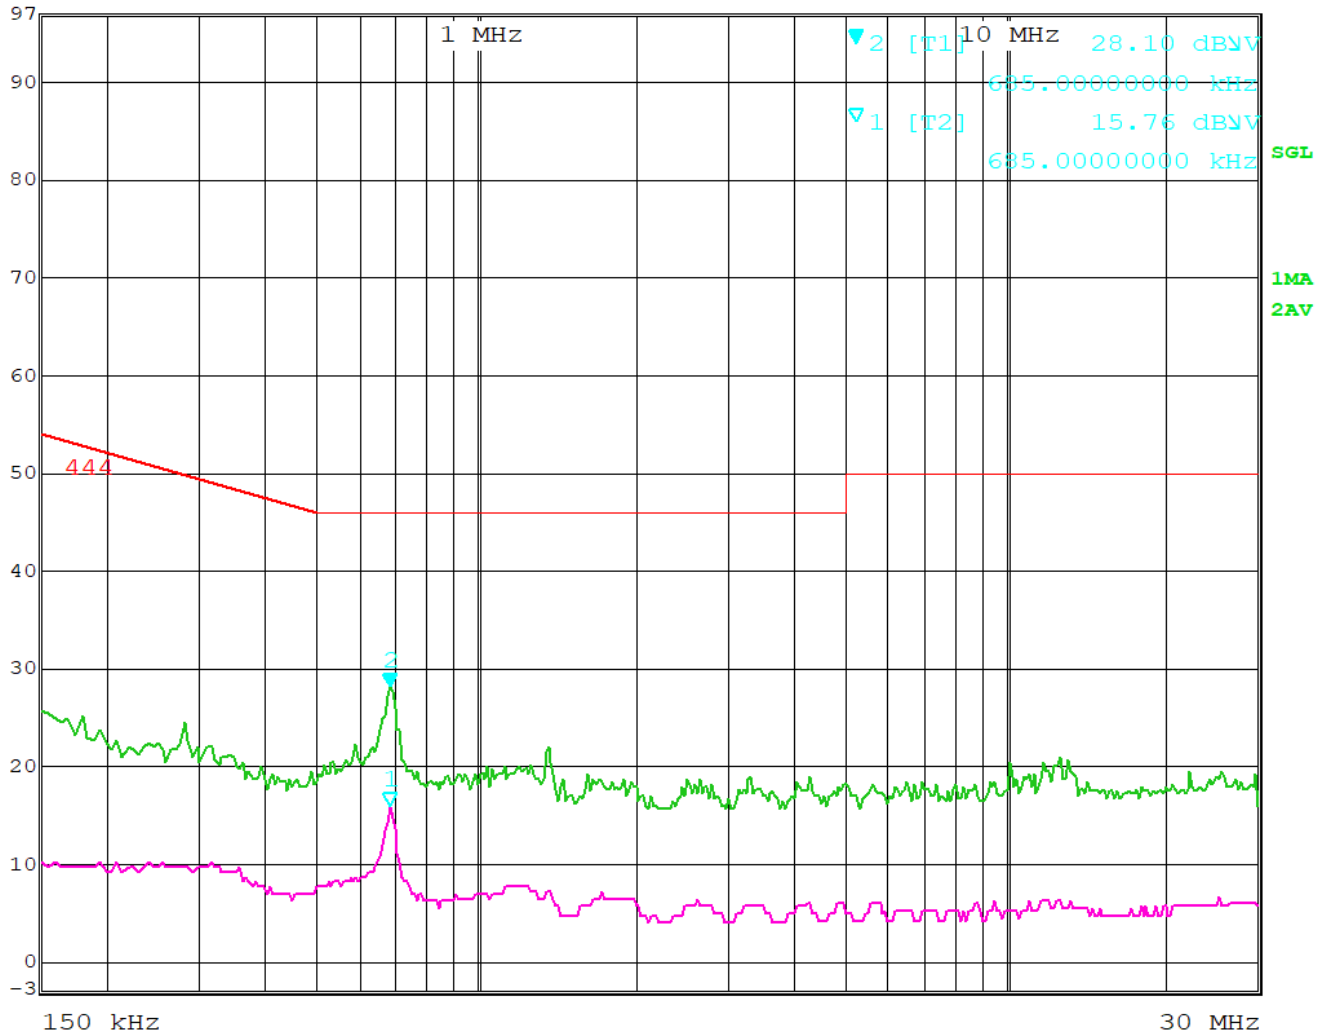Marker 2 [T1] Det AV Trd ES-K1
 Att 10 dB AUTO 28.10 dBV ResBW 9 kHz
 INPUT 2 685.0000000 kHz Meas T 100 ms Unit dBV



Date: 7.JUN.2019 10:56:26

Figure 23 - Conducted Emissions Plot, Neutral

All Measurements were found to be at least 10 dB below the limits.

The plot shows the composite maximum value of both the line and neutral conductors. It shows the worse-case at each frequency.



| | | | |
|----------------|-----------------|-----|---|
| Report Number: | R20181219-20-11 | Rev | B |
| Prepared for: | Garmin | | |

APPENDIX A: SAMPLE CALCULATION

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF - (-CF + AG) + AV$$

where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

AG = Amplifier Gain

AV = Averaging Factor (if applicable)

Assume a receiver reading of 55 dB μ V is obtained. The Antenna Factor of 12 and a Cable Factor of 1.1 is added. The Amplifier Gain of 20 dB is subtracted, giving a field strength of 48.1 dB μ V/m.

$$FS = 55 + 12 - (-1.1 + 20) + 0 = 48.1 \text{ dB}\mu\text{V/m}$$

The 48.1 dB μ V/m value can be mathematically converted to its corresponding level in μ V/m.

$$\text{Level in } \mu\text{V/m} = \text{Common GMSKilogarithm} [(48.1 \text{ dB}\mu\text{V/m})/20] = 254.1 \mu\text{V/m}$$

AV is calculated by the taking the $20 \cdot \log(T_{on}/100)$ where T_{on} is the maximum transmission time in any 100ms window.



| | | | |
|----------------|-----------------|-----|---|
| Report Number: | R20181219-20-11 | Rev | B |
| Prepared for: | Garmin | | |

EIRP Calculations

In cases where direct Antenna port measurement is not possible or would be inaccurate, output power is measured in EIRP. The maximum field strength is measured at a specified distance and the EIRP is calculated using the following equation;

$$EIRP (Watts) = [Field Strength (V/m) \times Antenna distance (m)]^2 / 30$$

$$Power (watts) = 10^{[Power (dBm)/10]} / 1000$$

$$Voltage (dB\mu V) = Power (dBm) + 107 \text{ (for } 50\Omega \text{ measurement systems)}$$

$$Field Strength (V/m) = 10^{[Field Strength (dB\mu V/m) / 20]} / 10^6$$

$$Gain = 1 \text{ (numeric gain for isotropic radiator)}$$

Conversion from 3m field strength to EIRP (d=3):

$$EIRP = [FS(V/m) \times d^2]/30 = FS [0.3] \quad \text{for } d = 3$$

$$EIRP(dBm) = FS(dB\mu V/m) - 10(\log 10^9) + 10\log[0.3] = FS(dB\mu V/m) - 95.23$$

10log(10^9) is the conversion from micro to milli



| | | | |
|----------------|-----------------|-----|---|
| Report Number: | R20181219-20-11 | Rev | B |
| Prepared for: | Garmin | | |

APPENDIX B – MEASUREMENT UNCERTAINTY

Where relevGMSK, the following measurement uncertainty levels have been for tests performed in this test report:

| Test | Frequency Range | Uncertainty Value (dB) |
|-----------------------------|-----------------|------------------------|
| Radiated Emissions, 3m | 30MHz - 1GHz | 3.82 |
| Radiated Emissions, 3m | 1GHz - 18GHz | 4.44 |
| Emissions limits, conducted | 30MHz – 18GHz | ±3.30 dB |

Expanded uncertainty values are calculated to a confidence level of 95%.



| | | | |
|----------------|-----------------|-----|---|
| Report Number: | R20181219-20-11 | Rev | B |
| Prepared for: | Garmin | | |

REPORT END