

FCC/ISED Test Report

Prepared for: Garmin International Inc.

Address: 1200 E. 151st Street
Olathe, Kansas, 66062, USA

Product: A03650

Test Report No: R20181114-21-02B

Approved by:



Nic S. Johnson, NCE


Technical Manager

iNARTE Certified EMC Engineer #EMC-003337-NE

DATE: 29 January 2019

Total Pages: 55

The Nebraska Center for Excellence in Electronics (NCEE) authorizes the above named company to reproduce this report provided it is reproduced in its entirety for use by the company's employees only. Any use that a third party makes of this report, or any reliance on or decisions made based on it, are the responsibility of such third parties. NCEE accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report. This report applies only to the items tested.

	Report Number:	R20181114-21-02	Rev	B
	Prepared for:	Garmin		

REVISION PAGE

Rev. No.	Date	Description
0	9 January 2019	Original – NJohnson Prepared by KVepuri/CFarrington
A	11 January 2019	Updated Section 4.5. NJohnson
B	29 January 2019	Corrected the calculations under Figures 1 and 2. Corrected fundamental value in Table 15 Corrected band edge measurements to match plots. Re-measured GFSK Band edge at lowest channel and added results to report. - NJohnson



Report Number:	R20181114-21-02	Rev	B
Prepared for:	Garmin		

CONTENTS

Revision Page	2
Tables of Figures	4
1.0 Summary of test results.....	5
2.0 EUT Description	6
2.1 Equipment under test	6
2.2 Description of test modes	7
2.3 Description of support units	7
3.0 Laboratory description.....	8
3.1 Laboratory description	8
3.2 Test personnel.....	8
3.3 Test equipment.....	9
4.0 Detailed results	10
4.1 Duty Cycle	10
4.2 Peak Output Power	12
4.3 Bandwidth	19
4.4 Radiated emissions	27
4.5 Band edges	46
Appendix A: Sample Calculation.....	52
Appendix B – Measurement Uncertainty.....	54
REPORT END	55



Report Number:	R20181114-21-02	Rev	B
Prepared for:	Garmin		

TABLES OF FIGURES

Figure Number	Page
Figure 1 – Duty cycle - On Time, 0.0377 ms.....	10
Figure 2 – Duty cycle - Period.....	11
Figure 3 – Output Power, Low Channel, GMSK.....	13
Figure 4 – Output Power, Mid Channel, GMSK.....	14
Figure 5 – Output Power, High Channel, GMSK.....	15
Figure 6 - Output Power, Low Channel, GFSK.....	16
Figure 7 - Output Power, Mid Channel, GFSK.....	17
Figure 8 - Output Power, High Channel, GFSK.....	18
Figure 9 - Bandwidth Measurements Test Setup.....	20
Figure 10 – Occupied Bandwidth, Low Channel, GMSK.....	21
Figure 11 - Occupied Bandwidth, Mid Channel, GMSK.....	22
Figure 12 - Occupied Bandwidth, High Channel, GMSK.....	23
Figure 13 – Occupied Bandwidth, Low Channel, GFSK.....	24
Figure 14 - Occupied Bandwidth, Mid Channel, GFSK.....	25
Figure 15 - Occupied Bandwidth, High Channel, GFSK.....	26
Figure 16 - Radiated Emissions Test Setup.....	28
Figure 17 - Radiated Emissions Plot, Receive, GFSK.....	30
Figure 18 - Radiated Emissions Plot, Receive, GMSK.....	32
Figure 19 - Radiated Emissions Plot, Low Channel, GFSK.....	34
Figure 20 - Radiated Emissions Plot, Mid Channel, GFSK.....	36
Figure 21 - Radiated Emissions Plot, High Channel, GFSK.....	38
Figure 22 - Radiated Emissions Plot, Low Channel, GMSK.....	40
Figure 23 - Radiated Emissions Plot, Mid Channel, GMSK.....	42
Figure 24 - Radiated Emissions Plot, High Channel, GMSK.....	44
Figure 25 - Band Edge, Low Channel, GMSK.....	48
Figure 26 –Band Edge Measurement, High Channel, GMSK.....	49
Figure 27 –Band Edge, Low Channel, GFSK.....	50
Figure 28 – Band Edge Measurement, High Channel, GFSK.....	51



Report Number:	R20181114-21-02	Rev	B
Prepared for:	Garmin		

1.0 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

- (1) US Code of Federal Regulations, Title 47, Part 15
- (2) ISED RSS-Gen, Issue 5
- (3) ISED RSS-210, Issue 9

SUMMARY			
Requirement	Test Type and Limit	Result	Remark
FCC 15.203	Unique Antenna Requirement	Pass	PCB Antenna
FCC 15.35 RSS-Gen, 6.10	Duty cycle of pulsed emissions	N/A	Not required
NA	Maximum Peak Output Power	N/A	Informational Purpose Only
NA	Minimum Bandwidth	N/A	Informational Purpose Only
FCC 15.209 RSS-Gen, 7.1	Receiver Radiated Emissions	Pass	Meets the requirement of the limit.
FCC 15.209 RSS-Gen, 8.9 RSS-210 A1.2 FCC 15.249(a)	Transmitter Radiated Emissions	Pass	Meets the requirement of the limit.
FCC 15.209, 15.205, 15.249(d) RSS-Gen, 8.9 RSS-210, 5.5	Band Edge Measurement	Pass	Meets the requirement of the limit.
FCC 15.207 RSS-Gen. 8.8	Conducted AC Emissions	N/A	No provisions for connection to AC mains



Report Number:	R20181114-21-02	Rev	B
Prepared for:	Garmin		

2.0 EUT DESCRIPTION

2.1 EQUIPMENT UNDER TEST

Summary

The Equipment Under Test (EUT) was a battery powered GMSK and GFSK transceiver manufactured by GARMIN inc.

EUT	A03650
EUT Received	12 December 2018
EUT Tested	12 December 2018- 3 January 2019
Serial No.	57100 (radiated tests); 57301 (conducted tests, modified with SMA connector in place of Antenna)
Operating Band	2400 – 2483.5 MHz
Device Type	GMSK, GFSK
Power Supply	CR2032 3V battery

NOTE: For more detailed features description, please refer to the manufacturer's specifications or user's manual.



Report Number:	R20181114-21-02	Rev	B
Prepared for:	Garmin		

2.2 DESCRIPTION OF TEST MODES

The EUT operates on, and was tested at the frequencies below:

Channel	Frequency
Low	2402 MHz
Mid	2440 MHz
High	2480 MHz

These are the only three representative channels tested in the frequency range according to FCC Part 15.31 and RSS-Gen Table A1. See the operational description for a list of all channel frequency and designations.

This EUT was set to transmit in a worse-case scenario with modulation on. The manufacturer modified the unit to transmit continuously on the lowest, middle and highest frequency channels.

The EUT was tested for spurious emissions while running off of battery power.

2.3 DESCRIPTION OF SUPPORT UNITS

None

3.0 LABORATORY DESCRIPTION

3.1 LABORATORY DESCRIPTION

All testing was performed at the following Facility:

The Nebraska Center for Excellence in Electronics (NCEE Labs)
 4740 Discovery Drive
 Lincoln, NE 68521

A2LA Certificate Number:	1953.01
FCC Accredited Test Site Designation No:	US1060
Industry Canada Test Site Registration No:	4294A-1
NCC CAB Identification No:	US0177

Environmental conditions varied slightly throughout the tests:

Relative humidity of $35 \pm 4\%$
 Temperature of $22 \pm 3^\circ$ Celsius



3.2 TEST PERSONNEL

No.	PERSONNEL	TITLE	ROLE
1	Nic Johnson	Technical Manager	Review/editing
2	Karthik Vepuri	Test Engineer	Testing and report
3	Caleb Farrington	Test Technician	Testing and report

Notes:

All personnel are permanent staff members of NCEE Labs. No testing or review was sub-contracted or performed by sub-contracted personnel.



Report Number:	R20181114-21-02	Rev	B
Prepared for:	Garmin		

3.3 TEST EQUIPMENT

DESCRIPTION AND MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CALIBRATION DATE	CALIBRATION DUE DATE
Rohde & Schwarz Test Receiver	ES126	100037	30 Jan 2018	30 Jan 2019
EMCO Biconilog Antenna	3142B	1647	02 Aug 2017	02 Aug 2019
EMCO Horn Antenna	3115	6416	26 Jan 2018	26 Jan 2020
EMCO Horn Antenna	3116	2576	31 Jan 2018	31 Jan 2020
Rohde & Schwarz Preamplifier	TS-PR18	3545700803	09 Mar 2018*	09 Mar 2019*
Trilithic High Pass Filter	6HC330	23042	09 Mar 2018*	09 Mar 2019*
Rohde & Schwarz LISN	ESH3-Z5	836679/010	25 Jul 2017	25 Jul 2018
RF Cable (preamplifier to antenna)	MFR-57500	01-07-002	09 Mar 2018*	09 Mar 2019*
RF Cable (antenna to 10m chamber bulkhead)	FSCM 64639	01E3872	09 Mar 2018*	09 Mar 2019*
RF Cable (10m chamber bulkhead to control room bulkhead)	FSCM 64639	01E3874	09 Mar 2018*	09 Mar 2019*
RF Cable (Control room bulkhead to RF switch)	FSCM 64639	01E3871	09 Mar 2018*	09 Mar 2019*
RF Cable (RF switch to test receiver)	FSCM 64639	01F1206	09 Mar 2018*	09 Mar 2019*
RF switch – Rohde and Schwarz	TS-RSP	1113.5503.14	09 Mar 2018*	09 Mar 2019*
N connector bulkhead (10m chamber)	PE9128	NCEEBH1	09 Mar 2018*	09 Mar 2019*
N connector bulkhead (control room)	PE9128	NCEEBH2	09 Mar 2018*	09 Mar 2019*

*Internal Characterization

Notes:

All equipment is owned by NCEE Labs and stored permanently at NCEE Labs facilities.

4.0 DETAILED RESULTS

4.1 DUTY CYCLE

Test Method: ANSI C63.10-2013, Section 7.5



Marker 1 [T1]	RBW	1 MHz	RF Att	10 dB
Ref Lvl	53.32 dB μ V	VBW	1 MHz	
87 dB μ V	1.060120 ms	SWT	4.6 ms	Unit dB μ V

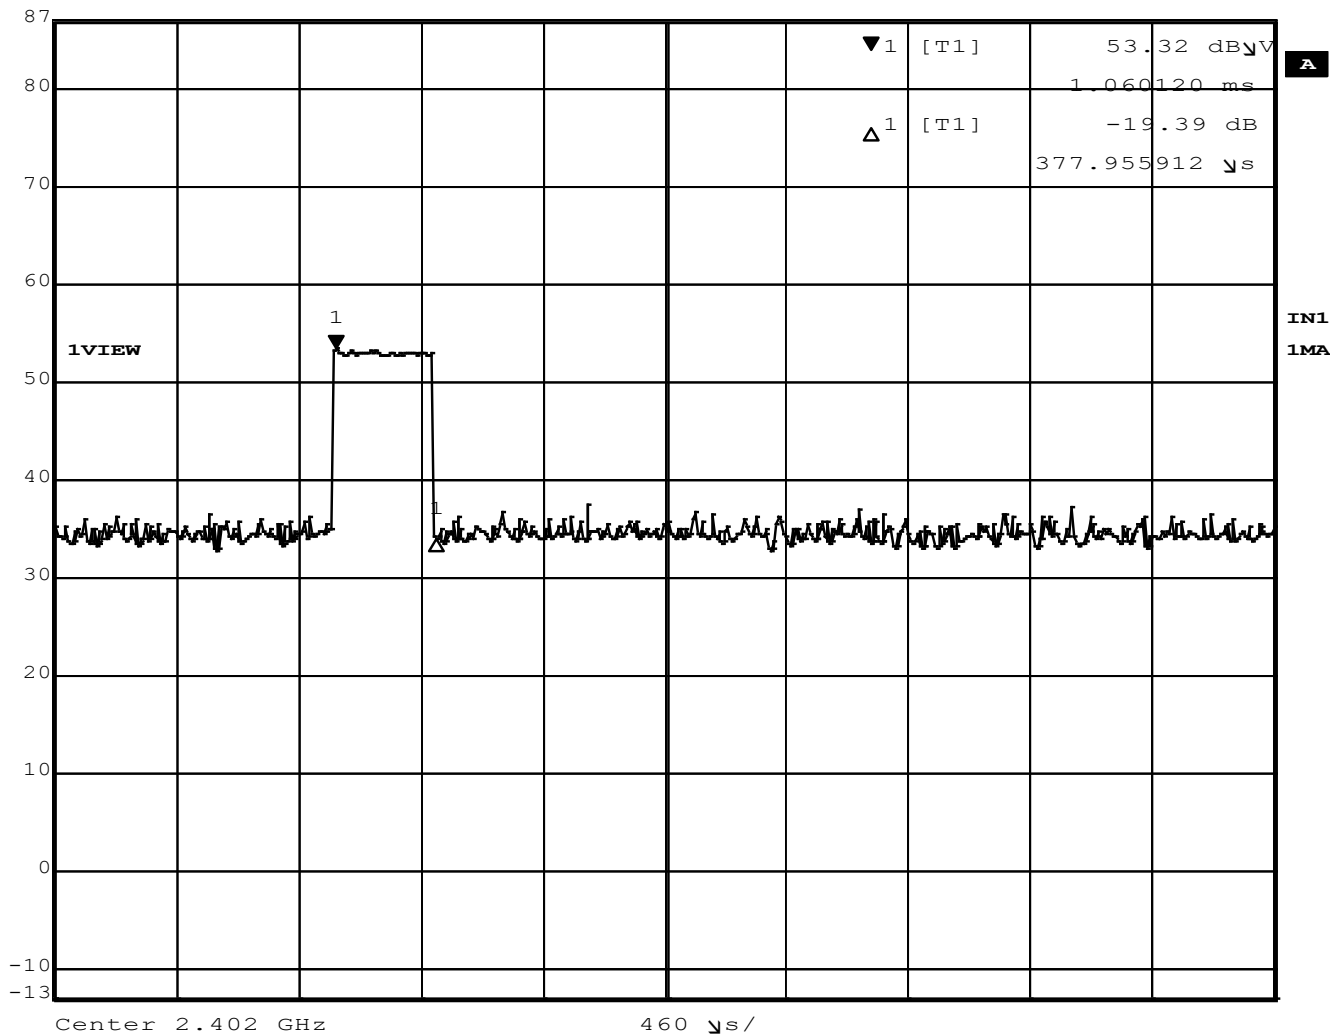


Figure 1 – Duty cycle - On Time, 0.378 ms



Delta 2 [T1] RBW 1 MHz RF Att 10 dB
 Ref Lvl -0.34 dB VBW 1 MHz
 87 dB_V 286.573146 ms SWT 1 s Unit dB_V

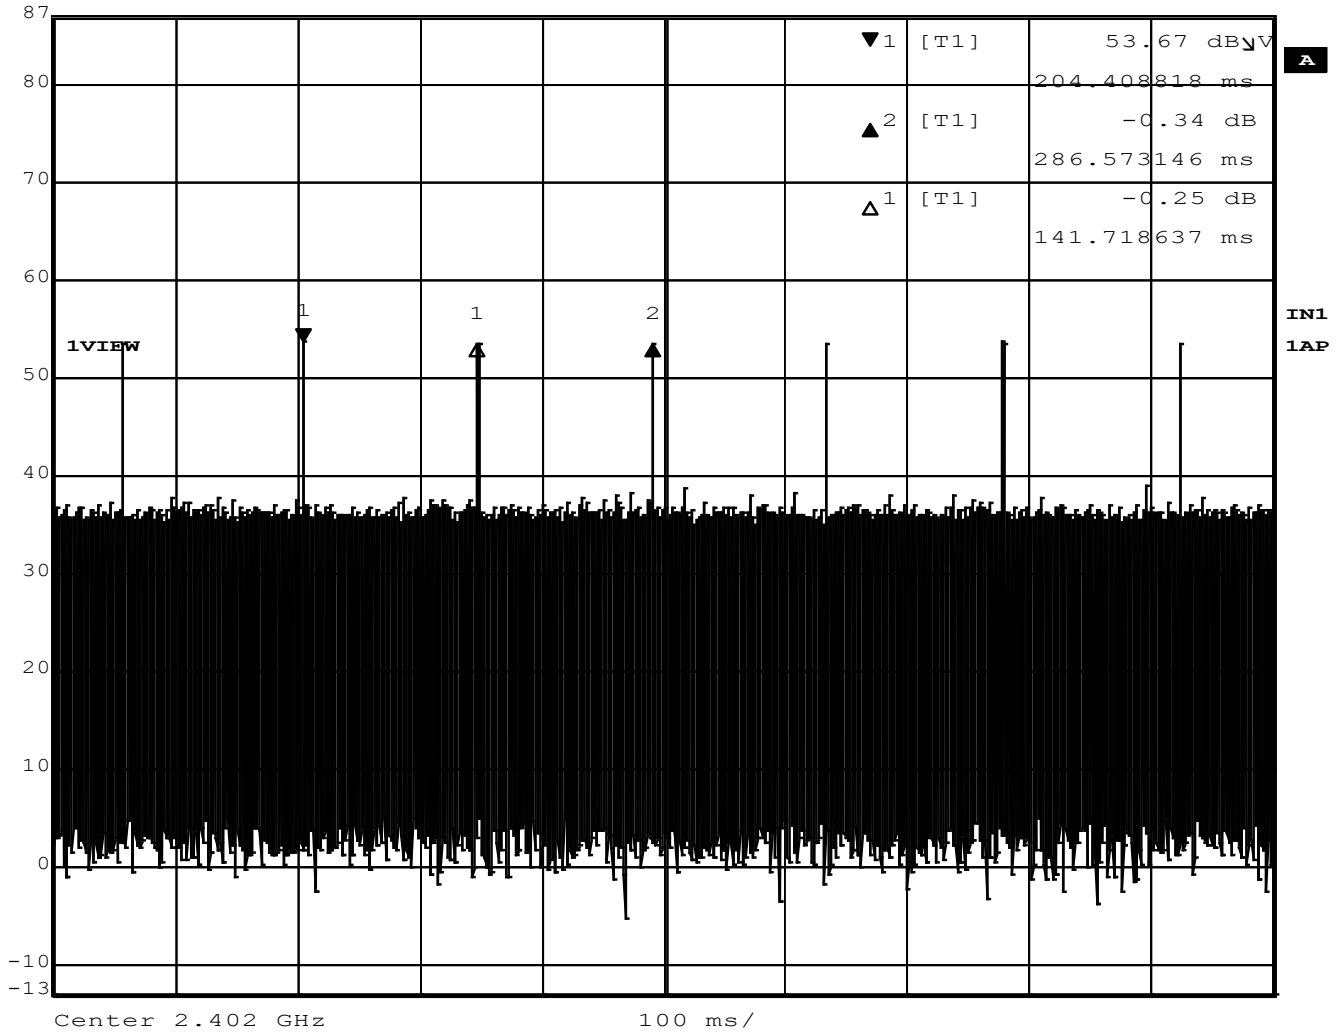


Figure 2 – Duty cycle - Period

Duty cycle correction factor = $20 \cdot \log((0.378)/100) = -48.45$ dB

Note 1: 100ms is the longest allowed period per FCC Part 15.35

Note 2: 20dB is the maximum useable averaging factor, so that was used.



Report Number:	R20181114-21-02	Rev	B
Prepared for:	Garmin		

4.2 PEAK OUTPUT POWER

Test Method: N/A

For Informational Purposes only

Test procedures:

1. The EUT was connected to the spectrum analyzer directly with a low-loss shielded coaxial cable
2. The resolution bandwidth was set to 10 MHz and the video bandwidth was set to 10 MHz to capture the signal. The analyzer used a peak detector in max hold mode.

Deviations from test standard:

No deviation.

Test setup:

The field strength was measured by connecting the EUT directly to the spectrum analyzer. See Section 4.2.

EUT operating conditions:

The EUT was powered by 3 VDC unless specified and set to transmit continuously on the lowest, middle and highest frequency channels.

Test results:

Peak Output Power

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK OUTPUT POWER (dBm)	PEAK OUTPUT POWER (mW)	Method	RESULT	Transmitter
1	2402	4.15	2.60	Conducted	PASS	GMSK
2	2440	3.23	2.10	Conducted	PASS	GMSK
3	2480	2.09	1.62	Conducted	PASS	GMSK
1	2402	2.14	1.64	Conducted	PASS	GFSK
2	2440	1.63	1.46	Conducted	PASS	GFSK
3	2480	0.59	1.15	Conducted	PASS	GFSK

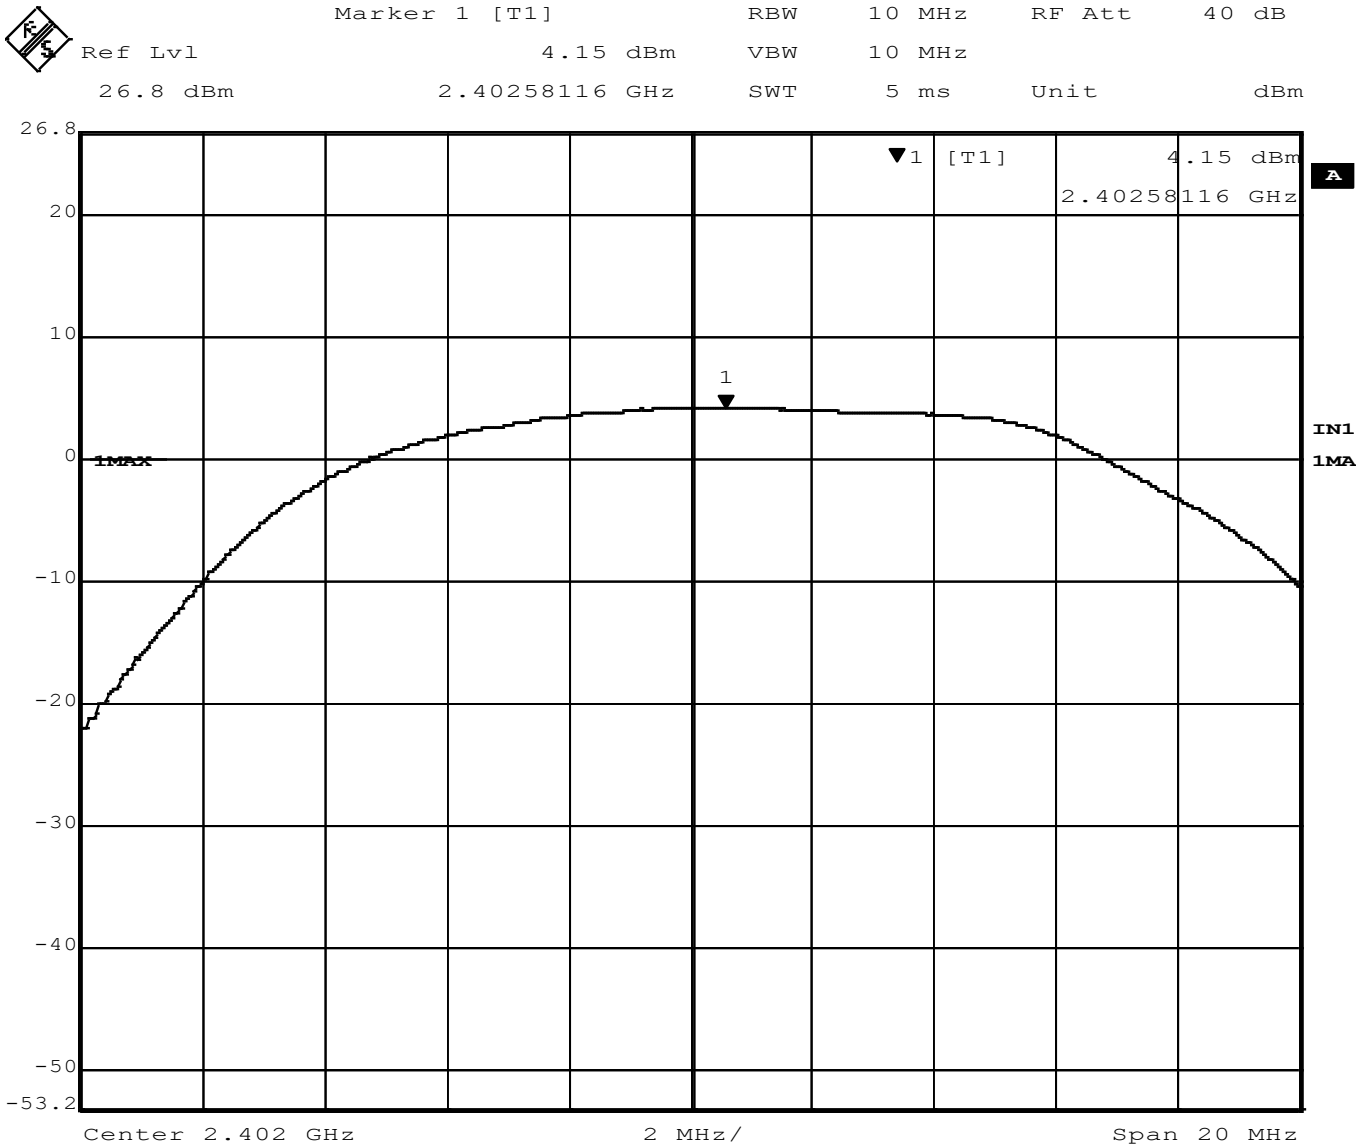


Figure 3 – Output Power, Low Channel, GMSK

Output power 4.15 dBm

Cable loss was less than 0.1 dB and not included

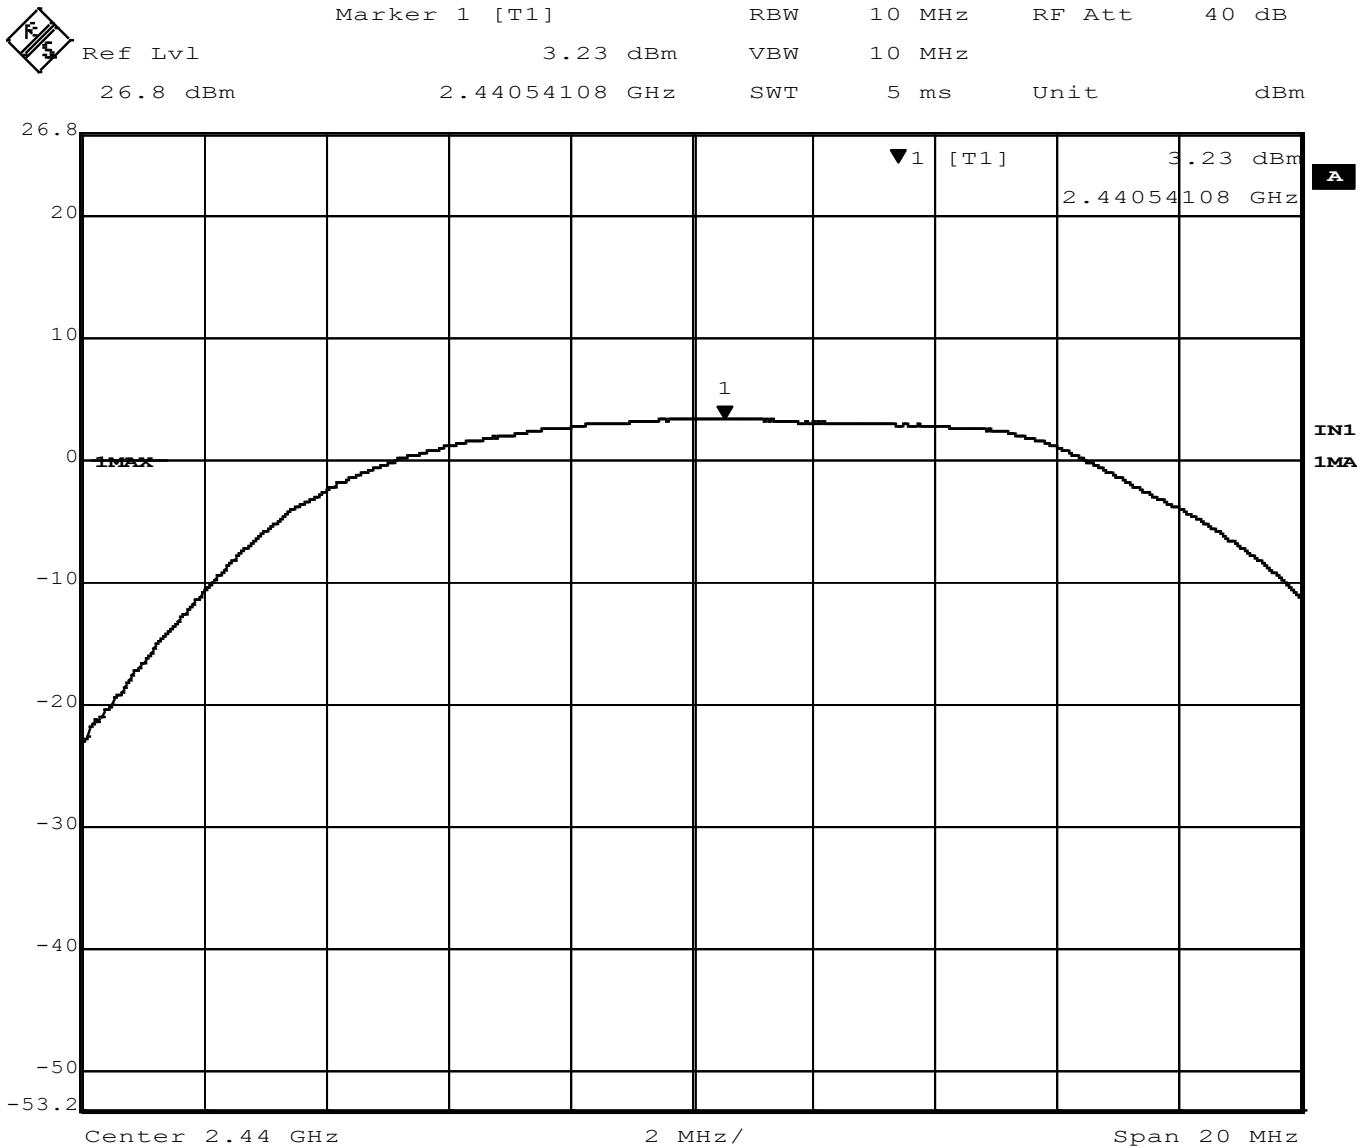


Figure 4 – Output Power, Mid Channel, GMSK

Output power = 3.23 dBm

Cable loss was less than 0.1 dB and not included



Marker 1 [T1]	RBW	10 MHz	RF Att	40 dB
Ref Lvl	2.09 dBm	VBW	10 MHz	
26.8 dBm	2.47949900 GHz	SWT	5 ms	Unit dBm

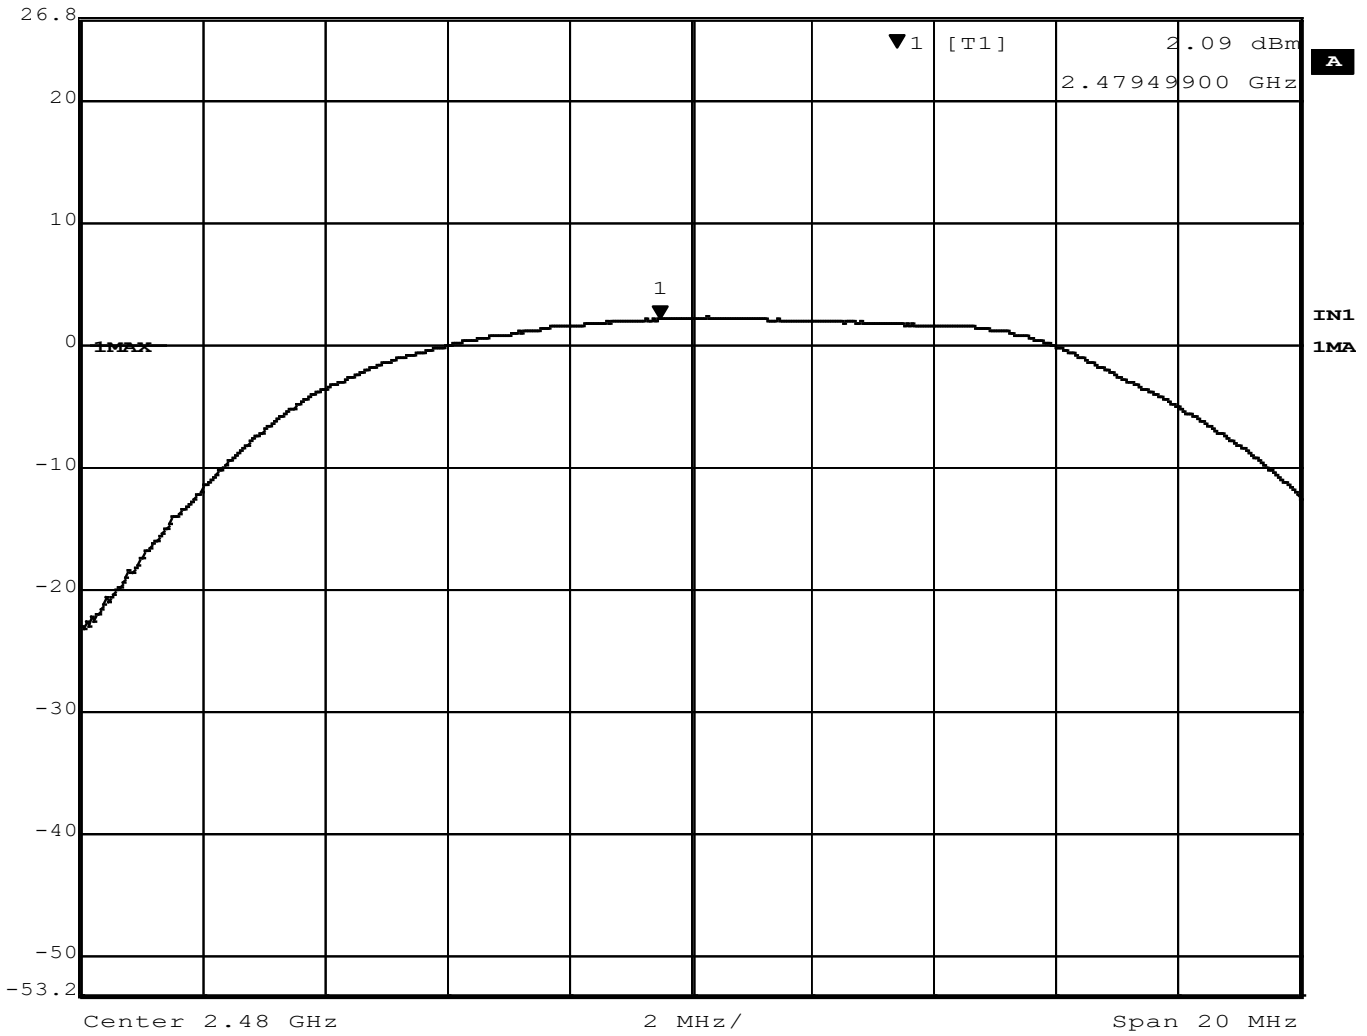



Figure 5 – Output Power, High Channel, GMSK

Output power = 2.09 dBm

Cable loss was less than 0.1 dB and not included



Marker 1 [T1]	RBW	10 MHz	RF Att	50 dB
Ref Lvl	2.14 dBm	VBW	10 MHz	
25 dBm	2.40161924 GHz	SWT	5 ms	Unit dBm

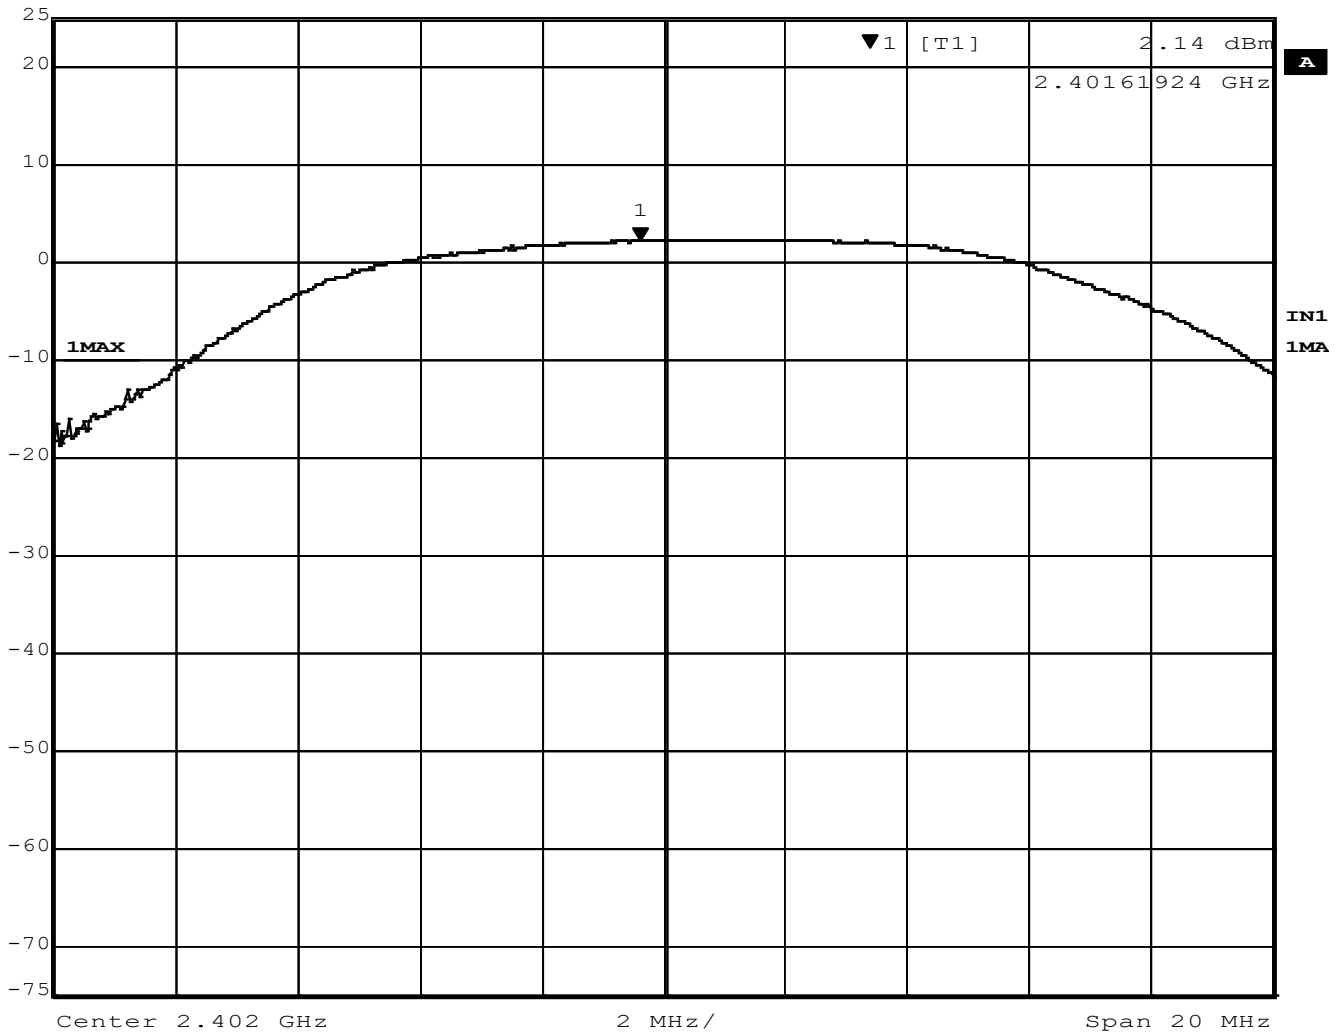

Date: 3.JAN.2019 08:34:27


Figure 6 - Output Power, Low Channel, GFSK

Output power = 2.14 dBm

Cable loss was less than 0.1 dB and not included



Marker 1 [T1] RBW 10 MHz RF Att 50 dB
 Ref Lvl 1.63 dBm VBW 10 MHz
 25 dBm 2.43985972 GHz SWT 5 ms Unit dBm

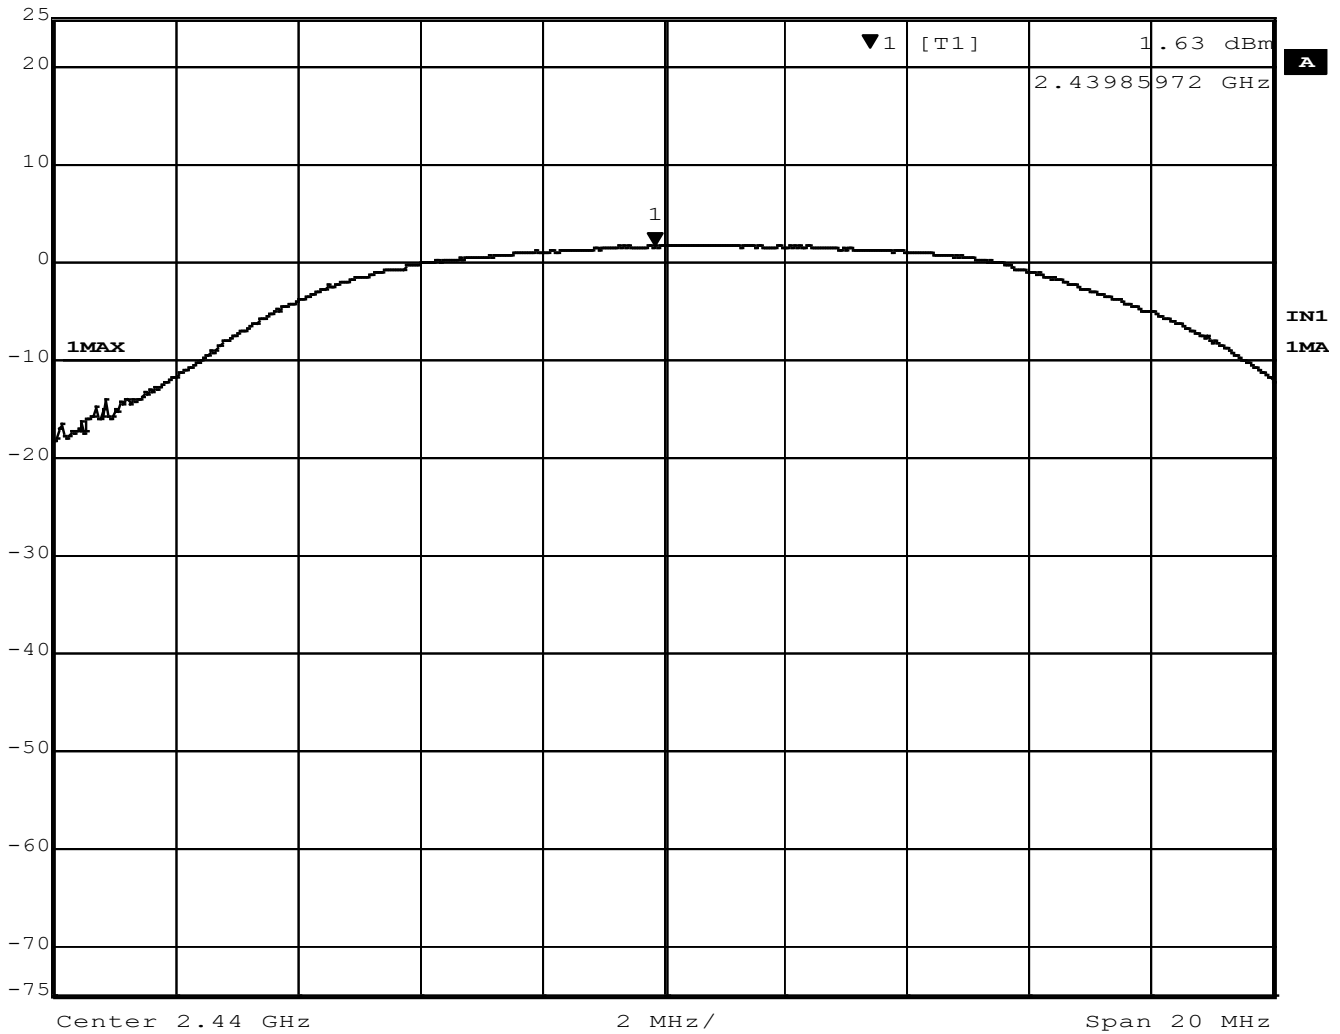

Date: 3.JAN.2019 08:48:51


Figure 7 - Output Power, Mid Channel, GFSK

Output power = 1.63 dBm

Cable loss was less than 0.1 dB and not included



Marker 1 [T1]	RBW	10 MHz	RF Att	50 dB
Ref Lvl	0.59 dBm	VBW	10 MHz	
25 dBm	2.48022044 GHz	SWT	5 ms	Unit dBm

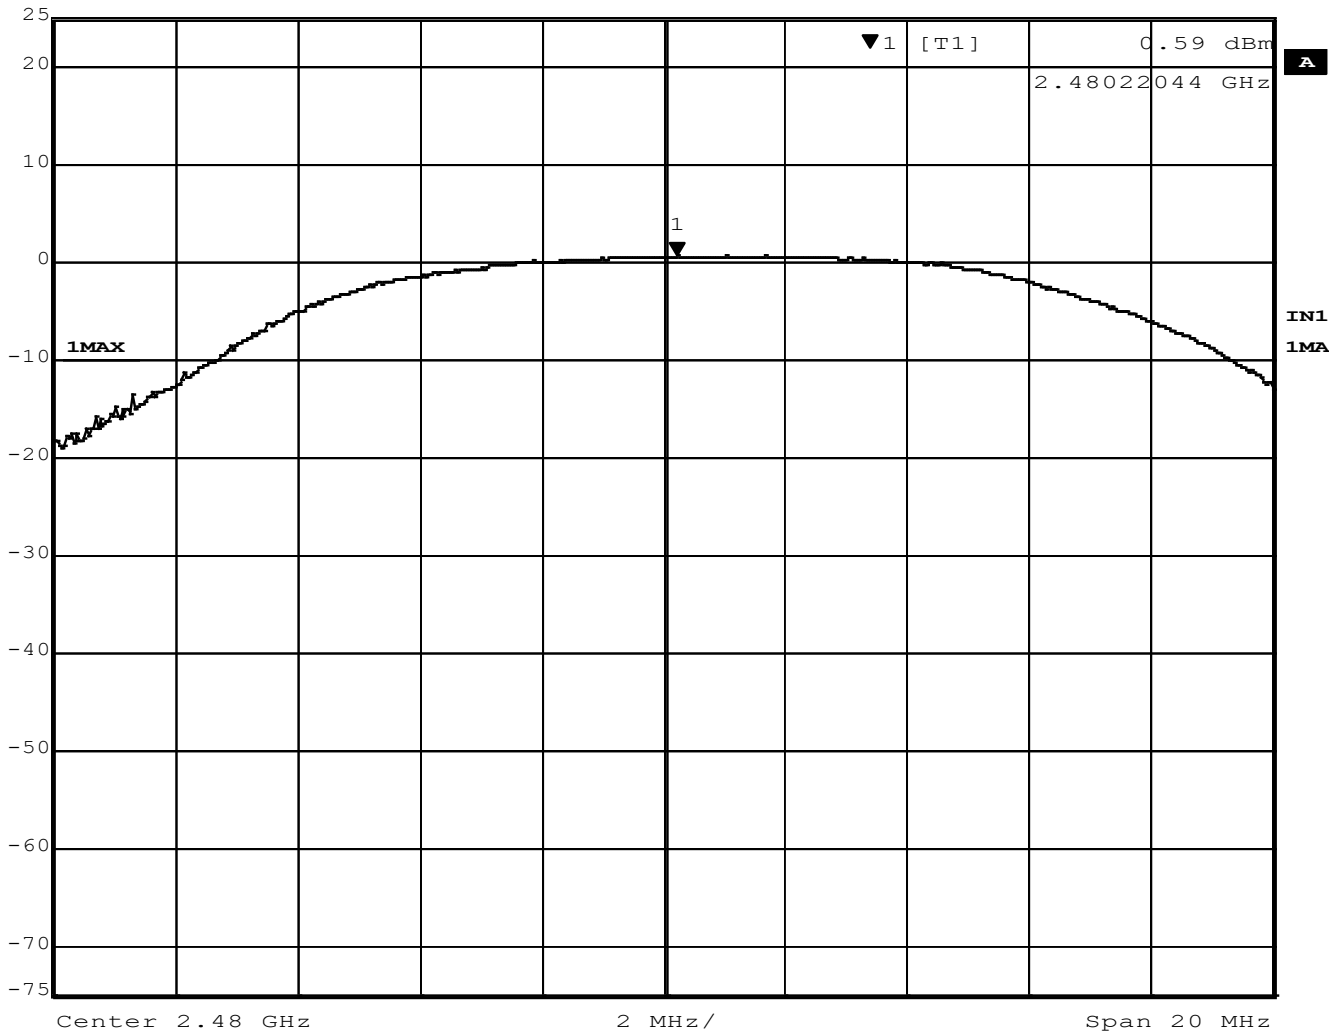

Date: 3.JAN.2019 08:59:44

Figure 8 - Output Power, High Channel, GFSK

Output power = 0.59 dBm

Cable loss was less than 0.1 dB and not included



Report Number:	R20181114-21-02	Rev	B
Prepared for:	Garmin		

4.3 BANDWIDTH

Test Method: ANSI C63.10-2013, Section(s) 6.9.2

Limits of bandwidth measurements:

For Informational Purposes only

Test procedures:

1. The EUT was connected to the spectrum analyzer directly with a low-loss shielded coaxial cable
2. The resolution bandwidth was set to 100 kHz and the video bandwidth was set to 300 kHz to capture the signal. The analyzer used a peak detector in max hold mode.
3. The Occupied Bandwidth is defined as the bandwidth of which is higher than peak power minus 20dB.

Test setup:

The field strength was measured by connecting the EUT directly to the spectrum analyzer.

Deviations from test standard:

No deviation.

Test setup:



Figure 9 - Bandwidth Measurements Test Setup

EUT operating conditions:

The EUT was powered by 3 VDC unless specified and set to transmit continuously on the lowest, middle and highest frequency channel.

Test results:

Occupied Bandwidth

CHANNEL	Mode	CHANNEL FREQUENCY (MHz)	OBW (KHz)	RESULT
Low	GMSK	2402	998.00	PASS
Mid	GMSK	2440	1000.00	PASS
High	GMSK	2480	1010.00	PASS
Low	GFSK	2402	1016.03	PASS
Mid	GFSK	2440	1016.03	PASS
High	GFSK	2480	1016.03	PASS



Marker 1 [T1] RBW 100 kHz RF Att 40 dB
 Ref Lvl 3.94 dBm VBW 300 kHz
 26.8 dBm 2.40202705 GHz SWT 5 ms Unit dBm

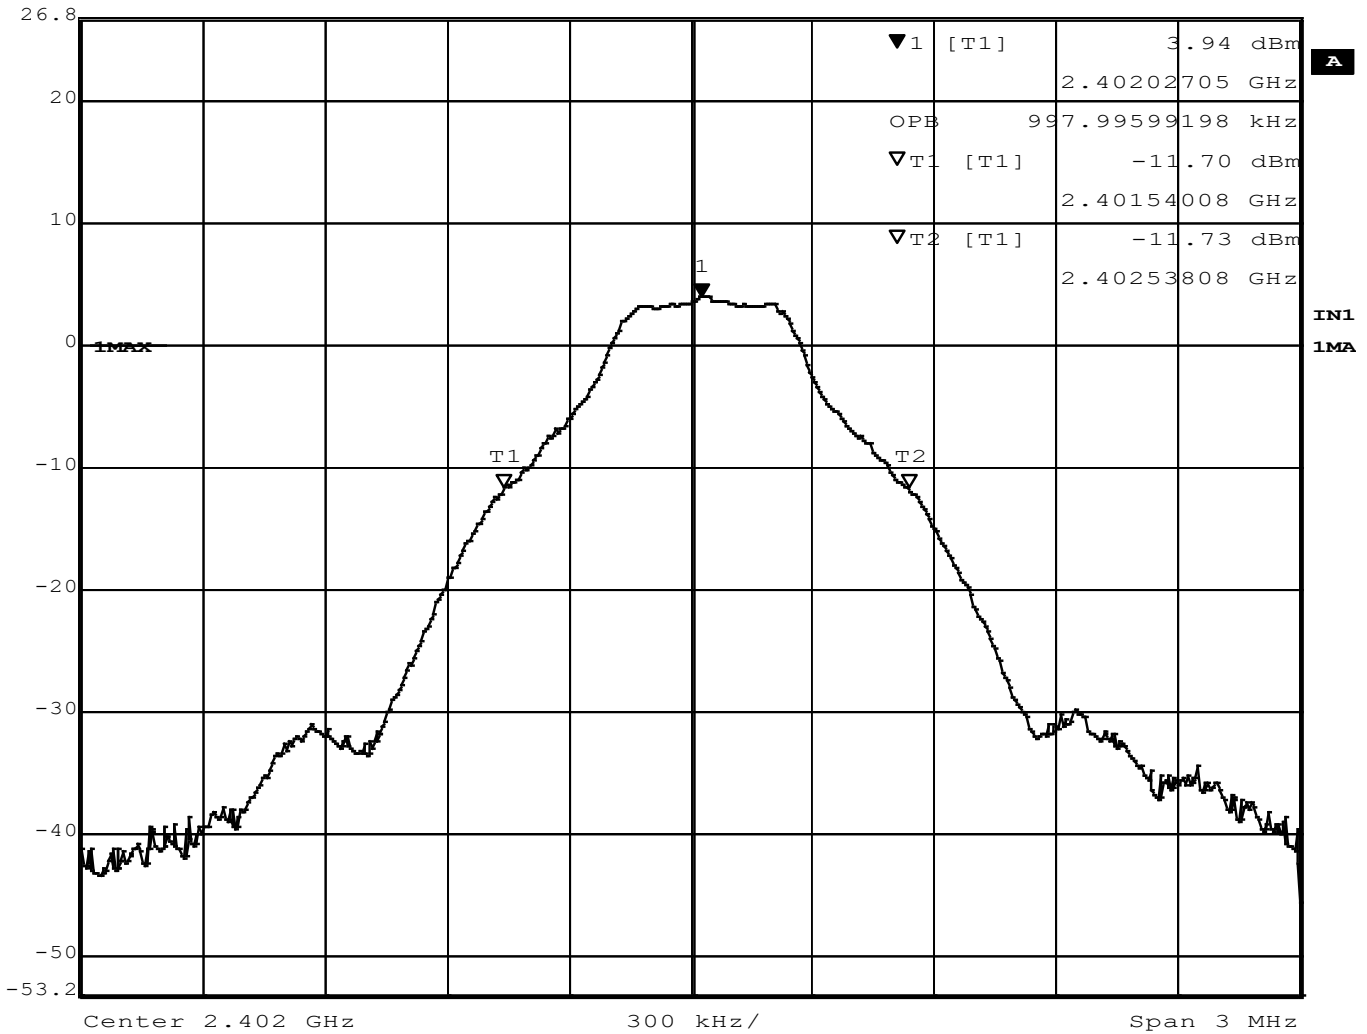


Figure 10 – Occupied Bandwidth, Low Channel, GMSK

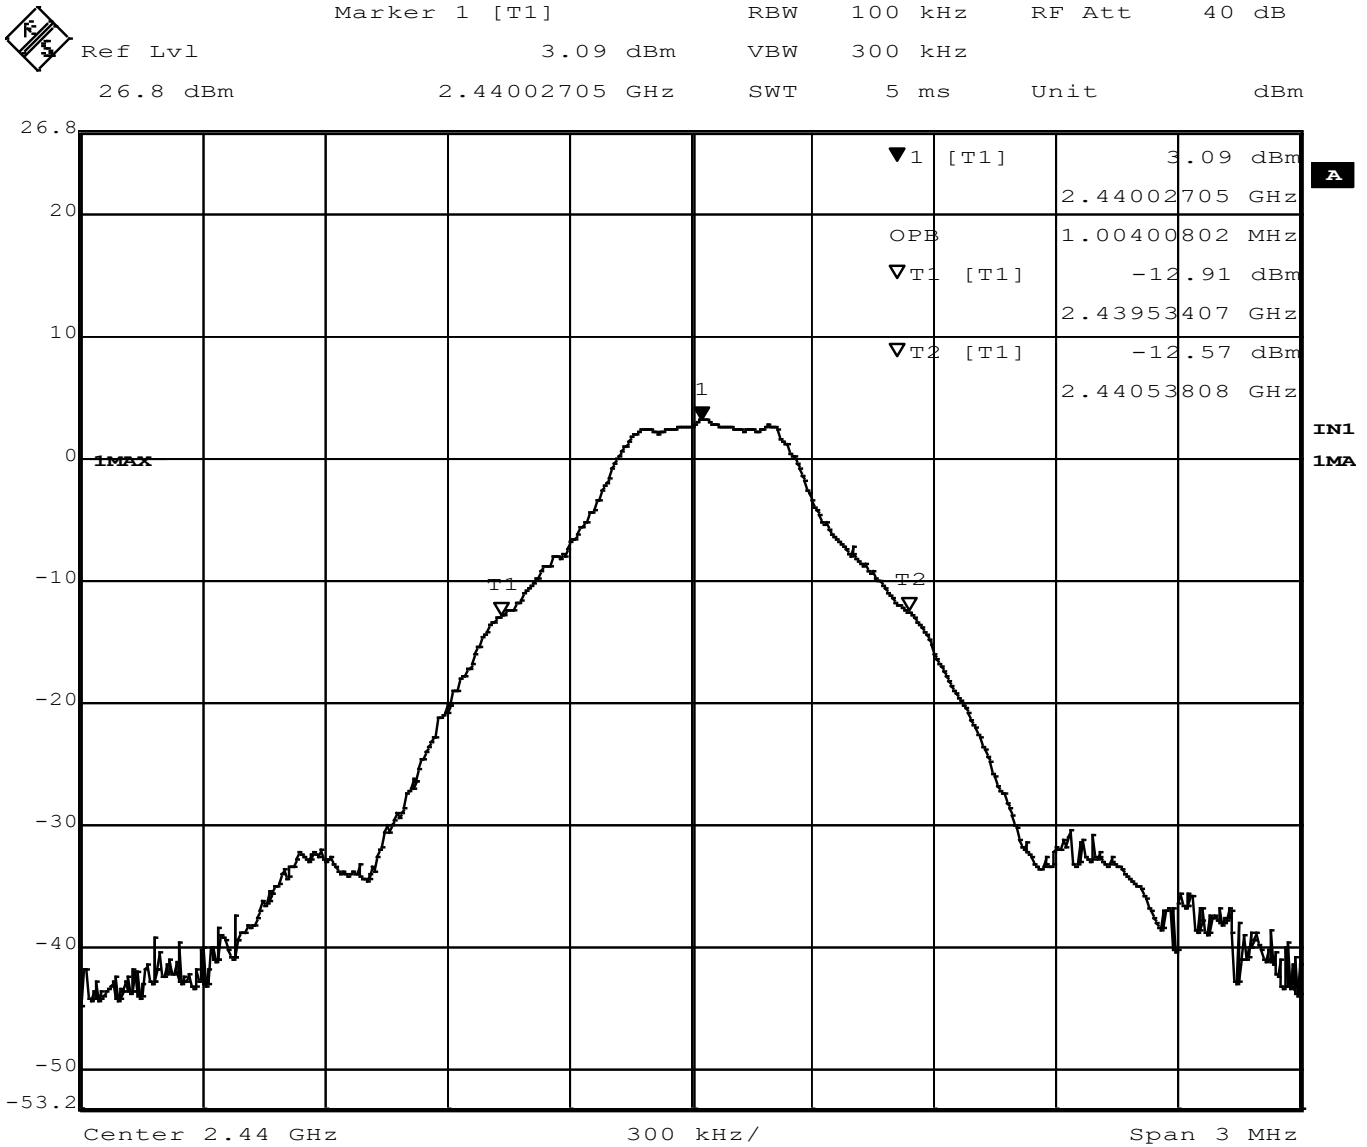


Figure 11 - Occupied Bandwidth, Mid Channel, GMSK



Marker 1 [T1] RBW 100 kHz RF Att 40 dB
 Ref Lvl 1.79 dBm VBW 300 kHz
 26.8 dBm 2.48004509 GHz SWT 5 ms Unit dBm


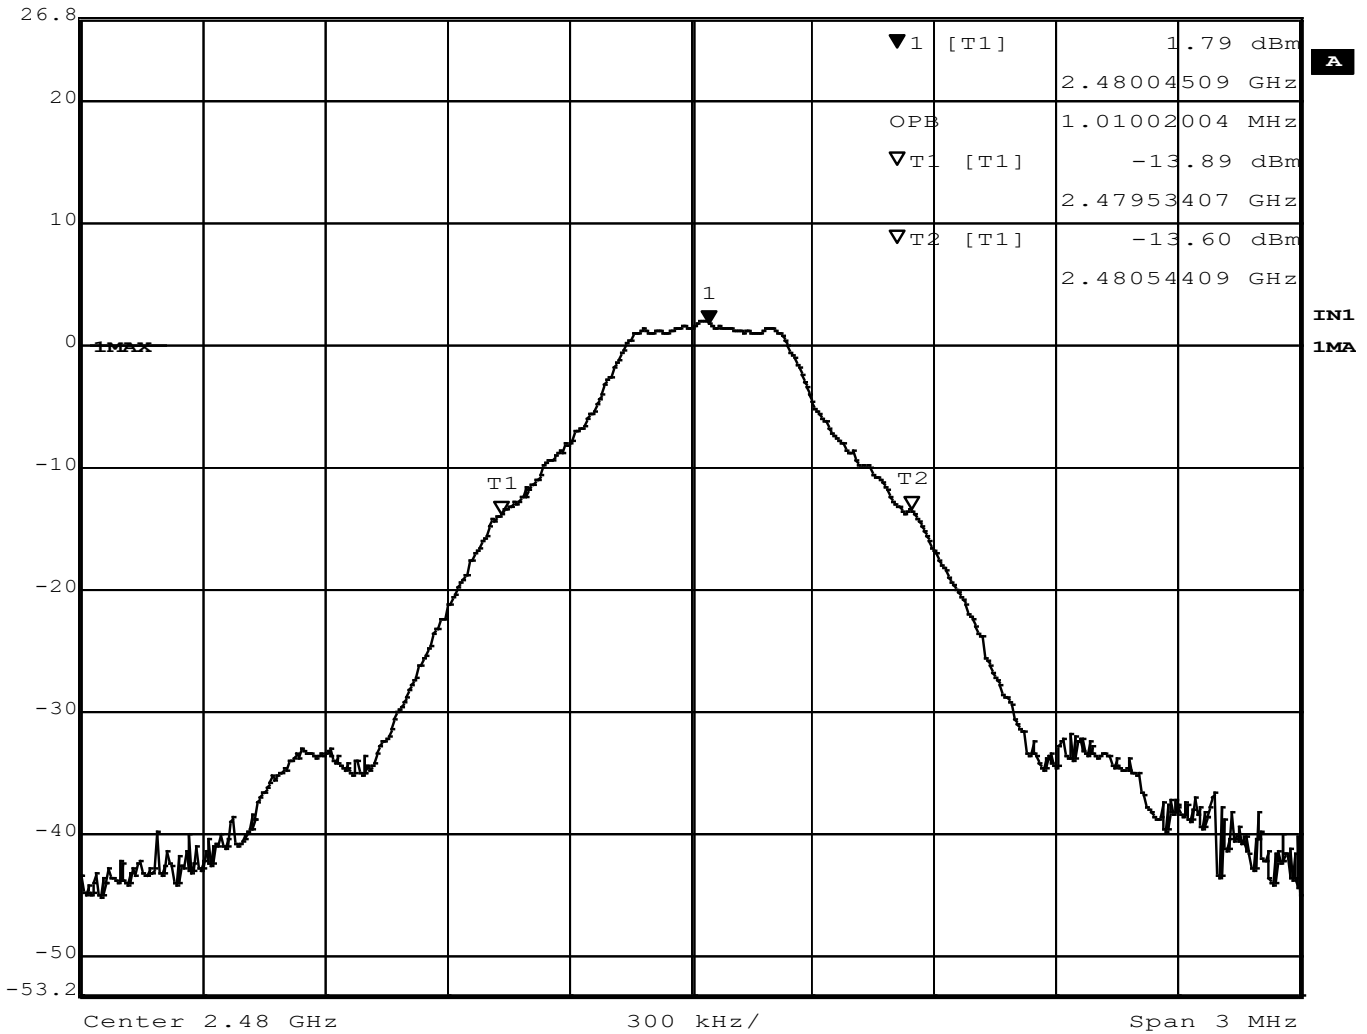


Figure 12 - Occupied Bandwidth, High Channel, GMSK



Marker 1 [T1] RBW 100 kHz RF Att 50 dB
 Ref Lvl 1.52 dBm VBW 300 kHz
 25 dBm 2.40203307 GHz SWT 5 ms Unit dBm

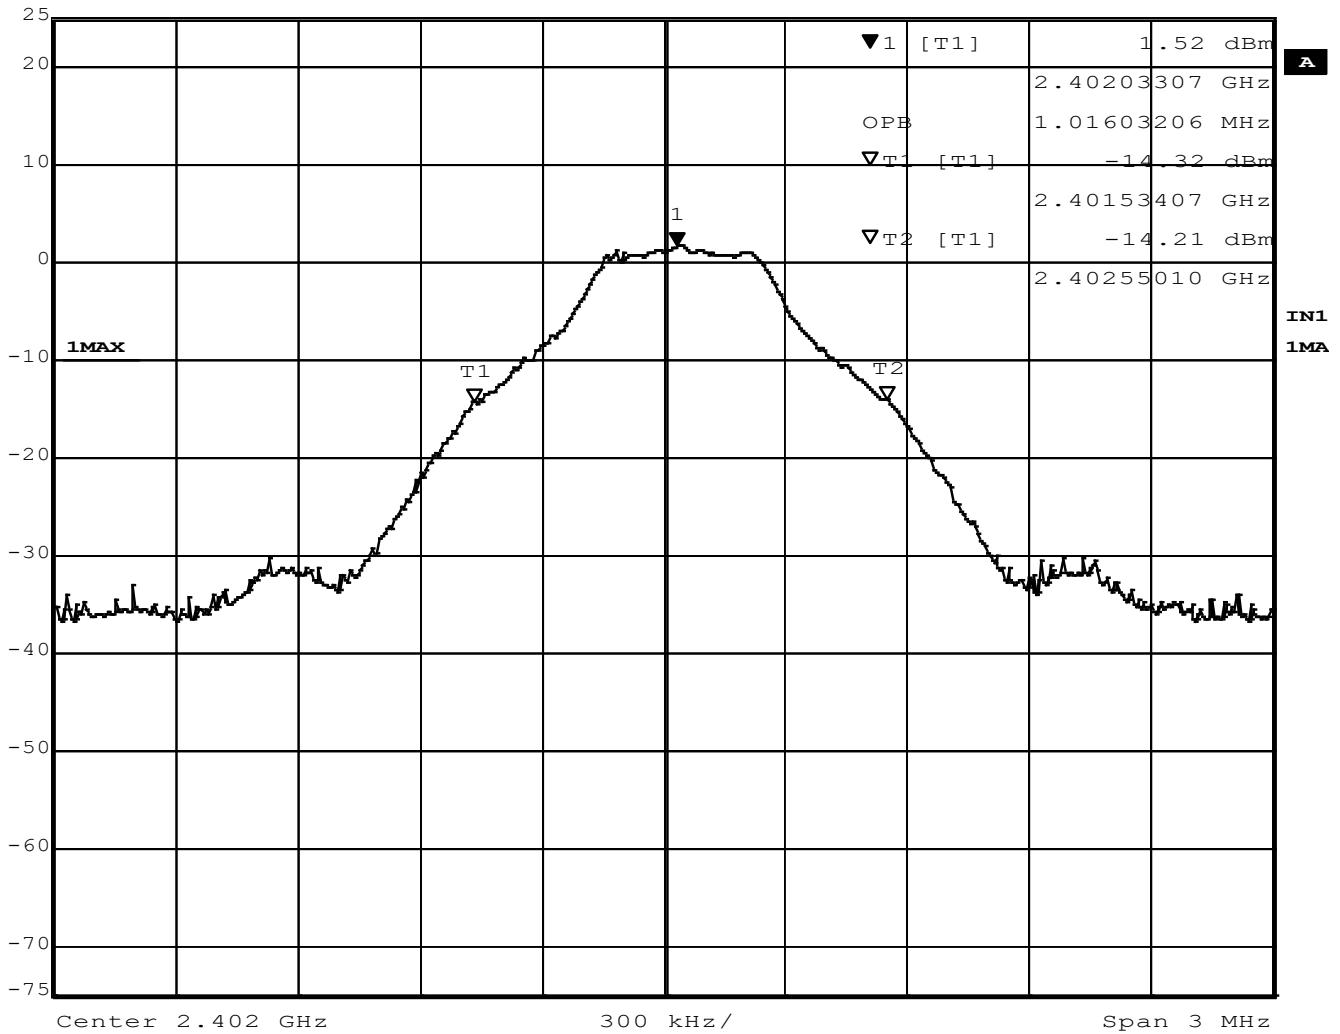


Date: 3.JAN.2019 08:32:54

Figure 13 – Occupied Bandwidth, Low Channel, GFSK



Marker 1 [T1] RBW 100 kHz RF Att 50 dB
 Ref Lvl 0.93 dBm VBW 300 kHz
 25 dBm 2.44003908 GHz SWT 5 ms Unit dBm

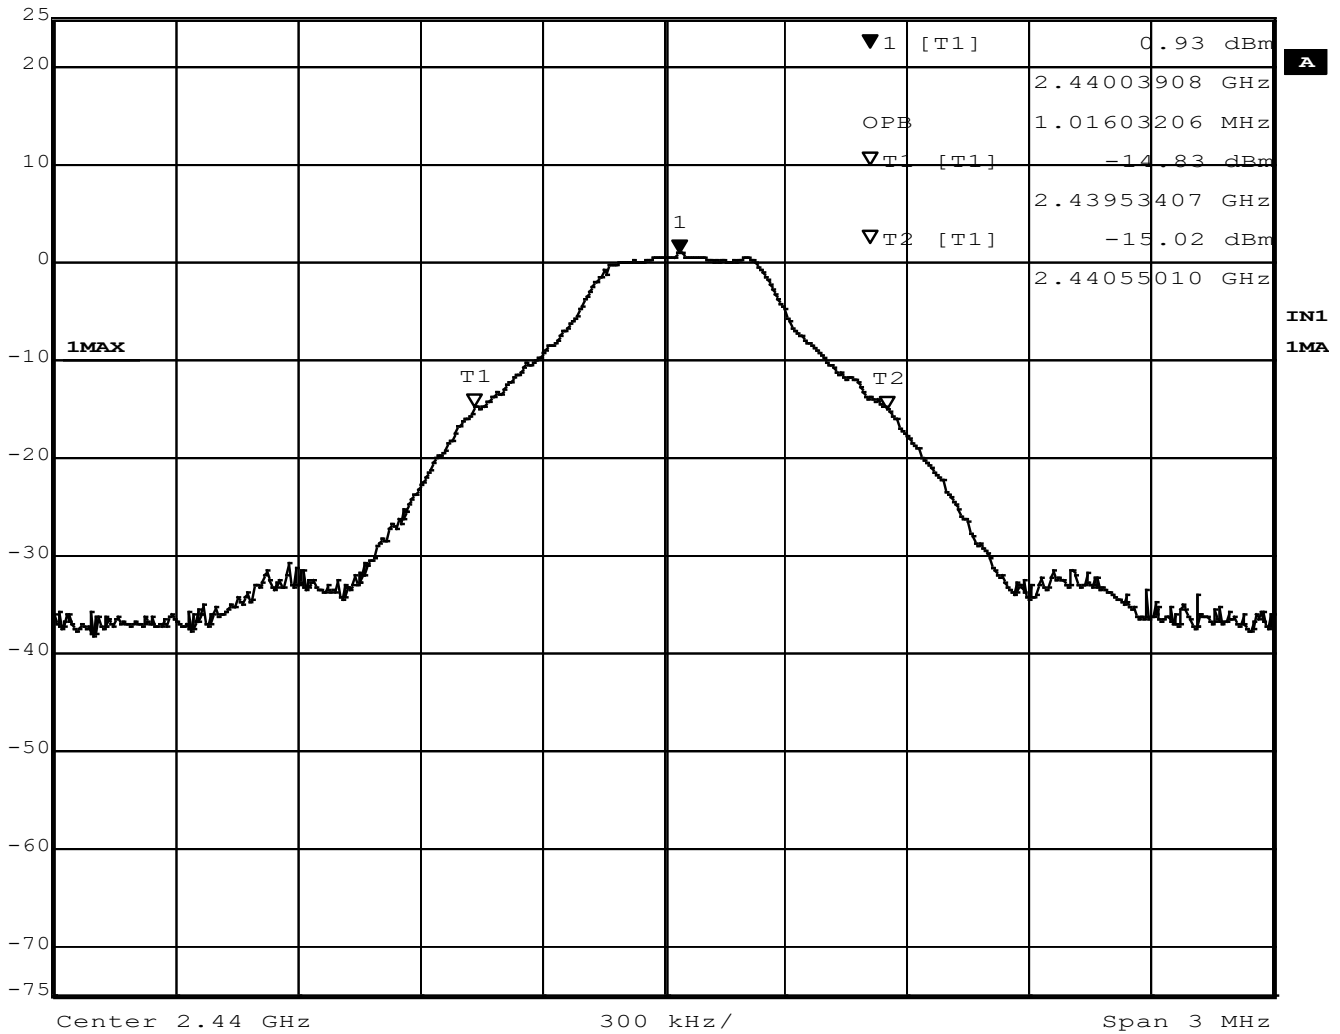


Date: 3.JAN.2019 08:50:04

Figure 14 - Occupied Bandwidth, Mid Channel, GFSK



Marker 1 [T1] RBW 100 kHz RF Att 50 dB
 Ref Lvl -0.32 dBm VBW 300 kHz
 25 dBm 2.48003307 GHz SWT 5 ms Unit dBm

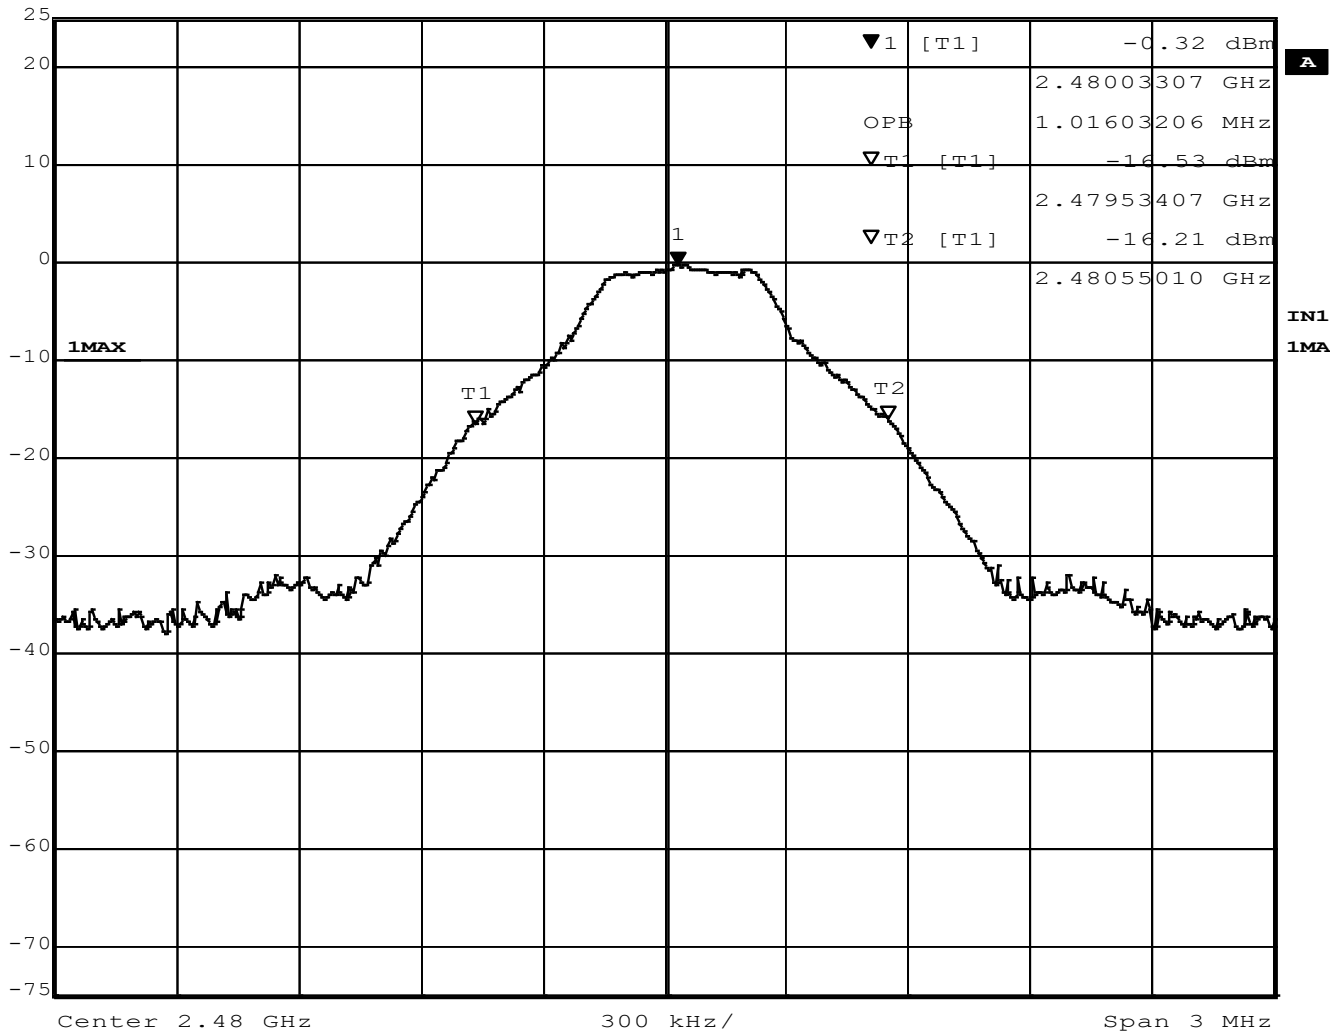

Date: 3.JAN.2019 08:54:57

Figure 15 - Occupied Bandwidth, High Channel, GFSK

4.4 RADIATED EMISSIONS

Test Method: ANSI C63.10-2013, Section 6.5, 6.6

Limits for radiated emissions measurements:

Emissions radiated outside of the specified bands shall be applied to the limits in 15.209 as followed:

FREQUENCIES (MHz)	FIELD STRENGTH ($\mu\text{V/m}$)	MEASUREMENT DISTANCE (m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	3
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = $20 * \log * \text{Emission level } (\mu\text{V/m})$.
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits by more than 20dB under any condition of modulation.
4. The EUT was tested for spurious emissions while running off of battery power and external USB power. The worse-case emissions were produced while running off of USB power, so results from this mode are presented.

Test procedures:

- a. The EUT was placed on the top of a rotating table above the ground plane in a 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. The table was 0.8m high for measurements from 30MHz-1GHz and 1.5m for measurements from 1GHz and higher.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna was a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are used to make the measurement.
- d. For each suspected emission, the EUT was arranged to maximize its emissions and then the antenna height was varied from 1 meter to 4 meters and the rotating table was turned from 0 degrees to 360 degrees to find the maximum emission reading.
- e. The test-receiver system was set to use a peak detector with a specified resolution bandwidth. For spectrum analyzer measurements, the composite maximum of several analyzer sweeps was used for final measurements.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. The EUT was maximized in all 3 orthogonal positions. The results are presented for the axis that had the highest emissions.

Test setup:

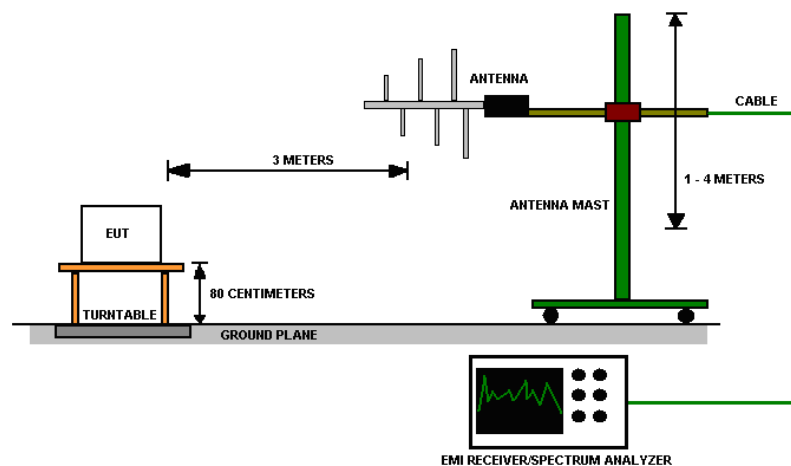


Figure 16 - Radiated Emissions Test Setup



Report Number:	R20181114-21-02	Rev	B
Prepared for:	Garmin		

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequencies below 1GHz.
2. The resolution bandwidth 1 MHz for all measurements and at frequencies above 1GHz, A peak detector was used for all measurements above 1GHz. Measurements were made with an EMI Receiver.

Deviations from test standard:

No deviation.

EUT operating conditions

The EUT was powered by 3 VDC unless specified and set to transmit continuously on the lowest, middle and highest frequency channels.

Test results:

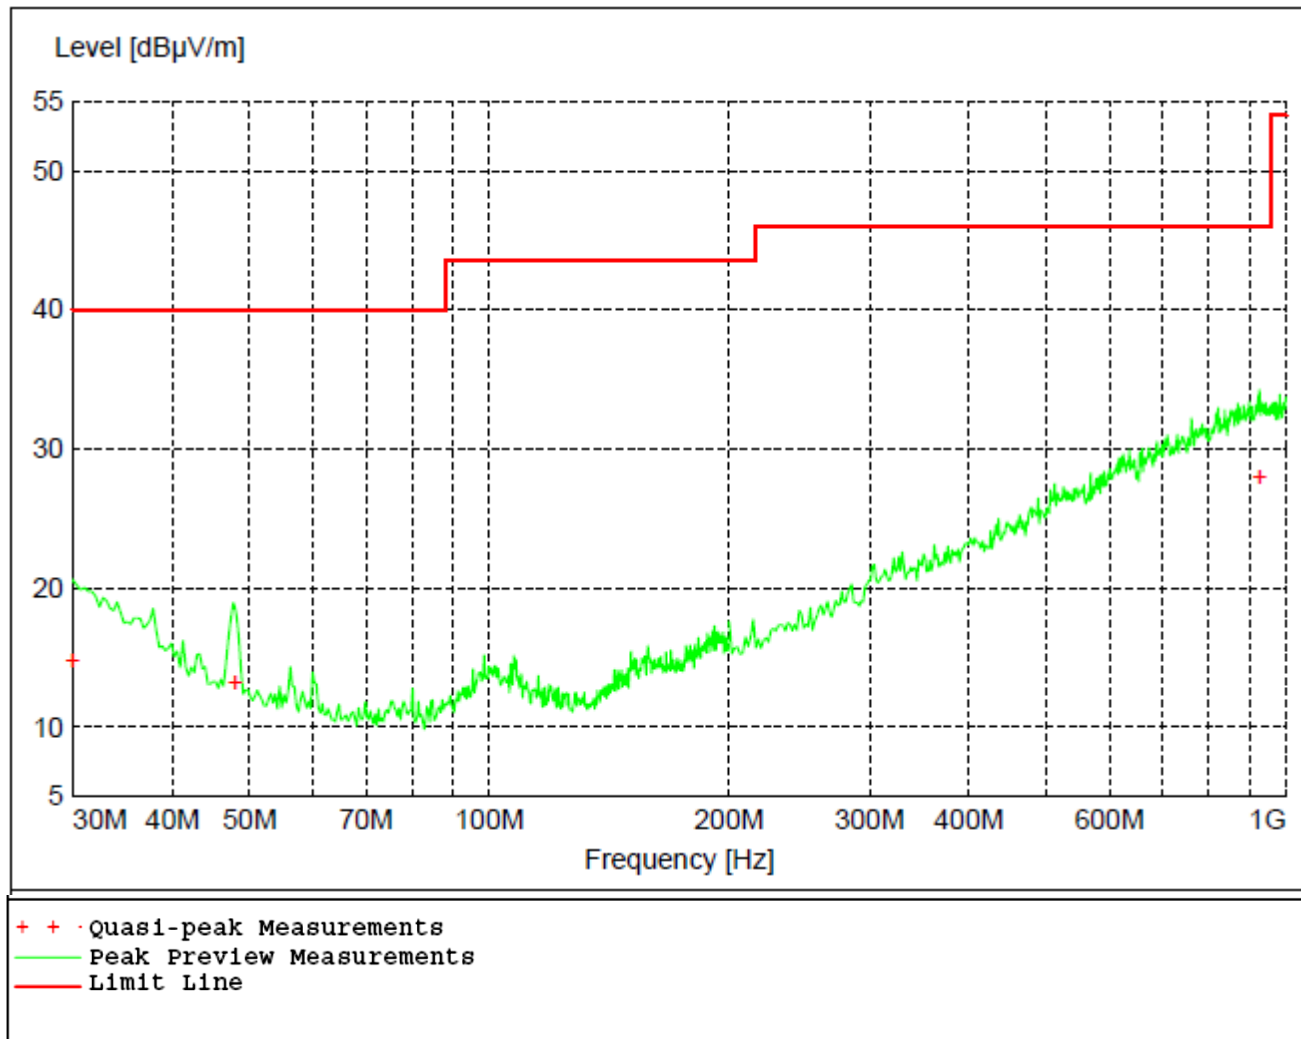


Figure 17 - Radiated Emissions Plot, Receive, GFSK

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value



Report Number:	R20181114-21-02	Rev	B
Prepared for:	Garmin		

Table 1 - Radiated Emissions Quasi-peak Measurements, Receive, GFSK

Frequency	Level	Limit	Margin	Height	Angle	Pol
MHz	dB μ V/m	dB μ V/m	dB	cm.	deg.	
30.000000	14.88	40.00	25.10	100	295	VERT
48.000000	13.31	40.00	26.70	210	298	VERT
927.840000	28.06	46.00	17.90	373	270	HORI

Table 2 - Radiated Emissions Peak Measurement vs Average Limits, Receive, GFSK

Frequency	Level	Limit	Margin	Height	Angle	Pol
MHz	dB μ V/m	dB μ V/m	dB	cm.	deg.	
3115.800000	36.00	54.00	18.00	388	107	HORI
6649.800000	46.26	54.00	7.70	401	209	VERT

Peak measurements were compared to average limit and found to be compliant so average measurements were not performed

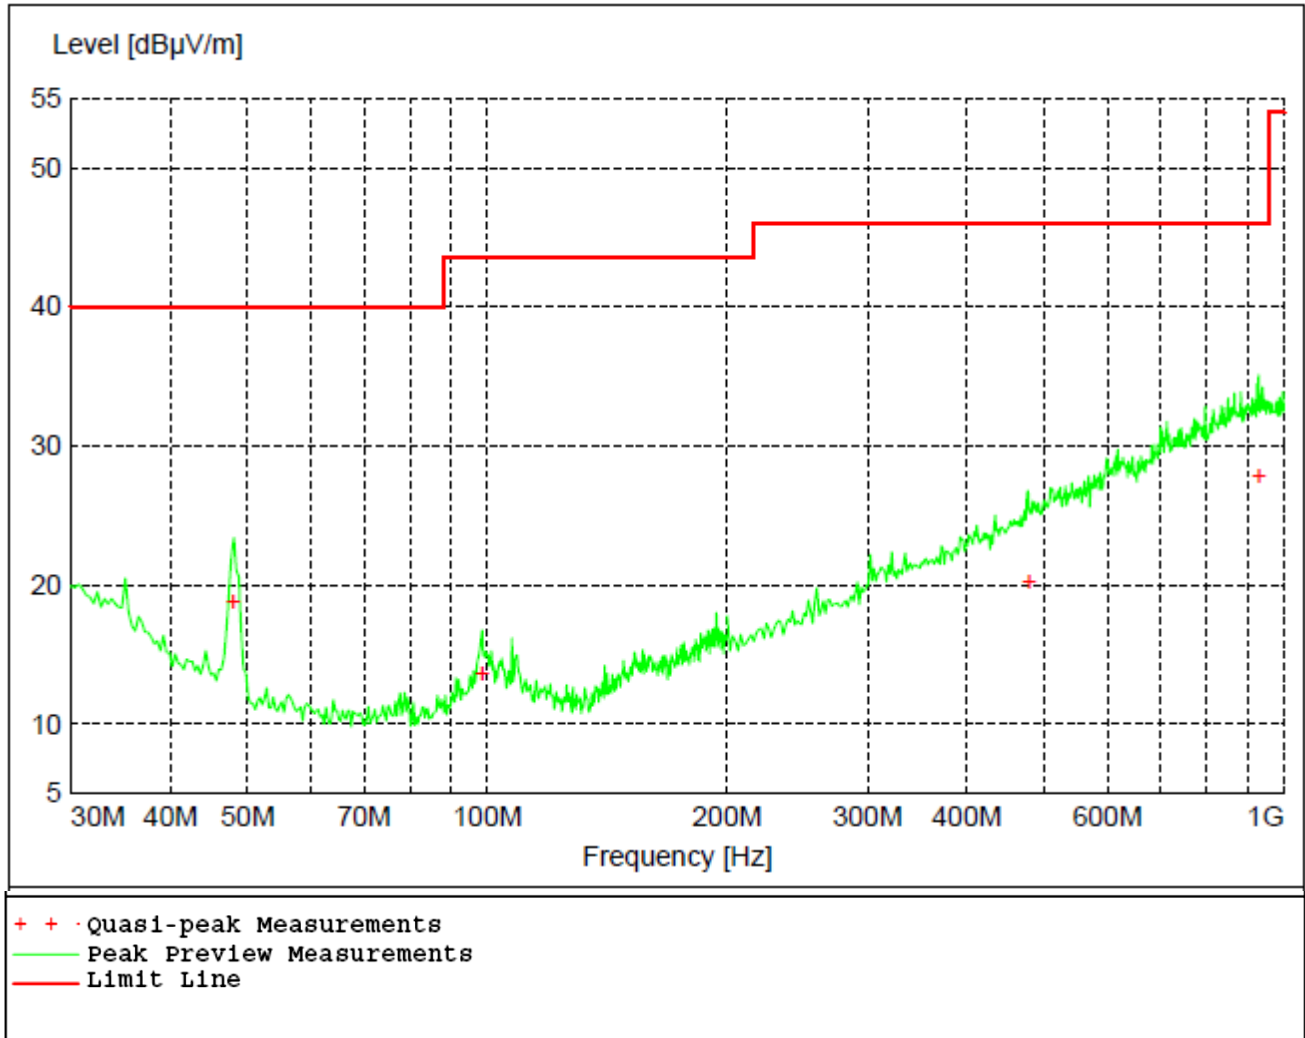


Figure 18 - Radiated Emissions Plot, Receive, GMSK

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value



Report Number:	R20181114-21-02	Rev	B
Prepared for:	Garmin		

Table 3 - Radiated Emissions Quasi-peak Measurements, Receive, GMSK

Frequency	Level	Limit	Margin	Height	Angle	Pol
MHz	dB μ V/m	dB μ V/m	dB	cm.	deg.	
48.000000	18.81	40.00	21.20	182	352	VERT
98.520000	13.68	43.50	29.80	128	139	VERT
478.620000	20.23	46.00	25.80	399	236	HORI
931.140000	27.89	46.00	18.10	324	26	VERT

The EUT was maximized in all 3 orthogonal axis. The worst-case is shown in the table above.

Table 4 - Radiated Emissions Peak Measurement vs Average Limits, Receive, GMSK

Frequency	Level	Limit	Margin	Height	Angle	Pol
MHz	dB μ V/m	dB μ V/m	dB	cm.	deg.	
2468.800000	36.21	54.00	17.80	206	58	VERT
4793.400000	42.78	54.00	11.20	105	130	HORI

Peak measurements were compared to average limit and found to be compliant so average measurements were not performed

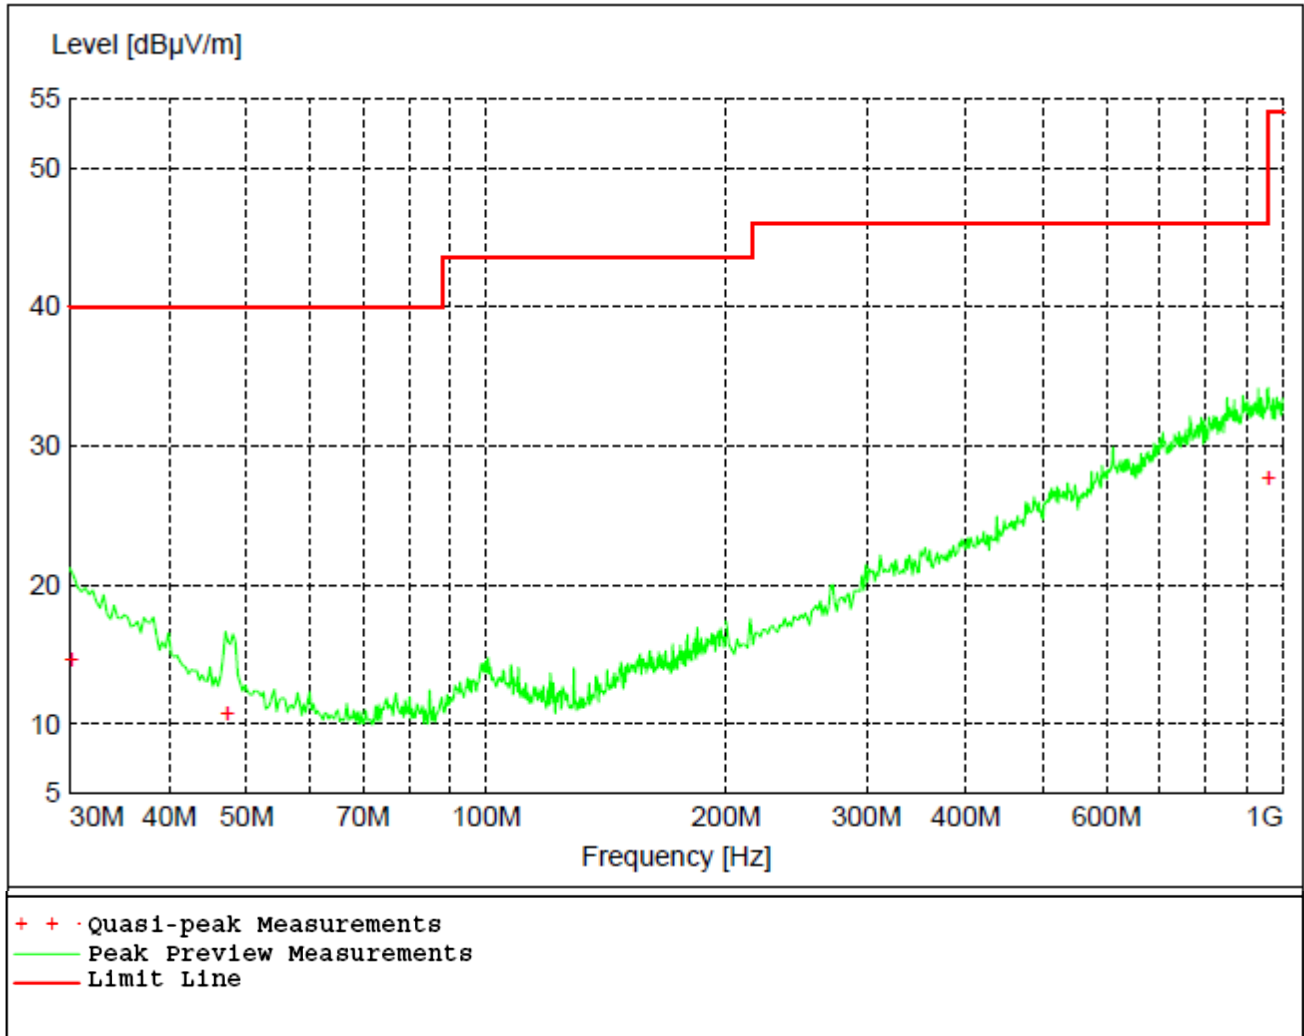


Figure 19 - Radiated Emissions Plot, Low Channel, GFSK

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value

Report Number:	R20181114-21-02	Rev	B
Prepared for:	Garmin		

Table 5 - Radiated Emissions Quasi-peak Measurements, Low Channel, GFSK

Frequency	Level	Limit	Margin	Height	Angle	Pol
MHz	dB μ V/m	dB μ V/m	dB	cm.	deg.	
30.180000	14.68	40.00	25.30	349	221	HORI
47.340000	10.79	40.00	29.20	237	360	VERT
959.760000	27.69	46.00	18.30	374	349	VERT

The EUT was maximized in all 3 orthogonal axis. The worst-case is shown in the table above.

Table 6 - Radiated Emissions Average Measurements, Low Channel, GFSK

Frequency	Level	Limit	Margin	Height	Angle	Pol
MHz	dB μ V/m	dB μ V/m	dB	cm.	deg.	
2402.000000	70.11	94.00	23.89	187	228	VERT
4804.000000	30.56	54.00	23.40	157	292	HORI
7205.600000	28.46	54.00	25.50	146	273	HORI

The EUT was maximized in all 3 orthogonal axis. The worst-case is shown in the table above.

Note: Average Level = Peak Level – Duty Cycle Correction Factor

Duty Cycle Correction Factor is calculated in Figures 1 and 2. 20dB was used.

Table 7 - Radiated Emissions Peak Measurements, Low Channel, GFSK

Frequency	Level	Limit	Margin	Height	Angle	Pol
MHz	dB μ V/m	dB μ V/m	dB	cm.	deg.	
2402.000000	90.11	94.00	3.89	187	228	VERT
4804.000000	50.56	74.00	23.40	157	292	HORI
7205.600000	48.46	74.00	25.50	146	273	HORI

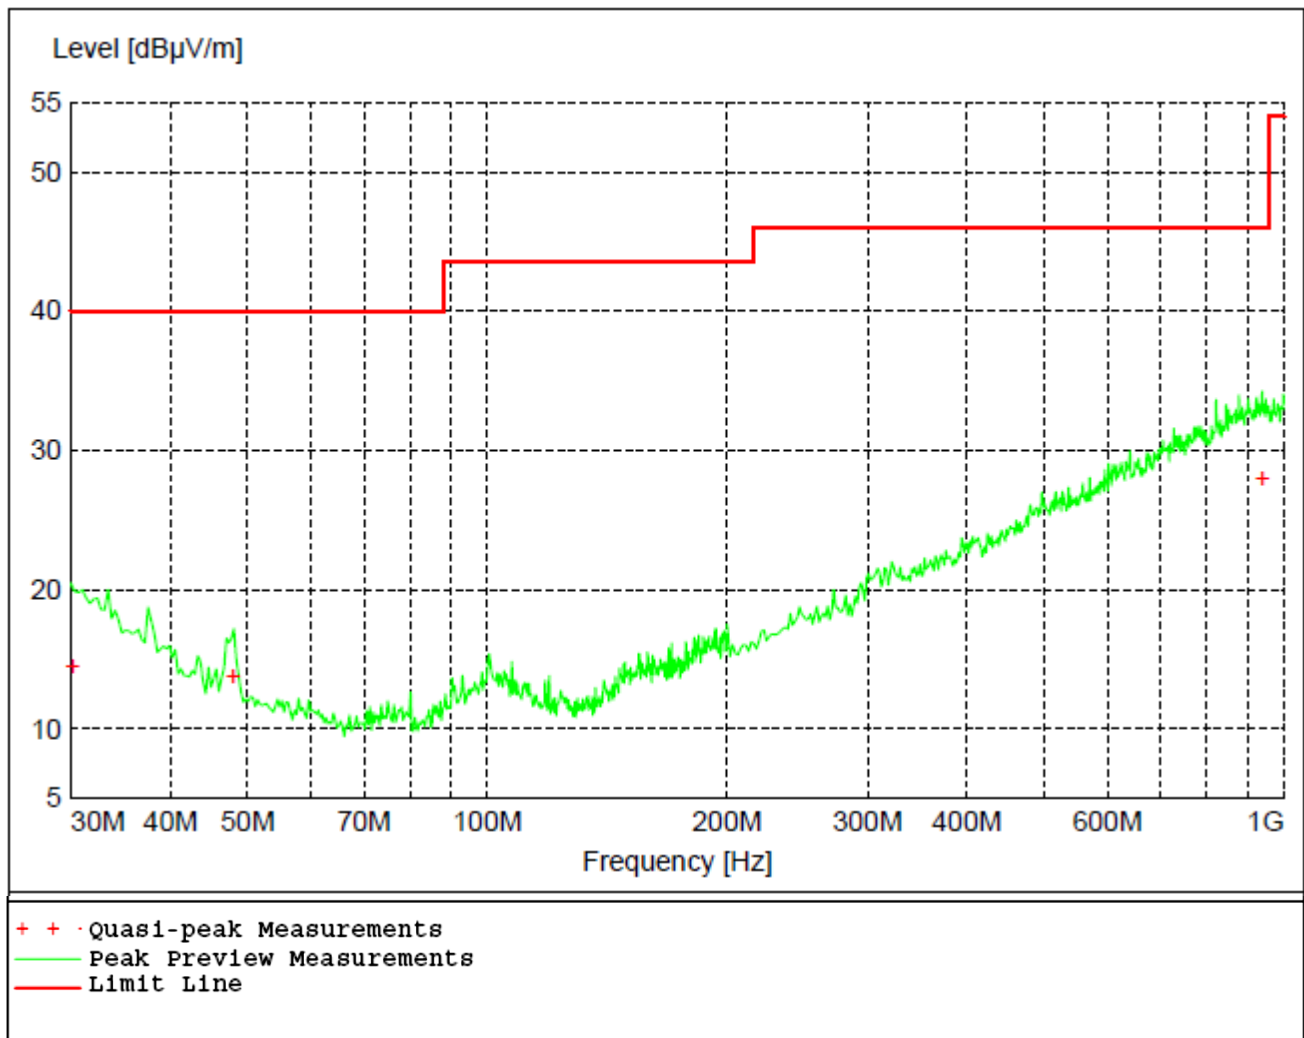


Figure 20 - Radiated Emissions Plot, Mid Channel, GFSK

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value

Report Number:	R20181114-21-02	Rev	B
Prepared for:	Garmin		

Table 6 - Radiated Emissions Quasi-peak Measurements, Mid Channel, GFSK

Frequency	Level	Limit	Margin	Height	Angle	Pol
MHz	dBµV/m	dBµV/m	dB	cm.	deg.	
30.180000	14.60	40.00	25.40	400	0	HORI
48.000000	13.77	40.00	26.20	230	69	VERT
939.300000	28.00	46.00	18.00	186	162	HORI

The EUT was maximized in all 3 orthogonal axis. The worst-case is shown in the table above.

Table 7 - Radiated Emissions Average Measurements, Mid Channel, GFSK

Frequency	Level	Limit	Margin	Height	Angle	Pol
MHz	dBµV/m	dBµV/m	dB	cm.	deg.	
2440.000000	69.61	94.00	24.39	206	263	VERT
4880.000000	25.65	54.00	28.30	106	101	HORI
7319.600000	25.85	54.00	28.20	135	282	HORI

The EUT was maximized in all 3 orthogonal axis. The worst-case is shown in the table above.

Note: Average Level = Peak Level – Duty Cycle Correction Factor

Duty Cycle Correction Factor is calculated in Figures 1 and 2. 20dB was used.

Table 7 - Radiated Emissions Peak Measurements, Mid Channel, GFSK

Frequency	Level	Limit	Margin	Height	Angle	Pol
MHz	dBµV/m	dBµV/m	dB	cm.	deg.	
2440.000000	89.61	94.00	4.39	206	263	VERT
4880.000000	45.65	74.00	28.30	106	101	HORI
7319.600000	45.85	74.00	28.20	135	282	HORI

The EUT was maximized in all 3 orthogonal axis. The worst-case is shown in the table above

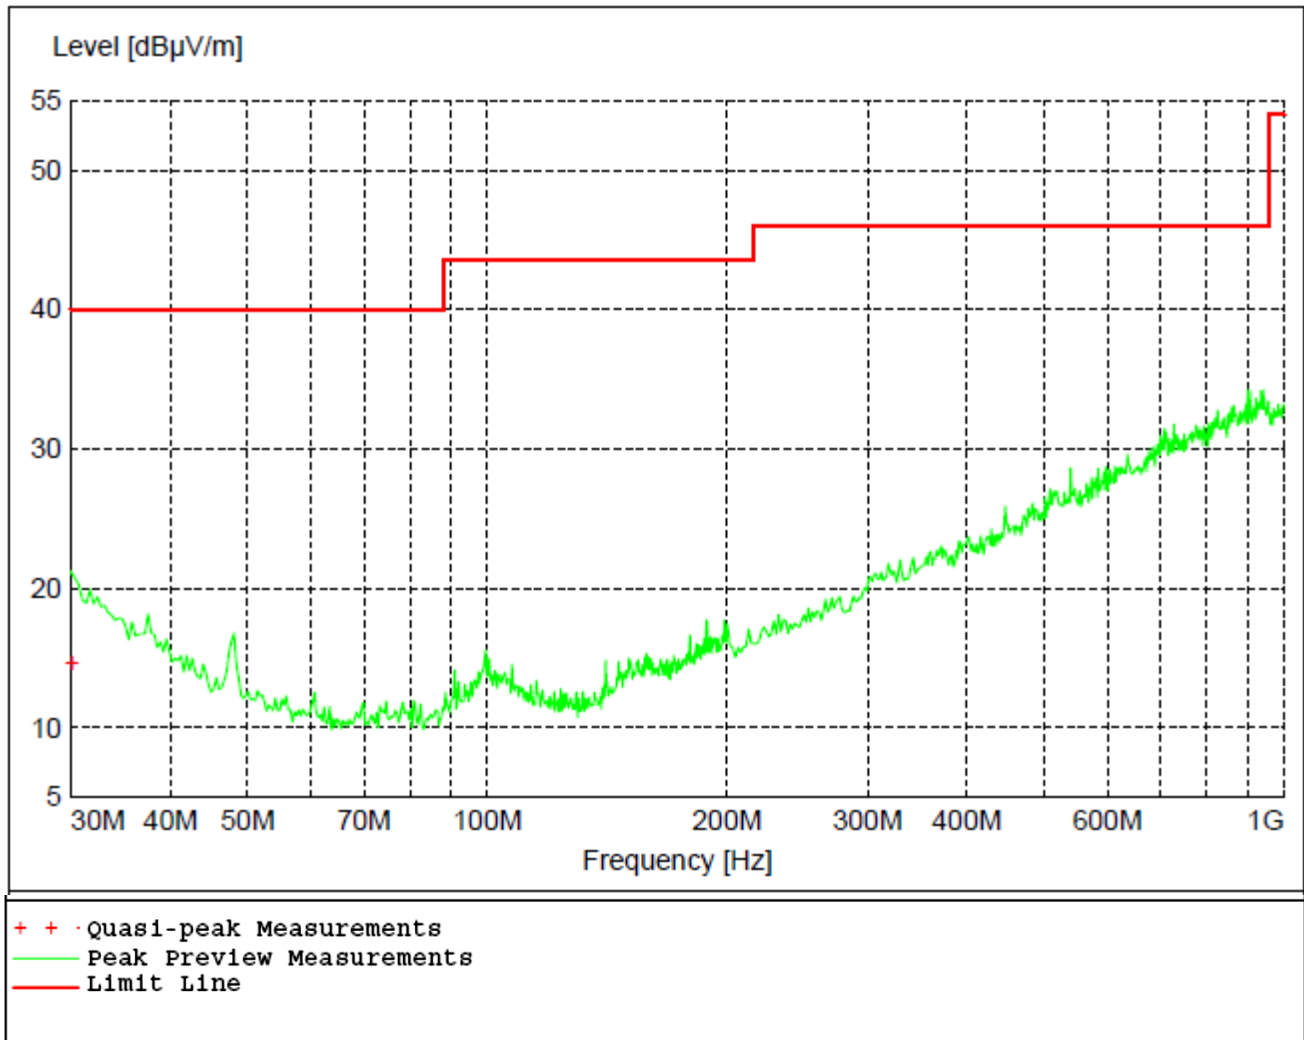


Figure 21 - Radiated Emissions Plot, High Channel, GFSK

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



Report Number:	R20181114-21-02	Rev	B
Prepared for:	Garmin		

Table 8 - Radiated Emissions Quasi-peak Measurements, High Channel, GFSK

Frequency	Level	Limit	Margin	Height	Angle	Pol
MHz	dBµV/m	dBµV/m	dB	cm.	deg.	
30.120000	14.64	40.00	25.40	268	46	VERT

The EUT was maximized in all 3 orthogonal axis. The worst-case is shown in the table above.

Table 9 - Radiated Emissions Average Measurements, High Channel, GFSK

Frequency	Level	Limit	Margin	Height	Angle	Pol
MHz	dBµV/m	dBµV/m	dB	cm.	deg.	
2480.000000	69.44	94.00	24.56	206	148	VERT
5922.000000	29.15	54.00	24.90	109	190	VERT
7439.600000	34.66	54.00	19.44	147	285	HORI

The EUT was maximized in all 3 orthogonal axis. The worst-case is shown in the table above.

Note: Average Level = Peak Level – Duty Cycle Correction Factor
 Duty Cycle Correction Factor is calculated in Figures 1 and 2. 20dB was used

Table 9 - Radiated Emissions Peak Measurements, High Channel, GFSK

Frequency	Level	Limit	Margin	Height	Angle	Pol
MHz	dBµV/m	dBµV/m	dB	cm.	deg.	
2480.000000	89.44	94.00	4.56	206	148	VERT
5922.000000	49.15	74.00	24.90	109	190	VERT
7439.600000	54.66	74.00	19.34	147	285	HORI

The EUT was maximized in all 3 orthogonal axis. The worst-case is shown in the table above

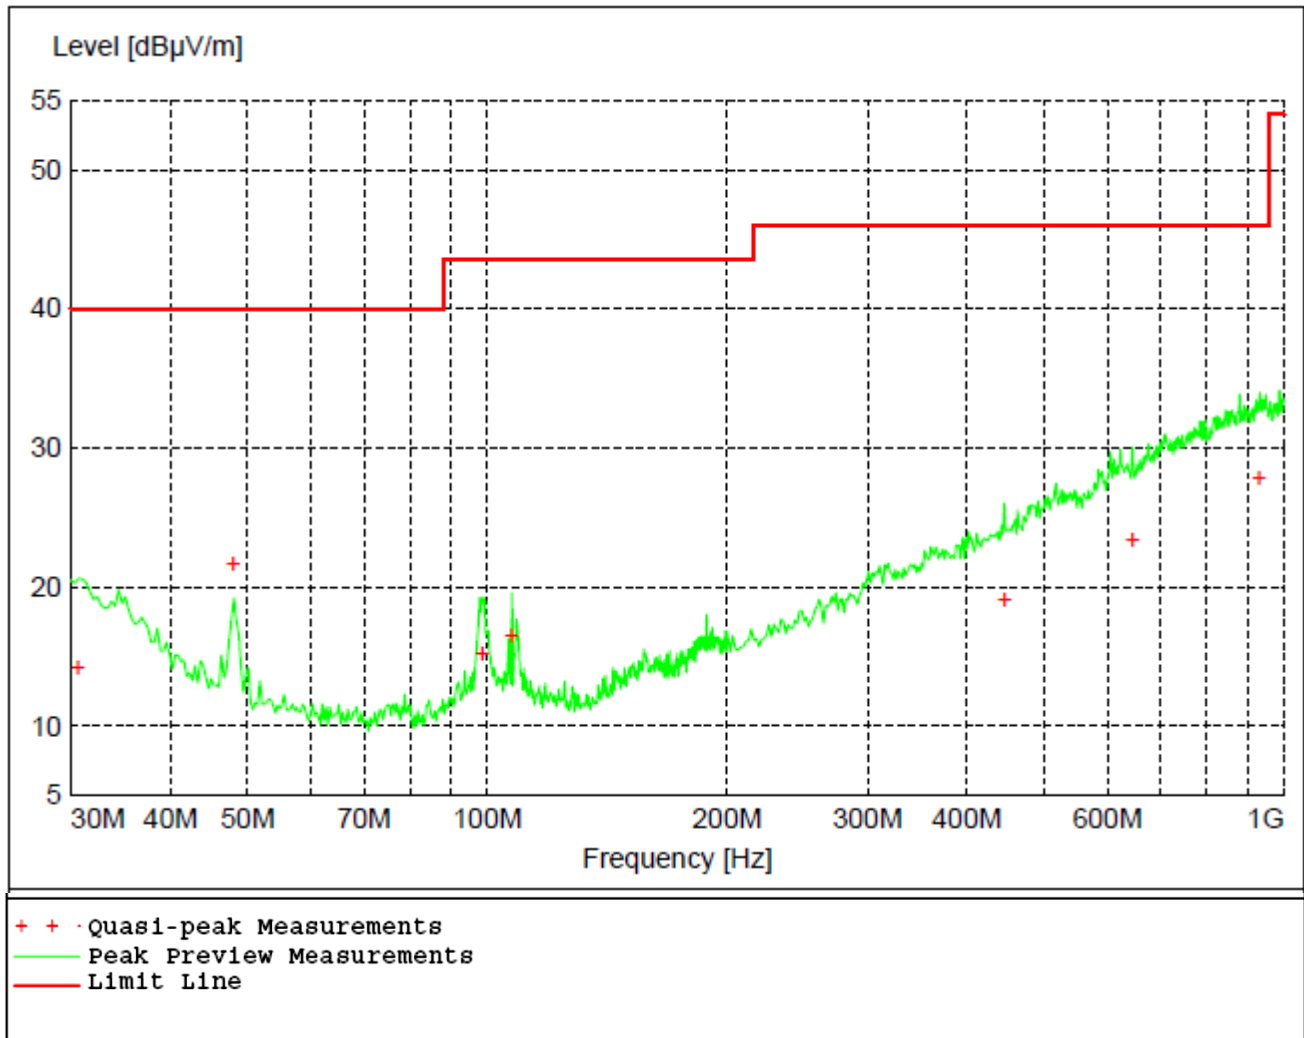


Figure 22 - Radiated Emissions Plot, Low Channel, GMSK

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value

Report Number:	R20181114-21-02	Rev	B
Prepared for:	Garmin		

Table 10 - Radiated Emissions Quasi-peak Measurements, Low Channel, GMSK

Frequency	Level	Limit	Margin	Height	Angle	Pol
MHz	dBµV/m	dBµV/m	dB	cm.	deg.	
30.600000	14.22	40.00	25.80	390	114	HORI
48.000000	21.66	40.00	18.30	103	162	VERT
98.520000	15.21	43.50	28.30	136	3	VERT
107.280000	16.49	43.50	27.00	180	294	VERT
445.860000	19.06	46.00	26.90	183	295	VERT
645.600000	23.45	46.00	22.60	217	16	VERT
931.980000	27.95	46.00	18.10	273	360	HORI

The EUT was maximized in all 3 orthogonal axis. The worst-case is shown in the table above.

Table 11 - Radiated Emissions Average Measurements, Low Channel, GMSK

Frequency	Level	Limit	Margin	Height	Angle	Pol
MHz	dBµV/m	dBµV/m	dB	cm.	deg.	
2402.000000	69.98	94.00	24.02	201	114	VERT
4804.200000	41.63	54.00	12.37	177	288	HORI
7206.800000	37.13	54.00	16.87	100	282	HORI

The EUT was maximized in all 3 orthogonal axis. The worst-case is shown in the table above.

Note: Average Level = Peak Level – Duty Cycle Correction Factor

Duty Cycle Correction Factor is calculated in Figures 1 and 2. 20dB was used

Table 11 - Radiated Emissions Peak Measurements, Low Channel, GMSK

Frequency	Level	Limit	Margin	Height	Angle	Pol
MHz	dBµV/m	dBµV/m	dB	cm.	deg.	
2402.000000	89.98	94.00	4.02	201	114	VERT
4804.200000	61.63	74.00	12.37	177	288	HORI
7206.800000	57.13	74.00	16.87	100	282	HORI

The EUT was maximized in all 3 orthogonal axis. The worst-case is shown in the table above

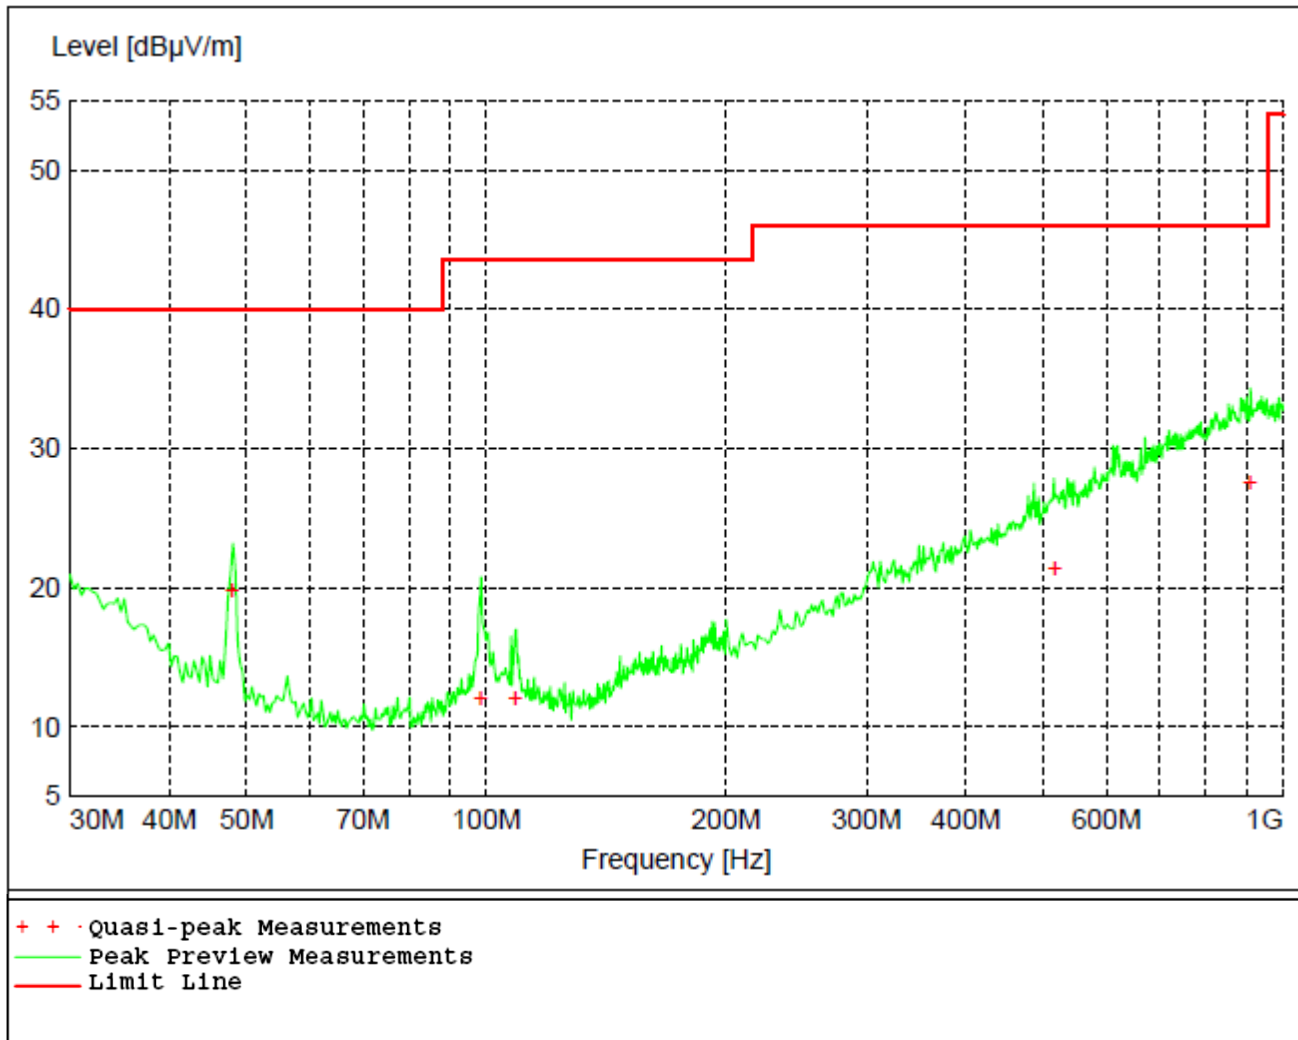


Figure 23 - Radiated Emissions Plot, Mid Channel, GMSK

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value

Report Number:	R20181114-21-02	Rev	B
Prepared for:	Garmin		

Table 12 - Radiated Emissions Quasi-peak Measurements, Mid Channel, GMSK

Frequency	Level	Limit	Margin	Height	Angle	Pol
MHz	dBµV/m	dBµV/m	dB	cm.	deg.	
48.000000	19.80	40.00	20.20	100	144	VERT
98.460000	12.07	43.50	31.40	99	272	VERT
108.780000	12.14	43.50	31.40	380	285	VERT
516.960000	21.49	46.00	24.50	370	360	HORI
909.180000	27.54	46.00	18.50	114	21	VERT

The EUT was maximized in all 3 orthogonal axis. The worst-case is shown in the table above.

Table 13 - Radiated Emissions Average Measurements, Mid Channel, GMSK

Frequency	Level	Limit	Margin	Height	Angle	Pol
MHz	dBµV/m	dBµV/m	dB	cm.	deg.	
2440.000000	69.61	94.00	24.39	152	211	HORI
4880.000000	24.86	54.00	29.10	235	21	HORI
7319.400000	26.11	54.00	27.90	135	273	HORI

The EUT was maximized in all 3 orthogonal axis. The worst-case is shown in the table above.

Note: Average Level = Peak Level – Duty Cycle Correction Factor

Duty Cycle Correction Factor is calculated in Figures 1 and 2. 20dB was used

Table 13 - Radiated Emissions Peak Measurements, Mid Channel, GMSK

Frequency	Level	Limit	Margin	Height	Angle	Pol
MHz	dBµV/m	dBµV/m	dB	cm.	deg.	
2440.000000	89.61	94.00	4.39	152	211	HORI
4880.000000	44.86	74.00	29.10	235	21	HORI
7319.400000	46.11	74.00	27.90	135	273	HORI

The EUT was maximized in all 3 orthogonal axis. The worst-case is shown in the table above.

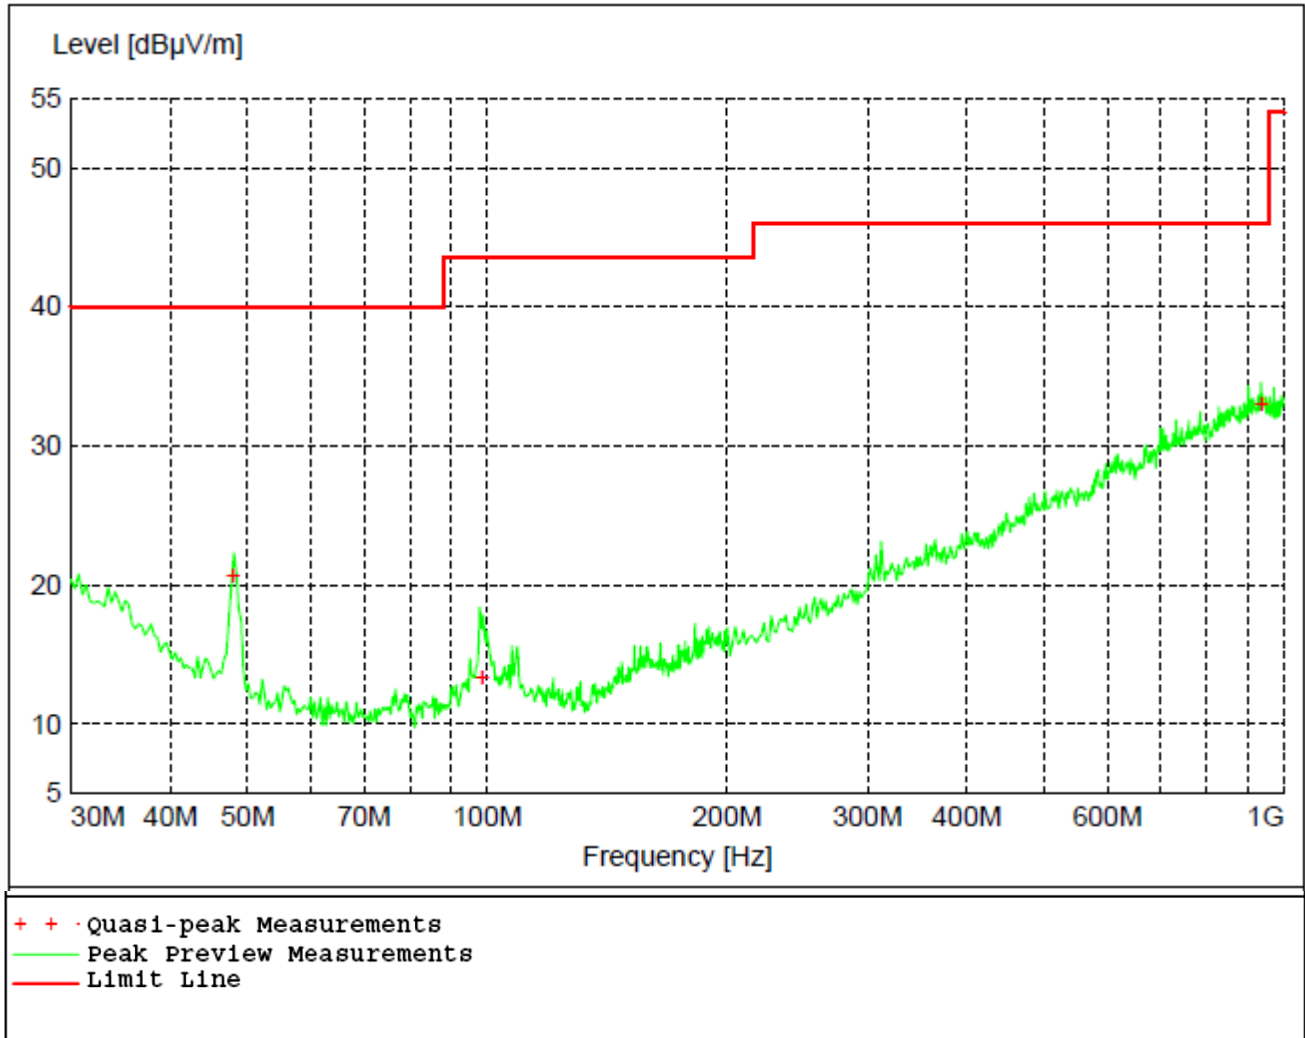


Figure 24 - Radiated Emissions Plot, High Channel, GMSK

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value

Report Number:	R20181114-21-02	Rev	B
Prepared for:	Garmin		

Table 14 - Radiated Emissions Quasi-peak Measurements, High Channel, GMSK

Frequency	Level	Limit	Margin	Height	Angle	Pol
MHz	dB μ V/m	dB μ V/m	dB	cm.	deg.	
48.000000	20.66	40.00	19.30	98	334	VERT
98.520000	13.37	43.50	30.20	288	153	VERT
937.620000	33.04	46.00	13.00	135	270	HORI

The EUT was maximized in all 3 orthogonal axis. The worst-case is shown in the table above.

Table 15 - Radiated Emissions Average Measurements, High Channel, GMSK

Frequency	Level	Limit	Margin	Height	Angle	Pol
MHz	dB μ V/m	dB μ V/m	dB	cm.	deg.	
2480.000000	70.63	94.00	23.37	105	202	HORI
4960.200000	28.45	54.00	25.50	115	317	HORI
7439.400000	33.71	54.00	20.30	117	285	HORI

The EUT was maximized in all 3 orthogonal axis. The worst-case is shown in the table above.

Note: Average Level = Peak Level – Duty Cycle Correction Factor
 Duty Cycle Correction Factor is calculated in Figures 1 and 2. 20dB was used

Table 15 - Radiated Emissions Peak Measurements, High Channel, GMSK

Frequency	Level	Limit	Margin	Height	Angle	Pol
MHz	dB μ V/m	dB μ V/m	dB	cm.	deg.	
2480.000000	90.63	94.00	23.37	105	202	HORI
4960.200000	48.45	74.00	25.50	115	317	HORI
7439.400000	53.71	74.00	20.30	117	285	HORI

The EUT was maximized in all 3 orthogonal axis. The worst-case is shown in the table above.



Report Number:	R20181114-21-02	Rev	B
Prepared for:	Garmin		

4.5 BAND EDGES

Test Method: ANSI C63.10-2013, Section(s) 6.10.5

Limits of bandedge measurements:

For emissions outside of the allowed band of operation, the emission level needs to be 20dB under the maximum fundamental field strength. However, if the emissions fall within one of the restricted bands from 15.205 the field strength levels need to be under that of the limits in 15.209.

Test procedures:

Measurements were performed by connecting the output of the transmitter directly into a spectrum analyzer using an impedance matched cable and connector soldered to the EUT in place of the antenna. The resolution bandwidth was set to 100kHz and the EMI receiver was used to scan from the bandedge to the fundamental frequency with a peak detector. The highest emissions level beyond the bandedge was measured and recorded. All band edge measurements were evaluated to the general limits in Part 15.209.

To calculate the level at the bandedge frequencies, the difference between the peak and the band edge level was subtracted from the peak radiated value at the fundamental. This value was compared to the 15.209 radiated limits for compliance.

Deviations from test standard:

No deviation.

Test setup:

The field strength was measured by connecting the EUT directly to the spectrum analyzer.

EUT operating conditions:

The EUT was powered by 3 VDC unless specified and set to transmit continuously on the lowest and highest frequency channel.



Report Number:	R20181114-21-02	Rev	B
Prepared for:	Garmin		

Test results:

CHANNEL	Mode	Band edge /Measurement Frequency (MHz)	Relative Highest out of band level dBm	Relative Fundamental dBm	Delta (dB)	Min Delta (dB)	Result
Low, Continuous	GMSK	2400	-46.03	3.54	49.57	35.98	PASS
Low, Continuous	GFSK	2400	-44.67	5.57	50.24	36.11	PASS
High, Continuous	GMSK	2483.5	-43.68	1.93	45.61	36.63	PASS
High, Continuous	GFSK	2483.5	-36.21	-0.24	35.97	35.44	PASS

*Minimum delta = [highest fundamental peak field strength from Section 4.2] – [Part 15.209 radiated emissions limit.]

From Section 4.2

Fundamental peak field strength at Low Channel GMSK = 89.98 dBµV/m
 Fundamental peak field strength at High Channel GMSK = 90.63 dBµV/m
 Fundamental peak field strength at Low Channel GFSK = 90.11 dBµV/m
 Fundamental peak field strength at High Channel GFSK = 89.44 dBµV/m

Low Channel minimum delta GMSK = 89.98 – 54.0 dBµV/m = 35.98 dBc
 High Channel minimum delta GMSK = 90.63 – 54.0 dBµV/m = 36.63 dBc
 Low Channel minimum delta GFSK = 90.11 – 54.0 dBµV/m = 36.11 dBc
 High Channel minimum delta GFSK = 89.44 – 54.0 dBµV/m = 35.44 dBc

FCC Part 15.249 requires the attenuation of all emissions outside of the specified band to be at least 50 dB or below the 15.209 limits, whichever is the lesser. In this case, the 15.209 limits were the lesser and used to show compliance.



Marker 1 [T1] RBW 100 kHz RF Att 40 dB

Ref Lvl 3.54 dBm VBW 300 kHz
 26.8 dBm 2.40206413 GHz SWT 5 ms Unit dBm

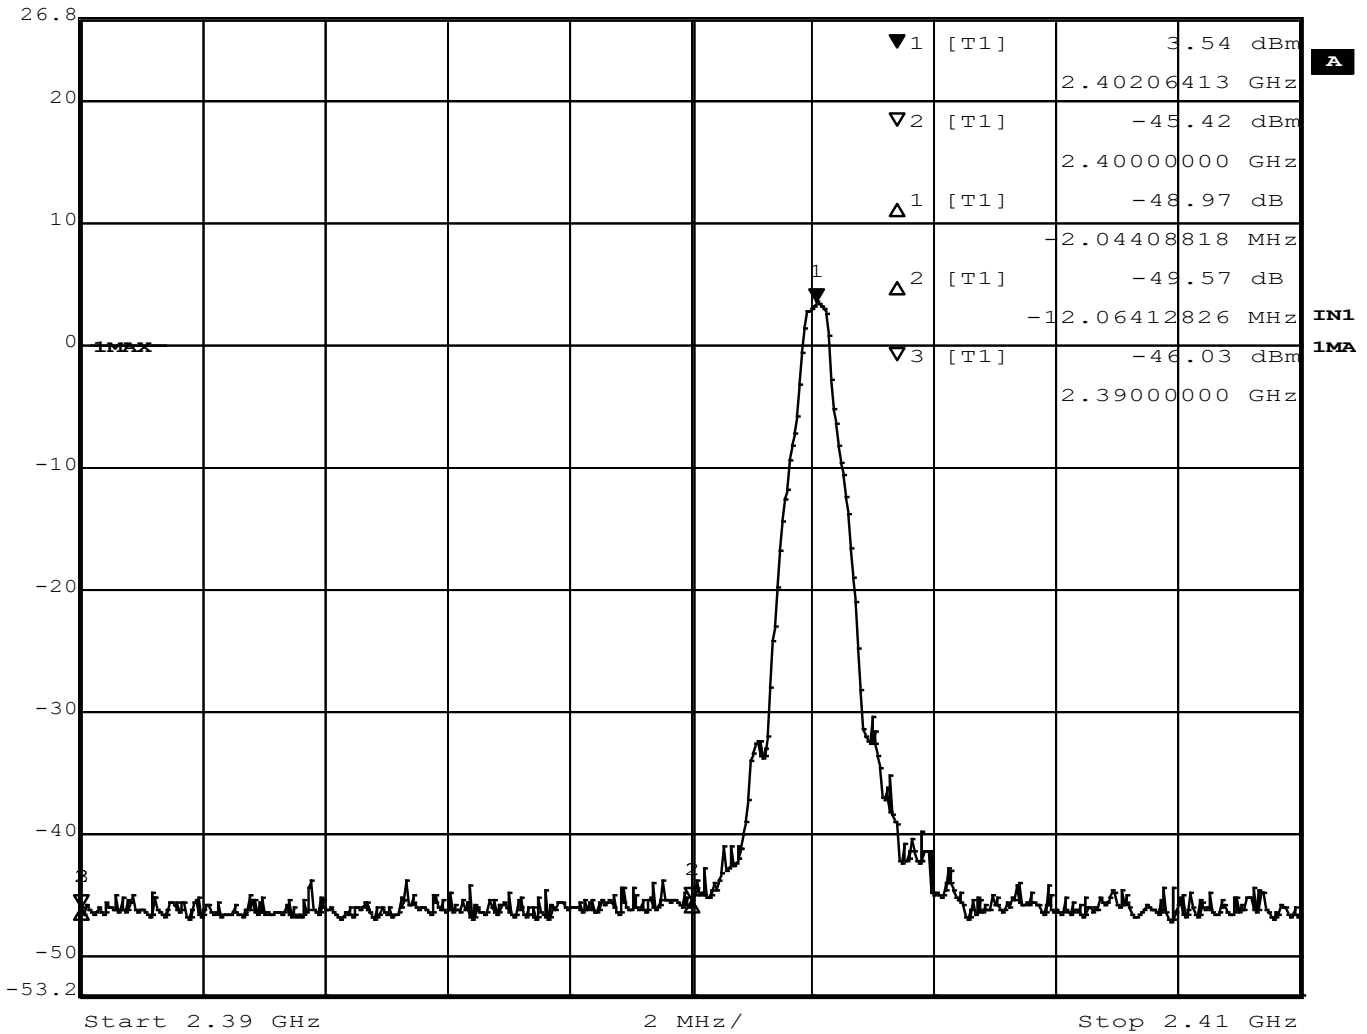


Figure 25 - Band Edge, Low Channel, GMSK



Marker 1 [T1] RBW 100 kHz RF Att 40 dB
 Ref Lvl 1.93 dBm VBW 300 kHz
 26.8 dBm 2.48002806 GHz SWT 5 ms Unit dBm

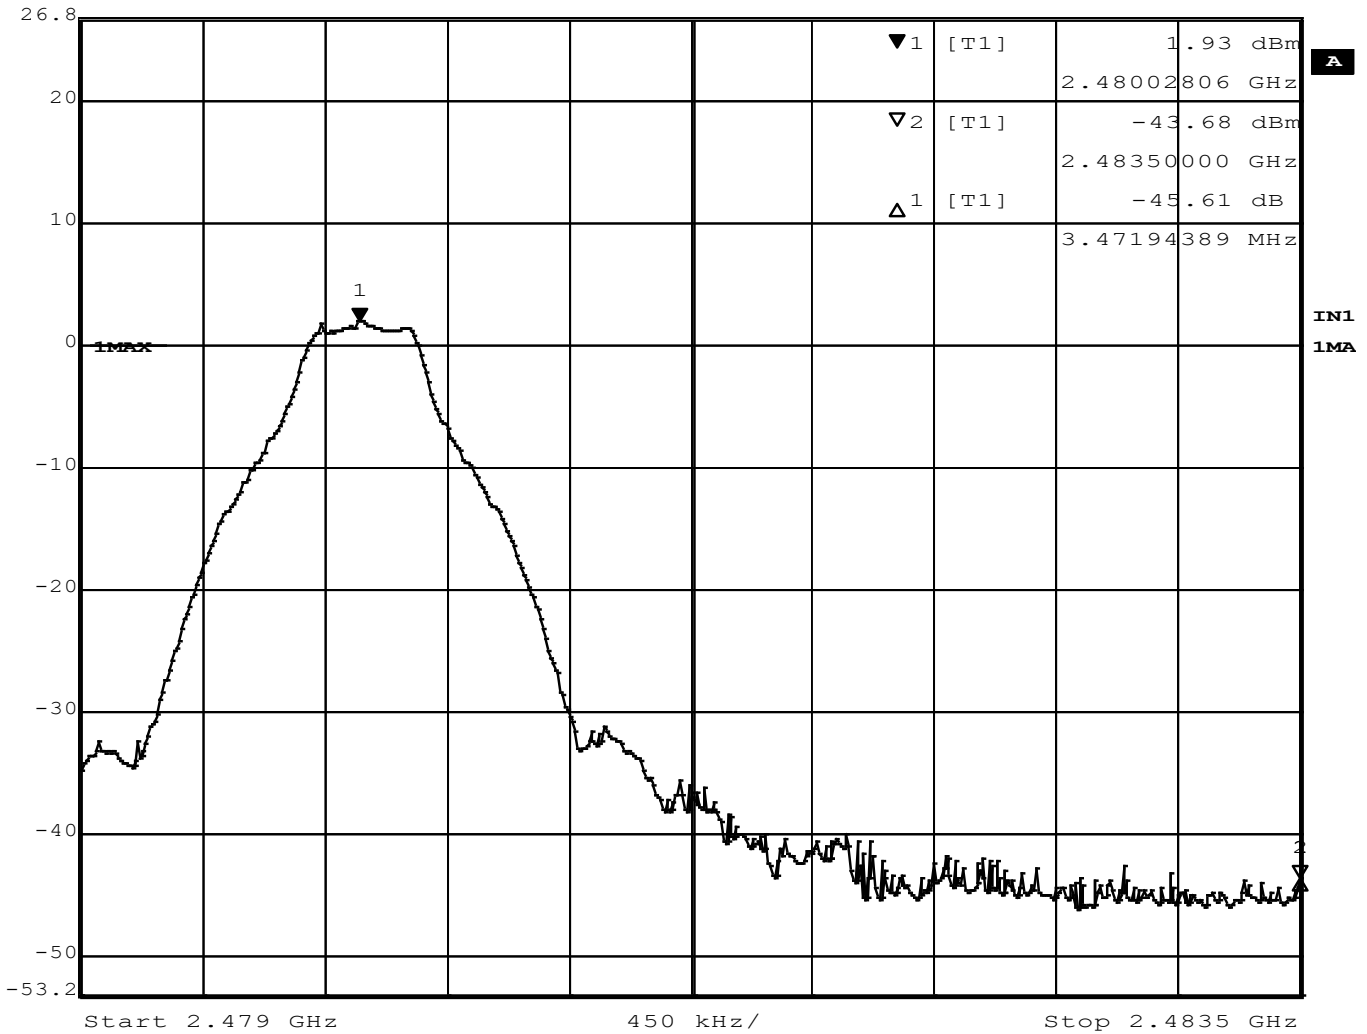


Figure 26 –Band Edge Measurement, High Channel, GMSK



Marker 1 [T1]

RBW 100 kHz RF Att 30 dB

Ref Lvl 5.57 dBm

VBW 300 kHz

17 dBm 2.40207515 GHz

SWT 5 ms Unit dBm


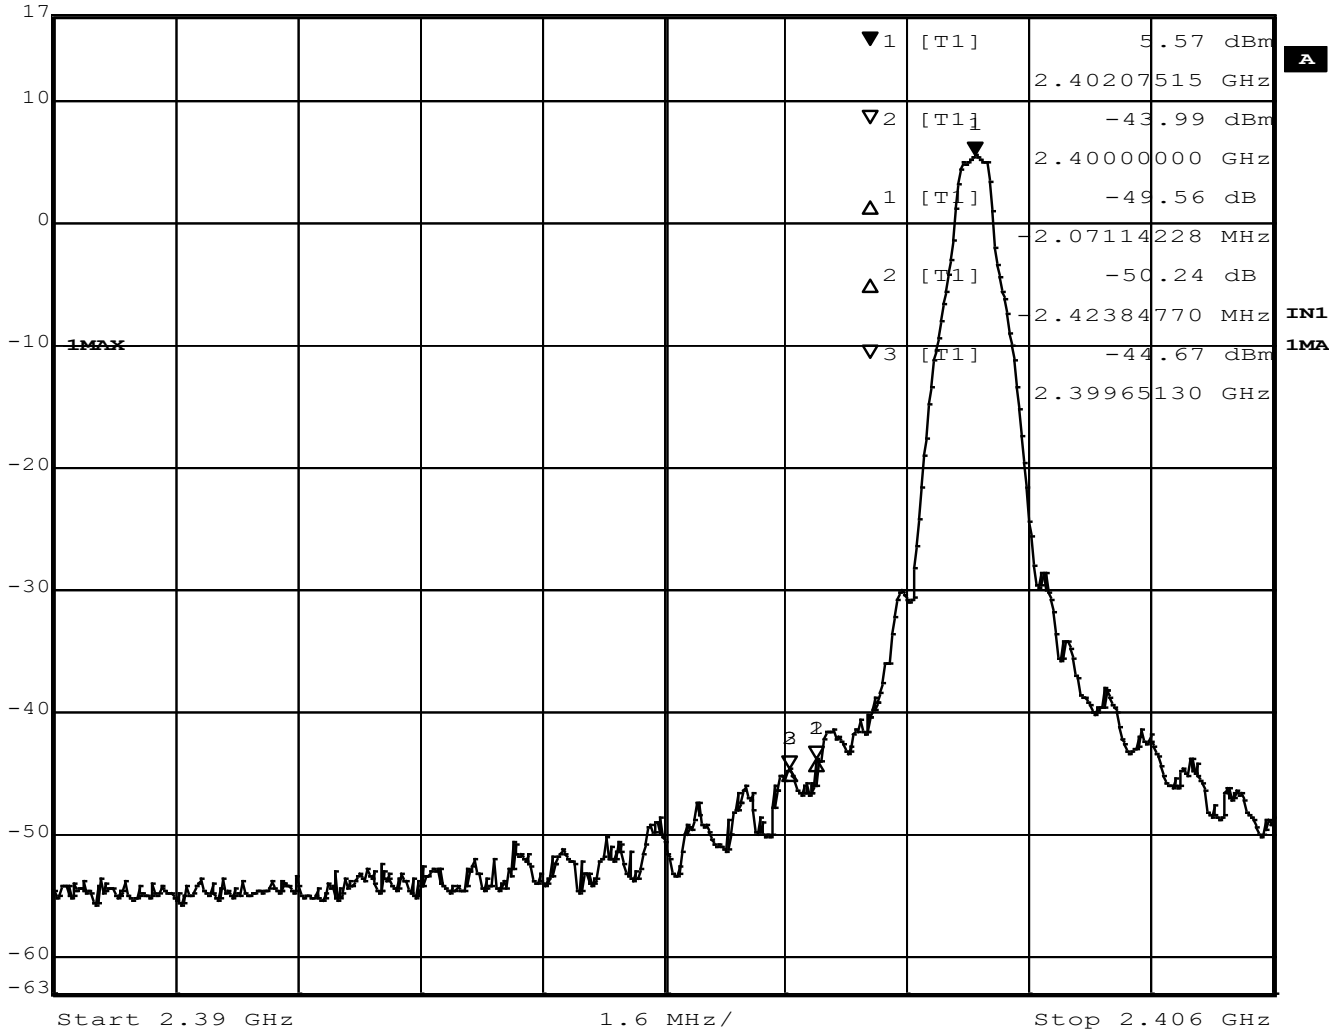


Figure 27 -Band Edge, Low Channel, GFSK



Marker 1 [T1] RBW 100 kHz RF Att 50 dB
 Ref Lvl -0.24 dBm VBW 300 kHz
 25 dBm 2.48003707 GHz SWT 5 ms Unit dBm

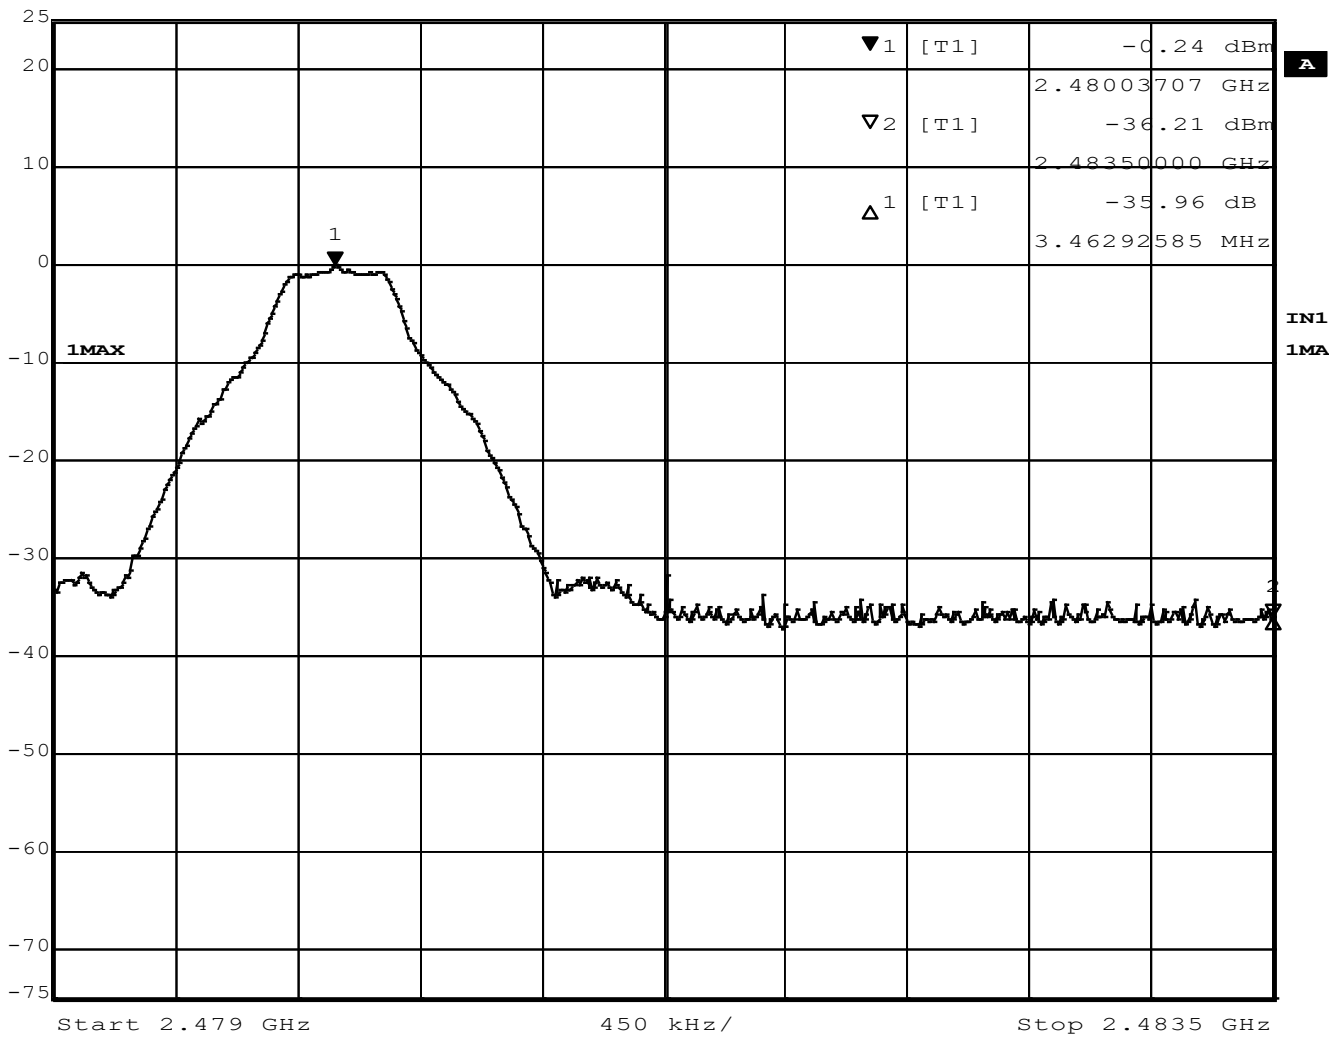

Date: 3.JAN.2019 08:58:30

Figure 28 – Band Edge Measurement, High Channel, GFSK



Report Number:	R20181114-21-02	Rev	B
Prepared for:	Garmin		

APPENDIX A: SAMPLE CALCULATION

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF - (-CF + AG) + AV$$

where FS = Field Strength

- RA = Receiver Amplitude
- AF = Antenna Factor
- CF = Cable Attenuation Factor
- AG = Amplifier Gain
- AV = Averaging Factor (if applicable)


Assume a receiver reading of 55 dB μ V is obtained. The Antenna Factor of 12 and a Cable Factor of 1.1 is added. The Amplifier Gain of 20 dB is subtracted, giving a field strength of 48.1 dB μ V/m.

$$FS = 55 + 12 - (-1.1 + 20) + 0 = 48.1 \text{ dB}\mu\text{V/m}$$

The 48.1 dB μ V/m value can be mathematically converted to its corresponding level in μ V/m.

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(48.1 \text{ dB}\mu\text{V/m})/20] = 254.1 \mu\text{V/m}$$

AV is calculated by the taking the $20 \cdot \log(T_{on}/100)$ where T_{on} is the maximum transmission time in any 100ms window.

	Report Number:	R20181114-21-02	Rev	B
	Prepared for:	Garmin		

EIRP Calculations

In cases where direct antenna port measurement is not possible or would be inaccurate, output power is measured in EIRP. The maximum field strength is measured at a specified distance and the EIRP is calculated using the following equation;

$$EIRP \text{ (Watts)} = [\text{Field Strength (V/m)} \times \text{antenna distance (m)}]^2 / 30$$

$$\text{Power (watts)} = 10^{[\text{Power (dBm)}/10]} / 1000$$

$$\text{Voltage (dB}\mu\text{V)} = \text{Power (dBm)} + 107 \text{ (for } 50\Omega \text{ measurement systems)}$$

$$\text{Field Strength (V/m)} = 10^{[\text{Field Strength (dB}\mu\text{V/m)} / 20]} / 10^6$$

$$\text{Gain} = 1 \text{ (numeric gain for isotropic radiator)}$$

Conversion from 3m field strength to EIRP (d=3):

$$EIRP = [\text{FS(V/m)} \times d^2]/30 = \text{FS} [0.3] \quad \text{for } d = 3$$

$$EIRP(\text{dBm}) = \text{FS}(\text{dB}\mu\text{V/m}) - 10(\log 10^9) + 10\log[0.3] = \text{FS}(\text{dB}\mu\text{V/m}) - 95.23$$

10log(10^9) is the conversion from micro to milli



Report Number:	R20181114-21-02	Rev	B
Prepared for:	Garmin		

APPENDIX B – MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been for tests performed in this test report:

Test	Frequency Range	Uncertainty Value (dB)
Radiated Emissions, 3m	30MHz - 1GHz	3.82
Radiated Emissions, 3m	1GHz - 18GHz	4.44
Emissions limits, conducted	30MHz – 18GHz	±3.30 dB

Expanded uncertainty values are calculated to a confidence level of 95%.



Report Number:

R20181114-21-02

Rev

B

Prepared for:

Garmin

REPORT END