

SAR Test Report - New Certification

Applicant:



Garmin International Inc.
1200 East 151 St
Olathe, KS, 66062
USA

Maximum Reported 1g SAR				
FCC	DTS (WiFi)	Extremity:	0.44	W/kg
	DXX (BT)	Extremity:	0.01	
	DXX (ANT)	Extremity:	0.02	
	Simultaneous:		0.45	
ISED	DTS (WiFi)	Extremity:	0.44	
	DXX (BT)	Extremity:	0.01	
	DXX (ANT)	Extremity:	0.02	
	Simultaneous:		0.45	
General Population Limit:			4.00	

FCC ID:

IPH-03847

Product Model Number / HVIN

A03847

IC ID:

1792A-03847

Product Name / PMN

A03847

In Accordance With:

FCC 47 CFR §2.1093

Radiofrequency Radiation Exposure Evaluation: Portable Devices

IC RSS-102 Issue 5

Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)

Approved By:



Ben Hewson, President

Celltech Labs Inc.
21-364 Lougheed Rd.
Kelowna, BC, V1X 7R8
Canada



Test Lab Certificate: 2470.01



**Industry
Canada**

IC Registration 3874A-1



FCC Registration: 714830

This report shall not be reproduced in any form without the expressed written consent of Celltech Labs Inc.

Table of Contents

1.0 DOCUMENT CONTROL.....	4
2.0 CLIENT AND DEVICE INFORMATION.....	5
3.0 SCOPE OF EVALUATION.....	6
4.0 NORMATIVE REFERENCES.....	7
5.0 STATEMENT OF COMPLIANCE.....	8
6.0 SAR MEASUREMENT SYSTEM.....	9
7.0 RF CONDUCTED POWER MEASUREMENT.....	10
TABLE 7.0 CONDUCTED POWER MEASUREMENTS.....	10
TABLE 7.1 CONDUCTED POWER MEASUREMENTS.....	11
TABLE 7.2 CONDUCTED POWER MEASUREMENTS.....	12
8.0 NUMBER OF TEST CHANNELS (N_c) AND CONFIGURATIONS.....	13
9.0 SAR MEASUREMENT SUMMARY.....	14
TABLE 9.0: MEASURED RESULTS.....	14
10.0 SCALING OF MAXIMUM MEASURED SAR.....	15
TABLE 10.0 SAR SCALING.....	15
11.0 SAR EXPOSURE LIMITS.....	21
TABLE 11.0 EXPOSURE LIMITS.....	21
12.0 DETAILS OF SAR EVALUATION.....	22
12.0 DAY LOG.....	22
12.1 DUT SETUP AND CONFIGURATION.....	23
12.2 DUT CYCLE EVALUATION.....	24
12.3 DUT POSITIONING.....	26
12.4 GENERAL PROCEDURES AND REPORT.....	27
12.5 FLUID DIELECTRIC AND SYSTEMS PERFORMANCE CHECK.....	28
12.6 SCAN RESOLUTION 100MHZ TO 2GHZ.....	28
12.7 SCAN RESOLUTION 2GHZ TO 3GHZ.....	29
12.8 SCAN RESOLUTION 5GHZ TO 6GHZ.....	29
13.0 MEASUREMENT UNCERTAINTIES.....	30
TABLE 13.0 MEASUREMENT UNCERTAINTY.....	30
TABLE 13.1 CALCULATION OF DEGREES OF FREEDOM.....	31
14.0 FLUID DIELECTRIC PARAMETERS.....	32
TABLE 14.0 FLUID DIELECTRIC PARAMETERS 2450MHZ HEAD TSL.....	32
TABLE 14.1 FLUID DIELECTRIC PARAMETERS 2450MHZ HEAD TSL.....	34
TABLE 14.2 FLUID DIELECTRIC PARAMETERS 5250MHZ HEAD TSL.....	36
TABLE 14.3 FLUID DIELECTRIC PARAMETERS 5750MHZ HEAD TSL.....	38
15.0 SYSTEM VERIFICATION TEST RESULTS.....	39
TABLE 15.0 SYSTEM VERIFICATION RESULTS 2450MHZ HEAD TSL.....	39
TABLE 15.1 SYSTEM VERIFICATION RESULTS 5250MHZ HEAD TSL.....	40
TABLE 15.2 SYSTEM VERIFICATION RESULTS 5750MHZ HEAD TSL.....	41
16.0 SYSTEM VALIDATION SUMMARY.....	42

TABLE 16.0 SYSTEM VALIDATION SUMMARY.....	42
17.0 MEASUREMENT SYSTEM SPECIFICATIONS.....	43
TABLE 17.0 MEASUREMENT SYSTEM SPECIFICATIONS.....	43
18.0 TEST EQUIPMENT LIST.....	45
TABLE 18.0 EQUIPMENT LIST AND CALIBRATION.....	45
19.0 FLUID COMPOSITION.....	46
TABLE 19.0 FLUID COMPOSITION 2450MHz HEAD TSL.....	46
TABLE 19.1 FLUID COMPOSITION 5250MHz HEAD TSL.....	46
TABLE 19.2 FLUID COMPOSITION 5750MHz HEAD TSL.....	46
APPENDIX A – SYSTEM VERIFICATION PLOTS.....	47
APPENDIX B – MEASUREMENT PLOTS OF MAXIMUMUM MEASURED SAR.....	53
APPENDIX C - SETUP PHOTOS.....	61
APPENDIX D – DUT AND ACCESSORY PHOTOS.....	70
APPENDIX E – PROBE CALIBRATION.....	76
APPENDIX F – DIPOLE CALIBRATION.....	77
APPENDIX G - PHANTOM.....	78

1.0 DOCUMENT CONTROL

Revision History					
Samples Tested By:		Trevor Whillock	Date(s) of Evaluation:		28 Jan - 6 Feb 2020
Report Prepared By:		Art Voss	Report Reviewed By:		Trevor Whillock
Report Revision	Description of Revision	Revised Section	Revised By	Revision Date	
1.0	Initial Release	n/a	Art Voss	6 February 2020	
1.1	Corrected Frequency Reference	2.0	Art Voss	7 February 2020	
2.0	Corrected Terms-PMN to HVIN	Cover Page	Trevor Whillock	18 February 2020	

2.0 CLIENT AND DEVICE INFORMATION

Client Information	
Applicant Name	Garmin International Inc.
Applicant Address	1200 East 151st St.
	Olathe, KS, 66062
	USA
DUT Information	
Device Identifier(s):	FCC ID: IPH-03847
	IC ID: 1792A-03847
Device Marketing Name / PMN:	A03847
Device Model(s) / HVIN:	A03847
Type of Equipment:	Unlicensed National Information Infrastructure (NII) - WiFi
	Digital Transmission System (DTS) - BLE / WiFi
	Digital Spread Spectrum (DSS) - BT
	Low Power Communication Device Transmitter (DXX)
	WiFi Device
	BlueTooth Device
	Lower Power Transmitter (2400-2483.5MHz)
DUT Information (Cont.)	
Transmit Frequency Range:	UNII-1: 5180-5240MHz
	UNII-3: 5745-5825MHz
	DTS (WiFi): 2412-2462MHz
	DXX (BLE): 2402-2480MHz
	DXX (BT): 2402-2480
	DXX (ANT): 2402-2480
Number of Channels:	Programmable
Max Rated Output Power: - Includes Tune-Up Tolerance - Antenna Port Conducted - Detector: Average (RMS)	UNII-1: 5180-5240MHz: 14.25dBm
	UNII-3: 5745-5825MHz: 14.6dBm
	DTS (WiFi): 2412-2462MHz: 17.2dBm
	DXX (BLE): 2402-2480MHz: -0.8dBm
	DXX (BT): 2402-2480: 1.26dBm
	DXX (ANT): 2402-2480: 1.26dBm
Antenna Type / Gain	Antenna 1: PCB Inverted "F", 3.9dBi, UNII-1 & UNII-3
	Antenna 2: PCB Inverted "F", 3.0dBi, DTS (WiFi) & DXX (ANT)
	Antenna 3: PCB Inverted "F", 2.2dBi, DXX (BT) & DXX (BLE)
Duty Cycle:	100%
DUT Power Source:	5VDC USB, Internal Li-Ion
DUT Dimensions: (L x W x H)	146 x 87 x 23
Deviation(s) from standard/procedure:	None
Modification of DUT:	None

3.0 SCOPE OF EVALUATION

This Certification Report was prepared on behalf of:

Garmin International Inc.

, (the '*Applicant*'), in accordance with the applicable Federal Communications Commission (FCC) CFR 47 and Innovation, Scientific and Economic Development (ISED) Canada rules parts and regulations (the '*Rules*'). The scope of this investigation was limited to only the equipment, devices and accessories (the '*Equipment*') supplied by the *Applicant*. The tests and measurements performed on this *Equipment* were only those set forth in the applicable *Rules* and/or the Test and Measurement Standards they reference. The *Rules* applied and the Test and Measurement Standards used during this evaluation appear in the Normative References section of this report. The limits set forth in the technical requirements of the applicable *Rules* were applied to the measurement results obtained during this evaluation and, unless otherwise noted, these limits were used as the Pass/Fail criteria. The Pass/Fail statements made in this report apply to only the tests and measurements performed on only the *Equipment* tested during this evaluation. Where applicable and permissible, information including test and measurement data and/or results from previous evaluations of same or similar equipment, devices and/or accessories may be cited in this report.

As per FCC 47 CFR Part §2.1091 and §2.1093, an RF Exposure evaluation report is required for this *Equipment* and the results of the RF Exposure evaluation appear in this report.

Equipment:

The A03847 is a *mobile* or *portable* GPS transceiver. The device contains several different transmitters namely: 5GHz UNII-1 and UNII-3, 2.4GHz WiFi, BT, BLE and ANT. The transmitters transmit over three antennas some of which can simultaneously transmit. The Simultaneous Transmission Evaluation can be found in Section 11.0.

Application:

This is an application for a new FCC and ISED certification.

Scope:

Since this device can be handheld while transmitting, the device will be evaluated for SAR in the Extremity configuration. The device cannot be worn on the body and is not intended to be held to the ear. Since the overall diagonal dimension is less than 20cm, the test configurations described in KDB 941225 D07v01r02 "UMPC Mini-Tablet" will be considered. Additionally, since simultaneous transmission conditions are possible, Simultaneous Transmission SAR will be evaluated. Where applicable, SAR test reduction or SAR test exclusion applied.

4.0 NORMATIVE REFERENCES

Normative References*	
ANSI / ISO 17025:2017	General Requirements for competence of testing and calibration laboratories
FCC CFR Title 47 Part 2 Title 47: Part 2.1093:	Code of Federal Regulations Telecommunication Radiofrequency Radiation Exposure Evaluation: Portable Devices
Health Canada Safety Code 6 (2015)	Limits of Human Exposure to Radiofrequency Electromagnetic Energy in the Frequency Range from 3kHz to 300GHz
Industry Canada Spectrum Management & Telecommunications Policy RSS-102 Issue 5:	Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)
IEEE International Committee on Electromagnetic Safety IEEE 1528-2013:	IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
IEC International Standard IEC 62209-2 Edition 1.1 2019	Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Part 2
FCC KDB KDB 865664 D01v01r04	SAR Measurement Requirements for 100MHz to 6GHz
FCC KDB KDB 447498 D01v06r02	Mobile and Portable Devices RF Exposure Procedures and Equipment Authorization Policies
FCC KDB KDB 248227 D01v02r02	SAR Guidance for IEEE 802.11 (WiFi) Transmitters
* When the issue number or issue date is omitted, the latest version is assumed.	

5.0 STATEMENT OF COMPLIANCE

This measurement report demonstrates that samples of the product model(s) were evaluated for Specific Absorption Rate (SAR) on the date(s) shown, in accordance with the Measurement Procedures cited and were found to comply with the Standard(s) Applied based on the Exposure Limits of the Use Group indicated for which the product is intended to be used.

Applicant: Garmin International Inc.	Model Name / PMN: A03847	
Standard(s) Applied: FCC 47 CFR §2.1093 Health Canada's Safety Code 6	Measurement Procedure(s): FCC KDB 865664, FCC KDB 447498, FCC KDB 248227 Industry Canada RSS-102 Issue 5 IEEE Standard 1528-2013, IEC 62209-2	
Reason For Issue: <input checked="" type="checkbox"/> New Certification <input type="checkbox"/> Class I Permissive Change <input type="checkbox"/> Class II Permissive Change	Use Group: <input checked="" type="checkbox"/> General Population / Uncontrolled <input type="checkbox"/> Occupational / Controlled	Limits Applied: <input type="checkbox"/> 1.6W/kg - 1g Volume <input type="checkbox"/> 8.0W/kg - 1g Volume <input checked="" type="checkbox"/> 4.0W/kg - 10g Volume
Reason for Change: None	Date(s) Evaluated: 28 Jan - 6 Feb, 2019	

The results of this investigation are based solely on the test sample(s) provided by the applicant which was not adjusted, modified or altered in any manner whatsoever except as required to carry out specific tests or measurements. A description of the device, operating configuration, detailed summary of the test results, methodologies and procedures used during this evaluation, the equipment used and the various provisions of the rules are included in this test report.

I attest that the data reported herein is true and accurate within the tolerance of the Measurement Instrument Uncertainty; that all tests and measurements were performed in accordance with accepted practices or procedures; and that all tests and measurements were performed by me or by trained personnel under my direct supervision. The results of this investigation are based solely on the test sample(s) provided by the client which were not adjusted, modified or altered in any manner whatsoever, except as required to carry out specific tests or measurements. This test report has been completed in accordance with ISO/IEC 17025.



Art Voss, P.Eng.
 Technical Manager
 Celltech Labs Inc.


6 February 2020
 Date



6.0 SAR MEASUREMENT SYSTEM

SAR Measurement System

Celltech Labs Inc. SAR measurement facility employs a Dosimetric Assessment System (DASY™) manufactured by Schmid & Partner Engineering AG (SPEAG™) of Zurich, Switzerland. The DASY6 measurement system is comprised of the measurement server, a robot controller, a computer, a near-field probe, a probe alignment sensor, an Elliptical Planar Phantom (ELI) phantom and a specific anthropomorphic mannequin (SAM) phantom for Head and/or Body SAR evaluations. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF). A cell controller system contains the power supply, robot controller and a teach pendant (Joystick) to control the robot’s servo motors. The Staubli robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical form the DAE to digital electronic signal and transfers data to the DASY6 measurement server. The DAE4 utilizes a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16-bit AD-converter, a command decoder and a control logic unit. Transmission to the DASY6 measurement server is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe-mounting device includes two different sensor systems for frontal and sidewise probe contacts. The sensor systems are also used for mechanical surface detection and probe collision detection. The robot utilizes a controller with built in VME-bus computer.

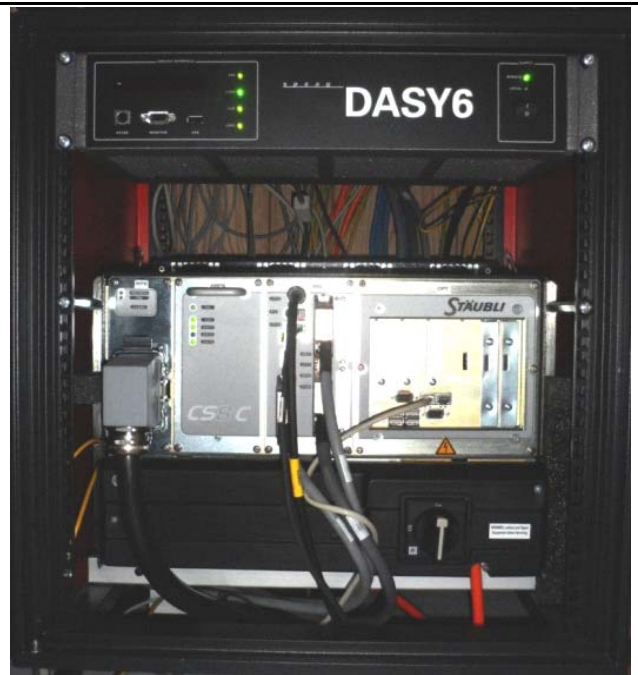

DASY 6 SAR System with SAM Phantom

DASY 6 Measurement Controller

7.0 RF CONDUCTED POWER MEASUREMENT

Table 7.0 Conducted Power Measurements

A03847 - Conducted Power Measurements - Average									
Channel	Frequency (MHz)	Measured Power (dBm)	Max Rated Power (dBm)	Rated Power (W)	Delta (dB)	SAR Test Channel (Y/N)	Mode	Modulation	Bandwidth (MHz)
36	5180	13.73	14.25	0.027	-0.52	-	WiFi 802.11(a)	OFDM-6Mbps	20
38	5190	14.19	14.25	0.027	-0.06	-			
40	5200	14.24	14.25	0.027	-0.01	Y			
42	5210	14.16	14.25	0.027	-0.09	-			
44	5220	14.19	14.25	0.027	-0.06	-			
46	5230	14.21	14.25	0.027	-0.04	-			
48	5240	14.09	14.25	0.027	-0.16	-			
149	5745	14.39	14.60	0.029	-0.21	-			
151	5755	14.43	14.60	0.029	-0.17	-			
153	5765	14.45	14.60	0.029	-0.15	-			
155	5775	14.46	14.60	0.029	-0.14	-			
157	5785	14.49	14.60	0.029	-0.11	-			
159	5795	14.59	14.60	0.029	-0.01	Y			
161	5805	14.58	14.60	0.029	-0.02	-			
165	5825	14.49	14.60	0.029	-0.11	-			
40	5200	14.04	14.25	0.027	-0.21	-			
44	5220	14.17	14.25	0.027	-0.08	-			
46	5230	14.15	14.25	0.027	-0.10	-			
159	5765	14.49	14.60	0.029	-0.11	-			
161	5795	14.49	14.60	0.029	-0.11	-			
165	5825	14.57	14.60	0.029	-0.03	-			
40	5200	13.73	14.25	0.027	-0.52	-			
44	5200	13.74	14.25	0.027	-0.51	-			
46	5230	13.74	14.25	0.027	-0.51	-			
159	5795	14.08	14.60	0.029	-0.52	-			
161	5805	14.06	14.60	0.029	-0.54	-			
165	5825	13.86	14.60	0.029	-0.74	-			
40	5200	13.57	14.25	0.027	-0.68	-			
44	5200	13.75	14.25	0.027	-0.50	-			
46	5230	13.73	14.25	0.027	-0.52	-			
159	5795	14.52	14.60	0.029	-0.08	-			
161	5805	14.53	14.60	0.029	-0.07	-			
165	5825	14.56	14.60	0.029	-0.04	-			
40	5200	14.1	14.25	0.027	-0.15	-			
40	5200	13.75	14.25	0.027	-0.50	-			
159	5795	14.05	14.60	0.029	-0.55	-			
159	5795	14.09	14.60	0.029	-0.51	-			
40	5200	14.27	14.25	0.027	0.02	-			
40	5200	13.87	14.25	0.027	-0.38	-			
40	5200	13.66	14.25	0.027	-0.59	-			
159	5795	14.06	14.60	0.029	-0.54	-			
159	5795	14.13	14.60	0.029	-0.47	-			
159	5795	14.06	14.60	0.029	-0.54	-			

Table 7.1 Conducted Power Measurements

A03847 - Conducted Power Measurements - Average									
Channel	Frequency (MHz)	Measured Power (dBm)	Max Rated Power (dBm)	Rated Power (W)	Delta (dB)	SAR Test Channel (Y/N)	Mode	Modulation	Bandwidth (MHz)
1	2412	16.89	17.20	0.052	-0.31	-	802.11b	DSS-1Mbps	20MHz
2	2417	16.23	17.20	0.052	-0.97	-			
3	2422	16.25	17.20	0.052	-0.95	-			
4	2427	16.34	17.20	0.052	-0.86	-			
5	2432	16.35	17.20	0.052	-0.85	-			
6	2437	16.42	17.20	0.052	-0.78	-			
7	2442	16.38	17.20	0.052	-0.82	-			
8	2447	16.38	17.20	0.052	-0.82	-			
9	2452	16.42	17.20	0.052	-0.78	-			
10	2457	16.37	17.20	0.052	-0.83	-			
11	2462	16.44	17.20	0.052	-0.76	-			
12	2467	16.15	17.20	0.052	-1.05	-			
13	2472	15.99	17.20	0.052	-1.21	-			
1	2417	16.28	17.20	0.052	-0.92	-	802.11g	DSS-2Mbps	
		17.10	17.20	0.052	-0.10	-		DSS-5.5Mbps	
		17.08	17.20	0.052	-0.12	-		DSS-11Mbps	
		13.41	17.20	0.052	-3.79	-	802.11n	OFDM-6Mbps	
		13.91	17.20	0.052	-3.29	-		OFDM-54Mbps	
		13.26	17.20	0.052	-3.94	-		MCS-0	
6	2437	13.61	17.20	0.052	-3.59	-	MCS-7		
		16.47	17.20	0.052	-0.73	-	802.11b	DSS-2Mbps	
		17.21	17.20	0.052	0.01	-		DSS-5.5Mbps	
		17.18	17.20	0.052	-0.02	-		DSS-11Mbps	
		16.58	17.20	0.052	-0.62	-	802.11g	OFDM-6Mbps	
		14.10	17.20	0.052	-3.10	-		OFDM-54Mbps	
16.54	17.20	0.052	-0.66	-	802.11n	MCS-0			
13.83	17.20	0.052	-3.37	-		MCS-7			
11	2462	16.46	17.20	0.052		-0.74	-	802.11b	DSS-2Mbps
		17.22	17.20	0.052	0.02	-	DSS-5.5Mbps		
		17.15	17.20	0.052	-0.05	-	DSS-11Mbps		
		13.66	17.20	0.052	-3.54	-	802.11g	OFDM-6Mbps	
		14.16	17.20	0.052	-3.04	-		OFDM-54Mbps	
		13.54	17.20	0.052	-3.66	-		802.11n	MCS-0
13.82	17.20	0.052	-3.38	-	MCS-7				
13	2472	16.12	17.20	0.052	-1.08	-	802.11b		DSS-2Mbps
		16.56	17.20	0.052	-0.64	-		DSS-5.5Mbps	
		16.60	17.20	0.052	-0.60	-		DSS-11Mbps	
		16.10	17.20	0.052	-1.10	-	802.11g	OFDM-6Mbps	
		13.55	17.20	0.052	-3.65	-		OFDM-54Mbps	
		15.82	17.20	0.052	-1.38	-		802.11n	MCS-0
13.17	17.20	0.052	-4.03	-	MCS-7				
1	2412	17.03	17.20	0.052	-0.17	-	802.11b		DSS-11Mbps
2	2417	16.96	17.20	0.052	-0.24	-		DSS-11Mbps	
3	2422	17.05	17.20	0.052	-0.15	-		DSS-11Mbps	
4	2427	17.04	17.20	0.052	-0.16	-		DSS-11Mbps	
5	2432	17.16	17.20	0.052	-0.04	-		DSS-11Mbps	
6	2437	17.12	17.20	0.052	-0.08	-		DSS-11Mbps	
7	2442	17.17	17.20	0.052	-0.03	-		DSS-11Mbps	
8	2447	17.19	17.20	0.052	-0.01	Y		DSS-11Mbps	
9	2452	17.13	17.20	0.052	-0.07	-		DSS-11Mbps	
10	2457	17.15	17.20	0.052	-0.05	-		DSS-11Mbps	
11	2462	17.12	17.20	0.052	-0.08	-		DSS-11Mbps	
12	2467	16.99	17.20	0.052	-0.21	-		DSS-11Mbps	
13	2472	17.02	17.20	0.052	-0.18	-		DSS-11Mbps	

Table 7.2 Conducted Power Measurements

A03847 - Conducted Power Measurements - Average								
Channel	Frequency (MHz)	Measured Power (dBm)	Max Rated Power (dBm)	Rated Power (W)	Delta (dB)	SAR Test Channel (Y/N)	Mode	Modulation
2	2402	0.36	1.26	0.001	-0.90	Y	BT	BT(GFSK)
41	2441	0.23	1.26	0.001	-1.03	-		
80	2480	0.22	1.26	0.001	-1.04	-		
2	2402	-1.68	-0.80	0.001	-0.88	-	BLE	BT(PI/4-DQPSK)
		-1.89	-0.80	0.001	-1.09	-		BT(8DPSK)
		-1.35	-0.80	0.001	-0.55	-		BLE(GMSK)
					0.00	-	ANT	ANT(GFSK)

The rated power and tolerance are stated for typical transmission modes and data rates. Some modes and data rates may produce lower than rated conducted power levels. Power measurements taken across the various channels, modes and data rates did not produce levels in excess of the Rated Power plus Tolerance. SAR was evaluated using the power level setting specified by the manufacture to be the max output power and produce the most conservative SAR. SAR was evaluated at the maximum average tune up tolerance. See section 2.0 Client and Device Information for details. The reported SAR was not scaled down.

8.0 NUMBER OF TEST CHANNELS (N_c) AND CONFIGURATIONS

This device is intended to be mounted on a vehicle dashboard; optionally, the device can be hand-held. Additional evaluations were done on select edges and sides that were in close proximity to the transmitter. Note: FCC KDB 941225D07V01r02 was used as guidance for the selection of test positions for SAR evaluation. Please see section 12.1 for details.

As per FCC KDB 24827, the required 802.11 test channels are Ch1, Ch6 and Ch 11; however, higher conducted output power was found on channel 3 in the lower 2.4GHz WIFI frequency band. As a result, the channels selected for SAR evaluation included Ch3, Ch8, and Ch10.

When applicable, SAR test reduction methods may be utilized.

802.11b DSSS SAR test reduction is determined according to the following:

- a) When the reported SAR of the highest measured maximum output power channel is \leq to 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- b) When the reported SAR is $>$ 0.8 W/kg, SAR is required for that exposure configuration using the next highest output power channel. When any reported SAR is $>$ 1.2 W/Kg, SAR is required for the third channel.

2.4 GHz 802.11g/n OFDM SAR Test Exclusion Requirements

- a) When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.
- b) When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is \leq 1.2 W/kg.

See 12.1 for details.

The initial test configuration for 2.4 GHz and 5 GHz OFDM transmission modes is determined by the 802.11 configuration with the highest maximum output power specified for production units, including tune-up tolerance, in each standalone and aggregated frequency band. An initial test position was established for Both UNII1 and UNII 3 bands.

When the reported SAR of the initial test configuration is $>$ 0.8 W/kg, SAR measurement is required for subsequent next highest measured output power channel(s) in the initial test configuration until reported SAR is \leq 1.2 W/kg or all required channels are tested.

9.0 SAR MEASUREMENT SUMMARY

Table 9.0: Measured Results

Measured SAR Results (10g) - Extremity Configuration (FCC/ISED)																
Date	Plot ID	DUT		Test Frequency (MHz)	Modulation	Accessories				DUT Spacing		Conducted Power (dBm)	Measured SAR (10g) 100% DC (W/kg)	SAR Drift (dB)		
		M/N	Type			Antenna ID	Battery ID	Body ID	Audio ID	DUT (mm)	Antenna (mm)					
30 Jan 2020	B1	A03847	GPS	2447	DSSS-11Mbps	n/a	n/a	n/a	n/a	0	0	17.19	0.189	-0.640		
31 Jan 2020	B2	A03847	GPS	2447	DSSS-11Mbps	n/a	n/a	n/a	n/a	0	0	17.19	0.168	1.490		
31 Jan 2020	B3	A03847	GPS	2447	DSSS-11Mbps	n/a	n/a	n/a	n/a	0	0	17.19	0.400	-0.260		
31 Jan 2020	B4	A03847	GPS	2447	DSSS-11Mbps	n/a	n/a	n/a	n/a	0	0	17.19	0.081	0.170		
31 Jan 2020	B5	A03847	GPS	2447	DSSS-11Mbps	n/a	n/a	n/a	n/a	0	0	17.19	0.388	0.260		
31 Jan 2020	B6	A03847	GPS	2402	BT-GFSK	n/a	n/a	n/a	n/a	0	0	0.39	0.006	1.340		
31 Jan 2020	B7*	A03847	GPS	2402	ANT	n/a	n/a	n/a	n/a	0	0	1.26	0.023	0.000		
04 Feb 2020	B8	A03847	GPS	5200	OFDM-6Mbps	n/a	n/a	n/a	n/a	0	0	14.24	0.193	1.750		
04 Feb 2020	B9	A03847	GPS	5200	OFDM-6Mbps	n/a	n/a	n/a	n/a	0	0	14.24	0.019	0.000		
04 Feb 2020	B10	A03847	GPS	5200	OFDM-6Mbps	n/a	n/a	n/a	n/a	0	0	14.24	0.121	0.100		
04 Feb 2020	B11	A03847	GPS	5200	OFDM-6Mbps	n/a	n/a	n/a	n/a	0	0	14.24	0.031	0.000		
06 Feb 2020	B12	A03847	GPS	5795	OFDM-6Mbps	n/a	n/a	n/a	n/a	0	0	14.59	0.086	-0.020		
06 Feb 2020	B13	A03847	GPS	5795	OFDM-6Mbps	n/a	n/a	n/a	n/a	0	0	14.59	0.122	0.000		
06 Feb 2020	B14	A03847	GPS	5795	OFDM-6Mbps	n/a	n/a	n/a	n/a	0	0	14.59	0.037	0.000		
06 Feb 2020	B15	A03847	GPS	5795	OFDM-6Mbps	n/a	n/a	n/a	n/a	0	0	14.59	0.164	0.000		
SAR Limit						Spatial Peak				Head/Body		RF Exposure Category				
FCC 47 CFR 2.1093						Health Canada Safety Code 6				10 Gram Average		4.0 W/kg		General Population Extremity		

*Estimated SAR Value

10.0 SCALING OF MAXIMUM MEASURED SAR

Table 10.0 SAR Scaling

Scaling of Maximum Measured SAR (10g)					
Measured Parameters		Configuration			
		Extremity	Extremity	Head	
Plot ID		B15	B8		
Maximum Measured SAR _M		0.164	0.193		(W/kg)
Frequency		5795	5200		(MHz)
Power Drift		0.001 (1)	1.750 (1)		(dB)
Conducted Power		14.590	14.240		(dBm)
Fluid Deviation from Target					
Δe	Permittivity	-3.54%	-5.00%		
Δσ	Conductivity	6.08%	1.51%		

Note(1): Power Drift is Positive, Drift Adjustment not Required.

Fluid Sensitivity Calculation (1g)			IEC 62209-2 Annex F	
Delta SAR = Ce * Δe + Cσ * Δσ			(F.1)	
Ce = (-0.0007854*f ³) + (0.009402*f ²) - (0.02742*f) - 0.2026			(F.2)	
Cσ = (0.009804*f ³) - (0.08661*f ²) + (0.02981*f) + 0.7829			(F.3)	
f	Frequency (GHz)	5.795	5.2	
	Ce	-0.199	-0.201	
	Cσ	-0.045	-0.026	
	Ce * Δe	0.007	0.010	
	Cσ * Δσ	-0.003	0.000	
	ΔSAR	0.004	0.010	(%)

Manufacturer's Tuneup Tolerance				
Measured Conducted Power	14.590	14.240		(dBm)
Rated Conducted Power	14.600	14.250		(dBm)
ΔP	-0.010 (4)	-0.010 (4)		(dB)

Note(4): SAR was Evaluated at the Maximum Tuneup Tolerance. SAR Adjustment is not Required.

SAR Adjustment for Fluid Sensitivity				
SAR ₁ = SAR _M * ΔSAR	0.165	0.195		(W/kg)

SAR Adjustment for Tuneup Tolerance				
SAR ₂ = SAR ₁ + [ΔP]	0.165	0.195		(W/kg)

SAR Adjustment for Drift				
SAR ₃ = SAR ₂ + Drift	0.165	0.195		(W/kg)

reported SAR				
FCC = SAR ₂	0.17	0.20		(W/kg)
ISED = SAR ₃	0.17	0.20		(W/kg)

Scaling of Maximum Measured SAR (10g)					
Measured Parameters		Configuration			
		Extremity	Extremity	Head	
Plot ID		B7	B3		
Maximum Measured SAR _M		0.023	0.400		(W/kg)
Frequency		2402	2447		(MHz)
Power Drift		0.001 (1)	-0.260		(dB)
Conducted Power		1.260	17.190		(dBm)
Fluid Deviation from Target					
Δe	Permittivity	-4.10%	-4.44%		
Δσ	Conductivity	5.11%	7.23%		

Note(1): Power Drift is Positive, Drift Adjustment not Required.

Fluid Sensitivity Calculation (1g)					IEC 62209-2 Annex F	
Delta SAR = C _e * Δe + C _σ * Δσ (F.1)						
C _e = (-0.0007854*f ³) + (0.009402*f ²) - (0.02742*f) - 0.2026 (F.2)						
C _σ = (0.009804*f ³) - (0.08661*f ²) + (0.02981*f) + 0.7829 (F.3)						
f	Frequency (GHz)	2.402	2.447			
	C _e	-0.225	-0.225			
	C _σ	0.491	0.481			
	C _e * Δe	0.009	0.010			
	C _σ * Δσ	0.025	0.035			
	ΔSAR	0.034	0.045		(%)	

Manufacturer's Tuneup Tolerance					
Measured Conducted Power		1.260	17.190		(dBm)
Rated Conducted Power		1.260	17.190		(dBm)
ΔP		0.000 (4)	0.000 (4)		(dB)

Note(4): SAR was Evaluated at the Maximum Tuneup Tolerance. SAR Adjustment is not Required.

SAR Adjustment for Fluid Sensitivity					
SAR ₁ = SAR _M * ΔSAR		0.024	0.418		(W/kg)

SAR Adjustment for Tuneup Tolerance					
SAR ₂ = SAR ₁ + [ΔP]		0.024	0.418		(W/kg)

SAR Adjustment for Drift					
SAR ₃ = SAR ₂ + Drift		0.024	0.444		(W/kg)

reported SAR					
FCC = SAR ₂		0.02	0.42		(W/kg)
ISED = SAR ₃		0.02	0.44		(W/kg)

Scaling of Maximum Measured SAR (10g)			
Measured Parameters	Configuration		
	Extremity	Body	Head
Plot ID	B6		
Maximum Measured SAR _M	0.006		
Frequency	2402		
Power Drift	1.340 (1)	(1)	
Conducted Power	0.390		
Fluid Deviation from Target			
$\Delta\epsilon$	Permittivity	-4.10%	
$\Delta\sigma$	Conductivity	5.11%	

(W/kg)
(MHz)
(dB)
(dBm)

Note(1): Power Drift is Positive, Drift Adjustment not Required.

Fluid Sensitivity Calculation (1g)		IEC 62209-2 Annex F	
Delta SAR = $C_e * \Delta\epsilon + C_\sigma * \Delta\sigma$		(F.1)	
$C_e = (-0.0007854 * f^3) + (0.009402 * f^2) - (0.02742 * f) - 0.2026$		(F.2)	
$C_\sigma = (0.009804 * f^3) - (0.08661 * f^2) + (0.02981 * f) + 0.7829$		(F.3)	
f	Frequency (GHz)	2.402	
	C_e	-0.225	
	C_σ	0.491	
	$C_e * \Delta\epsilon$	0.009	
	$C_\sigma * \Delta\sigma$	0.025	
	ΔSAR	0.034	

(%)

Manufacturer's Tuneup Tolerance			
Measured Conducted Power	0.390		
Rated Conducted Power	1.260		
ΔP	-0.870 (4)	(4)	

(dBm)
(dBm)
(dB)

Note(4): SAR was Evaluated at the Maximum Tuneup Tolerance. SAR Adjustment is not Required.

SAR Adjustment for Fluid Sensitivity			
$SAR_1 = SAR_M * \Delta SAR$	0.006		

(W/kg)

SAR Adjustment for Tuneup Tolerance			
$SAR_2 = SAR_1 + [\Delta P]$	0.008		

(W/kg)

SAR Adjustment for Drift			
$SAR_3 = SAR_2 + \text{Drift}$	0.008		

(W/kg)

<u>reported</u> SAR			
FCC = SAR_2	0.01		
ISED = SAR_3	0.01		

(W/kg)
(W/kg)

Simultaneous Transmission Analysis

The A03847 employs Wi-Fi, BlueTooth, BLE and ANT transmitters some of which are capable of simultaneously transmitting across three antennas. **Antenna 1** supports the 5GHz UNII-1 and UNII-3 transmitter. **Antenna 2** supports the 2.4GHz WiFi and ANT transmitters. **Antenna 3** supports the BT and BLE transmitters. The simultaneous transmission combinations are listed below.

When the Sum-of-the-SARs exceeds the General Population Limit of 4.0 (Extremity), the SAR to Peak Location Separation Ration (SPLSR) may be used to determine simultaneous transmission SAR test exclusion. However, the Sum-of-the-SAR did not exceed this limit therefore SPLSR is not applicable.

SAR for each transmission band and applicable transmission mode was evaluated in the Extremity configuration with no applicable accessories. Only the Maximum reported SAR for these configurations are used in the Simultaneous Transmission SAR Evaluation.

List of Possible Transmitters				
Type	Class	Frequency Range		Rated Output Power (dBm)
		Lower (MHz)	Upper (MHz)	
WiFi 5-1	UNII	5150.0	5240.0	14.25
WiFi 5-3	UNII	5745.0	5825.0	14.60
WiFi 2.4	DTS	2412.0	2462.0	17.20
BlueTooth	DXX	2402.0	2480.0	1.26
BLE	DXX	2402.0	2480.0	-0.80
ANT	DXX	2402.0	2480.0	1.26

Simultaneous Transmitter Combinations						
Configuration Number	Antenna 1		Antenna 2		Antenna 3	
	UNII 5-1	UNII 5-3	WiFi 2.4	ANT	BT	BLE
1	X			X	X	
2	X			X		X
3		X		X	X	
4		X		X		X
5			X		X	
6			X			X


Indicates configuration not supported

Analysis of Sum-of-the-Ratios For All Transmitters and Configurations													
Configuration Number	Configuration	Transmitter Type										Sum of Ratios	Sum of SARs (W/kg)
		WiFi 5-1		WiFi 5-3		WiFi 2.4		BlueTooth		ANT			
		<u>stand-alone</u> SAR (W/kg)	Ratio to Limit	<u>stand-alone</u> SAR (W/kg)	Ratio to Limit	<u>stand-alone</u> SAR (W/kg)	Ratio to Limit	<u>stand-alone</u> SAR (W/kg)	Ratio to Limit	<u>stand-alone</u> SAR (W/kg)	Ratio to Limit		
		SAR Limit = 1.6W/kg (General Population)											
1	Extremity	0.200	0.125					0.010	0.006			0.131	0.210
2		0.200	0.125							0.020	0.013	0.138	0.220
3				0.170	0.106			0.010	0.006			0.113	0.180
4				0.170	0.106					0.020	0.013	0.119	0.190
5	Extremity					0.440	0.275	0.010	0.006			0.281	0.450

Indicates this combination is not supported

Note: Due to the low power of the BLE Transmitter, simultaneous transmission SAR of the BLE transmitter was not considered.

NOTES to Table 10.0	
<p>(1) Scaling of the Maximum Measured SAR is based on the highest, 100% duty cycle, Face, Body and/or Head SAR measured of ALL test channels, configurations and accessories used during THIS evaluation. The Measured Fluid Deviation parameters apply only to deviation of the tissue equivalent fluids used at the frequencies which produced the highest measured SAR. The Measured Conducted Power applies to the Conducted Power measured at the frequencies producing the highest Face and Body SAR. The Measured Drift is the SAR drift associated with that specific SAR measurement. The Reported SAR is the accumulation of all SAR Adjustments from the applicable Steps 1 through 5. The Plot ID is for identification of the SAR Measurement Plots in Annex A of this report.</p> <p>NOTE: Some of the scaling factors in Steps 1 through 5 may not apply and are identified by light gray text.</p>	
Step 1	<p>Per IEC-62209-1 and FCC KDB 865664. Scaling required only when Measured Fluid Deviation is greater than 5%. If the Measured Fluid Deviation is greater than 5%, Table 11.1 will be shown and will indicate the SAR scaling factor in percent (%). SAR is MULTIPLIED by this scaling factor only when the scaling factor is positive (+).</p>
Step 2	<p>Per KDB 447498. Scaling required only when the difference (Delta) between the Measured Conducted Power and the Manufacturer's Rated Conducted Power is (-) Negative. The absolute value of Delta is ADDED to the SAR.</p>
Step 3	<p>Per IEC 62209-1. Scaling required only when Measured Drift is (-) Negative. The absolute value of Measured Drift is added to Reported or Simultaneous Reported SAR.</p>
Step 4	<p>The Reported SAR is the Maximum Final Adjusted Cumulative SAR from the applicable Steps 1 through 5 are reported on Page 1 of this report.</p>

<p>I attest that the data reported herein is true and accurate within the tolerance of the Measurement Instrument Uncertainty; that all tests and measurements were performed in accordance with accepted practices or procedures; and that all tests and measurements were performed by me or by trained personnel under my direct supervision. The results of this investigation are based solely on the test sample(s) provided by the client which were not adjusted, modified or altered in any manner whatsoever, except as required to carry out specific tests or measurements. This test report has been completed in accordance with ISO/IEC 17025.</p>	 <hr/> <p>Trevor Whillock Test Lab Engineer Celltech Labs Inc.</p> <hr/> <p>06 February 2020 Date</p>
---	---

11.0 SAR EXPOSURE LIMITS

Table 11.0 Exposure Limits

SAR RF EXPOSURE LIMITS			
FCC 47 CFR§2.1093	Health Canada Safety Code 6	General Population / Uncontrolled Exposure ⁽⁴⁾	Occupational / Controlled Exposure ⁽⁵⁾
Spatial Average ⁽¹⁾ (averaged over the whole body)		0.08 W/kg	0.4 W/kg
Spatial Peak ⁽²⁾ (Head and Trunk averaged over any 1 g of tissue)		1.6 W/kg	8.0 W/kg
Spatial Peak ⁽³⁾ (Hands/Wrists/Feet/Ankles averaged over 10 g)		4.0 W/kg	20.0 W/kg
(1) The Spatial Average value of the SAR averaged over the whole body.			
(2) The Spatial Peak value of the SAR averaged over any 1 gram of tissue, defined as a tissue volume in the shape of a cube and over the appropriate averaging time.			
(3) The Spatial Peak value of the SAR averaged over any 10 grams of tissue, defined as a tissue volume in the shape of a cube and over the appropriate averaging time.			
(4) Uncontrolled environments are defined as locations where there is potential exposure to individuals who have no knowledge or control of their potential exposure.			
(5) Controlled environments are defined as locations where there is potential exposure to individuals who have knowledge of their potential exposure and can exercise control over their exposure.			

12.0 DETAILS OF SAR EVALUATION

12.0 Day Log

DAY LOG					Fluid Dielectric	SPC	Test	Task
Date	Ambient Temp (°C)	Fluid Temp (°C)	Relative Humidity (%)	Barometric Pressure (kPa)				
30 Jan 2020	24	23.6	25%	102.8	X	X	X	2450H Fluids/SPC & SAR Eval
31 Jan 2020	22	22.9	27%	101.9			X	2450H SAR Evaluation
03 Feb 2020	23	23.7	27%	102.6	X	X	X	2450H SAR Evaluation & Fluids per IEEE 1528
03 Feb 2020	23	22.8	27%	102.6	X	X	X	5250H SAR Fluids/SPC & SAR Eval
04 Feb 2020	24	22.8	27%	103.0			X	5250H SAR Eval
05 Feb 2020	24	22.5	25%	101.6	X	X		5750H Fluids/SPC
06 Feb 2020	24	22.9	26%	101.8			X	5750H SAR Eval


*Per IEEE 1528 Test Series was started within 24 hours of Fluid Parameter Measurement

** Per IEEE 1528 Fluid Parameters were measured at the end of test series

12.1 DUT Setup and Configuration


DUT Setup and Configuration	
1	<p>The DUT was evaluated for SAR in accordance with the procedures described in IEEE 1528, FCC KDB 865646, 447498, 941225, 248227, and RSS-102.</p> <p>The device was evaluated at a phantom separation distance of 0mm.</p>
2	<p>The intended use of the device is to be hand held or mounted. The DUT was additionally evaluated for SAR in accordance with the procedures described in KDB 941225D07V01r02. Since the overall diagonal dimension of the display is < than 20cm, additional sides or edges of the device were required for SAR evaluation. All sides and edges of the device within 25mm of an antenna transmitter were selected for SAR evaluation. Reference Appendix D, Figures D5, D6 & D7.</p>
3	<p>2.4GHz 802.11g/n OFDM SAR Test Exclusion</p> <p>As Per KDB 248227 D01v02r02 - 5.2.2,</p> <p>b) When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.</p> <p>Maximum 802.11g/n OFDM specified power (POFDM) = 16.58dBm Maximum 802.11b DSSS specified power (PDSSS) = 17.2dBm Ratio OFDM/DSSS power = -0.62dBm (87%) Highest reported* SAR (SARMAX) = 0.418 W/kg</p> <p>$POFDM/PDSSS \times SARMAX = 0.364$ W/kg ≤ 1.2 W/kg</p> <p>Since the ratio of the OFDM/DSSS specified power is less than one (0dB), the reported SAR would not exceed 1.2W/kg</p> <p>*The reported SAR in this case is the measured SAR adjusted for fluid sensitivity.</p>
4	<p>The Device was capable of transmitting at various modulations and data rates. The Conducted Power was higher when measured in DSS Mode-11Mbps for 2.4GHz, OFDM Mode-6Mbps for UNII-1 and UNII-3 than any other configuration. The DUT was evaluated for SAR at the maximum conducted output power level, preset by the manufacturer.</p> <p>Each SAR evaluation was performed with a fully charged battery.</p>

12.2 Duty Cycle Evaluation

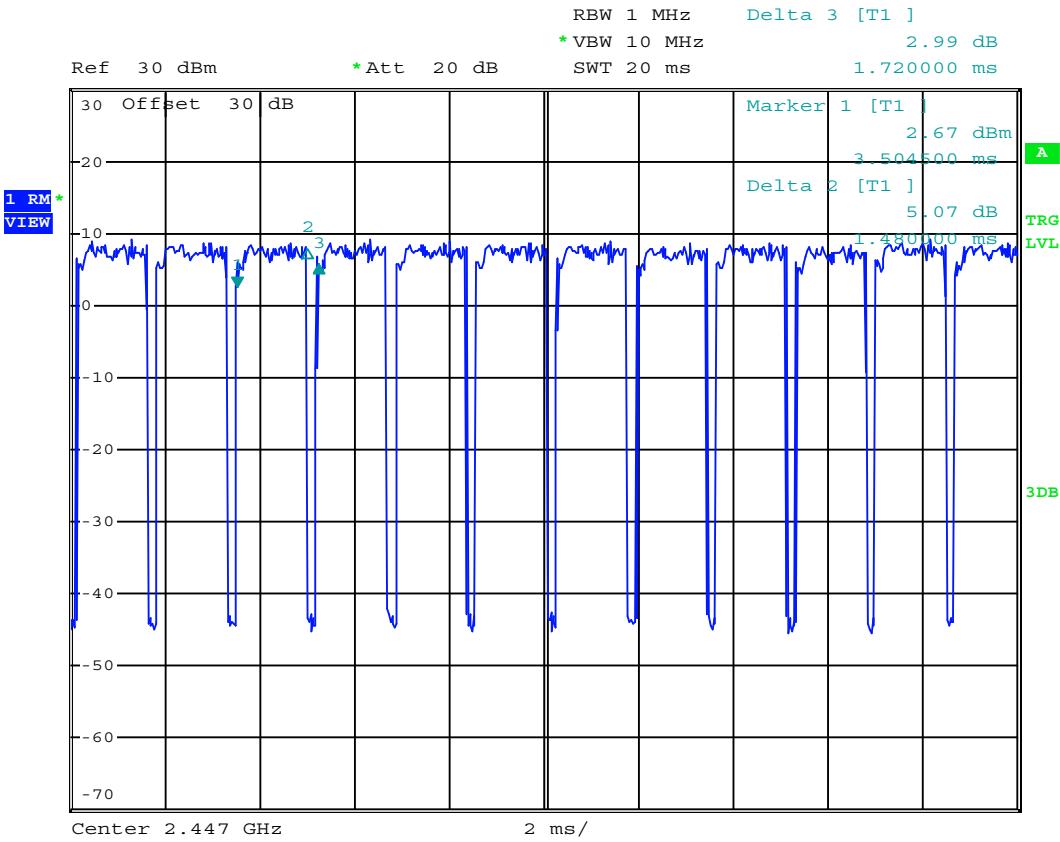

Date: 30.JAN.2020 14:43:42

DSSS at 11 Mbps was found to be the worst case test mode for 2.4GHZ WiFi. The transmit Duty cycle was 86% as indicated in the above plot. This duty cycle cannot be altered by the user. A measurement Crest factor of 1.16 was used by the SAR measurement server. The measured SAR in Table 10.0 is the post-processed SAR adjusted by the Crest Factor.

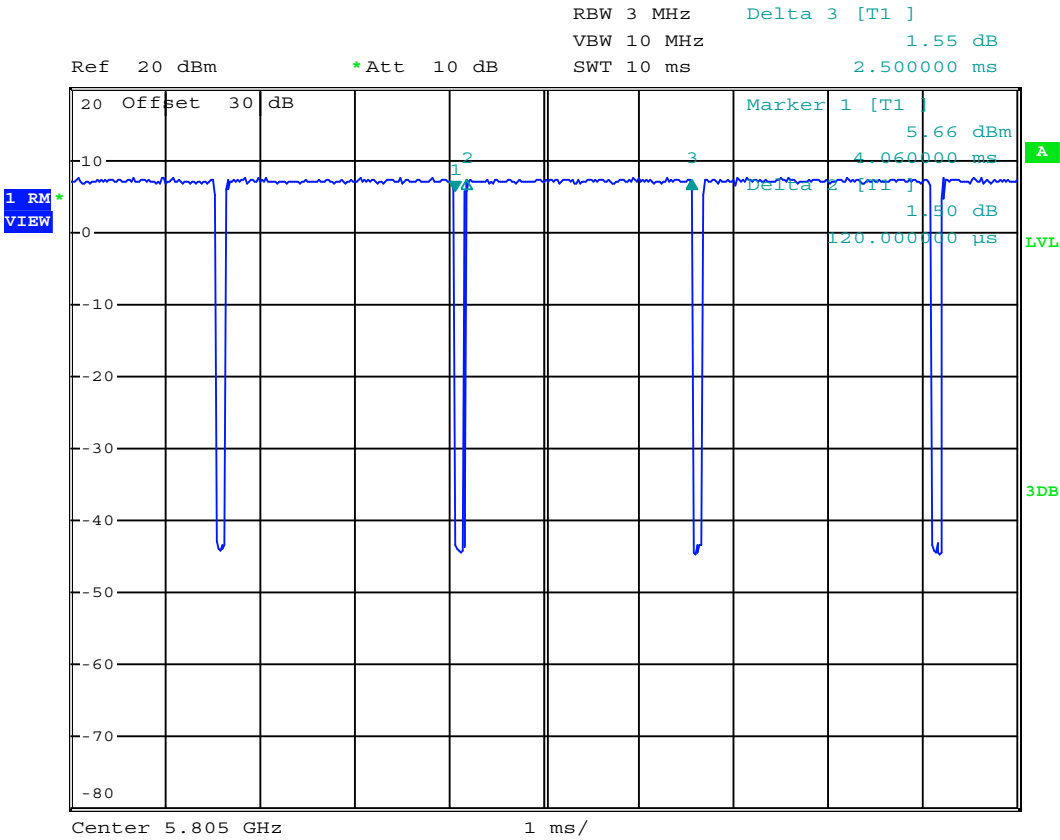

Date: 4.FEB.2020 13:08:50

OFDM at 6Mbps was found to be the worst case test mode for 5GHZ UNII 1 WiFi. The transmit Duty cycle was 96% as indicated in the above plot. This duty cycle cannot be altered by the user. A measurement Crest factor of 1.04 was used by the SAR measurement server. The measured SAR in Table 10.0 is the post-processed SAR adjusted by the Crest Factor.

12.3 DUT Positioning

DUT Positioning	
Positioning	The DUT Positioner was securely fastened to the Phantom Platform. Registration marks were placed on the DUT and the Positioner to ensure consistent positioning of the DUT for each test evaluation.
FACE Configuration	This device is not intended to be held to the face and was not tested in the FACE configuration.
BODY/Extremity	The DUT was securely clamped into the device holder with the surface of the DUT normally in contact with the body in direct contact with the bottom of the phantom, or 0mm separation from the DUT's accessory to the phantom.
HEAD Configuration	This device is not intended to be held to the ear and was not tested in the HEAD configuration.

12.4 General Procedures and Report

General Procedures and Reporting	
General Procedures	<p>The fluid dielectric parameters of the Active Tissue Simulating Liquid (TSL) were measured as described in this Section, recorded and entered into the DASY Measurement Server. Active meaning the TSL used during the SAR evaluation of the DUT. The temperature of the Active TSL was measured and recorded prior to performing a System Performance Check (SPC). An SPC was performed with the Active TSL prior to the start of the test series. The temperature of the Active TSL was measured throughout the day and the Active TSL temperature was maintained to $\pm 0.5^{\circ}\text{C}$. The Active TSL temperature was maintained to within $\pm 2.0^{\circ}\text{C}$ throughout the test series. The liquid parameters shall be measured within 24 hours before the start of a test series and if it takes longer than 48 hours, the liquid parameters shall also be measured at the end of the test series.</p> <p>An Area Scan exceeding the length and width of the DUT projection was performed and the locations of all maximas within 2dB of the Peak SAR recorded. A Zoom Scan centered over the Peak SAR location(s) was performed and the 1g and 10g SAR values recorded. The resolutions of the Area Scan and Zoom Scan are described in the Scan Resolution table(s) in this Section. A Power Reference Measurement was taken at the phantom reference point immediately prior to the Area Scan. A Power Drift measurement was taken at the phantom reference point immediately following the Zoom Scan to determine the power drift. A Z-Scan from the <u>Maximum Distance to Phantom Surface</u> to the fluid surface was performed following the power drift measurement.</p>
Reporting	<p>The 1g SAR, 10g SAR and power drift measurements are recorded in the SAR Measurement Summary tables in the SAR Measurement Summary Section of this report. The SAR values shown in the 100% DC (Duty Cycle) column are the SAR values reported by the SAR Measurement Server with the DUT operating at 100% transmit duty cycle. These tables also include other information such as transmit channel and frequency, modulation, accessories tested and DUT-phantom separation distance.</p> <p>In the Scaling of Maximum Measured SAR Section of this report, the highest measured SAR in the BODY configuration, within the entire scope of this assessment, are, when applicable, scaled for Fluid Sensitivity, Manufacturer's Tune-Up Tolerance, Simultaneous Transmission and Drift. With the exception of Duty Cycle correction/compensation, SAR values are <u>ONLY</u> scaled up, not down. The final results of this scaling is the <u>reported SAR</u> which appears on the Cover Page of this report.</p>

12.5 Fluid Dielectric and Systems Performance Check

Fluid Dielectric and Systems Performance Check	
Fluid Dielectric Measurement Procedure	<p>The fluid dielectric parameters of the Tissue Simulating Liquid (TSL) are measured using the Open-Ended Coax Method connected to an Agilent 8753ET Network Analyzer connected to a measurement server running April Dielectric Property Measurement System. A frequency range of $\pm 100\text{MHz}$ for frequencies $> 300\text{MHz}$ and $\pm 50\text{MHz}$ for frequencies $\leq 300\text{MHz}$ with frequency step size of 10MHz is used. The center frequency is centered around the SAR measurement probe's calibration point for that TSL frequency range. A calibration of the setup is performed using a short-open-deionized water (at 23°C in a 300ml beaker) method. A sample of the TSL is placed in a 300ml beaker and the open-ended coax is submerged approximately 8mm below the fluid surface in the approximate center of the beaker. A check of the setup is made to ensure no air is trapped under the open-ended coax. The sample of TSL is measured and compared to the FCC KDB 865664 targets for HEAD or BODY for the entire fluid measurement range. Fluid adjustment are made if the dielectric parameters are $> 5\%$ in range that the DUT is to be tested. If the adjustments fail to bring the parameters to $\leq 5\%$ but are $< 10\%$, the SAR Fluid Sensitivity as per IEC 62201-1 and FCC KDB 865664 are applied to the highest measured SAR. A TSL with dielectric parameters $> 10\%$ in the DUT test frequency range are not used.</p>
Systems Performance Check	<p>The fluid dielectric parameters of the Active TSL are entered into the DASY Measurement Server at each of the 10MHz step size intervals. Active meaning the TSL used during the SAR evaluation of the DUT. The DASY Measurement System will automatically interpolate the dielectric parameters for DUT test frequencies that fall between the 10MHz step intervals.</p> <p>A Systems Performance Check (SPC) is performed in accordance with IEEE 1528 "System Check" and FCC KDB 865664 "System Verification". A validation source, dipole or Confined Loop Antenna (CLA), is placed under the geometric center of the phantom and separated from the phantom in accordance to the validation source's Calibration Certificate data. A CW signal set to the frequency of the validate source's and SAR measurement probe's calibration frequency with a forward power set to the validation source's Calibration Certificate data power setting is applied to the validation source. An Area Scan is centered over the projection of the validation source's feed point and an Area Scan is taken. A Zoom Scan centered over the Peak SAR measurement of the Area Scan and the 1g and 10g SAR is measured. The measured 1g and 10g SAR is compared to the 1g and 10g SAR measurements from the validation source's Calibration Certificate. When required, the measured SAR is normalized to 1.0W and compared to the normalized SAR indicated on the validation source's Calibration Certificate. The SPC is considered valid when the measured and normalized SAR is $\leq 10\%$ of the measured and normalize SAR of the validation source's Calibration Certificate.</p> <p>The fluid dielectric parameters of the Active TSL and SPC are repeated when the Active TSL has been in use for greater than 84 hours or if the Active TSL temperature has exceed $\pm 1^\circ\text{C}$ of the initial fluid analysis.</p>

12.6 Scan Resolution 100MHz to 2GHz

Scan Resolution 100MHz to 2GHz	
Maximum distance from the closest measurement point to phantom surface: (Geometric Center of Probe Center)	$4 \pm 1 \text{ mm}$
Maximum probe angle normal to phantom surface. (Flat Section ELI Phantom)	$5^\circ \pm 1^\circ$
Area Scan Spatial Resolution $\Delta X, \Delta Y$	15 mm
Zoom Scan Spatial Resolution $\Delta X, \Delta Y$	7.5 mm
Zoom Scan Spatial Resolution ΔZ (Uniform Grid)	5 mm
Zoom Scan Volume X, Y, Z	30 mm
Phantom	ELI
Fluid Depth	$150 \pm 5 \text{ mm}$
An Area Scan with an area extending beyond the device was used to locate the candidate maximas within 2dB of the global maxima.	
A Zoom Scan centered over the peak SAR location(s) determined by the Area Scan was used to determine the 1-gram and 10-gram peak spatial-average SAR	

12.7 Scan Resolution 2GHz to 3GHz

Scan Resolution 2GHz to 3GHz	
Maximum distance from the closest measurement point to phantom surface: (Geometric Center of Probe Center)	4 ± 1 mm
Maximum probe angle normal to phantom surface. (Flat Section ELI Phantom)	5° ± 1°
Area Scan Spatial Resolution $\Delta X, \Delta Y$	12 mm
Zoom Scan Spatial Resolution $\Delta X, \Delta Y$	5 mm
Zoom Scan Spatial Resolution ΔZ (Uniform Grid)	5 mm
Zoom Scan Volume X, Y, Z	30 mm
Phantom	ELI
Fluid Depth	150 ± 5 mm
An Area Scan with an area extending beyond the device was used to locate the candidate maximas within 2dB of the global maxima.	
A Zoom Scan centered over the peak SAR location(s) determined by the Area Scan was used to determine the 1-gram and 10-gram peak spatial-average SAR	

12.8 Scan Resolution 5GHz to 6GHz

Scan Resolution 5GHz to 6GHz	
Maximum distance from the closest measurement point to phantom surface: (Geometric Center of Probe Center)	4 ± 1 mm
Maximum probe angle normal to phantom surface. (Flat Section ELI Phantom)	5° ± 1°
Area Scan Spatial Resolution $\Delta X, \Delta Y$	10 mm
Zoom Scan Spatial Resolution $\Delta X, \Delta Y$	4 mm
Zoom Scan Spatial Resolution ΔZ (Uniform Grid)	2 mm
Zoom Scan Volume X, Y, Z	22 mm
Phantom	ELI
Fluid Depth	100 ± 5 mm
An Area Scan with an area extending beyond the device was used to locate the candidate maximas within 2dB of the global maxima.	
A Zoom Scan centered over the peak SAR location(s) determined by the Area Scan was used to determine the 1-gram and 10-gram peak spatial-average SAR	

13.0 MEASUREMENT UNCERTAINTIES

Table 13.0 Measurement Uncertainty

UNCERTAINTY BUDGET FOR DEVICE EVALUATION (IEEE 1528-2013 Table 9)									
Source of Uncertainty	IEEE 1528 Section	Toler ±%	Prob Dist	Div	c _i	c _i	Stand Unct ±%	Stand Unct ±%	V _i or V _{eff}
Measurement System									
EX3DV4 Probe Calibration** (k=1)	E.2.1	6.7	N	1	1	1	6.7	6.7	∞
Axial Isotropy** (k=1)	E.2.2	0.6	R	√3	0.7	0.7	0.2	0.2	∞
Hemispherical Isotropy** (k=1)	E.2.2	3.2	R	√3	0.7	0.7	1.3	1.3	∞
Boundary Effect*	E.2.3	1.0	R	√3	1	1	0.6	0.6	∞
Linearity** (k=1)	E.2.4	0.5	R	√3	1	1	0.3	0.3	∞
System Detection Limits*	E.2.4	1.0	R	√3	1	1	0.6	0.6	∞
Modulation Response** (k=1)	E.2.5	8.3	R	√3	1	1	4.8	4.8	∞
Readout Electronics*	E.2.6	0.3	N	1	1	1	0.3	0.3	∞
Response Time*	E.2.7	0.8	R	√3	1	1	0.5	0.5	∞
Integration Time*	E.2.8	2.6	R	√3	1	1	1.5	1.5	∞
RF Ambient Conditions - Noise	E.6.1	0.0	R	√3	1	1	0.0	0.0	10
RF Ambient Conditions - Reflection	E.6.1	0.0	R	√3	1	1	0.0	0.0	10
Probe Positioner Mechanical Tolerance*	E.6.2	0.0	R	√3	1	1	0.0	0.0	∞
Probe Positioning wrt Phantom Shell*	E.6.3	0.4	R	√3	1	1	0.2	0.2	∞
Post-processing*	E.5	2.0	R	√3	1	1	1.2	1.2	∞
Test Sample Related									
Test Sample Positioning	E.4.2	2.2	N	1	1	1	2.2	2.2	5
Device Holder Uncertainty*	E.4.1	3.6	N	1	1	1	3.6	3.6	∞
SAR Drift Measurement ⁽²⁾	E.2.9	0.0	R	√3	1	1	0.0	0.0	∞
SAR Power Scaling ⁽³⁾	E.6.5	0.0	R	√3	1	1	0.0	0.0	∞
Phantom and Tissue Parameters									
Phantom Uncertainty*	E.3.1	6.1	R	√3	1	1	3.5	3.5	∞
SAR Correction Uncertainty	E.3.2	1.6	N	1	1	0.84	1.6	1.3	∞
Liquid Conductivity (measurement)	E.3.3	5.0	N	1	0.78	0.71	3.9	3.6	10
Liquid Permittivity (measurement)	E.3.3	5.0	N	1	0.23	0.26	1.2	1.3	10
Liquid Conductivity (Temperature)	E.3.2	0.4	R	√3	0.78	0.71	0.2	0.2	10
Liquid Permittivity Temperature)	E.3.2	0.2	R	√3	0.23	0.26	0.0	0.0	10
Effective Degrees of Freedom⁽¹⁾								V_{eff} =	1141
Combined Standard Uncertainty			RSS				11.1	11.0	
Expanded Uncertainty (95% Confidence Interval)			k=2				22.2	21.9	
Measurement Uncertainty Table in accordance with IEEE Standard 1528-2003									

(1) The Effective Degrees of Freedom is > 30

Therefore a coverage factor of k=2 represents an approximate confidence level of 95%.

(2) The SAR Value is compensated for Drift

(3) SAR Power Scaling not Required

* Provided by SPEAG for DASY4

Table 13.1 Calculation of Degrees of Freedom

Calculation of the Degrees and Effective Degrees of Freedom	
$v_i = n - 1$	$v_{\text{eff}} = \frac{u_c^4}{m \sum_{i=1} \frac{c_i^4 u_i^4}{v_i}}$

14.0 FLUID DIELECTRIC PARAMETERS

Table 14.0 Fluid Dielectric Parameters 2450MHz HEAD TSL

```

*****
Aprel Laboratory
Test Result for UIM Dielectric Parameter
Thu 30/Jan/2020 12:03:16
Freq      Frequency(GHz)
FCC_eHFCC OET 65 Supplement C (June 2001) Limits for Head Epsilon
FCC_sHFCC OET 65 Supplement C (June 2001) Limits for Head Sigma
Test_e    Epsilon of UIM
Test_s    Sigma of UIM
*****

```

Freq	FCC_eHFCC	FCC_sHFCC	Test_e	Test_s
2.3500	39.38	1.71	37.81	1.79
2.3600	39.36	1.72	37.88	1.82
2.3700	39.34	1.73	37.83	1.82
2.3800	39.32	1.74	37.88	1.82
2.3900	39.31	1.75	37.75	1.84
2.4000	39.29	1.76	37.68	1.85
2.4100	39.27	1.76	37.56	1.88
2.4200	39.25	1.77	37.49	1.88
2.4300	39.24	1.78	37.41	1.89
2.4400	39.22	1.79	37.53	1.92
2.4500	39.20	1.80	37.44	1.93
2.4600	39.19	1.81	37.36	1.93
2.4700	39.17	1.82	37.48	1.93
2.4800	39.16	1.83	37.25	1.95
2.4900	39.15	1.84	37.10	1.97
2.5000	39.14	1.85	37.18	1.98
2.5100	39.12	1.87	37.09	1.98
2.5200	39.11	1.88	36.99	2.00
2.5300	39.10	1.89	37.02	2.00
2.5400	39.09	1.90	36.85	2.00
2.5500	39.07	1.91	36.92	2.05

FLUID DIELECTRIC PARAMETERS							
Date:	30 Jan 2020	Fluid Temp:	23.6	Frequency:	2450MHz	Tissue:	Head
Freq (MHz)	Test_e	Test_s	Target_e	Target_s	Deviation Permittivity	Deviation Conductivity	
2350.0000		37.8100	1.7900	39.3800	1.71	-3.99%	4.68%
2360.0000		37.8800	1.8200	39.3600	1.72	-3.76%	5.81%
2370.0000		37.8300	1.8200	39.3400	1.73	-3.84%	5.20%
2380.0000		37.8800	1.8200	39.3200	1.74	-3.66%	4.60%
2390.0000		37.7500	1.8400	39.3100	1.75	-3.97%	5.14%
2400.0000		37.6800	1.8500	39.2900	1.76	-4.10%	5.11%
2402.0000		37.6800	1.8500	39.2900	1.76	-4.10%	5.11%
2410.0000		37.5600	1.8800	39.2700	1.76	-4.35%	6.82%
2420.0000		37.4900	1.8800	39.2500	1.77	-4.48%	6.21%
2422.0000	*	37.4740	1.8820	39.2480	1.77	-4.52%	6.21%
2430.0000		37.4100	1.8900	39.2400	1.78	-4.66%	6.18%
2440.0000		37.5300	1.9200	39.2200	1.79	-4.31%	7.26%
2447.0000	*	37.4670	1.9270	39.2060	1.80	-4.44%	7.23%
2450.0000		37.4400	1.9300	39.2000	1.80	-4.49%	7.22%
2457.0000	*	37.3840	1.9300	39.1930	1.81	-4.62%	6.81%
2460.0000		37.3600	1.9300	39.1900	1.81	-4.67%	6.63%
2462.0000	*	37.3840	1.9300	39.1860	1.81	-4.60%	6.51%
2470.0000		37.4800	1.9300	39.1700	1.82	-4.31%	6.04%
2472.0000	*	37.4340	1.9340	39.1680	1.82	-4.43%	6.15%
2480.0000		37.2500	1.9500	39.1600	1.83	-4.88%	6.56%
2490.0000		37.1000	1.9700	39.1500	1.84	-5.24%	7.07%
2500.0000		37.1800	1.9800	39.1400	1.85	-5.01%	7.03%
2510.0000		37.0900	1.9800	39.1200	1.87	-5.19%	5.88%
2520.0000		36.9900	2.0000	39.1100	1.88	-5.42%	6.38%
2530.0000		37.0200	2.0000	39.1000	1.89	-5.32%	5.82%
2540.0000		36.8500	2.0000	39.0900	1.90	-5.73%	5.26%
2550.0000		36.9200	2.0500	39.0700	1.91	-5.50%	7.33%

*Channel Frequency Tested

Table 14.1 Fluid Dielectric Parameters 2450MHz HEAD TSL

```

*****
Aprel Laboratory
Test Result for UIM Dielectric Parameter
Mon 03/Feb/2020 11:19:20
Freq   Frequency(GHz)
FCC_eHFCC OET 65 Supplement C (June 2001) Limits for Head Epsilon
FCC_sHFCC OET 65 Supplement C (June 2001) Limits for Head Sigma
Test_e  Epsilon of UIM
Test_s  Sigma of UIM
*****

```

Freq	FCC_eHFCC_sH	Test_e	Test_s
2.3500	39.38 1.71	36.95	1.84
2.3600	39.36 1.72	36.77	1.87
2.3700	39.34 1.73	36.74	1.86
2.3800	39.32 1.74	36.81	1.87
2.3900	39.31 1.75	36.74	1.88
2.4000	39.29 1.76	36.58	1.90
2.4100	39.27 1.76	36.62	1.93
2.4200	39.25 1.77	36.54	1.92
2.4300	39.24 1.78	36.54	1.93
2.4400	39.22 1.79	36.44	1.95
2.4500	39.20 1.80	36.36	1.97
2.4600	39.19 1.81	36.28	1.97
2.4700	39.17 1.82	36.40	2.00
2.4800	39.16 1.83	36.35	1.99
2.4900	39.15 1.84	36.28	2.00
2.5000	39.14 1.85	36.17	2.00
2.5100	39.12 1.87	36.27	2.03
2.5200	39.11 1.88	36.13	2.04
2.5300	39.10 1.89	36.03	2.05
2.5400	39.09 1.90	35.93	2.08
2.5500	39.07 1.91	35.90	2.06

*Per IEEE 1528 Fluid Parameters were measured at the end of test series.

FLUID DIELECTRIC PARAMETERS								
Date:	3 Feb 2020	Fluid Temp:		23.7	Frequency:	2450MHz	Tissue:	Head
Freq (MHz)	Test_e	Test_s	Target_e	Target_s	Deviation Permittivity	Deviation Conductivity		
2350.0000		36.9500	1.8400	39.3800	1.71	-6.17%	7.60%	
2360.0000		36.7700	1.8700	39.3600	1.72	-6.58%	8.72%	
2370.0000		36.7400	1.8600	39.3400	1.73	-6.61%	7.51%	
2380.0000		36.8100	1.8700	39.3200	1.74	-6.38%	7.47%	
2390.0000		36.7400	1.8800	39.3100	1.75	-6.54%	7.43%	
2400.0000		36.5800	1.9000	39.2900	1.76	-6.90%	7.95%	
2402.0000	*	36.5880	1.9060	39.2860	1.76	-6.87%	8.30%	
2410.0000		36.6200	1.9300	39.2700	1.76	-6.75%	9.66%	
2420.0000		36.5400	1.9200	39.2500	1.77	-6.90%	8.47%	
2422.0000	*	36.5400	1.9220	39.2480	1.77	-6.90%	8.47%	
2430.0000		36.5400	1.9300	39.2400	1.78	-6.88%	8.43%	
2440.0000		36.4400	1.9500	39.2200	1.79	-7.09%	8.94%	
2447.0000	*	36.3840	1.9640	39.2060	1.80	-7.20%	9.29%	
2450.0000		36.3600	1.9700	39.2000	1.80	-7.24%	9.44%	
2457.0000	*	36.3040	1.9700	39.1930	1.81	-7.37%	9.02%	
2460.0000		36.2800	1.9700	39.1900	1.81	-7.43%	8.84%	
2470.0000		36.4000	2.0000	39.1700	1.82	-7.07%	9.89%	
2472.0000	*	36.3900	1.9980	39.1680	1.82	-7.09%	9.66%	
2480.0000		36.3500	1.9900	39.1600	1.83	-7.18%	8.74%	
2490.0000		36.2800	2.0000	39.1500	1.84	-7.33%	8.70%	
2500.0000		36.1700	2.0000	39.1400	1.85	-7.59%	8.11%	
2510.0000		36.2700	2.0300	39.1200	1.87	-7.29%	8.56%	
2520.0000		36.1300	2.0400	39.1100	1.88	-7.62%	8.51%	
2530.0000		36.0300	2.0500	39.1000	1.89	-7.85%	8.47%	
2540.0000		35.9300	2.0800	39.0900	1.90	-8.08%	9.47%	
2550.0000		35.9000	2.0600	39.0700	1.91	-8.11%	7.85%	

*Channel Frequency Tested

Table 14.2 Fluid Dielectric Parameters 5250MHz HEAD TSL

```

*****
Aprel Laboratory
Test Result for UIM Dielectric Parameter
Tue 28/Jan/2020 15:17:32
Freq Frequency(GHz)
FCC_eHFCC OET 65 Supplement C (June 2001) Limits for Head Epsilon
FCC_sHFCC OET 65 Supplement C (June 2001) Limits for Head Sigma
Test_e Epsilon of UIM
Test_s Sigma of UIM
*****

```

Freq	FCC_eHFCC_sH	Test_e	Test_s
5.1500	36.04 4.60	35.13	4.83
5.1600	36.03 4.61	34.61	4.81
5.1700	36.02 4.62	34.91	4.78
5.1800	36.01 4.63	34.94	4.88
5.1900	36.00 4.64	34.49	4.82
5.2000	35.99 4.65	34.67	4.81
5.2100	35.97 4.67	34.45	4.85
5.2200	35.96 4.68	34.67	4.83
5.2300	35.95 4.69	34.61	4.85
5.2400	35.94 4.70	34.36	4.88
5.2500	35.93 4.71	34.55	4.98
5.2600	35.92 4.72	34.46	4.97
5.2700	35.91 4.73	34.39	4.89
5.2800	35.89 4.74	34.39	4.95
5.2900	35.88 4.75	34.38	5.00
5.3000	35.87 4.76	34.18	5.01
5.3100	35.86 4.77	34.23	4.91
5.3200	35.85 4.78	34.23	4.91
5.3300	35.84 4.79	34.07	4.96
5.3400	35.83 4.80	34.27	4.97
5.3500	35.81 4.81	34.28	5.06

FLUID DIELECTRIC PARAMETERS

Date:	3 Feb 2020	Fluid Temp:		22.8	Frequency:	5250MHz	Tissue:		Head		
Freq (MHz)	Test_e	Test_s	Target_e	Target_s	Deviation Permittivity	Deviation Conductivity					
5150.0000		34.1300	4.6600	36.0400	4.60	-5.30%	1.30%				
5160.0000		34.3500	4.6200	36.0300	4.61	-4.66%	0.22%				
5170.0000		34.3800	4.6900	36.0200	4.62	-4.55%	1.52%				
5180.0000		34.3700	4.5900	36.0100	4.63	-4.55%	-0.86%				
5190.0000		34.0300	4.7000	36.0000	4.64	-5.47%	1.29%				
5200.0000	*	34.1900	4.7200	35.9900	4.65	-5.00%	1.51%				
5210.0000		33.9700	4.7500	35.9700	4.67	-5.56%	1.71%				
5220.0000	*	33.9300	4.7400	35.9600	4.68	-5.65%	1.28%				
5230.0000	*	34.1700	4.7100	35.9500	4.69	-4.95%	0.43%				
5240.0000		34.2100	4.7400	35.9400	4.70	-4.81%	0.85%				
5250.0000		34.2000	4.7900	35.9300	4.71	-4.81%	1.70%				
5260.0000		33.9300	4.7700	35.9200	4.72	-5.54%	1.06%				
5270.0000		33.9400	4.8000	35.9100	4.73	-5.49%	1.48%				
5280.0000		34.1300	4.7600	35.8900	4.74	-4.90%	0.42%				
5290.0000		34.0200	4.8700	35.8800	4.75	-5.18%	2.53%				
5300.0000		33.9400	4.8300	35.8700	4.76	-5.38%	1.47%				
5310.0000		33.9600	4.8300	35.8600	4.77	-5.30%	1.26%				
5320.0000		33.9800	4.8200	35.8500	4.78	-5.22%	0.84%				
5330.0000		33.8500	4.8400	35.8400	4.79	-5.55%	1.04%				
5340.0000		34.2300	4.8700	35.8300	4.80	-4.47%	1.46%				
5350.0000		34.0900	4.8700	35.8100	4.81	-4.80%	1.25%				

*Channel Frequency Tested

Table 14.3 Fluid Dielectric Parameters 5750MHz HEAD TSL

```

*****
Aprel Laboratory
Test Result for UIM Dielectric Parameter
Wed 05/Feb/2020 13:41:43
Freq   Frequency(GHz)
FCC_eHFCC OET 65 Supplement C (June 2001) Limits for Head Epsilon
FCC_sHFCC OET 65 Supplement C (June 2001) Limits for Head Sigma
Test_e Epsilon of UIM
Test_s Sigma of UIM
*****

```

Freq	FCC_eHFCC_sH	Test_e	Test_s
5.6500	35.44 5.14	34.18	5.39
5.6550	35.44 5.14	34.18	5.39
5.6750	35.44 5.14	34.18	5.39
5.6850	35.43 5.15	34.36	5.46
5.6950	35.42 5.16	34.44	5.48
5.7050	35.41 5.17	34.28	5.47
5.7150	35.40 5.18	34.06	5.55
5.7250	35.39 5.19	34.15	5.45
5.7350	35.37 5.20	34.60	5.40
5.7450	35.36 5.21	34.20	5.49
5.7550	35.35 5.22	34.14	5.52
5.7650	35.34 5.23	34.00	5.49
5.7750	35.33 5.24	34.08	5.56
5.7850	35.32 5.25	34.09	5.59
5.7950	35.31 5.26	34.06	5.58
5.8050	35.29 5.28	33.86	5.67
5.8150	35.28 5.29	34.06	5.55
5.8250	35.27 5.30	34.13	5.62
5.8350	35.26 5.31	34.07	5.62
5.8450	35.25 5.32	33.99	5.64
5.8500	35.24 5.33	33.91	5.58

15.0 SYSTEM VERIFICATION TEST RESULTS

Table 15.0 System Verification Results 2450MHz HEAD TSL

System Verification Test Results					
Date		Frequency (MHz)	Validation Source		
			P/N		S/N
30 Jan 2020		2450	D2450V2		825
Fluid Type	Fluid Temp °C	Ambient Temp °C	Ambient Humidity (%)	Forward Power (mW)	Source Spacing (mm)
Head	23.6	24	25%	250	10
Fluid Parameters					
Permittivity			Conductivity		
Measured	Target	Deviation	Measured	Target	Deviation
37.44	39.20	-4.49%	1.93	1.80	7.22%
Measured SAR					
1 gram			10 gram		
Measured	Target	Deviation	Measured	Target	Deviation
14.10	13.30	6.02%	6.44	6.16	4.55%
Measured SAR Normalized to 1.0W					
1 gram			10 gram		
Normalized	Target	Deviation	Normalized	Target	Deviation
56.40	52.10	8.25%	25.76	24.30	6.01%
<p>Prior to the SAR evaluations, system checks were performed on the planar section of the phantom and a SPEAG validation dipole in accordance with the procedures described in IEEE 1528-2013, FCC KDB 846224 and IEC 62209-1.</p> <p>The dielectric parameters of the simulated tissue mixture were measured prior to the system performance check using a Dielectric Probe Kit and a Network Analyzer.</p> <p>The forward power was applied to the dipole and the system was verified to a tolerance of +10% from the system manufacturer's dipole calibration target SAR value.</p> <p>The forward power applied was same forward power applied by the calibration lab during the calibration of this validation source.</p>					

Table 15.1 System Verification Results 5250MHz HEAD TSL

System Verification Test Results					
Date		Frequency (MHz)	Validation Source		
			P/N		S/N
03 Feb 2020		5250	D5GHzV2		1031
Fluid Type	Fluid Temp °C	Ambient Temp °C	Ambient Humidity (%)	Forward Power (mW)	Source Spacing (mm)
Head	22.8	23	27%	67	10
Fluid Parameters					
Permittivity			Conductivity		
Measured	Target	Deviation	Measured	Target	Deviation
34.20	35.93	-4.81%	4.79	4.71	1.70%
Measured SAR					
1 gram			10 gram		
Measured	Target	Deviation	Measured	Target	Deviation
5.38	5.35	0.56%	1.54	1.53	0.65%
Measured SAR Normalized to 1.0W					
1 gram			10 gram		
Normalized	Target	Deviation	Normalized	Target	Deviation
80.00	79.85	0.02%	23.00	22.84	0.70%
<p>Prior to the SAR evaluations, system checks were performed on the planar section of the phantom and a SPEAG validation dipole in accordance with the procedures described in IEEE 1528-2013, FCC KDB 846224 and IEC 62209-1.</p> <p>The dielectric parameters of the simulated tissue mixture were measured prior to the system performance check using a Dielectric Probe Kit and a Network Analyzer.</p> <p>The forward power was applied to the dipole and the system was verified to a tolerance of +10% from the system manufacturer's dipole calibration target SAR value.</p> <p>The forward power applied was same forward power applied by the calibration lab during the calibration of this validation source.</p>					

Note: System verifications for 5GHZ and above are assessed at a lesser power and results are interpolated to validate the calibration dipole target. Data values in this table are with respect to the input power achieved and do not match the calibration certificate target values.

Note

Table 15.2 System Verification Results 5750MHz HEAD TSL

System Verification Test Results					
Date		Frequency (MHz)	Validation Source		
			P/N	S/N	
05 Feb 2020		5750	D5GHzV2		1031
Fluid Type	Fluid Temp °C	Ambient Temp °C	Ambient Humidity (%)	Forward Power (mW)	Source Spacing (mm)
Head	22.5	24	25%	73	10
Fluid Parameters					
Permittivity			Conductivity		
Measured	Target	Deviation	Measured	Target	Deviation
34.17	35.36	-3.35%	5.51	5.22	5.56%
Measured SAR					
1 gram			10 gram		
Measured	Target	Deviation	Measured	Target	Deviation
6.10	5.86	4.09%	1.71	1.77	-3.39%
Measured SAR Normalized to 1.0W					
1 gram			10 gram		
Normalized	Target	Deviation	Normalized	Target	Deviation
83.56	80.27	4.01%	23.42	24.25	3.42%
<p>Prior to the SAR evaluations, system checks were performed on the planar section of the phantom and a SPEAG validation dipole in accordance with the procedures described in IEEE 1528-2013, FCC KDB 846224 and IEC 62209-1.</p> <p>The dielectric parameters of the simulated tissue mixture were measured prior to the system performance check using a Dielectric Probe Kit and a Network Analyzer.</p> <p>The forward power was applied to the dipole and the system was verified to a tolerance of +10% from the system manufacturer's dipole calibration target SAR value.</p> <p>The forward power applied was same forward power applied by the calibration lab during the calibration of this validation source.</p>					

Note: System verifications for 5GHZ and above are assessed at a lesser power and results are interpolated to validate the calibration dipole target. Data values in this table are with respect to the input power achieved and do not match the calibration certificate target values.

16.0 SYSTEM VALIDATION SUMMARY


Table 16.0 System Validation Summary

System Validation Summary												
Frequency (MHz)	Validation Date	Probe Model	Probe S/N	Validation Source	Source S/N	Tissue	Tissue Dielectrics		Validation Results			
							Permittivity	Conductivity	Sensitivity	Linearity	Isotropy	
150	12-Aug-19	EX3DV4	3600	CLA-150	4007	Head	49.46	0.79	Pass	Pass	Pass	
450	13-Aug-19	EX3DV4	3600	D450V3	1068	Head	43.70	0.83	Pass	Pass	Pass	
835	15-Aug-19	EX3DV4	3600	D835V2	4d075	Head	42.01	0.89	Pass	Pass	Pass	
900	2-Aug-19	EX3DV4	3600	D900V2	045	Head	39.10	0.93	Pass	Pass	Pass	
1640	7-May-18	EX3DV4	3600	1620-S-2	207-00102	Head	39.87	1.27	Pass	Pass	Pass	
1800	18-Jun-19	EX3DV4	3600	D1800V2	247	Head	41.20	1.39	Pass	Pass	Pass	
2450	2-Apr-19	EX3DV4	3600	D2450V2	825	Head	36.58	1.85	Pass	Pass	Pass	
5250	24-Jul-19	EX3DV4	3600	D5GHzV2	1031	Head	35.96	4.93	Pass	Pass	Pass	
5750	25-Jul-19	EX3DV4	3600	D5GHzV2	1031	Head	34.10	5.60	Pass	Pass	Pass	

17.0 MEASUREMENT SYSTEM SPECIFICATIONS

Table 17.0 Measurement System Specifications

Measurement System Specification	
Specifications	
Positioner	Stäubli Unimation Corp. Robot Model: TX90XL
Repeatability	+/- 0.035 mm
No. of axis	6.0
Data Acquisition Electronic (DAE) System	
Cell Controller	
Processor	Intel(R) Core(TM) i7-7700
Clock Speed	3.60 GHz
Operating System	Windows 10 Professional
Data Converter	
Features	Signal Amplifier, multiplexer, A/D converter, and control logic
Software	Measurement Software: DASY6, V 6.4.0.12171 / DASY52 V52.10.0.1446 Postprocessing Software: SEMCAD X, V14.6.10(Deployment Build)
Connecting Lines	Optical downlink for data and status info., Optical uplink for commands and clock
DASY Measurement Server	
Function	Real-time data evaluation for field measurements and surface detection
Hardware	Intel ULV Celeron CPU 400 MHz; 128 MB chip disk; 128 MB RAM
Connections	COM1, COM2, DAE, Robot, Ethernet, Service Interface
E-Field Probe	
Model	EX3DV4
Serial No.	3600
Construction	Triangular core fiber optic detection system
Frequency	10 MHz to 6 GHz
Linearity	±0.2 dB (30 MHz to 3 GHz)
Phantom	
Type	ELI Elliptical Planar Phantom
Shell Material	Fiberglass
Thickness	2mm +/- .2mm
Volume	> 30 Liter

Measurement System Specification		
Probe Specification		
Construction:	Symmetrical design with triangular core; Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, glycol)	
Calibration:	In air from 10 MHz to 2.5 GHz In head simulating tissue at frequencies of 900 MHz and 1.8 GHz (accuracy $\pm 8\%$)	
Frequency:	10 MHz to > 6 GHz; Linearity: ± 0.2 dB (30 MHz to 3 GHz)	
Directivity:	± 0.2 dB in head tissue (rotation around probe axis) ± 0.4 dB in head tissue (rotation normal to probe axis)	
Dynamic Range:	5 μ W/g to > 100 mW/g; Linearity: ± 0.2 dB	
Surface Detect:	± 0.2 mm repeatability in air and clear liquids over diffuse reflecting surfaces	
Dimensions:	Overall length: 330 mm; Tip length: 16 mm; Body diameter: 12 mm; Tip diameter: 6.8 mm Distance from probe tip to dipole centers: 2.7 mm	
Application:	General dosimetry up to 3 GHz; Compliance tests of mobile phone	
Phantom Specification		
<p>The ELI V5.0 phantom is an elliptical planar fiberglass shell phantom with a shell thickness of 2.0mm +/- .2mm at the planar area. This phantom conforms to OET Bulletin 65, Supplement C, IEEE 1528-2013, IEC 62209-1 and IEC 62209-2.</p>		
		ELI Phantom
Device Positioner Specification		
<p>The DASY device positioner has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of 65°. The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections.</p>		
		Device Positioner

18.0 TEST EQUIPMENT LIST

Table 18.0 Equipment List and Calibration

Test Equipment List				
DESCRIPTION	ASSET NO.	SERIAL NO.	DATE CALIBRATED	CALIBRATION DUE
Schmid & Partner DASY 6 System	-	-	-	-
-DASY Measurement Server	00158	1078	CNR	CNR
-Robot	00046	599396-01	CNR	CNR
-DAE4	00019	353	19-Mar-19	19-Mar-20
-EX3DV4 E-Field Probe	00213	3600	26-Mar-19	26-Mar-20
-CLA 30 Validation Dipole	00300	1005	23-Nov-17	23-Nov-20
-CLA 150 Validation Dipole	00251	4007	27-Apr-17	27-Apr-20
-D450V3 Validation Dipole	00221	1068	23-Apr-18	23-Apr-21
-D750V3 Validation Dipole	00238	1061	19-Mar-19	19-Mar-22
-D835V2 Validation Dipole	00217	4D075	20-Apr-18	20-Apr-21
-D900V2 Validation Dipole	00020	54	24-Apr-17	24-Apr-20
-D1640/1620-S-2 Validation Dipole	00299	207-00102	07-Nov-17	07-Nov-20
-D2450V2 Validation Dipole*	00219	825	24-Apr-18	24-Apr-21
-D5GHzV2 Validation Dipole	00126	1031	26-Apr-18	26-Apr-21
ELI Phantom	00247	1234	CNR	CNR
SAM Phantom	00154	1033	CNR	CNR
HP 85070C Dielectric Probe Kit	00033	none	CNR	CNR
Gigatronics 8652A Power Meter	00007	1835801	26-Mar-19	26-Mar-22
Gigatronics 80701A Power Sensor	00186	1837002	COU	COU
Gigatronics 80334A Power Sensor	00237	1837001	26-Mar-19	26-Mar-22
HP 8753ET Network Analyzer	00134	US39170292	29-Dec-17	29-Dec-20
Rohde & Schwarz SMR20 Signal Generator	00006	100104	29-May-17	29-May-20
Amplifier Research 10W1000C Power Amplifier	00041	27887	CNR	CNR
Amplifier Research 5S1G4 Power Amplifier	00106	26235	CNR	CNR
Narda Directional Coupler 3020A	00064	-	CNR	CNR
Traceable VWR Thermometer	00334	192385455	06-Aug-19	06-Aug-21
Traceable VWR Jumbo Humidity/Thermometer	00295	170120555	17-Feb-17	17-Feb-20
Digital Multi Meter DMR-1800	00250	TE182	6-22-17	6-22-20
Bipolar Power Supply 6299A	00086	1144A02155	CNR	CNR
DC-18G 10W 30db Attenuator	00102	-	COU	COU
R&S FSP40 Spectrum Analyzer	00241	100500	15-May-18	15-May-21
RF Cable-SMA	00311	-	CNR	CNR
HP Calibration Kit	00145	-	10-Feb-17	10-Feb-20
Rental Equipment				
R&S Base Station (Mobile Phone)	n/a	153128	08-Apr-19	08-Apr-20

CNR = Calibration Not Required

SB=Stand By

COU = Calibrate on Use

* Per KDB 865664 3.2.2; Supporting documentation is included in the report for validation dipoles exceeding the recommended annual calibration cycle.

When applicable, reference Appendix F

Note: Per KDB 865664, Dipoles are evaluated annually for return loss and impedance. The dipole's SAR target can only be assessed by the SAR equipment manufacturer and remains the target until the dipole is recalibrated by the manufacturer. The dipole's SAR is evaluated and compared to this target during each and every System Verification which is performed prior to and/or during each DUT SAR evaluation. The results of these verifications are shown in Section 15.0

19.0 FLUID COMPOSITION

Note: Effective February 19, 2019 TCB Workshop: FCC has permitted the use of single head-tissue simulating liquid specified in IEC 62209-1 for all SAR tests.

Table 19.0 Fluid Composition 2450MHz HEAD TSL

Table x		2450MHz Head		
Tissue Simulating Liquid (TSL) Composition				
Component by Percent Weight				
Water	Glycol	Salt ⁽¹⁾	HEC ⁽²⁾	Bacteriacide ⁽³⁾
52.0	48.0	0.0	0.0	0.0

(1) Non-Iodinized

(2) Hydroxyethyl-Cellulose: Sigma-Aldrich P/N 54290-500g

(3) Dow Chemical Dowicil 75 Antimicrobial Perservative

Table 19.1 Fluid Composition 5250MHz HEAD TSL

This is a proprietary composition by SPEAG.

Table 19.2 Fluid Composition 5750MHz HEAD TSL

This is a proprietary composition by SPEAG.

APPENDIX A – SYSTEM VERIFICATION PLOTS

Date/Time: 1/30/2020 1:34:28 PM

Test Laboratory: Celltech Labs

SPC-2450H Jan 30 2020

DUT: Dipole 2450 MHz D2450V2; Type: D2450V2; Serial: D2450V2 - SN:825

Communication System: UID 0, CW (0); Communication System Band: FullSpan (0.0 - 6000.0 MHz); Frequency: 2450 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.93$ S/m; $\epsilon_r = 37.44$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2011)


DASY Configuration:


- Probe: EX3DV4 - SN3600; ConvF(6.46, 6.46, 6.46) @ 2450 MHz; Calibrated: 3/26/2019
 - Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -1.5, 31.0, 151.0$
- Electronics: DAE4 Sn353; Calibrated: 3/19/2019
- Phantom: Twin-SAM V4.0 (30deg probe tilt); Type: QD 000 P40 CC; Serial: xxxx
- DASYS2 52.10.3(1513); SEMCAD X 14.6.13(7474)

SPC/SPC 2450H Input=250mw, Target=13.3W/kg/Area Scan (4x9x1): Measurement grid: dx=12mm, dy=12mm
 Maximum value of SAR (measured) = 13.5 W/kg

SPC/SPC 2450H Input=250mw, Target=13.3W/kg/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 90.04 V/m; Power Drift = 0.02 dB
 Peak SAR (extrapolated) = 30.7 W/kg
SAR(1 g) = 14.1 W/kg; SAR(10 g) = 6.44 W/kg
 Smallest distance from peaks to all points 3 dB below = 10 mm
 Ratio of SAR at M2 to SAR at M1 = 47.4%
 Maximum value of SAR (measured) = 16.0 W/kg

SPC/SPC 2450H Input=250mw, Target=13.3W/kg/Z Scan (1x1x22): Measurement grid: dx=20mm, dy=20mm, dz=5mm
 Penetration depth = 7.058 (6.711, 7.188) [mm]
 Maximum value of SAR (interpolated) = 27.1 W/kg

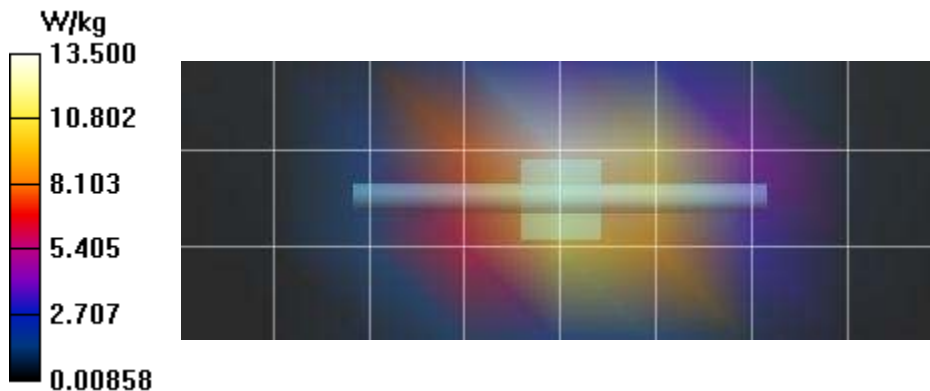

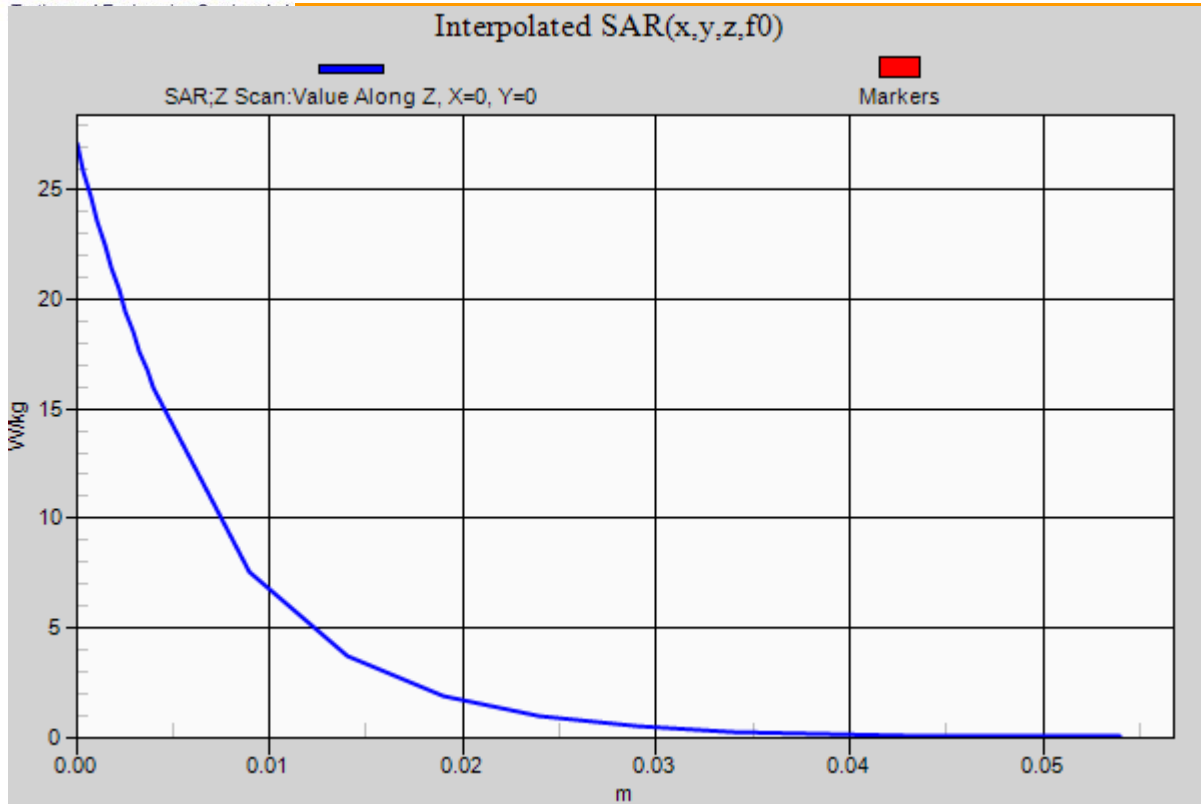

Date/Time: 2/3/2020 12:46:44 PM

Test Laboratory: Celltech Labs

SPC-5250H Jan 28 2020

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1031

Communication System: UID 0, CW (0); Communication System Band: FullSpan (0.0 - 6000.0 MHz); Frequency: 5250 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 5250$ MHz; $\sigma = 4.79$ S/m; $\epsilon_r = 34.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3600; ConvF(4.6, 4.6, 4.6) @ 5250 MHz; Calibrated: 4/25/2018
 - Modulation Compensation:
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -1.5, 25.0, 151.0$
- Electronics: DAE4 Sn353; Calibrated: 4/20/2018
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 Ax; Serial: 1234
- DASYS2 52.10.3(1513); SEMCAD X 14.6.13(7474)

SPC/SPC 5250H Input=67 mw, Target= 5.35W/kg, Target=7.99W/kg@100mw/Area Scan (4x7x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (measured) = 10.2 W/kg

SPC/SPC 5250H Input=67 mw, Target= 5.35W/kg, Target=7.99W/kg@100mw/Zoom Scan (9x9x13)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 32.44 V/m; Power Drift = 0.30 dB

Peak SAR (extrapolated) = 22.4 W/kg

SAR(1 g) = 5.38 W/kg; SAR(10 g) = 1.54 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm


Ratio of SAR at M2 to SAR at M1 = 54.4%


Maximum value of SAR (measured) = 11.2 W/kg

SPC/SPC 5250H Input=67 mw, Target= 5.35W/kg, Target=7.99W/kg@100mw/Z Scan (1x1x19): Measurement grid: dx=20mm, dy=20mm, dz=20mm

Penetration depth = n/a (n/a, 3.297) [mm]

Maximum value of SAR (interpolated) = 10.9 W/kg

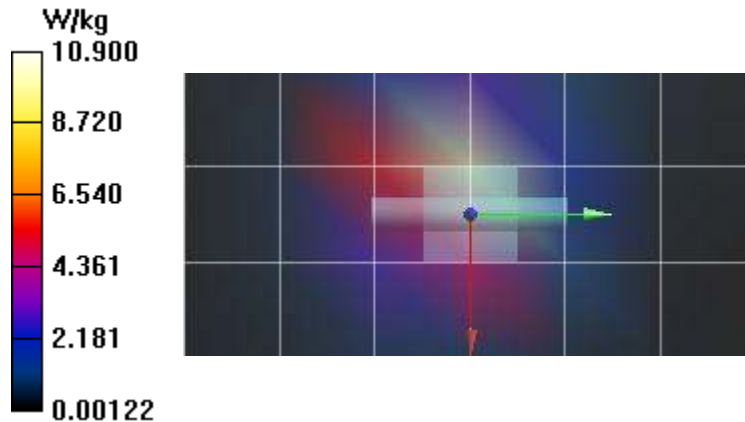

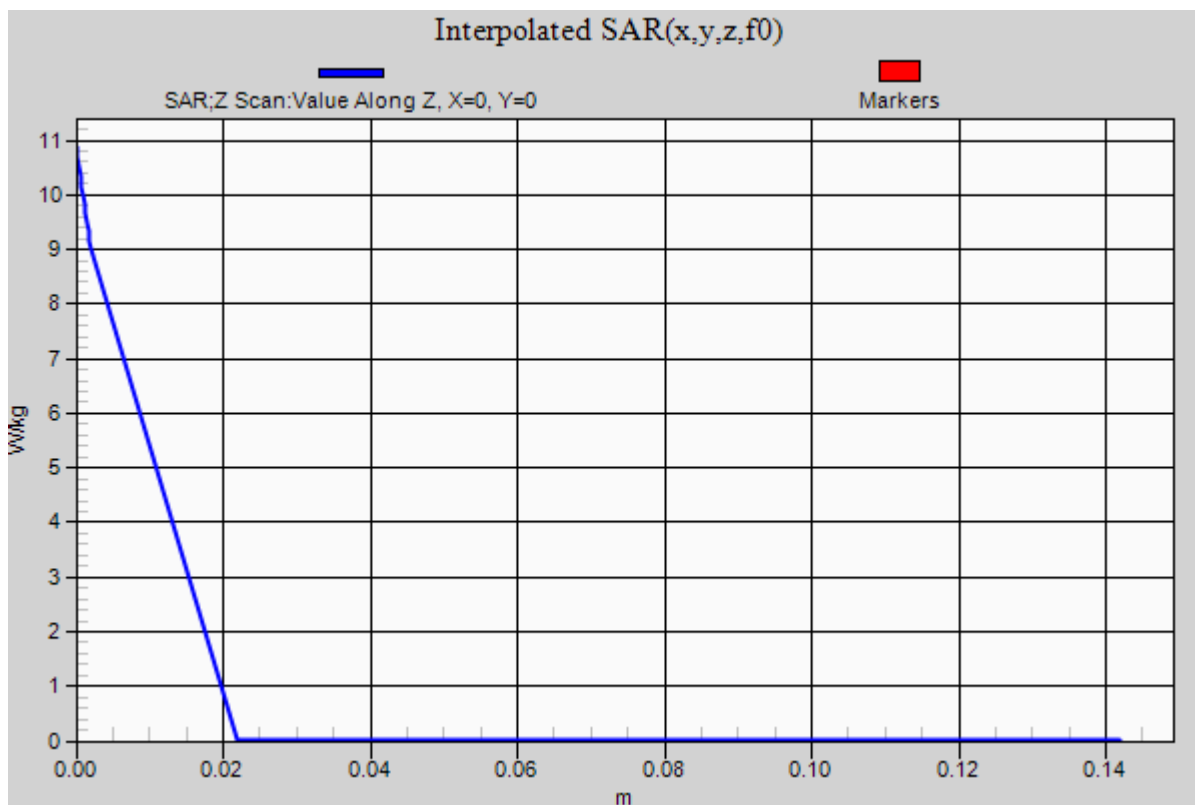

Date/Time: 2/5/2020 2:45:12 PM

Test Laboratory: Celltech Labs

SPC-5750H Feb 05 2020

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:xxx

Communication System: UID 0, CW (0); Communication System Band: FullSpan (0.0 - 6000.0 MHz); Frequency: 5750 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used (interpolated): $f = 5750$ MHz; $\sigma = 5.505$ S/m; $\epsilon_r = 34.17$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASy5 (IEEE/IEC/ANSI C63.19-2011)

DASy Configuration:

- Probe: EX3DV4 - SN3600; ConvF(4.08, 4.08, 4.08) @ 5750 MHz; Calibrated: 3/26/2019
 - Modulation Compensation:
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -1.5, 25.0, 101.0$
- Electronics: DAE4 Sn353; Calibrated: 3/19/2019
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 Ax; Serial: 1234
- DASy52 52.10.3(1513); SEMCAD X 14.6.13(7474)

SPC/SPC 5750H Input=73 mw, Target 5.86 Target=8.04W/kg@100mw/Area Scan (4x7x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 11.9 W/kg

SPC/SPC 5750H Input=73 mw, Target 5.86 Target=8.04W/kg@100mw/Zoom Scan (7x7x13)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 32.17 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 27.4 W/kg

SAR(1 g) = 6.1 W/kg; SAR(10 g) = 1.71 W/kg

Smallest distance from peaks to all points 3 dB below = 7.4 mm

Ratio of SAR at M2 to SAR at M1 = 51.9%

[Info: Interpolated medium parameters used for SAR evaluation.](#)



Maximum value of SAR (measured) = 12.9 W/kg

SPC/SPC 5750H Input=73 mw, Target 5.86 Target=8.04W/kg@100mw/Z Scan (1x1x22): Measurement grid: dx=20mm, dy=20mm, dz=5mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Penetration depth = 2.961 (3.180, 2.954) [mm]

Maximum value of SAR (interpolated) = 15.1 W/kg

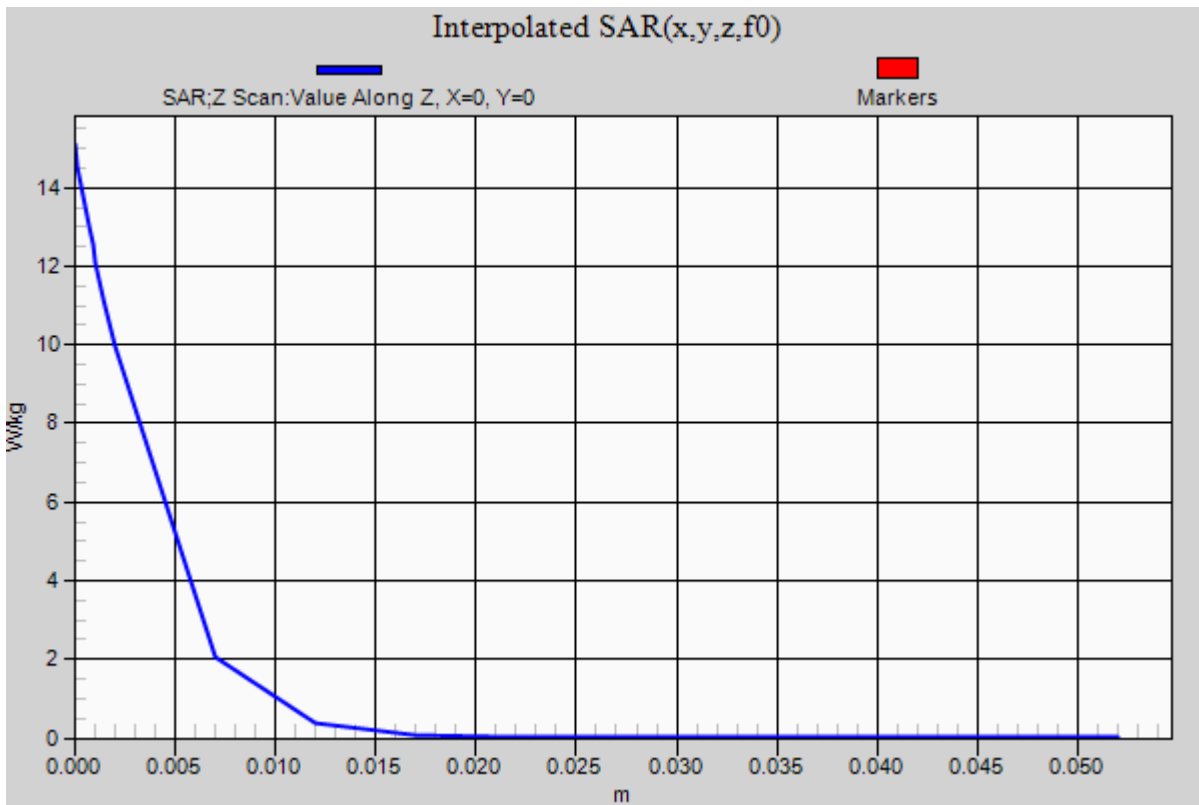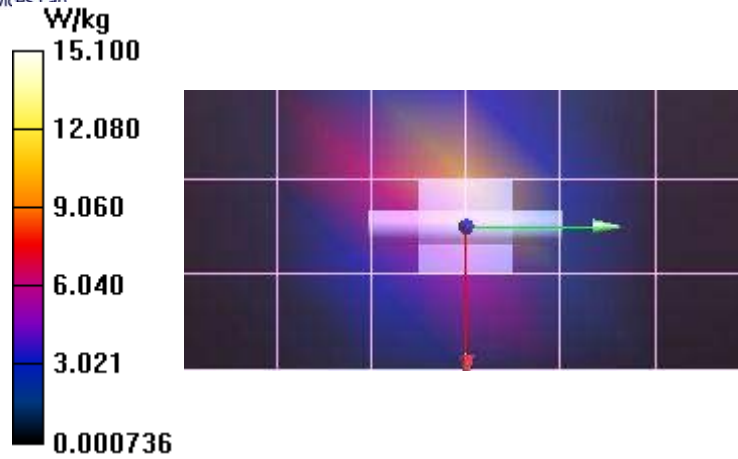

APPENDIX B – MEASUREMENT PLOTS OF MAXIMUM MEASURED SAR

Plot B3

Date/Time: 1/31/2020 10:06:42 AM

Test Laboratory: Celltech Labs

Garmin A03847 -2450H Jan 31 2020

DUT: A03847; Type: Transmitter; Serial:

Communication System: UID 10574 - AAA, IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 90pc duty cycle); Communication System Band: WLAN 2.4GHz (2412.0 - 2484.0 MHz); Frequency: 2447 MHz; Communication System PAR: 1.98 dB; PMF: 1.06414
Medium parameters used (interpolated): $f = 2447$ MHz; $\sigma = 1.927$ S/m; $\epsilon_r = 37.467$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3600; ConvF(6.46, 6.46, 6.46) @ 2447 MHz; Calibrated: 3/26/2019
 - Modulation Compensation: PMR for UID 10574 - AAA, Calibrated: 3/26/2019
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -1.5, 31.0, 151.0$
- Electronics: DAE4 Sn353; Calibrated: 3/19/2019
- Phantom: Twin-SAM V4.0 (30deg probe tilt); Type: QD 000 P40 CC; Serial: xxxx
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

2450H/B3-A03847, Extremity-Top Side, 2447MHz,WIFI/Area Scan (6x16x1): Measurement grid: dx=12mm, dy=12mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.16 W/kg

2450H/B3-A03847, Extremity-Top Side, 2447MHz,WIFI/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.665 V/m; Power Drift = -0.26 dB

Peak SAR (extrapolated) = 2.24 W/kg

SAR(1 g) = 0.958 W/kg; SAR(10 g) = 0.400 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 44.9%

[Info: Interpolated medium parameters used for SAR evaluation.](#)




Maximum value of SAR (measured) = 1.11 W/kg

2450H/B3-A03847, Extremity-Top Side, 2447MHz,WIFI/Z Scan (1x1x22): Measurement grid: dx=20mm, dy=20mm, dz=5mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Penetration depth = 9.070 (9.448, 8.117) [mm]

Maximum value of SAR (interpolated) = 0.237 W/kg

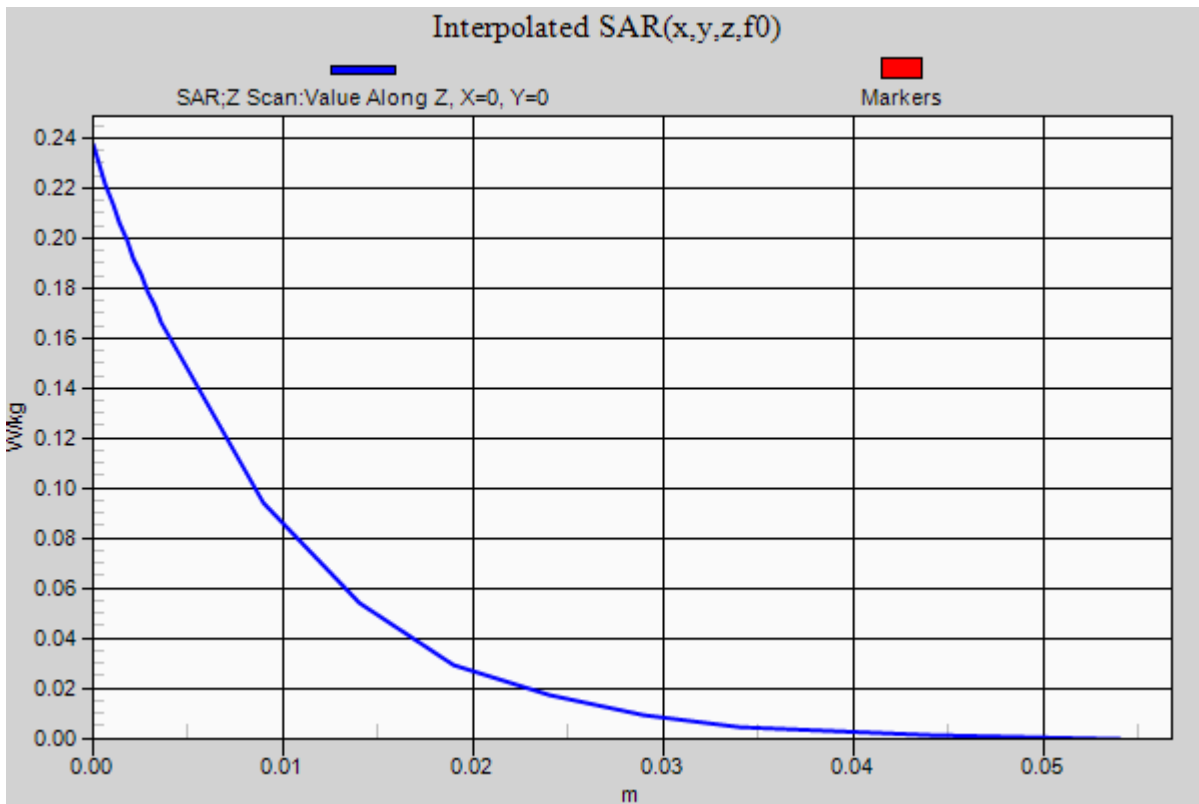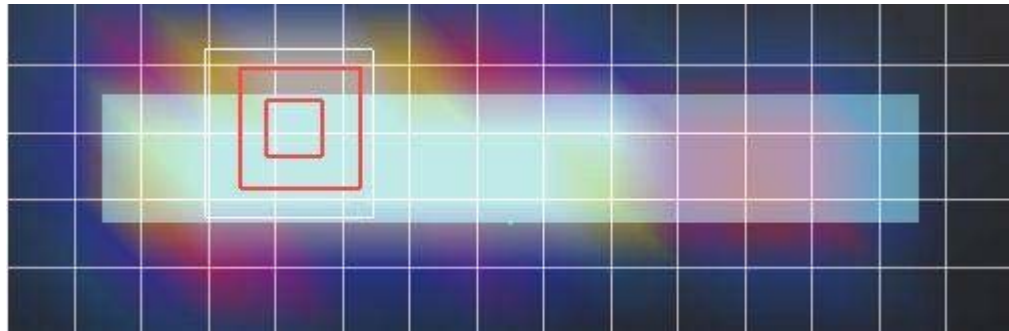

Plot B6

Date/Time: 1/31/2020 2:29:12 PM

Test Laboratory: Celltech Labs

Garmin A03847 -2450H Jan 31 2020

DUT: A03847; Type: Transmitter; Serial:

Communication System: UID 10030 - CAA, IEEE 802.15.1 Bluetooth (GFSK, DH1); Communication System Band: ISM 2.4 GHz Band (2400.0 - 2483.5 MHz); Frequency: 2402 MHz; Communication System PAR: 5.3 dB; PMF: 1.83865
Medium parameters used (interpolated): $f = 2402$ MHz; $\sigma = 1.856$ S/m; $\epsilon_r = 37.656$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3600; ConvF(6.46, 6.46, 6.46) @ 2402 MHz; Calibrated: 3/26/2019
 - Modulation Compensation: PMR for UID 10030 - CAA, Calibrated: 3/26/2019
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -1.5, 31.0, 151.0$
- Electronics: DAE4 Sn353; Calibrated: 3/19/2019
- Phantom: Twin-SAM V4.0 (30deg probe tilt); Type: QD 000 P40 CC; Serial: xxxx
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

2450H/B6-A03847, Extremity-Bottom Side, 2402MHz,BT/Area Scan (6x16x1): Measurement grid: dx=12mm, dy=12mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.0253 W/kg

2450H/B6-A03847, Extremity-Bottom Side, 2402MHz,BT/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.791 V/m; Power Drift = 1.34 dB

Peak SAR (extrapolated) = 0.0470 W/kg

SAR(1 g) = 0.016 W/kg; SAR(10 g) = 0.00626 W/kg

Ratio of SAR at M2 to SAR at M1 = 47.1%

[Info: Interpolated medium parameters used for SAR evaluation.](#)



Maximum value of SAR (measured) = 0.0211 W/kg

2450H/B6-A03847, Extremity-Bottom Side, 2402MHz,BT/Z Scan (1x1x22): Measurement grid: dx=20mm, dy=20mm, dz=5mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Penetration depth = 10.71 (5.935, 22.60) [mm]

Maximum value of SAR (interpolated) = 0.00835 W/kg

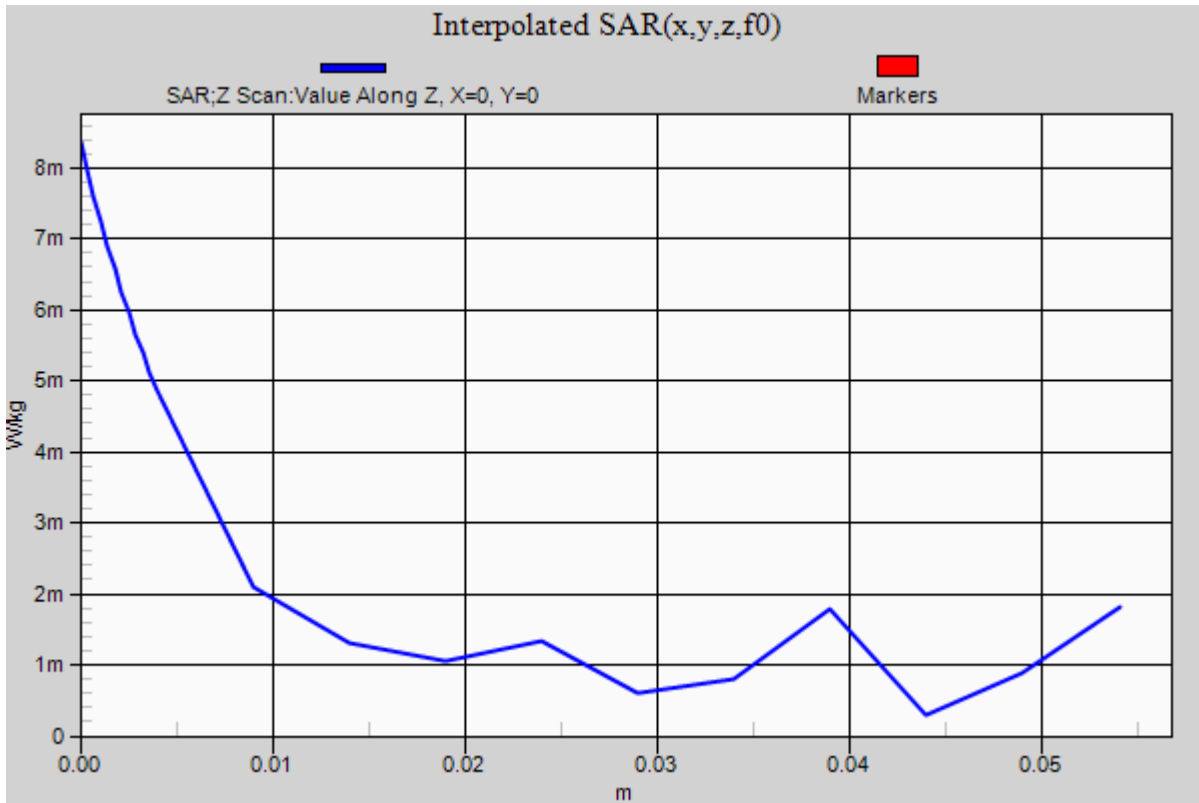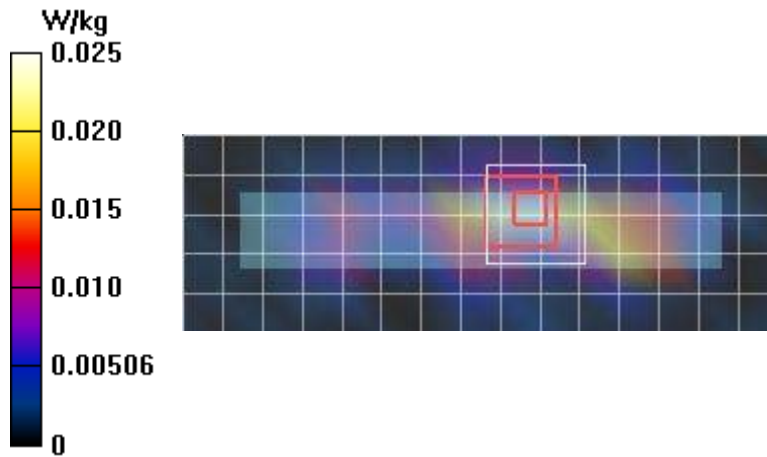

Plot B8

Date/Time: 2/4/2020 9:06:58 AM

Test Laboratory: Celltech Labs

Garmin A03847-5250H Feb 04 2020

DUT: A03847; Type: Transmitter; Serial:

Communication System: UID 10317 - AAC, IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 96pc duty cycle); Communication System Band: U-NII-1, U-NII-2A (5170 - 5330 MHz); Frequency: 5200 MHz; Communication System PAR: 8.36 dB; PMF: 1.04954
Medium parameters used: $f = 5200$ MHz; $\sigma = 4.72$ S/m; $\epsilon_r = 34.19$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:


- Probe: EX3DV4 - SN3600; ConvF(4.41, 4.41, 4.41) @ 5200 MHz; Calibrated: 3/26/2019
 - Modulation Compensation: PMR for UID 10317 - AAC, Calibrated: 3/26/2019
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -1.5, 25.0, 151.0$
- Electronics: DAE4 Sn353; Calibrated: 3/19/2019
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 Ax; Serial: 1234
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)


5250H/B8-A03536, Body-Back Side, 5200MHz,WIFI 2/Area Scan (13x19x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.570 W/kg

5250H/B8-A03536, Body-Back Side, 5200MHz,WIFI 2/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 1.669 V/m; Power Drift = 1.75 dB
Peak SAR (extrapolated) = 1.76 W/kg
SAR(1 g) = 0.512 W/kg; SAR(10 g) = 0.193 W/kg
Smallest distance from peaks to all points 3 dB below = 8 mm
Ratio of SAR at M2 to SAR at M1 = 66%

Maximum value of SAR (measured) = 1.10 W/kg

5250H/B8-A03536, Body-Back Side, 5200MHz,WIFI 2/Z Scan (1x1x19): Measurement grid: dx=20mm, dy=20mm, dz=20mm
Penetration depth = n/a (n/a, 0) [mm]
Maximum value of SAR (interpolated) = 0.0203 W/kg

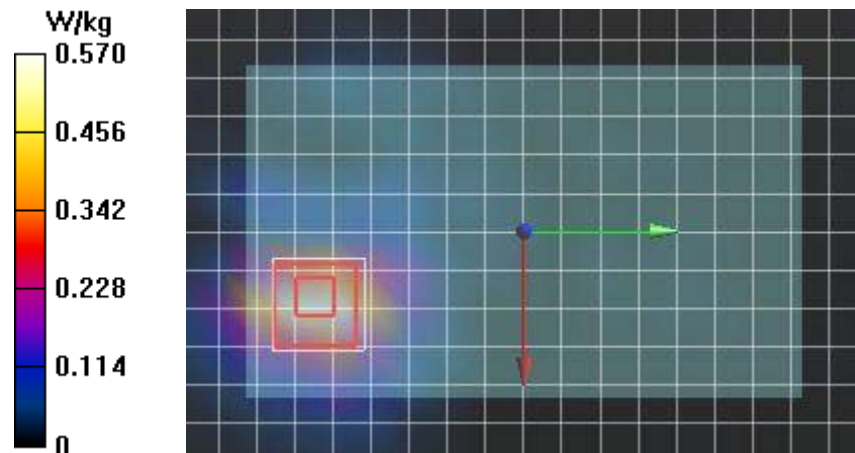

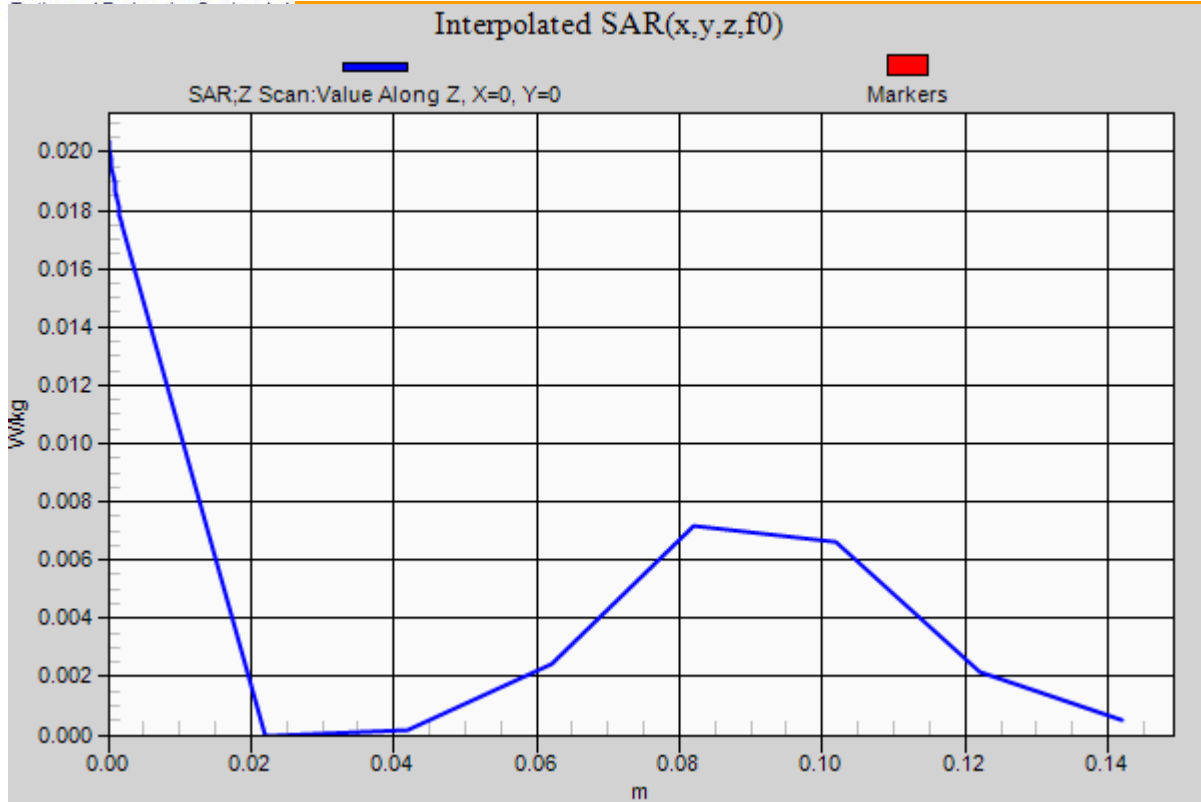

Plot B15

Date/Time: 2/6/2020 12:49:15 PM

Test Laboratory: Celltech Labs

Garmin A03847-5750H Feb 06 2020

DUT: A03847; Type: Transmitter; Serial:

Communication System: UID 10317 - AAC, IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 96pc duty cycle); Communication System Band: U-NII-3 Standalone (5735 - 5835 MHz); Frequency: 5795 MHz; Communication System PAR: 8.36 dB; PMF: 1.04954
 Medium parameters used: $f = 5795 \text{ MHz}$; $\sigma = 5.58 \text{ S/m}$; $\epsilon_r = 34.06$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3600; ConvF(4.08, 4.08, 4.08) @ 5795 MHz; Calibrated: 3/26/2019
 - Modulation Compensation: PMR for UID 10317 - AAC, Calibrated: 3/26/2019
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -1.5, 25.0, 151.0$
- Electronics: DAE4 Sn353; Calibrated: 3/19/2019
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 Ax; Serial: 1234
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

5750H/B15-A03847, Body-Left Side, 5795MHz,WIFI/Area Scan (8x23x1): Measurement grid: $dx=8\text{mm}, dy=8\text{mm}$
 Maximum value of SAR (measured) = 1.83 W/kg

5750H/B15-A03847, Body-Left Side, 5795MHz,WIFI/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4\text{mm}, dy=4\text{mm}, dz=1.4\text{mm}$
 Reference Value = 0.9470 V/m; Power Drift = 10.87 dB
 Peak SAR (extrapolated) = 2.60 W/kg
SAR(1 g) = 0.568 W/kg; SAR(10 g) = 0.164 W/kg
 Smallest distance from peaks to all points 3 dB below = 6.8 mm
 Ratio of SAR at M2 to SAR at M1 = 60.6%

Maximum value of SAR (measured) = 1.49 W/kg

5750H/B15-A03847, Body-Left Side, 5795MHz,WIFI/Z Scan (1x1x19): Measurement grid: $dx=20\text{mm}, dy=20\text{mm}, dz=20\text{mm}$
 Penetration depth = n/a (n/a, 0) [mm]
 Maximum value of SAR (interpolated) = 0.0786 W/kg

