



FCC LISTED, REGISTRATION
 NUMBER: 2764.01
 ISED LISTED REGISTRATION
 NUMBER: 23595-1

Test Report No:
3967ERM.013A1

Partial Test report

USA FCC Part 15.407 (U-NII), 15.209; & CANADA RSS-247, RSS-Gen
 Unlicensed National Information Infrastructure Devices. General technical requirements.
 License-Exempt Radio Apparatus (All Frequency Bands): Category I Equipment.
 General Requirements and Information for the Certification of Radio Apparatus.

(*) Identification of item tested	Infotainment Head Unit
(*) Trademark	Garmin
(*) Model and /or type reference	MGU22
Other identification of the product	FCC ID: IPH-03910 IC: 1792A-03910 HVIN: B03910 Hw version: B03910
(*) Features	Bluetooth classic; BLE; Wi-Fi 2.4GHz; Wi-Fi 5GHz; GNSS
Manufacturer	Garmin International, Inc. 1200 E. 151st Street Olathe, Kansas 66062, USA
Test method requested, standard	USA FCC Part 15.407 10-1-22 Edition: Unlicensed National Information Infrastructure Devices. General technical requirements. USA FCC Part 15.209 10-1-22 Edition: Radiated emission limits; general requirements. CANADA RSS-247 Issue 2 (February 2017). CANADA RSS-Gen Issue 5 (April 2018). 789033 D02 General UNII Test Procedures New Rules v02r01 Guidance for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.
Summary	See Appendix A
Approved by (name / position & signature)	Domingo Galvez EMC&RF Lab Manager
Date of issue	10-09-2023
Report template No	FDT08_23 (*) "Data provided by the client"

Index

INDEX	2
ACRONYMS	3
COMPETENCES AND GUARANTEES	3
GENERAL CONDITIONS	3
UNCERTAINTY	4
DATA PROVIDED BY THE CLIENT	4
USAGE OF SAMPLES	5
TEST SAMPLE DESCRIPTION	6
IDENTIFICATION OF THE CLIENT	7
TESTING PERIOD AND PLACE	8
DOCUMENT HISTORY	8
ENVIRONMENTAL CONDITIONS	8
REMARKS AND COMMENTS	8
LIST OF EQUIPMENT USED DURING THE TEST	9
TESTING VERDICTS	10
SUMMARY	10
APPENDIX A: TEST RESULTS. WI-FI 5GHZ	11

Acronyms

Acronym ID	Acronym Description
	Emission Bandwidth
# of Tx Chains	Number of Transmission Chains
Avg Power	Maximum Average Conducted Output Power
DC	Duty Cycle
Freq	Frequency
Max EIRP	Maximum Burst EIRP
Mod	Modulation
Mode	Mode
Occ Ch BW	Occupied Channel Bandwidth
Operation Band	Operation Band
PSD	Power Spectrum Density
Port	Active Port
TPC	TPC

Competences and guarantees

DEKRA Certification Inc. is a testing laboratory accredited by A2LA (The American Association for Laboratory Accreditation), to perform the tests indicated in the Certificate 2764.01

DEKRA Certification Inc. is a testing laboratory competent to carry out the tests described in this report.

In order to assure the traceability to other national and international laboratories, DEKRA Certification Inc. has a calibration and maintenance program for its measurement equipment.

DEKRA Certification Inc. guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated on the report and, it is based on the knowledge and technical facilities available at DEKRA Certification at the time of performance of the test.

DEKRA Certification Inc. is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA Certification Inc.

General conditions

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA Certification Inc.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA Certification Inc. and the Accreditation Bodies.

Uncertainty

Uncertainty (factor k=2) was calculated according to the DEKRA Certification internal document PODT000.

Test case	Frequency (MHz)	U (k=2)	Units
RF Power and PSD	5150-5850	0.88	dB
Occupied Bandwidth		1.87	%
Band Edge		0.64	dB
Radiated Spurious Emission	30-180	4.27	dB
	180-1000	3.14	dB
	1000-18000	3.30	dB
	18000-40000	3.49	dB

Data provided by the client

The following data has been provided by the client:

1. Information relating to the description of the sample ("Identification of the item tested", "Trademark", "Model and/or type reference tested").
2. The sample consists of Infotainment Head Unit to be installed in cars with the main functionalities: Navigation, USB, voice recognition and several interfaces to the vehicle and Bluetooth / WLAN.

DEKRA declines any responsibility with respect to the information provided by the client and that may affect the validity of results.

Usage of samples

Samples used for testing have been selected by: The client.

Sample S/01 is composed of the following elements:

Id	Control Number	Description	Model	Serial N°	Date of Reception	Application
S/01	3967/35	Garmin MGU 22 sample	MGU22	GAG104P0000070	06/12/2023	Element Under Test
S/01	2874/11	Fakra to SMA Connector	-	-	03/26/2021	Accessory
S/01	2874/13	OABR Connector cable	-	-	03/26/2021	Accessory
S/01	3171/11	Ethernet Cable	-	-	03/05/2021	Accessory
S/01	3428/32	BMW Antenna-DA Fakra 5G-GNSS		6520 8705915-04	06/01/2022	Accessory
S/01	3967/42	CAN cable	-	-	06/14/2023	Accessory
S/01	3967/43	Harness	-	-	06/14/2023	Accessory

Sample S/01 was used for the test(s): All Conducted tests indicated in appendix A.

Sample S/02 is composed of the following elements and accessories:

Id	Control Number	Description	Model	Serial N°	Date of Reception	Application
S/01	3967/35	Garmin MGU 22 sample	MGU22	GAG104P0000070	06/12/2023	Element Under Test
S/02	3428/73	Antenna	-	-	-	Element Under Test
S/02	2874/11	Fakra to SMA Connector	-	-	03/26/2021	Accessory
S/02	2874/13	OABR Connector cable	-	-	03/26/2021	Accessory
S/02	3171/11	Ethernet Cable	-	-	03/05/2021	Accessory
S/02	3428/32	BMW Antenna-DA Fakra 5G-GNSS		6520 8705915-04	06/01/2022	Accessory
S/02	3967/42	CAN cable	-	-	06/14/2023	Accessory
S/02	3967/43	Harness	-	-	06/14/2023	Accessory

Sample S/02 was used for the test(s): All Radiated tests indicated in appendix A.

Test sample description

Test Sample description (compulsory information for EMC and RF testing services)

Ports..... :	Port name and description	Cable					
		Specified length [m]	Attached during test	Shielded	Coupled to patient		
	BT/Wi-Fi Antenna	2	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		
	USB1/2/3	2	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		
	Power	2	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		
	CID	2	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		
	AR-Cam	2	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		
100 Base T1/1G Base T1/GPS	2	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			
Supplementary information to the ports..... :	N/A						
Rated power supply	Voltage and Frequency		Reference poles				
			L1	L2	L3	N	PE
	<input type="checkbox"/>	AC:	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	<input type="checkbox"/>	AC:	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	<input checked="" type="checkbox"/>	DC: 8 - 16 Vdc					
<input type="checkbox"/>	DC:						
Rated Power	No Data Provided						
Clock frequencies.....	No Data Provided						
Other parameters	No Data Provided						
Software version	No Data Provided						
Hardware version	B03910						
Dimensions in cm (W x H x D)	No Data Provided						
Mounting position	<input type="checkbox"/>	<i>Table top equipment</i>					
	<input type="checkbox"/>	<i>Wall/Ceiling mounted equipment</i>					
	<input type="checkbox"/>	<i>Floor standing equipment</i>					
	<input type="checkbox"/>	<i>Hand-held equipment</i>					
	<input checked="" type="checkbox"/>	<i>Other: Automotive</i>					

Modules/parts.....:	Module/parts of test item	Type	Manufacturer
	N/A		
Accessories (not part of the test item).....:	Description	Type	Manufacturer
	N/A		
Documents as provided by the applicant.....:	Description	File name	Issue date
	Declaration Equipment Data	FDT30_18 Declaration Equipment Data_MGU22_ver1	08/01/2023

Copy of marking plate:

Product Name: Automotive Infotainment Head Unit
 產品名稱: 汽車資訊娛樂主機
 Manufactured by: 佳明 **GARMIN**.
 Model / 型號: MGU22
 Made in / 製造: Taiwan
 Input / 輸入: 12V 12A
 FCC ID: IPH-03910 IC: 1792A-03910 M/N: B03910

UK CA CE 161-06307-03
 E24 XX X-XX XXXXXXXX
 ZICTA ZMB/ZICTA/TA/2022/3/1
 NCA APPROVED: 7E5-7M-XA9-RDR
 CMIIT ID: 2022DJ10152

THIS DEVICE COMPLIES WITH PART 15 OF THE FCC RULES, AND ICSED CANADA LICENSE-EXEMPT RSS STANDARD (S). OPERATION IS SUBJECT TO THE FOLLOWING TWO CONDITIONS:
 (1) THIS DEVICE MAY NOT CAUSE HARMFUL INTERFERENCE, AND
 (2) THIS DEVICE MUST ACCEPT ANY INTERFERENCE RECEIVED, INCLUDING INTERFERENCE THAT MAY CAUSE UNDESIRABLE OPERATION.

AGREE PAR LE MCPT (REPUBLIQUE DE DJIBOUTI)
 Numéro d'agrément: 070/DO/IC/2022
 Date d'agrément: 26/05/2022

AGREÉ PAR L'ANRT MAROC
 Numéro d'agrément: MR00031592ANRT2022
 Date d'agrément: 07/02/2022

AGREE PAR L'ARE MAURITANIE
 Numéro d'agrément: XXXX/XXX/XXXX
 Date d'agrément: XXXXX/XXXX

AGREE PAR ARTP SENEGAL
 Numéro d'agrément: 072173/AG/IER

Connection and use of this communications equipment is permitted by the Nigerian Communications Commission

B4532/SDPPV/2022 2051
 BOCRA REGISTERED No: XXXXXXXXXX
 Homologue par l'ARPCCE 341/R/HMG/DG/ARPCCE/2023

OMAN - TRA D172338 TRA/TA - R/12940/22

Identification of the client

Garmin International, Inc.
1200 E. 151st Street
Olathe, Kansas 66062, USA.

Testing period and place

Test Location	DEKRA Certification Inc.
Date (start)	06-12-2023
Date (finish)	10-05-2023

Document history

Report number	Date	Description
3967ERM.013	08-28-2023	First release.
3967ERM.013A1	10-09-2023	Second release. Power spot check test results were updated to include all UNII bands in Appendix A, Testing period and place, and Test Conditions sections were updated. This modification test report cancels and replaces the test report 3967ERM.013

Environmental conditions

In the control chamber, the following limits were not exceeded during the test:

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 20 % Max. = 75 %

In the semi anechoic chamber, the following limits were not exceeded during the test.

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 20 % Max. = 75 %

In the chamber for conducted measurements, the following limits were not exceeded during the test:

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 20 % Max. = 75 %

Remarks and comments

The tests have been performed by the technical personnel: Juliana Cherry, Lakshmi Gollamudi, Qi Zhang, and Koji Nishimoto.

List of equipment used during the test

Conducted Measurements

CONTROL NUMBER	DESCRIPTION	Serial No	LAST CALIBRATION	NEXT CALIBRATION
1039	Fsv40 Signal Analyzer 40GHz	101627	2022-11-01	2024-11-01
1041	SMB100A Signal Generator	180180	2022-10-06	2024-10-06
1042	SMBV100A Vector Signal Generator	262575	2022-03-16	2024-03-16
1107	Ethernet SNMP Thermometer	60038026952	2022-08-16	2023-08-16
1313	Wireless Measurement Software R&S WMS32	-	N/A	N/A

Radiated Measurements

CONTROL NUMBER	DESCRIPTION	Serial No	LAST CALIBRATION	NEXT CALIBRATION
878	Power supply (AMETEK / PROG-DC-PS)	1707A01783	N/A	N/A
1012	ESR26 EMI Test Receiver	101478	2022-04-12	2024-04-12
1014	FSV40 Signal Analyzer 40GHz	101626	2022-08-01	2024-08-01
1055	3116C Double-Ridged Waveguide Horn Antenna	211394	2023-02-06	2026-02-06
1377	Double Ridged Horn Antenna	103050	2021-12-01	2024-12-01
1065	3142E Biconilog antenna	208587	2020-08-13	2023-08-13
1108	Ethernet SNMP Thermometer-SAC	60038026954	2022-10-18	2024-10-18
1111	Ethernet SNMP Thermometer	60038026577	2022-10-18	2024-10-18
1179	Semi-Anechoic Chamber	F169021	N/A	N/A
1314	Wireless Measurement Software R&S Emc32	1040-OT102236	N/A	N/A
1461	Low Noise Preamplifier (1-18GHz)	2213857B	2022-06-01	2024-06-01

Testing verdicts

Fail	F
Not applicable	N/A
Not measured	N/M
Pass	P

Summary

FCC PART 15 PARAGRAPH / RSS-247			
Requirement	Test case	Verdict	Remark
FCC 15.407 (a) / RSS-247 6.2	Power Limits. Maximum Output Power	P	N/A
FCC 15.407 (a) / RSS-247 6.2	Maximum Power Spectral Density	N/M	Refer 3
FCC 2.1049 / RSS-Gen 6.7	99% Occupied Bandwidth	P	N/A
FCC 15.403 / RSS-Gen 6.7	26 dB Emission Bandwidth	N/M	Refer 3
FCC 15.407 (b) / RSS-247 6.2	Band-edge Conducted Emissions	N/M	Refer 3
FCC 15.407 (e) / RSS 247 6.2.4.1	6 dB Emission Bandwidth	N/M	Refer 1
FCC 15.407 (b)(6)15.207 / RSS Gen 8.8	Emission limitations Conducted	P	N/A
FCC 15.407 (b), 15.205 & 15.209 / RSS-Gen 8.9 & 8.10	Undesirable radiated emissions	P	N/A
FCC 15.407 (g) / RSS-Gen 6.11 & 8.11	Frequency Stability	N/M	Refer 2
<p><u>Supplementary information and remarks:</u></p> <ol style="list-style-type: none"> 1. Only applicable to sub-band U-NII-3: 5.725 - 5.85 GHz. 2. The compliance is checked through a description of how this requirement is met that is provided by the applicant. 3. Only Partial testing has been requested by the Customer. <p>Appendix .1: MIMO</p>			

Appendix A: Test results. Wi-Fi 5GHz

Appendix A

TEST CONDITIONS	14
TEST CASES DETAILS	18
<i>FCC 15.407 (a) / RSS-247 6.2 Power Limits. Maximum Output Power</i>	18
<i>FCC 2.1049 / RSS-Gen 6.7 99% Occupied Bandwidth</i>	46
<i>FCC 15.407 (b)(6)15.207 / RSS Gen 8.8 Emission limitations Conducted</i>	60
<i>FCC 15.407 (b), 15.205 & 15.209 / RSS-Gen 8.9 & 8.10 Undesirable radiated emissions</i>	69

DUT Description

(*): The following information is provided by the client

Information	Description
Equipment type	Wi-Fi 5GHz
DFS Operating Mode	---
TPC Function	Yes
Antenna Specification	Equipment with two antennas (1/4 wave coax)
Operating Frequency Range	5150 - 5250 MHz 5250 – 5350 MHz 5470 – 5725 MHz 5725 – 5825 MHz
Nominal Channel Bandwidth	20/ 40/ 80 MHz
Antenna type	SISO: Radio A SISO Radio B MIMO Radio A + Radio B
RF Output Power	14 dBm
Antenna gain	-2.8 dBi
Supply Voltage	12 Vdc
Modulation:	OFDM (QPSK, BPSK,16QAM,64QAM,256QAM,1024QAM)
Communication Mode:	IP Based (Load Based)
Transmit Data Rate:	802 .11 a/n/ac/ax Rates: IEEE 802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps IEEE 802.11n: MCS0-7 IEEE 802.11ac: VHT SS1 MCS 0-9 VHT SS2 MCS 0-9 IEEE 802.11ax: HE SS1 MCS8 HE SS1 MCS9 HE SS1 MCS11
Geo-location capability	Yes

TEST CONDITIONS

(*): Data provided by the client.

TEST CONDITIONS	DESCRIPTION
<p>TC#01^{(1) (3)} (a mode)</p>	<p><u>Power supply (V):</u> $V_{\text{nominal}} = 12 \text{ Vdc}$</p> <p><u>Channel Bandwidth:</u> 20 MHz <u>Test Frequencies for Conducted/Radiated tests: (RADIO A+B)</u> <u>UNII-1-3</u> Channels: 5240, 5280, 5700, 5785 MHz</p>
<p>TC#02^{(1) (3)} (n mode)</p>	<p><u>Power supply (V):</u> $V_{\text{nominal}} = 12 \text{ Vdc}$</p> <p><u>Channel Bandwidth:</u> 20 MHz <u>Test Frequencies for Conducted/Radiated tests: (RADIO A+B)</u> <u>UNII-1-3</u> Channels: 5180, 5280, 5700, 5785 MHz</p> <p><u>Channel Bandwidth:</u> 40 MHz <u>Test Frequencies for Conducted/Radiated tests: (RADIO A+B)</u> <u>UNII-1-3</u> Channels: 5230, 5270, 5550, 5785 MHz</p>
<p>TC#03^{(1) (3)} (ac mode non-beam forming)</p>	<p><u>Power supply (V):</u> $V_{\text{nominal}} = 12 \text{ Vdc}$</p> <p><u>Channel Bandwidth:</u> 20 MHz <u>Test Frequencies for Conducted/Radiated tests: (RADIO A+B)</u> <u>UNII-1-3</u> Channels: 5240, 5280, 5700, 5785 MHz</p> <p><u>Channel Bandwidth:</u> 40 MHz <u>Test Frequencies for Conducted/Radiated tests: (RADIO A+B)</u> <u>UNII-1-3</u> Channels: 5230, 5270, 5510, 5755 MHz</p> <p><u>Channel Bandwidth:</u> 80 MHz <u>Test Frequencies for Conducted/Radiated tests: (RADIO A+B)</u> <u>UNII-1-3</u> Channels: 5210, 5290, 5610, 5775 MHz</p>

TEST CONDITIONS	DESCRIPTION
<p>TC#04⁽¹⁾⁽²⁾⁽³⁾ (ax mode non-beam forming)</p>	<p><u>Power supply (V):</u> $V_{\text{nominal}} = 12 \text{ Vdc}$ <u>Channel Bandwidth: 20 MHz</u> <u>Test Frequencies for Conducted tests: (RADIO A+B)</u> <u>UNII-1-3</u> Channels: 5240, 5280, 5700, 5785 MHz</p> <p><u>Channel Bandwidth:40 MHz</u> <u>Test Frequencies for Conducted tests: (RADIO A+B)</u> <u>UNII-1-3</u> Channels: 5240, 5280, 5700, 5785 MHz</p> <p><u>Channel Bandwidth: 80 MHz</u> <u>Test Frequencies for Conducted tests: (RADIO A+B)</u> <u>UNII-1-3</u> Channels: 5210, 5290, 5610, 5775 MHz</p>

Note (1): The test set-up was made in accordance to the general provisions of FCC Unlicensed National Information Infrastructure (U-NII) Devices 789033 D02 General U-NII Test Procedures New Rules v02r01 dated Dec 14, 2017.

The EUT was tested in the following operating mode:

- Continuously transmitting with a modulated carrier at maximum power in all required channels using the supported data rates/modulation types.
- For spurious emissions for OFDM modes 802.11a, 802.11n20/40, 802.11ac20/40/80, and 11ax20/40/80 a preliminary scan was performed to determine the worst case. The following tables and plots show the results for the worst case in 802.11ac mode.
- The data rates of 54Mb/s for 802.11a, MCS 7 for 802.11n, MCS8 for 802.11ac20 and MCS9 for 802.11ac40/80, MCS8 for ax20, MCS 9 for ax40 and MCS11 for ax80 were selected based on preliminary testing that identified those rates corresponding to the worst cases.
- For all modes, the EUT was configured in test mode using a software application. The application was used to enable continuous transmission and to select the test channels as required. The client supplied instructions to configure the EUT. The customer supplied a document containing the setup instructions.

Note (2): Partial RU 26 tone was identified as the worst-case RU (Resource Unit) carrier allocation for all non-beamforming ax mode testing.

The worst-case RU combinations used in the ax mode MIMO measurement are indicated as follows:

- 20 MHz BW - RU26 offset 0
- 40 MHz BW - RU26 offset 0
- 80 MHz BW - RU26 offset 0

Full RU combinations for ax mode MIMO measurement (all test cases) are indicated as follows:

- 20 MHz BW – RU242 offset 61
- 40 MHz BW – RU484 offset 65
- 80 MHz BW – RU996 offset 67

Note (3): For Maximum Output Power for OFDM modes 802.11a, 802.11n20/40, 802.11ac20/40/80 and 802.11ax20/40/80 a preliminary scan was performed to determine the degradation of the performance.

The test results shown are the worst case. See below the comparison table between previous test results (test report 3154ERM.010 for UNII 1 & 3 and 3830ERM.002 for UNII 2A & 2C) and test results with the new sample shown in this test report:

Bandwidth (MHz)	U-NII Sub-Band	Mode	Frequency (MHz)	Maximum conducted power (dBm)		Delta
				MGU22 - 3154/3830	MGU22 - 3967	
20	U-NII-1	a	5240	15.0	15.0	0.0
		n	5180	14.0	14.2	0.2
		ac	5240	15.9	16.1	0.2
		ax	5240	10.5	11.2	0.7
	U-NII-2A	a	5280	15.7	16.0	0.3
		n	5280	13.6	14.1	0.5
		ac	5280	15.7	16.1	0.4
		ax	5260	11.5	10.7	-0.8
	U-NII-2C	a	5700	12.6	13.6	1.0
		n	5700	11.5	12.6	1.1
		ac	5700	12.4	13.5	1.1
		ax	5580	11.2	11.8	0.6
	U-NII-3	a	5785	9.0	9.6	0.6
		n	5785	9.4	9.5	0.2
		ac	5785	9.0	9.8	0.9
		ax	5785	8.9	10.1	1.2
40	U-NII-1	n	5230	13.9	14.0	0.1
		ac	5230	15.8	14.5	-1.3
		ax	5230	11.9	10.5	-1.4
	U-NII-2A	n	5270	13.3	12.8	-0.5
		ac	5270	15.5	14.2	-1.3
		ax	5270	10.3	10.0	-0.3
	U-NII-2C	n	5550	13.0	11.6	-1.4
		ac	5510	11.4	10.6	-0.9
		ax	5550	10.3	9.9	-0.5
	U-NII-3	n	5755	11.2	11.6	0.4
		ac	5755	10.2	11.7	1.5
		ax	5755	10.4	9.9	-0.5
80	U-NII-1	ac	5210	12.6	13.0	0.4
		ax	5210	10.4	9.2	-1.2
	U-NII-2A	ac	5290	12.6	11.3	-1.3
		ax	5290	8.3	7.9	-0.4
	U-NII-2C	ac	5610	12.0	12.9	0.9
		ax	5610	8.9	9.2	0.3
	U-NII-3	ac	5775	12.1	12.6	0.5
		ax	5775	8.9	7.9	-1.1

Directional Antenna Gain Calculations for CDD MIMO In-Band Measurements:

For 2Tx CDD Modes, in accordance with KDB 662911 D01 v02r01 Section F)2)f)i), directional gain was calculated as follows:

- For power measurements:
 - Directional gain_{POWER} = G_{ANT} dBi ($N_{ANT} < 4$)
 - Directional gain_{POWER} = $G_{ANT} = -2.8$ dBi
 - Power Antenna Gain MIMO Chain 0 & 1: -2.8 dBi

TEST CASES DETAILS

FCC 15.407 (a) / RSS-247 6.2 Power Limits. Maximum Output Power

Limits

For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

RSS-247:

For OEM devices installed in vehicles, the maximum e.i.r.p. shall not exceed 30 mW or $1.76 + 10 \log_{10} B$, dBm, whichever is less. Devices shall implement TPC in order to have the capability to operate at least 3 dB below the maximum permitted e.i.r.p. of 30 mW.

For devices other than devices installed in vehicles:

For the band 5.15-5.25 GHz, the maximum e.i.r.p. shall not exceed 200 mW (23 dBm) or $10 + 10 \log_{10} B$, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.

For the 5.25-5.35 GHz, 5.470-5.6 GHz, and 5.650-5.725 GHz bands, the maximum conducted output power shall not exceed 250 mW (24 dBm) or $11 + 10 \log_{10} B$, dBm, whichever power is less. The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log_{10} B$, dBm, whichever is less.

For the band 5.725-5.850 GHz, the maximum conducted output power shall not exceed 1 W. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the output power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna gain: -2.8 dBi

Mode: MIMO CCD Mode 2x2

Modulation: 802.11a (OFDM 54 Mbit/s)

Results

Freq (MHz)	Avg Power (dBm)	Max EIRP (dBm)
5240.000	15.0	12.2
5280.000	16.0	13.2
5700.000	13.6	10.8
5785.000	9.6	6.8

Verdict


Pass

Attachments

Frequency MHz = 5240.00000

Modulation = 802.11a (OFDM 54 Mbit/s)


Images:

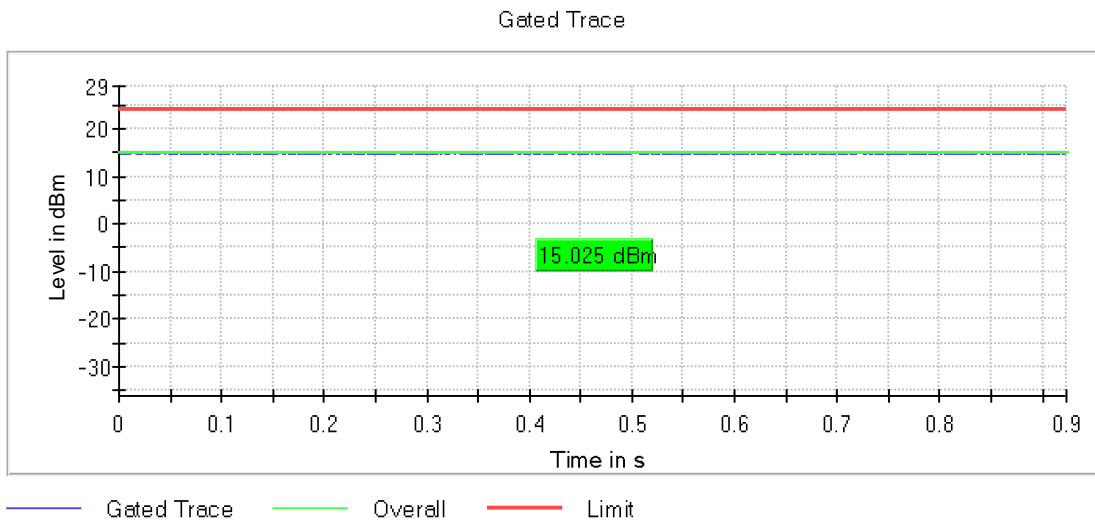

Frequency MHz = 5280.00000

Modulation = 802.11a (OFDM 54 Mbit/s)


Images:

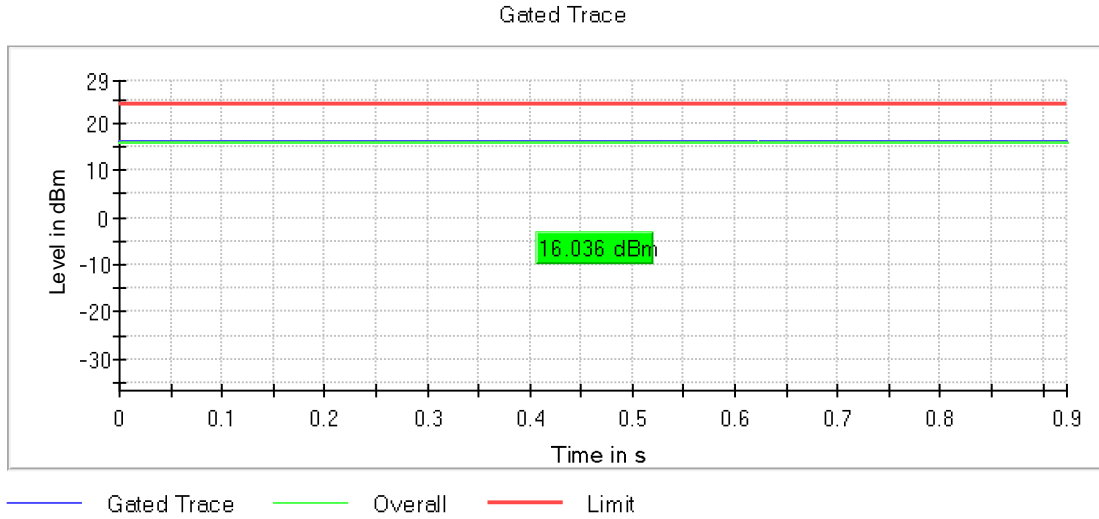

Frequency MHz = 5700.00000


Modulation = 802.11a (OFDM 54 Mbit/s)

Images:

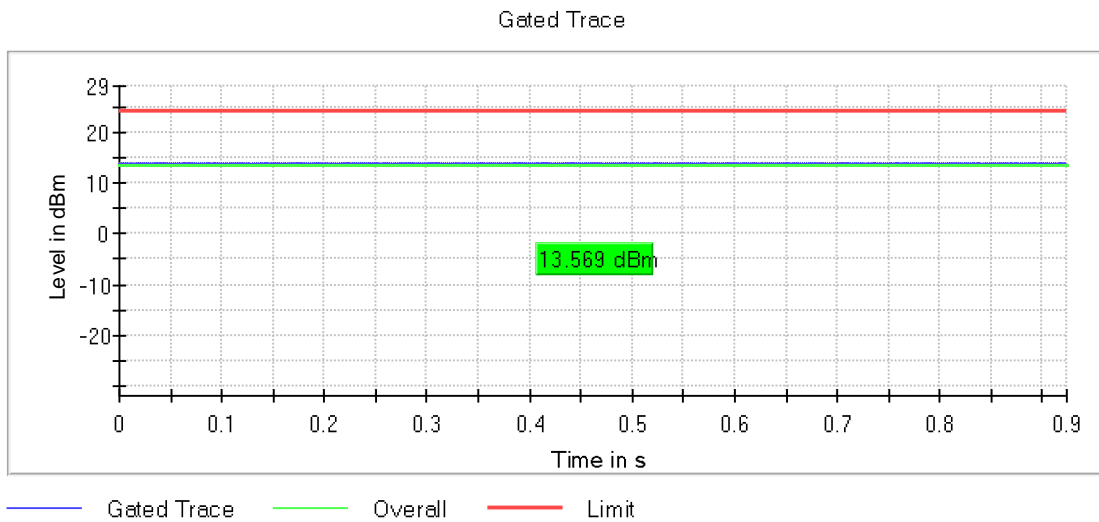

Frequency MHz = 5785.00000 Modulation = 802.11a (OFDM 54 Mbit/s)

Images:

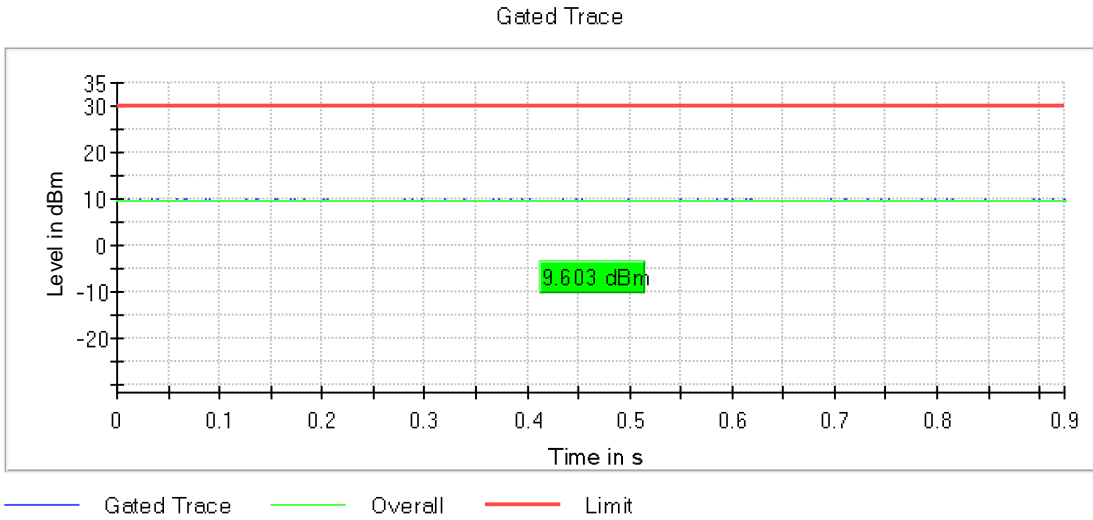

Tables:

Spectrum Analyzer Parameters

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s

Antenna gain: -2.8 dBi

Mode: MIMO CCD Mode 2x2

Modulation: 802.11n HT20 (OFDM MCS7)

Results

Freq (MHz)	Avg Power (dBm)	Max EIRP (dBm)
5180.000	14.2	11.4
5280.000	14.1	11.3
5700.000	12.6	9.8
5785.000	9.5	6.7

Verdict


Pass

Attachments

Frequency MHz = 5180.00000


Modulation = 802.11n HT20 (OFDM MCS7)

Images:

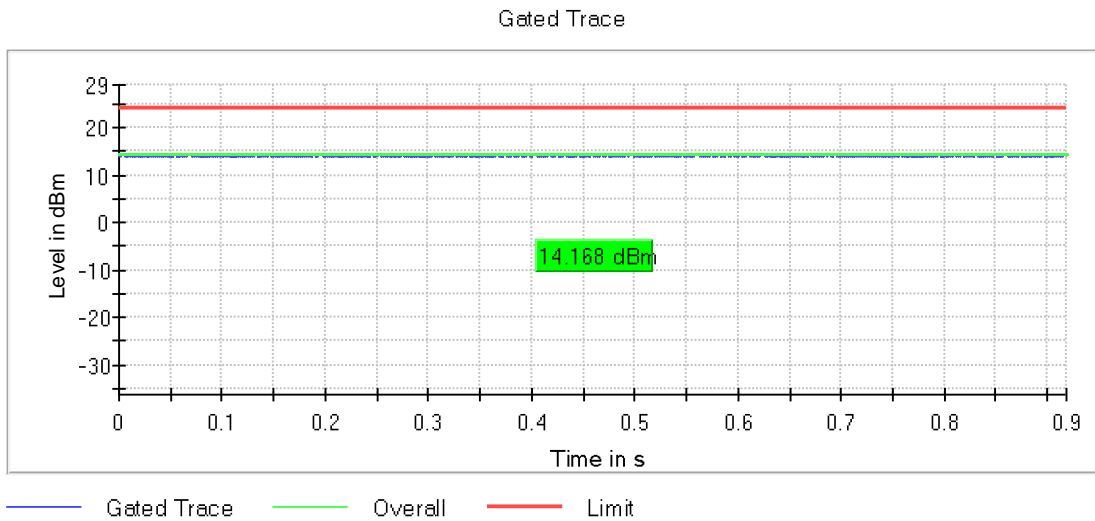


Frequency MHz = 5280.00000 Modulation = 802.11n HT20 (OFDM MCS7)

Images:

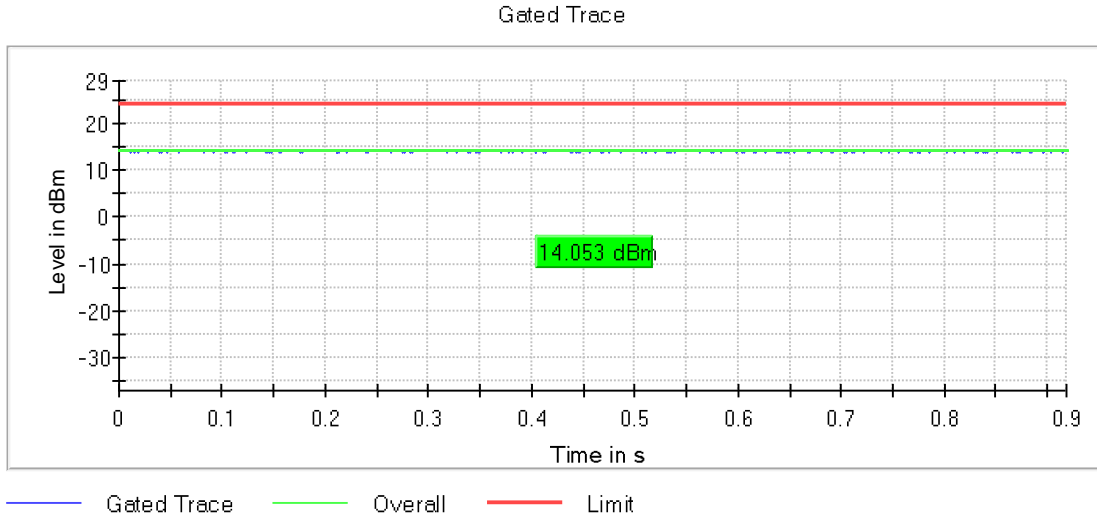


Frequency MHz = 5700.00000 Modulation = 802.11n HT20 (OFDM MCS7)

Images:

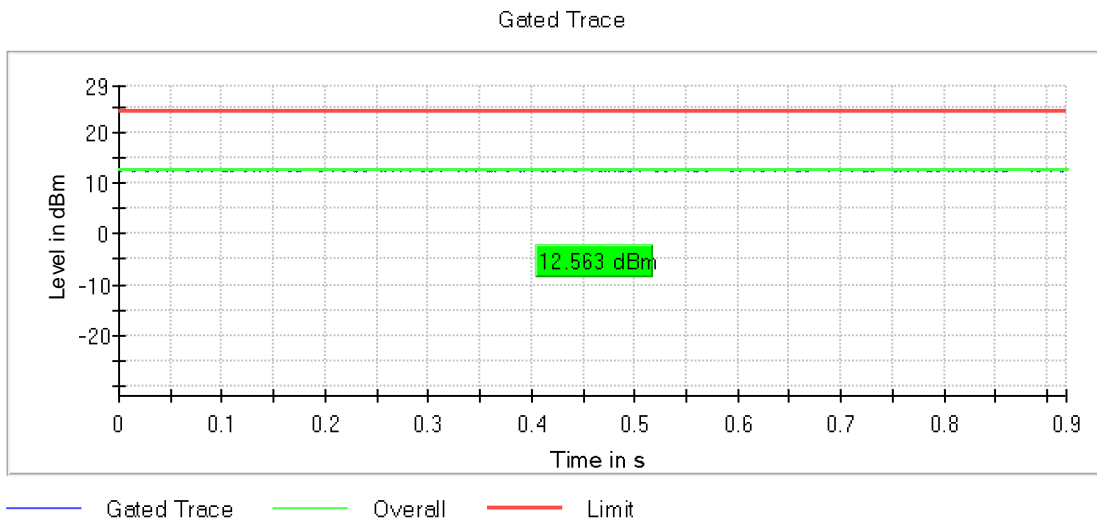

Frequency MHz = 5785.00000 Modulation = 802.11n HT20 (OFDM MCS7)

Images:

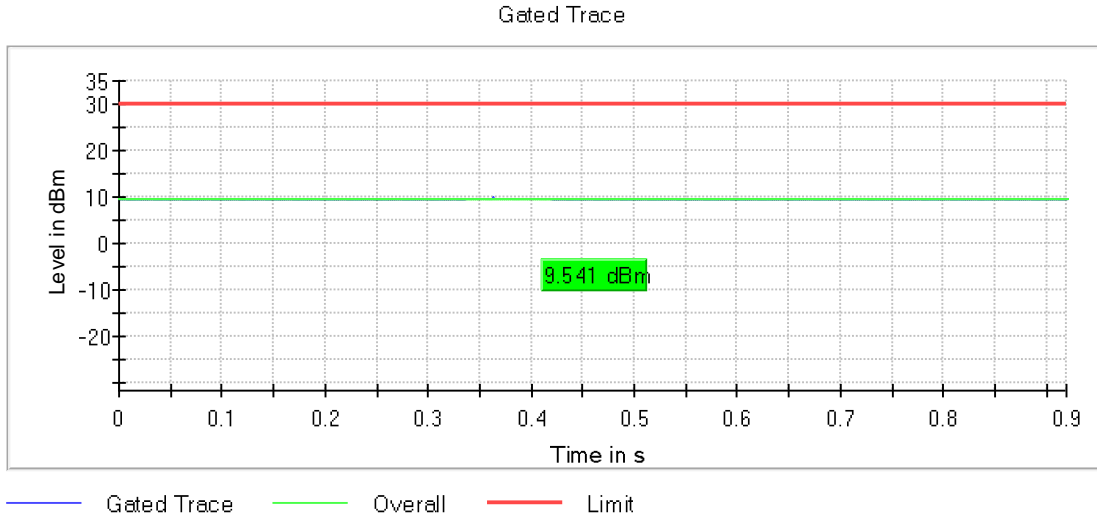

Tables:

Spectrum Analyzer Parameters

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s

Antenna gain: -2.8 dBi

Mode: MIMO CCD Mode 2x2

Modulation: 802.11n HT40 (OFDM MCS7)

Results

Freq (MHz)	Avg Power (dBm)	Max EIRP (dBm)
5230.000	14.0	11.2
5270.000	12.8	10.0
5550.000	11.6	8.8
5755.000	11.5	8.7

Verdict


Pass

Attachments

Frequency MHz = 5230.00000

Modulation = 802.11n HT40 (OFDM MCS7)


Images:

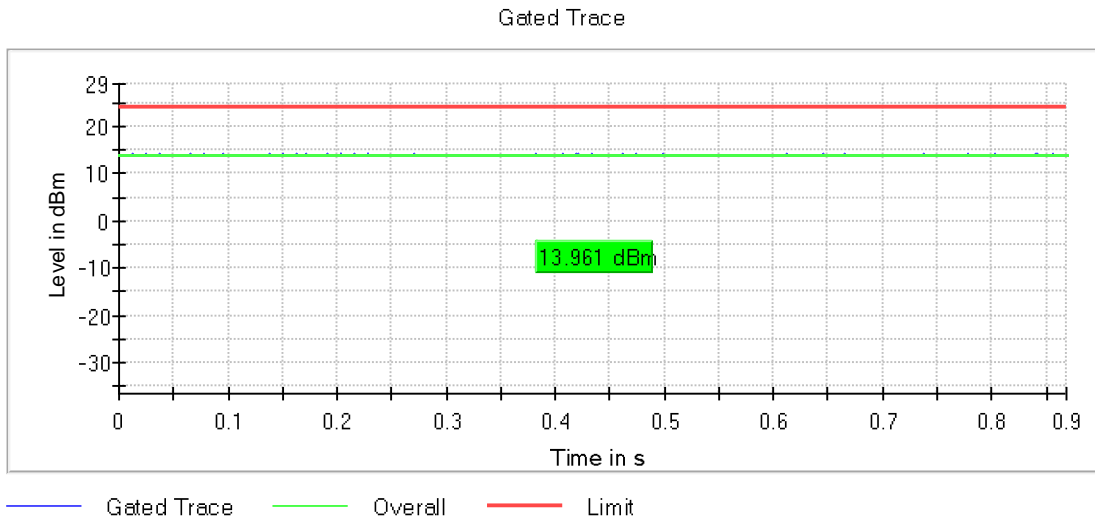

Frequency MHz = 5270.00000

Modulation = 802.11n HT40 (OFDM MCS7)


Images:

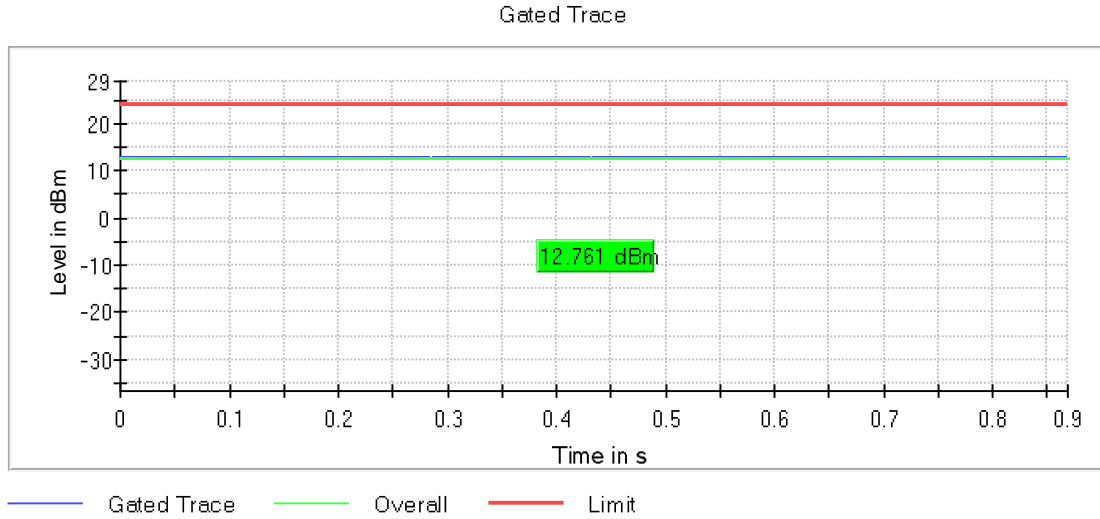

Frequency MHz = 5550.00000


Modulation = 802.11n HT40 (OFDM MCS7)

Images:

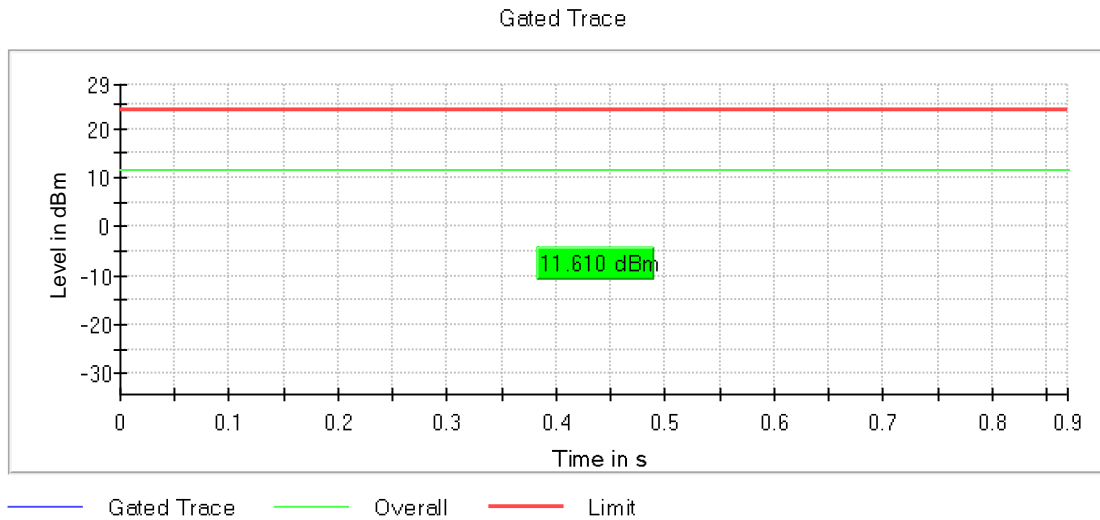

Frequency MHz = 5755.00000 Modulation = 802.11n HT40 (OFDM MCS7)

Images:

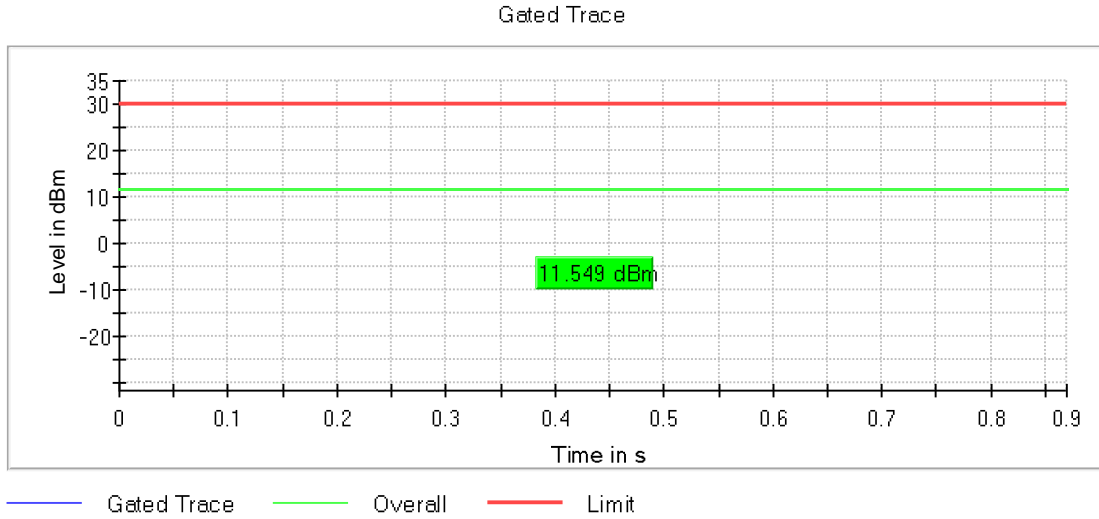

Tables:

Spectrum Analyzer Parameters

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s

Antenna gain: -2.8 dBi

Mode: MIMO CCD Mode 2x2

Modulation: 802.11ac VHT20 SS1 (OFDM MCS8) non-beam forming

Results

Freq (MHz)	Avg Power (dBm)	Max EIRP (dBm)
5240.000	16.1	13.3
5280.000	16.1	13.3
5700.000	13.5	10.7
5785.000	9.8	7.0

Verdict

Pass

Attachments

Frequency MHz = 5240.00000

Modulation = 802.11ac VHT20 SS1 (OFDM MCS8)


Images:



Frequency MHz = 5280.00000

Modulation = 802.11ac VHT20 SS1 (OFDM MCS8)


Images:

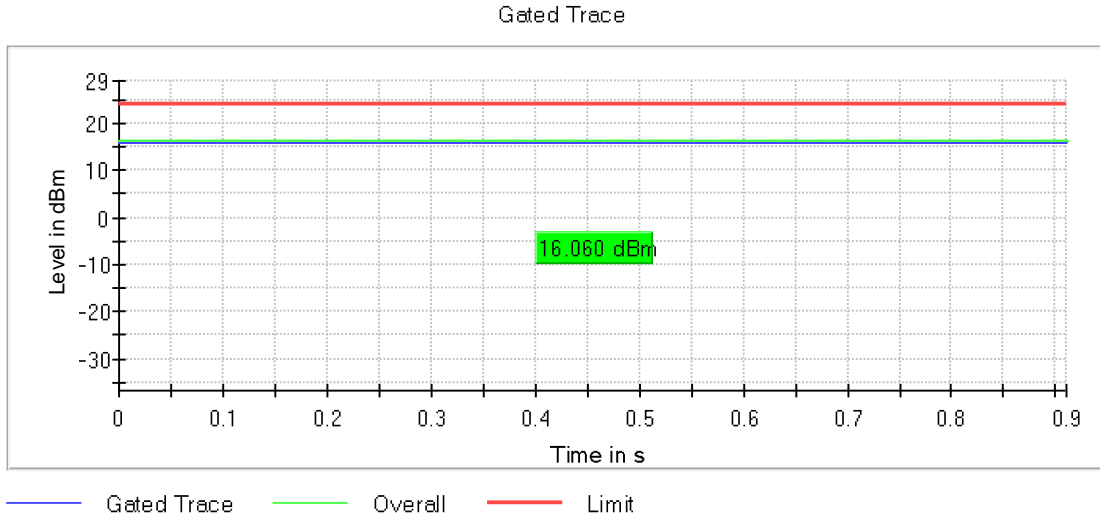

Frequency MHz = 5700.00000


Modulation = 802.11ac VHT20 SS1 (OFDM MCS8)

Images:

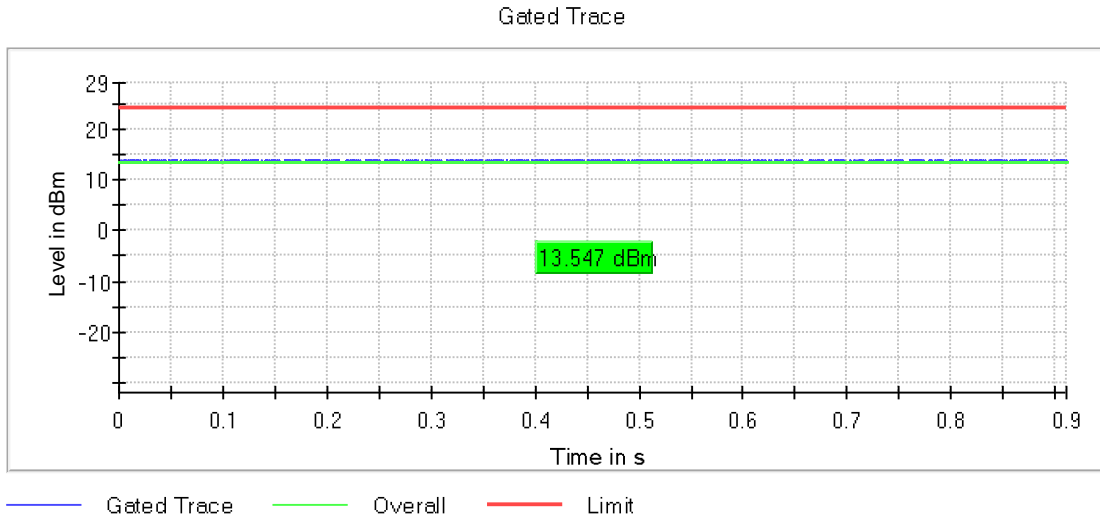

Frequency MHz = 5785.00000 Modulation = 802.11ac VHT20 SS1 (OFDM MCS8)

Images:

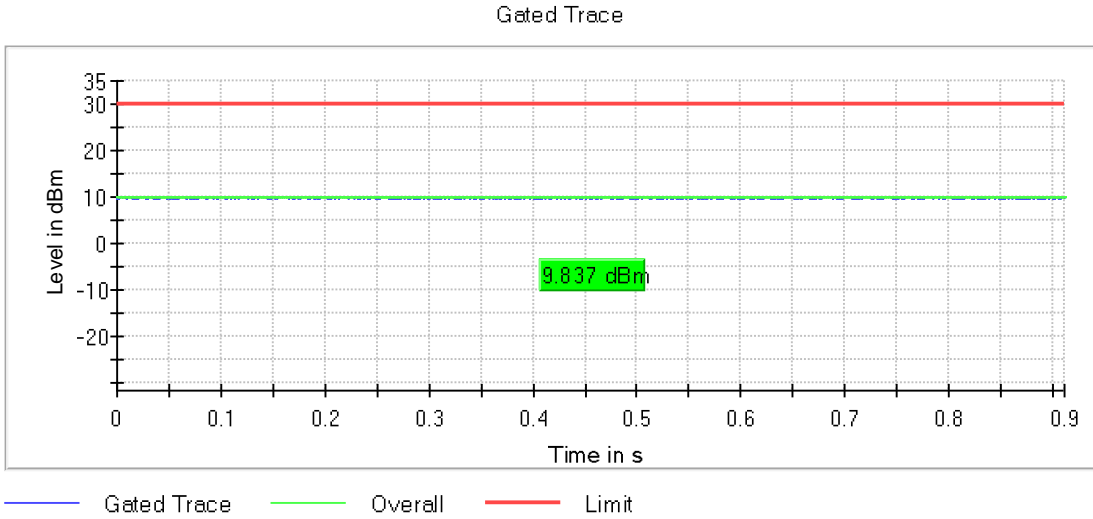

Tables:

Spectrum Analyzer Parameters

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s

Antenna gain: -2.8 dBi

Mode: MIMO CCD Mode 2x2

Modulation: 802.11ac VHT40 SS1 (OFDM MCS9) non-beam forming

Results

Freq (MHz)	Avg Power (dBm)	Max EIRP (dBm)
5230.00000	14.5	11.7
5270.00000	14.2	11.4
5510.00000	10.6	7.8
5755.00000	11.7	8.9

Verdict


Pass

Attachments

Frequency MHz = 5230.00000

Modulation = 802.11ac VHT40 SS1 (OFDM MCS9)


Images:

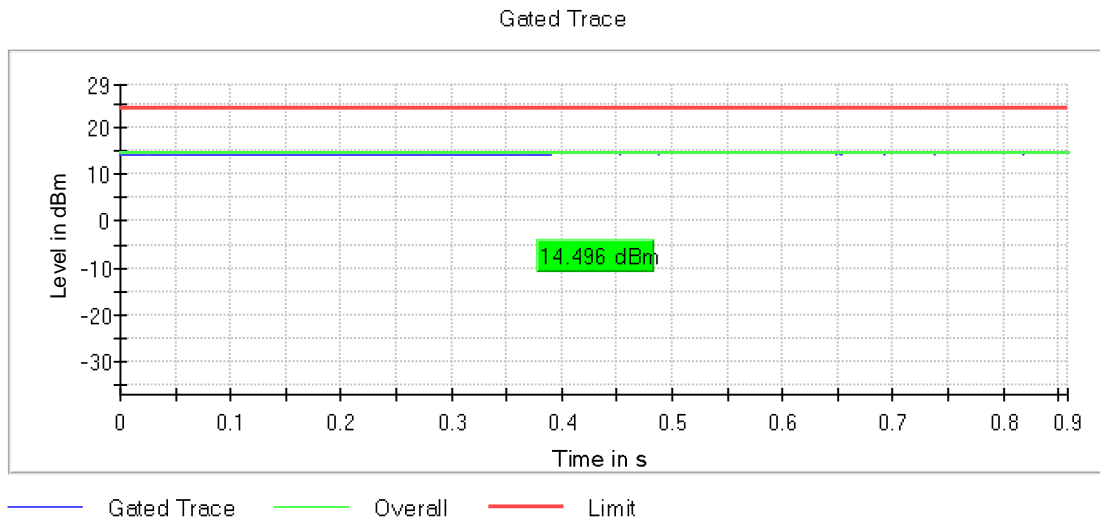

Frequency MHz = 5270.00000

Modulation = 802.11ac VHT40 SS1 (OFDM MCS9)


Images:

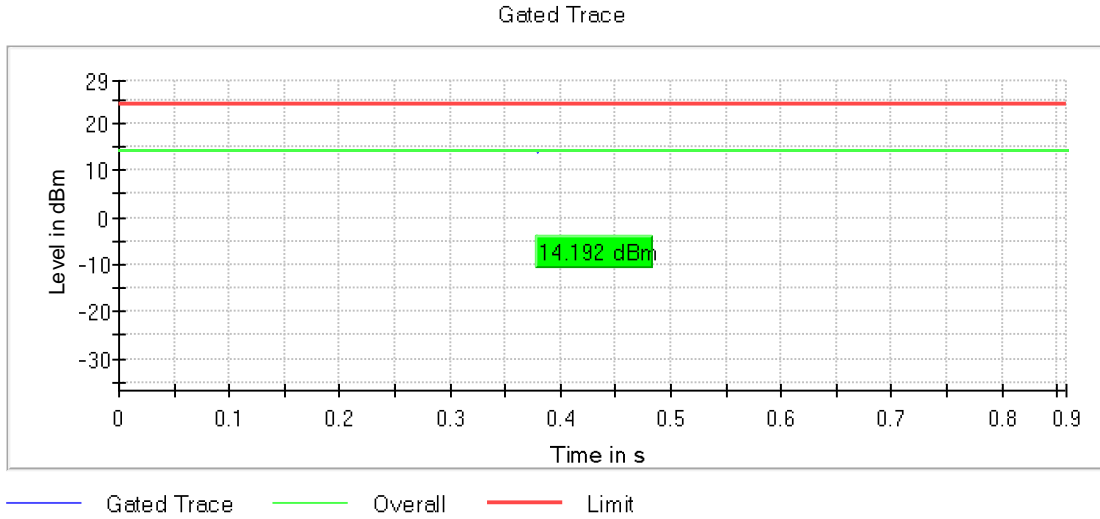

Frequency MHz = 5510.00000

Modulation = 802.11ac VHT40 SS1 (OFDM MCS9)


Images:

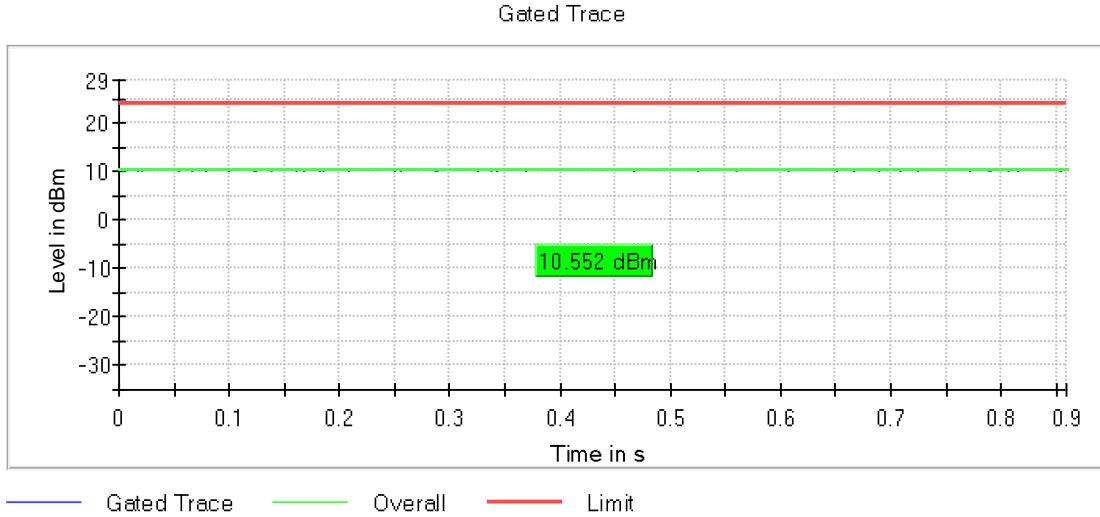

Frequency MHz = 5755.00000

Modulation = 802.11ac VHT40 SS1 (OFDM MCS9)

Images:

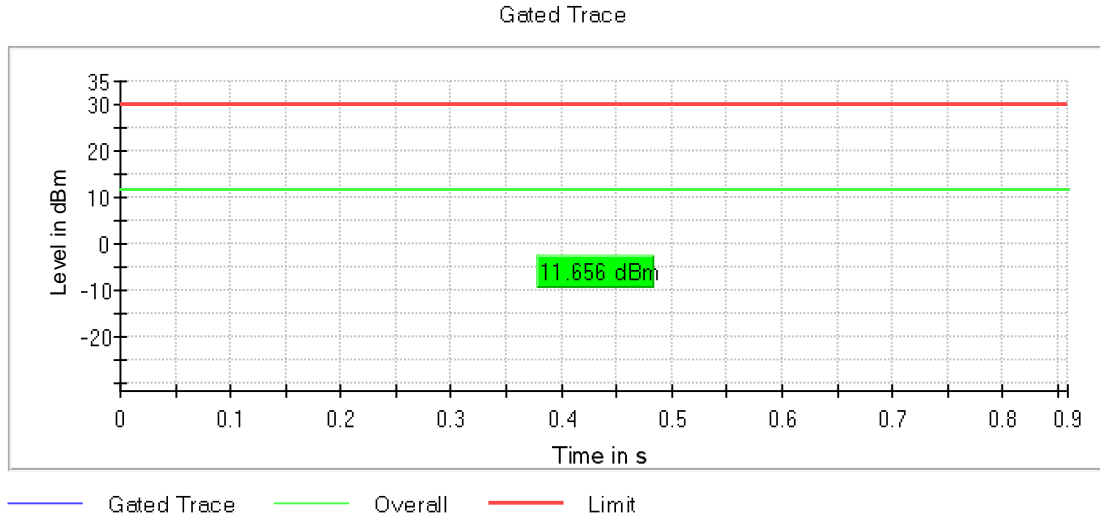

Tables:

Spectrum Analyzer Parameters

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s

Antenna gain: -2.8 dBi

Mode: MIMO CCD Mode 2x2

Modulation: 802.11ac VHT80 SS1 (OFDM MCS9) non-beam forming

Results

Freq (MHz)	Avg Power (dBm)	Max EIRP (dBm)
5210.00000	13.0	10.2
5290.00000	11.3	8.5
5610.00000	12.9	10.1
5775.00000	12.6	9.8

Verdict


Pass

Attachments

Frequency MHz = 5210.00000


Modulation = 802.11ac VHT80 SS1 (OFDM MCS9)

Images:

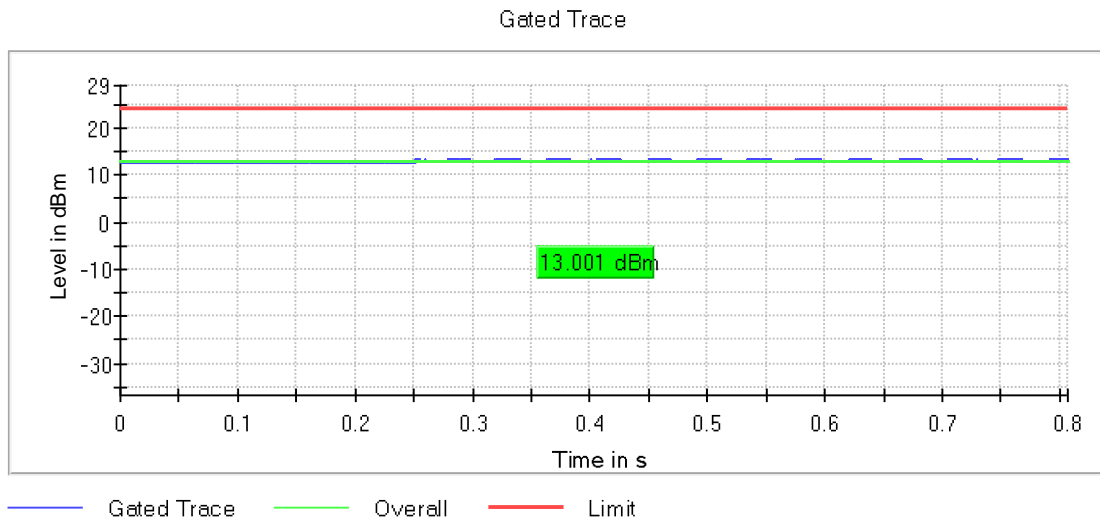


Frequency MHz = 5290.00000 Modulation = 802.11ac VHT80 SS1 (OFDM MCS9)

Images:

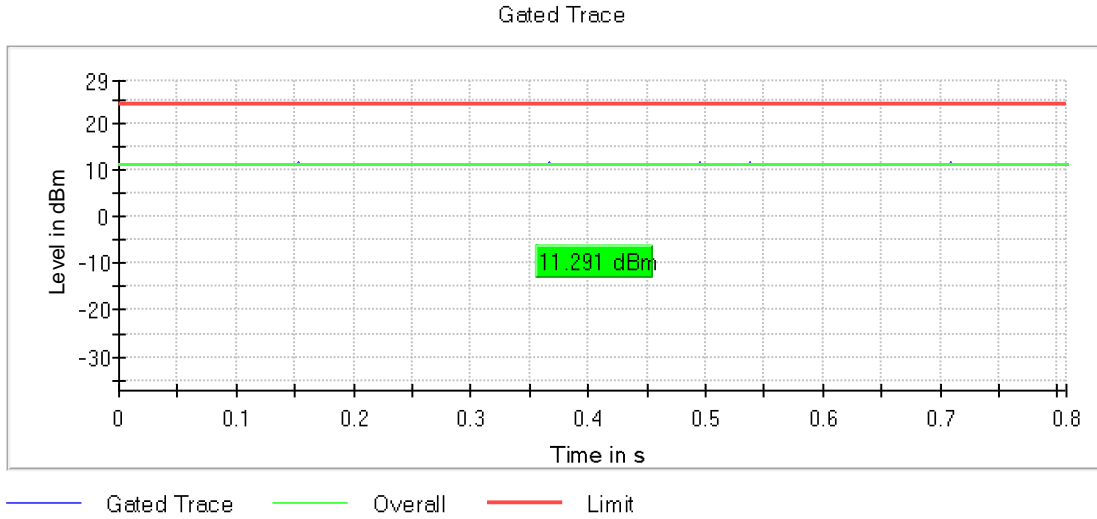


Frequency MHz = 5610.00000 Modulation = 802.11ac VHT80 SS1 (OFDM MCS9)

Images:

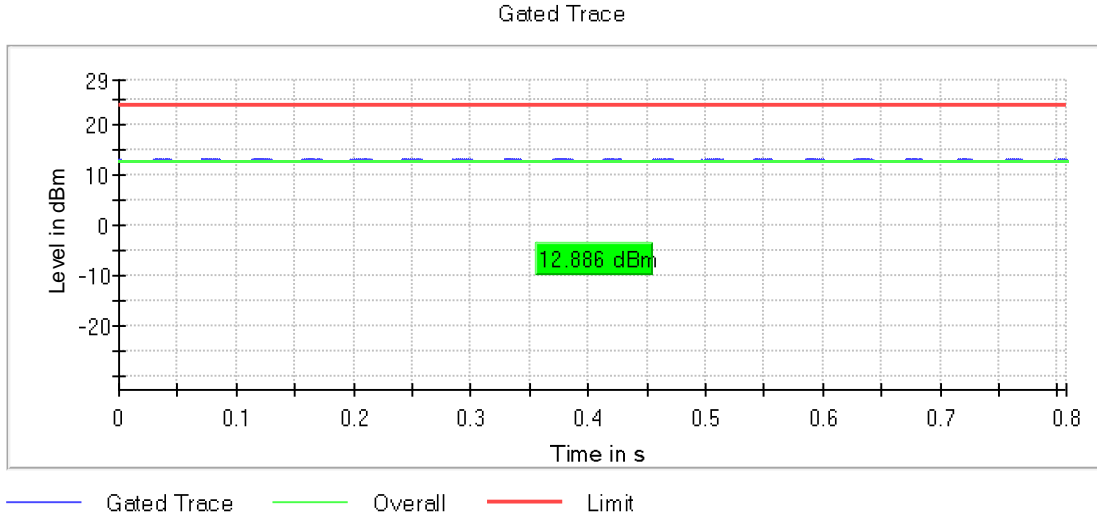

Frequency MHz = 5775.00000 Modulation = 802.11ac VHT80 SS1 (OFDM MCS9)

Images:

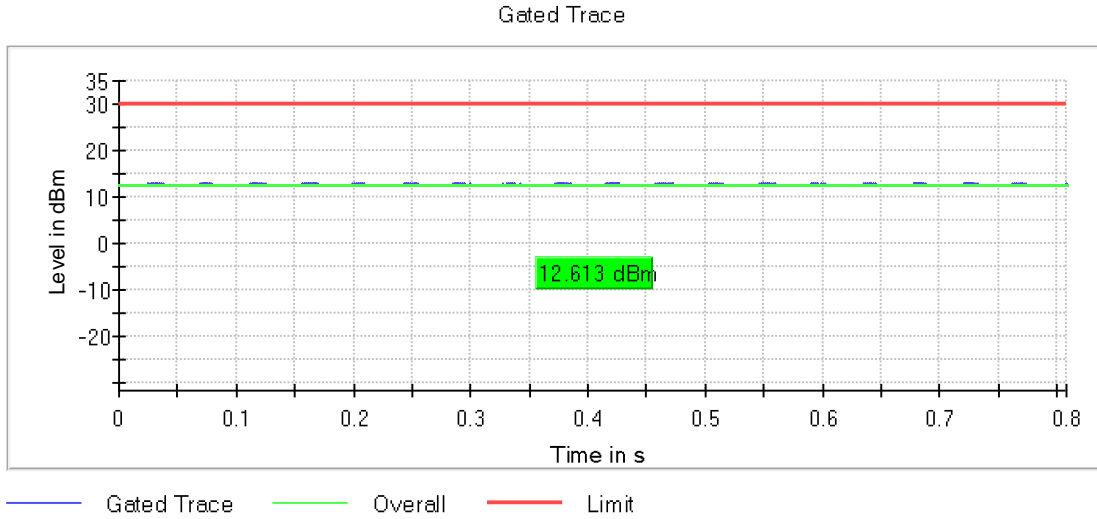

Tables:
 Spectrum Analyzer Parameters

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s

Antenna gain: -2.8 dBi

Mode: MIMO CCD Mode 2x2

Modulation: 802.11ax HE20 SS1 (OFDMA MCS8) - Full RU

Results

Freq (MHz)	Avg Power (dBm)	Max EIRP (dBm)
5240.00000	11.2	8.4
5260.00000	10.7	7.9
5580.00000	11.8	9.0
5785.00000	10.1	7.3


Verdict

Pass

Attachments


Frequency MHz = 5240.00000 Modulation = 802.11ax HE20 SS1 (OFDMA MCS8)

Images:

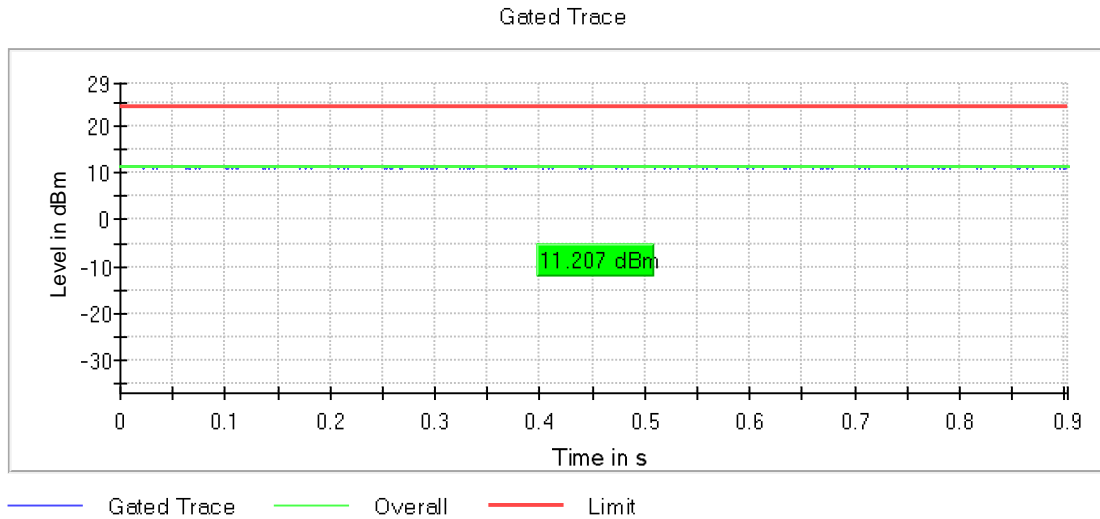


Frequency MHz = 5260.00000 Modulation = 802.11ax HE20 SS1 (OFDMA MCS8)

Images:

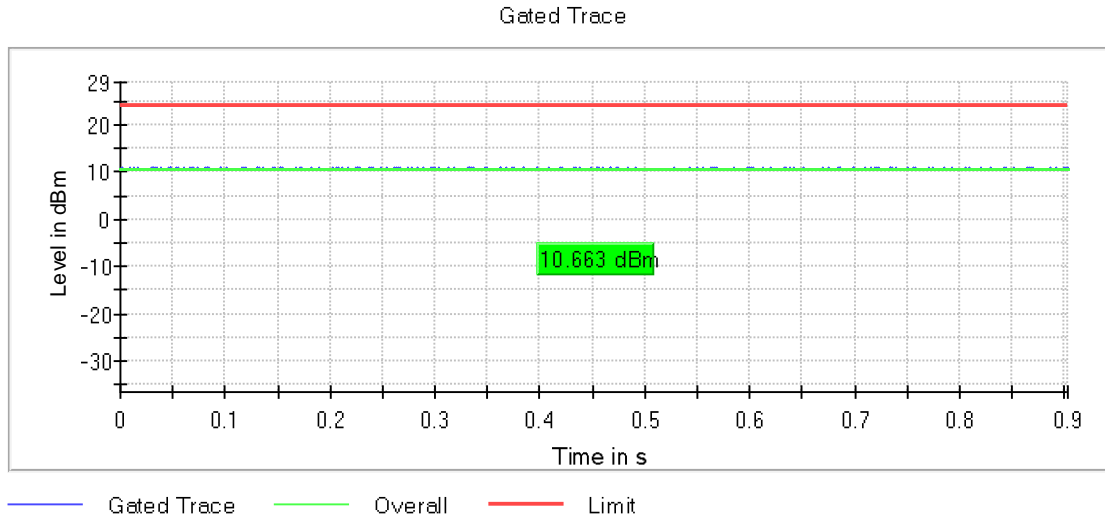


Frequency MHz = 5580.00000 Modulation = 802.11ax HE20 SS1 (OFDMA MCS8)

Images:

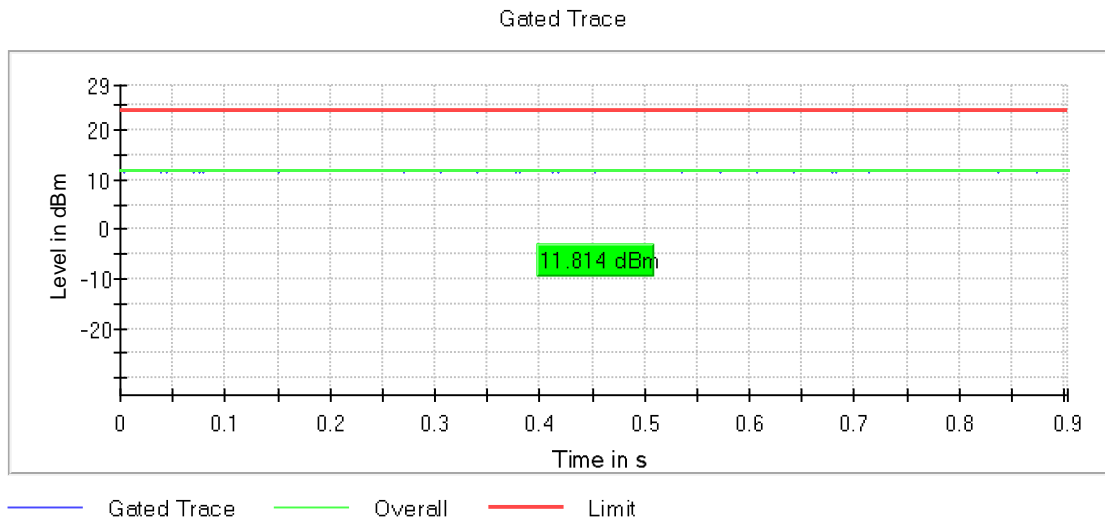

Frequency MHz = 5785.00000 Modulation = 802.11ax HE20 SS1 (OFDMA MCS8)

Images:

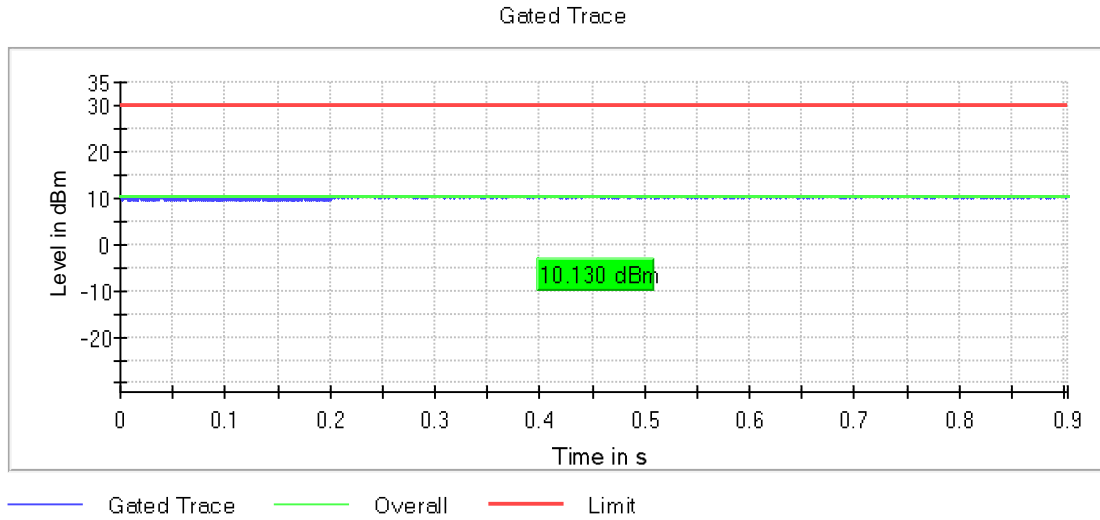

Tables:

Spectrum Analyzer Parameters

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s

Antenna gain: -2.8 dBi

Mode: MIMO CCD Mode 2x2

Modulation: 802.11ax HE40 SS1 (OFDMA MCS9) – Full RU

Results

Freq (MHz)	Avg Power (dBm)	Max EIRP (dBm)
5230.00000	10.5	7.7
5270.00000	10.0	7.2
5550.00000	9.9	7.1
5755.00000	9.9	7.1


Verdict

Pass

Attachments


Frequency MHz = 5230.00000 Modulation = 802.11ax HE40 SS1 (OFDMA MCS9)

Images:

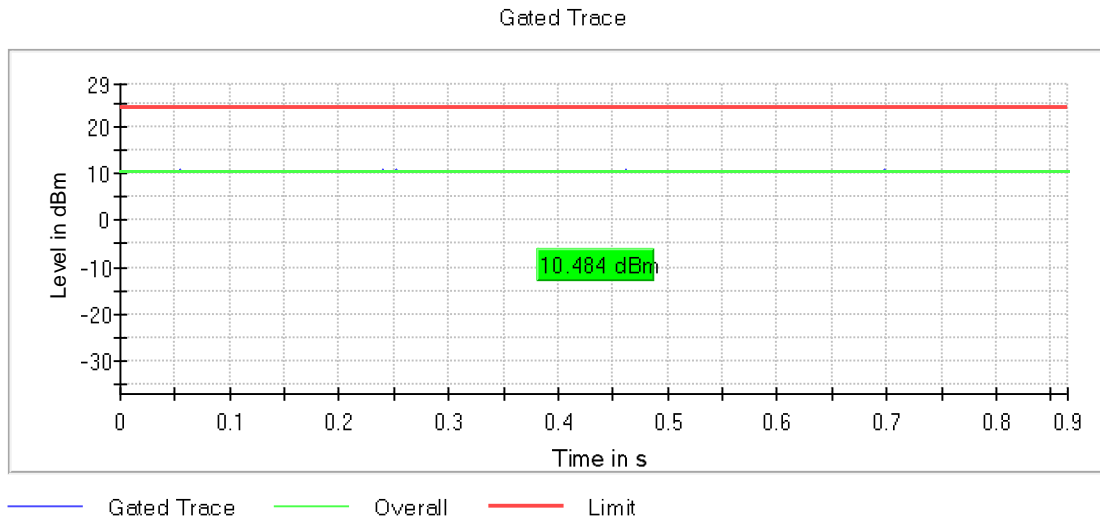


Frequency MHz = 5270.00000 Modulation = 802.11ax HE40 SS1 (OFDMA MCS9)

Images:

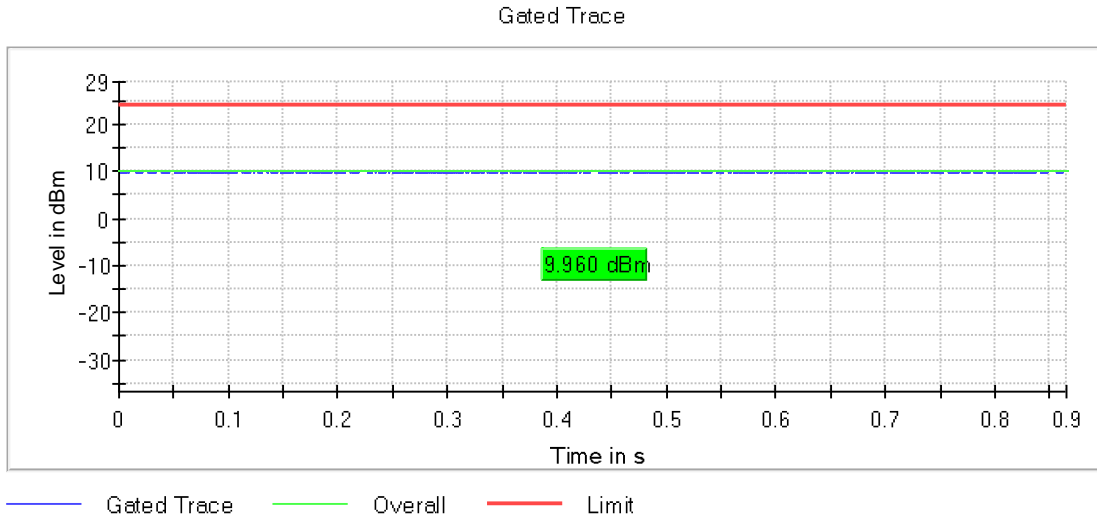


Frequency MHz = 5550.00000 Modulation = 802.11ax HE40 SS1 (OFDMA MCS9)

Images:

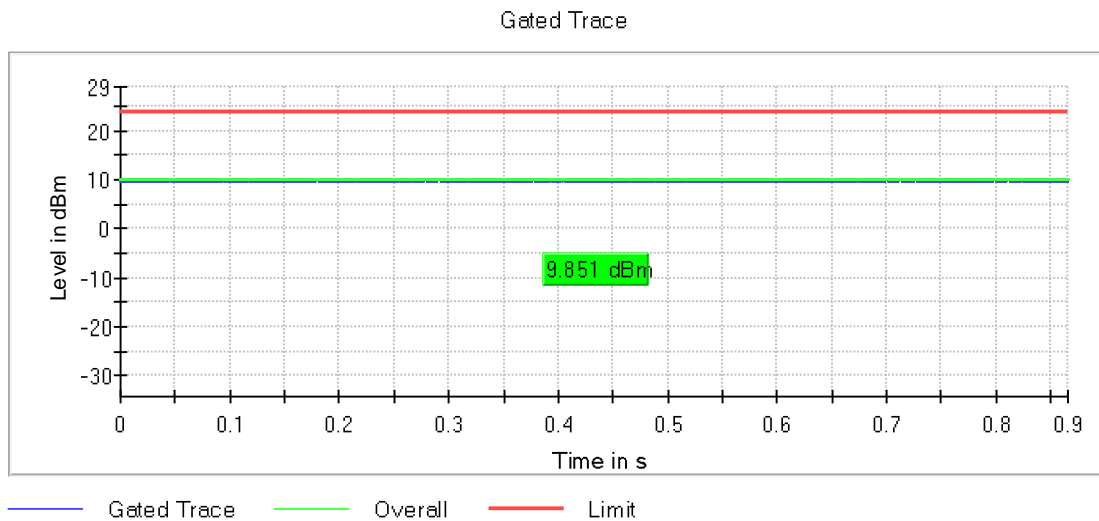

Frequency MHz = 5755.00000 Modulation = 802.11ax HE40 SS1 (OFDMA MCS9)

Images:

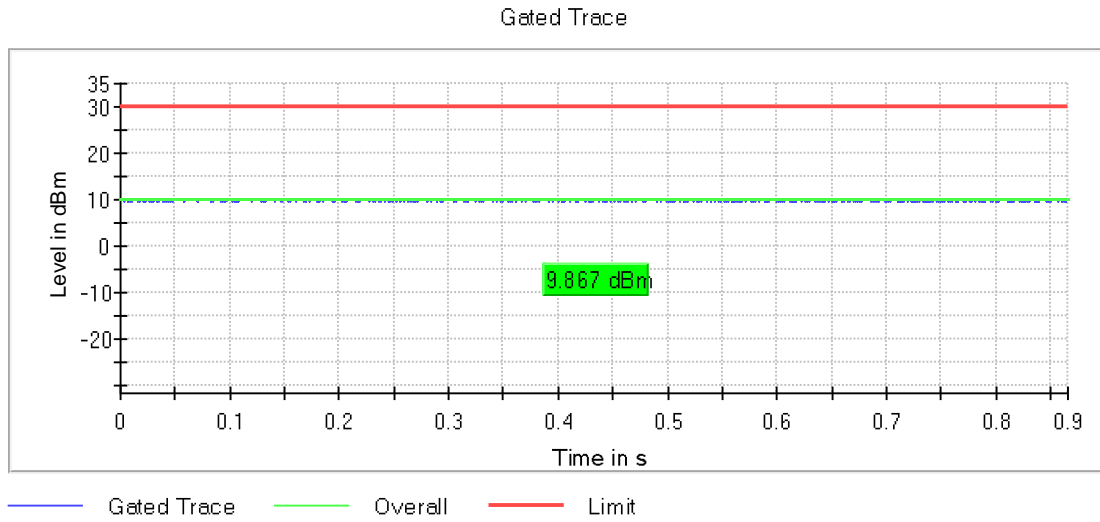

Tables:

Spectrum Analyzer Parameters

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s

Antenna gain: -2.8 dBi

Mode: MIMO CCD Mode 2x2

Modulation: 802.11ax HE80 SS1 (OFDMA MCS11) – Full RU

Results

Freq (MHz)	Avg Power (dBm)	Max EIRP (dBm)
5210.00000	9.2	6.4
5290.00000	7.9	5.1
5610.00000	9.2	6.4
5775.00000	7.8	5.0


Verdict

Pass

Attachments


Frequency MHz = 5210.00000 Modulation = 802.11ax HE80 SS1 (OFDMA MCS11)

Images:

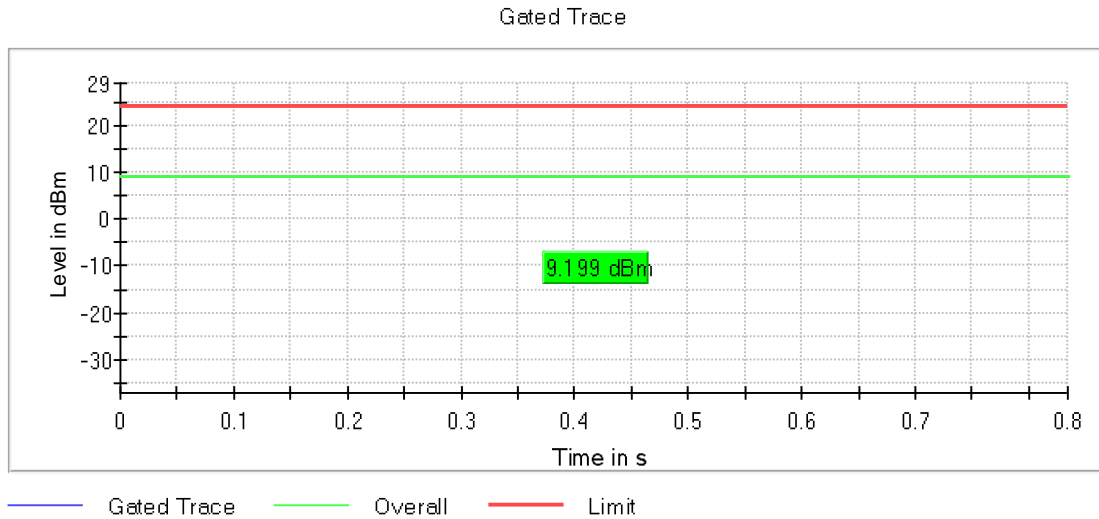


Frequency MHz = 5290.00000 Modulation = 802.11ax HE80 SS1 (OFDMA MCS11)

Images:

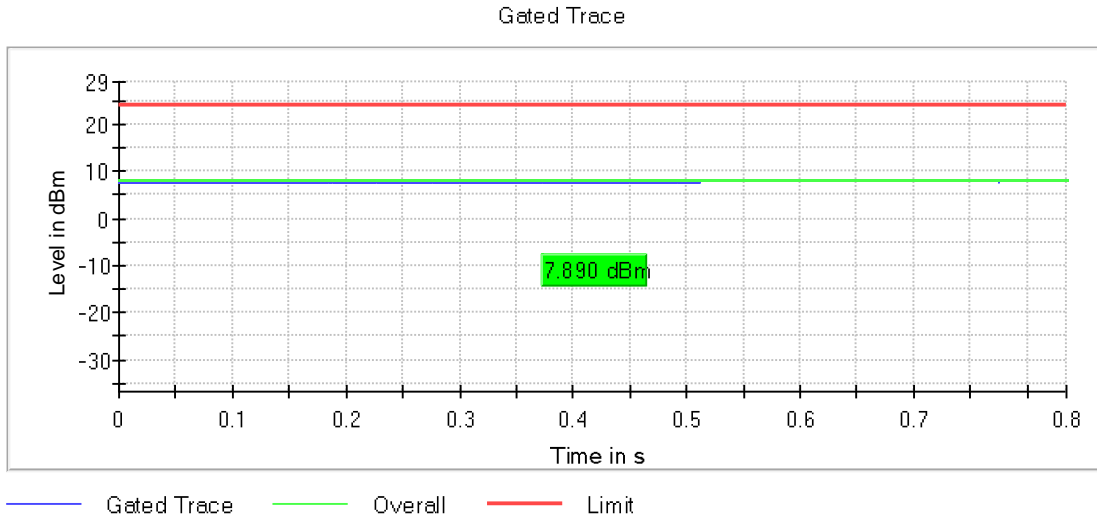


Frequency MHz = 5610.00000 Modulation = 802.11ax HE80 SS1 (OFDMA MCS11)

Images:

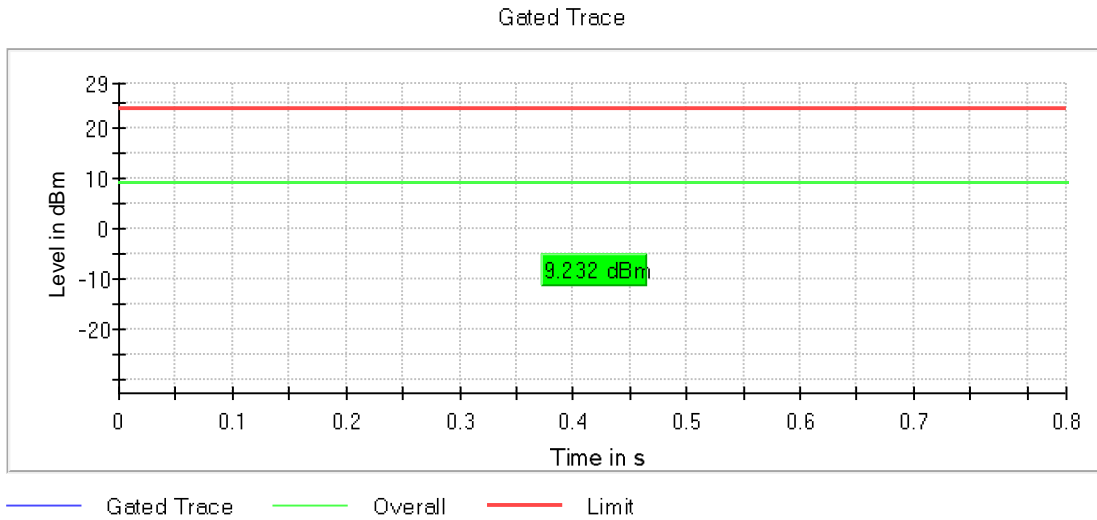

Frequency MHz = 5775.00000 Modulation = 802.11ax HE80 SS1 (OFDMA MCS11)

Images:

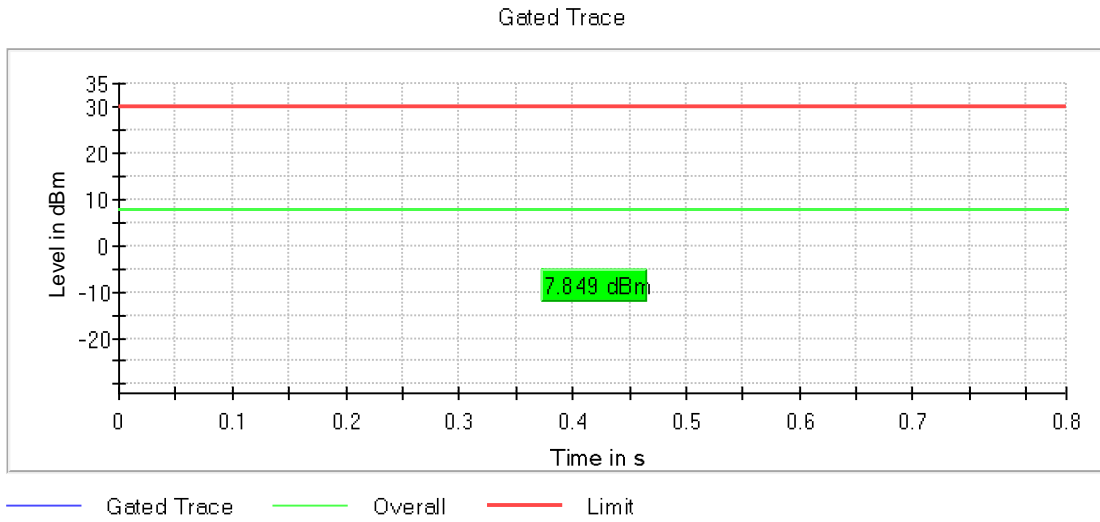

Tables:

Spectrum Analyzer Parameters

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s

FCC 2.1049 / RSS-Gen 6.7 99% Occupied Bandwidth

Limits

No requirements requested.

Mode: MIMO CCD Mode 2x2

Modulation: 802.11a (OFDM 54 Mbit/s)

Results

Freq (MHz)	Occ Ch BW (MHz)
5180.00000	16.500

Verdict

Pass

Attachments


Frequency MHz = 5180.00000


Modulation = 802.11a (OFDM 54 Mbit/s)

Mode = MIMO CCD Mode 2x2

Number of Transmission Chains = 2

Images:

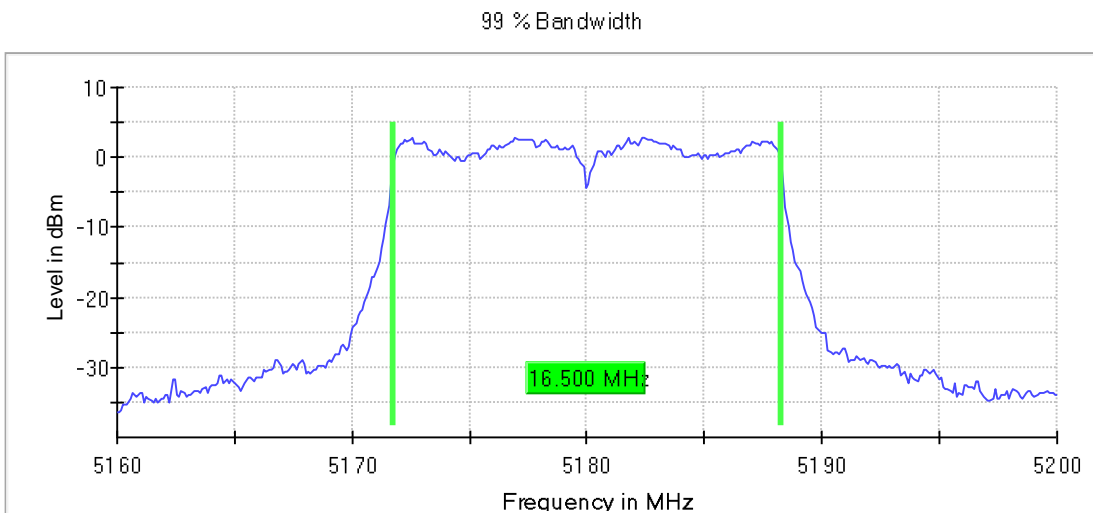

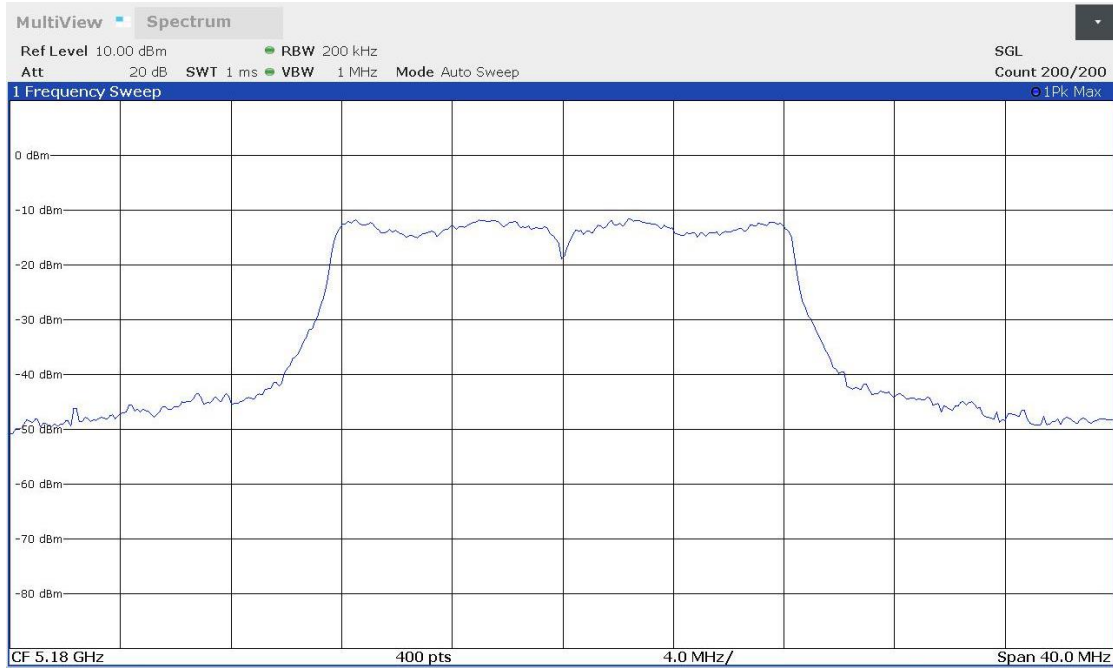

Mode: MIMO CCD Mode 2x2

Modulation: 802.11n HT20 (OFDM MCS7)

Results

Freq (MHz)	Occ Ch BW (MHz)
5180.00000	17.700



Verdict

Pass

Attachments

Frequency MHz = 5180.00000 Modulation = 802.11n HT20 (OFDM MCS7)
Mode = MIMO CCD Mode 2x2 Number of Transmission Chains = 2

Images:

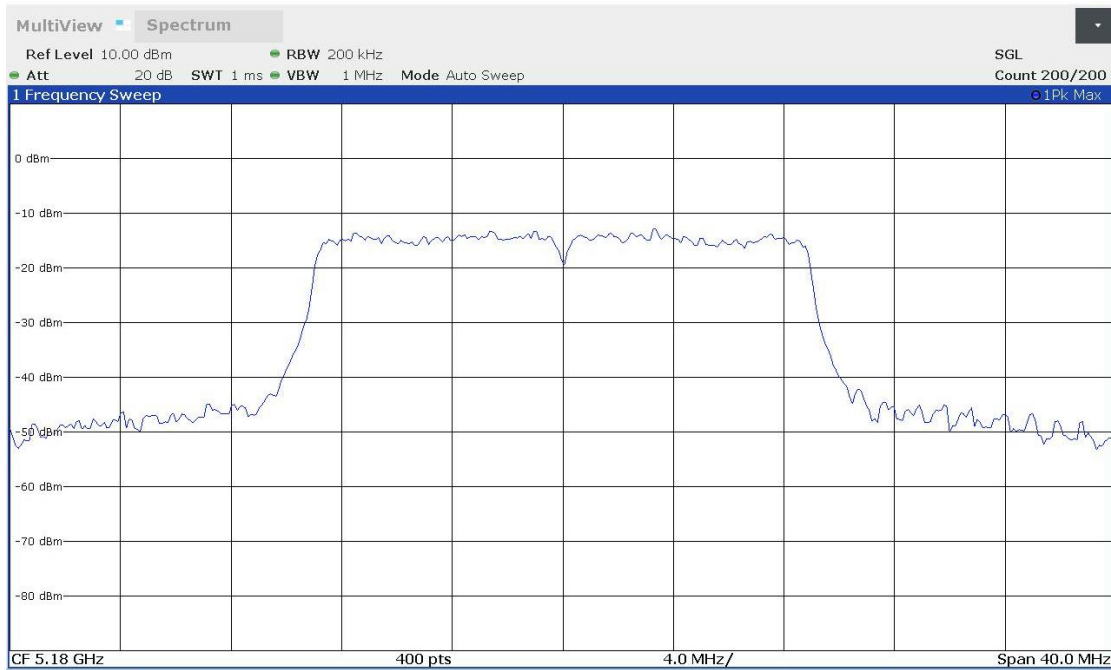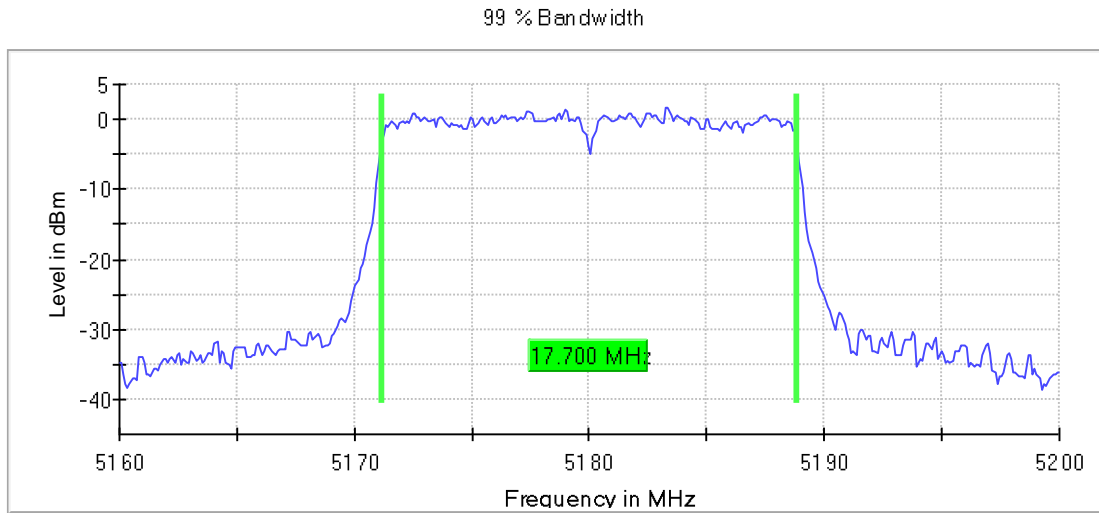

Mode: MIMO CCD Mode 2x2

Modulation: 802.11n HT40 (OFDM MCS7)

Results

Freq (MHz)	Occ Ch BW (MHz)
5190.00000	36.250

Verdict

Pass

Attachments


Frequency MHz = 5270.00000


Modulation = 802.11n HT40 (OFDM MCS7)

Mode = MIMO CCD Mode 2x2

Number of Transmission Chains = 2

Images:

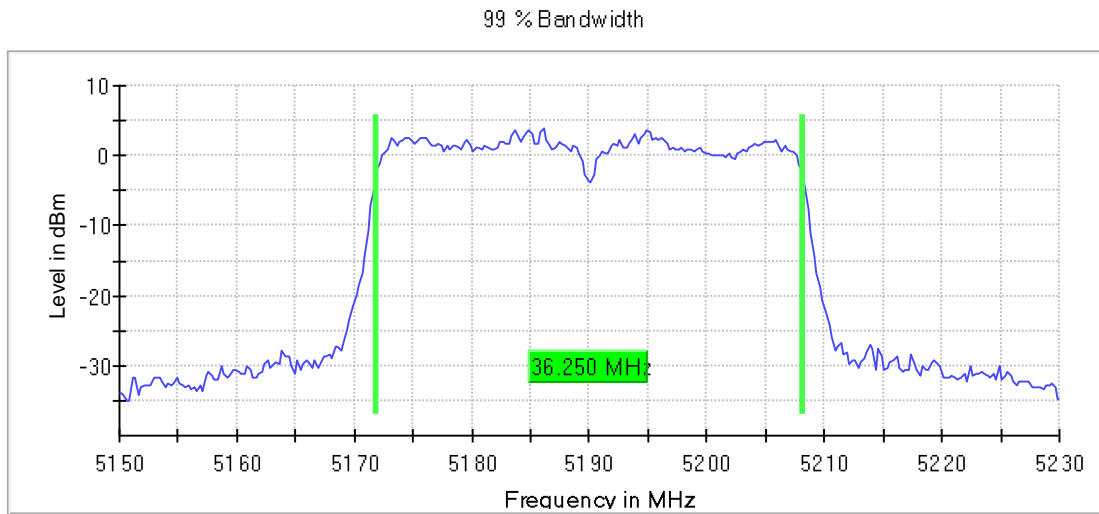

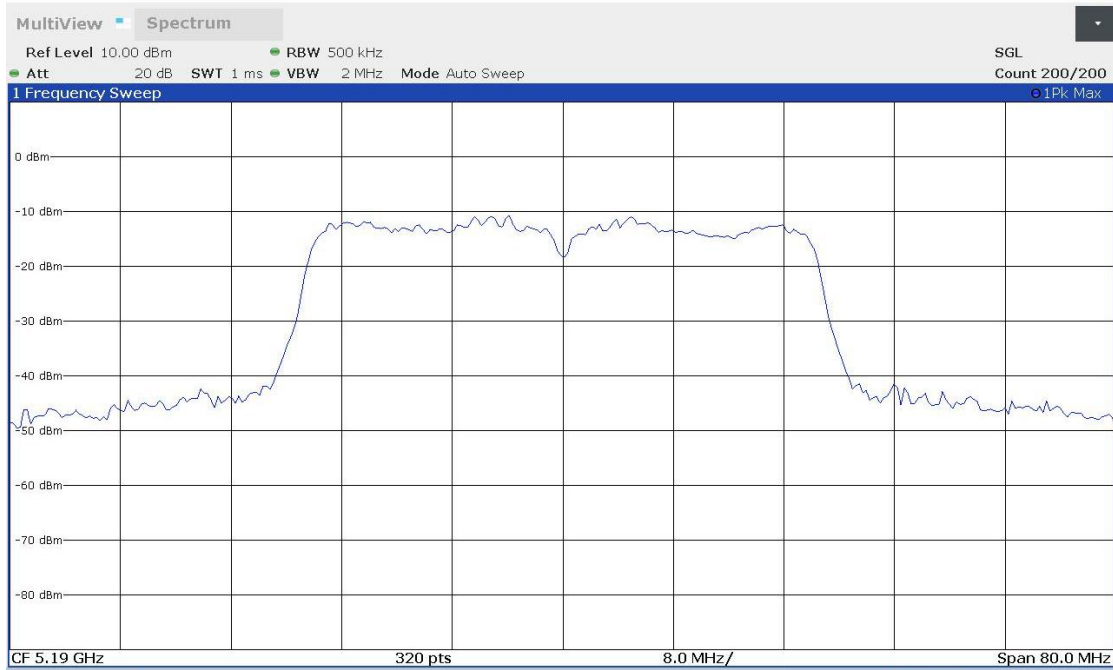

Mode: MIMO CCD Mode 2x2

Modulation: 802.11ac VHT20 SS1 (OFDM MCS8) non-beam forming

Results

Freq (MHz)	Occ Ch BW (MHz)
5180.00000	17.700



Verdict

Pass

Attachments

Frequency MHz = 5260.00000 Modulation = 802.11ac VHT20 SS1 (OFDM MCS8)
Mode = MIMO CCD Mode 2x2 Number of Transmission Chains = 2

Images:

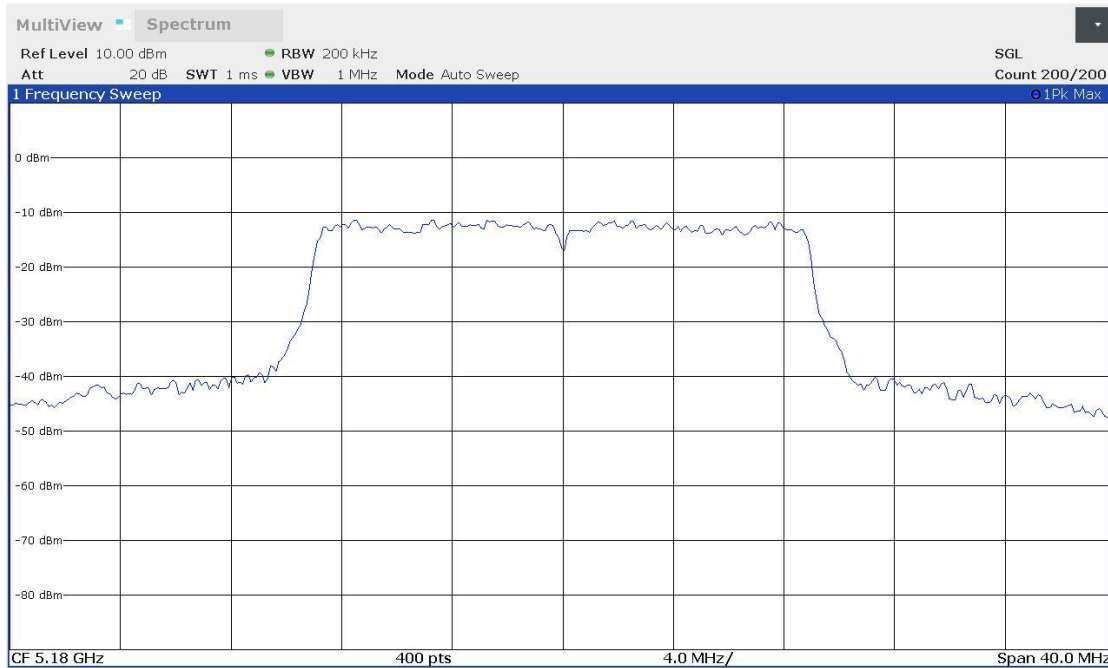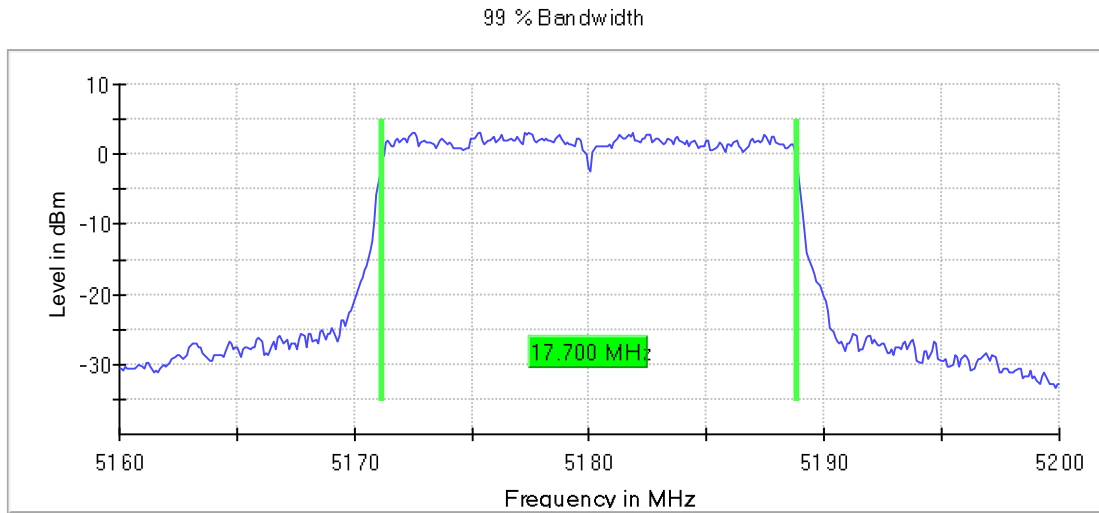

Mode: MIMO CCD Mode 2x2

Modulation: 802.11ac VHT40 SS1 (OFDM MCS9) non-beam forming

Results

Freq (MHz)	Occ Ch BW (MHz)
5190.00000	36.250

Verdict

Pass

Attachments


Frequency MHz = 5190.00000


Modulation = 802.11ac VHT40 SS1 (OFDM MCS9)

Mode = MIMO CCD Mode 2x2

Number of Transmission Chains = 2

Images:

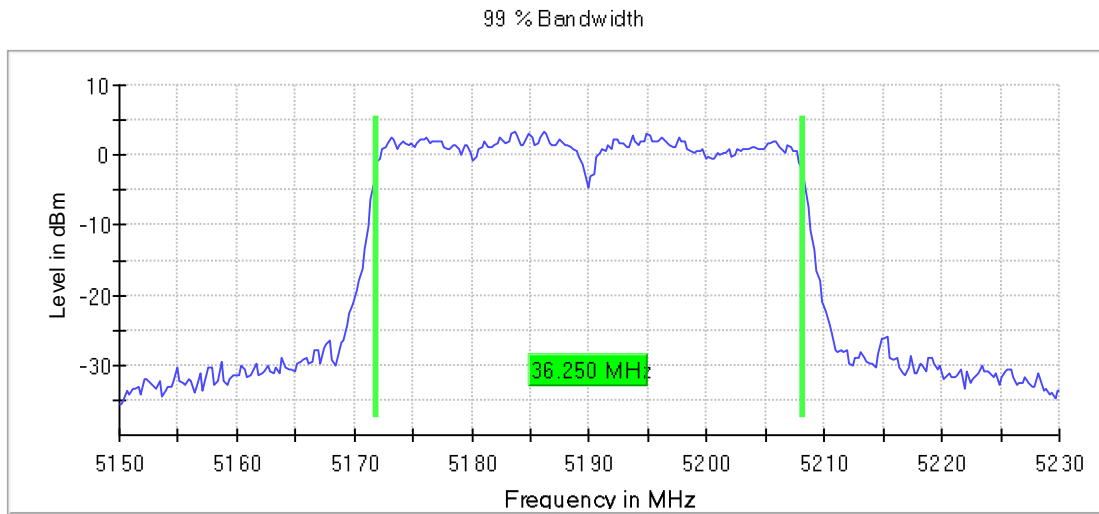

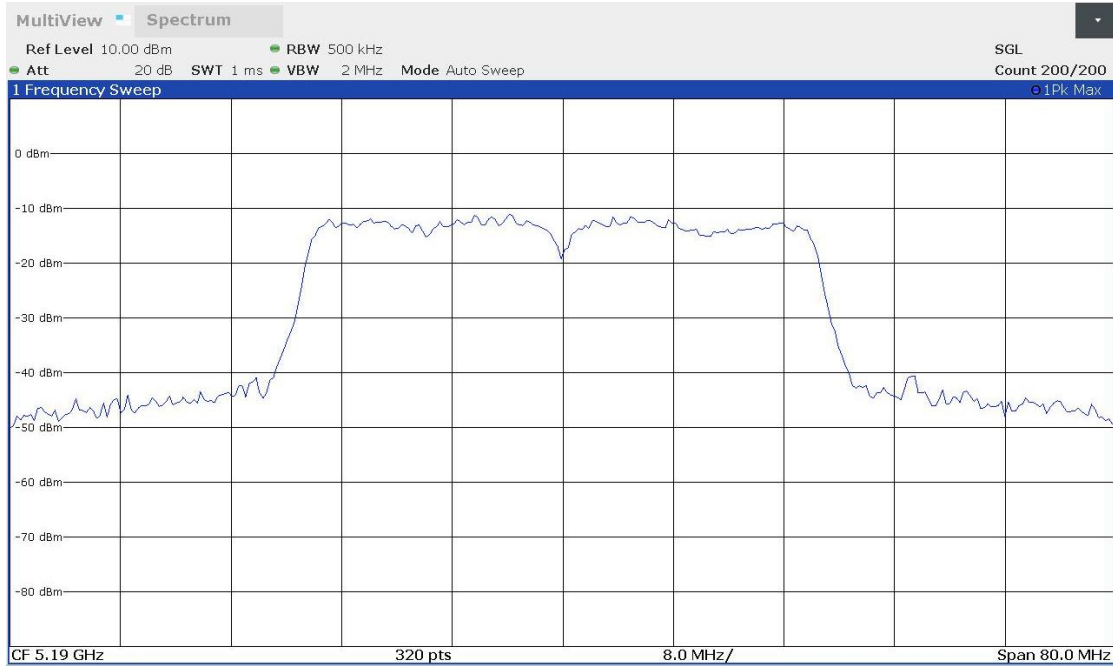

Mode: MIMO CCD Mode 2x2

Modulation: 802.11ac VHT80 SS1 (OFDM MCS9) non-beam forming

Results

Freq (MHz)	Occ Ch BW (MHz)
5210.00000	76.500



Verdict

Pass

Attachments

Frequency MHz = 5210.00000 Modulation = 802.11ac VHT80 SS1 (OFDM MCS9)
Mode = MIMO CCD Mode 2x2 Number of Transmission Chains = 2

Images:

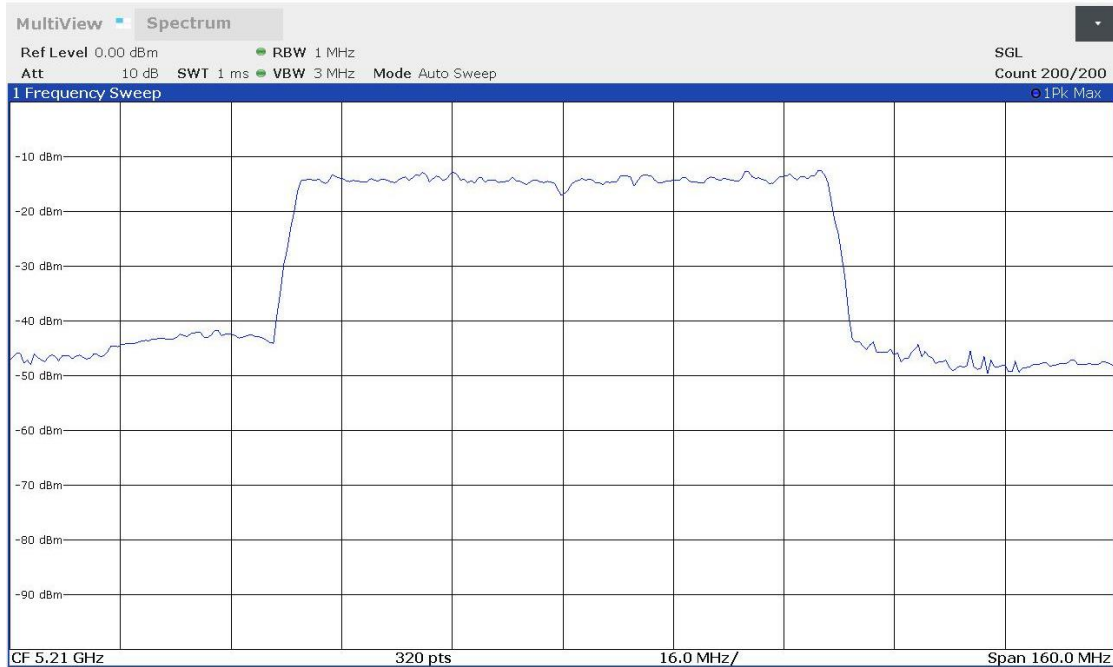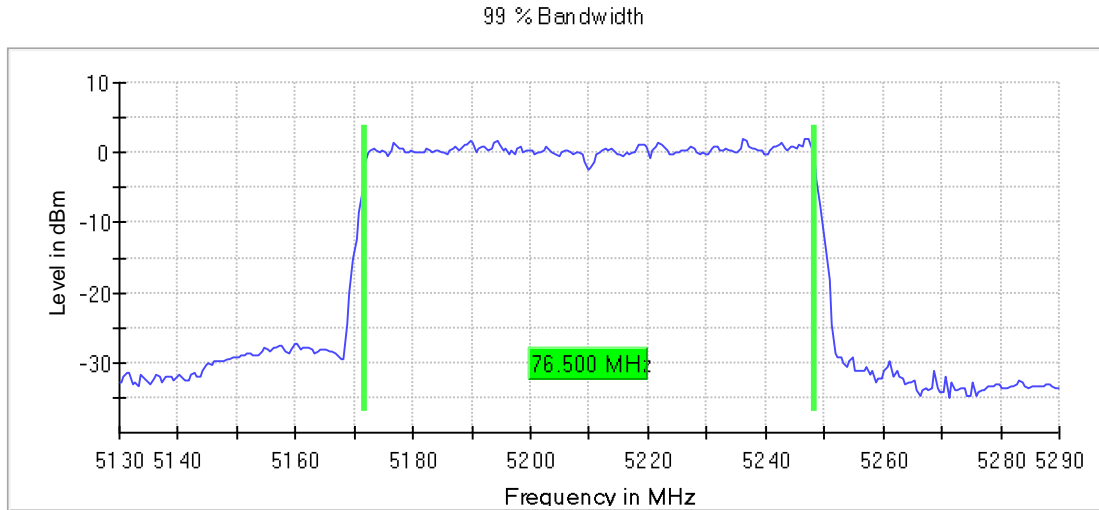

Mode: MIMO CCD Mode 2x2

Modulation: 802.11ax HE20 SS1 (OFDMA MCS8) - Partial RU

Results

Freq (MHz)	Occ Ch BW (MHz)
5180.00000	18.100


Verdict


Pass

Attachments

Frequency MHz = 5180.00000 Modulation = 802.11ax HE20 SS1 (OFDMA MCS8)
Mode = MIMO CCD Mode 2x2 Number of Transmission Chains = 2

Images:

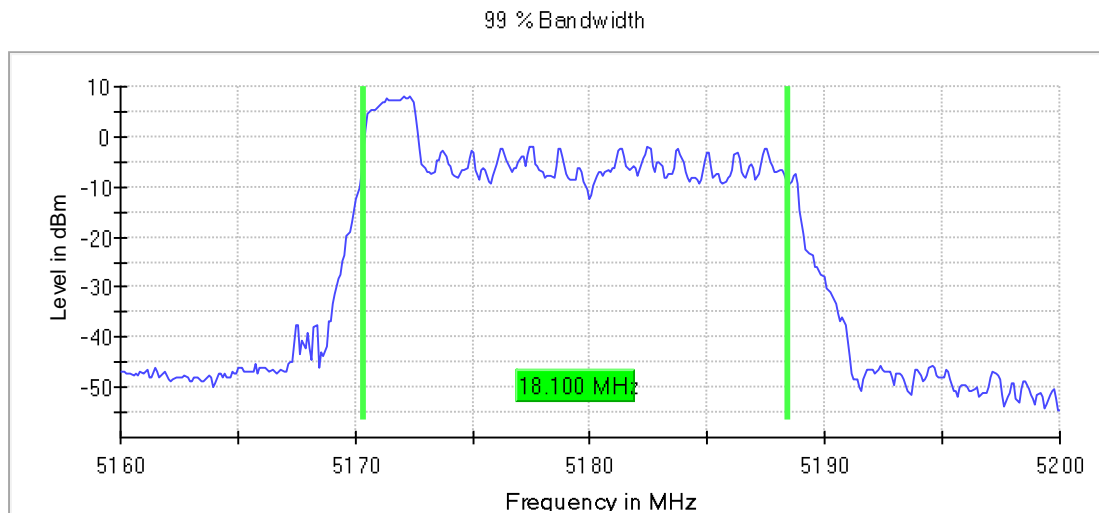

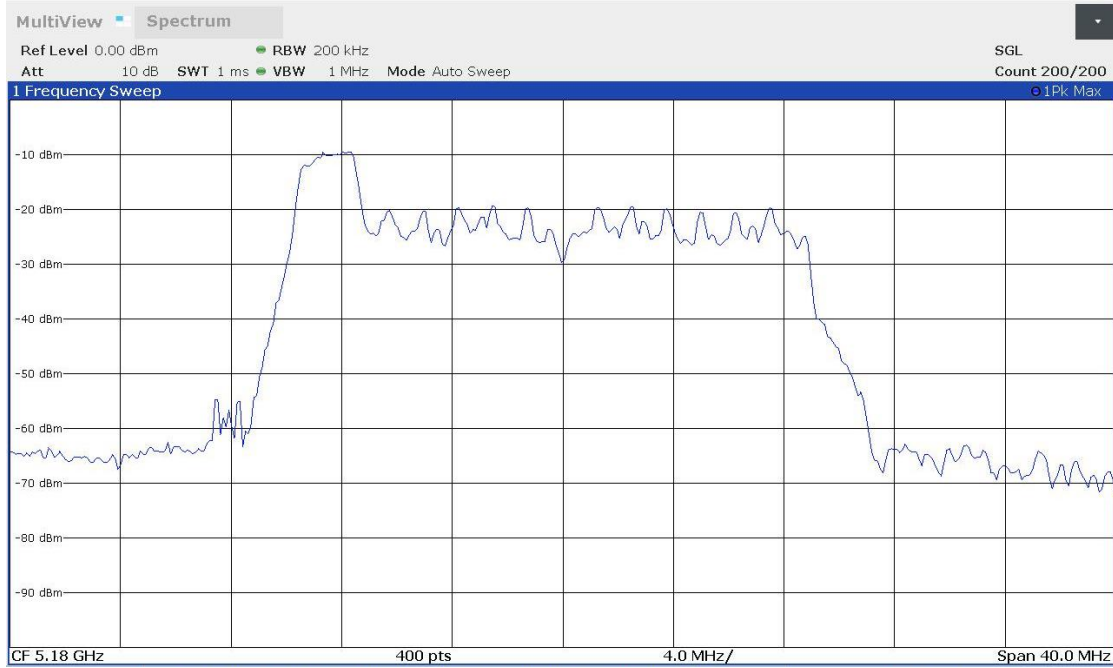

Mode: MIMO CCD Mode 2x2

Modulation: 802.11ax HE40 SS1 (OFDMA MCS9) – Full RU

Results

Freq (MHz)	Occ Ch BW (MHz)
5190.00000	37.750



Verdict

Pass

Attachments

Frequency MHz = 5190.00000 Modulation = 802.11ax HE40 SS1 (OFDMA MCS9)
Mode = MIMO CCD Mode 2x2 Number of Transmission Chains = 2

Images:

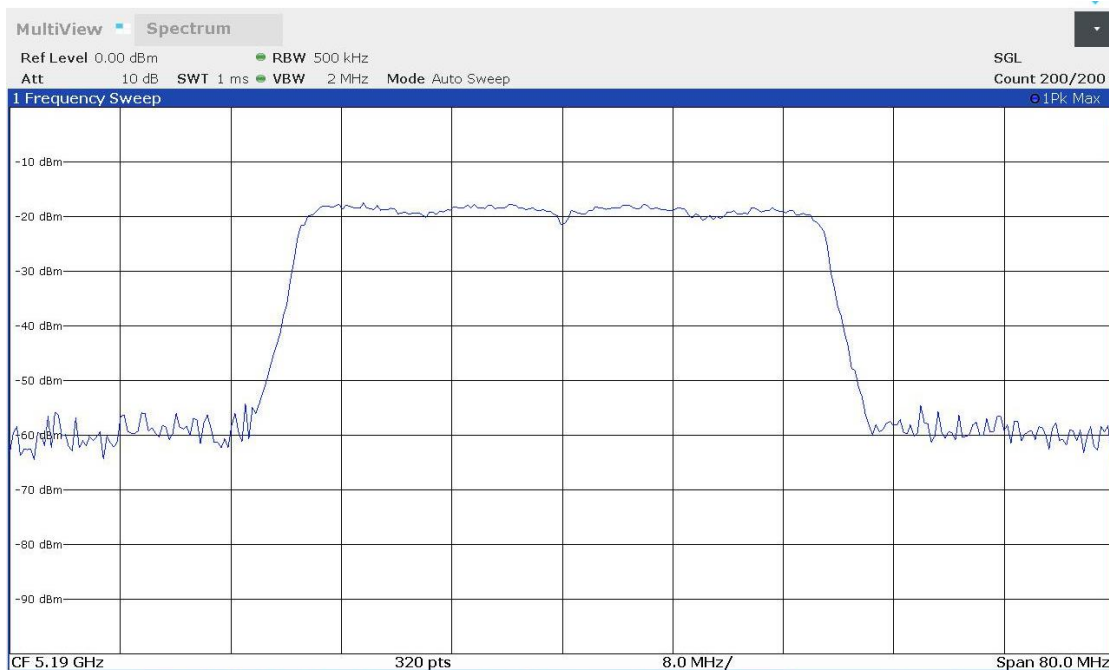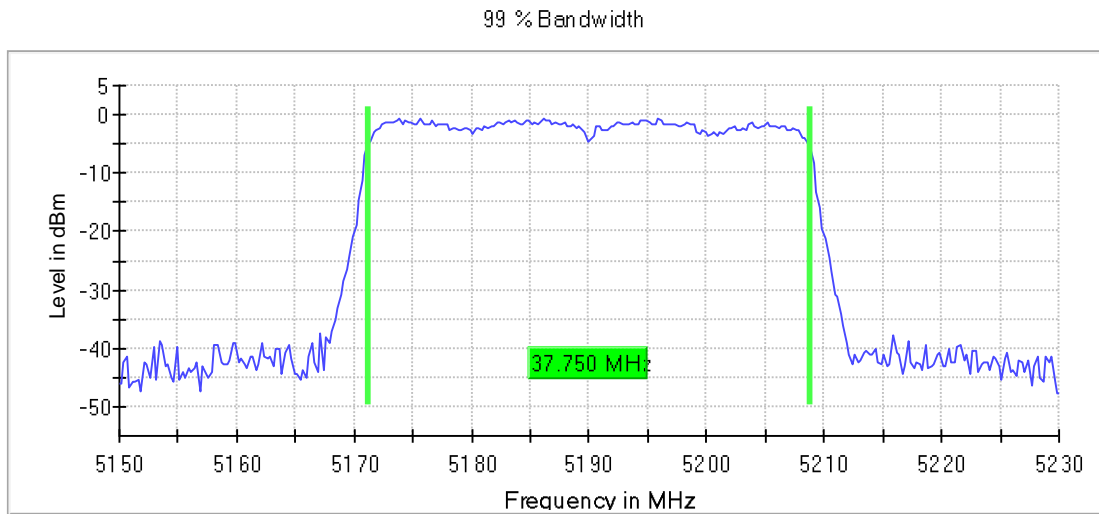

Mode: MIMO CCD Mode 2x2

Modulation: 802.11ax HE80 SS1 (OFDMA MCS11) – Full RU

Results

Freq (MHz)	Occ Ch BW (MHz)
5210.00000	78.500

Verdict


Pass


Attachments

Frequency MHz = 5210.00000 Modulation = 802.11ax HE80 SS1 (OFDMA MCS11)

Mode = MIMO CCD Mode 2x2 Number of Transmission Chains = 2

Images:

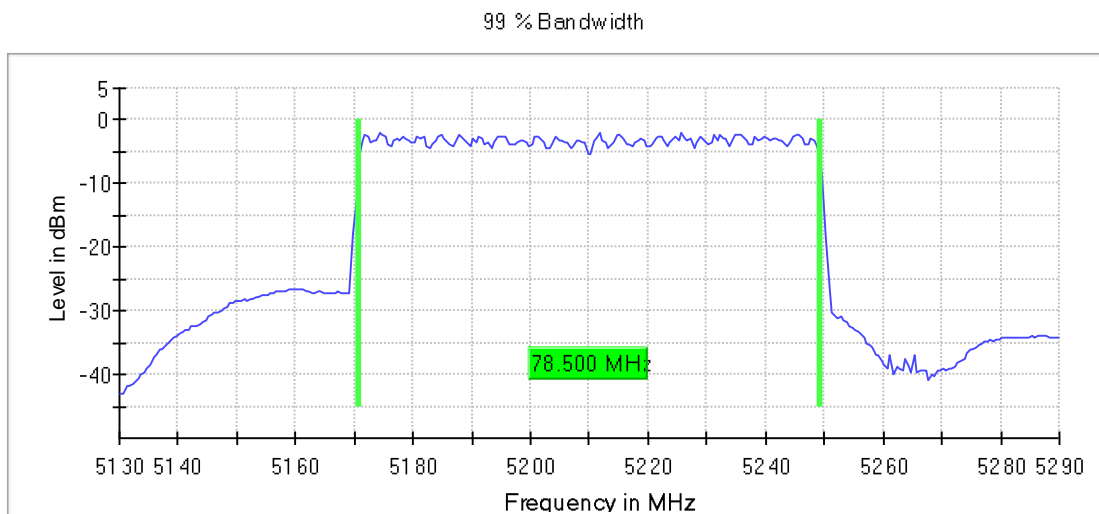

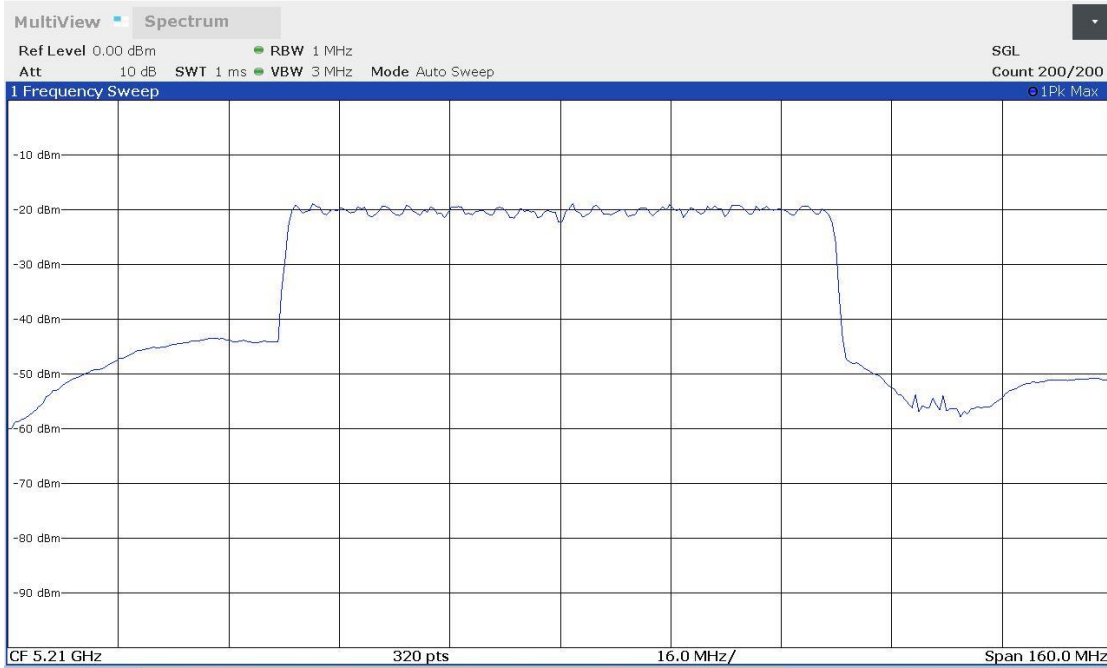

Measurements

Setting	Instrument Value	Instrument Value	Instrument Value
Start Frequency	5.16000 GHz	5.15000 GHz	5.13000 GHz
Stop Frequency	5.20000 GHz	5.23000 GHz	5.29000 GHz
Span	40.000 MHz	80.000 MHz	160.000 MHz
RBW	200.000 kHz	500.000 kHz	1.000 MHz
VBW	1.000 MHz	2.000 MHz	3.000 MHz
SweepPoints	400	320	320
Sweeptime	1.000 ms	1.000 ms	1.000 ms
Reference Level	10.000 dBm	10.000 dBm	0.000 dBm
Attenuation	20.000 dB	20.000 dB	10.000 dB
Detector	MaxPeak	MaxPeak	MaxPeak
SweepCount	200	200	200
Filter	3 dB	3 dB	3 dB
Trace Mode	Max Hold	Max Hold	Max Hold
Sweeptype	Sweep	Sweep	Sweep
Preamp	off	off	off
Stablemode	Trace	Trace	Trace
Stablevalue	0.30 dB	0.30 dB	0.30 dB
Run	52 / max. 150	71 / max. 150	65 / max. 150
Stable	5 / 5	5 / 5	5 / 5
Max Stable	0.03 dB	0.23 dB	0.01 dB

FCC 15.407 (b)(6)15.207 / RSS Gen 8.8 Emission limitations Conducted

Limits

In any 100 kHz bandwidth outside the frequency band in which the digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required shall be 30 dB instead of 20 dB.

Results

Modulation: 802.11n40

Frequency: 5190 MHz

Frequency range 0.03 - 1 GHz

No spurious signal was detected at 30 dB below the limit or above for the channel.

Frequency range 1 – 40 GHz


No spurious signal was detected at 8 dB below the limit or above for the channel.

Verdict


Pass

Frequency range 0.03 - 1 GHz

Port 1

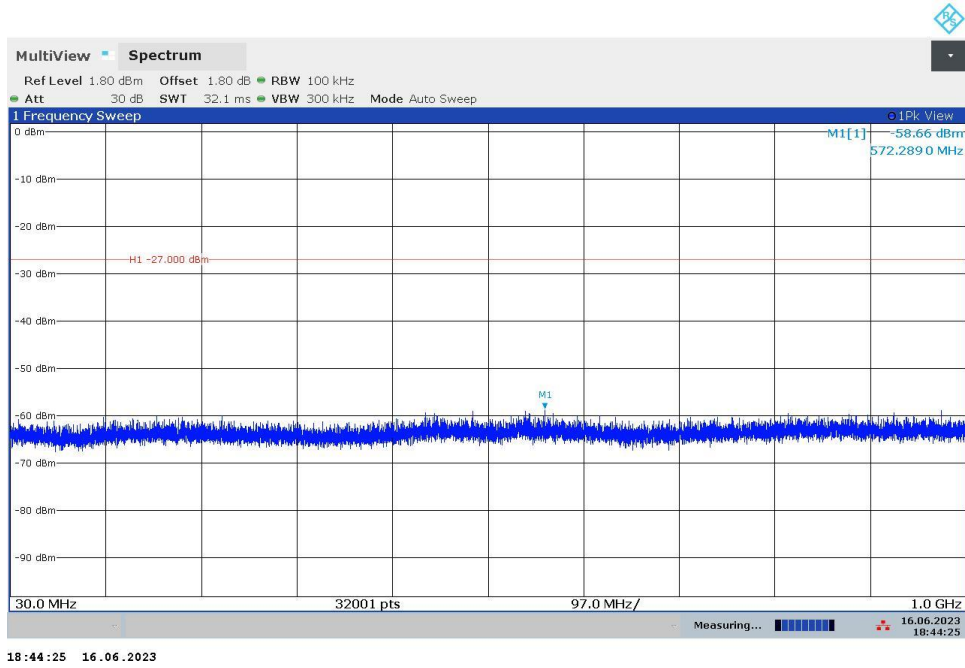


Port 4

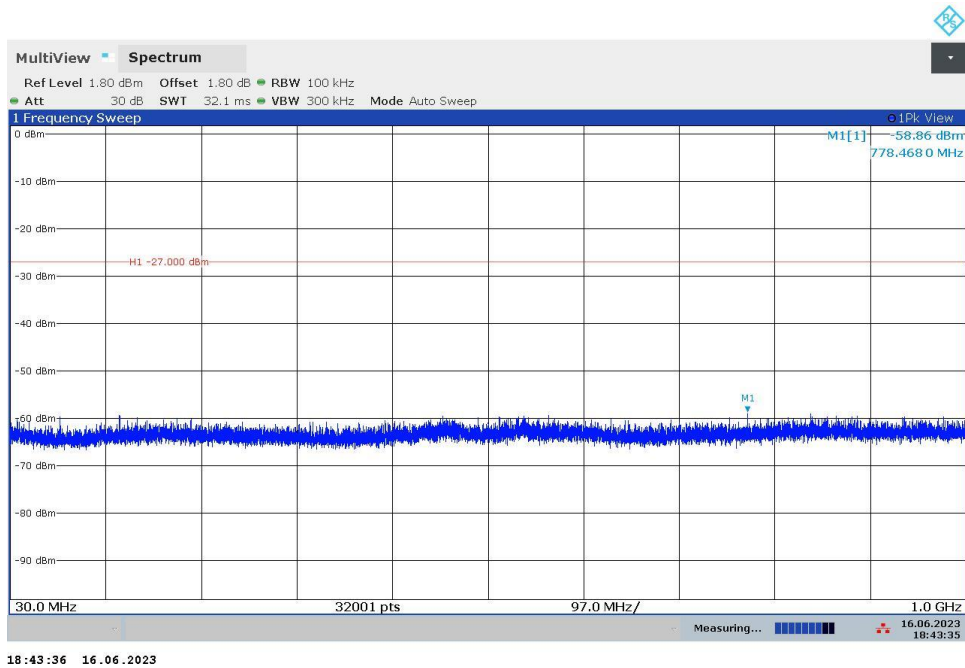


Frequency range 1 – 40 GHz

Port 1

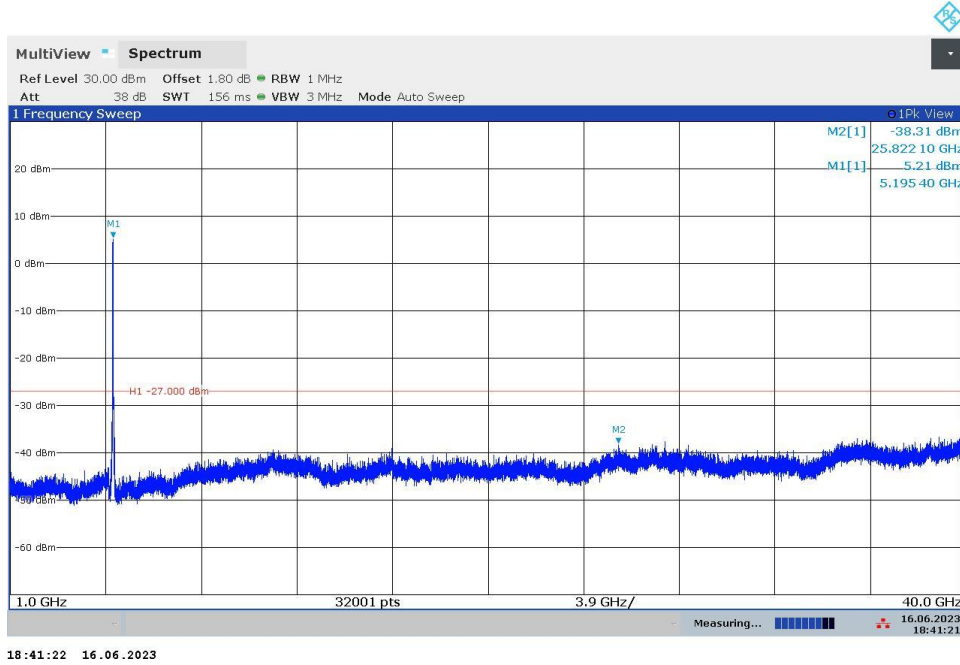

Port 4

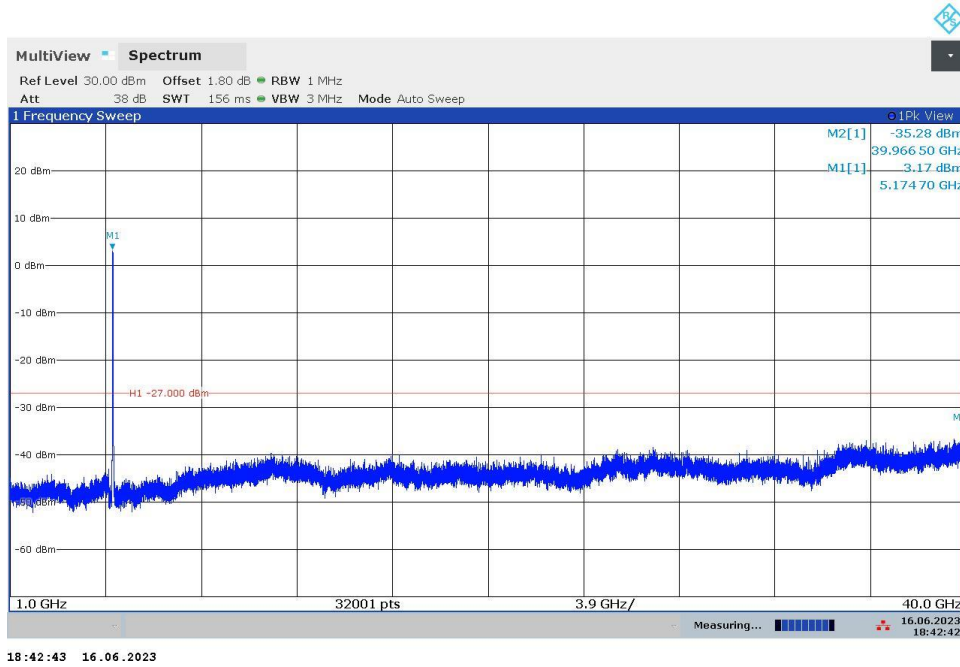

The peak above the limit is the fundamental

Results

Modulation: 802.11ac20

Frequency: 5180 MHz

Frequency range 0.03 - 1 GHz

No spurious signal was detected at 30 dB below the limit or above for the channel.

Frequency range 1 – 40 GHz


No spurious signal was detected at 8 dB below the limit or above for the channel.

Verdict


Pass

Frequency range 0.03 - 1 GHz

Port 1

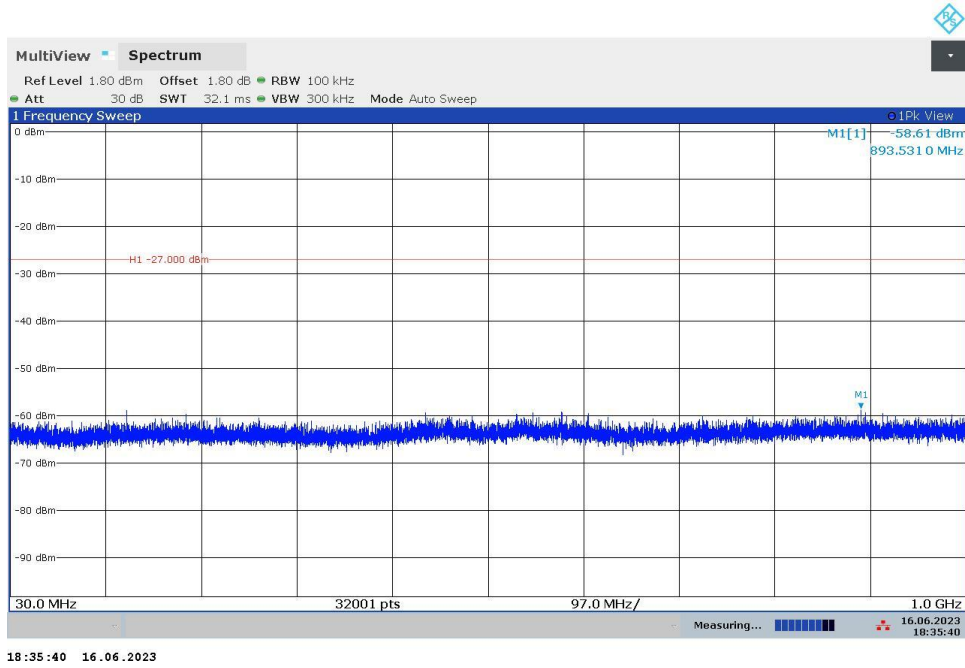


Port 4

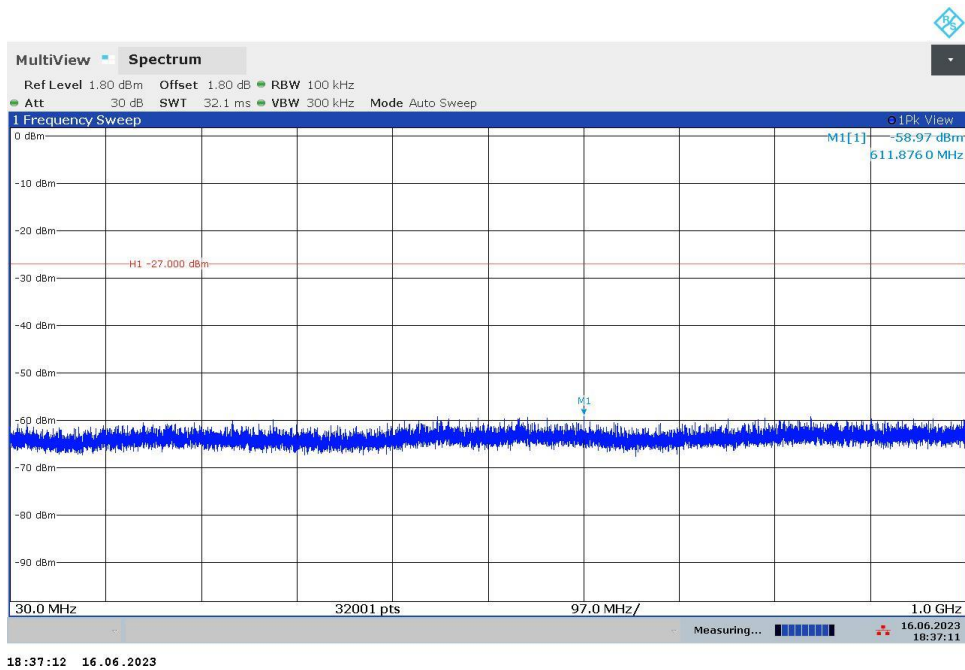


Frequency range 1 – 40 GHz

Port 1

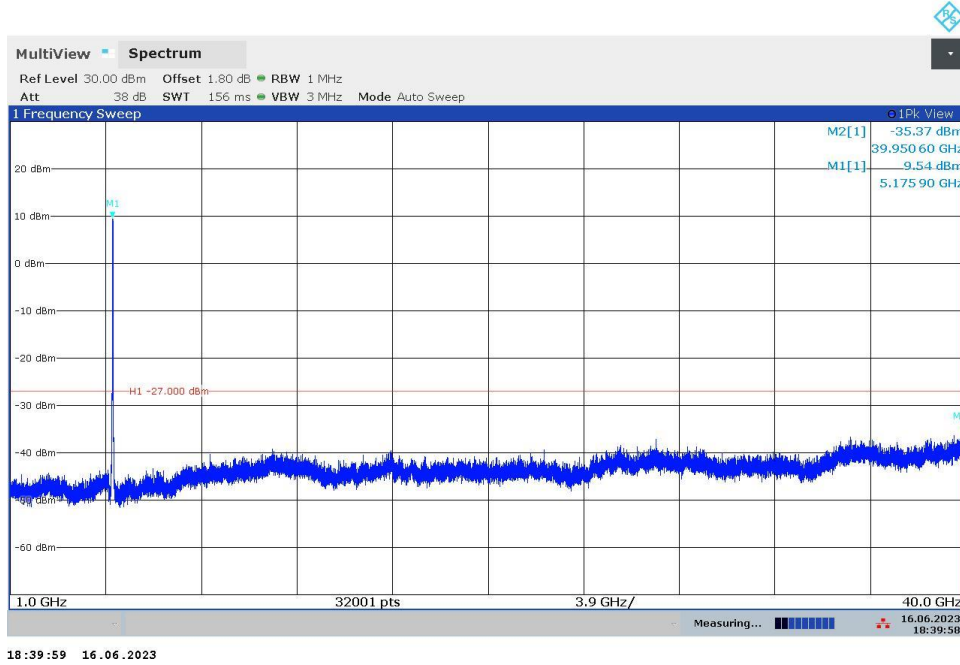

Port 4

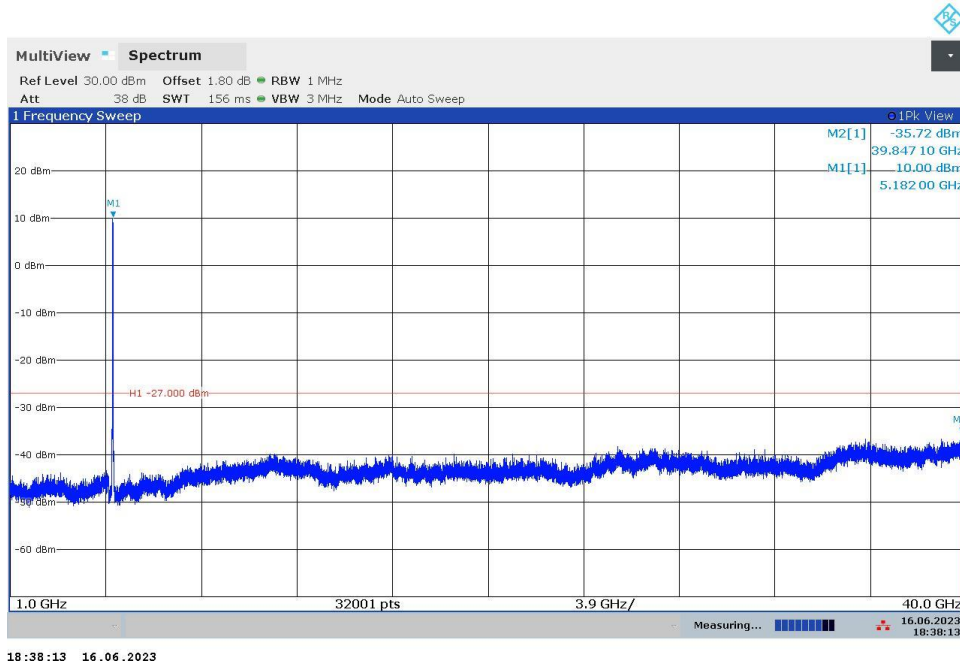

The peak above the limit is the fundamental

Results

Modulation: 802.11ac80

Frequency: 5210 MHz

Frequency range 0.03 - 1 GHz

No spurious signal was detected at 30 dB below the limit or above for the channel.

Frequency range 1 – 40 GHz


No spurious signal was detected at 7 dB below the limit or above for the channel.

Verdict


Pass

Frequency range 0.03 - 1 GHz

Port 1

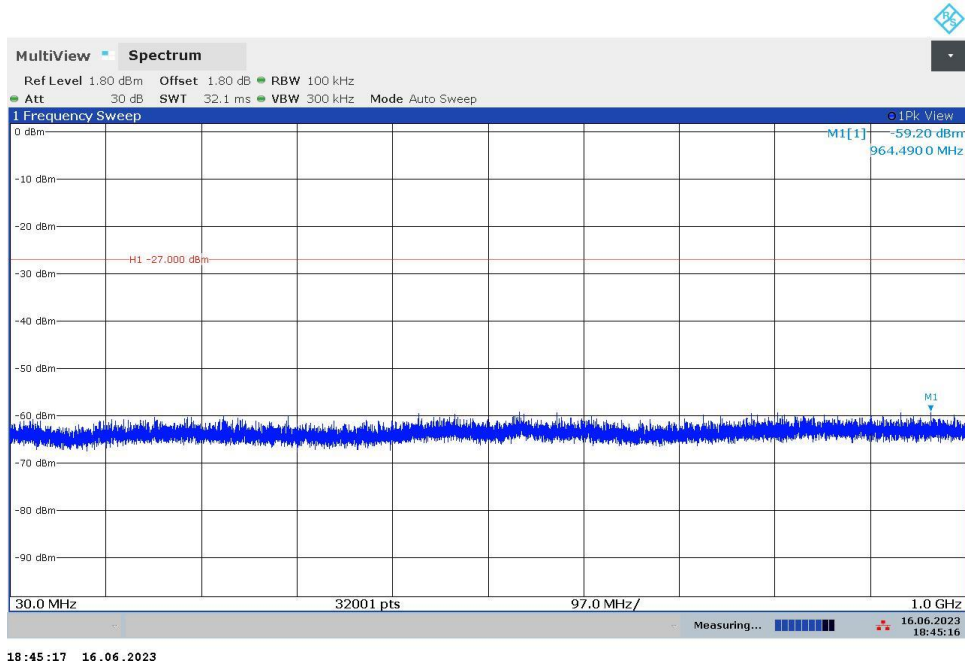


Port 4

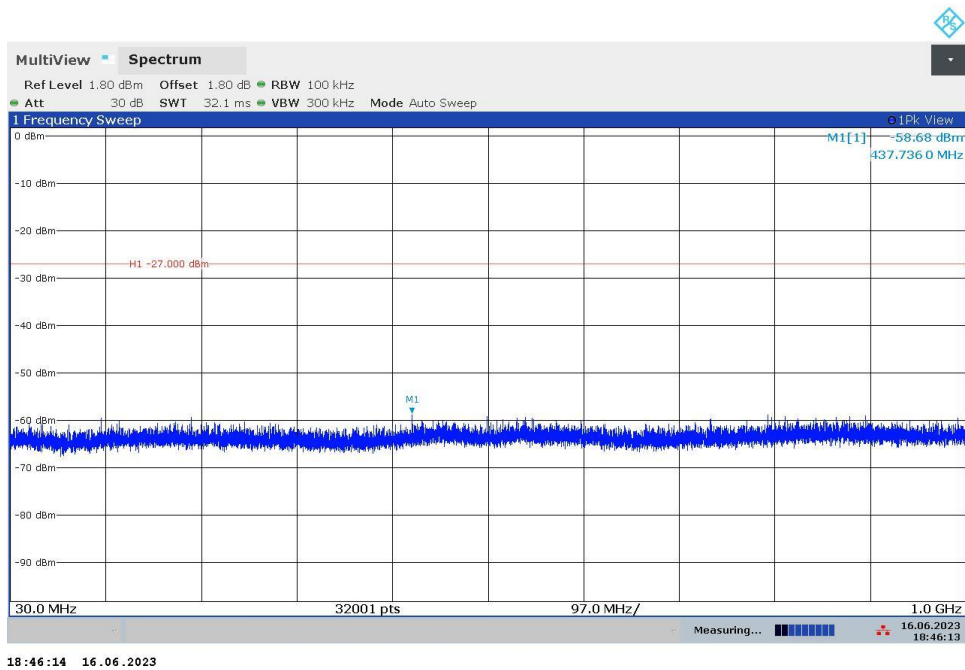


Frequency range 1 – 40 GHz

Port 1

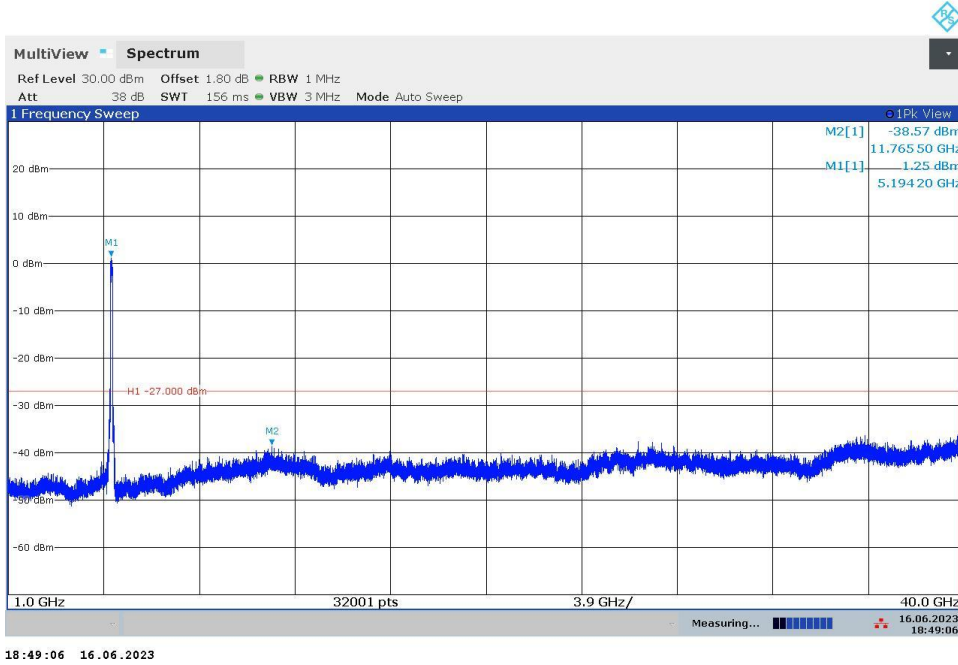

Port 4

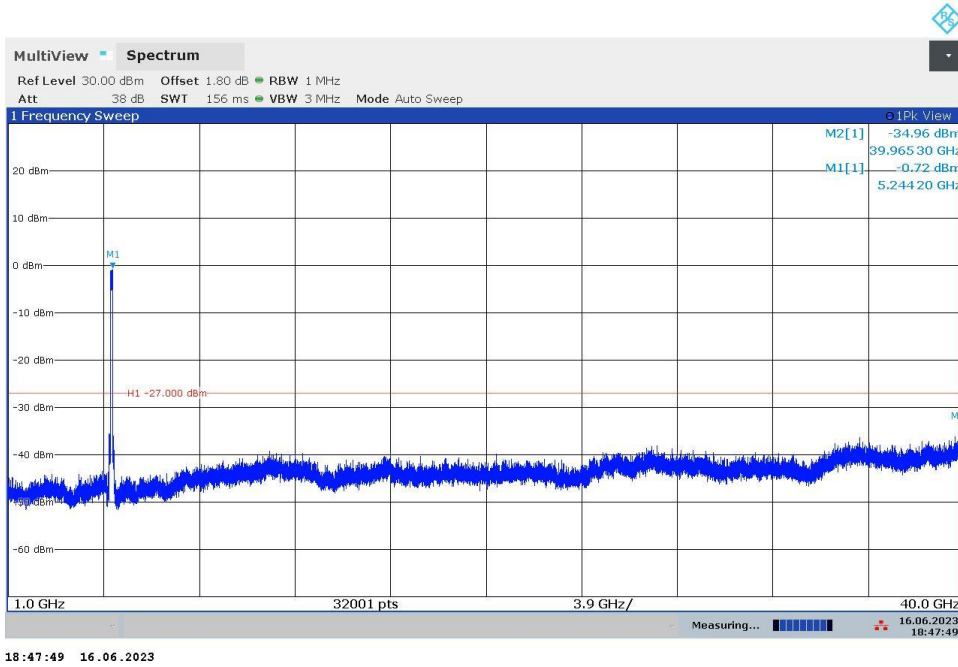

The peak above the limit is the fundamental

FCC 15.407 (b), 15.205 & 15.209 / RSS-Gen 8.9 & 8.10 Undesirable radiated emissions

Limits

Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)):

Frequency Range (MHz)	Field strength ($\mu\text{V/m}$)	Field strength ($\text{dB}\mu\text{V/m}$)	Measurement distance (m)
0.009-0.490	2400/F(kHz)	-	300
0.490-1.705	24000/F(kHz)	-	300
1.705 - 30.0	30	-	30
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
960 - 40000	500	54	3

The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

For average radiated emission measurements above 1000 MHz, there is also a limit corresponding to 20 dB above the indicated values in the table is specified when measuring with peak detector function.

Results

Frequency range 0.03 - 1 GHz

The spurious emissions below 1 GHz do not depend on the operating channel selected in the EUT.

Modulation: 802.11ac20

Results


Verdict

Pass

Lowest Channel

Active Port = 1, Frequency Range GHz = [0.03, 1], Frequency MHz = 5180.00000, Modulation = 802.11ac
 MODE = MIMO

Images:

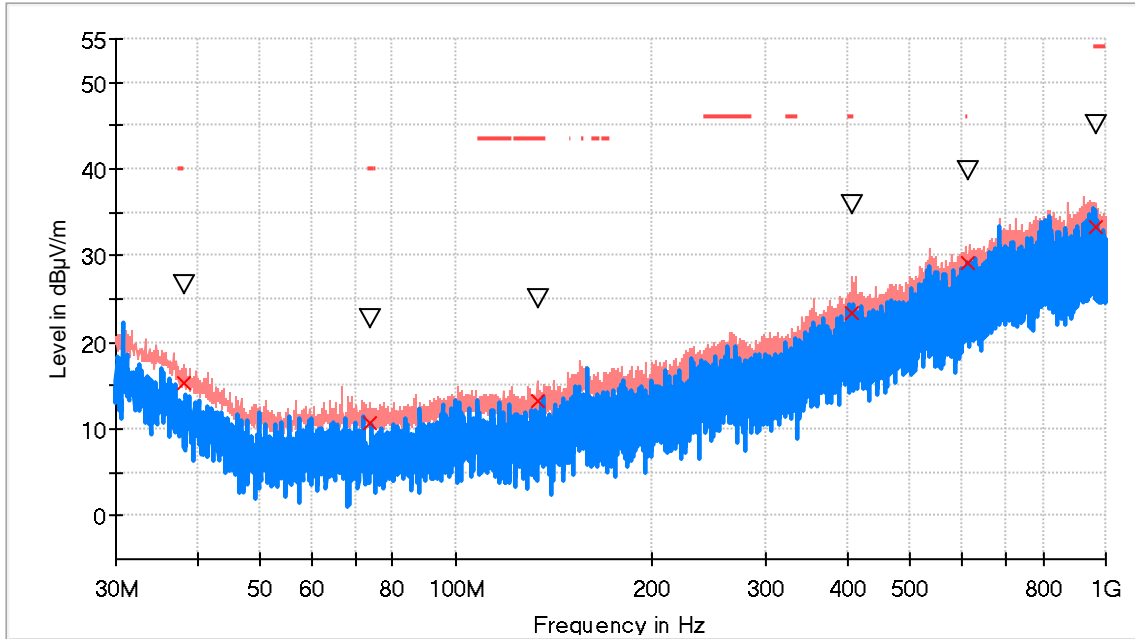


- PK+_MAXH
- PK+_CLRWR
- - - TX limits to Spurious Emission FCC15.407 (30MHz to 1GHz) Restricted Bands QPK Limit
- ▽ MaxPeak-PK+ (Single)
- × QuasiPeak-QPK (Single)

Frequency (MHz)	MaxPeak (dBµV/m)	QuasiPeak (dBµV/m)	Pol	Margin - QPK (dB)	Limit - QPK (dBµV/m)
38.196500	26.7	15.3	V	24.7	40.0
73.698500	22.7	10.8	H	29.3	40.0
133.305000	24.9	13.2	V	30.3	43.5
407.281500	35.9	23.4	V	22.6	46.0
612.970000	39.8	29.1	V	16.9	46.0
961.830500	45.1	33.3	H	20.7	54.0

Frequency range 1 - 18 GHz


Frequency Range GHz = [1, 18], Frequency MHz = 5180.00000, Modulation = 802.11ac, Mode = MIMO CCD Mode 2x2

Images:

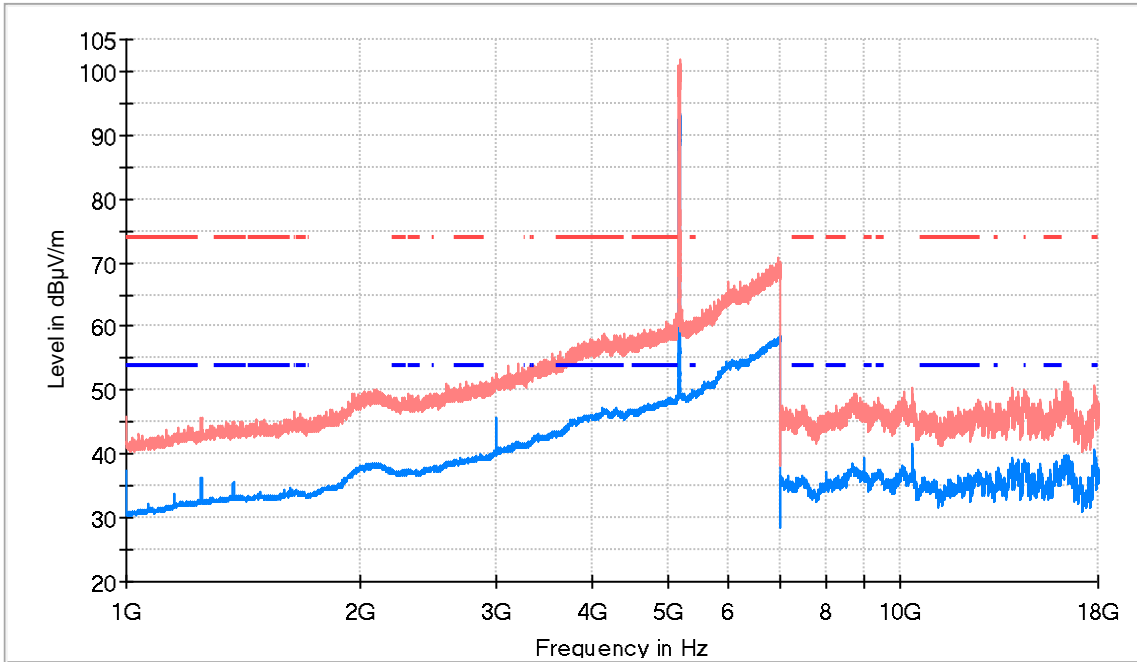

- AVG_MAXH
- PK+_MAXH
- TX limits to Spurious Emission FCC15.407 (1GHz to 40 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.407 (1GHz to 40 GHz) Restricted Bands AVG Limit


Frequency (MHz)	PK+_MAXH (dBµV/m)	AVG_MAXH (dBµV/m)	Pol	Margin - AVG (dB)	Limit - AVG (dBµV/m)	Comment
5186.500000	101.7	93.3	H	---	---	Fundamental
5415.500000	61.5	49.3	V	4.7	54.0	
17775.500000	49.2	40.7	V	13.3	54.0	

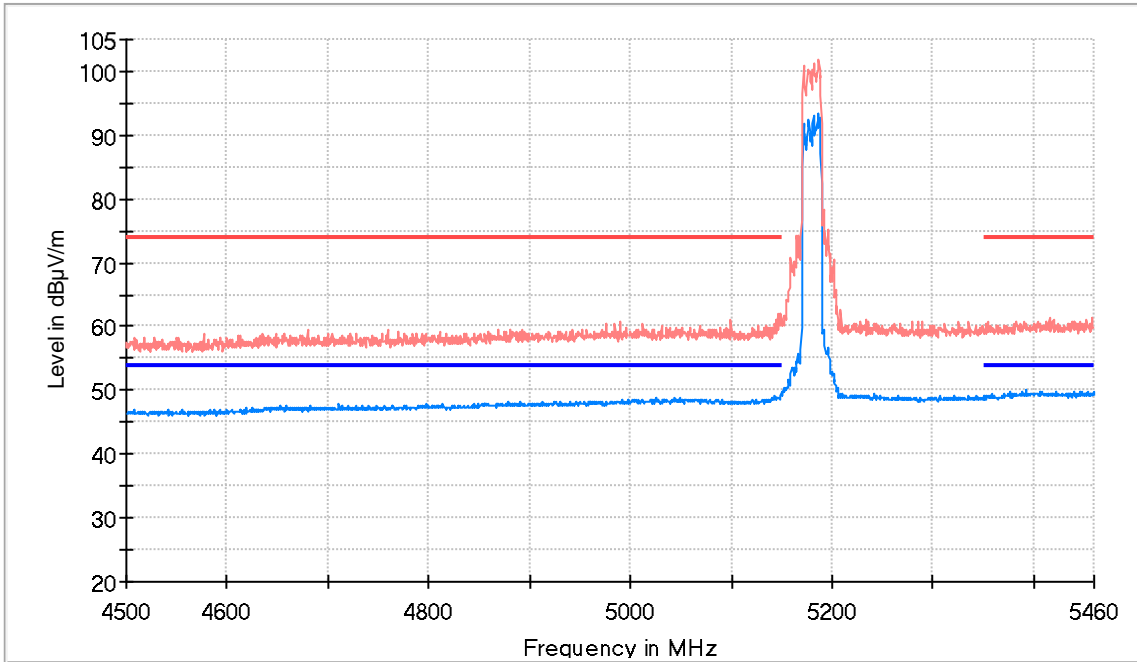

- AVG_MAXH
- PK+_MAXH
- TX limits to Spurious Emission FCC15.407 (1GHz to 40 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.407 (1GHz to 40 GHz) Restricted Bands AVG Limit

Frequency Range GHz = [18, 40], Frequency MHz = 5180.00000, Modulation = 802.11ac, Mode = MIMO CCD Mode 2x2

Images:

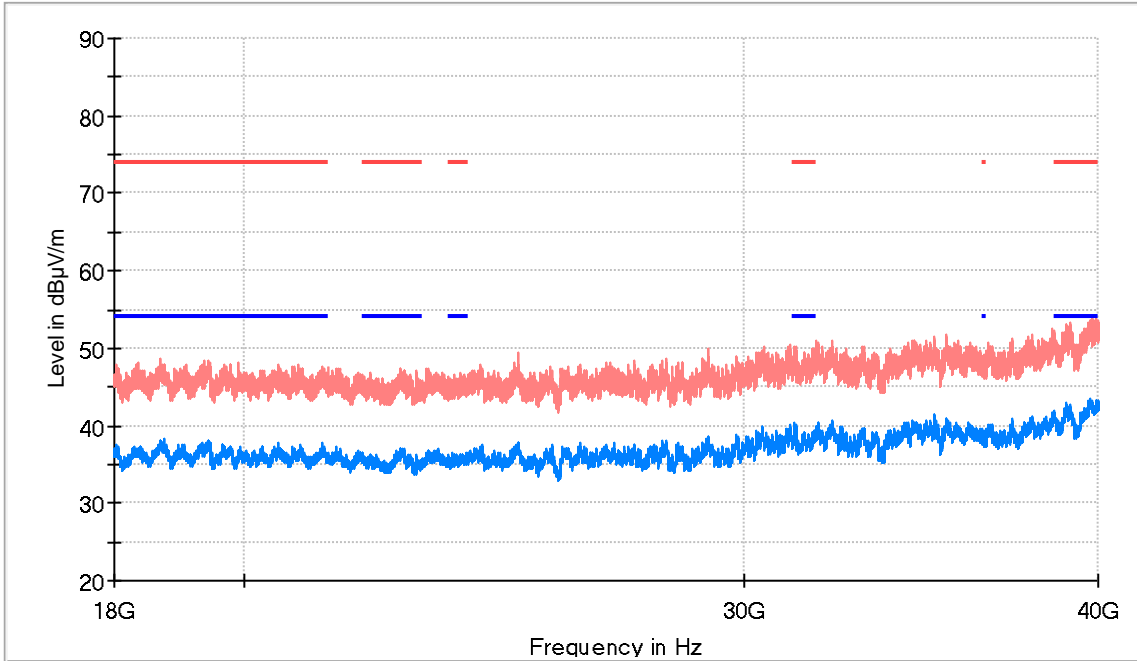


- AVG_MAXH
- PK+_MAXH
- TX limits to Spurious Emission FCC15.407 (1GHz to 40 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.407 (1GHz to 40 GHz) Restricted Bands AVG Limit

Frequency (MHz)	PK+_MAXH (dBµV/m)	AVG_MAXH (dBµV/m)	Pol	Margin - AVG (dB)	Limit - AVG (dBµV/m)
18688.187500	48.7	38.0	V	16.0	54.0
31283.875000	50.2	40.2	H	13.8	54.0
39828.812500	54.1	42.3	H	11.7	54.0

Frequency Range GHz = [1, 18], Frequency MHz = 5745.00000, Modulation = 802.11ac, Mode = MIMO CCD Mode 2x2

Images:

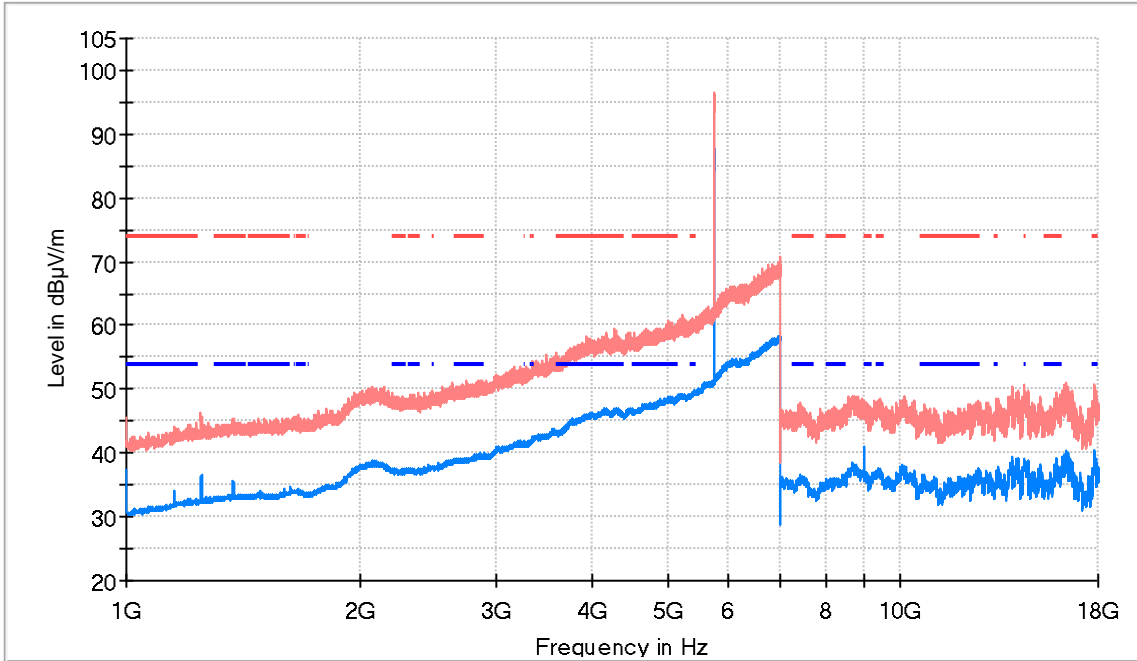


- AVG_MAXH
- PK+_MAXH
- TX limits to Spurious Emission FCC15.407 (1GHz to 40 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.407 (1GHz to 40 GHz) Restricted Bands AVG Limit

Frequency (MHz)	PK+_MAXH (dBµV/m)	AVG_MAXH (dBµV/m)	Pol	Margin - AVG (dB)	Limit - AVG (dBµV/m)	Comment
5441.500000	61.3	49.4	V	4.6	54.0	
5740.000000	96.2	87.9	H	---	---	Fundamental
17779.000000	50.0	40.5	H	13.5	54.0	

Frequency Range GHz = [18, 40], Frequency MHz = 5745.00000, Modulation = 802.11ac, Mode = MIMO CCD Mode 2x2

Images:

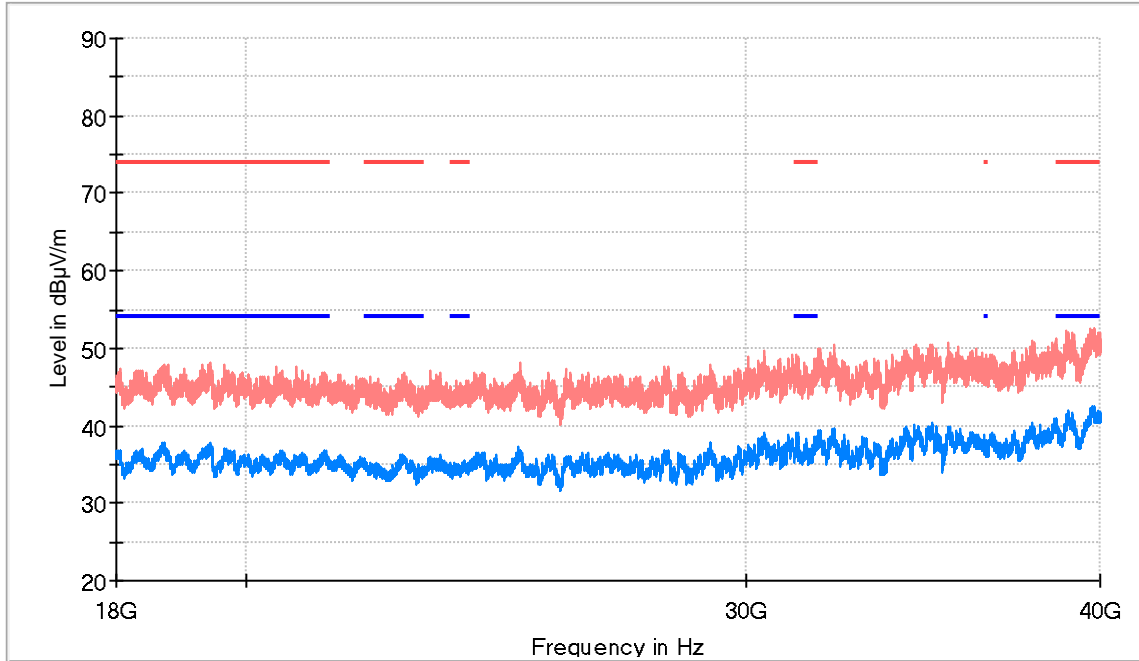

- AVG_MAXH
- PK+_MAXH
- TX limits to Spurious Emission FCC15.407 (1GHz to 40 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.407 (1GHz to 40 GHz) Restricted Bands AVG Limit

Frequency (MHz)	PK+_MAXH (dBµV/m)	AVG_MAXH (dBµV/m)	Pol	Margin - AVG (dB)	Limit - AVG (dBµV/m)
19434.125000	48.0	36.9	H	17.1	54.0
31271.500000	49.2	38.7	H	15.3	54.0
39671.375000	52.5	40.9	H	13.1	54.0

Measurements

Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
30 MHz - 1 GHz	48.5 kHz	PK+	100 kHz	1 s	20 dB
1 GHz - 7 GHz	500 kHz	PK+ ; AVG	1 MHz	1 s	20 dB
7 GHz - 18 GHz	500 kHz	PK+ ; AVG	1 MHz	1 s	20 dB
18 GHz - 40 GHz	687.5 kHz	PK+ ; AVG	1 MHz	1 s	20 dB