



FCC LISTED, REGISTRATION  
 NUMBER: 2764.01

ISED LISTED REGISTRATION  
 NUMBER: 23595-1

Test Report No:  
**3967ERM.015A1**

## Partial Test Report

**USA FCC Part 15.247, 15.209, 15.207; & CANADA RSS-247, RSS-Gen**

Radio Frequency Devices. Operation within the bands 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz

Digital Transmission Systems (DTs), Frequency Hopping Systems (FHSs) and License-Exempt Local Area Network (LE-LAN) Devices.

(*) Identification of item tested	Infotainment Head Unit
(*) Trademark	Garmin
(*) Model and /or type reference	IDC23 High 8155
Other identification of the product	FCC ID: IPH-03911 IC:1792A-03911 HVIN: B03911 Hw version: B03911
(*) Features	Bluetooth classic; BLE; Wi-Fi 2.4GHz; Wi-Fi 5GHz; GNSS
Manufacturer	Garmin International, Inc. 1200 E. 151st Street, Olathe, Kansas 66062, USA
Test method requested, standard	USA FCC Part 15.247 (10-1-20 Edition): Operation within the bands 902 - 928 MHz, 2400 -2483.5 MHz, and 5725 - 5850 MHz USA FCC Part 15.209 (10-1-20 Edition): Radiated emission limits; general requirements. CANADA RSS-247 Issue 2 (February 2017). CANADA RSS-Gen Issue 5 amendment 1 (March 2019). Guidance for Performing Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid Systems Devices Operating Under Section 15.247 of the FCC Rules. 558074 D01 Meas Guidance v05r02 dated April 2, 2019. ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.
Summary	See Appendix A, B
Approved by (name / position & signature)	Domingo Galvez EMC&RF Lab Manager
Date of issue	09-15-2023
Report template No	FDT08_23 (*) "Data provided by the client"

# Index

---

INDEX .....	2
ACRONYMS .....	3
COMPETENCES AND GUARANTEES .....	3
GENERAL CONDITIONS .....	3
UNCERTAINTY .....	4
DATA PROVIDED BY THE CLIENT .....	4
USAGE OF SAMPLES .....	5
TEST SAMPLE DESCRIPTION .....	6
IDENTIFICATION OF THE CLIENT .....	8
TESTING PERIOD AND PLACE .....	8
DOCUMENT HISTORY .....	8
ENVIRONMENTAL CONDITIONS .....	8
REMARKS AND COMMENTS .....	9
LIST OF EQUIPMENT USED DURING THE TEST .....	9
TESTING VERDICTS .....	10
SUMMARY .....	10
APPENDIX A: TEST RESULTS. BLUETOOTH EDR.....	12
APPENDIX B: TEST RESULTS. WI-FI 2.4GHZ.....	24

## Acronyms

Acronym ID	Acronym Description
	Emission Bandwidth
# of Tx Chains	Number of Transmission Chains
Equipment	Equipment Type
Freq	Frequency
In band Peak Lvl	In band Peak Level
Lvl	Level
MP	Measurement Point
Mod	Modulation
Occ Ch BW	Occupied Channel Bandwidth
PSD	Power Spectrum Density
Peak Power	Maximum Peak Conducted Output Power
Port	Active Port

## Competences and guarantees

DEKRA Certification Inc. is a testing laboratory accredited by A2LA (The American Association for Laboratory Accreditation), to perform the tests indicated in the Certificate 2764.01

DEKRA Certification Inc. is a testing laboratory competent to carry out the tests described in this report.

In order to assure the traceability to other national and international laboratories, DEKRA Certification Inc. has a calibration and maintenance program for its measurement equipment.

DEKRA Certification Inc. guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated on the report and, it is based on the knowledge and technical facilities available at DEKRA Certification at the time of performance of the test.

DEKRA Certification Inc. is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

**IMPORTANT:** No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA Certification Inc.

## General conditions

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA Certification Inc.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA Certification Inc. and the Accreditation Bodies.

## Uncertainty

Uncertainty (factor k=2) was calculated according to the DEKRA Certification internal document PODT000.

Test case	Frequency (MHz)	U (k=2)	Units
RF Power and PSD	2402-2483	0.88	dB
Occupied Bandwidth		1.87	%
Dwell Time		0.01	%
Band Edge		0.64	dB
Radiated Spurious Emission	30-180	4.27	dB
	180-1000	3.14	dB
	1000-18000	3.30	dB
	18000-40000	3.49	dB

## Data provided by the client

The following data has been provided by the client:

1. Information relating to the description of the sample ("Identification of the item tested", "Trademark", "Model and/or type reference tested").
2. The sample consists of Infotainment Head Unit to be installed in cars with the main functionalities: Navigation, USB, voice recognition and several interfaces to the vehicle and Bluetooth / WLAN.

DEKRA declines any responsibility with respect to the information provided by the client and that may affect the validity of results.

## Usage of samples

Samples undergoing test have been selected by: The client.

Sample S/01 is composed of the following elements:

Id	Control Number	Description	Model	Serial N°	Date of Reception	Application
S/01	3967/02	Garmin IDC23 RF Sample	IDC23	GPN0100286554	5/25/2023	Element Under Test
S/01	3428/73	Antenna	-	-	-	Element Under Test

Sample S/01 is composed of the following accessories:

Id	Control Number	Description	Model	Serial N°	Date of Reception	Application
S/01	2874/11	Fakra to SMA Connector	-	-	03/26/2021	Accessory
S/01	2874/13	OABR Connector cable	-	-	03/26/2021	Accessory
S/01	3171/11	Ethernet Cable	-	-	03/05/2021	Accessory
S/01	3428/32	BMW Antenna-DA Fakra 5G-GNSS		6520 8705915-04	06/01/2022	Accessory
S/01	3967/42	CAN cable	-	-	06/14/2023	Accessory
S/01	3967/43	Harness	-	-	06/14/2023	Accessory

1. Sample S/01 was used for the test(s): All Radiated indicated in appendix A and B.

## Test sample description

### Test Sample description (compulsory information for EMC and RF testing services)

Ports..... :	Port name and description	Cable					
		Specified max length [m]	Attached during test	Shielded	Coupled to patient <sup>(3)</sup>		
	BT/Wi-Fi Antenna	2m	[X]	[ ]	[ ]		
	USB1/2	2m	[X]	[ ]	[ ]		
	Power	2m	[X]	[ ]	[ ]		
	CID	2m	[X]	[ ]	[ ]		
	AR-Cam	2m	[X]	[ ]	[ ]		
	100 Base T1/1G Base T1/GPS/DCS/HUD/D FE	2m	[X]	[ ]	[ ]		
Supplementary information to the ports..... :	No Data Provided						
Rated power supply .....	Voltage and Frequency		Reference poles				
			L1	L2	L3	N	PE
	[ ]	AC: .....	[ ]	[ ]	[ ]	[ ]	[ ]
	[ ]	AC: .....	[ ]	[ ]	[ ]	[ ]	[ ]
	[X]	DC: 8V to 16V					
[ ]	DC: .....						
Rated Power .....	No Data Provided						
Clock frequencies .....	No Data Provided						
Other parameters..... :	No Data Provided						
Software version .....	No Data Provided						
Hardware version..... :	B03911						
Dimensions in cm (W x H x D)..... :	No Data Provided						

Mounting position.....:	<input type="checkbox"/>	Table top equipment	
	<input type="checkbox"/>	Wall/Ceiling mounted equipment	
	<input type="checkbox"/>	Floor standing equipment	
	<input type="checkbox"/>	Hand-held equipment	
	<input checked="" type="checkbox"/>	Other: automotive	
Modules/parts .....	Module/parts of test item	Type	Manufacturer
	No Data Provided	.....	.....
	.....	.....	.....
Accessories (not part of the test item) .....	Description	Type	Manufacturer
	No Data Provided	.....	.....
	.....	.....	.....
Documents as provided by the applicant.....:	Description	File name	Issue date
	Declaration Equipment Data	FDT30_18 Declaration Equipment Data_IDC23 High 8155	08/01/2023
	.....	.....	.....

Copy of marking plate:

Product Name: Automotive Infotainment Head Unit  
 產品名稱: 汽車資訊娛樂主機  
 Manufactured by:  
 佳明 **GARMIN.**  
 Model / 型號: IDC23 High 8155  
 Made in / 製造: Taiwan  
 Input / 輸入: 12V<sup>+</sup>12A  
 FCC ID: IPH-03911 IC: 1792A-03911 M/N: B03911

161-06307-07

**CE** **UK CA** **E24** XX X-XX XXXXXXXX  
 IDC23 High 8155-IL

**Dolby AUDIO** Manufactured under license from Dolby Laboratories. Dolby, Dolby Audio, Pro Logic, and the double-D symbol are trademarks of Dolby Laboratories Licensing Corporation.

**ZICTA**  
ZMB/ZICTA/TA/2022/10/33

**NCA APPROVED:**  
X-XXXXX  
7E6-M1-XAE-SRD  
CMIIT ID: 2022DJ18518

THIS DEVICE COMPLIES WITH PART 15 OF THE FCC RULES, AND ISED CANADA LICENSE-EXEMPT RSS STANDARD (S). OPERATION IS SUBJECT TO THE FOLLOWING TWO CONDITIONS:  
 (1) THIS DEVICE MAY NOT CAUSE HARMFUL INTERFERENCE, AND  
 (2) THIS DEVICE MUST ACCEPT ANY INTERFERENCE RECEIVED, INCLUDING INTERFERENCE THAT MAY CAUSE UNDESIRABLE OPERATION.

AGREE PAR LE MCPT (REPUBLIQUE DE DJIBOUTI)  
 Numéro d'agrément: 120/DDTC/2022  
 Date d'agrément: 16/10/2022

AGREÉ PAR L'ANRT Maroc  
 Numéro d'agrément: MR00034513ANRT2022  
 Date d'agrément: 14/09/2022

AGREE PAR L'ARE MAURITANIE  
 Numéro d'agrément: XXXXXXX/XXXX  
 Date d'agrément: XXXX/XXXX

AGREE PAR ARTP SENEGAL  
 Numéro d'agrément: 072352/AG/ER

Connection and use of this communications equipment is permitted by the Nigerian Communications Commission

85709/S DPPV/2022  
2651

BOCRA REGISTERED No: XXXXXXX/XXXX  
 Homologue per l'ARPCE 267/IR/HMG/DG/ARPCE/2023

OMAN - TRA  
D172338  
TRA/TA - R/14686/22

**ST** **R34096 RoHS** **CONATEL** **ANATEL** **PTA** **MCMC** **ICASA** **TA-2022/2197 APPROVED**

XXXXXXXXXXXXXXXX  
減少電磁波影響，請妥適使用  
TAC NO: XXXXXXXX  
X-X-XXX-XXXXXXXXXXXXX  
HIDF-1700037  
XXX

## Identification of the client

Garmin International, Inc.  
 1200 E. 151st Street  
 Olathe, Kansas 66062  
 USA

## Testing period and place

<b>Test Location</b>	DEKRA Certification Inc.
<b>Date (start)</b>	06-27-2023
<b>Date (finish)</b>	09-13-2023

## Document history

Report number	Date	Description
3967ERM.015	08-28-2023	First release.
3967ERM.015A1	09-15-2023	Second release. Output power spot check test results were added for Bluetooth EDR and Wi-Fi 2.4 GHz in Appendix A & B. Testing period, Remarks and Comments, and Test Conditions section were updated. This modification of the test report cancels and replaces the test report 3967ERM.015

## Environmental conditions

In the control chamber, the following limits were not exceeded during the test:

<b>Temperature</b>	Min. = 15 °C Max. = 35 °C
<b>Relative humidity</b>	Min. = 30 % Max. = 75 %

In the semi anechoic chamber, the following limits were not exceeded during the test.

<b>Temperature</b>	Min. = 15 °C Max. = 35 °C
<b>Relative humidity</b>	Min. = 30 % Max. = 75 %

In the chamber for conducted measurements, the following limits were not exceeded during the test:

<b>Temperature</b>	Min. = 15 °C Max. = 35 °C
<b>Relative humidity</b>	Min. = 30 % Max. = 75 %



## Remarks and comments

The tests have been performed by the technical personnel: Juliana Cherry, Qi Zhang and Koji Nishimoto.

## List of equipment used during the test

### Radiated Measurements

CONTROL NUMBER	DESCRIPTION	Serial No	LAST CALIBRATION	NEXT CALIBRATION
878	Power supply (AMETEK / PROG-DC-PS)	1707A01783	N/A	N/A
1012	ESR26 Emi Test Receiver	101478	2022-04-12	2024-04-12
1014	FSV40 Signal Analyzer 40ghz	101626	2022-08-01	2024-08-01
1056	3116C Double-Ridged Waveguide Horn Antenna 18-40 GHz	213179	2023-02-23	2026-02-23
1058	3115 Double-Ridged Waveguide Horn Antenna 1-18 GHz	211373	2023-06-26	2026-06-26
1065	3142E Biconilog Antenna	208587	2020-08-13	2023-08-13
1108	Ethernet SNMP Thermometer- CR Room	60038026954	2022-10-18	2024-10-18
1111	Ethernet SNMP Thermometer	60038026577	2022-10-18	2024-10-18
1179	SEMI-ANECHOIC CHAMBER	F169021	N/A	N/A
1314	Wireless Measurement Software R&S Emc32	1040-OT102236	N/A	N/A
1461	Low Noise Preamplifier (1-18GHz)	2213857B	2022-06-01	2024-06-01

## Testing verdicts

Fail	F
Not applicable	N/A
Not measured	N/M
Pass	P

## Summary

### Bluetooth EDR

Requirement – Test case	FCC PART 15 PARAGRAPH / RSS-247	Verdict	Remark
RSS-247 5.1 (b) / FCC 15.247 (a) (1) 20 dB Bandwidth		N/M	Refer 2
RSS-247 5.1 (b) / FCC 15.247 (a) (1) Carrier Frequency Separation		N/M	Refer 2
RSS-247 5.1 (d) / FCC 15.247 (a) (1) (iii) Time of Occupancy (Dwell Time)		N/M	Refer 2
RSS-247 5.1 (d) / FCC 15.247 (a) (1) (iii) Number of hopping channels		N/M	Refer 2
RSS-247 5.4 (b) / FCC 15.247 (b) (1) Maximum Peak Conducted output power & Antenna gain		P	N/A
RSS-247 5.5 / FCC 15.247 (d) Band-edge emissions compliance (Transmitter) - Conducted		N/M	Refer 2
FCC 2.1049 / 99dBw Occupied Channel Bandwidth 99%		N/M	Refer 2
RSS-247 5.5 / FCC 15.247 (d) Emissions compliance (Transmitter) - Conducted		N/M	Refer 2
RSS-247 5.5 / FCC 15.247 (d) Emissions compliance (Transmitter) - Radiated		P	Refer 1
<b>Supplementary information and remarks:</b> <ol style="list-style-type: none"> <li>The results show the worst case 8-DPSK modulation.</li> <li>Only Partial testing has been requested.</li> </ol>			

## Wi-Fi 2.4GHz

Requirement – Test case	FCC PART 15 PARAGRAPH / RSS-247	Verdict	Remark
RSS-247 5.2 (a) / FCC 15.247 (a) (2) 6 dB Bandwidth		N/M	Refer 2
RSS-247 5.2 (b) / FCC 15.247 (e) Power spectral density		N/M	Refer 2
RSS-247 5.4 (d) e.i.r.p		N/M	Refer 2
RSS-247 5.4 (d) / FCC 15.247 (b) (1) Maximum Average Conducted output Power		P	N/A
RSS-247 5.5 / FCC 15.247 (d) Band-edge emissions compliance (Transmitter) - Conducted		N/M	Refer 2
FCC 2.1049 / Occupied Channel Bandwidth 99%		N/M	Refer 2
RSS-247 5.5 / FCC 15.247 (d) Emissions compliance (Transmitter) - Conducted		N/M	Refer 2
RSS-247 5.5 / FCC 15.247 (d) Emissions compliance (Transmitter) - Radiated		P	Refer 1
<b>Supplementary information and remarks:</b> <ol style="list-style-type: none"> <li>1. The results show the worst case 802.11b mode.</li> <li>2. Only Partial testing has been requested.</li> </ol>			

## Appendix A: Test results. Bluetooth EDR

## Index

---

PRODUCT INFORMATION .....	14
TEST CONDITIONS .....	15
TEST CASE DETAILS .....	16
RSS-247 5.4 (B) / FCC 15.247 (B) (1) MAXIMUM PEAK CONDUCTED & ANTENNA GAIN .....	16
RSS-247 5.5 / FCC 15.247 (D) EMISSION LIMITATIONS RADIATED (TRANSMITTER) - RADIATED .....	19

## PRODUCT INFORMATION

Information	Description
Modulation	FHSS
Adaptive	Non-Adaptive Equipment
Operation mode 1:	
Operating Frequency Range	2400 – 2483.5 MHz
Nominal Channel Bandwidth	1 MHz
RF Output Power	4 dBm
Extreme operating conditions	-40 °C to +65 °C
- Temperature range	
Antenna type	1/4 wave coax
Antenna gain	-2.5 dBi
Nominal Voltage	
- Supply Voltage	12 Vdc
- Type of power source	DC voltage
Equipment type	Bluetooth Classic
Geo-location capability	Yes

## TEST CONDITIONS

(\*): Data provided by the client.

TEST CONDITIONS	DESCRIPTION
TC#01	<u>Power supply (V):</u> $V_{\text{nominal}} = 12 \text{ Vdc}$ <u>Modulation:</u> GFSK <u>Test Frequencies for conducted tests:</u> Lowest range: 2402 MHz
TC#02	<u>Power supply (V):</u> $V_{\text{nominal}} = 12 \text{ Vdc}$ <u>Modulation:</u> $\pi/4$ -DQPSK <u>Test Frequencies for Conducted tests:</u> Lowest range: 2402 MHz
TC#03	<u>Power supply (V):</u> $V_{\text{nominal}} = 12 \text{ Vdc}$ <u>Modulation:</u> 8-DPSK <u>Test Frequencies for Conducted/Radiated tests:</u> Lowest range: 2402 MHz

See below the comparison table between previous test results (test report 3428ERM.009A4) and test results with the new sample shown in this test report:

Modulation	Frequency (MHz)	Maximum conducted power (dBm)		Delta
		IDC23 - 3428 (test report 3428ERM.009A4)	IDC23 - 3967	
GFSK	2402	3.2	3.3	0.1
$\pi/4$ -DQPSK	2402	5.3	5.2	-0.1
8-DPSK	2402	5.4	5.5	0.1

### TEST CASE DETAILS

#### RSS-247 5.4 (b) / FCC 15.247 (b) (1) Maximum Peak Conducted & Antenna gain

##### Limits

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels: 1 watt (30 dBm). The e.i.r.p. shall not exceed 4 W (RSS-247).

Maximum declared antenna gain: -2.5 dBi

Modulation: BT (GFSK 1-DH5)

##### Results

Freq (MHz)	# of Tx Chains	Port	Peak Power (dBm)	Maximum EIRP power (dBm)
2402.00000	1	1	3.3	0.8

Modulation: BT ( $\pi/4$  DQPSK 2-DH5)

##### Results

Freq (MHz)	# of Tx Chains	Port	Peak Power (dBm)	Maximum EIRP power (dBm)
2402.00000	1	1	5.2	2.7

Modulation: BT (8DPSK 3-DH5)

##### Results

Freq (MHz)	# of Tx Chains	Port	Peak Power (dBm)	Maximum EIRP power (dBm)
2402.00000	1	1	5.5	3.0

##### Verdict


Pass



**Attachments**


**Frequency MHz = 2402.00000, Equipment Type = Frequency Hopping Spread Spectrum systems (DSS), Modulation = BT (GFSK 1-DH5), Number of Transmission Chains = 1,**

**Images:**

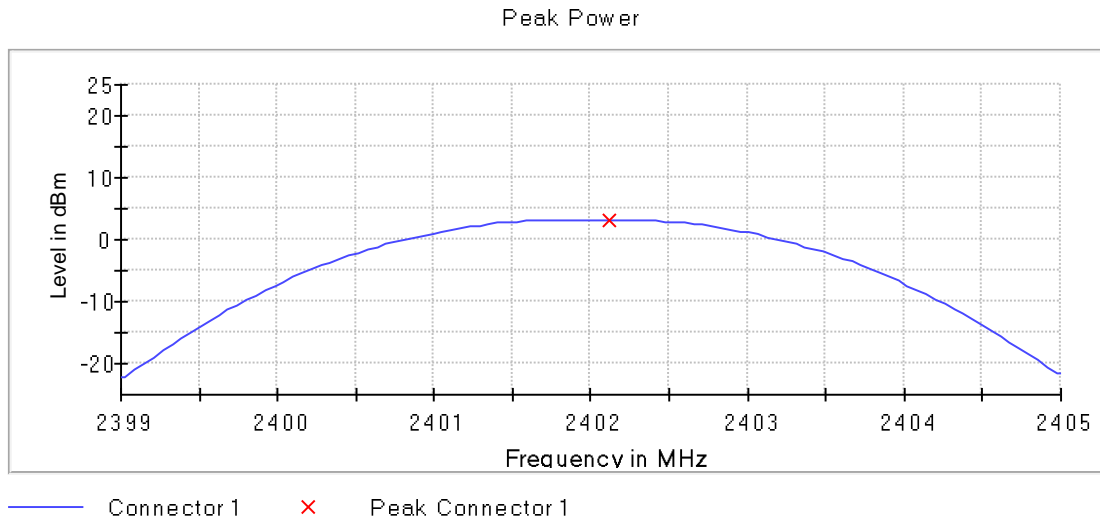


**Frequency MHz = 2402.00000, Equipment Type = Frequency Hopping Spread Spectrum systems (DSS), Modulation = BT ( $\pi/4$  DQPSK 2-DH5), Number of Transmission Chains = 1,**

**Images:**

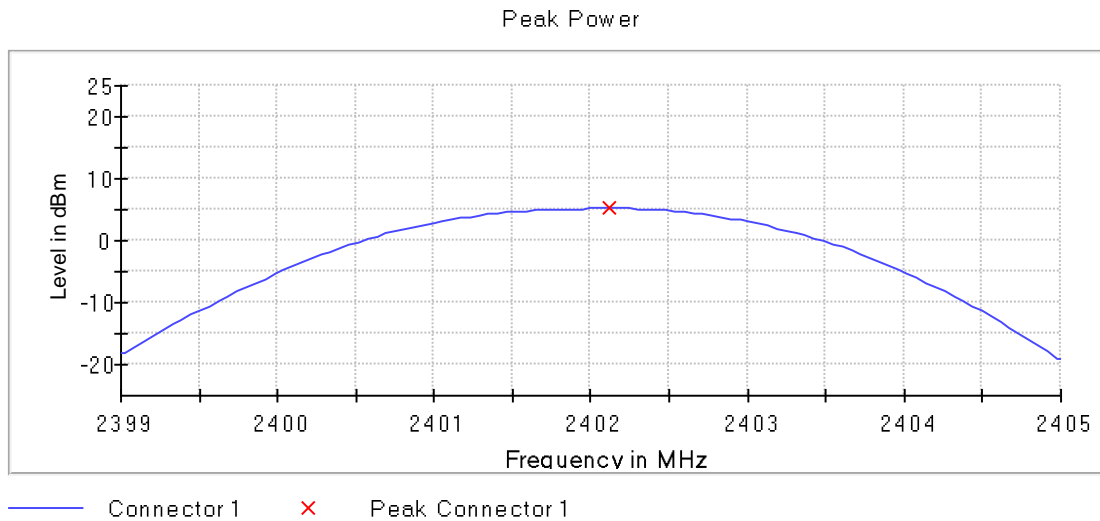

Frequency MHz = 2402.00000, Equipment Type = Frequency Hopping Spread Spectrum systems (DSS),  
Modulation = BT (8DPSK 3-DH5), Number of Transmission Chains = 1,

Images:

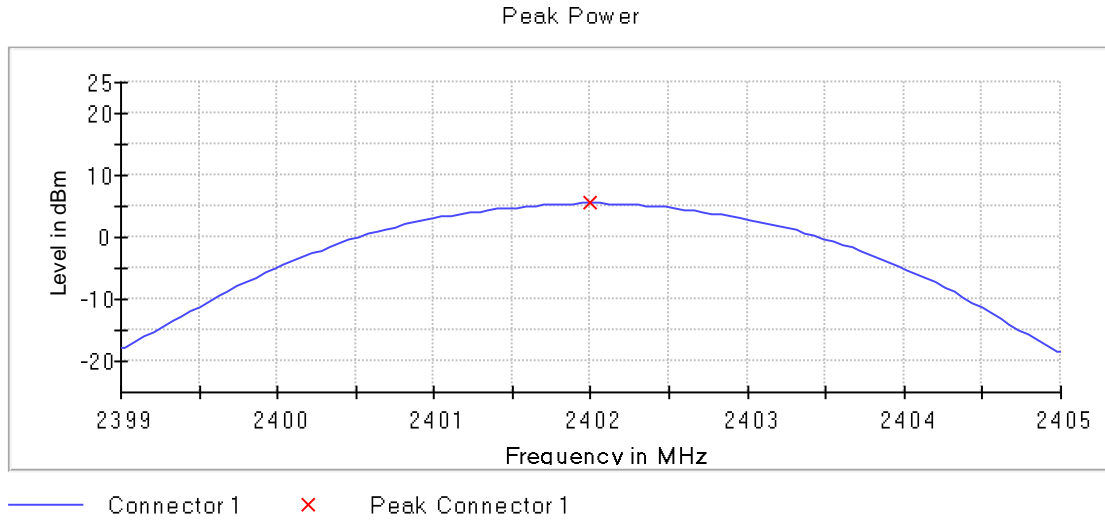

**RSS-247 5.5 / FCC 15.247 (d) EMISSION LIMITATIONS RADIATED (TRANSMITTER) - Radiated**

**Limits**

Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c) / RSS-Gen):

Frequency Range (MHz)	Field strength (µV/m)	Field strength (dBµV/m)	Measurement distance (m)
0.009-0.490	2400/F(kHz)	-	300
0.490-1.705	24000/F(kHz)	-	30
1.705 - 30.0	30	-	30
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
960 - 25000	500	54	3

The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz Radiated emission limits in these three bands are based on measurements employing an average detector.

For average radiated emission measurements above 1000 MHz, there is also a limit corresponding to 20 dB above the indicated values in the table is specified when measuring with peak detector function.

RSS-247. Attenuation below the general field strength limits specified in RSS-Gen is not required


**Verdict**

Pass

**Results**

**Frequency range 30 MHz – 1000 MHz**

The spurious emissions below 1 GHz do not depend on the operating channel selected in the EUT.

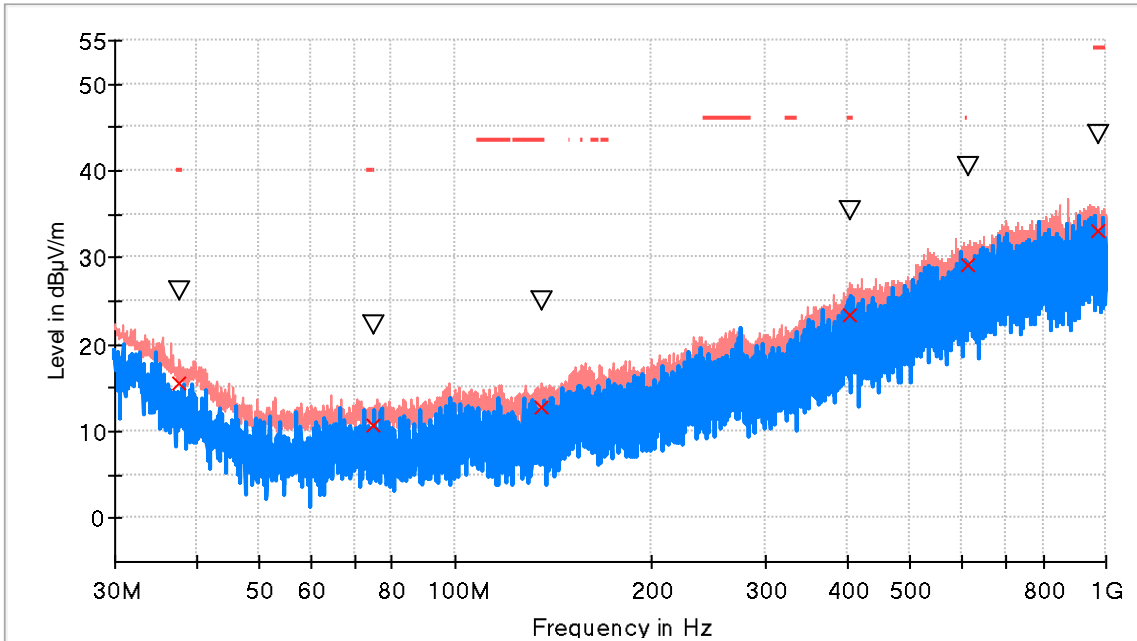

- PK+\_MAXH
- PK+\_CLRWR
- - - TX limits to Spurious Emission FCC15.247 (30MHz to 1GHz) Restricted Bands QPK Limit
- ▽ MaxPeak-PK+ (Single)
- × QuasiPeak-QPK (Single)

Frequency (MHz)	MaxPeak (dBµV/m)	QuasiPeak (dBµV/m)	Pol	Margin - QPK (dB)	Limit - QPK (dBµV/m)
37.760000	26.2	15.5	V	24.5	40.0
74.911000	22.2	10.7	H	29.3	40.0
135.972500	24.9	12.8	H	30.7	43.5
404.759500	35.4	23.4	H	22.7	46.0
612.727500	40.6	29.1	V	16.9	46.0
970.075500	44.2	33.0	V	21.0	54.0


### Frequency range 1 GHz – 26 GHz

The results in the following plots and tables show the maximum measured levels in the 1-26 GHz range including the restricted bands 2.31-2.5 GHz.

Modulation: BT (8DPSK)

### Frequency range 1 - 18 GHz

#### Lowest Channel

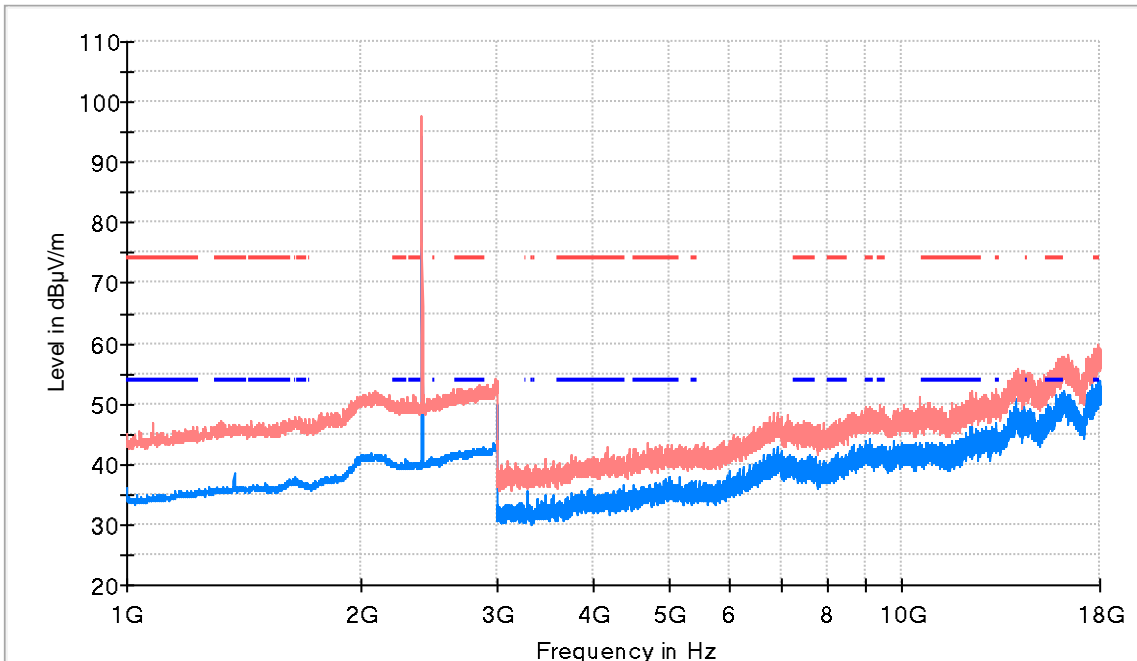


- AVG\_MAXH
- PK+\_MAXH
- - - TX limits to Spurious Emission FCC15.247 (1-26 GHz) Restricted Bands PK Limit
- - - TX limits to Spurious Emission FCC15.247 (1-26 GHz) Restricted Bands AVG Limit

Frequency (MHz)	PK+ MAXH (dBµV/m)	AVG_MAXH (dBµV/m)	Pol	Margin - AVG (dB)	Limit - AVG (dBµV/m)	Comment
2402.500000	97.7	93.8	H	---	---	Fundamental
2887.000000	52.8	41.9	V	12.1	54.0	
17935.000000	59.9	51.6	V	2.4	54.0	

**Frequency range 18 - 26 GHz**

**Lowest Channel**

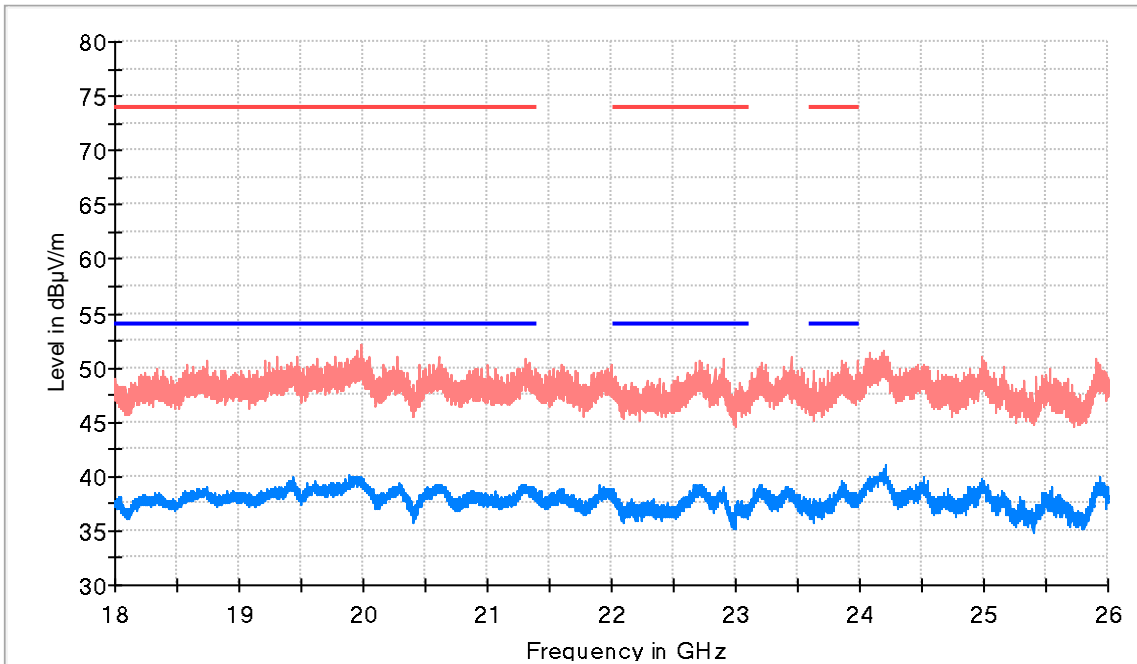


- AVG\_MAXH
- PK+\_MAXH
- TX limits to Spurious Emission FCC15.247 (1-26 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.247 (1-26 GHz) Restricted Bands AVG Limit

Frequency (MHz)	PK+_MAXH (dBµV/m)	AVG_MAXH (dBµV/m)	Pol	Margin - AVG (dB)	Limit - AVG (dBµV/m)
19983.500000	52.1	39.5	V	14.5	54.0
22899.000000	50.9	38.1	V	15.9	54.0
23850.500000	50.7	39.1	V	14.9	54.0

**Restricted Bands (2.31 GHz - 2.5 GHz)**

**Lowest Channel**

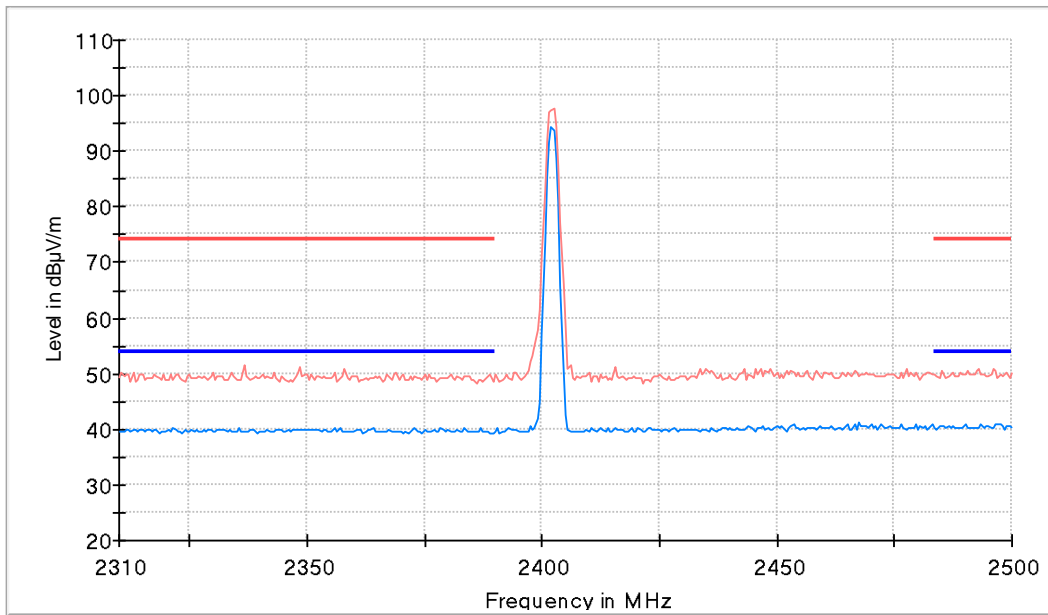

- AVG\_MAXH
- PK+\_MAXH
- TX limits to Spurious Emission FCC15.247 (1-26 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.247 (1-26 GHz) Restricted Bands AVG Limit

**Measurements**

Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
30 MHz - 1 GHz	48.5 kHz	PK+	100 kHz	1 s	20 dB
1 GHz - 3 GHz	500 kHz	PK+ ; AVG	1 MHz	0.1 s	20 dB
3 GHz - 18 GHz	500 kHz	PK+ ; AVG	1 MHz	0.1 s	20 dB
18 GHz - 26 GHz	500 kHz	PK+ ; AVG	1 MHz	1 s	20 dB

## Appendix B: Test results. Wi-Fi 2.4GHz



## Index

---

PRODUCT INFORMATION .....	26
TEST CONDITIONS .....	27
TEST CASE DETAILS .....	31
RSS-247 5.4 (D) / FCC 15.247 (B) (1) MAXIMUM AVERAGE CONDUCTED OUTPUT POWER .....	31
RSS-247 5.5 / FCC 15.247 (D) EMISSION LIMITATIONS RADIATED (TRANSMITTER) .....	38

## PRODUCT INFORMATION

Information	Description
Modulation	DSSS, OFDM, MIMO-OFDM
Maximum RF Output Power	Adaptive Equipment without the possibility to switch to a non- adaptive mode.
Operation mode	
- Operating Frequency Range	2400 – 2483.5 MHz
- Nominal Channel Bandwidth	20 MHz 40 MHz
Extreme operating conditions	
- Temperature range	-40 °C to +65 °C
Antenna type	1/4 wave coax
Antenna gain	-2.5 dBi
Nominal Voltage	
- Supply Voltage	12 Vdc
- Type of power source	DC voltage
Equipment type	Wi-Fi 2.4 GHz b/g/n/ax
Geo-location capability	No

## TEST CONDITIONS

(\*): Data provided by the client.

TEST CONDITIONS	DESCRIPTION
<p>TC#01<sup>(1)</sup> (b mode)</p>	<p><u>Power supply (V):</u>  <math>V_{\text{nominal}} = 12 \text{ Vdc}</math></p> <p><u>Channel Bandwidth:</u> 20 MHz</p> <p><u>Test Frequencies for Conducted/Radiated tests (Radio A &amp; Radio B MIMO):</u>            Lowest channel: 2412 MHz</p>
<p>TC#02 (g mode)</p>	<p><u>Power supply (V):</u>  <math>V_{\text{nominal}} = 12 \text{ Vdc}</math></p> <p><u>Channel Bandwidth:</u> 20 MHz</p> <p><u>Test Frequencies for Conducted tests (Radio A + B MIMO):</u>            Lowest channel: 2412 MHz</p>
<p>TC#03 (n mode)</p>	<p><u>Power supply (V):</u>  <math>V_{\text{nominal}} = 12 \text{ Vdc}</math></p> <p><u>Channel Bandwidth:</u> 20 MHz</p> <p><u>Test Frequencies for Conducted tests (Radio A + B MIMO):</u>            Lowest channel: 2412 MHz</p> <p><u>Channel Bandwidth:</u> 40 MHz</p> <p><u>Test Frequencies for Conducted tests (Radio A + B MIMO):</u>            Lowest channel: 2422 MHz</p>

TEST CONDITIONS	DESCRIPTION
TC#04 <sup>(1)</sup> <b>(ax mode non-beam forming)</b>	<p><u>Power supply (V):</u>  <math>V_{\text{nominal}} = 12 \text{ Vdc}</math></p> <p><u>Channel Bandwidth:</u> 20 MHz</p> <p><u>Test Frequencies for Conducted/Radiated tests (Radio A + B MIMO):</u>            Lowest channel: 2412 MHz</p> <p><u>Channel Bandwidth:</u> 40 MHz</p> <p><u>Test Frequencies for Conducted/Radiated tests (Radio A + B MIMO):</u>            Lowest channel: 2422 MHz</p>

Note (1): For spurious emissions for OFDM modes 802.11g, 802.11n20 and 802.11ax20 a preliminary scan was performed to determine the worst case. The following tables and plots show the results for the worst case in DSSS modulation (802.11b)

The data rates of 11Mb/s for 802.11b, was selected based on preliminary testing that identified those rates corresponding to the worst cases.

Note (2): See below the comparison table between previous test results (test report 3428ERM.009A4 and test results with the new sample shown in this test report:

Bandwidth (MHz)	Mode	Frequency (MHz)	Maximum conducted power (dBm)		Delta
			IDC23 - 3428 (test report 3428ERM.009A4)	IDC23 - 3967	
20	b	2412	14.2	14.4	0.2
	g	2412	10.8	11.1	0.3
	n	2412	9.1	9.4	0.3
	ax	2412	12.0	11.5	-0.4
40	n	2422	9.8	10.7	0.9
	ax	2422	12.0	10.7	-1.2

## RADIATED MEASUREMENTS:

All radiated tests were performed in a semi-anechoic chamber. The measurement antenna is situated at 3 m for the frequency range 30-1000 MHz (Bilog antenna) and 1-18 GHz (Double ridge horn antenna), and 1m for the frequency range 18 GHz- 26 GHz (Double ridge horn antenna).

For radiated emissions in the range 18 - 26 GHz that is performed at a distance closer than the specified distance, an inverse proportionality factor of 20 dB per decade is used to normalize the measured data for determining compliance.

The equipment under test was set up on a non-conductive platform above the ground plane and the situation and orientation was varied to find the maximum radiated emission. It was also rotated 360° and the antenna height was varied from 1 to 4 meters to find the maximum radiated emission.

Measurements were made in both horizontal and vertical planes of polarization.

The field strength is calculated by adding correction factor to the measured level from the spectrum analyzer. This correction factor includes antenna factor, cable loss and pre-amplifiers gain.

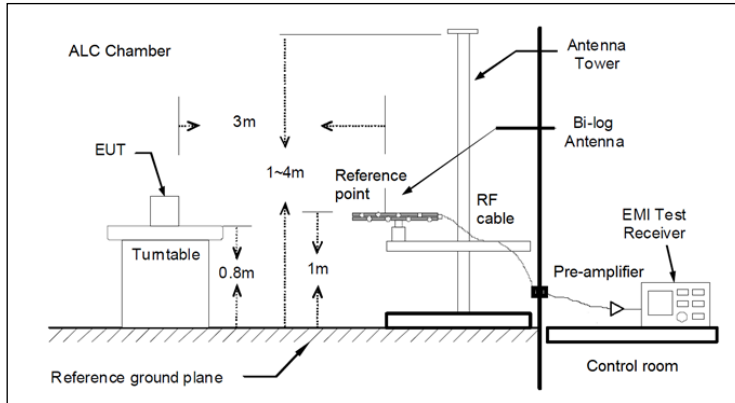


Fig A1: Radiated measurements Setup  $f < 1$  GHz

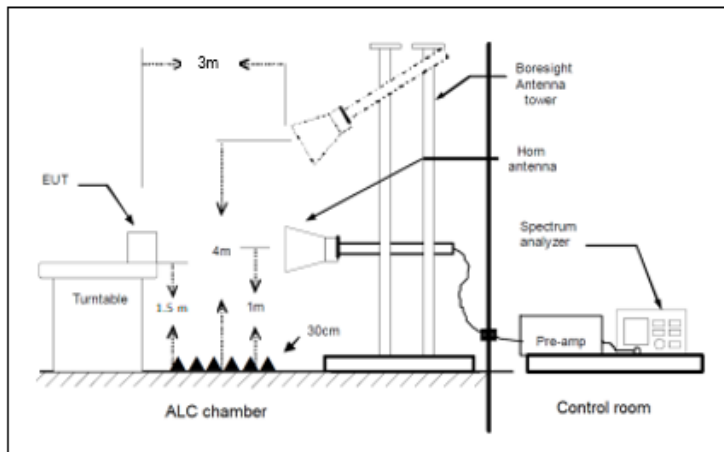


Fig A2: Radiated measurements setup  $f > 1-18$  GHz

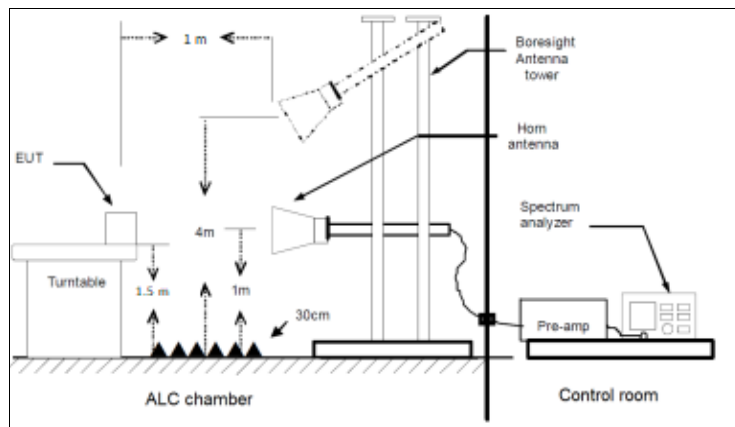


Fig A3: Radiated measurements setup  $f > 18$  GHz

## TEST CASE DETAILS

### RSS-247 5.4 (d) / FCC 15.247 (b) (1) Maximum Average Conducted Output Power

#### Limits

For systems using digital modulation in the 2400 -2483.5 MHz band: 1 watt (30 dBm).

The e.i.r.p. shall not exceed 4 W (36 dBm) (RSS-247).

#### Note:

- 1- The following test results are shown based on KDB 662911 D01 Multiple Transmitter Output v02r01 E) 1) In-Band Power Measurements.
- 2- The e.i.r.p. levels are calculated by adding the declared maximum antenna gain (dBi).
- 3- For 2Tx CDD MIMO modes, in accordance with KDB 662911 D01 v02r01 Section F)2)f)i), directional gain for power measurements: was calculated as follows:

$$\text{Directional gain}_{\text{POWER}} = G_{\text{ANT}} \text{ dBi} (N_{\text{ANT}} < 4)$$

$$\text{Directional gain}_{\text{POWER}} = G_{\text{ANT}} = -2.5 \text{ dBi}$$

$$\text{Power Antenna Gain MIMO Chain 0 \& 1: } -2.5 \text{ dBi}$$

For MIMO CDD operation modes, the limit should be reduced by the amount in dB the antenna gain exceeds 6 dBi. In this case the limit is not reduced due to the antenna gain calculations is -2.5 dBi.

- 4- For all operation modes, the antenna gain is less than 6 dBi.

### Results

Antenna gain: -2.5 dBi

Modulation: 802.11b

Freq (MHz)	BW (MHz)	E.I.R.P. (dBm)
2412.00000	20	11.87


### Verdict

Pass

### Attachments

Frequency MHz = 2412.00000, Equipment Type = Digital Transmission System (DTS), Bandwidth MHz = 1, Modulation = 802.11b , Number of Transmission Chains = 2,

### Images:

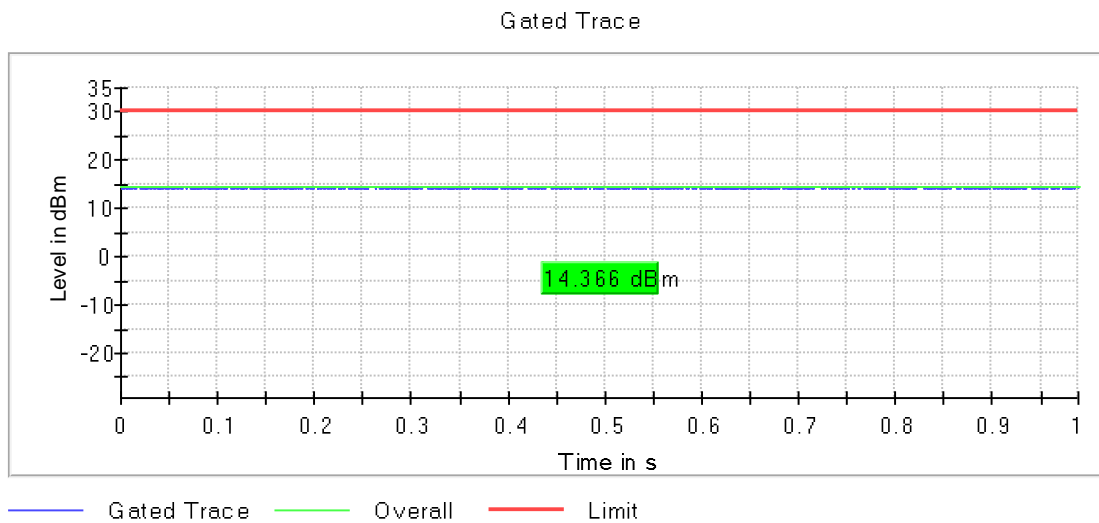



Antenna gain: -2.5 dBi

Modulation: 802.11g

**Results**

Freq (MHz)	BW (MHz)	E.I.R.P. (dBm)
2412.00000	20	8.63


**Verdict**

Pass

**Attachments**

Frequency MHz = 2412.00000, Equipment Type = Digital Transmission System (DTS), Bandwidth MHz = 1, Modulation = 802.11g , Number of Transmission Chains = 2,

**Images:**

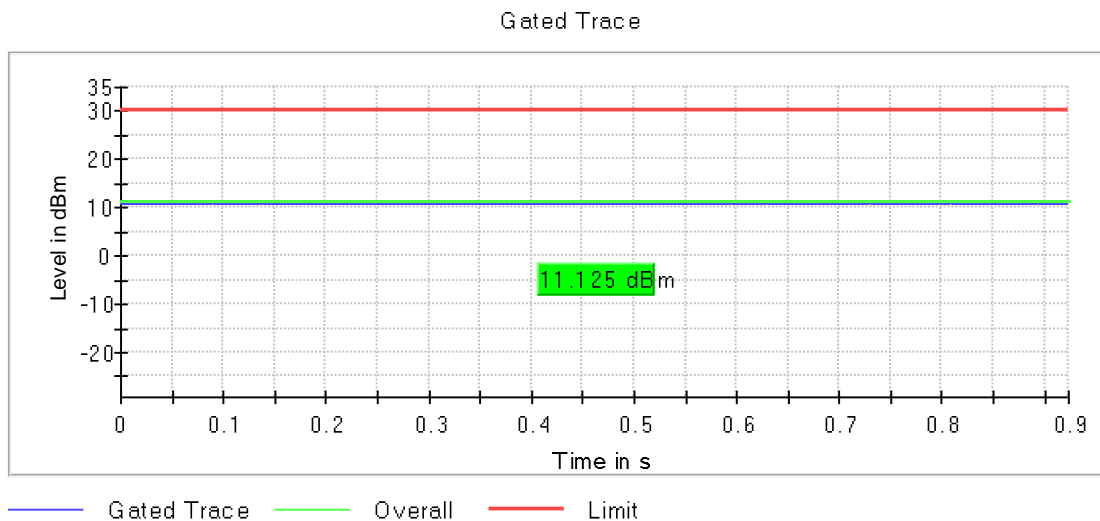

Antenna gain: -2.5 dBi

Modulation: 802.11n20

**Results**

Freq (MHz)	BW (MHz)	E.I.R.P. (dBm)
2412.00000	20	6.92

Modulation: 802.11n40

**Results**

Freq (MHz)	BW (MHz)	E.I.R.P. (dBm)
2422.00000	40	8.21


**Verdict**

Pass

**Attachments**


**Frequency MHz = 2412.00000, Equipment Type = Digital Transmission System (DTS), Bandwidth MHz = 1, Modulation = 802.11n , Number of Transmission Chains = 2,**

**Images:**

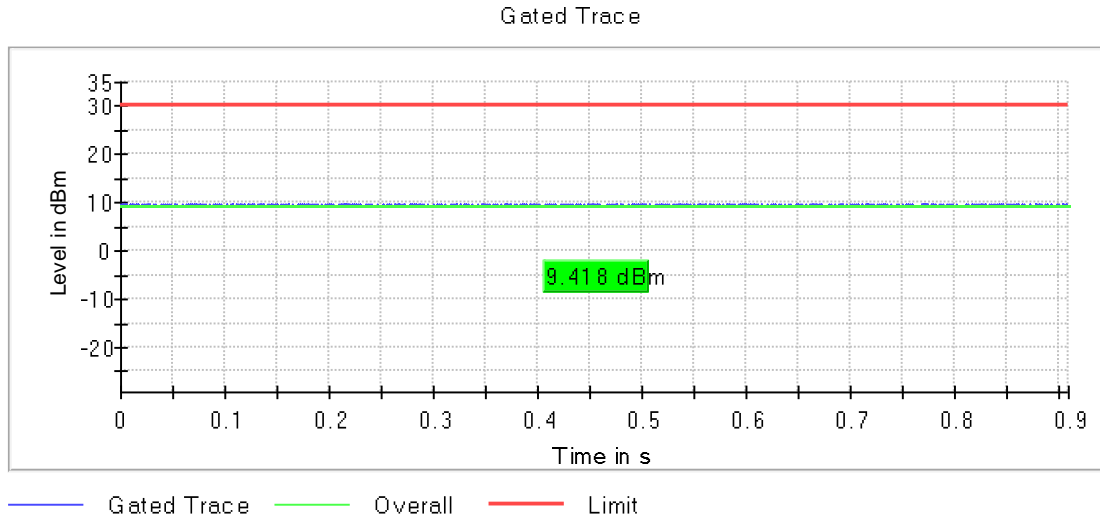

**Frequency MHz = 2422.00000, Equipment Type = Digital Transmission System (DTS), Bandwidth MHz = 1, Modulation = 802.11n , Number of Transmission Chains = 2,**

**Images:**

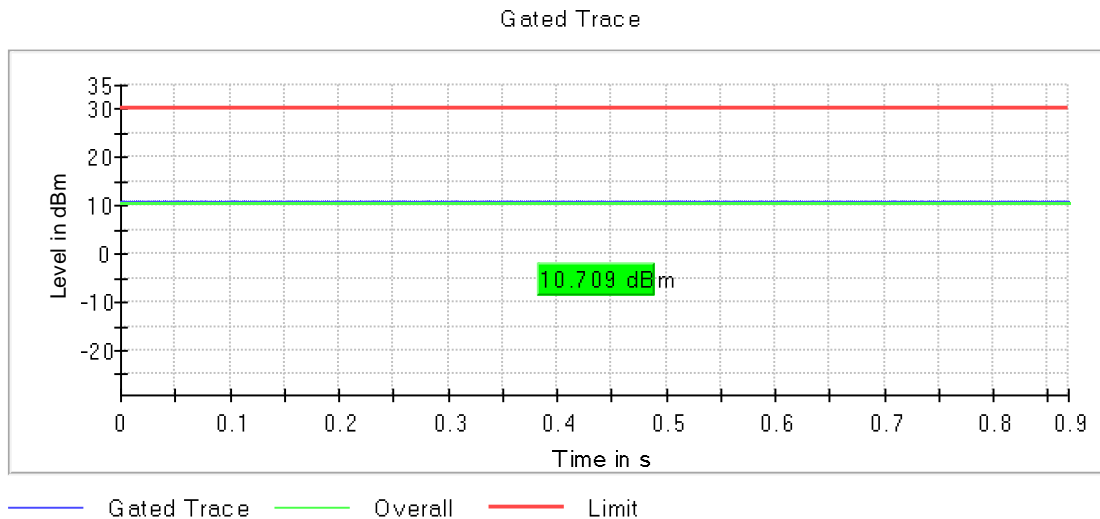

Antenna gain: -2.5 dBi

Modulation: 802.11ax HE20 – Full RU

**Results**

Freq (MHz)	BW (MHz)	E.I.R.P. (dBm)
2412.00000	20	9.05

Modulation: 802.11ax HE40 – Full RU

**Results**

Freq (MHz)	BW (MHz)	E.I.R.P. (dBm)
2422.00000	40	8.24


**Verdict**

Pass

**Attachments**


Frequency MHz = 2412.00000, Equipment Type = Digital Transmission System (DTS), Bandwidth MHz = 1, Modulation = 802.11ax HE SS1 MCS 8 (OFDM MCS8), Number of Transmission Chains = 2,

**Images:**

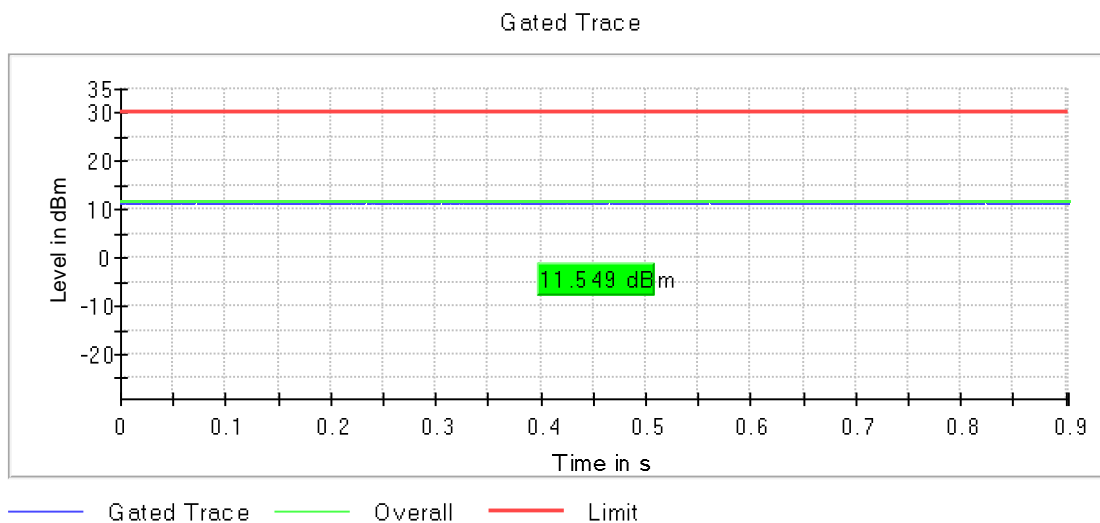

Frequency MHz = 2422.00000, Equipment Type = Digital Transmission System (DTS), Bandwidth MHz = 40,  
 Modulation = 802.11ax HE SS1 MCS 8, Number of Transmission Chains = 2,

Images:

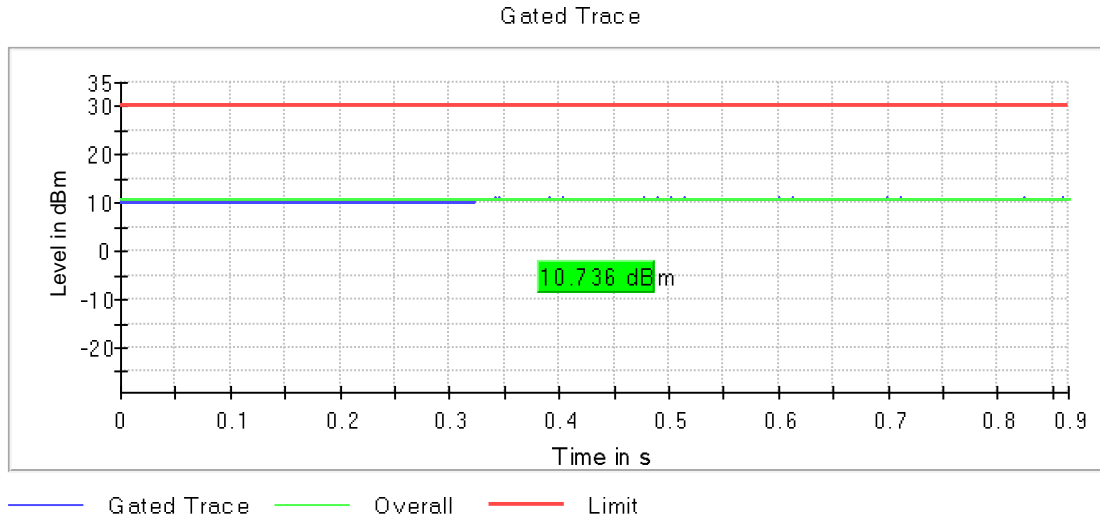

OSP PowerMeter settings

Setting	Instrument Value
Measurement Time	1.000 s
Points	100000
Time resolution	1.000 $\mu$ s

**RSS-247 5.5 / FCC 15.247 (d) EMISSION LIMITATIONS RADIATED (TRANSMITTER)**

**Limits**

Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c) / RSS-Gen):

Frequency Range (MHz)	Field strength (µV/m)	Field strength (dBµV/m)	Measurement distance (m)
0.009-0.490	2400/F(kHz)	-	300
0.490-1.705	24000/F(kHz)	-	30
1.705 - 30.0	30	-	30
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
960 - 25000	500	54	3

The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz Radiated emission limits in these three bands are based on measurements employing an average detector.

For average radiated emission measurements above 1000 MHz, there is also a limit corresponding to 20 dB above the indicated values in the table is specified when measuring with peak detector function.

RSS-247. Attenuation below the general field strength limits specified in RSS-Gen is not required


**Verdict**

Pass

**Results**

**Frequency range 30 MHz – 1000 MHz**

The spurious emissions below 1 GHz do not depend on the operating channel and mode selected in the EUT.

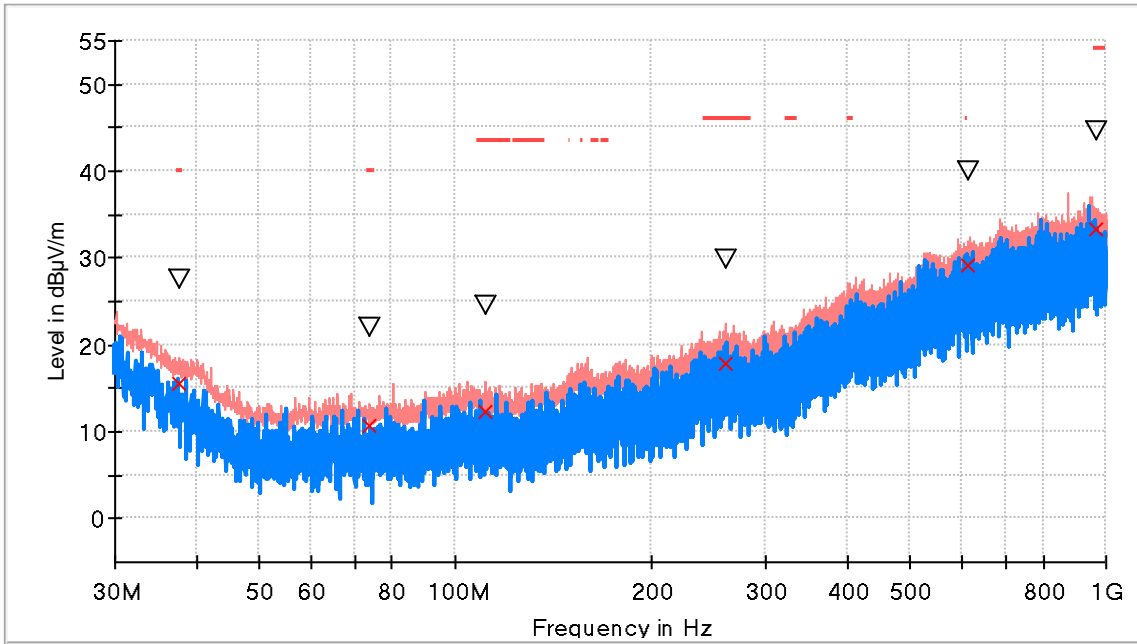

- PK+\_MAXH
- PK+\_CLRWR
- TX limits to Spurious Emission FCC15.247 (30MHz to 1GHz) Restricted Bands QPK Limit
- ▽ MaxPeak-PK+ (Single)
- × QuasiPeak-QPK (Single)

Frequency (MHz)	MaxPeak (dBµV/m)	QuasiPeak (dBµV/m)	Pol	Margin - QPK (dB)	Limit - QPK (dBµV/m)
37.760000	27.5	15.5	V	24.5	40.0
73.989500	22.1	10.8	V	29.3	40.0
111.431500	24.5	12.2	V	31.3	43.5
259.890000	30.0	17.9	H	28.1	46.0
612.242500	39.9	29.1	V	16.9	46.0
968.135500	44.6	33.2	V	20.8	54.0

### Frequency range 1 GHz – 26 GHz


The results for the 802.11b worst operation mode selected for this range are shown below.

The results in the next tables show the maximum measured levels in the 1-26 GHz range including the restricted bands 2.31-2.39 GHz and 2.4835-2.5 GHz (see next plots). Please see the following results for worst operation mode selected for this range (1 Mbps).

Modulation: 802.11b

### Frequency range: 1 – 18 GHz

#### Lowest Channel

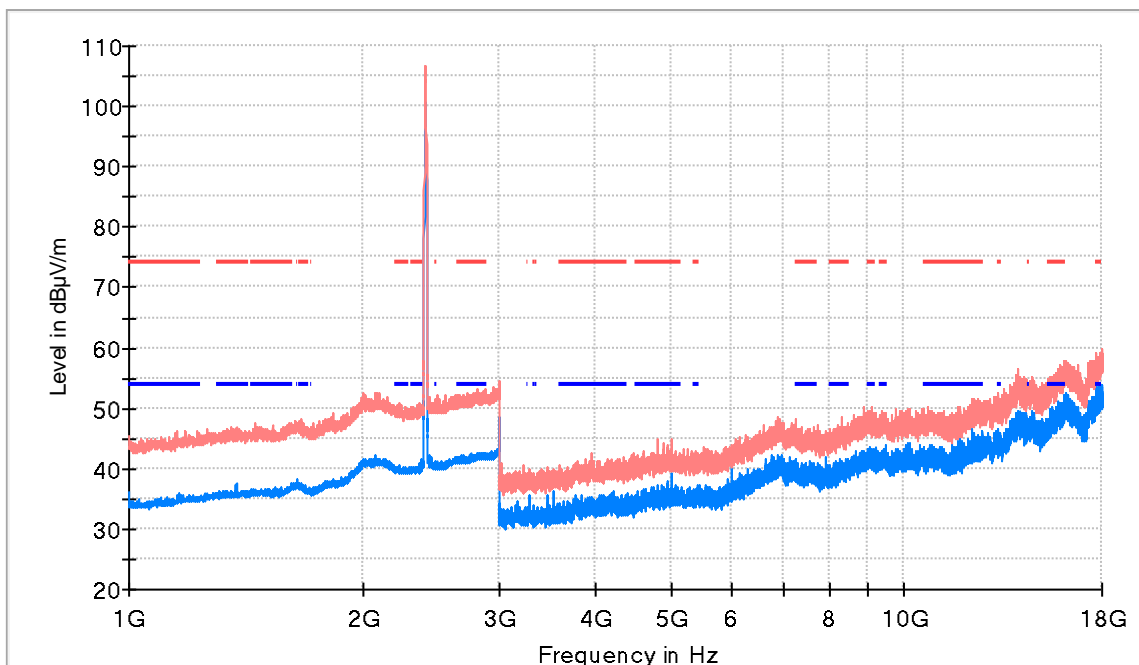


- AVG\_MAXH
- PK+ MAXH
- TX limits to Spurious Emission FCC15.247 (1-26 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.247 (1-26 GHz) Restricted Bands AVG Limit

Frequency (MHz)	PK+ MAXH (dBµV/m)	AVG_MAXH (dBµV/m)	PoI	Margin - AVG (dB)	Limit - AVG (dBµV/m)	Comment
2413.000000	106.8	100.7	H	---	---	Fundamental
2877.000000	53.1	41.6	H	12.4	54.0	
17950.000000	59.8	52.2	H	1.8	54.0	



**Frequency range 18 - 26 GHz**

**Lowest Channel**

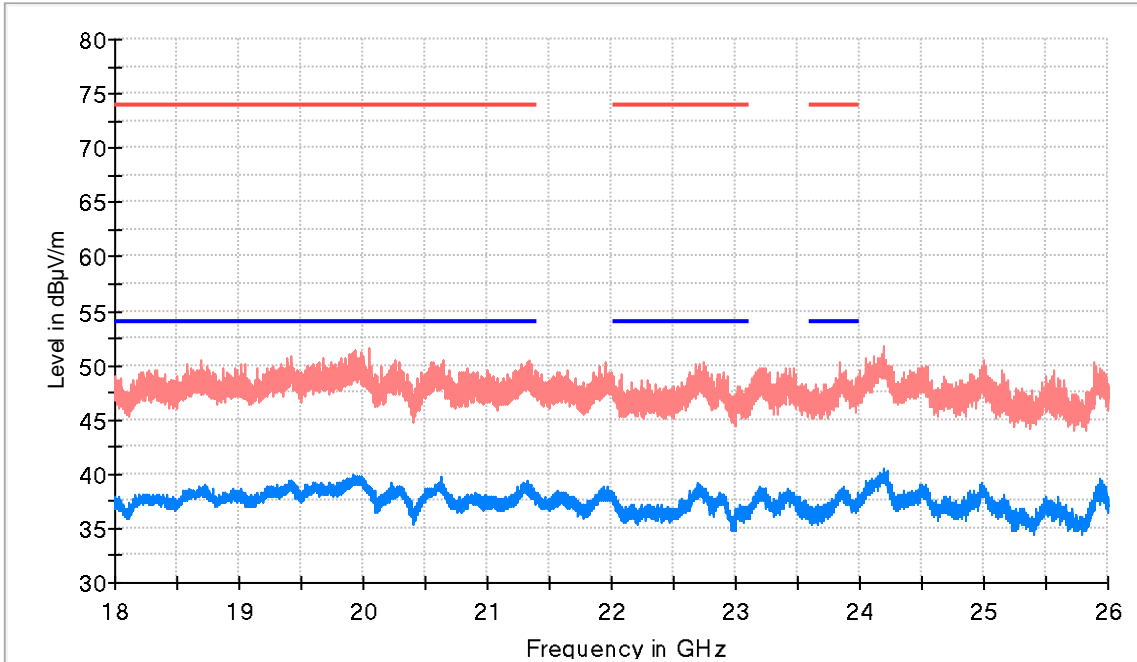


- AVG\_MAXH
- PK+\_MAXH
- TX limits to Spurious Emission FCC15.247 (1-26 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.247 (1-26 GHz) Restricted Bands AVG Limit

Frequency (MHz)	PK+_MAXH (dBµV/m)	AVG_MAXH (dBµV/m)	Pol	Margin - AVG (dB)	Limit - AVG (dBµV/m)
20048.000000	51.6	38.7	V	15.3	54.0
22735.500000	50.4	38.6	H	15.4	54.0
23839.000000	50.3	38.5	H	15.5	54.0

**Restricted Bands (2.31 GHz - 2.5 GHz)**

**Lowest Channel**

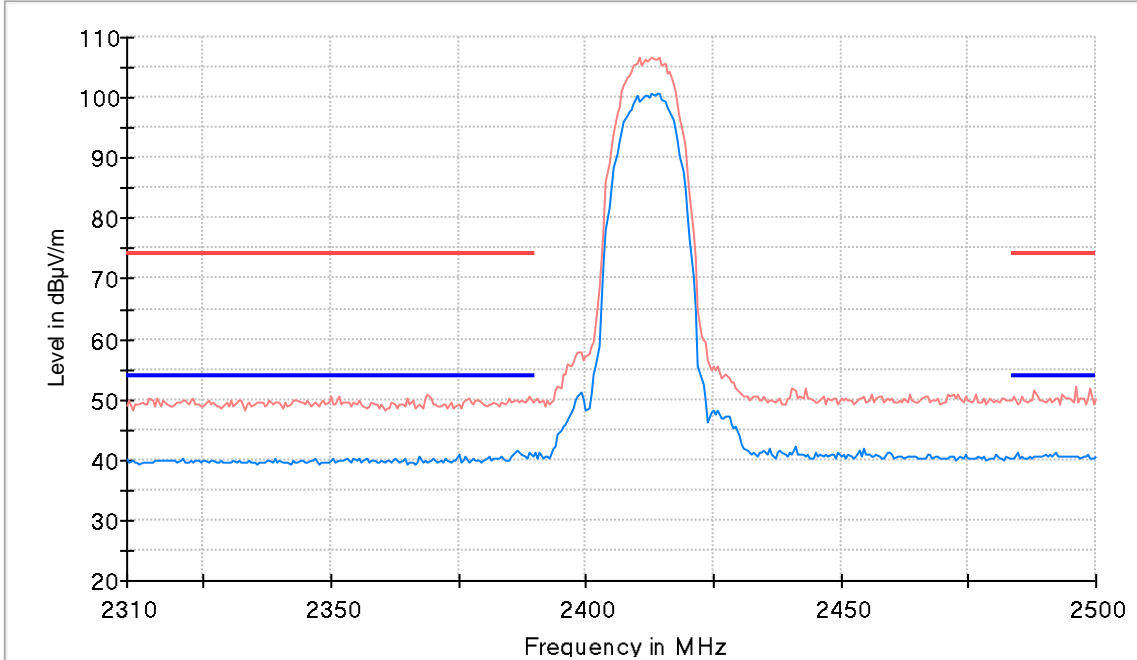

- AVG\_MAXH
- PK+\_MAXH
- TX limits to Spurious Emission FCC15.247 (1-26 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.247 (1-26 GHz) Restricted Bands AVG Limit

**Measurements**

Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
30 MHz - 1 GHz	48.5 kHz	PK+	100 kHz	1 s	20 dB
1 GHz - 3 GHz	500 kHz	PK+ ; AVG	1 MHz	0.1 s	20 dB
3 GHz - 18 GHz	500 kHz	PK+ ; AVG	1 MHz	0.1 s	20 dB
18 GHz - 26 GHz	500 kHz	PK+ ; AVG	1 MHz	1 s	20 dB