



Test Report Serial Number: **45461670 R2.0**
 Test Report Date: **812 July 2021**
 Project Number: **1540**

SAR Test Report - New Certification

Applicant:



Garmin International Inc.
 1200 East 151 St.
 Olathe, KS, 66062
 USA

Maximum Reported 1g SAR			
FCC	BODY UNII	1.52	W/kg
	BODY DSS	0.05	
	Sum of Simultaneous	1.57	
ISED	BODY UNII	1.52	
	BODY DSS	0.06	
	Sum of Simultaneous	1.58	
General Pop. Limit:		1.60	

FCC ID:

IPH-04158

Product Model Number / HVIN

A04158

ISED Registration Number

1792A-04158

Product Name / PMN

A04158

In Accordance With:

FCC 47 CFR §2.1093


Radiofrequency Radiation Exposure Evaluation: Portable Devices

IC RSS-102 Issue 5

Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)

Approved By:

Ben Hewson, President
 Celltech Labs Inc.
 21-364 Lougheed Rd.
 Kelowna, BC, V1X 7R8
 Canada



Test Lab Certificate: 2470.01



IC Registration 3874A-1



FCC Registration: CA3874

This report shall not be reproduced in any form without the expressed written consent of Celltech Labs Inc.

Table of Contents

1.0 DOCUMENT CONTROL	4
2.0 CLIENT AND DEVICE INFORMATION	5
3.0 SCOPE OF EVALUATION	6
4.0 NORMATIVE REFERENCES	7
5.0 STATEMENT OF COMPLIANCE	8
6.0 SAR MEASUREMENT SYSTEM	9
7.0 RF CONDUCTED POWER MEASUREMENT	10
TABLE 7.0 CONDUCTED POWER MEASUREMENTS WLAN 2.4GHZ 802.11	10
TABLE 7.1 CONDUCTED POWER MEASUREMENTS WiFi 5GHZ – UNII-1.....	11
TABLE 7.2 CONDUCTED POWER MEASUREMENTS WiFi 5GHZ – UNII-3.....	11
TABLE 7.3 CONDUCTED POWER MEASUREMENTS	12
8.0 NUMBER OF TEST CHANNELS (N_c) AND CONFIGURATIONS	13
TABLE 8.1 ANTENNA DISTANCES	14
TABLE 8.2 BODY SAR TEST EXCLUSION WORKCHART	15
9.0 SAR MEASUREMENT SUMMARY	16
TABLE 9.0: MEASURED RESULTS	16
10.0 SCALING OF MAXIMUM MEASURED SAR	17
TABLE 10.0 SAR SCALING	17
TABLE 10.1 SIMULTANEOUS SAR.....	18
11.0 SAR EXPOSURE LIMITS	20
TABLE 11.0 EXPOSURE LIMITS	20
12.0 DETAILS OF SAR EVALUATION	21
12.0 DAY LOG.....	21
12.1 DUT SETUP AND CONFIGURATION.....	22
12.2 DUTY CYCLE EVALUATION	23
12.3 DUT POSITIONING	26
12.4 GENERAL PROCEDURES AND REPORT	27
12.5 FLUID DIELECTRIC AND SYSTEMS PERFORMANCE CHECK.....	28
12.6 SCAN RESOLUTION 100MHZ TO 2GHZ.....	28
12.7 SCAN RESOLUTION 2GHZ TO 3GHZ.....	29
12.8 SCAN RESOLUTION 5GHZ TO 6GHZ.....	29
13.0 MEASUREMENT UNCERTAINTIES	30
TABLE 13.0 MEASUREMENT UNCERTAINTY	30
TABLE 13.1 CALCULATION OF DEGREES OF FREEDOM	31
14.0 FLUID DIELECTRIC PARAMETERS	32
TABLE 14.0 FLUID DIELECTRIC PARAMETERS 2450MHZ BODY TSL	32
TABLE 14.1 FLUID DIELECTRIC PARAMETERS 5250MHZ BODY TSL	39
TABLE 14.2 FLUID DIELECTRIC PARAMETERS 5750MHZ BODY TSL	40

15.0 SYSTEM VERIFICATION TEST RESULTS.....	42
TABLE 15.1 SYSTEM VERIFICATION RESULTS 2450MHZ HEAD TSL	42
TABLE 15.2 SYSTEM VERIFICATION RESULTS 2450MHZ HEAD TSL	43
TABLE 15.3 SYSTEM VERIFICATION RESULTS 2450MHZ HEAD TSL	44
TABLE 15.4 SYSTEM VERIFICATION RESULTS 5250MHZ HEAD TSL	45
TABLE 15.5 SYSTEM VERIFICATION RESULTS 5750MHZ HEAD TSL	46
16.0 SYSTEM VALIDATION SUMMARY.....	47
TABLE 16.0 SYSTEM VALIDATION SUMMARY	47
17.0 MEASUREMENT SYSTEM SPECIFICATIONS.....	48
TABLE 17.0 MEASUREMENT SYSTEM SPECIFICATIONS	48
18.0 TEST EQUIPMENT LIST	50
TABLE 18.0 EQUIPMENT LIST AND CALIBRATION	50
19.0 FLUID COMPOSITION.....	51
TABLE 19.0 FLUID COMPOSITION 2450MHZ BODY TSL.....	51
TABLE 19.1 FLUID COMPOSITION 5250MHZ BODY TSL.....	51
APPENDIX A – SYSTEM VERIFICATION PLOTS.....	52
APPENDIX B – MEASUREMENT PLOTS OF MAXIMUMUM MEASURED SAR.....	62
APPENDIX C - SETUP PHOTOS	66
APPENDIX D – DUT AND ACCESSORY PHOTOS.....	68
APPENDIX E – PROBE CALIBRATION	71
APPENDIX F – DIPOLE CALIBRATION.....	72
APPENDIX G - PHANTOM.....	73

1.0 DOCUMENT CONTROL

Revision History

Samples Tested By:		Trevor Whillock / Ben Hewson	Date(s) of Evaluation:		Mar 31, Apr 1,7, May 28-31, Jun 29, 2021
Report Prepared By:		Ben Hewson	Report Reviewed By:		Art Voss
Report Revision	Description of Revision	Revised Section	Revised / Issued By	Revision Date	
0.0	Draft	n/a	Ben Hewson	7 July 2021	
1.0	Initial Release	n/a	Ben Hewson	8 July 2021	
2.0	Revised Scaling Table	10.0	Art Voss	12 July 2021	

2.0 CLIENT AND DEVICE INFORMATION

Client Information

Applicant Name	Garmin International Inc.
Applicant Address	1200 East 151 St.
	Olathe, KS,66062
	USA

DUT Information

Device Identifier(s):	FCC ID:	IPH-04158
	IC:	1792A-04158
Type of Equipment:	Digital Transmission System (DTS) FCC Part 15, RSS 247	
	Spread Spectrum Transmitter (DSS) FCC Part 15	
	Unlicensed National Information Infrastructure (NII) FCC Part 15	
Device Model(s) / HVIN:	A04158	
Device Marketing Name / PMN:	A04158	
Test Sample Serial No.:	3364020408	
Transmit Frequency Range:	WiFi: 2412 - 2462 MHz	
	WiFi UNII 1: 5200 - 5240 MHz	
	WiFi UNII 3: 5745-5825 MHz	
	BT: 2402 - 2480 MHz	
Number of Channels:	See Section 7.0	
Manuf. Max. Avg Rated Output Power:	WiFi 2.4GHz: 802.11b: 14.77dBm /802.11g: 14.62dBm /802.11n:14.47dBm	
	WiFi 5 GHz UNII-1 802.11a: 13.98dBm / 802.11n: 13.80dBm/ 802.11n40: 13.42dBm/802.11ac80: 9.03dBm	
	WiFi 5 GHz UNII-3 802.11a: 13.98dBm / 802.11n: 13.80dBm/ 802.11n40: 13.62dBm/802.11ac80: 13.42dBm	
	BT:GFSK: 3.01dBm / PI/4-DQPSK: 3.01dBm / 8-DPSK: 3.01dBm	
	BLE: GFSK: 3.01 dBm	
Modulation:	WiFi 802.11b/g/n: DSSS, OFDM, MCS0-7	
	WiFi 802.11 a/ac: OFDM,MCS0-7	
	BT: GFSK, PI/4-DQPSK, 8-DPSK	
	BLE: GMSK	
DUT Power Source:	5V USB, Internal Li-ion battery	
Deviation(s) from standard/procedure:	None	

3.0 SCOPE OF EVALUATION

This Certification Report was prepared on behalf of:

Garmin International Inc.

, (the '*Applicant*'), in accordance with the applicable Federal Communications Commission (FCC) CFR 47 and Innovation, Scientific and Economic Development (ISED) Canada rules parts and regulations (the '*Rules*'). The scope of this investigation was limited to only the equipment, devices and accessories (the '*Equipment*') supplied by the *Applicant*. The tests and measurements performed on this *Equipment* were only those set forth in the applicable *Rules* and/or the Test and Measurement Standards they reference. The *Rules* applied and the Test and Measurement Standards used during this evaluation appear in the Normative References section of this report. The limits set forth in the technical requirements of the applicable *Rules* were applied to the measurement results obtained during this evaluation and, unless otherwise noted, these limits were used as the Pass/Fail criteria. The Pass/Fail statements made in this report apply to only the tests and measurements performed on only the *Equipment* tested during this evaluation. Where applicable and permissible, information including test and measurement data and/or results from previous evaluations of same or similar equipment, devices and/or accessories may be cited in this report.

As per FCC 47 CFR Part §2.1091 and §2.1093, an RF Exposure evaluation report is required for this *Equipment* and the results of the RF Exposure evaluation appear in this report.

The A04158, FCC ID: IPH-04158 ISEDC ID: 1792A-04158 is a hand held transceiver with two transmitters, one that operates in the 5GHz WiFi frequency band and the other in the 2.4GHz WiFi and Bluetooth frequency band. The transceiver is capable of simultaneous transmission between the 5GHz WiFi and Bluetooth. The device is intended for General Population Use. The product operates from an internal proprietary Li-ion rechargeable battery which can be connected to a compliant USB interface port, AC or DC adapter for charging. Test samples provided by the manufacturer were capable of transmitting at select frequencies and modulations preset by the manufacturer. An additional antenna modification was prepared for one sample allowing the ability to connect test equipment for antenna port conducted power analysis. The DUT was evaluated for SAR at the maximum conducted output power level, preset by the manufacturer and in accordance with the procedures described in IEC/IEEE 62209-1528, IEEE 1528, IEC 62209-2, FCC KDB 865646, 447498, 248227 and RSS 102.

Application:

This is an application for a new device certification.

Scope:

Due to the nature of the device, the scope of this evaluation is to evaluate the SAR for intended and non-intended applications. It will include evaluation of the 2.4 GHz transmitter for all required RF exposure configurations and accessories types. The analysis of the Standalone Transmission SAR is found in Section 11.0 of this report.

The Test Plan developed for this evaluation is based on the required test channels and configurations which produced the highest worst case SAR and where applicable, SAR test reduction and/or SAR test exclusion may be utilized. The DUT was evaluated for SAR at the maximum tune up tolerance and conducted output power level, preset by the manufacturer and in accordance with the procedures described in IEC/IEEE 62209-1528, IEEE 1528, IEC 62209-1, IEC 62209-2, FCC 447498, and RSS 102

4.0 NORMATIVE REFERENCES

Normative References*	
ANSI / ISO 17025:2017	General Requirements for competence of testing and calibration laboratories
FCC CFR Title 47 Part 2 Title 47: Part 2.1093:	Code of Federal Regulations Telecommunication Radiofrequency Radiation Exposure Evaluation: Portable Devices
Health Canada Safety Code 6 (2015)	Limits of Human Exposure to Radiofrequency Electromagnetic Energy in the Frequency Range from 3kHz to 300GHz
Industry Canada Spectrum Management & Telecommunications Policy RSS-102 Issue 5:	Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)
IEC International Standard /IEEE International Committee on Electromagnetic Safety IEC/IEEE 62209-1528-2020:	Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Part 1528; Human models, instrumentation, and procedures (Frequency range of 4 MHz to 10 GHz)
IEEE International Committee on Electromagnetic Safety IEEE 1528-2013:	IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
IEC International Standard IEC 62209-2 2010	Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Part 2
FCC KDB KDB 865664 D01v01r04	SAR Measurement Requirements for 100MHz to 6GHz
FCC KDB KDB 447498 D01v06	Mobile and Portable Devices RF Exposure Procedures and Equipment Authorization Policies
FCC KDB KDB 248227 D01v02r02	SAR Test Guidance for IEEE 802.11 (WiFi) Transmitters
* When the issue number or issue date is omitted, the latest version is assumed.	

5.0 STATEMENT OF COMPLIANCE

This measurement report demonstrates that samples of the product model(s) were evaluated for Specific Absorption Rate (SAR) on the date(s) shown, in accordance with the Measurement Procedures cited and were found to comply with the Standard(s) Applied based on the Exposure Limits of the Use Group indicated for which the product is intended to be used.

Applicant: Garmin International Inc.	Model / HVIN: A03653	
Standard(s) Applied: FCC 47 CFR §2.1093 Health Canada's Safety Code 6	Measurement Procedure(s): FCC KDB 865664, FCC KDB 447498, FCC KDB248227, FCC KDB 941225 Industry Canada RSS-102 Issue 5 IEC/IEEE 62209-1528, IEEE Standard 1528-2013, IEC 62209-2	
Reason For Issue: <input checked="" type="checkbox"/> New Certification <input type="checkbox"/> Class I Permissive Change <input type="checkbox"/> Class II Permissive Change	Use Group: <input checked="" type="checkbox"/> General Population / Uncontrolled <input type="checkbox"/> Occupational / Controlled	Limits Applied: <input checked="" type="checkbox"/> 1.6W/kg - 1g Volume <input type="checkbox"/> 8.0W/kg - 1g Volume 4.0W/kg - 10g Volume
Reason for Change: Original Filing	Date(s) Evaluated: Mar 31, Apr 1,7, May 28-31, Jun 29, 2021	

The results of this investigation are based solely on the test sample(s) provided by the applicant which was not adjusted, modified or altered in any manner whatsoever except as required to carry out specific tests or measurements. A description of the device, operating configuration, detailed summary of the test results, methodologies and procedures used during this evaluation, the equipment used and the various provisions of the rules are included in this test report.

I attest that the data reported herein is true and accurate within the tolerance of the Measurement Instrument Uncertainty; that all tests and measurements were performed in accordance with accepted practices or procedures; and that all tests and measurements were performed by me or by trained personnel under my direct supervision. The results of this investigation are based solely on the test sample(s) provided by the client which were not adjusted, modified or altered in any manner whatsoever, except as required to carry out specific tests or measurements. This test report has been completed in accordance with ISO/IEC 17025.



Art Voss, P.Eng.
Technical Manager
Celltech Labs Inc.

07 July 2021

Date



6.0 SAR MEASUREMENT SYSTEM

SAR Measurement System

Celltech Labs Inc. SAR measurement facility employs a Dosimetric Assessment System (DASY™) manufactured by Schmid & Partner Engineering AG (SPEAG™) of Zurich, Switzerland. The DASY6 measurement system is comprised of the measurement server, a robot controller, a computer, a near-field probe, a probe alignment sensor, an Elliptical Planar Phantom (ELI) phantom and a specific anthropomorphic mannequin (SAM) phantom for Head and/or Body SAR evaluations. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF). A cell controller system contains the power supply, robot controller and a teach pendant (Joystick) to control the robot's servo motors. The Staubli robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical form the DAE to digital electronic signal and transfers data to the DASY6 measurement server. The DAE4 utilizes a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16-bit AD-converter, a command decoder and a control logic unit. Transmission to the DASY6 measurement server is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe-mounting device includes two different sensor systems for frontal and sidewise probe contacts. The sensor systems are also used for mechanical surface detection and probe collision detection. The robot utilizes a controller with built in VME-bus computer.



DASY 6 SAR System with SAM Phantom



DASY 6 Measurement Controller

7.0 RF CONDUCTED POWER MEASUREMENT

Table 7.0 Conducted Power Measurements WLAN 2.4GHz 802.11

Conducted Power Measurements											
Channel	Frequency	Measured Power	Measured Power	Rated Power	Rated Power	Delta	SAR Test	Duty Cycle	Crest factor	Mode	Modulation
	(MHz)	(dBm)	(dBm)	(dBm)	(W)		(dB)				
1	2412	16.20	13.30	14.77	0.030	-1.47	-	95.5	1.048	WLAN 2.4G	DSS-1Mbps
2	2417	16.22	13.32	14.77	0.030	-1.45	-	95.5	1.048		DSS-1Mbps
3	2422	16.27	13.37	14.77	0.030	-1.40	-	95.5	1.048		DSS-1Mbps
4	2427	16.26	13.36	14.77	0.030	-1.41	-	95.5	1.048		DSS-1Mbps
5	2432	16.22	13.32	14.77	0.030	-1.45	-	95.5	1.048		DSS-1Mbps
6	2437	16.26	13.36	14.77	0.030	-1.41	-	95.5	1.048		DSS-1Mbps
7	2442	16.23	13.33	14.77	0.030	-1.44	-	95.5	1.048		DSS-1Mbps
8	2447	16.21	13.31	14.77	0.030	-1.46	-	95.5	1.048		DSS-1Mbps
9	2452	16.16	13.26	14.77	0.030	-1.51	-	95.5	1.048		DSS-1Mbps
10	2457	16.26	13.36	14.77	0.030	-1.41	-	95.5	1.048		DSS-1Mbps
11	2462	16.17	13.27	14.77	0.030	-1.50	-	95.5	1.048		DSS-1Mbps
3	2422	16.30	13.40	14.77	0.030	-1.37	-	92.4	1.082	DSS-2Mbps	
		17.56	14.66	14.77	0.030	-0.11	-	83.8	1.194	DSS-5.5Mbps	
		17.62	14.72	14.77	0.030	-0.05	Y	88.3	1.133	DSS-11Mbps	
		16.95	14.62	14.62	0.030	0.00	-	96.4	1.037	OFDM-6Mbps	
		15.53	13.20	14.62	0.030	-1.42	-	79.6	1.257	OFDM-24Mbps	
		14.66	12.33	14.62	0.030	-2.29	-	65.9	1.517	OFDM-54Mbps	
		16.88	14.47	14.47	0.030	0.00	-	87.2	1.147	MCS-0	
6	2437	14.41	12.00	14.47	0.030	-2.47	-	53.2	1.881	MCS-7	
		16.37	13.47	14.77	0.030	-1.30	-	92.4	1.082	DSS-2Mbps	
		17.56	14.66	14.77	0.030	-0.11	-	83.8	1.194	DSS-5.5Mbps	
10	2457	17.61	14.71	14.77	0.030	-0.06	Y	88.3	1.133	DSS-11Mbps	
		16.21	13.31	14.77	0.030	-1.46	-	92.4	1.082	DSS-2Mbps	
		17.44	14.54	14.77	0.030	-0.23	-	83.8	1.194	DSS-5.5Mbps	
		17.67	14.77	14.77	0.030	0.00	Y	88.3	1.133	DSS-11Mbps	
		17.10	14.20	14.77	0.030	-0.57	-	96.4	1.037	OFDM-6Mbps	
		15.63	12.73	14.77	0.030	-2.04	-	79.6	1.257	OFDM-24Mbps	
		14.91	12.01	14.77	0.030	-2.76	-	65.9	1.517	OFDM-54Mbps	
		16.90	14.00	14.77	0.030	-0.77	-	79.6	1.257	MCS-0	
14.36	11.46	14.77	0.030	-3.31	-	65.9	1.517	MCS-7			

Table 7.1 Conducted Power Measurements WiFi 5GHz – UNII-1

Conducted Power Measurements												
Channel	Frequency	Measured Power	Rated Power	Rated Power	Delta	SAR Test Channel	Duty Cycle	Crest Factor	Mode	Modulation		
	(MHz)	(dBm)	(dBm)	(W)	(dB)	(Y/N)						
36	5180	12.42	13.98	0.025	-1.56	-	96.4	1.037	WiFi 5G	802.11a - UNII-1	20MHz	OFDM-6Mbps
36	5180	12.14	13.98	0.025	-1.84	-	94.2	1.062				OFDM-9Mbps
36	5180	11.24	13.98	0.025	-2.74	-	80.4	1.244				OFDM-24Mbps
36	5180	10.39	13.98	0.025	-3.59	-	66.5	1.504				OFDM-54Mbps
36	5180	11.62	13.98	0.025	-2.36	-	88.1	1.135				MCS-0
36	5180	10.58	13.98	0.025	-3.40	-	68.7	1.456				MCS-3
36	5180	10.24	13.98	0.025	-3.74	-	53.4	1.873				MCS-7
40	5200	12.45	13.98	0.030	-1.53	-	96.4	1.037				OFDM-6Mbps
44	5220	12.68	13.98	0.030	-1.30	Y	96.4	1.037				OFDM-6Mbps
48	5240	12.58	13.98	0.030	-1.40	-	96.4	1.037				OFDM-6Mbps
44	5220	12.60	13.98	0.030	-1.38	-	94.2	1.062		OFDM-9Mbps		
44	5220	11.68	13.98	0.030	-2.30	-	80.4	1.244		OFDM-24Mbps		
36	5180	11.67	13.80	0.024	-2.13	-	88.3	1.133		802.11n - UNII-1	40MHz	MCS-0
36	5180	10.64	13.80	0.024	-3.16	-	68.9	1.451				MCS-3
36	5180	9.43	13.80	0.024	-4.37	-	53.7	1.862				MCS-7
40	5200	11.79	13.80	0.024	-2.01	-	88.3	1.133				MCS-0
44	5220	11.98	13.80	0.024	-1.82	-	88.3	1.133				MCS-0
48	5240	11.91	13.80	0.024	-1.89	-	88.3	1.133				MCS-0
38	5190	11.44	13.42	0.022	-1.98	-	79.6	1.256		802.11n - UNII-1	40MHz	MCS-0
46	5230	11.55	13.42	0.022	-1.87	-	44.9	2.227				MCS-0
42	5210	10.64	9.03	0.008	1.61	-	67.6	1.479	802.11ac - UNII-1	80MHz	MCS-0	

Table 7.2 Conducted Power Measurements WiFi 5GHz – UNII-3

Conducted Power Measurements												
Channel	Frequency	Measured Power	Rated Power	Rated Power	Delta	SAR Test Channel	Duty Cycle	Crest Factor	Mode	Modulation		
	(MHz)	(dBm)	(dBm)	(W)	(dB)	(Y/N)						
149	5745	12.49	13.98	0.025	-1.49	Y	96.4	1.037	WiFi 5G	802.11a - UNII-3	20MHz	OFDM-6Mbps
149	5745	12.28	13.98	0.025	-1.70	-	94.2	1.062				OFDM-9Mbps
149	5745	11.50	13.98	0.025	-2.48	-	80.4	1.244				OFDM-24Mbps
149	5745	10.92	13.98	0.025	-3.06	-	66.5	1.504				OFDM-54Mbps
149	5745	11.89	13.98	0.025	-2.09	-	88.1	1.135				MCS-0
149	5745	11.85	13.98	0.025	-2.13	-	68.7	1.456				MCS-3
149	5745	10.82	13.98	0.025	-3.16	-	53.4	1.873				MCS-7
157	5785	11.68	13.98	0.030	-2.30	-	96.4	1.037				OFDM-6Mbps
165	5825	11.67	13.98	0.030	-2.31	-	96.4	1.037				OFDM-6Mbps
149	5745	11.82	13.80	0.024	-1.98	-	88.3	1.133				802.11n - UNII-3
149	5745	10.67	13.80	0.024	-3.13	-	68.9	1.451		MCS-3		
149	5745	10.76	13.80	0.024	-3.04	-	53.7	1.862		MCS-7		
157	5785	11.55	13.80	0.024	-2.25	-	88.3	1.133		MCS-0		
165	5825	11.68	13.80	0.024	-2.12	-	88.3	1.133		MCS-0		
151	5755	11.58	13.62	0.022	-2.04	-	88.3	1.133		MCS-0		
159	5795	9.53	13.62	0.022	-4.09	-	88.3	1.133		802.11ac - UNII-1	80MHz	MCS-0
155	5775	10.60	13.42	0.008	-2.82	-	88.3	1.133				MCS-0

Table 7.3 Conducted Power Measurements

Conducted Power Measurements												
Channel	Frequency (MHz)	Measured Power (dBm)	Rated Power (dBm)	Rated Power (mW)	Delta (dB)	SAR Test Channel (Y/N)	Duty Cycle	Crest Factor	Mode	Modulation		
2	2402	3.01	3.01	2.00	0.00	Y	29.8	3.4	BT/BLE	BT(GFSK)		
41	2441	2.82	3.01	2.00	-0.19	-						
80	2480	2.34	3.01	2.00	-0.67	-						
2	2402	2.57	3.01	2.00	-0.44	-	30.5	3.3		BT/BLE	BT(PI/4-DQPSK)	
41	2441	2.46	3.01	2.00	-0.55	-						
80	2480	2.34	3.01	2.00	-0.67	-						
2	2402	2.54	3.01	2.00	-0.47	-	30.5	3.3			BT/BLE	8-DPSK
41	2441	2.43	3.01	2.00	-0.58	-						
80	2480	2.02	3.01	2.00	-0.99	-						

The rated power and tolerance are stated for typical transmission modes and data rates. Some modes and data rates may produce lower than rated conducted power levels. Power measurements taken across the various channels, modes and data rates did not produce levels in excess of the Rated Power plus Tolerance. SAR was evaluated using the power level setting specified by the manufacture to be the max output power and produce the most conservative SAR. SAR was evaluated at the maximum average tune up tolerance. See section 2.0 Client and Device Information for details. The reported SAR was not scaled down.

8.0 NUMBER OF TEST CHANNELS (N_c) AND CONFIGURATIONS

This device is intended to be mounted on a vehicle dashboard; optionally, the device can be hand-held. Due to the physical dimensions of the device and as it may transmit within the user's apparel, or used in contact with the user's body; the device was evaluated to Body SAR limits. Body SAR Limits are more stringent than Extremity SAR limits. Additional SAR measurements were made where the transmitter antenna location to an edge was sufficiently near that it was required in accordance to the FCC KDB guidance. The back side of the device was found to be the worst case setup configuration and produced the highest SAR. The back side of the device was chosen as the primary test position. Note: Only worst case test data from the preliminary evaluation was reported. FCC KDB 941225D07V01r02 was used as guidance for the selection of test positions for SAR evaluation. Please see section 12.1 for details.

As per FCC KDB 248227, the required 802.11 test channels are Ch1, Ch6 and Ch 11; however, higher conducted output power was found on channel 3 and 10 in the lower 2.4GHz WIFI frequency band. As a result the channels selected for SAR evaluation included Ch3, Ch6, and Ch10.

When applicable, SAR test reduction methods may be utilized.

802.11b DSSS SAR test reduction is determined according to the following:

- a) When the reported SAR of the highest measured maximum output power channel is \leq to 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- b) When the reported SAR is $>$ 0.8 W/kg, SAR is required for that exposure configuration using the next highest output power channel. When any reported SAR is $>$ 1.2 W/Kg, SAR is required for the third channel.

2.4 GHz 802.11g/n OFDM SAR Test Exclusion Requirements

- a) When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.
- b) When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is \leq 1.2 W/kg.

See 12.1 for details.

The initial test configuration for 2.4 GHz and 5 GHz OFDM transmission modes is determined by the 802.11 configuration with the highest maximum output power specified for production units, including tune-up tolerance, in each standalone and aggregated frequency band. An initial test position was established for Both UNII1 and UNII 3 bands.

When the reported SAR of the initial test configuration is $>$ 0.8 W/kg, SAR measurement is required for subsequent next highest measured output power channel(s) in the initial test configuration until reported SAR is \leq 1.2 W/kg or all required channels are tested.

NOTE: The Bluetooth transmitter is capable of simultaneous transmission with the 5GHz WiFi Transmitter.

Due to the nature of this device, Bluetooth was also evaluated for Simultaneous Transmission SAR. Conducted power measurements were taken across the various channels, modes and data rates. The Bluetooth test channel with the highest measured maximum output power was selected for evaluation in combination with the worst case 5GHz WiFi test configuration with the highest measured SAR.

As per KDB 447498 D01V06, where appropriate SAR test exclusion based on antenna test separation distances may be applied.


1. When the distance is $<$ 50mm exclusion threshold is "Ratio", when the distance is $>$ 50 mm exclusion is in "mW"
2. Maximum power is the source-based-time-average power and represents the maximum RF output power among production units.
3. Per KDB 447498 D01v06, for larger devices, the test separation distance of adjacent edge configuration is determined by the closest separation between the antenna and the user

4. Per KDB 447498 D01v06, standalone SAR test exclusion threshold is applied; If the test separation distance is < 5mm, 5mm is used to determine SAR exclusion threshold
5. Per KDB 447498 D01v06, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50mm are determined by; (step a)

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] * [\sqrt{f(\text{GHz})}] \leq 3.0$$
 for 1-g SAR and ≤ 7.5 for 10-g extremity SAR
 - f(GHz) is the f channel transmit frequency in GHz
 - power and distance are rounded to the nearest MW and mm before calculation
 - result is rounded to one decimal place for comparison
 - the values 3.0 and 7.5 are referred to as numeric thresholds in step b
6. Per KDB 447498 D01v06, at 100 MHz to 6 GHz and for test separation distance > 50mm, the SAR test exclusion threshold is determined according to the following; (step b)
 - a) [Power allowed at numeric threshold for 50 mm in step a) + test separation distance - 50mm)*(f(MHz)/150)] mW, at 100 MHz to 1500 MHz
 - b) [Power allowed at numeric threshold for 50 mm in step a) + (test separation distance -50mm)* 10] mW at > 1500MHz and ≤ 6GHz

Table 8.1 Antenna Distances

Topographic View
Back Side

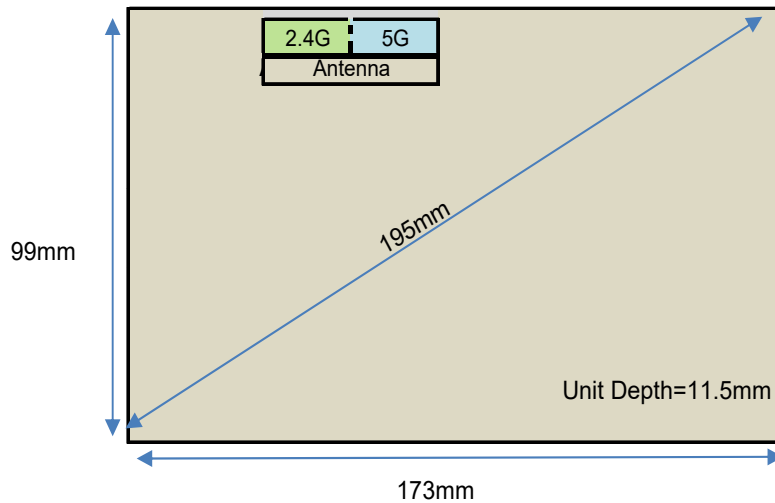

Antenna	Top Edge (mm)	Right Edge (mm)	Bottom Edge (mm)	Right Edge (mm)	Depth* (mm)
WLAN/BT	13.0	112.0	80.0	38.0	5.0
5GHz	15.0	102.0	75.0	60.0	5.0
*2.4 GHz and 5 GHz antenna are on opposite sides of PCB - EUT depth is 11.5mm; 5mm used					

Table 8.2 Body SAR test Exclusion Workchart

Body SAR Test Exclusion Workchart: (≤ 3.0 for 1-g SAR - exclusion threshold < 50mm Ratio; >50mm mW)

Exposure Position	Wireless Interface	BT*	2.4GHz WLAN	5GHz WLAN (UNII-1)	5GHz WLAN (UNII-3)
		Calculated Frequency	2480	2462	5240
	Maximum Power (dBm)	3.01	14.77	13.98	13.98
	Maximum rated Power (mW)	2	30	25	25
Bottom Face	Separation Distance (mm)	5	5	5	5
	exclusion threshold (ratio)	0.6	9.4	11.4	12.1
	testing required ?	No	Yes	Yes	Yes
Top Edge	Separation Distance (mm)	13	13	15	15
	exclusion threshold (ratio)	0.2	3.6	3.8	4.0
	testing required ?	No	Yes	Yes	Yes
Right Edge	Separation Distance (mm)	112	112	102	102
	exclusion threshold (mW)	715.3	715.6	585.5	582.2
	testing required ?	No	No	No	No
Bottom Edge	Separation Distance (mm)	80	80	80	80
	exclusion threshold (mW)	395.3	395.6	365.5	362.2
	testing required ?	No	No	No	No
Left Edge	Separation Distance (mm)	38	38	38	38
	exclusion threshold (ratio)	0.08	1.2	1.5	1.6
	testing required ?	No	No	No	No

*There is simultaneous Tx with BT and 5 Ghz, BT SAR measurement required.

9.0 SAR MEASUREMENT SUMMARY

Table 9.0: Measured Results

Measured SAR Results (1g) - BODY Configuration (FCC/ISED)																
Date	Plot ID	DUT		Test Frequency (MHz)	Modulation	Accessories				DUT Spacing		Conducted Power (dBm)	Measured SAR (1g) 100% DC (W/kg)	SAR Drift (dB)		
		M/N	Configuration			Antenna ID	Battery ID	Body ID	Audio ID	DUT (mm)	Antenna (mm)					
31-Mar-2021	B1	A04158	Body-Back Side	2422	DSS-11 Mbps	n/a	n/a	n/a	n/a	0	0	14.72	0.831	0.250		
31-Mar-2021	B2	A04158	Body-Back Side	2437	DSS-11 Mbps	n/a	n/a	n/a	n/a	0	0	14.71	0.730	0.180		
31-Mar-2021	B3	A04158	Body-Back Side	2457	DSS-11 Mbps	n/a	n/a	n/a	n/a	0	0	14.77	0.756	-1.250		
31-Mar-2021	B4	A04158	Body-Top Side	2422	DSS-11 Mbps	n/a	n/a	n/a	n/a	0	0	14.72	0.368	0.510		
31-Mar-2021	B5	A04158	Body-Left Side	2422	DSS-11 Mbps	n/a	n/a	n/a	n/a	0	0	14.72	0.024	0.150		
31-Mar-2021	B6	A04158	Body-Back Side-Left Tilt	2422	DSS-11 Mbps	n/a	n/a	n/a	n/a	0	0	14.72	0.000	-		
29-May-2021	B7	A04158	Body-Back Side	5220	OFDM-6	n/a	n/a	n/a	n/a	0	0	13.80	1.360	0.360		
29-May-2021	B8	A04158	Body-Top Side	5220	OFDM-6	n/a	n/a	n/a	n/a	0	0	13.80	0.294	0.001		
29-May-2021	B9	A04158	Body-Back Side	5180	OFDM-6	n/a	n/a	n/a	n/a	0	0	13.54	1.380	0.430		
29-May-2021	B10	A04158	Body-Back Side	5220	MCS0	n/a	n/a	n/a	n/a	0	0	13.10	1.170	0.610		
30-May-2021	B11	A04158	Body-Back Side	5210	MCS0	n/a	n/a	n/a	n/a	0	0	9.03	0.747	1.500		
30-May-2021	B12	A04158	Body-Back Side	5745	OFDM-6	n/a	n/a	n/a	n/a	0	0	13.98	0.887	0.130		
30-May-2021	B13	A04158	Body-Back Side	5755	MCS0	n/a	n/a	n/a	n/a	0	0	13.62	0.777	0.220		
31-May-2021	B14	A04158	Body-Back Side	5775	MCS0	n/a	n/a	n/a	n/a	0	0	13.42	0.802	-0.470		
29-Jun-2021	B15	A04158	Body-Back Side	2402	GFSK	n/a	n/a	n/a	n/a	0	0	3.01	0.015	-0.730		
SAR Limit						Spatial Peak				Head/Body		RF Exposure Category				
FCC 47 CFR 2.1093						Health Canada Safety Code 6				1 Gram Average		1.6 W/kg		General Population		

10.0 SCALING OF MAXIMUM MEASURED SAR

Table 10.0 SAR Scaling

Scaling of Maximum Measured SAR (1g)					
Measured Parameters		Configuration			
		Body	Body	Body	
Plot ID		B15	B9	B1	
Maximum Measured SAR _M		0.015	1.380	0.831	(W/kg)
Frequency		2402	5180	2422	(MHz)
Power Drift		-0.730	0.430 (1)	0.250 (1)	(dB)
Conducted Power		3.010	13.540	14.720	(dBm)
Crest Factor (CF)		3.400	1.037	1.048	(dBm)
Fluid Deviation from Target					
Δe	Permittivity	-1.31%	3.94% (2)	-2.90% (2)	
$\Delta \sigma$	Conductivity	1.71%	-0.22% (2)	3.95% (2)	

Note(1): Power Drift is Positive, Drift Adjustment not Required.

Note(2): Fluid Dielectric Parameters are Within 5% of Targets. SAR Adjustment for Fluid Sensitivity is not Required.

Fluid Sensitivity Calculation (1g)		IEC 62209-2 Annex F			
$\Delta SAR = C_e * \Delta e + C_\sigma * \Delta \sigma$		(F.1)			
$C_e = (-0.0007854 * f^3) + (0.009402 * f^2) - (0.02742 * f) - 0.2026$		(F.2)			
$C_\sigma = (0.009804 * f^3) - (0.08661 * f^2) + (0.02981 * f) + 0.7829$		(F.3)			
f	Frequency (GHz)	2.402	5.18	2.422	
	C _e	-0.225	-0.202	-0.225	
	C _σ	0.491	-0.024	0.486	
	C _e * Δe	0.003	-0.008	0.007	
	C _σ * Δσ	0.008	0.000	0.019	
	ΔSAR	0.011	-0.008	0.026	(%)

Manufacturer's Tuneup Tolerance					
Measured Conducted Power		3.010	13.540	14.720	(dBm)
Rated Conducted Power		3.010	13.800	14.770	(dBm)
ΔP		0.000	-0.260 (4)	-0.050 (4)	(dB)

Note(4): SAR was Evaluated at the Maximum Tuneup Tolerance. SAR Adjustment is not Required.

SAR Adjustment for Fluid Sensitivity					
$SAR_1 = SAR_M * \Delta SAR$		0.015	1.380	0.831	(W/kg)

SAR Adjustment for Tuneup Tolerance					
$SAR_2 = SAR_1 + [\Delta P]$		0.15	1.465	0.841	(W/kg)

SAR Adjustment for Duty Cycle (Crest Factor)					
$SAR_3 = SAR_2 + \text{Drift}$		0.051	1.519	0.881	(W/kg)

SAR Adjustment for Drift					
$SAR_4 = SAR_3 * CF$		0.060	1.519	0.881	(W/kg)

reported SAR					
FCC = SAR ₂		0.051	1.52	0.88	(W/kg)
ISED = SAR ₃		0.060	1.52	0.88	(W/kg)

Table 10.1 Simultaneous SAR

Note: The device is only capable of simultaneous transmission between the Bluetooth Transmitter and the 5 GHz WiFi Transmitter. The 2.4GHz WiFi Transmitter and the Bluetooth Transmitter share the same antenna; therefore, they cannot simultaneously transmit. From Table 10.0 Step 4, the standalone Max SAR values for 2.4GHz Bluetooth and 5 GHz WiFi were used to calculate the simultaneous SAR below.

As Per FCC KDB 690783:

FCC Simultaneous SAR:

The sum of the simultaneous was calculated as follows.

Plot(B15)DSS=0.05 W/kg

Plot(B9)UNII 1=1.52W/kg

Sum of Simultaneous= DSS SAR + UNII 1 SAR

Sum of Simultaneous =0.05W/kg + 1.52W/kg= **1.57 W/kg**

ISED Simultaneous SAR:

The sum of the simultaneous was calculated as follows.

Plot(B15)DSS=0.06 W/kg

Plot(B9)UNII 1=1.52W/kg

Sum of Simultaneous= DSS SAR + UNII 1 SAR

Sum of Simultaneous =0.06W/kg + 1.52W/kg= **1.58 W/kg**

NOTES to Table 10.0

(1) Scaling of the Maximum Measured SAR is based on the highest, 100% duty cycle, Face, Body and/or Head SAR measured of ALL test channels, configurations and accessories used during THIS evaluation. The Measured Fluid Deviation parameters apply only to deviation of the tissue equivalent fluids used at the frequencies which produced the highest measured SAR. The Measured Conducted Power applies to the Conducted Power measured at the frequencies producing the highest Face and Body SAR. The Measured Drift is the SAR drift associated with that specific SAR measurement. The Reported SAR is the accumulation of all SAR Adjustments from the applicable Steps 1 through 5. The Plot ID is for identification of the SAR Measurement Plots in Annex A of this report.

NOTE: Some of the scaling factors in Steps 1 through 5 may not apply and are identified by light gray text.

Step 1

Per IEC-62209-1 and FCC KDB 865664. Scaling required only when Measured Fluid Deviation is greater than 5%. If the Measured Fluid Deviation is greater than 5%, Table 11.1 will be shown and will indicate the SAR scaling factor in percent (%). SAR is MULTIPLIED by this scaling factor only when the scaling factor is positive (+).

Step 2

Per KDB 447498. Scaling required only when the difference (Delta) between the Measured Conducted Power and the Manufacturer's Rated Conducted Power is (-) Negative. The absolute value of Delta is ADDED to the SAR.

Step 3

Per IEC 62209-1. Scaling required only when Measured Drift is (-) Negative. The absolute value of Measured Drift is added to Reported or Simultaneous Reported SAR.

Step 4

The Reported SAR is the Maximum Final Adjusted Cumulative SAR from the applicable Steps 1 through 5 are reported on Page 1 of this report.

11.0 SAR EXPOSURE LIMITS

Table 11.0 Exposure Limits

SAR RF EXPOSURE LIMITS			
FCC 47 CFR§2.1093	Health Canada Safety Code 6	General Population / Uncontrolled Exposure ⁽⁴⁾	Occupational / Controlled Exposure ⁽⁵⁾
Spatial Average ⁽¹⁾ (averaged over the whole body)		0.08 W/kg	0.4 W/kg
Spatial Peak ⁽²⁾ (Head and Trunk averaged over any 1 g of tissue)		1.6 W/kg	8.0 W/kg
Spatial Peak ⁽³⁾ (Hands/Wrists/Feet/Ankles averaged over 10 g)		4.0 W/kg	20.0 W/kg
(1) The Spatial Average value of the SAR averaged over the whole body.			
(2) The Spatial Peak value of the SAR averaged over any 1 gram of tissue, defined as a tissue volume in the shape of a cube and over the appropriate averaging time.			
(3) The Spatial Peak value of the SAR averaged over any 10 grams of tissue, defined as a tissue volume in the shape of a cube and over the appropriate averaging time.			
(4) Uncontrolled environments are defined as locations where there is potential exposure to individuals who have no knowledge or control of their potential exposure.			
(5) Controlled environments are defined as locations where there is potential exposure to individuals who have knowledge of their potential exposure and can exercise control over their exposure.			

12.0 DETAILS OF SAR EVALUATION

12.0 Day Log

DAY LOG					Fluid Dielectric	SPC	Test	Task
Date	Ambient Temp (°C)	Fluid Temp (°C)	Relative Humidity (%)	Barometric Pressure (kPa)				
29 Mar 2021	22.6	21.2	19%	102.1	X	X	X	2450H Fluids & SPC
31 Mar 2021	23.4	22.1	19%	102.9			X	2450 SAR Testing
01 Apr 2021	23.7	22.9	19%	101.1			X	2450 SAR Testing
07 Apr 2021	23.5	21.6	21%	101.0	X	X	X	2450H Fluid, SPC, SAR Testing
28 May 2021	25.5	24.2	29%	101.5	X	X	X	5250H & 5750H Fluids & SPC, SAR testing
29 May 2021	23.1	23.1	29%	102.4			X	5250H SAR Testing
30 May 2021	22.9	20.9	32%	102.0			X	5250H & 5750H SAR Testing
31 May 2021	24.8	22.3	33%	102.2			X	5750H SAR Testing
29 Jun 2021	29.6	23.8	39%	101.4	X	X	X	2450H Fluid, SPC, SAR Testing


* Per IEEE 1528 Test Series was started within 24 hours of Fluid Parameters Measurement and System Performance Check

**Per IEEE 1528 Fluid Parameters were measured at the end of test series

12.1 DUT Setup and Configuration


DUT Setup and Configuration	
1	<p>The DUT was evaluated for SAR in accordance with the procedures described in IEC\IEEE 62209-1528, IEEE 1528, FCC KDB 865646, 447498, 941225, 248227, and RSS-102.</p> <p>The device was evaluated at a phantom separation distance of 0mm.</p>
2	<p>The intended use of the device is to be hand held or mounted. The DUT was additionally evaluated for SAR in accordance with the procedures described in KDB 941225D07V01r02.</p> <p>The Back Side of the device was the highest SAR value for the highest output power channel, and was used as the default position. Additionally the Top Edge was evaluated as its proximity to the transmitter was sufficiently near to require evaluation. Additionally some voluntary evaluations of the Left Side and a Left Side Tilt was undertaken but did not provide a worse case SAR evaluation.</p>
3	<p>5GHz Initial Test Position SAR Test Reduction Procedure As per KDB 248227D01</p> <p>When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other (remaining) test positions in that exposure configuration .</p>
4	<p>The Device was capable of transmitting at various modulations and data rates. The Conducted Power was higher when measured in DSS Mode-11Mbps for 2.4GHz ,OFDM Mode-6Mbps for UNII-1 and UNII-3 than any other configuration. The DUT was evaluated for SAR at the maximum conducted output power level, preset by the manufacturer.</p> <p>Each SAR evaluation was performed with a fully charged battery.</p>

12.2 Duty Cycle Evaluation

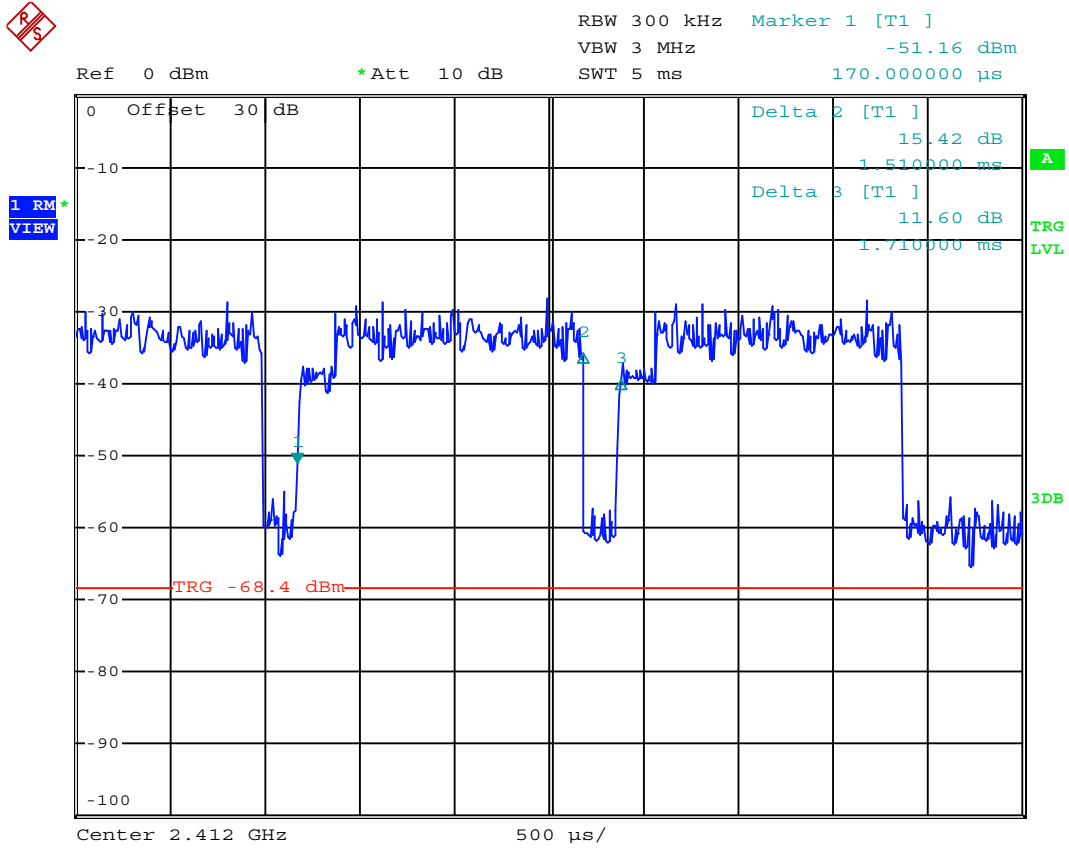


Date: 28.JUN.2021 10:03:38

DSSS at 11Mbps was found to be the worst case test mode for 2.4GHZ WIFI. The transmit Duty cycle was 88% as indicated in the above plot. This duty cycle cannot be altered by the user.

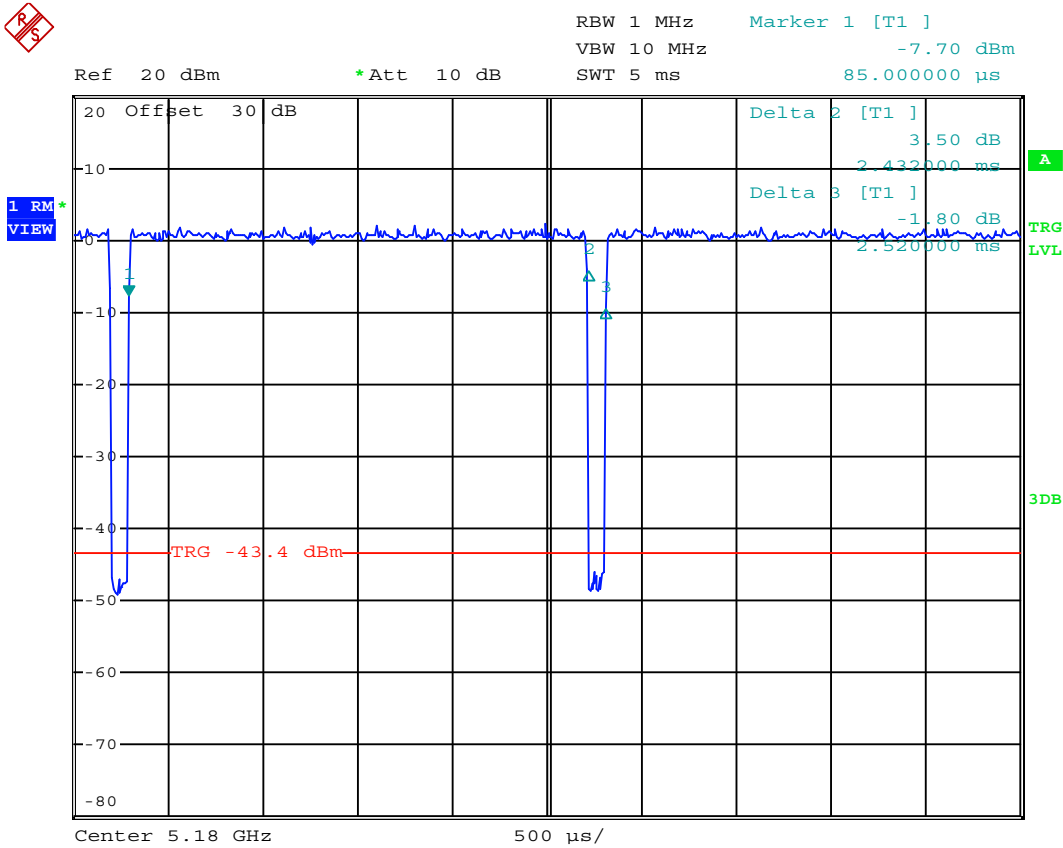

Date: 28.JUN.2021 11:00:49

OFDM at 6Mbps was found to be the worst case test mode for 5GHZ UNII WiFi. The transmit Duty cycle was 96% as indicated in the above plot. This duty cycle cannot be altered by the user.

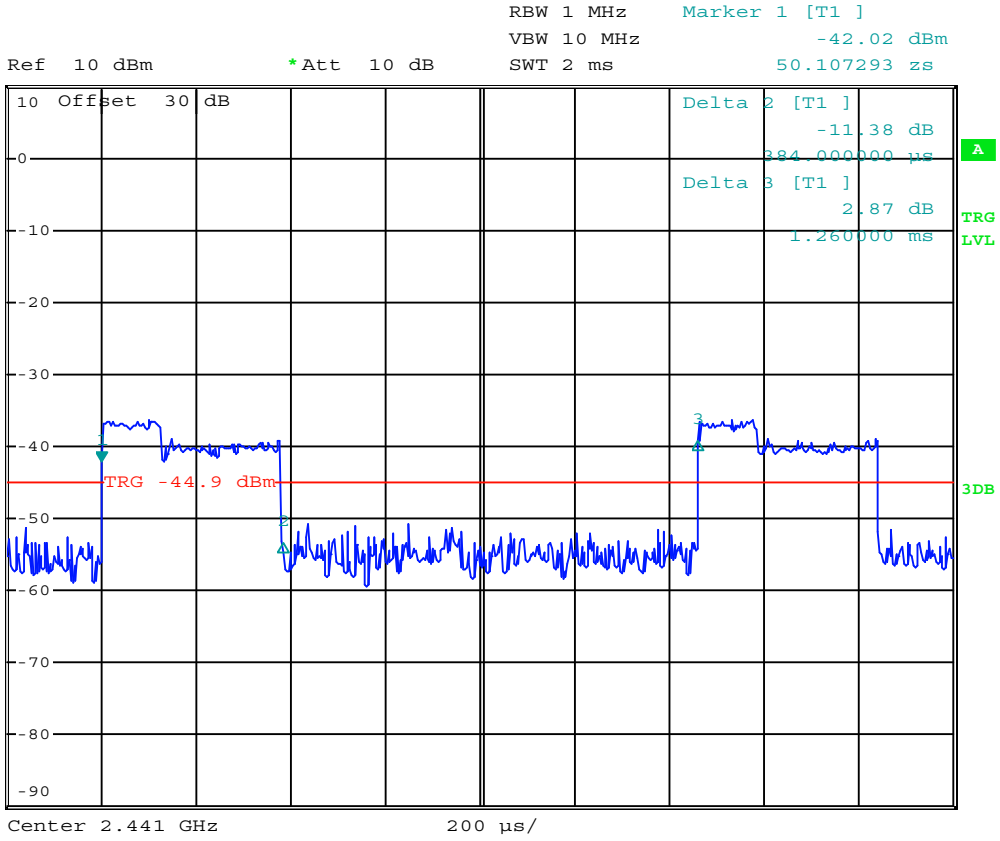

Date: 28.JUN.2021 13:06:07

BT EDR3 was found to be the worst case test mode for Bluetooth. The transmit Duty cycle was 30% as indicated in the above plot. This duty cycle cannot be altered by the user.

12.3 DUT Positioning

DUT Positioning	
Positioning	The DUT Positioner was securely fastened to the Phantom Platform. Registration marks were placed on the DUT and the Positioner to ensure consistent positioning of the DUT for each test evaluation.
FACE Configuration	This device is not intended to be held to the face and was not tested in the FACE configuration.
BODY Configuration	The DUT was securely clamped into the device holder with the surface of the DUT normally in contact with the body in direct contact with the bottom of the phantom, or 0mm separation from the DUT's accessory to the phantom.
HEAD Configuration	This device is not intended to be held to the ear and was not tested in the HEAD configuration.

12.4 General Procedures and Report

General Procedures and Reporting	
General Procedures	<p>The fluid dielectric parameters of the Active Tissue Simulating Liquid (TSL) were measured as described in this Section, recorded and entered into the DASY Measurement Server. Active meaning the TSL used during the SAR evaluation of the DUT. The temperature of the Active TSL was measured and recorded prior to performing a System Performance Check (SPC). An SPC was performed with the Active TSL prior to the start of the test series. The temperature of the Active TSL was measured throughout the day and the Active TSL temperature was maintained to $\pm 0.5^{\circ}\text{C}$. The Active TSL temperature was maintained to within $\pm 2.0^{\circ}\text{C}$ throughout the test series. The liquid parameters shall be measured within 24 hours before the start of a test series and if it takes longer than 48 hours, the liquid parameters shall also be measured at the end of the test series.</p> <p>An Area Scan exceeding the length and width of the DUT projection was performed and the locations of all maximas within 2dB of the Peak SAR recorded. A Zoom Scan centered over the Peak SAR location(s) was performed and the 1g and 10g SAR values recorded. The resolutions of the Area Scan and Zoom Scan are described in the Scan Resolution table(s) in this Section. A Power Reference Measurement was taken at the phantom reference point immediately prior to the Area Scan. A Power Drift measurement was taken at the phantom reference point immediately following the Zoom Scan to determine the power drift. A Z-Scan from the <i>Maximum Distance to Phantom Surface</i> to the fluid surface was performed following the power drift measurement.</p>
Reporting	<p>The 1g SAR, 10g SAR and power drift measurements are recorded in the SAR Measurement Summary tables in the SAR Measurement Summary Section of this report. The SAR values shown in the 100% DC (Duty Cycle) column are the SAR values reported by the SAR Measurement Server with the DUT operating at 100% transmit duty cycle. These tables also include other information such as transmit channel and frequency, modulation, accessories tested and DUT-phantom separation distance.</p> <p>In the Scaling of Maximum Measured SAR Section of this report, the highest measured SAR in the BODY configuration, within the entire scope of this assessment, are, when applicable, scaled for Fluid Sensitivity, Manufacturer's Tune-Up Tolerance, Simultaneous Transmission and Drift. With the exception of Duty Cycle correction/compensation, SAR values are <u>ONLY</u> scaled up, not down. The final results of this scaling is the <u>reported SAR</u> which appears on the Cover Page of this report.</p>

12.5 Fluid Dielectric and Systems Performance Check

Fluid Dielectric and Systems Performance Check	
Fluid Dielectric Measurement Procedure	
<p>The fluid dielectric parameters of the Tissue Simulating Liquid (TSL) are measured using the Open-Ended Coax Method connected to an Agilent 8753ET Network Analyzer connected to a measurement server running April Dielectric Property Measurement System. A frequency range of $\pm 100\text{MHz}$ for frequencies $> 300\text{MHz}$ and $\pm 50\text{MHz}$ for frequencies $\leq 300\text{MHz}$ with frequency step size of 10MHz is used. The center frequency is centered around the SAR measurement probe's calibration point for that TSL frequency range. A calibration of the setup is performed using a short-open-deionized water (at 23°C in a 300ml beaker) method. A sample of the TSL is placed in a 300ml beaker and the open-ended coax is submerged approximately 8mm below the fluid surface in the approximate center of the beaker. A check of the setup is made to ensure no air is trapped under the open-ended coax. The sample of TSL is measured and compared to the FCC KDB 865664 targets for HEAD or BODY for the entire fluid measurement range. Fluid adjustment are made if the dielectric parameters are $> 5\%$ in range that the DUT is to be tested. If the adjustments fail to bring the parameters to $\leq 5\%$ but are $< 10\%$, the SAR Fluid Sensitivity as per IEC 62201-1 and FCC KDB 865664 are applied to the highest measured SAR. A TSL with dielectric parameters $> 10\%$ in the DUT test frequency range are not used.</p>	
Systems Performance Check	
<p>The fluid dielectric parameters of the Active TSL are entered into the DASY Measurement Server at each of the 10MHz step size intervals. Active meaning the TSL used during the SAR evaluation of the DUT. The DASY Measurement System will automatically interpolate the dielectric parameters for DUT test frequencies that fall between the 10MHz step intervals.</p> <p>A Systems Performance Check (SPC) is performed in accordance with IEEE 1528 "System Check" and FCC KDB 865664 "System Verification". A validation source, dipole or Confined Loop Antenna (CLA), is placed under the geometric center of the phantom and separated from the phantom in accordance to the validation source's Calibration Certificate data. A CW signal set to the frequency of the validate source's and SAR measurement probe's calibration frequency with a forward power set to the validation source's Calibration Certificate data power setting is applied to the validation source. An Area Scan is centered over the projection of the validation source's feed point and an Area Scan is taken. A Zoom Scan centered over the Peak SAR measurement of the Area Scan and the 1g and 10g SAR is measured. The measured 1g and 10g SAR is compared to the 1g and 10g SAR measurements from the validation source's Calibration Certificate. When required, the measured SAR is normalized to 1.0W and compared to the normalized SAR indicated on the validation source's Calibration Certificate. The SPC is considered valid when the measured and normalized SAR is $\leq 10\%$ of the measured and normalize SAR of the validation source's Calibration Certificate.</p> <p>The fluid dielectric parameters of the Active TSL and SPC are repeated when the Active TSL has been in use for greater than 84 hours or if the Active TSL temperature has exceed $\pm 1^\circ\text{C}$ of the initial fluid analysis.</p>	

12.6 Scan Resolution 100MHz to 2GHz

Scan Resolution 100MHz to 2GHz	
Maximum distance from the closest measurement point to phantom surface: (Geometric Center of Probe Center)	$4 \pm 1 \text{ mm}$
Maximum probe angle normal to phantom surface. (Flat Section ELI Phantom)	$5^\circ \pm 1^\circ$
Area Scan Spatial Resolution $\Delta X, \Delta Y$	15 mm
Zoom Scan Spatial Resolution $\Delta X, \Delta Y$	7.5 mm
Zoom Scan Spatial Resolution ΔZ (Uniform Grid)	5 mm
Zoom Scan Volume X, Y, Z	30 mm
Phantom	ELI
Fluid Depth	$150 \pm 5 \text{ mm}$
An Area Scan with an area extending beyond the device was used to locate the candidate maximas within 2dB of the global maxima.	
A Zoom Scan centered over the peak SAR location(s) determined by the Area Scan was used to determine the 1-gram and 10-gram peak spatial-average SAR	

12.7 Scan Resolution 2GHz to 3GHz

Scan Resolution 2GHz to 3GHz	
Maximum distance from the closest measurement point to phantom surface: (Geometric Center of Probe Center)	4 ± 1 mm
Maximum probe angle normal to phantom surface. (Flat Section ELI Phantom)	5° ± 1°
Area Scan Spatial Resolution $\Delta X, \Delta Y$	12 mm
Zoom Scan Spatial Resolution $\Delta X, \Delta Y$	5 mm
Zoom Scan Spatial Resolution ΔZ (Uniform Grid)	5 mm
Zoom Scan Volume X, Y, Z	30 mm
Phantom	ELI
Fluid Depth	150 ± 5 mm
An Area Scan with an area extending beyond the device was used to locate the candidate maximas within 2dB of the global maxima.	
A Zoom Scan centered over the peak SAR location(s) determined by the Area Scan was used to determine the 1-gram and 10-gram peak spatial-average SAR	

12.8 Scan Resolution 5GHz to 6GHz

Scan Resolution 5GHz to 6GHz	
Maximum distance from the closest measurement point to phantom surface: (Geometric Center of Probe Center)	4 ± 1 mm
Maximum probe angle normal to phantom surface. (Flat Section ELI Phantom)	5° ± 1°
Area Scan Spatial Resolution $\Delta X, \Delta Y$	10 mm
Zoom Scan Spatial Resolution $\Delta X, \Delta Y$	4 mm
Zoom Scan Spatial Resolution ΔZ (Uniform Grid)	2 mm
Zoom Scan Volume X, Y, Z	22 mm
Phantom	ELI
Fluid Depth	100 ± 5 mm
An Area Scan with an area extending beyond the device was used to locate the candidate maximas within 2dB of the global maxima.	
A Zoom Scan centered over the peak SAR location(s) determined by the Area Scan was used to determine the 1-gram and 10-gram peak spatial-average SAR	

13.0 MEASUREMENT UNCERTAINTIES

Table 13.0 Measurement Uncertainty

UNCERTAINTY BUDGET FOR DEVICE EVALUATION (IEEE 1528-2013 Table 9)									
Source of Uncertainty	IEEE 1528 Section	Toler ±%	Prob Dist	Div	c _i	c _i	Stand Unct ±%	Stand Unct ±%	V _i or V _{eff}
Measurement System									
EX3DV4 Probe Calibration** (k=1)	E.2.1	6.7	N	1	1	1	6.7	6.7	∞
Axial Isotropy** (k=1)	E.2.2	0.6	R	√3	0.7	0.7	0.2	0.2	∞
Hemispherical Isotropy** (k=1)	E.2.2	3.2	R	√3	0.7	0.7	1.3	1.3	∞
Boundary Effect*	E.2.3	1.0	R	√3	1	1	0.6	0.6	∞
Linearity** (k=1)	E.2.4	0.5	R	√3	1	1	0.3	0.3	∞
System Detection Limits*	E.2.4	1.0	R	√3	1	1	0.6	0.6	∞
Modulation Response** (k=1)	E.2.5	8.3	R	√3	1	1	4.8	4.8	∞
Readout Electronics*	E.2.6	0.3	N	1	1	1	0.3	0.3	∞
Response Time*	E.2.7	0.8	R	√3	1	1	0.5	0.5	∞
Integration Time*	E.2.8	2.6	R	√3	1	1	1.5	1.5	∞
RF Ambient Conditions - Noise	E.6.1	0.0	R	√3	1	1	0.0	0.0	10
RF Ambient Conditions - Reflection	E.6.1	0.0	R	√3	1	1	0.0	0.0	10
Probe Positioner Mechanical Tolerance*	E.6.2	0.0	R	√3	1	1	0.0	0.0	∞
Probe Positioning wrt Phantom Shell*	E.6.3	0.4	R	√3	1	1	0.2	0.2	∞
Post-processing*	E.5	2.0	R	√3	1	1	1.2	1.2	∞
Test Sample Related									
Test Sample Positioning	E.4.2	2.2	N	1	1	1	2.2	2.2	5
Device Holder Uncertainty*	E.4.1	3.6	N	1	1	1	3.6	3.6	∞
SAR Drift Measurement ⁽²⁾	E.2.9	0.0	R	√3	1	1	0.0	0.0	∞
SAR Power Scaling ⁽³⁾	E.6.5	0.0	R	√3	1	1	0.0	0.0	∞
Phantom and Tissue Parameters									
Phantom Uncertainty*	E.3.1	6.1	R	√3	1	1	3.5	3.5	∞
SAR Correction Uncertainty	E.3.2	1.6	N	1	1	0.84	1.6	1.3	∞
Liquid Conductivity (measurement)	E.3.3	5.0	N	1	0.78	0.71	3.9	3.6	10
Liquid Permittivity (measurement)	E.3.3	5.0	N	1	0.23	0.26	1.2	1.3	10
Liquid Conductivity (Temperature)	E.3.2	0.4	R	√3	0.78	0.71	0.2	0.2	10
Liquid Permittivity Temperature)	E.3.2	0.2	R	√3	0.23	0.26	0.0	0.0	10
Effective Degrees of Freedom⁽¹⁾								V_{eff} =	1141
Combined Standard Uncertainty			RSS				11.1	11.0	
Expanded Uncertainty (95% Confidence Interval)			k=2				22.2	21.9	
Measurement Uncertainty Table in accordance with IEEE Standard 1528-2003									

(1) The Effective Degrees of Freedom is > 30

Therefore a coverage factor of k=2 represents an approximate confidence level of 95%.

(2) The SAR Value is compensated for Drift

(3) SAR Power Scaling not Required

* Provided by SPEAG for DASY52

Table 13.1 Calculation of Degrees of Freedom

Calculation of the Degrees and Effective Degrees of Freedom	
$v_i = n - 1$	$v_{\text{eff}} = \frac{u_c^4}{m \sum_{i=1} \frac{c_i^4 u_i^4}{v_i}}$

14.0 FLUID DIELECTRIC PARAMETERS

Table 14.0 Fluid Dielectric Parameters 2450MHz BODY TSL

```

*****
Aprel Laboratory
Test Result for UIM Dielectric Parameter
Mon 29/Mar/2021 08:39:00
Freq      Frequency(GHz)
FCC_eHFCC OET 65 Supplement C (June 2001) Limits for Head Epsilon
FCC_sHFCC OET 65 Supplement C (June 2001) Limits for Head Sigma
Test_e    Epsilon of UIM
Test_s    Sigma of UIM
*****

```

Freq	FCC_eHFCC	FCC_sHFCC	Test_e	Test_s
2.3500	39.38	1.71	38.41	1.76
2.3600	39.36	1.72	38.37	1.77
2.3700	39.34	1.73	38.32	1.78
2.3800	39.32	1.74	38.28	1.79
2.3900	39.31	1.75	38.24	1.80
2.4000	39.29	1.76	38.20	1.81
2.4100	39.27	1.76	38.15	1.82
2.4200	39.25	1.77	38.11	1.84
2.4300	39.24	1.78	38.07	1.85
2.4400	39.22	1.79	38.03	1.86
2.4500	39.20	1.80	37.99	1.87
2.4600	39.19	1.81	37.94	1.88
2.4700	39.17	1.82	37.90	1.89
2.4800	39.16	1.83	37.86	1.90
2.4900	39.15	1.84	37.82	1.91
2.5000	39.14	1.85	37.77	1.92
2.5100	39.12	1.87	37.73	1.93
2.5200	39.11	1.88	37.69	1.94
2.5300	39.10	1.89	37.65	1.96
2.5400	39.09	1.90	37.60	1.97
2.5500	39.07	1.91	37.56	1.98

FLUID DIELECTRIC PARAMETERS

Date:	29 Mar 2021	Fluid Temp:	22.1	Frequency:	2450MHz	Tissue:		Head	
Freq (MHz)	Test_e	Test_s	Target_e	Target_s	Deviation Permittivity	Deviation Conductivity			
2350.0000		38.4100	1.7600	39.3800	1.71	-2.46%	2.92%		
2360.0000		38.3700	1.7700	39.3600	1.72	-2.52%	2.91%		
2370.0000		38.3200	1.7800	39.3400	1.73	-2.59%	2.89%		
2380.0000		38.2800	1.7900	39.3200	1.74	-2.64%	2.87%		
2390.0000		38.2400	1.8000	39.3100	1.75	-2.72%	2.86%		
2400.0000		38.2000	1.8100	39.2900	1.76	-2.77%	2.84%		
2410.0000		38.1500	1.8200	39.2700	1.76	-2.85%	3.41%		
2420.0000		38.1100	1.8400	39.2500	1.77	-2.90%	3.95%		
2430.0000		38.0700	1.8500	39.2400	1.78	-2.98%	3.93%		
2440.0000		38.0300	1.8600	39.2200	1.79	-3.03%	3.91%		
2450.0000		37.9900	1.8700	39.2000	1.80	-3.09%	3.89%		
2460.0000		37.9400	1.8800	39.1900	1.81	-3.19%	3.87%		
2470.0000		37.9000	1.8900	39.1700	1.82	-3.24%	3.85%		
2480.0000		37.8600	1.9000	39.1600	1.83	-3.32%	3.83%		
2490.0000		37.8200	1.9100	39.1500	1.84	-3.40%	3.80%		
2500.0000		37.7700	1.9200	39.1400	1.85	-3.50%	3.78%		
2510.0000		37.7300	1.9300	39.1200	1.87	-3.55%	3.21%		
2520.0000		37.6900	1.9400	39.1100	1.88	-3.63%	3.19%		
2530.0000		37.6500	1.9600	39.1000	1.89	-3.71%	3.70%		
2540.0000		37.6000	1.9700	39.0900	1.90	-3.81%	3.68%		
2550.0000		37.5600	1.9800	39.0700	1.91	-3.86%	3.66%		

*Channel Frequency Tested

Aprel Laboratory
 Test Result for UIM Dielectric Parameter
 Wed 07/Apr/2021 14:56:58
 Freq Frequency(GHz)
 FCC_eHFCC OET 65 Supplement C (June 2001) Limits for Head Epsilon
 FCC_sHFCC OET 65 Supplement C (June 2001) Limits for Head Sigma
 Test_e Epsilon of UIM
 Test_s Sigma of UIM

Freq	FCC_eHFCC_sH	Test_e	Test_s
2.3500	39.38	1.71	36.26
2.3600	39.36	1.72	36.24
2.3700	39.34	1.73	36.19
2.3800	39.32	1.74	36.38
2.3900	39.31	1.75	36.03
2.4000	39.29	1.76	36.13
2.4100	39.27	1.76	36.07
2.4200	39.25	1.77	36.06
2.4300	39.24	1.78	35.97
2.4400	39.22	1.79	35.93
2.4500	39.20	1.80	35.85
2.4600	39.19	1.81	35.87
2.4700	39.17	1.82	35.82
2.4800	39.16	1.83	35.75
2.4900	39.15	1.84	35.85
2.5000	39.14	1.85	35.83
2.5100	39.12	1.87	35.53
2.5200	39.11	1.88	35.59
2.5300	39.10	1.89	35.58
2.5400	39.09	1.90	35.61
2.5500	39.07	1.91	35.58

FLUID DIELECTRIC PARAMETERS

Date:	7 Apr 2021	Fluid Temp:	22	Frequency:	2450MHz	Tissue:	Head
Freq (MHz)		Test_e	Test_s	Target_e	Target_s	Deviation Permittivity	Deviation Conductivity
2350.0000		36.2600	1.7700	39.3800	1.71	-7.92%	3.51%
2360.0000		36.2400	1.7800	39.3600	1.72	-7.93%	3.49%
2370.0000		36.1900	1.7600	39.3400	1.73	-8.01%	1.73%
2380.0000		36.3800	1.7900	39.3200	1.74	-7.48%	2.87%
2390.0000		36.0300	1.8000	39.3100	1.75	-8.34%	2.86%
2400.0000		36.1300	1.8100	39.2900	1.76	-8.04%	2.84%
2410.0000		36.0700	1.8300	39.2700	1.76	-8.15%	3.98%
2420.0000		36.0600	1.8500	39.2500	1.77	-8.13%	4.52%
2430.0000		35.9700	1.8400	39.2400	1.78	-8.33%	3.37%
2440.0000		35.9300	1.8600	39.2200	1.79	-8.39%	3.91%
2450.0000		35.8500	1.8400	39.2000	1.80	-8.55%	2.22%
2460.0000		35.8700	1.8700	39.1900	1.81	-8.47%	3.31%
2470.0000		35.8200	1.8800	39.1700	1.82	-8.55%	3.30%
2480.0000		35.7500	1.9100	39.1600	1.83	-8.71%	4.37%
2490.0000		35.8500	1.9200	39.1500	1.84	-8.43%	4.35%
2500.0000		35.8300	1.9100	39.1400	1.85	-8.46%	3.24%
2510.0000		35.5300	1.9500	39.1200	1.87	-9.18%	4.28%
2520.0000		35.5900	1.9400	39.1100	1.88	-9.00%	3.19%
2530.0000		35.5800	1.9600	39.1000	1.89	-9.00%	3.70%
2540.0000		35.6100	1.9800	39.0900	1.90	-8.90%	4.21%
2550.0000		35.5800	1.9800	39.0700	1.91	-8.93%	3.66%

*Channel Frequency Tested

Aprel Laboratory
 Test Result for UIM Dielectric Parameter
 Tue 29/Jun/2021 09:45:48
 Freq Frequency(GHz)
 FCC_eHFCC OET 65 Supplement C (June 2001) Limits for Head Epsilon
 FCC_sHFCC OET 65 Supplement C (June 2001) Limits for Head Sigma
 Test_e Epsilon of UIM
 Test_s Sigma of UIM

Freq	FCC_eHFCC_sH	Test_e	Test_s	
2.3500	39.38	1.71	39.03	1.73
2.3600	39.36	1.72	38.98	1.74
2.3700	39.34	1.73	38.93	1.75
2.3800	39.32	1.74	38.88	1.76
2.3900	39.31	1.75	38.83	1.77
2.4000	39.29	1.76	38.78	1.79
2.4100	39.27	1.76	38.73	1.80
2.4200	39.25	1.77	38.68	1.81
2.4300	39.24	1.78	38.63	1.82
2.4400	39.22	1.79	38.58	1.83
2.4500	39.20	1.80	38.53	1.85
2.4600	39.19	1.81	38.48	1.86
2.4700	39.17	1.82	38.43	1.87
2.4800	39.16	1.83	38.38	1.88
2.4900	39.15	1.84	38.33	1.89
2.5000	39.14	1.85	38.28	1.91
2.5100	39.12	1.87	38.23	1.92
2.5200	39.11	1.88	38.18	1.93
2.5300	39.10	1.89	38.13	1.94
2.5400	39.09	1.90	38.08	1.95
2.5500	39.07	1.91	38.03	1.97

FLUID DIELECTRIC PARAMETERS

Date:	29 Jun 2021	Fluid Temp:	23.8	Frequency:	2450MHz	Tissue:	Head
Freq (MHz)	Test_e	Test_s	Target_e	Target_s	Deviation Permittivity	Deviation Conductivity	
2350.0000		39.0300	1.7300	39.3800	1.71	-0.89%	1.17%
2360.0000		38.9800	1.7400	39.3600	1.72	-0.97%	1.16%
2370.0000		38.9300	1.7500	39.3400	1.73	-1.04%	1.16%
2380.0000		38.8800	1.7600	39.3200	1.74	-1.12%	1.15%
2390.0000		38.8300	1.7700	39.3100	1.75	-1.22%	1.14%
2400.0000		38.7800	1.7900	39.2900	1.76	-1.30%	1.70%
2410.0000		38.7300	1.8000	39.2700	1.76	-1.38%	2.27%
2420.0000		38.6800	1.8100	39.2500	1.77	-1.45%	2.26%
2430.0000		38.6300	1.8200	39.2400	1.78	-1.55%	2.25%
2440.0000		38.5800	1.8300	39.2200	1.79	-1.63%	2.23%
2450.0000		38.5300	1.8500	39.2000	1.80	-1.71%	2.78%
2460.0000		38.4800	1.8600	39.1900	1.81	-1.81%	2.76%
2470.0000		38.4300	1.8700	39.1700	1.82	-1.89%	2.75%
2480.0000		38.3800	1.8800	39.1600	1.83	-1.99%	2.73%
2490.0000		38.3300	1.8900	39.1500	1.84	-2.09%	2.72%
2500.0000		38.2800	1.9100	39.1400	1.85	-2.20%	3.24%
2510.0000		38.2300	1.9200	39.1200	1.87	-2.28%	2.67%
2520.0000		38.1800	1.9300	39.1100	1.88	-2.38%	2.66%
2530.0000		38.1300	1.9400	39.1000	1.89	-2.48%	2.65%
2540.0000		38.0800	1.9500	39.0900	1.90	-2.58%	2.63%
2550.0000		38.0300	1.9700	39.0700	1.91	-2.66%	3.14%

Table 14.1 Fluid Dielectric Parameters 5250MHz BODY TSL

```

*****
Aprel Laboratory
Test Result for UIM Dielectric Parameter
Fri 28/May/2021 12:09:27
Freq Frequency(GHz)
FCC_eHFCC OET 65 Supplement C (June 2001) Limits for Head Epsilon
FCC_sHFCC OET 65 Supplement C (June 2001) Limits for Head Sigma
Test_e Epsilon of UIM
Test_s Sigma of UIM
*****

```

Freq	FCC_eH	FCC_sH	Test_e	Test_s
5.1500	36.04	4.60	37.40	4.58
5.1600	36.03	4.61	37.41	4.59
5.1700	36.02	4.62	37.42	4.61
5.1800	36.01	4.63	37.43	4.62
5.1900	36.00	4.64	37.44	4.63
5.2000	35.99	4.65	37.45	4.65
5.2100	35.97	4.67	37.46	4.66
5.2200	35.96	4.68	37.47	4.67
5.2300	35.95	4.69	37.48	4.69
5.2400	35.94	4.70	37.48	4.70
5.2500	35.93	4.71	37.49	4.71
5.2600	35.92	4.72	37.50	4.73
5.2700	35.91	4.73	37.51	4.74
5.2800	35.89	4.74	37.52	4.75
5.2900	35.88	4.75	37.53	4.77
5.3000	35.87	4.76	37.54	4.78
5.3100	35.86	4.77	37.55	4.79
5.3200	35.85	4.78	37.55	4.81
5.3300	35.84	4.79	37.56	4.82
5.3400	35.83	4.80	37.57	4.83
5.3500	35.81	4.81	37.58	4.85

Table 14.1 Fluid Dielectric Parameters 5250MHz BODY TSL

FLUID DIELECTRIC PARAMETERS							
Date:	28 May 2021	Fluid Temp:	20.6	Frequency:	5250MHz	Tissue:	Head
Freq (MHz)	Test_e	Test_s	Target_e	Target_s	Deviation Permittivity	Deviation Conductivity	
5150.0000		37.4000	4.5800	36.0400	4.60	3.77%	-0.43%
5160.0000		37.4100	4.5900	36.0300	4.61	3.83%	-0.43%
5170.0000		37.4200	4.6100	36.0200	4.62	3.89%	-0.22%
5180.0000		37.4300	4.6200	36.0100	4.63	3.94%	-0.22%
5190.0000		37.4400	4.6300	36.0000	4.64	4.00%	-0.22%
5200.0000		37.4500	4.6500	35.9900	4.65	4.06%	0.00%
5210.0000		37.4600	4.6600	35.9700	4.67	4.14%	-0.21%
5220.0000		37.4700	4.6700	35.9600	4.68	4.20%	-0.21%
5230.0000		37.4800	4.6900	35.9500	4.69	4.26%	0.00%
5240.0000		37.4800	4.7000	35.9400	4.70	4.28%	0.00%
5250.0000		37.4900	4.7100	35.9300	4.71	4.34%	0.00%
5260.0000		37.5000	4.7300	35.9200	4.72	4.40%	0.21%
5270.0000		37.5100	4.7400	35.9100	4.73	4.46%	0.21%
5280.0000		37.5200	4.7500	35.8900	4.74	4.54%	0.21%
5290.0000		37.5300	4.7700	35.8800	4.75	4.60%	0.42%
5300.0000		37.5400	4.7800	35.8700	4.76	4.66%	0.42%
5310.0000		37.5500	4.7900	35.8600	4.77	4.71%	0.42%
5320.0000		37.5500	4.8100	35.8500	4.78	4.74%	0.63%
5330.0000		37.5600	4.8200	35.8400	4.79	4.80%	0.63%
5340.0000		37.5700	4.8300	35.8300	4.80	4.86%	0.63%
5350.0000		37.5800	4.8500	35.8100	4.81	4.94%	0.83%

*Channel Frequency Tested

Table 14.2 Fluid Dielectric Parameters 5750MHz BODY TSL

```

*****
Aprel Laboratory
Test Result for UIM Dielectric Parameter
Fri 28/May/2021 12:22:40
Freq Frequency(GHz)
FCC_eHFCC OET 65 Supplement C (June 2001) Limits for Head Epsilon
FCC_sHFCC OET 65 Supplement C (June 2001) Limits for Head Sigma
Test_e Epsilon of UIM
Test_s Sigma of UIM
*****

```

Freq	FCC_eHFCC_sH	Test_e	Test_s
5.6500	35.47 5.12	34.93	4.97
5.6600	35.46 5.13	34.94	4.98
5.6700	35.45 5.14	34.94	5.00
5.6800	35.44 5.15	34.95	5.01
5.6900	35.43 5.16	34.96	5.02
5.7000	35.41 5.17	34.96	5.04
5.7100	35.40 5.18	34.97	5.05
5.7200	35.39 5.19	34.97	5.06
5.7300	35.38 5.20	34.98	5.08
5.7400	35.37 5.21	34.98	5.09
5.7500	35.36 5.22	34.99	5.10
5.7600	35.35 5.23	34.99	5.12
5.7700	35.33 5.24	35.00	5.13
5.7800	35.32 5.25	35.01	5.14
5.7900	35.31 5.26	35.01	5.16
5.8000	35.30 5.27	35.02	5.17
5.8100	35.29 5.28	35.02	5.19
5.8200	35.28 5.29	35.03	5.20
5.8300	35.27 5.30	35.03	5.21
5.8400	35.25 5.31	35.04	5.23
5.8500	35.24 5.32	35.05	5.24

FLUID DIELECTRIC PARAMETERS

Date:	28 May 2021	Fluid Temp:	20.6	Frequency:	5750MHz	Tissue:	Head
Freq (MHz)	Test_e	Test_s	Target_e	Target_s	Deviation Permittivity	Deviation Conductivity	
5650.0000		34.9300	4.9700	35.4700	5.12	-1.52%	-2.93%
5660.0000		34.9400	4.9800	35.4600	5.13	-1.47%	-2.92%
5670.0000		34.9400	5.0000	35.4500	5.14	-1.44%	-2.72%
5680.0000		34.9500	5.0100	35.4400	5.15	-1.38%	-2.72%
5690.0000		34.9600	5.0200	35.4300	5.16	-1.33%	-2.71%
5700.0000		34.9600	5.0400	35.4100	5.17	-1.27%	-2.51%
5710.0000		34.9700	5.0500	35.4000	5.18	-1.21%	-2.51%
5720.0000		34.9700	5.0600	35.3900	5.19	-1.19%	-2.50%
5730.0000		34.9800	5.0800	35.3800	5.20	-1.13%	-2.31%
5740.0000		34.9800	5.0900	35.3700	5.21	-1.10%	-2.30%
5750.0000		34.9900	5.1000	35.3600	5.22	-1.05%	-2.30%
5760.0000		34.9900	5.1200	35.3500	5.23	-1.02%	-2.10%
5770.0000		35.0000	5.1300	35.3300	5.24	-0.93%	-2.10%
5780.0000		35.0100	5.1400	35.3200	5.25	-0.88%	-2.10%
5790.0000		35.0100	5.1600	35.3100	5.26	-0.85%	-1.90%
5800.0000		35.0200	5.1700	35.3000	5.27	-0.79%	-1.90%
5810.0000		35.0200	5.1900	35.2900	5.28	-0.77%	-1.70%
5820.0000		35.0300	5.2000	35.2800	5.29	-0.71%	-1.70%
5830.0000		35.0300	5.2100	35.2700	5.30	-0.68%	-1.70%
5840.0000		35.0400	5.2300	35.2500	5.31	-0.60%	-1.51%
5850.0000		35.0500	5.2400	35.2400	5.32	-0.54%	-1.50%

*Channel Frequency Tested

15.0 SYSTEM VERIFICATION TEST RESULTS

Table 15.1 System Verification Results 2450MHz HEAD TSL

System Verification Test Results					
Date		Frequency (MHz)	Validation Source		
			P/N		S/N
07 Apr 2021		2450	D2450V2		825
Fluid Type	Fluid Temp °C	Ambient Temp °C	Ambient Humidity (%)	Forward Power (mW)	Source Spacing (mm)
Head	21.6	24	21%	250	10
Fluid Parameters					
Permittivity			Conductivity		
Measured	Target	Deviation	Measured	Target	Deviation
35.85	39.20	-8.55%	1.84	1.80	2.22%
Measured SAR					
1 gram			10 gram		
Measured	Target	Deviation	Measured	Target	Deviation
14.40	13.18	9.26%	6.50	6.01	8.24%
Measured SAR Normalized to 1.0W					
1 gram			10 gram		
Normalized	Target	Deviation	Normalized	Target	Deviation
57.60	52.72	9.26%	26.00	24.02	8.27%
<p>Prior to the SAR evaluations, system checks were performed on the planar section of the phantom and a SPEAG validation dipole in accordance with the procedures described in IEEE 1528-2013, FCC KDB 846224 and IEC 62209-1.</p> <p>The dielectric parameters of the simulated tissue mixture were measured prior to the system performance check using a Dielectric Probe Kit and a Network Analyzer.</p> <p>The forward power was applied to the dipole and the system was verified to a tolerance of +10% from the system manufacturer's dipole calibration target SAR value.</p> <p>The forward power applied was same forward power applied by the calibration lab during the calibration of this validation source.</p>					

Table 15.2 System Verification Results 2450MHz HEAD TSL

System Verification Test Results					
Date		Frequency (MHz)	Validation Source		
			P/N		S/N
29 Jun 2021		2450	D2450V2		825
Fluid Type	Fluid Temp °C	Ambient Temp °C	Ambient Humidity (%)	Forward Power (mW)	Source Spacing (mm)
Head	23.8	30	39%	250	10
Fluid Parameters					
Permittivity			Conductivity		
Measured	Target	Deviation	Measured	Target	Deviation
38.53	39.20	-1.71%	1.85	1.80	2.78%
Measured SAR					
1 gram			10 gram		
Measured	Target	Deviation	Measured	Target	Deviation
12.60	13.18	-4.40%	5.76	6.01	-4.08%
Measured SAR Normalized to 1.0W					
1 gram			10 gram		
Normalized	Target	Deviation	Normalized	Target	Deviation
50.40	52.72	-4.40%	23.04	24.02	-4.06%
<p>Prior to the SAR evaluations, system checks were performed on the planar section of the phantom and a SPEAG validation dipole in accordance with the procedures described in IEEE 1528-2013, FCC KDB 846224 and IEC 62209-1.</p> <p>The dielectric parameters of the simulated tissue mixture were measured prior to the system performance check using a Dielectric Probe Kit and a Network Analyzer.</p> <p>The forward power was applied to the dipole and the system was verified to a tolerance of +10% from the system manufacturer's dipole calibration target SAR value.</p> <p>The forward power applied was same forward power applied by the calibration lab during the calibration of this validation source.</p>					

Table 15.3 System Verification Results 2450MHz HEAD TSL

System Verification Test Results					
Date		Frequency (MHz)	Validation Source		
			P/N		S/N
29 Mar 2021		2450	D2450V2		825
Fluid Type	Fluid Temp °C	Ambient Temp °C	Ambient Humidity (%)	Forward Power (mW)	Source Spacing (mm)
Head	21.2	23	19%	250	10
Fluid Parameters					
Permittivity			Conductivity		
Measured	Target	Deviation	Measured	Target	Deviation
37.99	39.20	-3.09%	1.87	1.80	3.89%
Measured SAR					
1 gram			10 gram		
Measured	Target	Deviation	Measured	Target	Deviation
14.40	13.18	9.26%	6.47	6.01	7.74%
Measured SAR Normalized to 1.0W					
1 gram			10 gram		
Normalized	Target	Deviation	Normalized	Target	Deviation
57.60	52.72	9.26%	25.88	24.02	7.77%
<p>Prior to the SAR evaluations, system checks were performed on the planar section of the phantom and a SPEAG validation dipole in accordance with the procedures described in IEEE 1528-2013, FCC KDB 846224 and IEC 62209-1.</p> <p>The dielectric parameters of the simulated tissue mixture were measured prior to the system performance check using a Dielectric Probe Kit and a Network Analyzer.</p> <p>The forward power was applied to the dipole and the system was verified to a tolerance of +10% from the system manufacturer's dipole calibration target SAR value.</p> <p>The forward power applied was same forward power applied by the calibration lab during the calibration of this validation source.</p>					

Table 15.4 System Verification Results 5250MHz HEAD TSL

System Verification Test Results					
Date		Frequency (MHz)	Validation Source		
			P/N		S/N
28 May 2021		5250	D5GHzV2		1031
Fluid Type	Fluid Temp °C	Ambient Temp °C	Ambient Humidity (%)	Forward Power (mW)	Source Spacing (mm)
Head	24.2	26	29%	50	10
Fluid Parameters					
Permittivity			Conductivity		
Measured	Target	Deviation	Measured	Target	Deviation
37.49	35.93	4.34%	4.71	4.71	0.00%
Measured SAR					
1 gram			10 gram		
Measured	Target	Deviation	Measured	Target	Deviation
4.05	3.97	1.93%	1.17	1.15	2.14%
Measured SAR Normalized to 1.0W					
1 gram			10 gram		
Normalized	Target	Deviation	Normalized	Target	Deviation
81.00	79.47	1.93%	23.40	22.91	2.14%
<p>Prior to the SAR evaluations, system checks were performed on the planar section of the phantom and a SPEAG validation dipole in accordance with the procedures described in IEEE 1528-2013, FCC KDB 846224 and IEC 62209-1.</p> <p>The dielectric parameters of the simulated tissue mixture were measured prior to the system performance check using a Dielectric Probe Kit and a Network Analyzer.</p> <p>The forward power was applied to the dipole and the system was verified to a tolerance of +10% from the system manufacturer's dipole calibration target SAR value.</p> <p>The forward power applied was same forward power applied by the calibration lab during the calibration of this validation source.</p>					

Table 15.5 System Verification Results 5750MHz HEAD TSL

System Verification Test Results					
Date		Frequency (MHz)	Validation Source		
			P/N		S/N
28 May 2021		5750	D5GHzV2		1031
Fluid Type	Fluid Temp °C	Ambient Temp °C	Ambient Humidity (%)	Forward Power (mW)	Source Spacing (mm)
Head	24.2	26	29%	50	10
Fluid Parameters					
Permittivity			Conductivity		
Measured	Target	Deviation	Measured	Target	Deviation
34.99	35.36	-1.05%	5.10	5.22	-2.30%
Measured SAR					
1 gram			10 gram		
Measured	Target	Deviation	Measured	Target	Deviation
3.64	3.78	-3.63%	1.04	1.10	-5.50%
Measured SAR Normalized to 1.0W					
1 gram			10 gram		
Normalized	Target	Deviation	Normalized	Target	Deviation
72.80	75.54	-3.63%	20.80	22.01	-5.50%
<p>Prior to the SAR evaluations, system checks were performed on the planar section of the phantom and a SPEAG validation dipole in accordance with the procedures described in IEEE 1528-2013, FCC KDB 846224 and IEC 62209-1.</p> <p>The dielectric parameters of the simulated tissue mixture were measured prior to the system performance check using a Dielectric Probe Kit and a Network Analyzer.</p> <p>The forward power was applied to the dipole and the system was verified to a tolerance of +10% from the system manufacturer's dipole calibration target SAR value.</p> <p>The forward power applied was same forward power applied by the calibration lab during the calibration of this validation source.</p>					

16.0 SYSTEM VALIDATION SUMMARY

Table 16.0 System Validation Summary

System Validation Summary											
Frequency (MHz)	Validation Date	Probe Model	Probe S/N	Validation Source	Source S/N	Tissue	Tissue Dielectrics		Validation Results		
							Permittivity	Conductivity	Sensitivity	Linearity	Isotropy
30	31-May-19	EX3DV4	3600	CLA-30	1005	Head	52.40	0.75	Pass	Pass	Pass
150	20-May-20	EX3DV4	3600	CLA-150	4007	Head	52.59	0.76	Pass	Pass	Pass
450	12-Aug-20	EX3DV4	3600	D450V3	1068	Head	43.64	0.84	Pass	Pass	Pass
750	20-Jun-19	EX3DV4	3600	D750V3	1061	Head	44.27	0.83	Pass	Pass	Pass
835	17-Aug-20	EX3DV4	3600	D835V2	4d075	Head	40.60	0.87	Pass	Pass	Pass
900	20-Aug-20	EX3DV4	3600	D900V2	045	Head	39.09	0.94	Pass	Pass	Pass
1640	5-Jul-18	EX3DV4	3600	1620-S-2	207-00102	Head	39.87	1.27	Pass	Pass	Pass
1800	18-Jun-19	EX3DV4	3600	D1800V2	247	Head	54.77	1.53	Pass	Pass	Pass
2450	27-May-20	EX3DV4	3600	D2450V2	825	Head	37.21	1.95	Pass	Pass	Pass
2450	29-Jun-21	EX3DV4	3600	D2450V2	825	Head	38.53	1.85	Pass	Pass	Pass
5250	29-May-20	EX3DV4	3600	D5GHzV2	1031	Head	34.44	5.07	Pass	Pass	Pass
5250	25-May-21	EX3DV4	3600	D5GHzV2	1031	Head	33.74	4.9	Pass	Pass	Pass
5750	28-May-20	EX3DV4	3600	D5GHzV2	1031	Head	35.16	5.56	Pass	Pass	Pass
5750	28-May-21	EX3DV4	3600	D5GHzV2	1031	Head	34.99	5.10	Pass	Pass	Pass

17.0 MEASUREMENT SYSTEM SPECIFICATIONS

Table 17.0 Measurement System Specifications

Measurement System Specification	
Specifications	
Positioner	Stäubli Unimation Corp. Robot Model: TX90XL
Repeatability	+/- 0.035 mm
No. of axis	6.0
Data Acquisition Electronic (DAE) System	
Cell Controller	
Processor	Intel(R) Core(TM) i7-7700
Clock Speed	3.60 GHz
Operating System	Windows 10 Professional
Data Converter	
Features	Signal Amplifier, multiplexer, A/D converter, and control logic
Software	Measurement Software: DASY6, V 6.4.0.12171 / DASY52 V52.10.0.1446 Postprocessing Software: SEMCAD X, V14.6.10(Deployment Build)
Connecting Lines	Optical downlink for data and status info., Optical uplink for commands and clock
DASY Measurement Server	
Function	Real-time data evaluation for field measurements and surface detection
Hardware	Intel ULV Celeron CPU 400 MHz; 128 MB chip disk; 128 MB RAM
Connections	COM1, COM2, DAE, Robot, Ethernet, Service Interface
E-Field Probe	
Model	EX3DV4
Serial No.	3600
Construction	Triangular core fiber optic detection system
Frequency	10 MHz to 6 GHz
Linearity	±0.2 dB (30 MHz to 3 GHz)
Phantom	
Type	ELI Elliptical Planar Phantom
Shell Material	Fiberglass
Thickness	2mm +/- .2mm
Volume	> 30 Liter

Measurement System Specification		
Probe Specification		
Construction:	Symmetrical design with triangular core; Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, glycol)	
Calibration:	In air from 10 MHz to 2.5 GHz In head simulating tissue at frequencies of 900 MHz and 1.8 GHz (accuracy $\pm 8\%$)	
Frequency:	10 MHz to > 6 GHz; Linearity: ± 0.2 dB (30 MHz to 3 GHz)	
Directivity:	± 0.2 dB in head tissue (rotation around probe axis) ± 0.4 dB in head tissue (rotation normal to probe axis)	
Dynamic Range:	5 μ W/g to > 100 mW/g; Linearity: ± 0.2 dB	
Surface Detect:	± 0.2 mm repeatability in air and clear liquids over diffuse reflecting surfaces	
Dimensions:	Overall length: 330 mm; Tip length: 16 mm; Body diameter: 12 mm; Tip diameter: 6.8 mm Distance from probe tip to dipole centers: 2.7 mm	
Application:	General dosimetry up to 3 GHz; Compliance tests of mobile phone	
Phantom Specification		
<p>The ELI V5.0 phantom is an elliptical planar fiberglass shell phantom with a shell thickness of 2.0mm +/- .2mm at the planar area. This phantom conforms to OET Bulletin 65, Supplement C, IEC/IEEE 62209-1528, IEEE 1528-2013, IEC 62209-1 and IEC 62209-2.</p>		
		ELI Phantom
Device Positioner Specification		
<p>The DASY device positioner has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of 65°. The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections.</p>		
		Device Positioner

18.0 TEST EQUIPMENT LIST

Table 18.0 Equipment List and Calibration

Test Equipment List				
DESCRIPTION	ASSET NO.	SERIAL NO.	DATE CALIBRATED	CALIBRATION DUE
Schmid & Partner DASY 6 System	-	-	-	-
-DASY Measurement Server	00158	1078	CNR	CNR
-Robot	00046	599396-01	CNR	CNR
-DAE4	00019	353	17-Mar-20	22-Apr-21
-DAE4	00019	353	22-Apr-21	22-Apr-22
-EX3DV4 E-Field Probe	00213	3600	25-Mar-20	20-Apr-21
-EX3DV4 E-Field Probe	00213	3600	20-Apr-21	20-Apr-22
-D2450V2 Validation Dipole	00219	825	24-Apr-18	24-Apr-21
-D2450V2 Validation Dipole	00219	825	24-Apr-21	24-Apr-24
-D5GHzV2 Validation Dipole	00126	1031	26-Apr-18	26-Apr-21
-D5GHzV2 Validation Dipole	00126	1031	27-Apr-21	27-Apr-24
ELI Phantom	00247	1234	CNR	CNR
SAM Phantom	00154	1033	CNR	CNR
HP 85070C Dielectric Probe Kit	00033	none	CNR	CNR
Gigatronics 8652A Power Meter	00007	1835801	26-Mar-19	26-Mar-22
Gigatronics 80701A Power Sensor	00186	1837002	COU	COU
Gigatronics 80334A Power Sensor	00237	1837001	26-Mar-19	26-Mar-22
HP 8753ET Network Analyzer	00134	US39170292	6-Jan-21	6-Jan-24
Rohde & Schwarz SMR20 Signal Generator	00006	100104	11-Aug-20	11-Aug-23
Amplifier Research 10W1000C Power Amplifier	00041	27887	CNR	CNR
Amplifier Research 5S1G4 Power Amplifier	00106	26235	CNR	CNR
Narda Directional Coupler 3020A	00064	-	CNR	CNR
Kangaroo VWR Humidity/Thermometer	00334	192385455	5-Aug-19	6-Aug-22
Digital Multi Meter DMR-1800	00250	TE182	23-Jun-20	23-Jun-23
Bipolar Power Supply 6299A	00086	1144A02155	CNR	CNR
DC-18G 10W 30db Attenuator	00102	-	COU	COU
R&S FSP40 Spectrum Analyzer	00241	100500	15-May-18	15-May-21
HP 8566B Spectrum Analyzer	00051	2747A055100	29-Jun-20	29-Jun-23
RF Cable-SMA	00311	-	CNR	CNR
HP Calibration Kit	00145	-	CNR	CNR

CNR = Calibration Not Required

COU = Calibrate on Use

19.0 FLUID COMPOSITION

Table 19.0 Fluid Composition 2450MHz BODY TSL

Tissue Simulating Liquid (TSL) Composition				
Component by Percent Weight				
Water	Glycol	Salt ⁽¹⁾	HEC ⁽²⁾	Bactericide ⁽³⁾
69.98	30.0	0.02	0.0	0.0

(1) Non-Iodinized

(2) **H**ydroxy**E**thyl-**C**ellulose: Sigma-Aldrich P/N 54290-500g

(3) Dow Chemical Dowicil 75 Antimicrobial Perservative

Table 19.1 Fluid Composition 5250MHz BODY TSL

This is a proprietary composition by SPEAG.

APPENDIX A – SYSTEM VERIFICATION PLOTS

DUT: Dipole 2450 MHz D2450V2; Type: D2450V2; Serial: D2450V2 - SN:825
Procedure Name: SPC 2450H Input=250mw, Target=[14.63][13.3][11.97]W/kg 2

Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2450$ MHz; $\sigma = 1.87$ S/m; $\epsilon_r = 37.99$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Date/Time: 3/29/2021 11:06:40 AM

DASY5 Configuration:

- Probe: EX3DV4 - SN3600; ConvF(6.45, 6.45, 6.45) @ 2450 MHz; Calibrated: 3/25/2020
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 3/17/2020
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 Ax; Serial: 1234
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

SPC/SPC 2450H Input=250mw, Target=[14.63][13.3][11.97]W/kg 2/Area Scan (4x9x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 16.0 W/kg

SPC/SPC 2450H Input=250mw, Target=[14.63][13.3][11.97]W/kg 2/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 91.52 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 32.0 W/kg

SAR(1 g) = 14.4 W/kg; SAR(10 g) = 6.47 W/kg

Smallest distance from peaks to all points 3 dB below = 10.2 mm


Ratio of SAR at M2 to SAR at M1 = 45.9%

Maximum value of SAR (measured) = 16.1 W/kg


SPC/SPC 2450H Input=250mw, Target=[14.63][13.3][11.97]W/kg 2/Z Scan (1x1x22): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Penetration depth = 6.741 (6.620, 6.900) [mm]

Maximum value of SAR (interpolated) = 25.5 W/kg

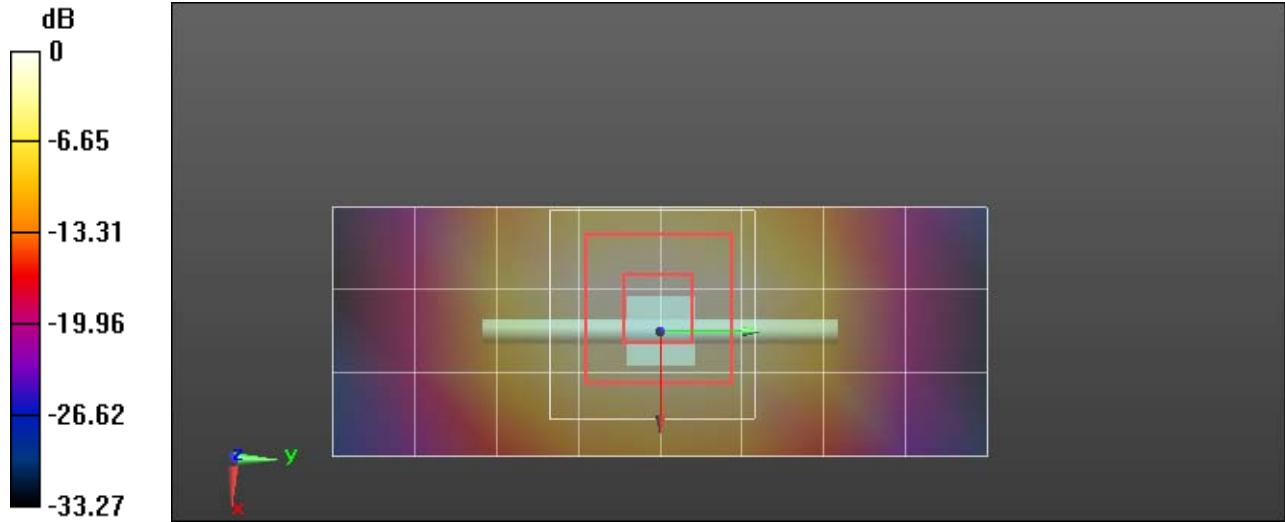

0 dB = 16.0 W/kg = 12.04 dBW/kg

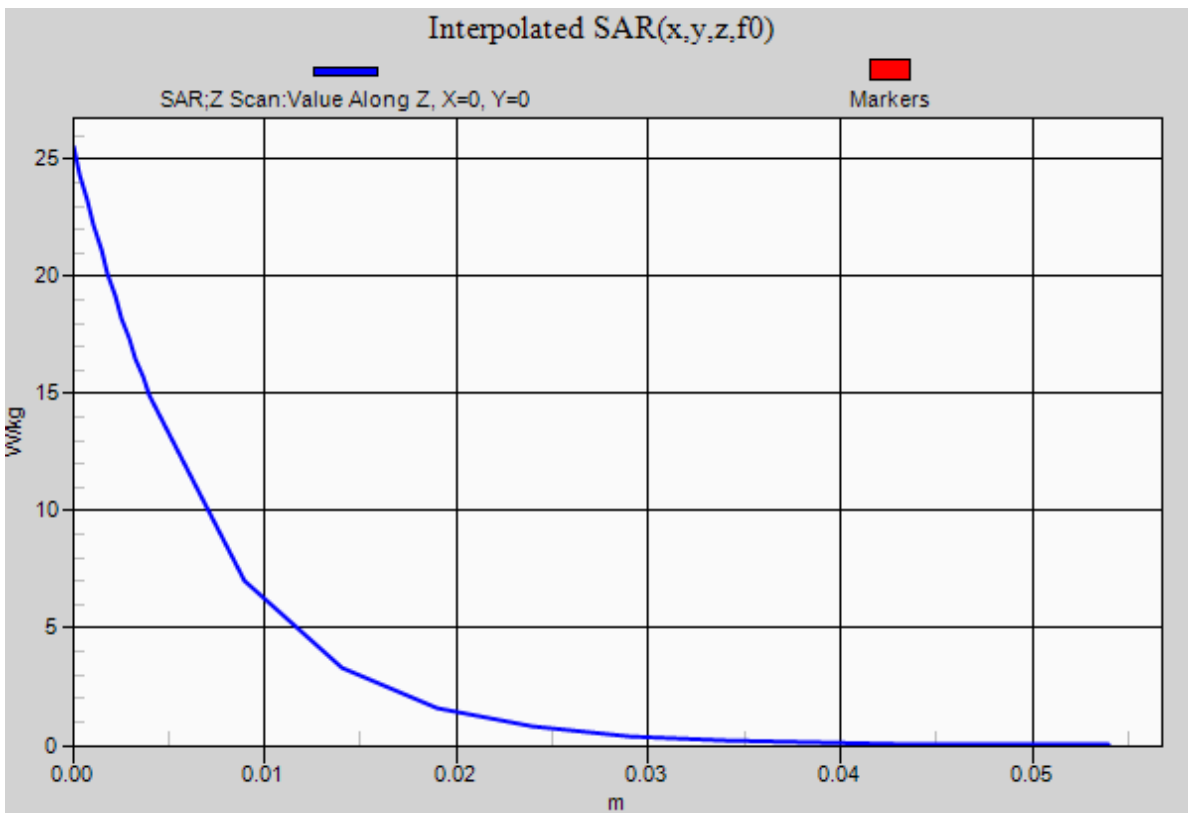

DUT: Dipole 2450 MHz D2450V2; Type: D2450V2; Serial: D2450V2 - SN:825
Procedure Name: SPC 2450H Input=250mw, Target=[14.63][13.3][11.97]W/kg 2

Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2450$ MHz; $\sigma = 1.84$ S/m; $\epsilon_r = 35.85$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Date/Time: 4/7/2021 4:00:29 PM



DASY5 Configuration:

- Probe: EX3DV4 - SN3600; ConvF(6.45, 6.45, 6.45) @ 2450 MHz; Calibrated: 3/25/2020
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 3/17/2020
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 Ax; Serial: 1234
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

SPC/SPC 2450H Input=250mw, Target=[14.63][13.3][11.97]W/kg 2/Area Scan (4x9x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 14.4 W/kg

SPC/SPC 2450H Input=250mw, Target=[14.63][13.3][11.97]W/kg 2/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 92.00 V/m; Power Drift = 0.08 dB
Peak SAR (extrapolated) = 32.1 W/kg
SAR(1 g) = 14.4 W/kg; SAR(10 g) = 6.5 W/kg
Smallest distance from peaks to all points 3 dB below = 10.2 mm
Ratio of SAR at M2 to SAR at M1 = 45.9%
Maximum value of SAR (measured) = 16.3 W/kg

SPC/SPC 2450H Input=250mw, Target=[14.63][13.3][11.97]W/kg 2/Z Scan (1x1x22): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Penetration depth = 6.713 (6.498, 6.846) [mm]
Maximum value of SAR (interpolated) = 27.4 W/kg

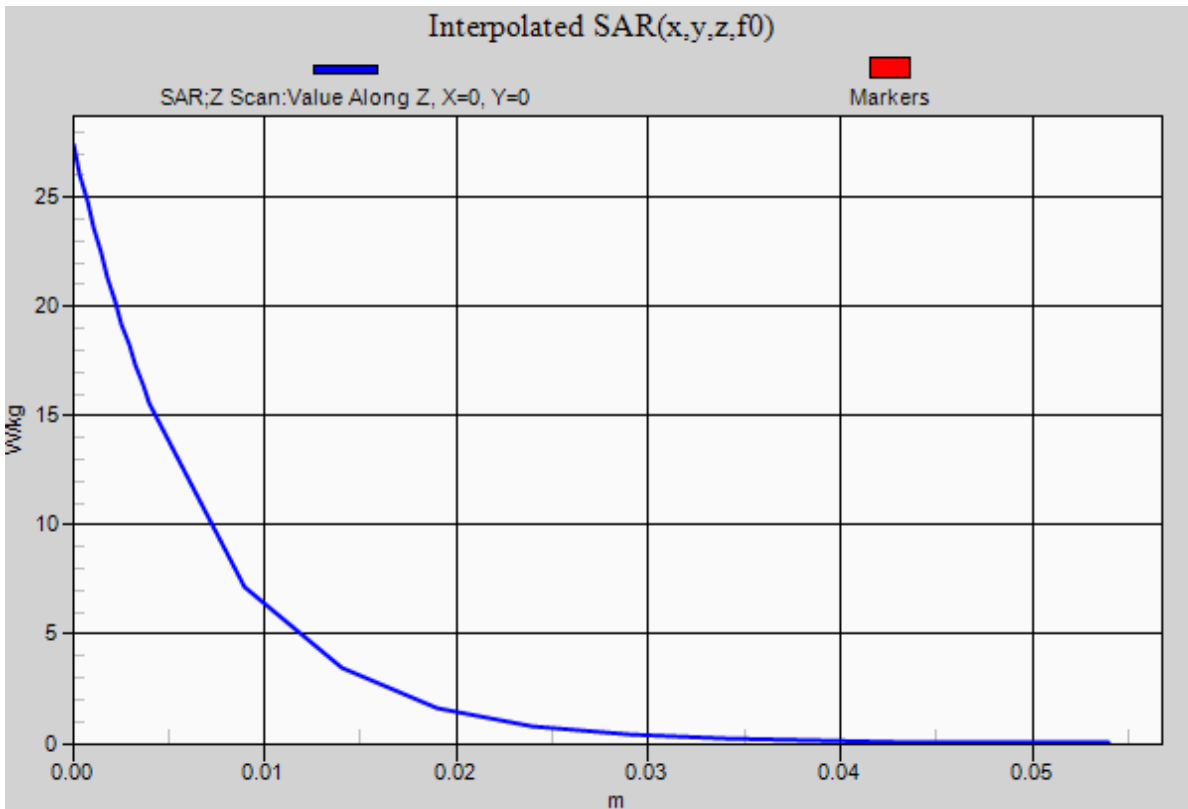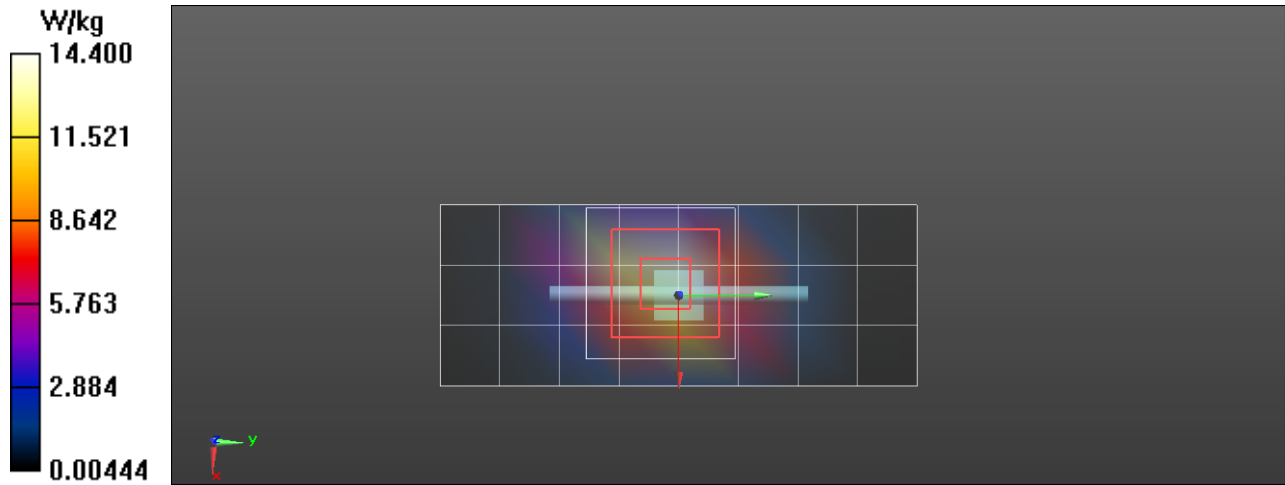

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1031
Procedure Name: SPC 5250H Input=50 mw, Target= [3.58][3.97][4.37], Target=79.5W/kg@1000mw

Communication System: UID 0, CW (0); Frequency: 5250 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5250$ MHz; $\sigma = 4.71$ S/m; $\epsilon_r = 37.49$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Date/Time: 5/28/2021 1:21:32 PM



DASY5 Configuration:

- Probe: EX3DV4 - SN3600; ConvF(4.41, 4.41, 4.41) @ 5250 MHz; Calibrated: 4/28/2021
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 4/22/2021
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 Ax; Serial: 1234
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

SPC/SPC 5250H Input=50 mw, Target= [3.58][3.97][4.37], Target=79.5W/kg@1000mw/Area Scan (4x7x1): Measurement grid:
dx=10mm, dy=10mm
Maximum value of SAR (measured) = 6.75 W/kg

SPC/SPC 5250H Input=50 mw, Target= [3.58][3.97][4.37], Target=79.5W/kg@1000mw/Zoom Scan (7x7x6)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 31.70 V/m; Power Drift = -0.15 dB
Peak SAR (extrapolated) = 16.1 W/kg
SAR(1 g) = 4.05 W/kg; SAR(10 g) = 1.17 W/kg
Smallest distance from peaks to all points 3 dB below = 7.5 mm
Ratio of SAR at M2 to SAR at M1 = 55%
Maximum value of SAR (measured) = 8.49 W/kg

SPC/SPC 5250H Input=50 mw, Target= [3.58][3.97][4.37], Target=79.5W/kg@1000mw/Z Scan (1x1x19): Measurement grid:
dx=20mm, dy=20mm, dz=20mm
Penetration depth = n/a (n/a, 3.202) [mm]
Maximum value of SAR (interpolated) = 9.28 W/kg

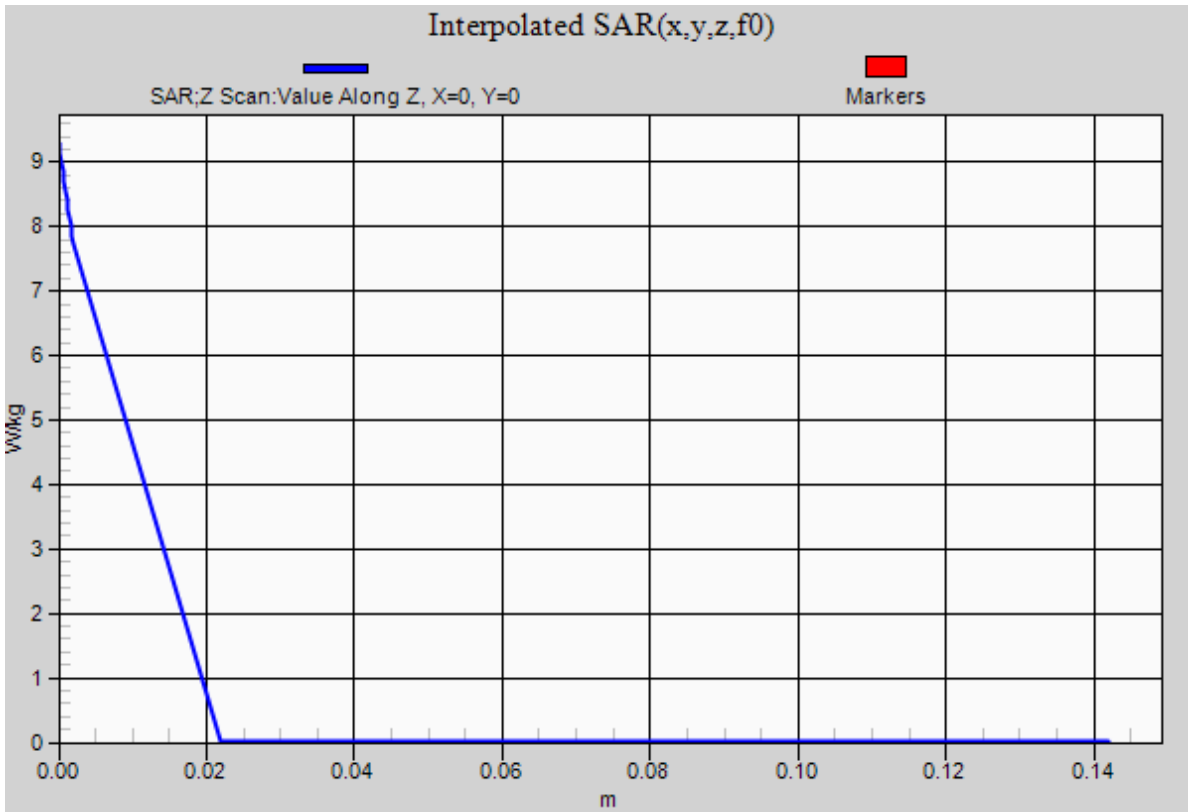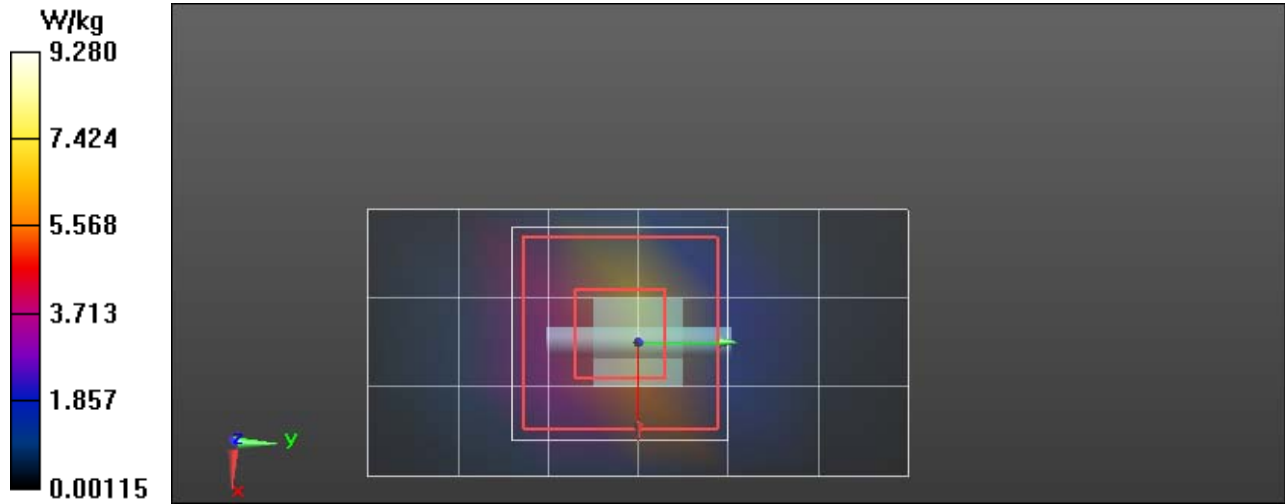

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:xxx
Procedure Name: SPC 5750H Input=50 mw, Target=[3.399][3.777][4.155], Target=75.54W/kg@1000mw

Communication System: UID 0, CW (0); Frequency: 5750 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5750$ MHz; $\sigma = 5.1$ S/m; $\epsilon_r = 34.99$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Date/Time: 5/28/2021 2:03:48 PM



DASY5 Configuration:

- Probe: EX3DV4 - SN3600; ConvF(4.06, 4.06, 4.06) @ 5750 MHz; Calibrated: 4/28/2021
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 4/22/2021
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 Ax; Serial: 1234
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

SPC/SPC 5750H Input=50 mw, Target=[3.399][3.777][4.155], Target=75.54W/kg@1000mw/Area Scan (4x7x1): Measurement grid:
dx=10mm, dy=10mm
Maximum value of SAR (measured) = 6.86 W/kg

SPC/SPC 5750H Input=50 mw, Target=[3.399][3.777][4.155], Target=75.54W/kg@1000mw/Zoom Scan (7x7x6)/Cube 0:
Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 30.20 V/m; Power Drift = -0.63 dB
Peak SAR (extrapolated) = 15.9 W/kg
SAR(1 g) = 3.64 W/kg; SAR(10 g) = 1.04 W/kg
Smallest distance from peaks to all points 3 dB below = 7.4 mm
Ratio of SAR at M2 to SAR at M1 = 51.8%
Maximum value of SAR (measured) = 7.79 W/kg

SPC/SPC 5750H Input=50 mw, Target=[3.399][3.777][4.155], Target=75.54W/kg@1000mw/Z Scan (1x1x22): Measurement grid:
dx=20mm, dy=20mm, dz=5mm
Penetration depth = 2.871 (3.049, 2.862) [mm]
Maximum value of SAR (interpolated) = 11.2 W/kg

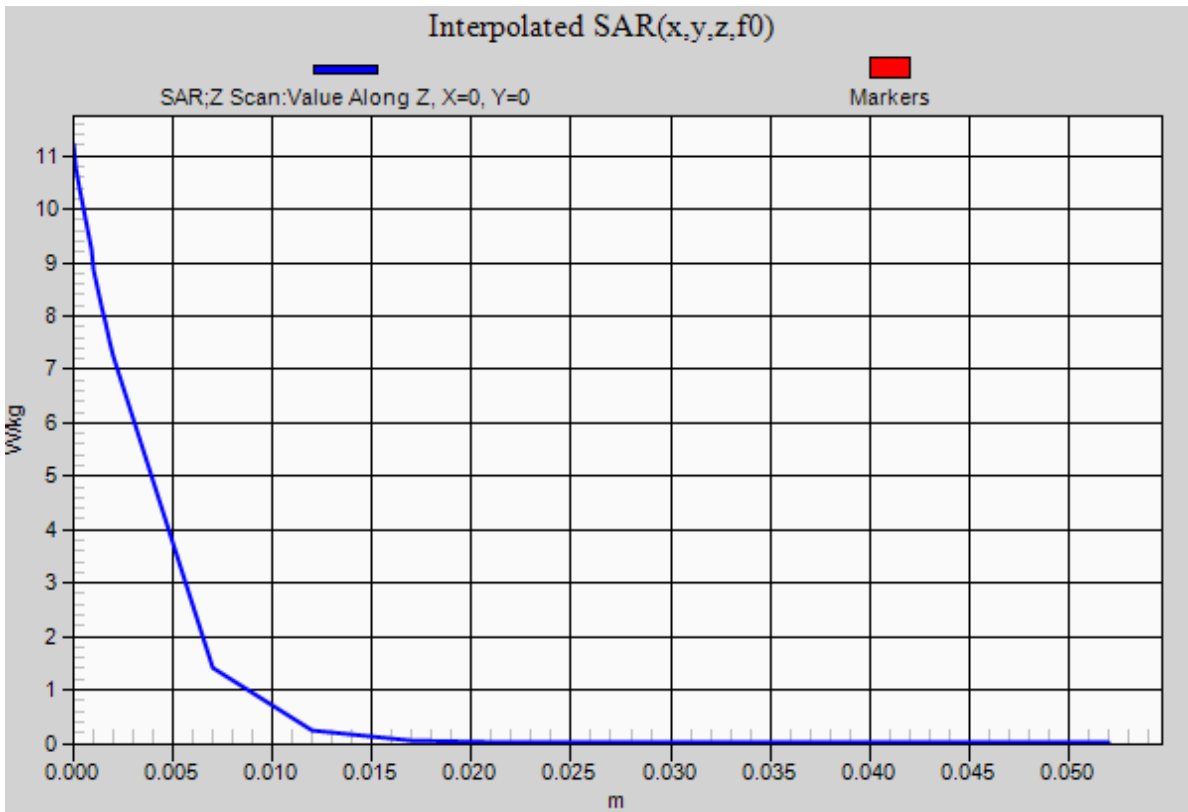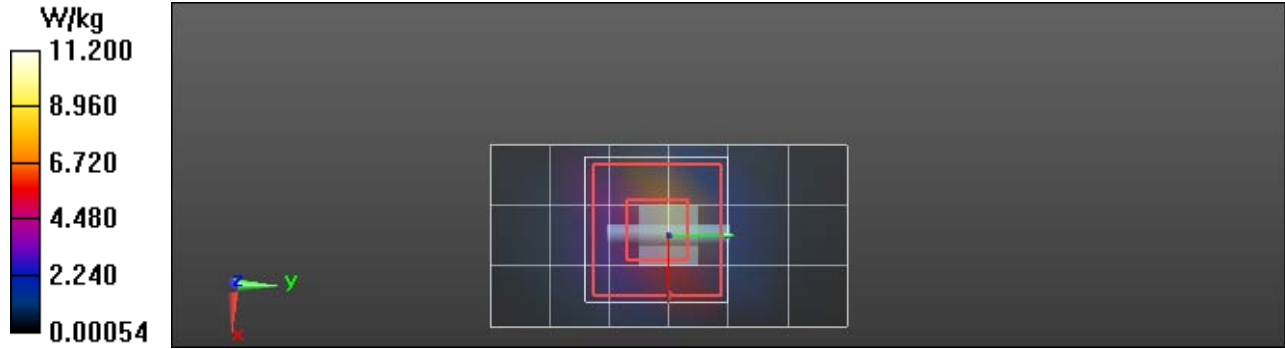

DUT: Dipole 2450 MHz D2450V2; Type: D2450V2; Serial: D2450V2 - SN:825
Procedure Name: SPC 2450H Input=250mw, Target=[11.86][13.18][14.498]W/kg 2

Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2450$ MHz; $\sigma = 1.85$ S/m; $\epsilon_r = 38.53$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Date/Time: 6/29/2021 10:22:16 AM

DASY5 Configuration:

- Probe: EX3DV4 - SN3600; ConvF(6.45, 6.45, 6.45) @ 2450 MHz; Calibrated: 4/28/2021
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 4/22/2021
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 Ax; Serial: 1234
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

SPC/SPC 2450H Input=250mw, Target=[11.86][13.18][14.498]W/kg 2/Area Scan (4x9x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 12.1 W/kg

SPC/SPC 2450H Input=250mw, Target=[11.86][13.18][14.498]W/kg 2/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 87.48 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 27.2 W/kg

SAR(1 g) = 12.6 W/kg; SAR(10 g) = 5.76 W/kg

Smallest distance from peaks to all points 3 dB below = 10 mm



Ratio of SAR at M2 to SAR at M1 = 47.3%

Maximum value of SAR (measured) = 14.3 W/kg

SPC/SPC 2450H Input=250mw, Target=[11.86][13.18][14.498]W/kg 2/Z Scan (1x1x22): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Penetration depth = 7.001 (6.741, 7.167) [mm]

Maximum value of SAR (interpolated) = 23.8 W/kg

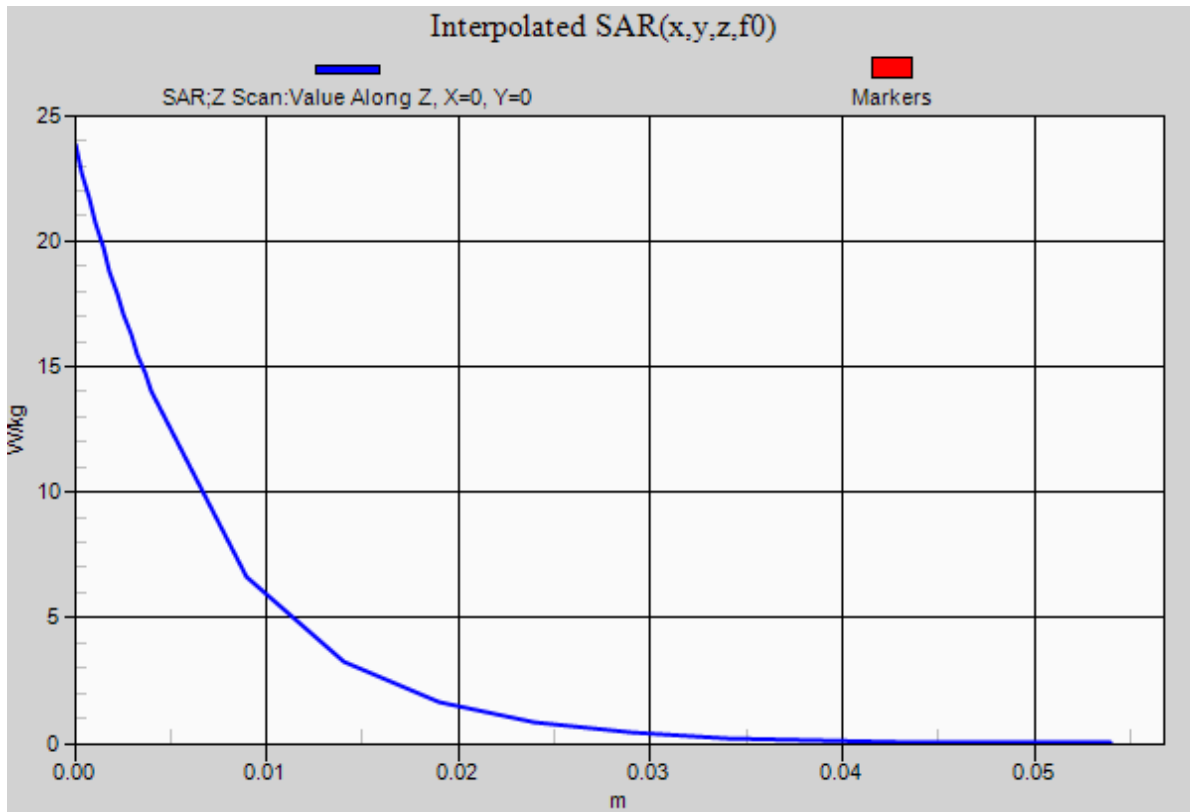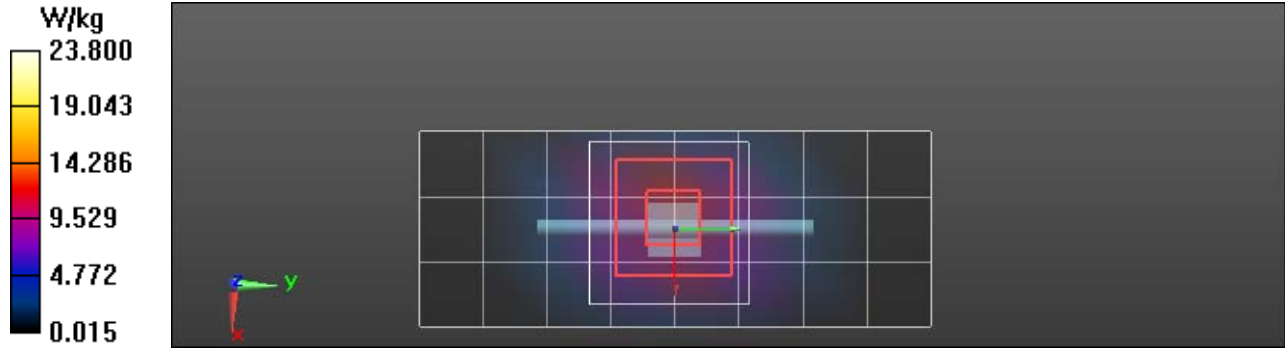

APPENDIX B – MEASUREMENT PLOTS OF MAXIMUMUM MEASURED SAR

Plot B9

DUT: A04158; Type: Transmitter; Serial: 3364020408
Procedure Name: B14-A04158, Body-Back Side, 5180MHz,WIFI

Communication System: UID 10317 - AAC, IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 96pc duty cycle); Frequency: 5180 MHz; Duty Cycle: 1:6.85962

Medium parameters used: $f = 5180$ MHz; $\sigma = 4.62$ S/m; $\epsilon_r = 37.43$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Date/Time: 5/29/2021 2:21:13 PM

DASY5 Configuration:



- Probe: EX3DV4 - SN3600; ConvF(4.41, 4.41, 4.41) @ 5180 MHz; Calibrated: 4/28/2021
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 4/22/2021
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 Ax; Serial: 1234
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

5250H/B14-A04158, Body-Back Side, 5180MHz,WIFI/Area Scan (9x14x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 1.96 W/kg

5250H/B14-A04158, Body-Back Side, 5180MHz,WIFI/Zoom Scan (8x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 3.711 V/m; Power Drift = 0.43 dB
Peak SAR (extrapolated) = 5.47 W/kg
SAR(1 g) = 1.38 W/kg; SAR(10 g) = 0.481 W/kg
Smallest distance from peaks to all points 3 dB below = 8.6 mm
Ratio of SAR at M2 to SAR at M1 = 23.3%

Maximum value of SAR (measured) = 1.33 W/kg

5250H/B14-A04158, Body-Back Side, 5180MHz,WIFI/Z Scan (1x1x19): Measurement grid: dx=20mm, dy=20mm, dz=20mm
Penetration depth = n/a (n/a, 0) [mm]
Maximum value of SAR (interpolated) = 0.0689 W/kg

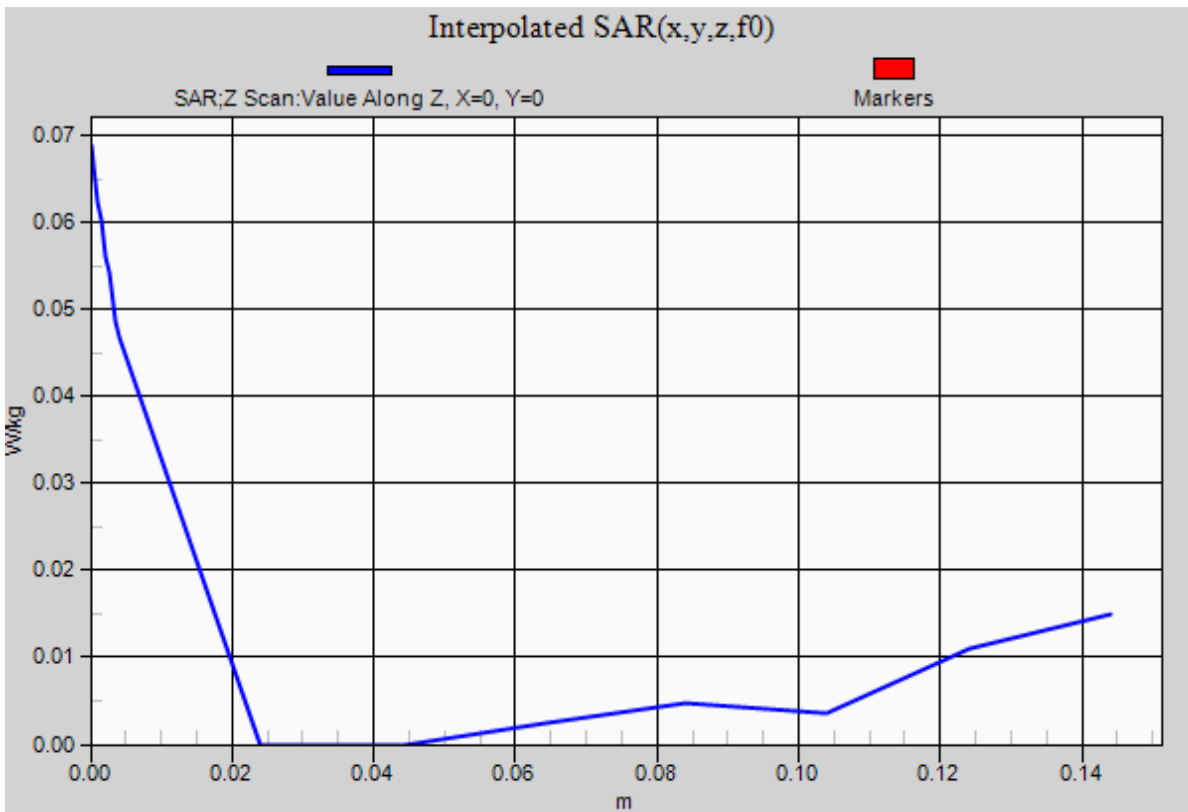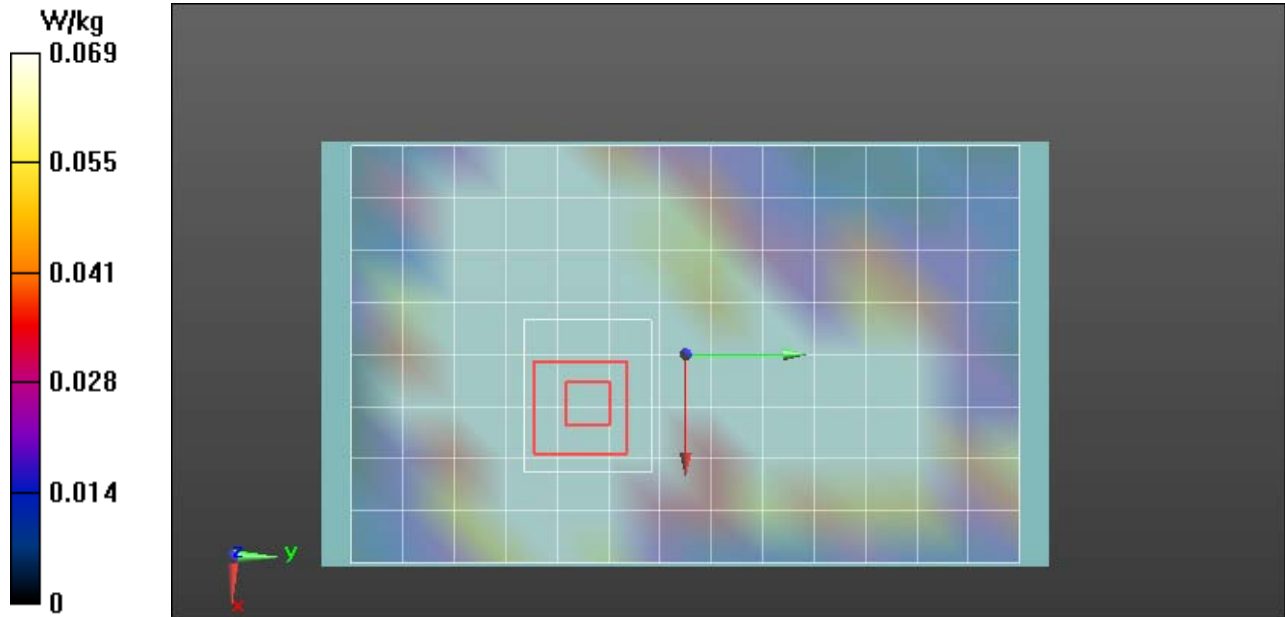

Plot B15

DUT: A04158; Type: Transmitter; Serial: 3364020408
Procedure Name: B100 -A04158, Body-Back Side, 2402 BlueTooth GFSK

Communication System: UID 0, CW (0); Frequency: 2402 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2402$ MHz; $\sigma = 1.792$ S/m; $\epsilon_r = 38.77$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Date/Time: 6/29/2021 12:20:09 PM

DASY5 Configuration:

- Probe: EX3DV4 - SN3600; ConvF(6.45, 6.45, 6.45) @ 2402 MHz; Calibrated: 4/28/2021
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 4/22/2021
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 Ax; Serial: 1234
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

2450H/B100 -A04158, Body-Back Side, 2402 BlueTooth GFSK/Area Scan 2 (9x14x1): Measurement grid: dx=12mm, dy=12mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.0120 W/kg

2450H/B100 -A04158, Body-Back Side, 2402 BlueTooth GFSK/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.4430 V/m; Power Drift = -0.73 dB

Peak SAR (extrapolated) = 0.102 W/kg

SAR(1 g) = 0.015 W/kg; SAR(10 g) = 0.00467 W/kg

Ratio of SAR at M2 to SAR at M1 = 1.8%

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.102 W/kg

2450H/B100 -A04158, Body-Back Side, 2402 BlueTooth GFSK/Z Scan (1x1x19): Measurement grid: dx=20mm, dy=20mm, dz=20mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Penetration depth = n/a (n/a, 134.7) [mm]

Maximum value of SAR (interpolated) = 0.00160 W/kg

