

Antenna Gain Information: A04185

Equipment Description:

This report contains the antenna gain information for the Garmin Model **A04185**. The operational frequency of the technology is approximately 2400-2480 MHz. The maximum gain within the frequency bands are reported.


Reported Data:

Maximum Gain for Antenna 1: **1.00 dBi @ 2480 MHz**

Procedure:

Garmin uses an ETS-Lindgren AMS-8500 3D Fully Anechoic Automated Antenna Measurement System. The measurement chamber is fully anechoic and contains both the Equipment Under Test (EUT) and the measurement antenna. The EUT is mounted on a Multi-Axis Positioner, which can orient the antenna in all orientations relative to the measurement antenna. The measurement antenna is dual-polarized and measures both horizontal and vertical polarization simultaneously. The other equipment includes a Vector Signal Generator, a multi-channel Vector Network Analyzer, and a control PC. Data is taken and analyzed using EMQuest Data Acquisition and Analysis Software. The output includes the maximum 3D antenna gain within the frequency band.

Setup:

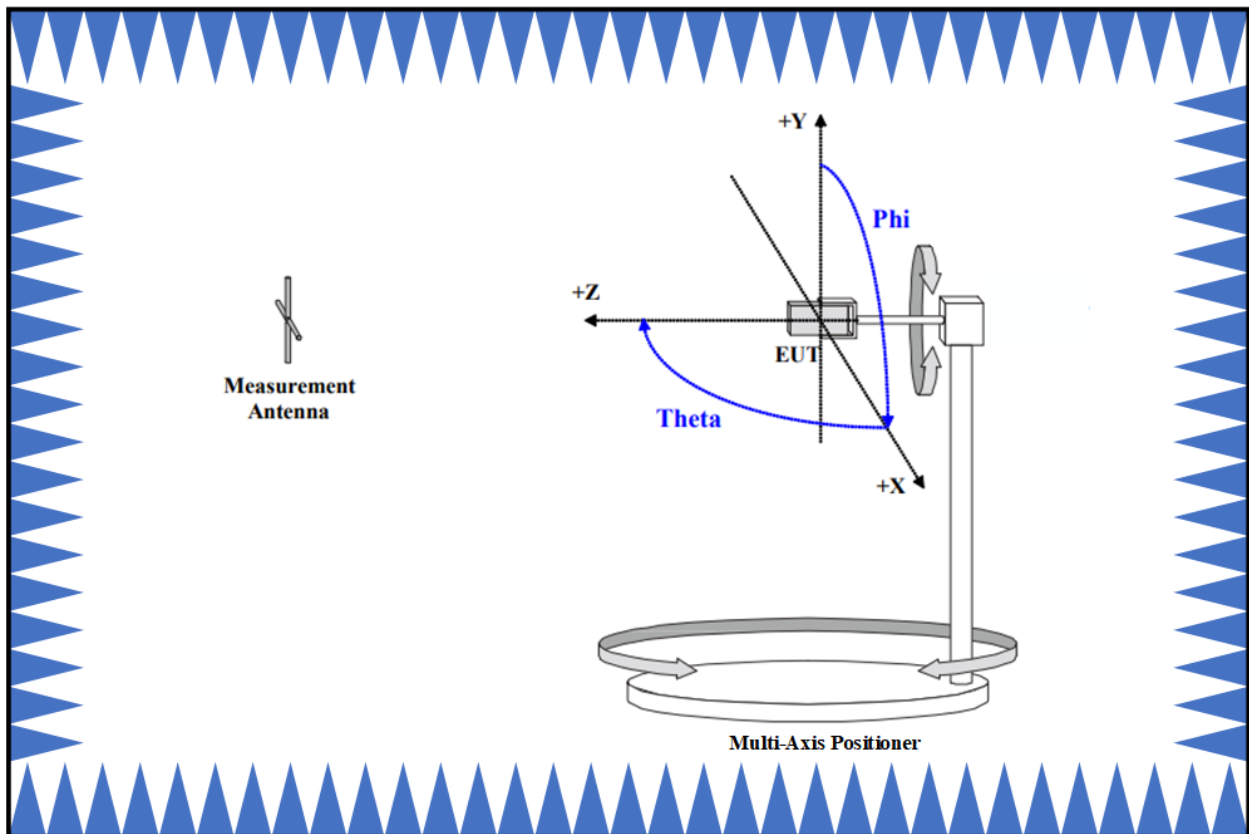

Equipment List:

3D Chamber PC interfaced to Test Equipment
EMQuest Software w/ Required Drivers for Equipment Installed
AMS-8500 Anechoic Wireless Test Chamber
Dual Polarization Measurement Antenna (ETS 3164)
Multi-Axis Positioning System (MAPS)
Multi-Axis Positioning Controller (ETS EMCO Model 2090)
Network Analyzer (Agilent E5017C)
Automated RF Switch Controller (Agilent)

Additional Information:

- Information regarding the antenna design, dimensions and cable length is provided in the confidential operational description.

Signature:



Poojita Rao Bhattu
Compliance Engineer 2
Garmin International