

## ROGERS LABS, INC.

4405 West 259<sup>th</sup> Terrace  
Louisburg, KS 66053  
Phone / Fax (913) 837-3214

# 47CFR, PART 15C - Intentional Radiators 47CFR Paragraph 15.249 and Industry Canada RSS-GEN Issue 5 and RSS-210 Issue 10 Application For Grant of Certification

Model: A04272

2402-2480 MHz (DXX)  
Low Power Digital Transmitter

FCC ID: IPH-04272

IC: 1792A-04272

## Garmin International, Inc.

1200 East 151st Street  
Olathe, KS 66062

FCC Designation: US5305  
ISED Registration: 3041A-1

Test Report Number: 210729

Test Date: July 29, 2021

Authorized Signatory: *Scot D Rogers*  
Scot D. Rogers

This report shall not be reproduced except in full, without the written approval of the laboratory. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

Rogers Labs, Inc.  
4405 West 259<sup>th</sup> Terrace  
Louisburg, KS 66053  
Phone/Fax: (913) 837-3214  
Revision 2

Garmin International, Inc.  
Model: A04272  
Test: 210729  
Test to: 47CFR 15C, RSS-Gen RSS-247  
File: A04272 DXX TstRpt 210729 r2

SN's: 72W000054 / 72W000083  
FCC ID: IPH-04272  
IC: 1792A-04272  
Date: September 29, 2021  
Page 1 of 48

## Table of Contents

<b>TABLE OF CONTENTS.....</b>	<b>2</b>
<b>REVISIONS.....</b>	<b>4</b>
<b>EXECUTIVE SUMMARY .....</b>	<b>5</b>
<b>OPINION / INTERPRETATION OF RESULTS .....</b>	<b>5</b>
<b>EQUIPMENT TESTED.....</b>	<b>6</b>
<b>Equipment Function .....</b>	<b>7</b>
<b>Equipment Configuration.....</b>	<b>8</b>
<b>APPLICATION FOR CERTIFICATION.....</b>	<b>9</b>
<b>APPLICABLE STANDARDS.....</b>	<b>10</b>
<b>EQUIPMENT TESTING PROCEDURES .....</b>	<b>10</b>
<b>AC Line Conducted Emission Test Procedure .....</b>	<b>10</b>
<b>Radiated Emission Test Procedure.....</b>	<b>10</b>
<b>Antenna Port Conducted Emission Test Procedure.....</b>	<b>11</b>
Diagram 1 Test arrangement for Conducted emissions .....	12
Diagram 2 Test arrangement for radiated emissions of tabletop equipment.....	13
Diagram 3 Test arrangement for radiated emissions tested on Open Area Test Site (OATS).....	14
Diagram 4 Test arrangement for Antenna Port Conducted emissions .....	14
<b>TEST SITE LOCATIONS .....</b>	<b>15</b>
<b>UNITS OF MEASUREMENTS .....</b>	<b>15</b>
<b>ENVIRONMENTAL CONDITIONS.....</b>	<b>16</b>
<b>STATEMENT OF MODIFICATIONS AND DEVIATIONS .....</b>	<b>16</b>
<b>INTENTIONAL RADIATORS.....</b>	<b>16</b>
<b>Antenna Requirements .....</b>	<b>16</b>

**Restricted Bands of Operation.....16**

Table 1 Radiated Emissions in Restricted Frequency Bands Data Mode 1 ANT (GFSK) .....17

Table 2 Radiated Emissions in Restricted Frequency Bands Data Mode 2 BLE (GMSK) .....18

**Summary of Results for Radiated Emissions in Restricted Bands .....18**

**AC Line Conducted EMI Procedure .....19**

Figure 1 AC Line Conducted emissions of EUT line 1 (Configuration #2, EUT – Computer).....20

Figure 2 AC Line Conducted emissions of EUT line 2 (Configuration #2, EUT – Computer).....21

Figure 3 AC Line Conducted emissions of EUT line 1 (Configuration #3, EUT – 362-00096-00) .....22

Figure 4 AC Line Conducted emissions of EUT line 2 (Configuration #3, EUT – 362-00096-00) .....23

Figure 5 AC Line Conducted emissions of EUT line 1 (Configuration #4, EUT – 362-00112-00) .....24

Figure 6 AC Line Conducted emissions of EUT line 2 (Configuration #4, EUT – 362-00112-00) .....25

Table 3 AC Line Conducted Emissions Data L1 (Configuration #2, EUT – Computer) .....26

Table 4 AC Line Conducted Emissions Data L2 (Configuration #2, EUT – Computer) .....26

Table 5 AC Line Conducted Emissions Data L1 (Configuration #3, 362-00096-00) .....27

Table 6 AC Line Conducted Emissions Data L2 (Configuration #3, 362-00096-00) .....27

Table 7 AC Line Conducted Emissions Data L1 (Configuration #4, 362-00112-00) .....28

Table 8 AC Line Conducted Emissions Data L2 (Configuration #4, 362-00112-00) .....28

**Summary of Results for AC Line Conducted Emissions Results.....29**

**General Radiated Emissions Procedure.....29**

Table 9 General Radiated Emissions Data .....30

**Summary of Results for General Radiated Emissions .....30**

**Operation in the Band 2400 – 2483.5 MHz .....31**

Figure 7 Plot of Transmitter Emissions Operation in 2402-2480 MHz Mode 1 ANT (GFSK).....32

Figure 8 Plot of Transmitter Emissions Low Band Edge Mode 1 ANT (GFSK) .....33

Figure 9 Plot of Transmitter Emissions High Band Edge Mode 1 ANT (GFSK) .....34

Figure 10 Plot of Transmitter Emissions 99% Occupied Bandwidth Mode 1 ANT (GFSK) .....35

Figure 11 Plot of Transmitter Emissions Operation in 2402-2480 MHz Mode 2 BLE (GMSK) .....36

Figure 12 Plot of Transmitter Emissions Low Band Edge Mode 2 BLE (GMSK).....37

Figure 13 Plot of Transmitter Emissions High Band Edge Mode 2 BLE (GMSK) .....38

Figure 14 Plot of Transmitter Emissions 99% Occupied Bandwidth Mode 2 BLE (GMSK) .....39

**Transmitter Emissions Data.....40**



NVLAP Lab Code 200087-0

Table 10 Transmitter Radiated Emissions Mode 1 ANT (GFSK) .....40

Table 11 Transmitter Radiated Emissions Mode 2 BLE (GMSK) .....41

**Summary of Results for Transmitter Radiated Emissions of Intentional Radiator .....42**

**ANNEX..... 43**

**Annex A Measurement Uncertainty Calculations.....44**

**Annex B Test Equipment.....45**

**Annex C Rogers Qualifications .....47**

**Annex D Laboratory Certificate of Accreditation.....48**

## Revisions

Revision 2 Issued September 29, 2021 – updated USB cable

Revision 1 Issued September 27, 2021

Rogers Labs, Inc.  
 4405 West 259<sup>th</sup> Terrace  
 Louisburg, KS 66053  
 Phone/Fax: (913) 837-3214  
 Revision 2

Garmin International, Inc.  
 Model: A04272  
 Test: 210729  
 Test to: 47CFR 15C, RSS-Gen RSS-247  
 File: A04272 DXX TstRpt 210729 r2

SN's: 72W000054 / 72W000083  
 FCC ID: IPH-04272  
 IC: 1792A-04272  
 Date: September 29, 2021  
 Page 4 of 48

## Executive Summary

License Exempt Digital Transmission System Intentional Radiator operating under Title 47 Code of Federal Regulations (47 CFR) Paragraph 15.249 and Industry Canada RSS-210 Issue 10 and RSS-GEN Issue 5, low power digital device transmitter operations in the 2400 – 2483.5 MHz frequency band.

Name of Applicant: Garmin International, Inc.  
1200 East 151st Street  
Olathe, KS 66062

M/N: A04272 HVIN: A04272 PMN: A04272  
FCC ID: IPH-04272 IC: 1792A-04272  
Operating Frequency Range: 2402-2480 MHz

Operational communication modes 1 and 2

Mode	Peak Power (dB $\mu$ V/m@3m)	Average power (dB $\mu$ V/m@3m)	99% OBW (kHz)
Mode 1, ANT (GFSK)	98.9	72.3	960.0
Mode 2, BT BLE (GMSK)	98.3	92.9	1062.0

## Opinion / Interpretation of Results

Tests Performed	Margin (dB)	Results
Restricted Bands 47 CFR 15.205, RSS-210 4.1	-8.0	Complies
Emissions as per 47CFR 15.207, RSS-GEN 8.8	-4.3	Complies
Radiated Emissions 47 CFR 15.209, RSS-GEN 8.9	-9.2	Complies
Harmonic Emissions per 47 CFR 15.249, RSS-210 B.10	-3.4	Complies

## Equipment Tested

Model: A04272

Garmin International, Inc.  
1200 East 151st Street  
Olathe, KS 66062

<u>Equipment</u>	<u>Model / PN</u>	<u>Serial Number</u>
EUT	A04272	72W000054
EUT2	A04272	72W000083
EUT3	A04272	72W000092
USB	320-01381-00	N/A
AC Adapter	362-00096-00	N/A
AC Adapter	362-00112-00	N/A
Laptop Computer	Latitude E6520	6CB35Q1
USB Printer	Dell 0N5819	5D1SL61

Test results in this report relate only to the items tested and operation in mode 0 (NFC)

### Operational communication modes

Mode	Transmitter Operation
0	Near Field Communications (NFC)
1	ANT (GFSK)
2	BT BLE (GMSK)

Software Versions 3.08, BLE 1.00

2.4 GHz antenna system, Internal Planar Inverted F (-7.0 dBi); NFC – Planar coil/inductor

Test results in this report relate only to the items tested. Worst-case configuration data recorded in this report.

## **Equipment Function**

The EUT is a portable body worn digital device. The device displays time, incorporates sensors to log movement and other parameters, receiver circuitry to receive Global Navigation Satellite System (GNSS) data, and includes transmitter functions for communication with compatible equipment. The design provides a single unique connection point for use with the unique USB interface Clip and offers no other interface options as presented below in the configuration diagrams. The transmitters provide operation capability as Near Field Communications (NFC) operating at 13.56 MHz. The design also incorporates transmitter functions across the 2402-2480 MHz frequency band. The design provides wireless communications with compatible NFC, ANT, and Bluetooth® (BT) equipment. The product operates from internal rechargeable battery only and requires battery recharge through the provided USB interface Clip and compatible USB power source. The design utilizes internal fixed antenna systems and offers no provision for antenna replacement or modification. Three samples were provided for testing, one representative of production design, EUT2 modified for testing purposes replacing the integral 2.4 GHz antenna with RF connection port and EUT3 modified by replacing the GPS antenna with a RF connector for GNSS testing. The test samples were provided with software (Version 3.08) enabling testing personnel the ability to enable transmitter functions on defined modulations and channels. The test software enabled near 100% transmit duty cycle for testing purposes. The production product will operate at lower duty cycle to conserve battery life. The antenna modifications offered testing facility the ability to connect test equipment to the temporary antenna port. The EUT was arranged as described by the manufacturer emulating typical user configurations for testing purposes. For testing purposes, the EUT received powered from freshly charged internal battery and/or AC power configurations and configured to operate in available modes. As requested by the manufacturer and required by regulations, the equipment was tested for compliance using the available configurations with the worst-case data presented. This report documents the testing performed and results for applicable configurations and product modes of operation. Test results in this report relate only to the products described in this report.

## Equipment Configuration

- 1) Unit operating off internal battery



- 2) Unit connected to Computer USB port through USB assembly (GPN: 320-01381-00)



- 3) Unit connected to USB (GPN: 320-01381-00) and AC Adapter 362-00096-00



- 4) Unit connected to USB (GPN: 320-01381-00) and AC Adapter 362-00112-00





## Application for Certification

- (1) Manufacturer: Garmin International, Inc.  
1200 East 151st Street  
Olathe, KS 66062
- (2) Identification: M/N: A04272 HVIN: A04272 PMN: A04272  
FCC ID: IPH-04272 IC: 1792A-04272
- (3) Instruction Book:  
Refer to Exhibit for Instruction Manual.
- (4) Description of Circuit Functions:  
Refer to Exhibit of Operational Description.
- (5) Block Diagram with Frequencies:  
Refer to Exhibit of Operational Description.
- (6) Report of Measurements:  
Report of measurements follows in this Report.
- (7) Photographs: Construction, Component Placement, etc.:  
Refer to Exhibit for photographs of equipment.
- (8) List of Peripheral Equipment Necessary for operation. The equipment operates from direct current power provided from internal rechargeable battery. The design provides interface option with unique USB Clip and compatible equipment as presented in this filing. The EUT offers no other connection ports than those presented in this filing.
- (9) Transition Provisions of 47 CFR 15.37 are not requested.
- (10) Not Applicable. The unit is not a scanning receiver.
- (11) Not Applicable. The EUT does not operate in the 59 – 64 GHz frequency band.
- (12) The equipment is not software defined and this section is not applicable.
- (13) Applications for certification of U-NII devices in the 5.15-5.35 GHz and the 5.47-5.85 GHz bands must include a high-level operational description of the security procedures that control the radio frequency operating parameters and ensure that unauthorized modifications cannot be made. This requirement is not applicable to his DTS device.
- (14) Contain at least one drawing or photograph showing the test set-up for each of the required types of tests applicable to the device for which certification is requested. These drawings or photographs must show enough detail to confirm other information contained in the test report. Any photographs used must be focused originals without glare or dark spots and must clearly show the test configuration used. This information is provided in this report and Test Setup Exhibits provided with the application filing.

## Applicable Standards

The following information is submitted in accordance with the eCFR Title 47 Code of Federal Regulations (47CFR), dated July 29, 2021: Part 2, Subpart J, Part 15C Paragraph 15.249, Industry Canada RSS-210 Issue 10, and RSS-GEN Issue 5. Test procedures used are the established Methods of Measurement of Radio-Noise Emissions as described in ANSI C63.10-2013. This report documents compliance for the EUT operations as Low Power Transmitter.

## Equipment Testing Procedures

### ***AC Line Conducted Emission Test Procedure***

Testing for the AC line-conducted emissions was performed as required in 47CFR 15C, RSS-210 Issue 10 and specified in ANSI C63.10-2013. The test setup, including the EUT, was arranged in the test configurations as presented during testing. The test configuration was placed on a 1 x 1.5-meter bench, 0.8 meters high located in a screen room. The power lines of the system were isolated from the power source using a standard LISN with a 50- $\mu$ Hy choke. EMI was coupled to the spectrum analyzer through a 0.1  $\mu$ F capacitor internal to the LISN. The LISN was positioned on the floor beneath the wooden bench supporting the EUT. The power lines and cables were draped over the back edge of the table. Refer to diagram one showing typical test arrangement and photographs in exhibits for EUT placement used during testing.


### ***Radiated Emission Test Procedure***

Radiated emissions testing was performed as required in 47 CFR 15C, RSS-210 Issue 10, and specified in ANSI C63.10-2013. The EUT was placed on a rotating 0.9 x 1.2-meter platform, elevated as required above the ground plane at a distance of 3 meters from the FSM antenna. EMI energy was maximized by equipment placement permitting orientation in three orthogonal axes, raising, and lowering the FSM antenna, changing the antenna polarization, and by rotating the turntable. Each emission was maximized before data was taken and recorded. The frequency spectrum from 9 kHz to 25,000 MHz was searched for emissions during preliminary investigation. Refer to diagrams two and three showing typical test setup. Refer to photographs in the test setup exhibits for specific EUT placement during testing.

## ***Antenna Port Conducted Emission Test Procedure***


The EUT was assembled as required for operation placed on a benchtop. This configuration provided the ability to connect test equipment to the provided test antenna port. Antenna Port conducted emissions testing was performed presented in the regulations and specified in ANSI C63.10-2013. Testing was completed on a laboratory bench in a shielded room. The active antenna port of the device was connected to appropriate attenuation and the spectrum analyzer. Refer to diagram four showing typical test arrangement and photographs in the test setup exhibits for specific EUT placement during testing.

**Diagram 1 Test arrangement for Conducted emissions**

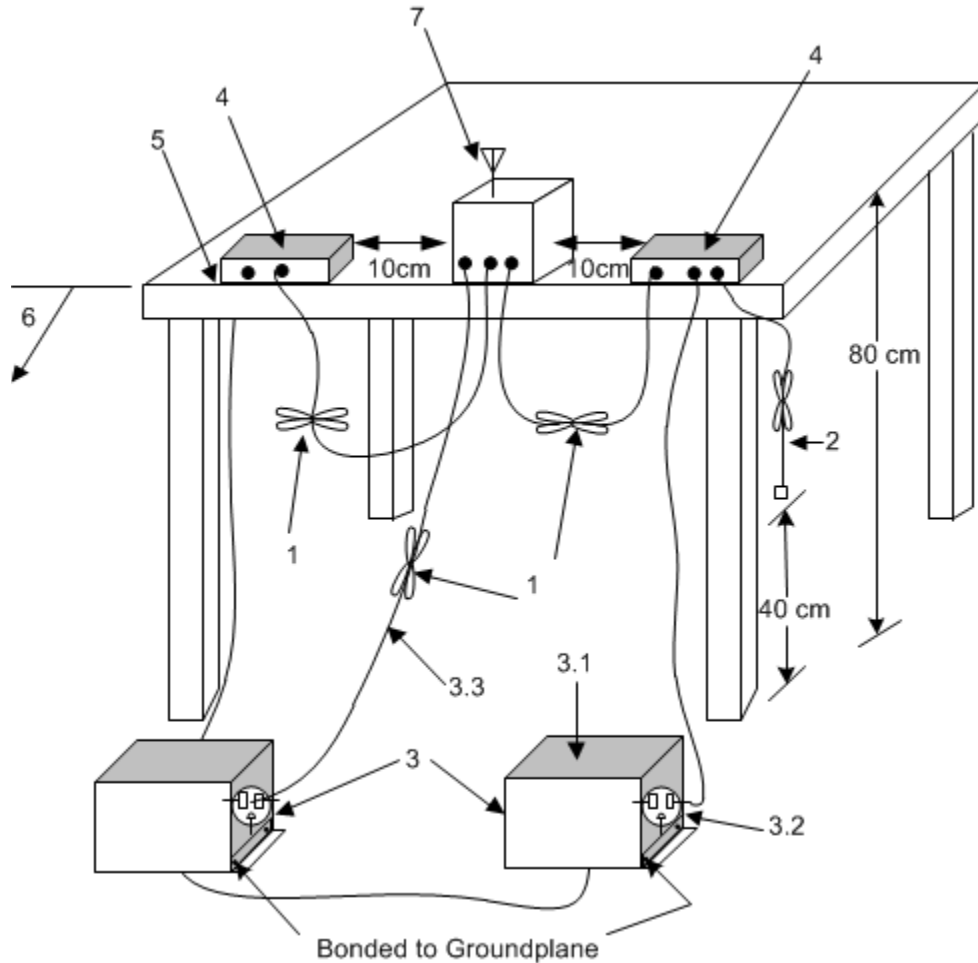

1. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long see (see 6.2.3.1).
2. I/O cables that are not connected to an accessory shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m (see 6.2.2).
3. EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50  $\Omega$  loads. LISN can be placed on top of, or immediately beneath, reference ground plane (see 6.2.2 and 6.2.3).
  - 3.1 All other equipment powered from additional LISN(s).
  - 3.2 Multiple-outlet strip can be used for multiple power cords of non-EUT equipment.
  - 3.3 LISN at least 80 cm from nearest part of EUT chassis.
4. Non-EUT components of EUT system being tested.
5. Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop (see 6.2.3.1).
6. Edge of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane (see 6.2.2 for options).
7. Antenna may be integral or detachable. If detachable, the antenna shall be attached for this test.

**Diagram 2 Test arrangement for radiated emissions of tabletop equipment**

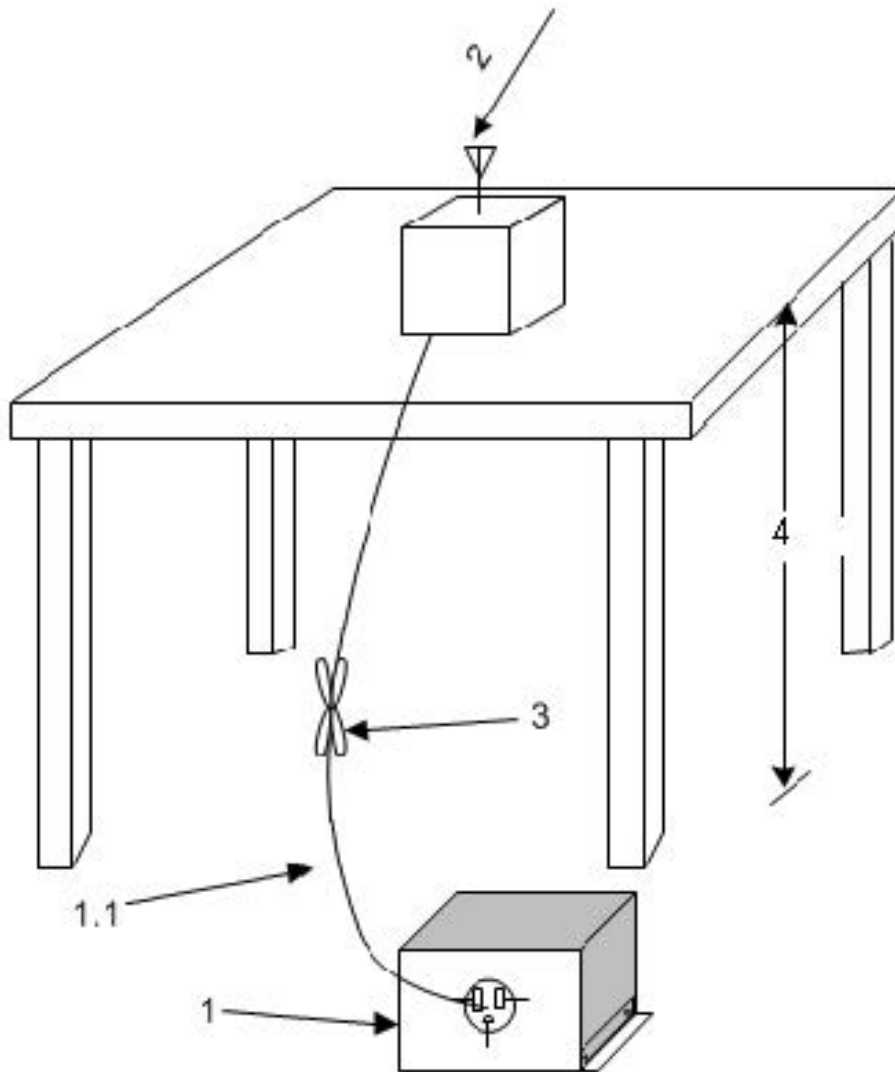

1—A LISN is optional for radiated measurements between 30 MHz and 1000 MHz but not allowed for measurements below 30 MHz and above 1000 MHz (see 6.3.1). If used, then connect EUT to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω loads. The LISN may be placed on top of, or immediately beneath, the reference ground plane (see 6.2.2 and 6.2.3.2).


1.1—LISN spaced at least 80 cm from the nearest part of the EUT chassis.

2—Antenna can be integral or detachable, depending on the EUT (see 6.3.1).


3—Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long (see 6.3.1).

4—For emission measurements at or below 1 GHz, the table height shall be 80 cm. For emission measurements above 1 GHz, the table height shall be 1.5 m for measurements, except as otherwise specified (see 6.3.1 and 6.6.3.1).

**Diagram 3 Test arrangement for radiated emissions tested on Open Area Test Site (OATS)**

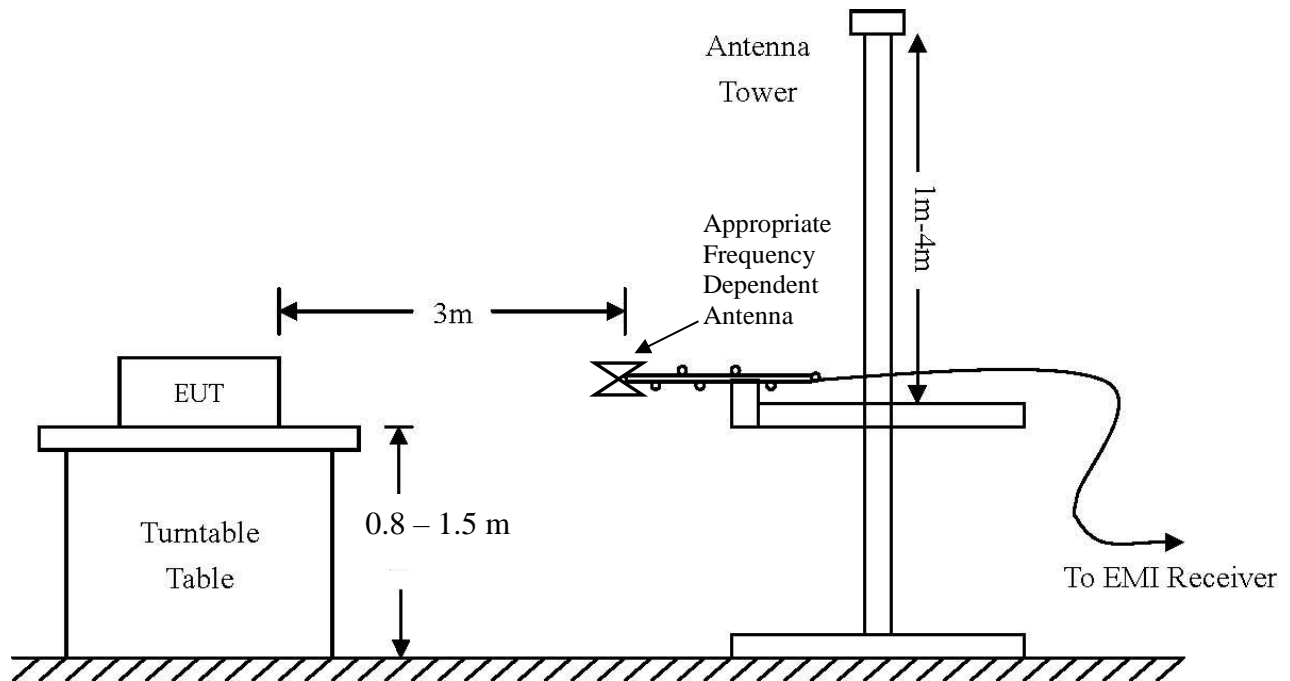

**Diagram 4 Test arrangement for Antenna Port Conducted emissions**

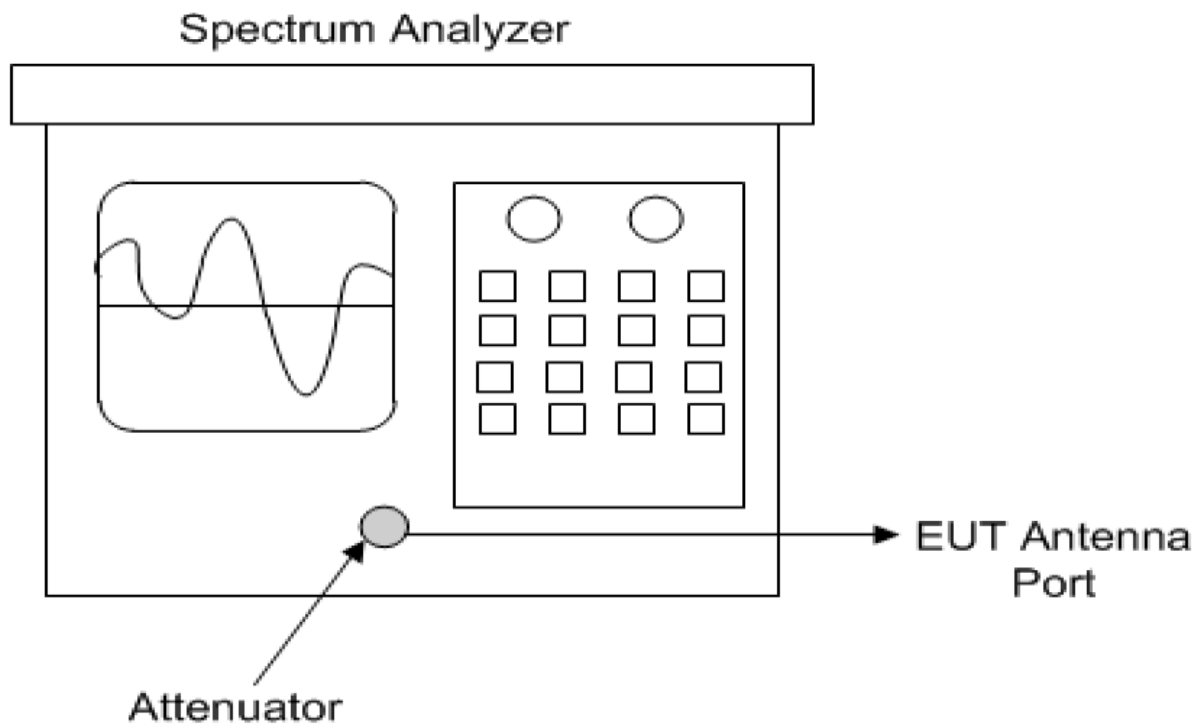

## Test Site Locations

- Conducted EMI      AC line conducted emissions testing performed in a shielded screen room located at Rogers Labs, Inc., 4405 West 259<sup>th</sup> Terrace, Louisburg, KS
- Antenna port      Antenna port conducted emissions testing was performed in a shielded screen room located at Rogers Labs, Inc., 4405 West 259<sup>th</sup> Terrace, Louisburg, KS
- Radiated EMI      The radiated emissions tests were performed at the 3 meters, Open Area Test Site (OATS) located at Rogers Labs, Inc., 4405 West 259<sup>th</sup> Terrace, Louisburg, KS

Registered Site information: FCC Site: US5305, ISED: 3041A, CAB Identifier: US0096

NVLAP Accreditation      Lab code 200087-0

## Units of Measurements

- Conducted EMI      Data presented in dB $\mu$ V; dB referenced to one microvolt
- Antenna port Conducted      Data is in dBm; dB referenced to one milliwatt
- Radiated EMI      Data presented in dB $\mu$ V/m; dB referenced to one microvolt per meter

Note: Radiated limit may be expressed for measurement in dB $\mu$ V/m when the measurement is taken at a distance of 3 or 10 meters. Data taken for this report was taken at distance of 3 meters. Sample calculation demonstrates corrected field strength reading for Open Area Test Site using the measurement reading and correcting for receive antenna factor, cable losses, and amplifier gains.

Sample Calculation:

RFS = Radiated Field Strength, FSM = Field Strength Measured

A.F. = Receive antenna factor, Losses = attenuators/cable losses, Gain = amplification gains

$RFS (dB\mu V/m @ 3m) = FSM (dB\mu V) + A.F. (dB/m) + Losses (dB) - Gain (dB)$

## Environmental Conditions

Ambient Temperature	23.6° C
Relative Humidity	45%
Atmospheric Pressure	1016.6 mb

## Statement of Modifications and Deviations

No modifications to the EUT were required for the equipment to demonstrate compliance with the 47 CFR Part 15C, Industry Canada RSS-210 Issue 10, and RSS-GEN Issue 5 emission requirements. There were no deviations to the specifications.

## Intentional Radiators

The following information is submitted supporting compliance with the requirements of 47 CFR, Subpart C, paragraph 15.249, Industry Canada RSS-210 Issue 10 and RSS-GEN Issue 5.

### *Antenna Requirements*

The EUT incorporates integral Planar Inverted F Antenna (PIFA) system. Production equipment offers no provision for connection to alternate antenna system. The antenna connection point complies with the unique antenna connection requirements. There are no deviations or exceptions to the specification.

### *Restricted Bands of Operation*

Spurious emissions falling in the restricted frequency bands of operation were measured at the OATS. The EUT utilizes frequency, determining circuitry, which generates harmonics falling in the restricted bands. Emissions were investigated at the OATS, using appropriate antennas or pyramidal horns, amplification stages, and receiver / spectrum analyzer. Peak and average amplitudes of frequencies above 1000 MHz were compared to the required limits with worst-case data presented below. Test procedures of ANSI C63.10-2013 were used during testing. No other significant emission was observed which fell into the restricted bands of operation. Computed emission values consider the received radiated field strength, receive antenna correction factor, amplifier gain stage, and test system cable losses.

Rogers Labs, Inc.	Garmin International, Inc.	SN's: 72W000054 / 72W000083
4405 West 259 <sup>th</sup> Terrace	Model: A04272	FCC ID: IPH-04272
Louisburg, KS 66053	Test: 210729	IC: 1792A-04272
Phone/Fax: (913) 837-3214	Test to: 47CFR 15C, RSS-Gen RSS-247	Date: September 29, 2021
Revision 2	File: A04272 DXX TstRpt 210729 r2	Page 16 of 48



**Table 1 Radiated Emissions in Restricted Frequency Bands Data Mode 1 ANT (GFSK)**

Frequency in MHz	Horizontal Peak (dBµV/m)	Horizontal Average (dBµV/m)	Vertical Peak (dBµV/m)	Vertical Average (dBµV/m)	Limit @ 3m (dBµV/m)	Horizontal Margin (dB)	Vertical Margin (dB)
2390.0	46.2	30.3	46.0	30.3	54.0	-23.7	-23.7
2483.5	55.4	31.1	57.5	31.2	54.0	-22.9	-22.8
4804.0	48.8	35.7	49.1	35.6	54.0	-18.3	-18.4
4882.0	48.2	35.5	48.7	35.5	54.0	-18.5	-18.5
4960.0	49.9	35.8	48.5	35.8	54.0	-18.2	-18.2
7206.0	52.3	39.8	58.1	40.4	54.0	-14.2	-13.6
7323.0	53.4	39.8	58.5	40.7	54.0	-14.2	-13.3
7440.0	55.2	40.2	57.3	40.5	54.0	-13.8	-13.5
12010.0	58.8	45.6	58.3	45.6	54.0	-8.4	-8.4
12205.0	60.2	45.6	58.9	45.7	54.0	-8.4	-8.3
12400.0	58.4	45.2	58.1	45.2	54.0	-8.8	-8.8

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

**Table 2 Radiated Emissions in Restricted Frequency Bands Data Mode 2 BLE (GMSK)**

Frequency in MHz	Horizontal Peak (dBµV/m)	Horizontal Average (dBµV/m)	Vertical Peak (dBµV/m)	Vertical Average (dBµV/m)	Limit @ 3m (dBµV/m)	Horizontal Margin (dB)	Vertical Margin (dB)
2390.0	46.1	30.6	46.8	30.7	54.0	-23.4	-23.3
2483.5	57.5	33.8	58.5	34.4	54.0	-20.2	-19.6
4804.0	48.7	35.7	48.3	35.7	54.0	-18.3	-18.3
4880.0	48.6	35.5	48.4	35.5	54.0	-18.5	-18.5
4960.0	49.0	35.7	49.2	35.9	54.0	-18.3	-18.1
7206.0	53.1	40.2	58.7	45.0	54.0	-13.8	-9.0
7320.0	59.3	46.0	57.9	44.7	54.0	-8.0	-9.3
7440.0	58.5	45.3	58.2	44.8	54.0	-8.7	-9.2
12010.0	58.5	45.8	58.9	45.7	54.0	-8.2	-8.3
12200.0	58.4	45.6	58.7	45.6	54.0	-8.4	-8.4
12400.0	57.7	45.2	58.3	45.1	54.0	-8.8	-8.9

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

**Summary of Results for Radiated Emissions in Restricted Bands**

The EUT demonstrated compliance with the radiated emissions requirements of 47CFR Part 15C and RSS-210 Issue 10 Intentional Radiator requirements. The EUT demonstrated a worst-case minimum margin of -8.0 dB below the emissions requirements in restricted frequency bands. Peak, Quasi-peak, and average amplitudes were checked for compliance with the regulations. Worst-case emissions are reported with other emissions found in the restricted frequency bands at least 20 dB below the requirements.

## **AC Line Conducted EMI Procedure**

The EUT was arranged in typical equipment configurations operating from AC power adapter. Testing was performed with the EUT placed on a 1 x 1.5-meter wooden bench 80 cm above the conducting ground plane, floor of a screen room. The bench was positioned 40 cm away from the wall of the screen room. The LISN was positioned on the floor of the screen room 80-cm from the rear of the EUT. Testing for the line-conducted emissions were the procedures of ANSI C63.10-2013 paragraph 6. The AC power source for the EUT was connected to the LISN for line-conducted emissions testing. A second LISN was positioned on the floor of the screen room 80-cm from the rear of the supporting equipment of the EUT. All power cords except the EUT were then powered from the second LISN. EMI was coupled to the spectrum analyzer through a 0.1  $\mu$ F capacitor, internal to the LISN. Power line conducted emissions testing was carried out individually for each current carrying conductor of the EUT. The excess length of lead between the system and the LISN receptacle was folded back and forth to form a bundle not exceeding 40 cm in length. The screen room, conducting ground plane, analyzer, and LISN were bonded together to the protective earth ground. Preliminary testing was performed to identify the frequencies of each of the emissions, which demonstrated the highest amplitudes. The cables were repositioned to obtain maximum amplitude of measured EMI level. Once the worst-case configuration was identified, plots were made of the EMI from 0.15 MHz to 30 MHz then data was recorded with maximum conducted emissions levels.

Refer to figures one and two for plots of the EUT – USB Computer interface configuration #2 AC Line conducted emissions.

Refer to figures three and four showing plots of the AC Adapter configuration #3 (362-00096-00) AC Line conducted emissions.

Refer to figures five and six showing plots of the AC Adapter configuration #4 (362-00112-00) AC Line conducted emissions.

Figure 1 AC Line Conducted emissions of EUT line 1 (Configuration #2, EUT – Computer)

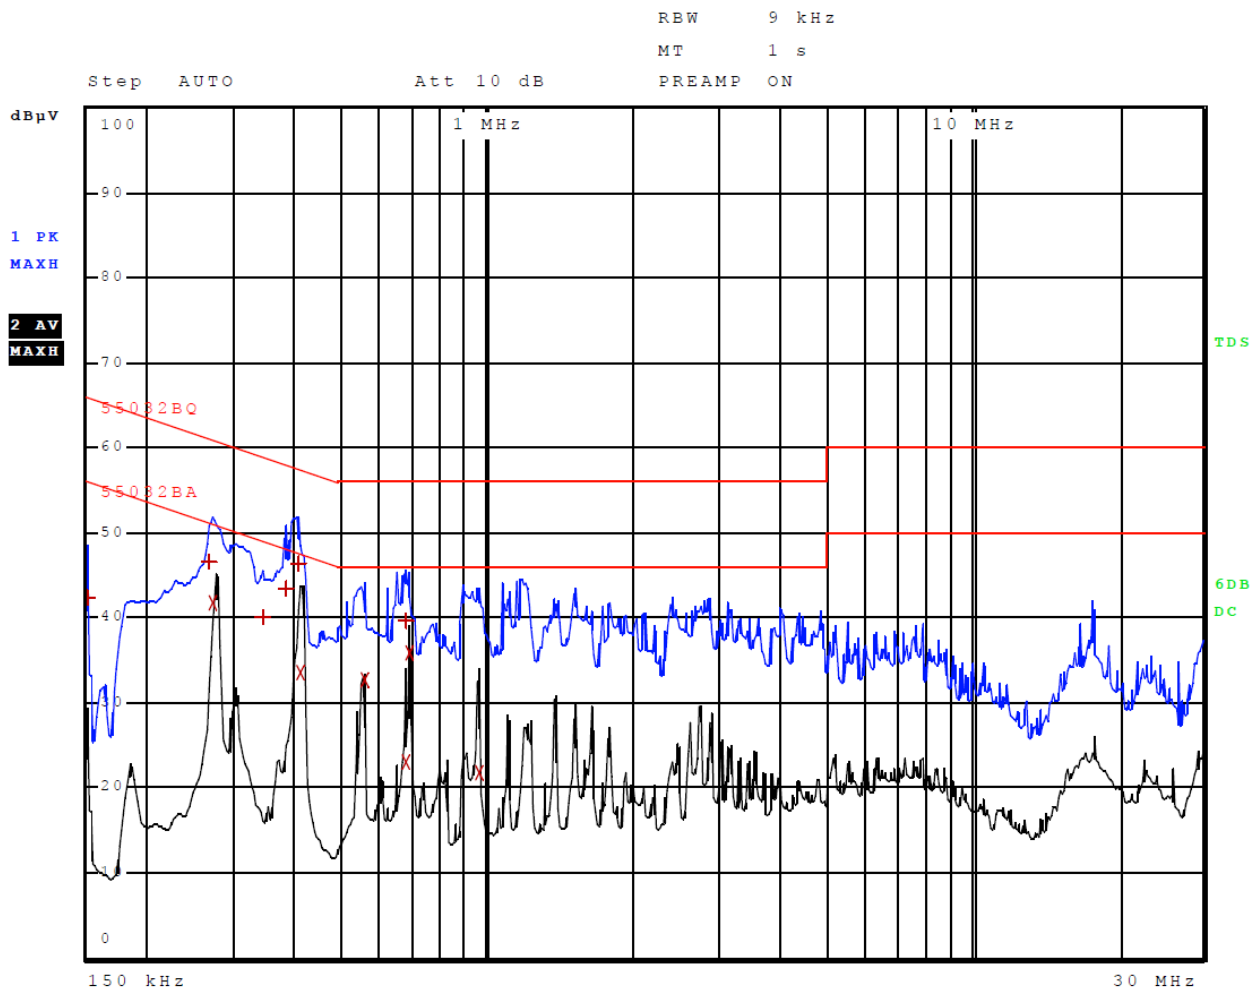


Figure 2 AC Line Conducted emissions of EUT line 2 (Configuration #2, EUT – Computer)

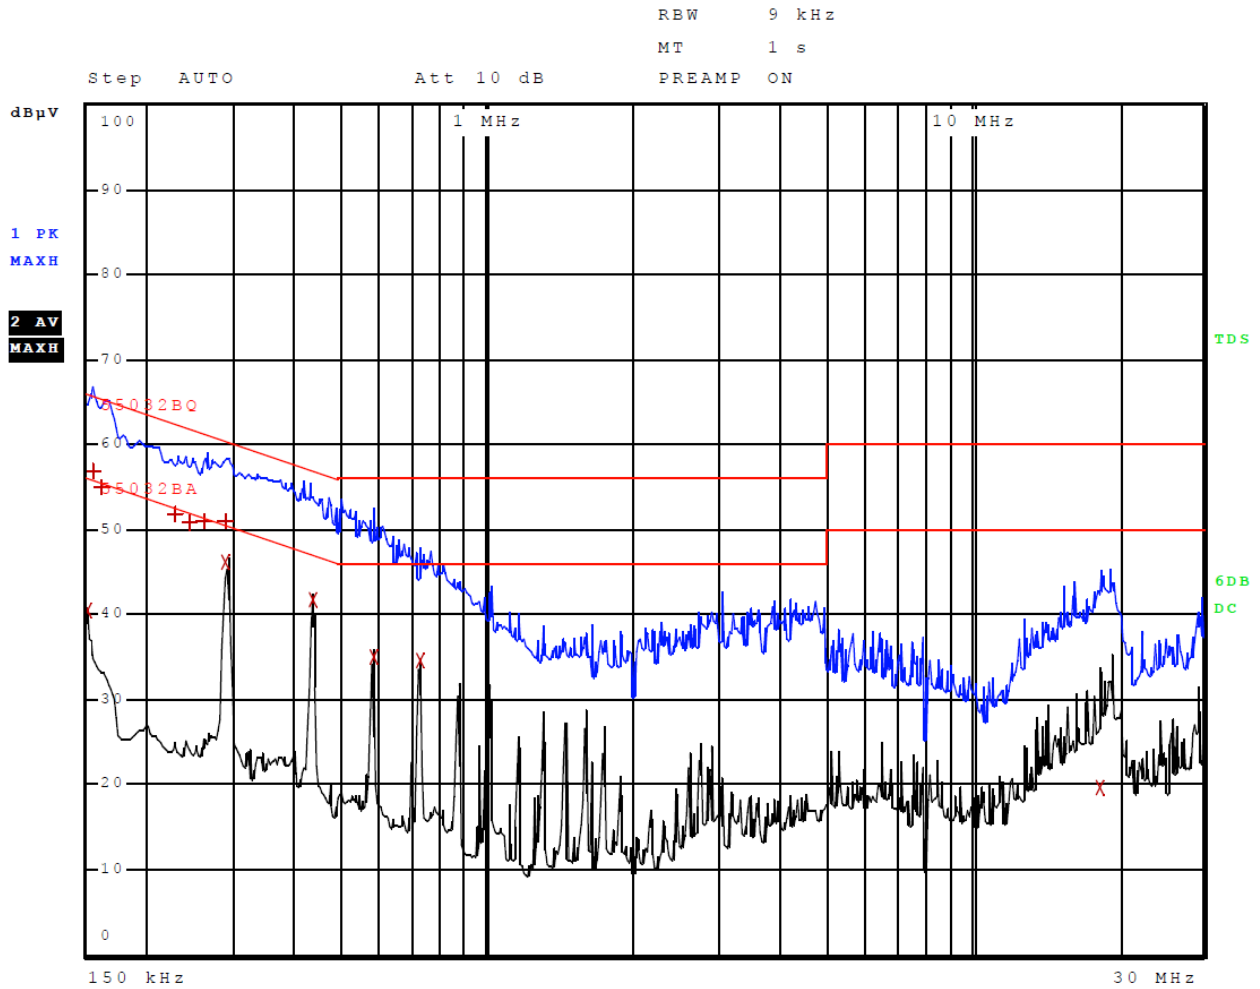


Figure 3 AC Line Conducted emissions of EUT line 1 (Configuration #3, EUT – 362-00096-00)

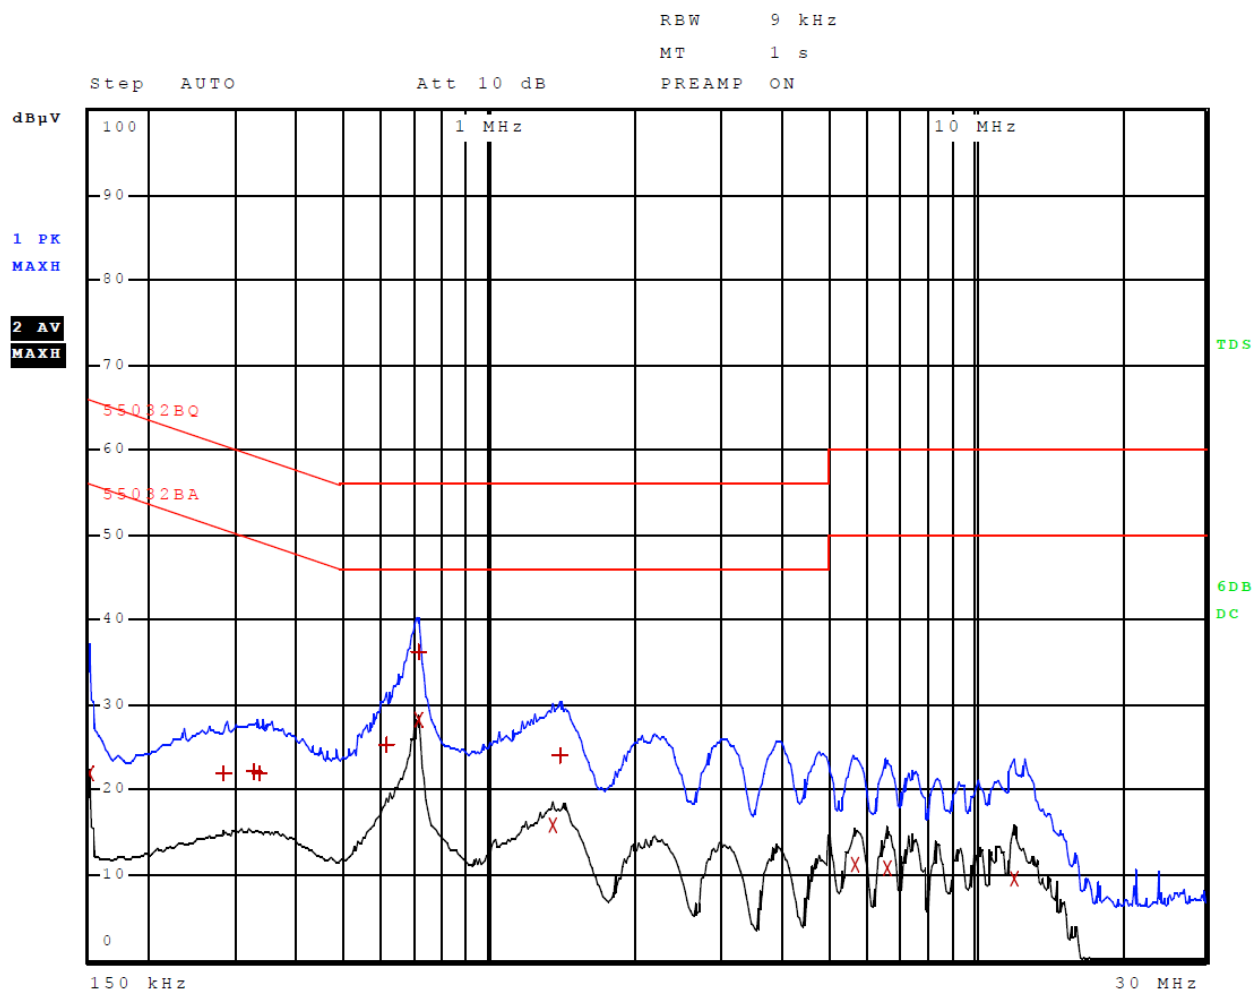


Figure 4 AC Line Conducted emissions of EUT line 2 (Configuration #3, EUT – 362-00096-00)

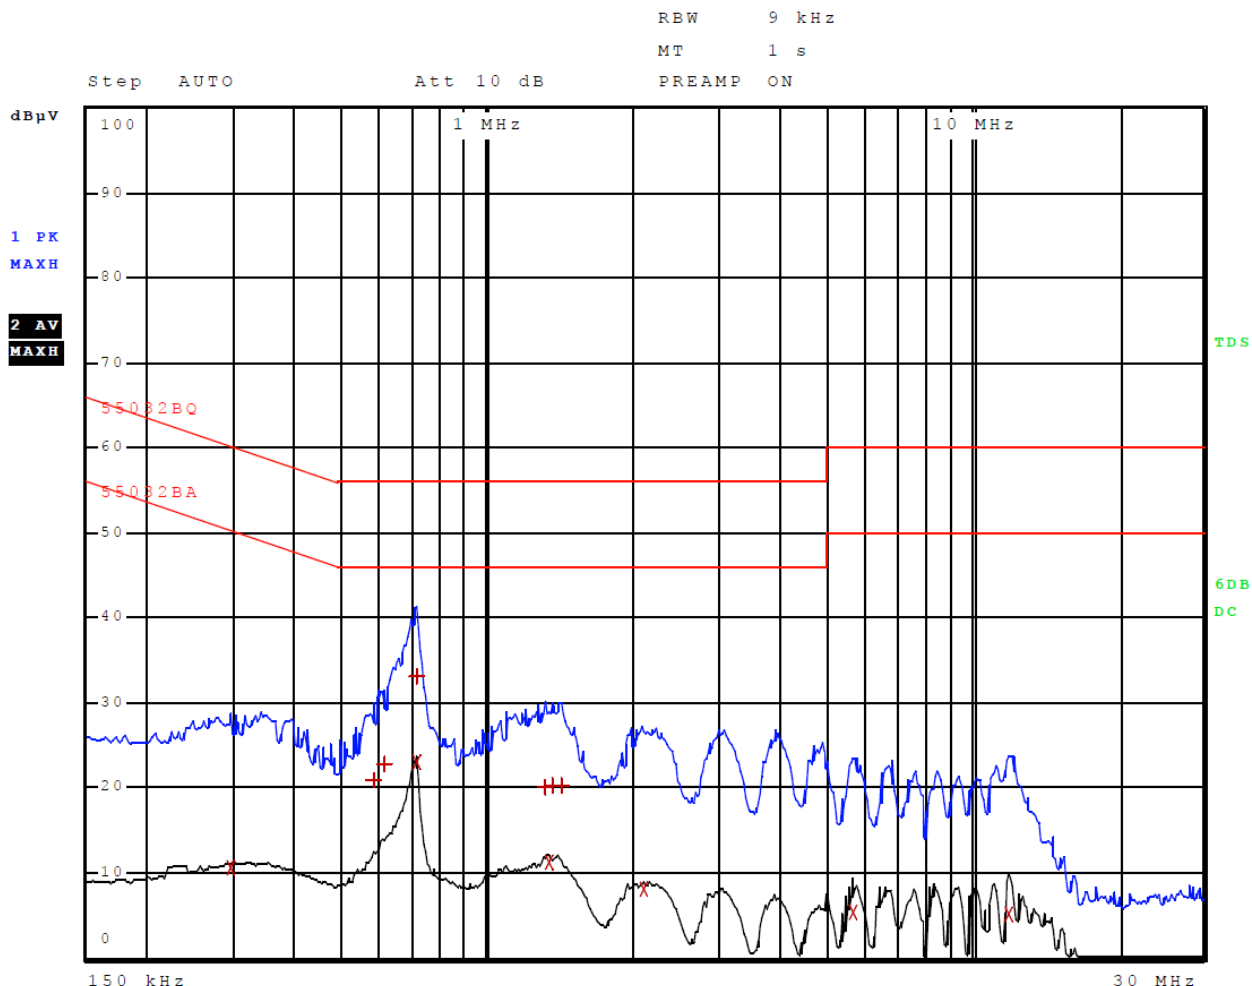


Figure 5 AC Line Conducted emissions of EUT line 1 (Configuration #4, EUT – 362-00112-00)


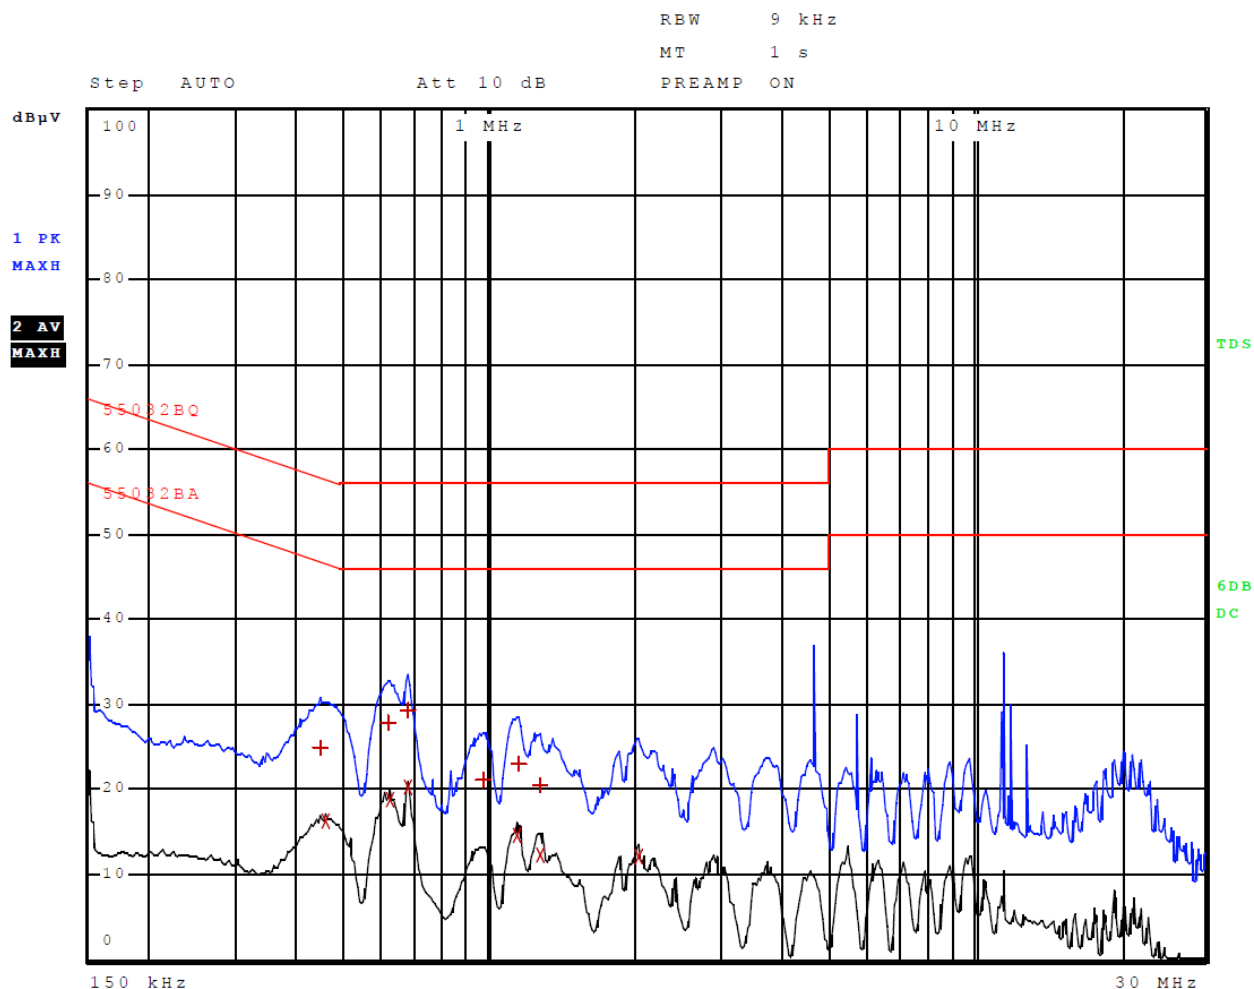




Figure 6 AC Line Conducted emissions of EUT line 2 (Configuration #4, EUT – 362-00112-00)

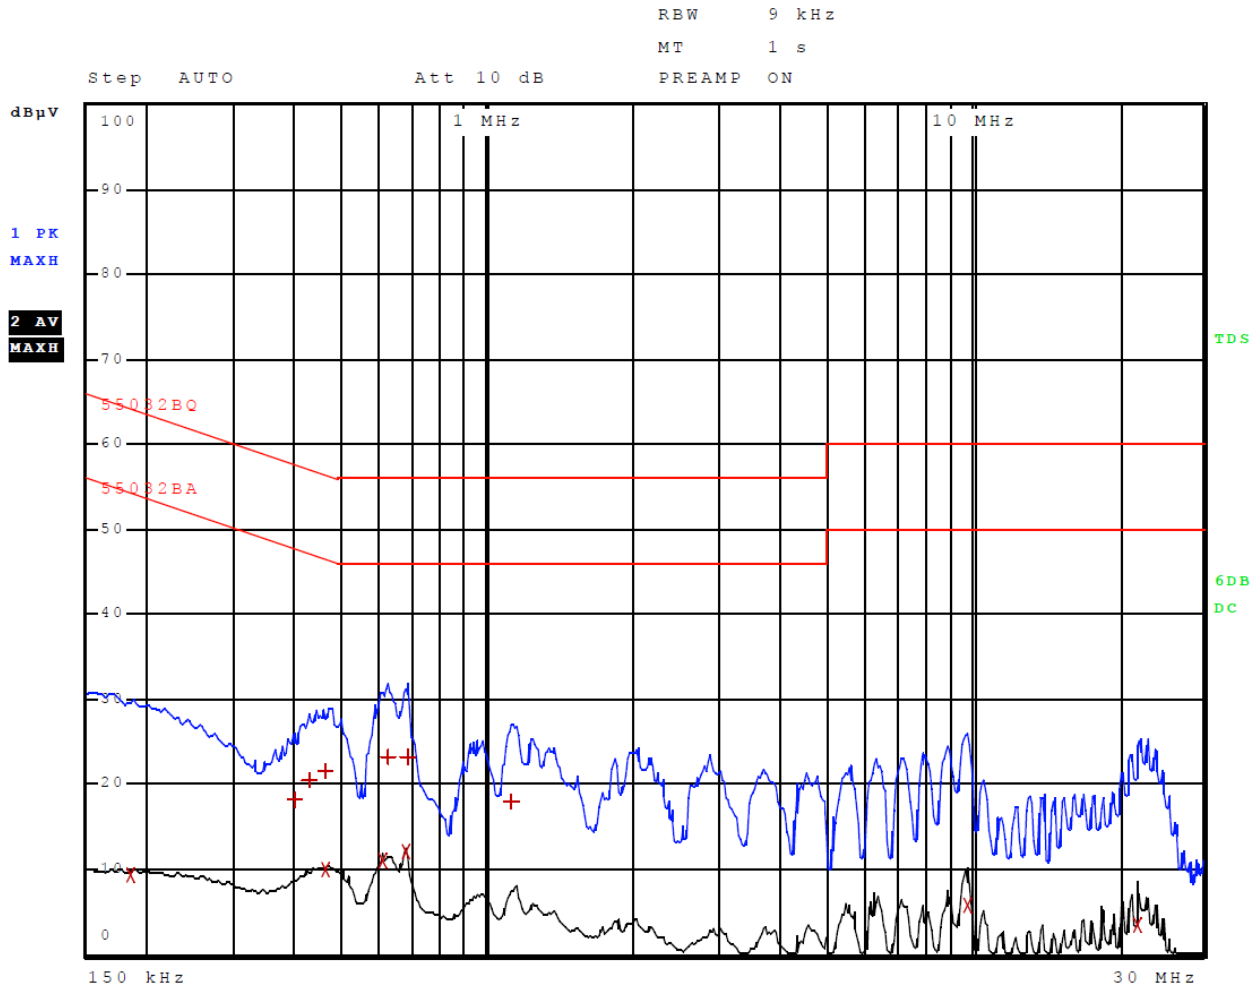

**Table 3 AC Line Conducted Emissions Data L1 (Configuration #2, EUT – Computer)**

Trace	Frequency	Level (dBµV)	Detector	Delta Limit/dB
1	150.000000000 kHz	42.37	Quasi Peak	-23.63
1	270.000000000 kHz	46.50	Quasi Peak	-14.61
2	274.000000000 kHz	41.64	Average	-9.36
1	342.000000000 kHz	40.08	Quasi Peak	-19.07
1	382.000000000 kHz	43.38	Quasi Peak	-14.85
1	406.000000000 kHz	46.39	Quasi Peak	-11.34
2	410.000000000 kHz	33.42	Average	-14.23
2	554.000000000 kHz	32.59	Average	-13.41
2	678.000000000 kHz	22.96	Average	-23.04
1	678.000000000 kHz	39.62	Quasi Peak	-16.38
2	690.000000000 kHz	35.76	Average	-10.24
2	958.000000000 kHz	21.70	Average	-24.30

Other emissions present had amplitudes at least 20 dB below the limit.

**Table 4 AC Line Conducted Emissions Data L2 (Configuration #2, EUT – Computer)**

Trace	Frequency	Level (dBµV)	Detector	Delta Limit/dB
2	150.000000000 kHz	40.39	Average	-15.61
1	154.000000000 kHz	56.93	Quasi Peak	-8.85
1	162.000000000 kHz	54.87	Quasi Peak	-10.49
1	230.000000000 kHz	51.76	Quasi Peak	-10.69
1	246.000000000 kHz	50.82	Quasi Peak	-11.07
1	262.000000000 kHz	51.03	Quasi Peak	-10.34
2	290.000000000 kHz	46.14	Average	-4.38
1	290.000000000 kHz	50.87	Quasi Peak	-9.66
2	434.000000000 kHz	41.70	Average	-5.47
2	578.000000000 kHz	34.92	Average	-11.08
2	726.000000000 kHz	34.52	Average	-11.48
2	18.347900000 MHz	19.68	Average	-30.32

Other emissions present had amplitudes at least 20 dB below the limit.

**Table 5 AC Line Conducted Emissions Data L1 (Configuration #3, 362-00096-00)**

Trace	Frequency	Level (dBµV)	Detector	Delta Limit/dB
2	150.000000000 kHz	21.91	Average	-34.09
1	286.000000000 kHz	21.88	Quasi Peak	-38.76
1	330.000000000 kHz	22.14	Quasi Peak	-37.31
1	338.000000000 kHz	22.04	Quasi Peak	-37.22
1	610.000000000 kHz	25.23	Quasi Peak	-30.77
1	710.000000000 kHz	36.25	Quasi Peak	-19.75
2	714.000000000 kHz	28.26	Average	-17.74
2	1.346000000 MHz	15.81	Average	-30.19
1	1.394000000 MHz	24.01	Quasi Peak	-31.99
2	5.679900000 MHz	11.19	Average	-38.81
2	6.639900000 MHz	10.76	Average	-39.24
2	12.055900000 MHz	9.61	Average	-40.39

Other emissions present had amplitudes at least 20 dB below the limit.

**Table 6 AC Line Conducted Emissions Data L2 (Configuration #3, 362-00096-00)**

Trace	Frequency	Level (dBµV)	Detector	Delta Limit/dB
2	298.000000000 kHz	10.71	Average	-39.59
1	582.000000000 kHz	20.95	Quasi Peak	-35.05
1	610.000000000 kHz	22.79	Quasi Peak	-33.21
2	710.000000000 kHz	23.05	Average	-22.95
1	710.000000000 kHz	33.07	Quasi Peak	-22.93
1	1.318000000 MHz	19.99	Quasi Peak	-36.01
2	1.342000000 MHz	11.16	Average	-34.84
1	1.358000000 MHz	20.34	Quasi Peak	-35.66
1	1.414000000 MHz	20.17	Quasi Peak	-35.83
2	2.106000000 MHz	8.13	Average	-37.87
2	5.679900000 MHz	5.30	Average	-44.70
2	11.883900000 MHz	5.14	Average	-44.86

Other emissions present had amplitudes at least 20 dB below the limit.

**Table 7 AC Line Conducted Emissions Data L1 (Configuration #4, 362-00112-00)**

Trace	Frequency	Level (dBµV)	Detector	Delta Limit/dB
1	446.000000000 kHz	24.91	Quasi Peak	-32.04
2	458.000000000 kHz	16.32	Average	-30.41
1	614.000000000 kHz	27.75	Quasi Peak	-28.25
2	618.000000000 kHz	18.81	Average	-27.19
2	674.000000000 kHz	20.36	Average	-25.64
1	678.000000000 kHz	29.27	Quasi Peak	-26.73
1	970.000000000 kHz	21.15	Quasi Peak	-34.85
2	1.134000000 MHz	14.66	Average	-31.34
1	1.146000000 MHz	23.00	Quasi Peak	-33.00
1	1.266000000 MHz	20.59	Quasi Peak	-35.41
2	1.270000000 MHz	12.22	Average	-33.78
2	2.030000000 MHz	12.15	Average	-33.85

Other emissions present had amplitudes at least 20 dB below the limit.

**Table 8 AC Line Conducted Emissions Data L2 (Configuration #4, 362-00112-00)**

Trace	Frequency	Level (dBµV)	Detector	Delta Limit/dB
2	186.000000000 kHz	9.27	Average	-44.95
1	398.000000000 kHz	18.25	Quasi Peak	-39.65
1	426.000000000 kHz	20.39	Quasi Peak	-36.94
2	466.000000000 kHz	10.06	Average	-36.52
1	466.000000000 kHz	21.61	Quasi Peak	-34.98
2	606.000000000 kHz	10.93	Average	-35.07
1	618.000000000 kHz	23.29	Quasi Peak	-32.71
2	674.000000000 kHz	12.01	Average	-33.99
1	682.000000000 kHz	23.23	Quasi Peak	-32.77
1	1.118000000 MHz	17.87	Quasi Peak	-38.13
2	9.735900000 MHz	5.71	Average	-44.29
2	21.983900000 MHz	3.51	Average	-46.49

Other emissions present had amplitudes at least 20 dB below the limit.

## **Summary of Results for AC Line Conducted Emissions Results**

The EUT demonstrated compliance with the AC Line Conducted Emissions requirements of 47CFR Part 15C and other applicable emissions requirements. The EUT-CPU configurations #2 worst-case configuration demonstrated a minimum margin of -4.3 dB below the requirement. The EUT-AC adapter configuration #3 worst-case configuration demonstrated a minimum margin of -17.7 dB below the requirement. The EUT-AC adapter configuration #4 worst-case configuration demonstrated a minimum margin of -25.6 dB below the requirement. Other emissions were present with amplitudes at least 20 dB below the limit and worst-case amplitudes recorded.

## **General Radiated Emissions Procedure**

The EUT was arranged in a typical equipment configuration and operated through all available modes during testing. Preliminary testing was performed in a screen room with the EUT positioned 1 meter from the FSM. Radiated emissions measurements were performed to identify the frequencies, which produced the highest emissions. Each radiated emission was then maximized at the OATS location before final radiated measurements were performed. Final data was taken with the EUT located on the OATS at 3 meters distance between the EUT and the receiving antenna. The frequency spectrum from 9 kHz to 25,000 MHz was searched for general radiated emissions. Measured emission levels were maximized by EUT placement on the table, rotating the turntable through 360 degrees, varying the antenna height between 1 and 4 meters above the ground plane and changing antenna position between horizontal and vertical polarization. Antennas used were Loop from 9 kHz to 30 MHz, Broadband Biconical from 30 to 200 MHz, Biconilog from 30 to 1000 MHz, Log Periodic from 200 MHz to 1 GHz and or double Ridge or pyramidal horns and mixers above 1 GHz, notch filters and appropriate amplifiers and external mixers were utilized.

**Table 9 General Radiated Emissions Data**

Frequency (MHz)	Horizontal Peak (dB $\mu$ V/m)	Horizontal Quasi-Peak (dB $\mu$ V/m)	Vertical Peak (dB $\mu$ V/m)	Vertical Quasi-Peak (dB $\mu$ V/m)	Limit @ 3m (dB $\mu$ V/m)	Horizontal Margin (dB)	Vertical Margin (dB)
40.7	26.3	12.7	38.6	25.0	40.0	-27.3	-15.0
50.4	29.9	23.2	34.9	30.8	40.0	-16.8	-9.2
63.5	31.5	28.7	35.0	30.2	40.0	-11.3	-9.8
67.8	23.4	9.0	25.9	11.9	40.0	-31.0	-28.1
72.9	29.7	21.8	32.3	28.8	40.0	-18.2	-11.2
81.3	25.7	12.6	27.7	15.7	40.0	-27.4	-24.3

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency range below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

**Summary of Results for General Radiated Emissions**

The EUT demonstrated compliance with the radiated emissions requirements of 47CFR Part 15C paragraph 15.209, RSS-210 Issue 10, and RSS-GEN Issue 5 Intentional Radiators. The EUT configuration demonstrated a minimum margin of -9.2 dB below the requirements. Other emissions were present with amplitudes at least 20 dB below the Limits.

### **Operation in the Band 2400 – 2483.5 MHz**

The transmitter output power; harmonic and general emissions were measured on an open area test site @ 3 meters. The EUT was placed on a turntable elevated as required above the ground plane and at a distance of 3 meters from the FSM antenna. The peak and quasi-peak amplitude of frequencies below 1000 MHz were measured using a spectrum analyzer. The peak and average amplitude of frequencies above 1000 MHz were measured using a spectrum analyzer. The amplitude of each emission was then recorded from the analyzer display. Emissions radiated outside of the specified bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits, whichever is the lesser attenuation. Antenna port emission plots were taken of transmitter performance for reference in this and other documentation using test sample #2. The amplitude of each radiated emission was measured on the OATS at a distance of 3 meters from the FSM antenna testing was performed on sample representative of production with integral antenna (sample #1) with worst-case data provided. The amplitude of each radiated emission was maximized by equipment orientation and placement on the turn table, raising and lowering the FSM (Field Strength Measuring) antenna, changing the FSM antenna polarization, and by rotating the turntable. A Loop antenna was used for measuring emissions from 0.009 to 30 MHz, Biconilog Antenna for 30 to 1000 MHz, Double-Ridge, and/or Pyramidal Horn Antennas from 1 GHz to 25 GHz. Emissions were measured in dB $\mu$ V/m @ 3 meters.

Refer to figures seven through ten showing plots of mode 1 taken of the 2402-2480 MHz transmitter operation displaying compliance with the specifications. Refer to figures eleven through fourteen showing plots of mode 2 taken of the 2402-2480 MHz transmitter operation displaying compliance with the specifications.

Figure 7 Plot of Transmitter Emissions Operation in 2402-2480 MHz Mode 1 ANT (GFSK)

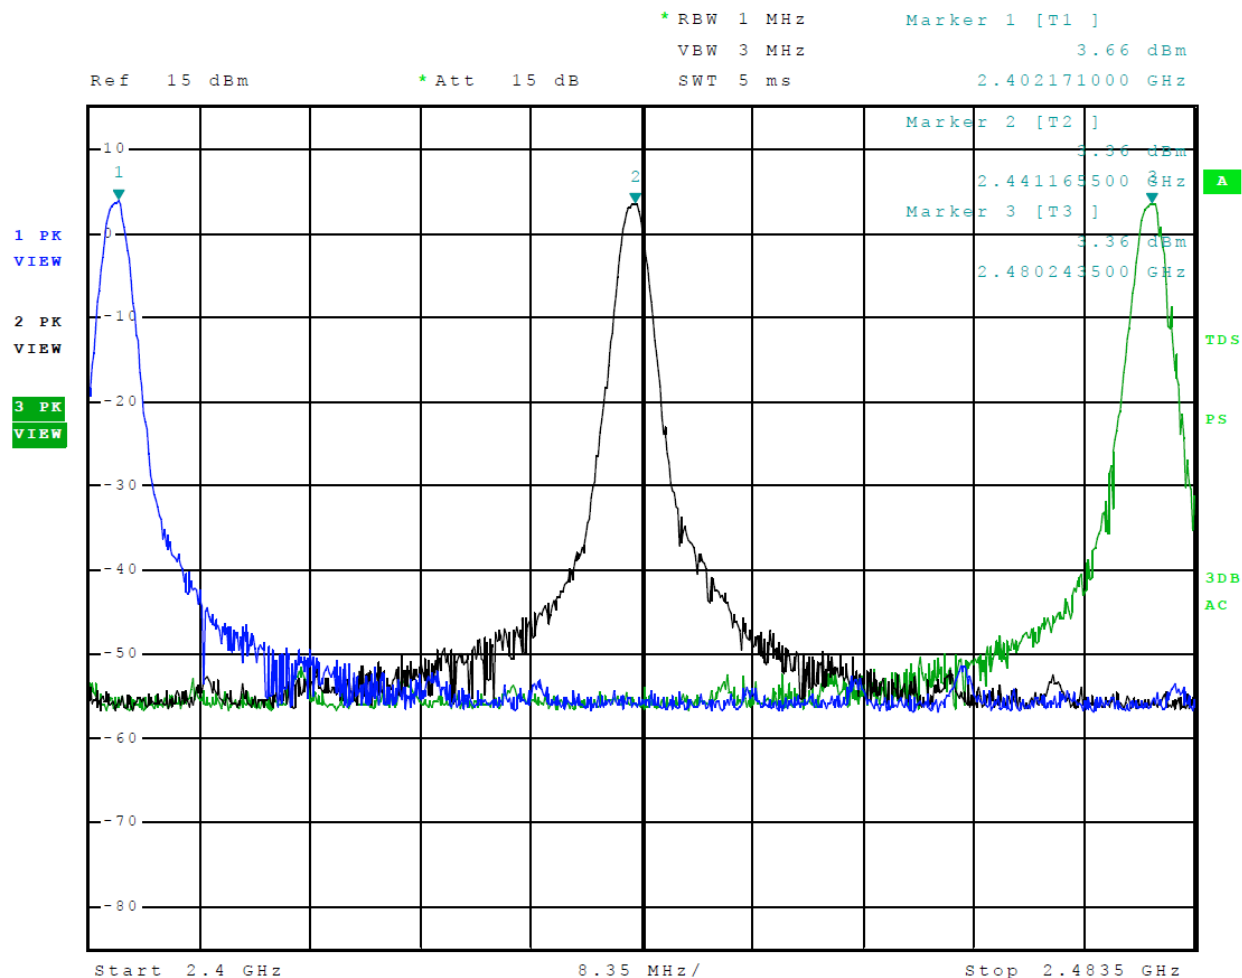




Figure 8 Plot of Transmitter Emissions Low Band Edge Mode 1 ANT (GFSK)

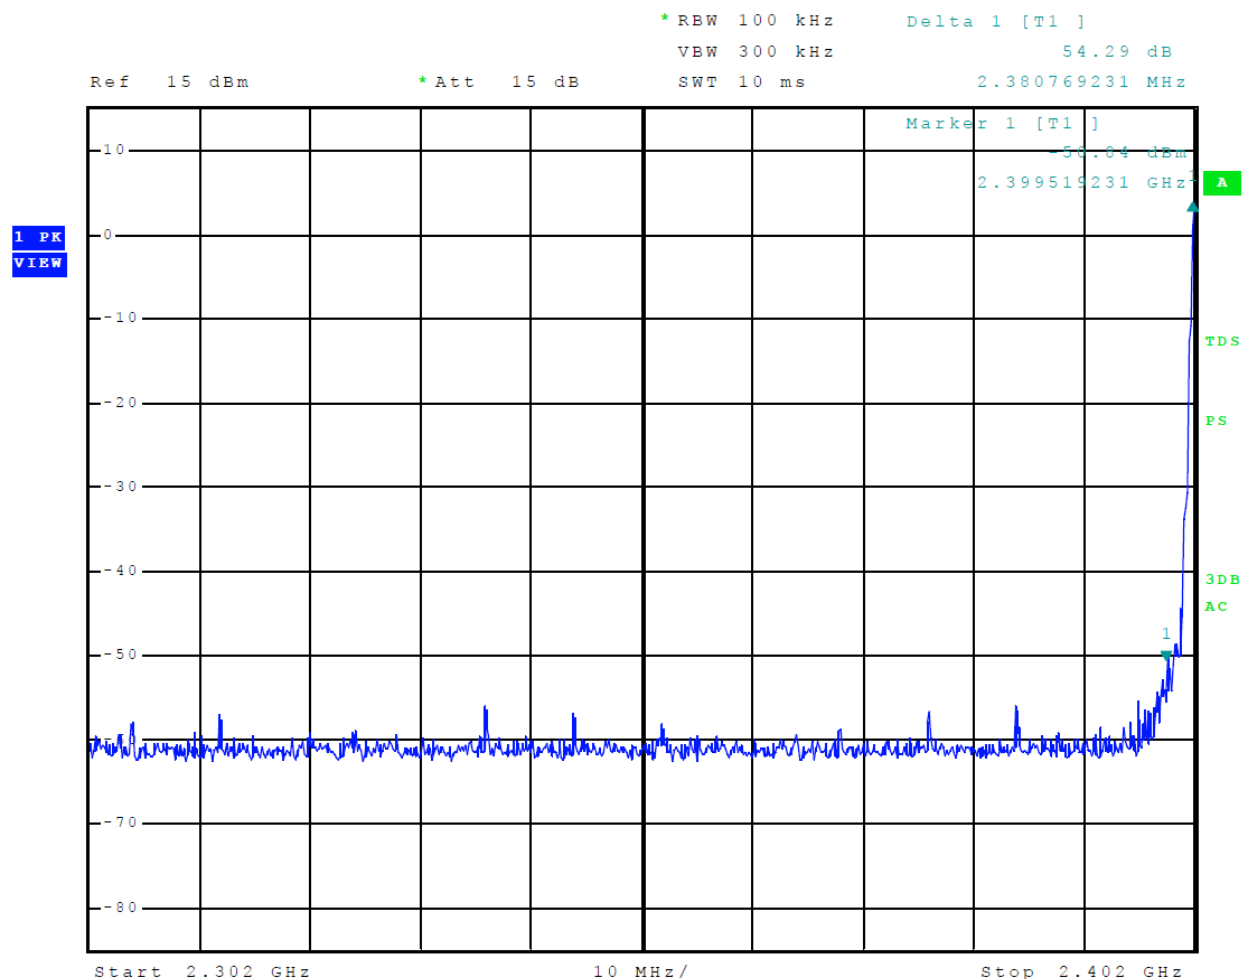


Figure 9 Plot of Transmitter Emissions High Band Edge Mode 1 ANT (GFSK)

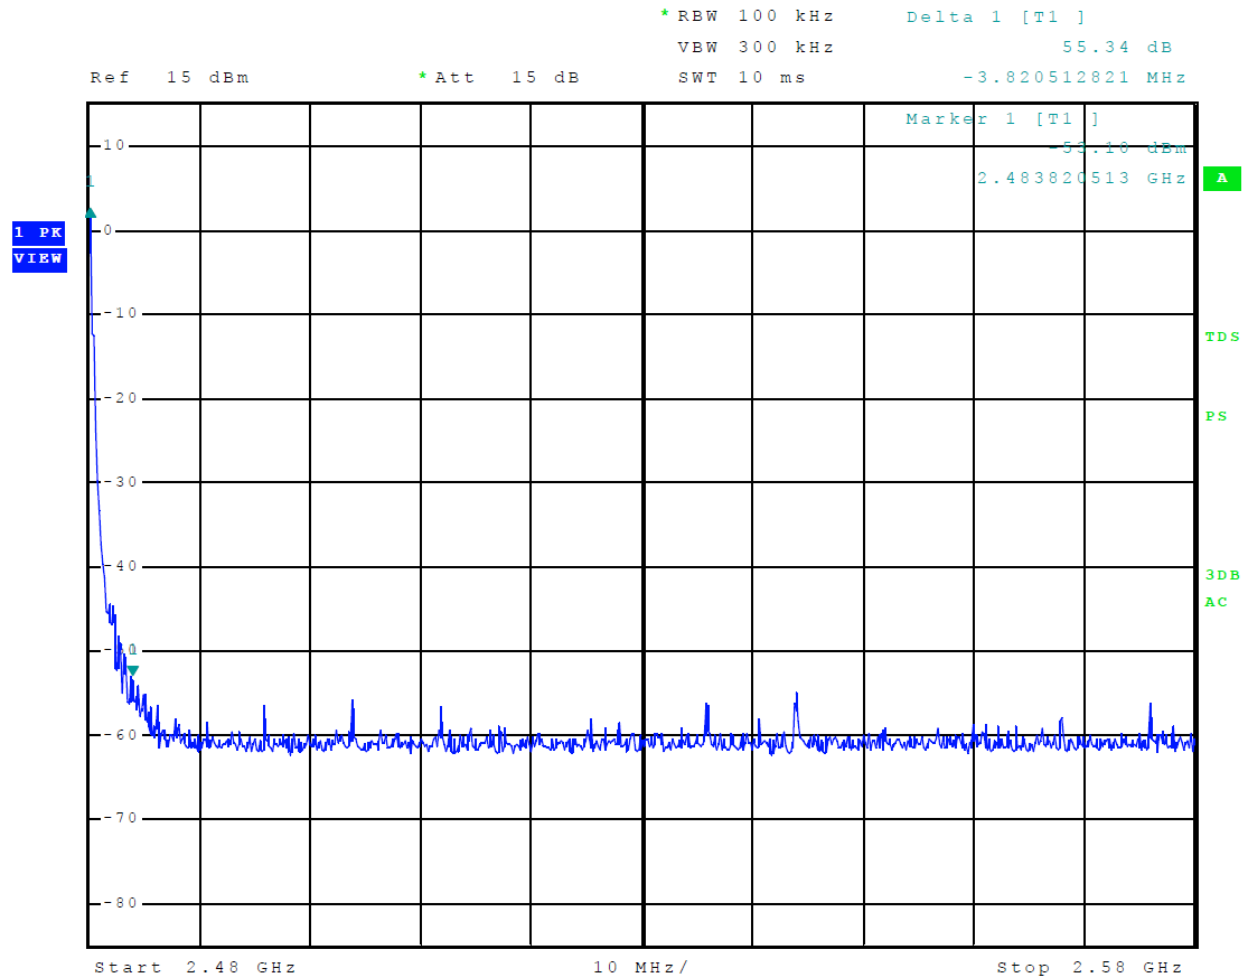


Figure 10 Plot of Transmitter Emissions 99% Occupied Bandwidth Mode 1 ANT (GFSK)

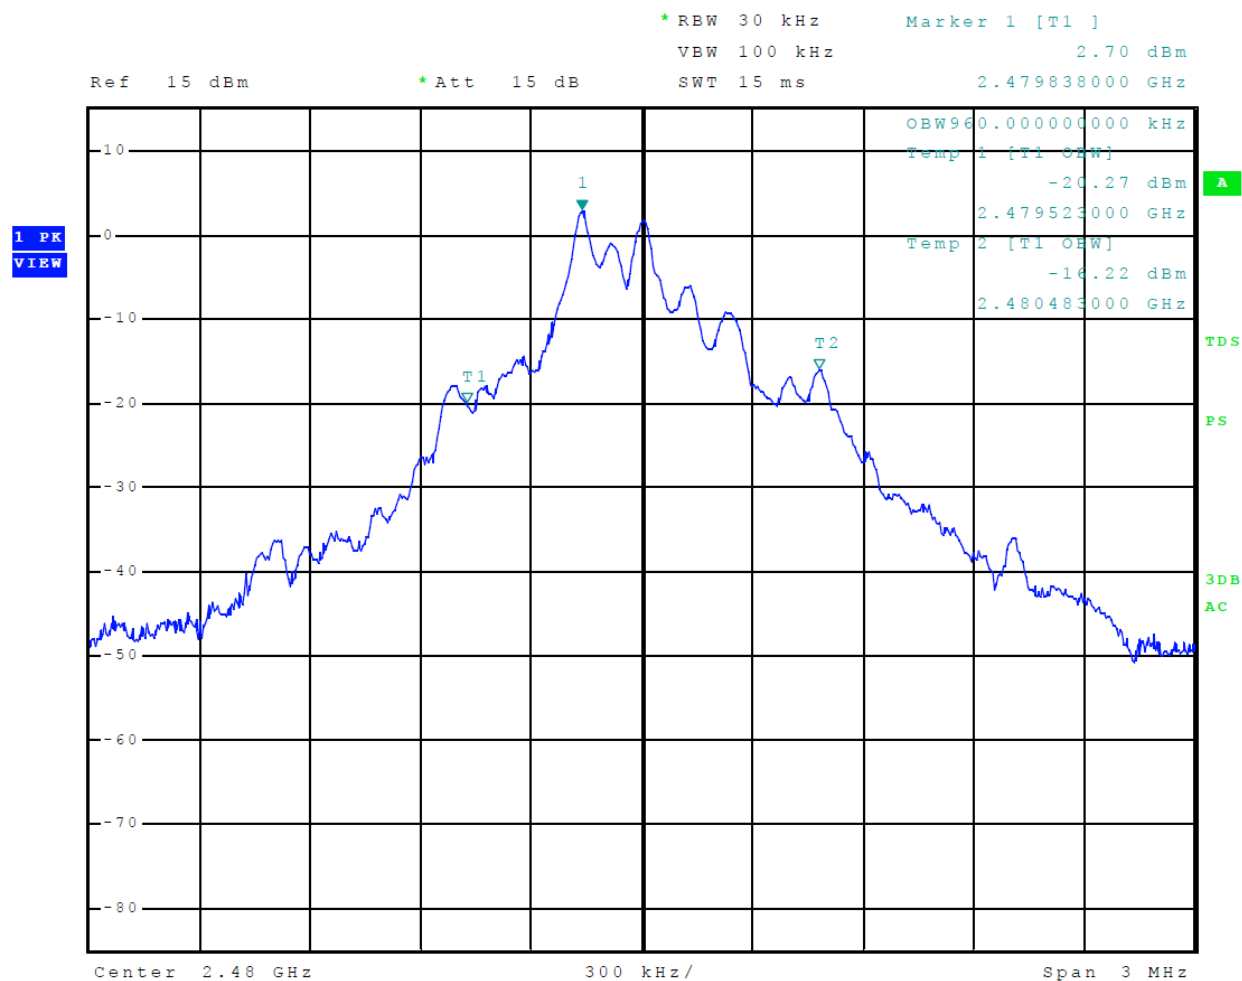


Figure 11 Plot of Transmitter Emissions Operation in 2402-2480 MHz Mode 2 BLE (GMSK)

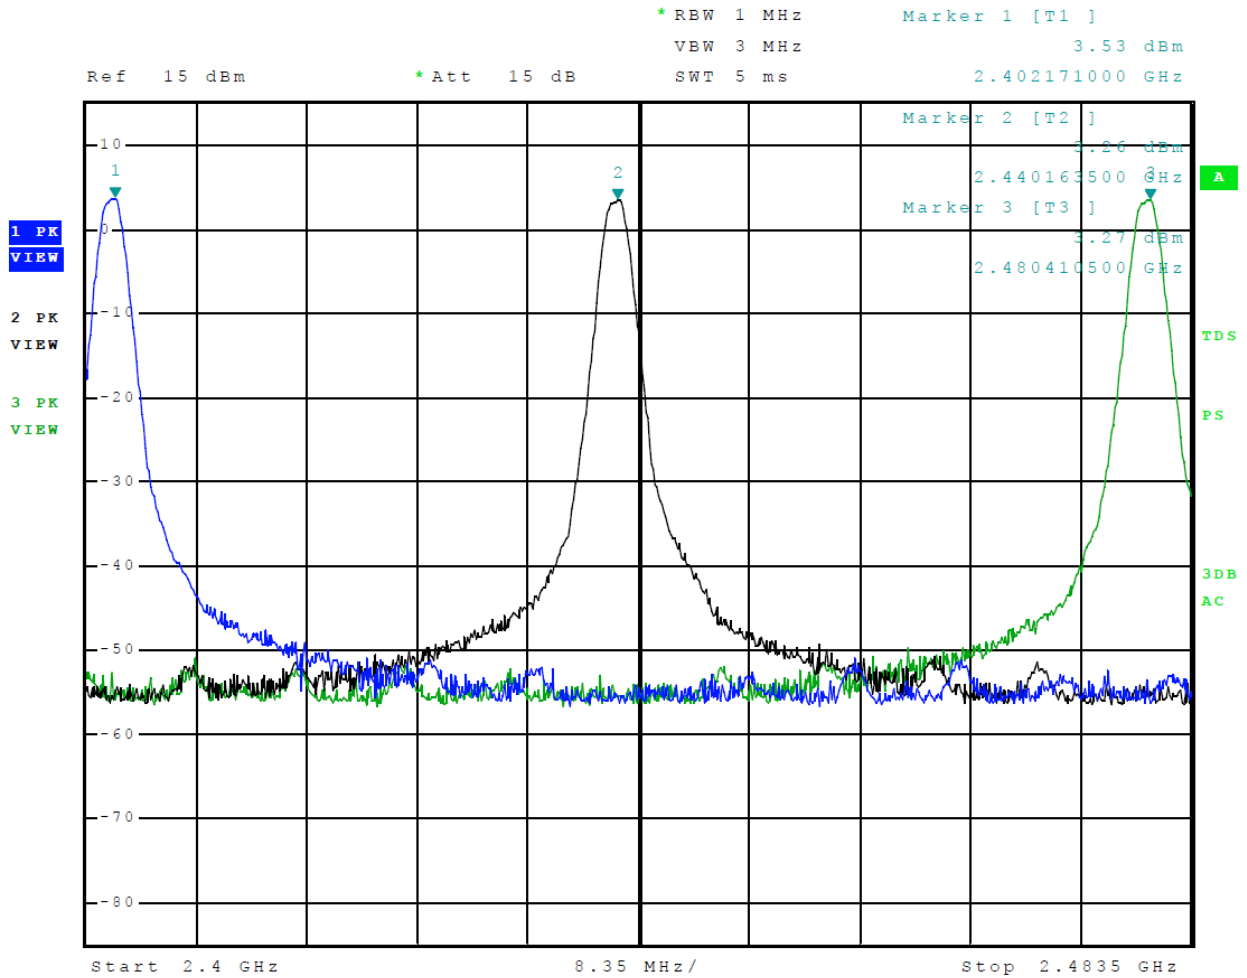


Figure 12 Plot of Transmitter Emissions Low Band Edge Mode 2 BLE (GMSK)

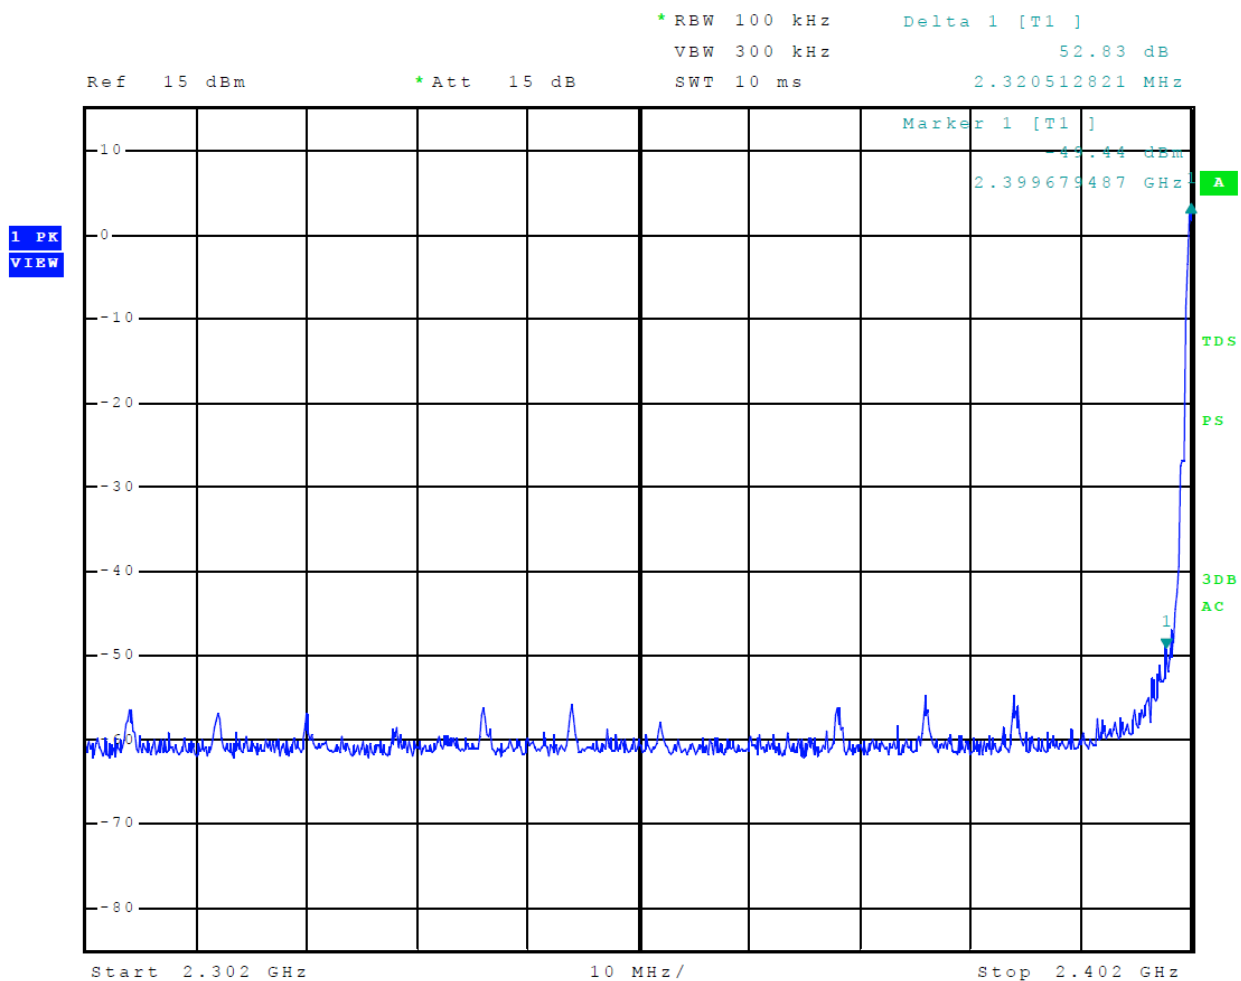


Figure 13 Plot of Transmitter Emissions High Band Edge Mode 2 BLE (GMSK)


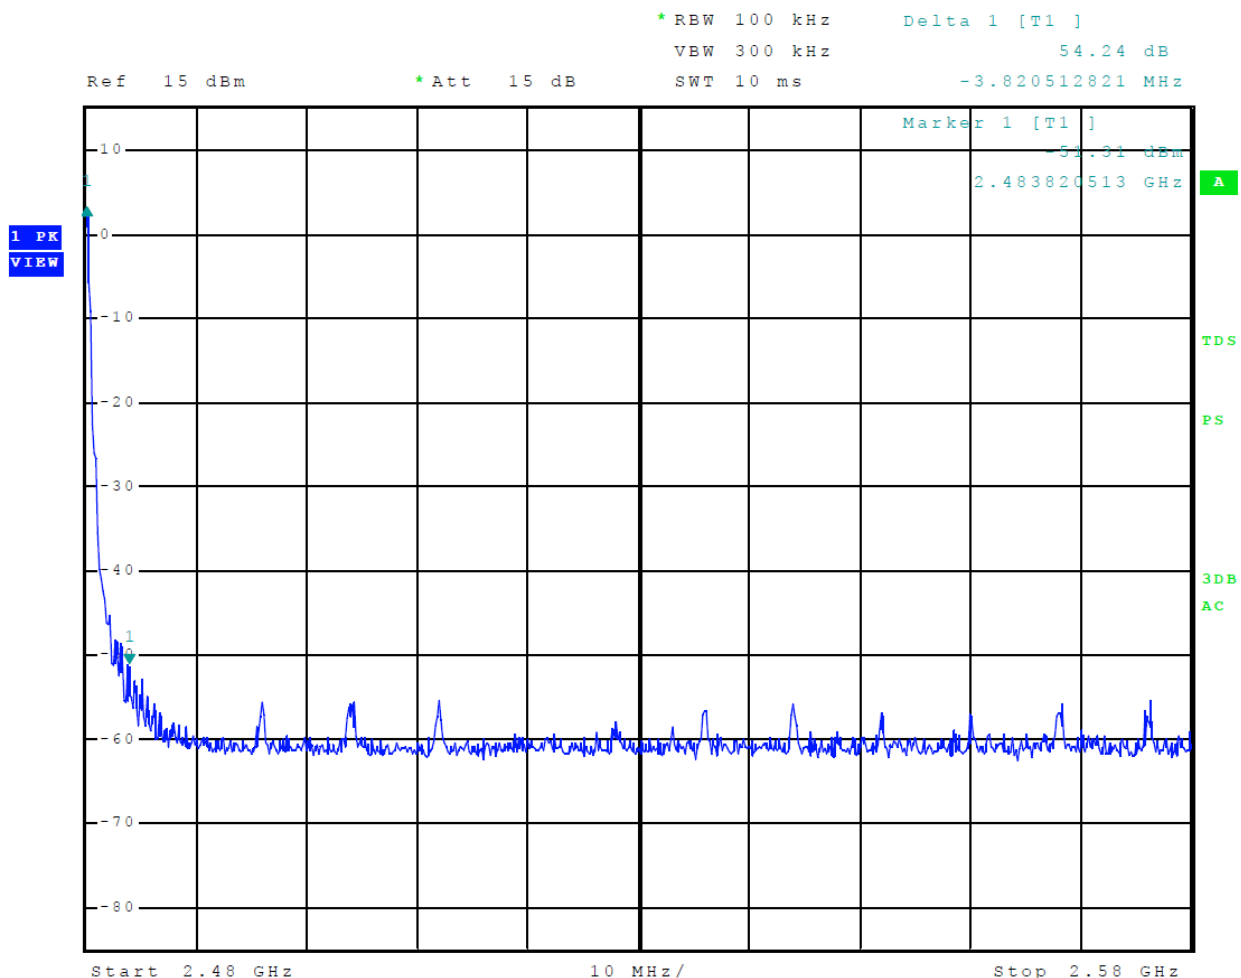


Figure 14 Plot of Transmitter Emissions 99% Occupied Bandwidth Mode 2 BLE (GMSK)

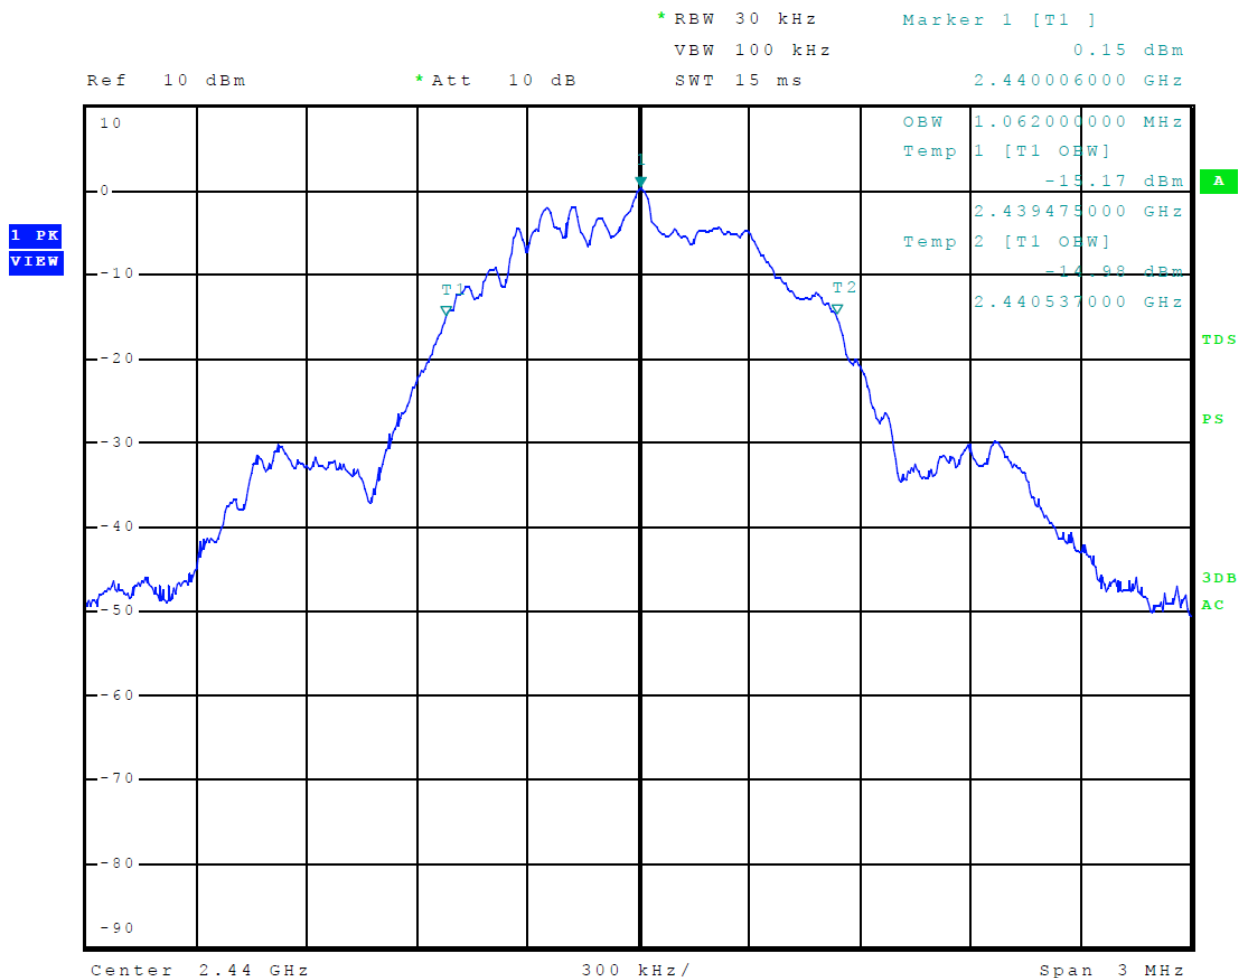

## Transmitter Emissions Data

**Table 10 Transmitter Radiated Emissions Mode 1 ANT (GFSK)**

Frequency in MHz	Horizontal Peak (dBµV/m)	Horizontal Average (dBµV/m)	Vertical Peak (dBµV/m)	Vertical Average (dBµV/m)	Limit @ 3m (dBµV/m)	Horizontal Margin (dB)	Vertical Margin (dB)
2402.0	101.5	73.2	98.1	69.8	94.0	-20.8	-24.2
4804.0	49.1	35.6	48.8	35.6	54.0	-18.4	-18.4
7206.0	57.3	40.2	54.8	40.0	54.0	-13.8	-14.0
9608.0	55.1	41.9	55.7	42.2	54.0	-12.1	-11.8
12010.0	58.7	46.1	59.6	45.8	54.0	-7.9	-8.2
14412.0	61.5	48.6	61.6	48.4	54.0	-5.4	-5.6
16814.0	64.0	50.8	63.8	50.7	54.0	-3.2	-3.3
2441.0	100.6	73.4	98.2	71.0	94.0	-20.6	-23.0
4882.0	48.8	35.4	48.5	35.4	54.0	-18.6	-18.6
7323.0	57.6	40.4	55.2	40.1	54.0	-13.6	-13.9
9764.0	55.3	42.2	54.7	42.2	54.0	-11.8	-11.8
12205.0	58.4	45.6	59.2	45.7	54.0	-8.4	-8.3
14646.0	61.7	48.4	61.0	48.4	54.0	-5.6	-5.6
17087.0	62.6	49.8	62.7	49.8	54.0	-4.2	-4.2
2480.0	99.4	71.3	99.6	71.6	94.0	-22.7	-22.4
4960.0	48.1	35.0	49.4	35.7	54.0	-19.0	-18.3
7440.0	52.2	39.6	55.6	40.2	54.0	-14.4	-13.8
9920.0	55.1	42.4	54.1	41.8	54.0	-11.6	-12.2
12400.0	59.2	45.3	58.2	45.1	54.0	-8.7	-8.9
14880.0	61.9	48.6	61.9	48.2	54.0	-5.4	-5.8
17360.0	62.9	49.8	63.4	50.1	54.0	-4.2	-3.9

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency range below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.



**Table 11 Transmitter Radiated Emissions Mode 2 BLE (GMSK)**

Frequency in MHz	Horizontal Peak (dB $\mu$ V/m)	Horizontal Average (dB $\mu$ V/m)	Vertical Peak (dB $\mu$ V/m)	Vertical Average (dB $\mu$ V/m)	Limit @ 3m (dB $\mu$ V/m)	Horizontal Margin (dB)	Vertical Margin (dB)
2402.0	98.6	93.2	98.6	92.7	94.0	-0.8	-1.3
4804.0	49.1	35.8	49.5	36.7	54.0	-18.2	-17.3
7206.0	53.7	40.2	58.7	45.7	54.0	-13.8	-8.3
9608.0	55.2	42.2	55.1	42.2	54.0	-11.8	-11.8
12010.0	58.6	45.7	58.6	45.6	54.0	-8.3	-8.4
14412.0	61.7	48.4	61.5	48.4	54.0	-5.6	-5.6
16814.0	63.7	50.7	63.9	50.7	54.0	-3.3	-3.3
2440.0	99.3	93.6	99.6	93.6	94.0	-0.4	-0.4
4880.0	49.1	35.9	48.9	36.0	54.0	-18.1	-18.0
7320.0	53.0	40.0	58.4	44.6	54.0	-14.0	-9.4
9760.0	55.7	42.1	56.0	42.4	54.0	-11.9	-11.6
12200.0	58.6	45.8	58.7	45.6	54.0	-8.2	-8.4
14640.0	61.4	48.6	61.5	48.6	54.0	-5.4	-5.4
17080.0	63.1	49.8	63.2	50.0	54.0	-4.2	-4.0
2480.0	99.2	93.8	99.3	93.9	94.0	-0.2	-0.1
4960.0	49.5	36.0	49.5	36.0	54.0	-18.0	-18.0
7440.0	53.4	40.3	53.5	40.5	54.0	-13.7	-13.5
9920.0	55.0	41.9	54.6	41.9	54.0	-12.1	-12.1
12400.0	58.4	45.3	58.2	45.3	54.0	-8.7	-8.7
14880.0	61.0	48.4	61.7	48.2	54.0	-5.6	-5.8
17360.0	63.1	50.4	63.1	50.2	54.0	-3.6	-3.8

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency range below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

## **Summary of Results for Transmitter Radiated Emissions of Intentional Radiator**

The EUT demonstrated compliance with the radiated emissions requirements of 47CFR Part 15.249, Industry Canada RSS-210 Issue 10, and RSS-GEN Issue 5 Intentional Radiator regulations. The EUT worst-case test sample configuration demonstrated minimum average margin of -1.1 dB below the average emission limit for the fundamental. The EUT worst-case configuration demonstrated minimum radiated harmonic emission margin of -3.4 dB below the limit. No other radiated emissions were found in the restricted bands less than 20 dB below limits than those recorded in this report. Other emissions were present with amplitudes at least 20 dB below the limits.

## Annex

- Annex A Measurement Uncertainty Calculations
- Annex B Test Equipment
- Annex C Rogers Qualifications
- Annex D Laboratory Certificate of Accreditation

## Annex A Measurement Uncertainty Calculations

The measurement uncertainty was calculated for all measurements listed in this test report according To CISPR 16–4. Result of measurement uncertainty calculations are recorded below. Component and process variability of production devices similar to those tested may result in additional deviations. The manufacturer has the sole responsibility of continued compliance.

Measurement	Expanded Measurement Uncertainty $U_{(lab)}$
3 Meter Horizontal 0.009-1000 MHz Measurements	4.16
3 Meter Vertical 0.009-1000 MHz Measurements	4.33
3 Meter Measurements 1-18 GHz	5.14
3 Meter Measurements 18-40 GHz	5.16
10 Meter Horizontal Measurements 0.009-1000 MHz	4.15
10 Meter Vertical Measurements 0.009-1000 MHz	4.32
AC Line Conducted	1.75
Antenna Port Conducted power	1.17
Frequency Stability	1.00E-11
Temperature	1.6°C
Humidity	3%

## Annex B Test Equipment

<u>Equipment</u>	<u>Manufacturer</u>	<u>Model (SN)</u>	<u>Band</u>	<u>Cal Date(m/d/y)</u>	<u>Due</u>
<input checked="" type="checkbox"/> LISN	FCC	FCC-LISN-50-25-10(1PA) (160611)	.15-30MHz	4/6/2021	4/6/2022
<input checked="" type="checkbox"/> LISN	Compliance Design	FCC-LISN-2.Mod.cd,(126)	.15-30MHz	10/14/2020	10/14/2021
<input checked="" type="checkbox"/> Cable	Huber & Suhner Inc.	Sucoflex102ea(L10M)(303073)	9kHz-40 GHz	10/14/2020	10/14/2021
<input type="checkbox"/> Cable	Huber & Suhner Inc.	Sucoflex102ea(1.5M)(303069)	9kHz-40 GHz	10/14/2020	10/14/2021
<input checked="" type="checkbox"/> Cable	Huber & Suhner Inc.	Sucoflex102ea(1.5M)(303070)	9kHz-40 GHz	10/14/2020	10/14/2021
<input checked="" type="checkbox"/> Cable	Belden	RG-58 (L1-CAT3-11509)	9kHz-30 MHz	10/14/2020	10/14/2021
<input checked="" type="checkbox"/> Cable	Belden	RG-58 (L2-CAT3-11509)	9kHz-30 MHz	10/14/2020	10/14/2021
<input checked="" type="checkbox"/> Antenna	Com Power	AL-130 (121055)	.001-30 MHz	10/14/2020	10/14/2021
<input type="checkbox"/> Antenna:	EMCO	6509	.001-30 MHz	10/14/2020	10/14/2022
<input type="checkbox"/> Antenna	ARA	BCD-235-B (169)	20-350MHz	10/14/2020	10/14/2021
<input type="checkbox"/> Antenna:	Schwarzbeck Model	VHBB 9124 (1468)		10/14/2020	10/14/2022
<input checked="" type="checkbox"/> Antenna	Sunol	JB-6 (A100709)	30-1000 MHz	10/14/2020	10/14/2021
<input type="checkbox"/> Antenna	ETS-Lindgren	3147 (40582)	200-1000MHz	10/14/2020	10/14/2022
<input type="checkbox"/> Antenna:	Schwarzbeck Model:	VULP 9118 A (VULP 9118 A-534)		10/14/2020	10/14/2022
<input checked="" type="checkbox"/> Antenna	ETS-Lindgren	3117 (200389)	1-18 GHz	4/21/2020	4/21/2022
<input type="checkbox"/> Antenna	Com Power	AH-118 (10110)	1-18 GHz	10/14/2020	10/14/2022
<input checked="" type="checkbox"/> Antenna	Com Power	AH-840 (101046)	18-40 GHz	4/6/2021	4/6/2023
<input checked="" type="checkbox"/> Analyzer	Rohde & Schwarz	ESU40 (100108)	20Hz-40GHz	5/20/2021	5/20/2022
<input checked="" type="checkbox"/> Analyzer	Rohde & Schwarz	ESW44 (101534)	20Hz-44GHz	1/12/2021	1/12/2022
<input type="checkbox"/> Analyzer	Rohde & Schwarz	FS-Z60, 90, 140, and 220	40GHz-220GHz	12/22/2017	12/22/2027
<input checked="" type="checkbox"/> Amplifier	Com-Power	PA-010 (171003)	100Hz-30MHz	10/14/2020	10/14/2021
<input checked="" type="checkbox"/> Amplifier	Com-Power	CPPA-102 (01254)	1-1000 MHz	10/14/2020	10/14/2021
<input checked="" type="checkbox"/> Amplifier	Com-Power	PAM-118A (551014)	0.5-18 GHz	10/14/2020	10/14/2021
<input checked="" type="checkbox"/> Amplifier	Com-Power	PAM-840A (461328)	18-40 GHz	10/14/2020	10/14/2021
<input type="checkbox"/> Power Meter	Agilent	N1911A with N1921A	0.05-40 GHz	4/6/2021	4/6/2022
<input type="checkbox"/> Generator	Rohde & Schwarz	SMB100A6 (100150)	20Hz-6 GHz	4/6/2021	4/6/2022
<input type="checkbox"/> Generator	Rohde & Schwarz	SMBV100A6 (260771)	20Hz-6 GHz	4/6/2021	4/6/2022
<input type="checkbox"/> RF Filter	Micro-Tronics	BRC50722 (009).9G notch	30-18000 MHz	4/6/2021	4/6/2022
<input type="checkbox"/> RF Filter	Micro-Tronics	HPM50114 (017)1.5G HPF	30-18000 MHz	4/6/2021	4/6/2022
<input type="checkbox"/> RF Filter	Micro-Tronics	HPM50117 (063) 3G HPF	30-18000 MHz	4/6/2021	4/6/2022
<input type="checkbox"/> RF Filter	Micro-Tronics	HPM50105 (059) 6G HPF	30-18000 MHz	4/6/2021	4/6/2022
<input type="checkbox"/> RF Filter	Micro-Tronics	BRM50702 (172) 2G notch	30-18000 MHz	4/6/2021	4/6/2022
<input type="checkbox"/> RF Filter	Micro-Tronics	BRC50703 (G102) 5G notch	30-18000 MHz	4/6/2021	4/6/2022
<input type="checkbox"/> RF Filter	Micro-Tronics	BRC50705 (024) 5G notch	30-18000 MHz	4/6/2021	4/6/2022
<input type="checkbox"/> Attenuator	Fairview	SA6NFN100W-40 (1625)	30-18000 MHz	4/6/2021	4/6/2022
<input type="checkbox"/> Attenuator	Mini-Circuits	VAT-3W2+ (1436)	30-6000 MHz	4/6/2021	4/6/2022
<input type="checkbox"/> Attenuator	Mini-Circuits	VAT-3W2+ (1445)	30-6000 MHz	4/6/2021	4/6/2022
<input type="checkbox"/> Attenuator	Mini-Circuits	VAT-3W2+ (1735)	30-6000 MHz	4/6/2021	4/6/2022
<input type="checkbox"/> Attenuator	Mini-Circuits	VAT-6W2+ (1438)	30-6000 MHz	4/6/2021	4/6/2022
<input type="checkbox"/> Attenuator	Mini-Circuits	VAT-6W2+ (1736)	30-6000 MHz	4/6/2021	4/6/2022
<input checked="" type="checkbox"/> Weather station	Davis	6312 (A81120N075)		11/4/2020	11/4/2021

Rogers Labs, Inc.  
 4405 West 259<sup>th</sup> Terrace  
 Louisburg, KS 66053  
 Phone/Fax: (913) 837-3214  
 Revision 2

Garmin International, Inc.  
 Model: A04272  
 Test: 210729  
 Test to: 47CFR 15C, RSS-Gen RSS-247  
 File: A04272 DXX TstRpt 210729 r2

SN's: 72W000054 / 72W000083  
 FCC ID: IPH-04272  
 IC: 1792A-04272  
 Date: September 29, 2021  
 Page 45 of 48



List of Test Equipment

Calibration

Date (m/d/y) Due

<input type="checkbox"/>	Antenna:	Schwarzbeck Model VHBB 9124 (9124-627)		4/21/2020	4/21/2022
<input type="checkbox"/>	Antenna:	Schwarzbeck Model: VULP 9118 A (VULP 9118 A-534)		4/21/2020	4/21/2022
<input type="checkbox"/>	Frequency Counter:	Leader LDC-825 (8060153)		4/6/2021	4/6/2022
<input type="checkbox"/>	LISN: Com-Power Model	LI-220A		10/14/2020	10/14/2021
<input type="checkbox"/>	LISN: Com-Power Model	LI-550C		10/14/2020	10/14/2021
<input type="checkbox"/>	ISN: Com-Power Model	ISN T-8		4/6/2021	4/6/2022
<input type="checkbox"/>	LISN: Fischer Custom Communications Model:	FCC-LISN-50-16-2-08		4/6/2021	4/6/2022
<input type="checkbox"/>	Cable	Huber & Suhner Inc. Sucoflex102ea(1.5M)(303072)	9kHz-40 GHz	10/14/2020	10/14/2021
<input type="checkbox"/>	Cable	Huber & Suhner Inc. Sucoflex102ea(L1M)(281183)	9kHz-40 GHz	10/14/2020	10/14/2021
<input type="checkbox"/>	Cable	Huber & Suhner Inc. Sucoflex102ea(L4M)(281184)	9kHz-40 GHz	10/14/2020	10/14/2021
<input type="checkbox"/>	Cable	Huber & Suhner Inc. Sucoflex102ea(L10M)(317546)	9kHz-40 GHz	10/14/2020	10/14/2021
<input type="checkbox"/>	Cable	Time Microwave 4M-750HF290-750 (4M)	9kHz-24 GHz	10/14/2020	10/14/2021
<input type="checkbox"/>	RF Filter	Micro-Tronics BRC17663 (001)	9.3-9.5 notch 30-1800 MHz	4/6/2021	4/6/2022
<input type="checkbox"/>	RF Filter	Micro-Tronics BRC19565 (001)	9.2-9.6 notch 30-1800 MHz	10/16/2018	4/6/2022
<input type="checkbox"/>	Analyzer	HP 8562A (3051A05950)	9kHz-125GHz	4/6/2021	4/6/2022
<input type="checkbox"/>	Analyzer	HP External Mixers 11571, 11970	25GHz-110GHz	4/18/2015	4/18/2025
<input type="checkbox"/>	Analyzer	HP 8591EM (3628A00871)		4/21/2020	4/21/2022
<input type="checkbox"/>	Wave Form Generator	Keysight 33512B (MY57400128)		4/21/2020	4/6/2022
<input type="checkbox"/>	Antenna: Solar	9229-1 & 9230-1		2/22/2021	2/22/2022
<input type="checkbox"/>	CDN: Com-Power Model	CDN325E		10/14/2020	10/14/2021
<input type="checkbox"/>	Injection Clamp	Luthi Model EM101		10/14/2020	10/14/2021
<input type="checkbox"/>	Oscilloscope Scope:	Tektronix MDO 4104		2/22/2021	2/22/2022
<input type="checkbox"/>	EMC Transient Generator	HVT TR 3000		2/22/2021	2/22/2022
<input type="checkbox"/>	AC Power Source (Ametech, California Instruments)			2/22/2021	2/22/2022
<input type="checkbox"/>	Field Intensity Meter:	EFM-018		2/22/2021	2/22/2022
<input type="checkbox"/>	ESD Simulator:	MZ-15		2/22/2021	2/22/2022
<input type="checkbox"/>	R.F. Power Amp	ACS 230-50W			not required
<input type="checkbox"/>	R.F. Power Amp	EIN Model: A301			not required
<input type="checkbox"/>	R.F. Power Amp	A.R. Model: 10W 1010M7			not required
<input type="checkbox"/>	R.F. Power Amp	A.R. Model: 50U1000			not required
<input type="checkbox"/>	Tenney Temperature Chamber				not required
<input checked="" type="checkbox"/>	Shielded Room				not required

Rogers Labs, Inc.  
 4405 West 259<sup>th</sup> Terrace  
 Louisburg, KS 66053  
 Phone/Fax: (913) 837-3214  
 Revision 2

Garmin International, Inc.  
 Model: A04272  
 Test: 210729  
 Test to: 47CFR 15C, RSS-Gen RSS-247  
 File: A04272 DXX TstRpt 210729 r2

SN's: 72W000054 / 72W000083  
 FCC ID: IPH-04272  
 IC: 1792A-04272  
 Date: September 29, 2021  
 Page 46 of 48

## ***Annex C Rogers Qualifications***

***Scot D. Rogers, Engineer***

### **Rogers Labs, Inc.**

Mr. Rogers has approximately 35 years' experience in the field of electronics. Working experience includes six years working in the automated controls industry and 6 years working with the design, development and testing of radio communications and electronic equipment.

#### Positions Held:

Systems Engineer: A/C Controls Mfg. Co., Inc. 6 Years

Electrical Engineer: Rogers Consulting Labs, Inc. 5 Years

Electrical Engineer: Rogers Labs, Inc. Current

#### Educational Background:

Bachelor of Science Degree in Electrical Engineering from Kansas State University

Bachelor of Science Degree in Business Administration Kansas State University

Several Specialized Training courses and seminars pertaining to Microprocessors and Software programming

### Annex D Laboratory Certificate of Accreditation

United States Department of Commerce  
National Institute of Standards and Technology



## Certificate of Accreditation to ISO/IEC 17025:2017

NVLAP LAB CODE: 200087-0

**Rogers Labs, Inc.**  
Louisburg, KS


*is accredited by the National Voluntary Laboratory Accreditation Program for specific services,  
listed on the Scope of Accreditation, for:*

### **Electromagnetic Compatibility & Telecommunications**

*This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017.  
This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality  
management system (refer to joint ISO-ILAC-IAF Communique dated January 2009).*

2021-02-19 through 2022-03-31  
Effective Dates

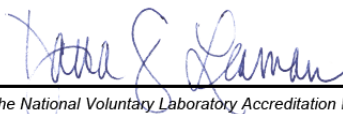

  
For the National Voluntary Laboratory Accreditation Program

Rogers Labs, Inc.  
4405 West 259<sup>th</sup> Terrace  
Louisburg, KS 66053  
Phone/Fax: (913) 837-3214  
Revision 2

Garmin International, Inc.  
Model: A04272  
Test: 210729  
Test to: 47CFR 15C, RSS-Gen RSS-247  
File: A04272 DXX TstRpt 210729 r2

SN's: 72W000054 / 72W000083  
FCC ID: IPH-04272  
IC: 1792A-04272  
Date: September 29, 2021  
Page 48 of 48