



FCC Test Report

FCC ID	:	IPH-04348			
Equipment	:	Hybrid Smartwatch			
Model No.	:	A04348			
Brand Name	:	GARMIN			
Applicant	:	Garmin International, Inc.			
Address	:	1200 E. 151st Street Olathe, KS 66062 United States			
Standard	:	47 CFR FCC Part 15.247			
Received Date	:	Jul. 14, 2022			
Tested Date	:	Jul. 18 ~ Jul. 27, 2022			

We, International Certification Corporation, would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by:

Approved by:

ong Chen

Along Cherk/ Assistant Manager

Gary Chang / Manager



Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information	5
1.2	Local Support Equipment List	7
1.3	Test Setup Chart	
1.4	Test Equipment List and Calibration Data	8
1.5	Test Standards	9
1.6	Reference Guidance	9
1.7	Deviation from Test Standard and Measurement Procedure	
1.8	Measurement Uncertainty	9
2	TEST CONFIGURATION	10
2.1	Testing Facility	10
2.2	The Worst Test Modes and Channel Details	10
3	TRANSMITTER TEST RESULTS	11
3.1	6dB and Occupied Bandwidth	11
3.2	Conducted Output Power	12
3.3	Power Spectral Density	13
3.4	Unwanted Emissions in Restricted Frequency Bands	14
3.5	Emissions in non-restricted Frequency Bands	16
3.6	AC Power Line Conducted Emissions	17
4	TEST LABORATORY INFORMATION	18

- Appendix A. 6dB and Occupied Bandwidth
- Appendix B. Conducted Output Power
- Appendix C. Power Spectral Density
- Appendix D. Unwanted Emissions into Restricted Frequency Bands
- Appendix E. Emissions in Non-Restricted Frequency Bands
- Appendix F. AC Power Line Conducted Emissions



Release Record

Report No.	Version	Description	Issued Date
FR271403AE	Rev. 01	Initial issue	Sep. 13, 2022



Summary of Test Results

FCC Rules	Test Items	Measured	Result	
15.207	AC Power Line Conducted Emissions	[dBuV]: 25.727MHz 20.63 (Margin -29.37dB) - AV	Pass	
15.247(d)	Unwanted Emissions	[dBuV/m at 3m]: 12010.00MHz	Pass	
15.209		44.00 (Margin -10.00dB) - AV	F 855	
15.247(b)(3)	Conducted Output Power	Power [dBm]: 3.11	Pass	
15.247(a)(2)	6dB Bandwidth	Meet the requirement of limit	Pass	
15.247(e)	Power Spectral Density	Meet the requirement of limit	Pass	
15.203	Antenna Requirement	Meet the requirement of limit	Pass	

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Information

1.1.1 Specification of the Equipment under Test (EUT)

RF General Information						
Frequency Range (MHz)Bluetooth ModeCh. Freq. (MHz)Channel NumberData Rate						
2400-2483.5 V5.0 LE Garmin 2402-2480 0-39 [40] 1 Mbps						
Note: Bluetooth LE (L	₋ow energy) uses GFS	SK modulation.				

1.1.2 Antenna Details

Ant. No.	Brand	Model	Туре	Connector	Gain (dBi)
1	Garmin	117-01797-00	LOOP	No	-2.14

1.1.3 Power Supply Type of Equipment under Test (EUT)

Power Supply Type	5Vdc from host 3.87Vdc from battery
-------------------	--

1.1.4 Accessories

	Accessories				
No. Equipment Description					
1	Battery	Brand: GARMIN Model: 361-00157-00 Power Rating: 3.87Vdc, 221mAh			
2	USB cable	Brand: GARMIN Model: 320-01069-10 Power line: 0.52m shielded without core			



1.1.5 Channel List

	Frequency	band (MHz)			2400~2	2483.5	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
37	2402	9	2422	18	2442	28	2462
0	2404	10	2424	19	2444	29	2464
1	2406	38	2426	20	2446	30	2466
2	2408	11	2428	21	2448	31	2468
3	2410	12	2430	22	2450	32	2470
4	2412	13	2432	23	2452	33	2472
5	2414	14	2434	24	2454	34	2474
6	2416	15	2436	25	2456	35	2476
7	2418	16	2438	26	2458	36	2478
8	2420	17	2440	27	2460	39	2480

1.1.6 Test Tool and Duty Cycle

Test Tool	ANT BLE, Version: SW1.03				
Modulation Mode	Duty Cycle Of Test Signal (%) Duty Factor (dB)				
BT-LE(1Mbps)	65.12%	1.86			

1.1.7 Power Index of Test Tool

Modulation Mode	Test Frequency (MHz)			
	2402	2440	2480	
BT-LE(1Mbps)	Default	Default	Default	




1.2 Local Support Equipment List


	Support Equipment List						
No.	No. Equipment Brand Model FCC ID Remarks						
1	Adapter	samsung	ETA-U90JWS				

1.3 Test Setup Chart

Battery mode

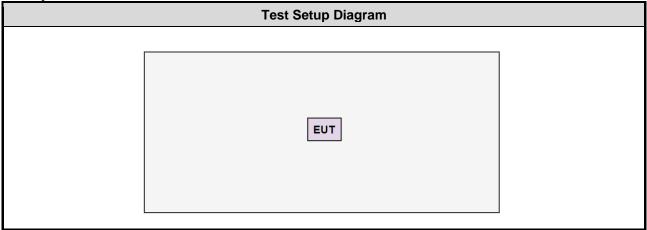

Charging Mode

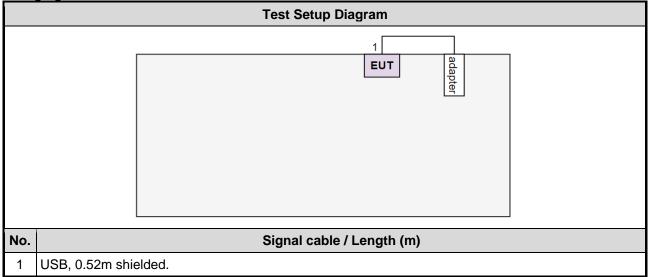



Test Equipment List and Calibration Data 1.4

Test Item	Conducted Emission				
Test Site	Conduction room 1 / (CO01-WS)				
Tested Date	Jul. 25, 2022				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Receiver	R&S	ESR3	101658	Feb. 16, 2022	Feb. 15, 2023
LISN	R&S	ENV216	101579	Apr. 21, 2022	Apr. 20, 2023
LISN (Support Unit)	SCHWARZBECK	Schwarzbeck 8127	8127667	Jan. 07, 2022	Jan. 06, 2023
RF Cable-CON	Woken	CFD200-NL	CFD200-NL-001	Oct. 19, 2021	Oct. 18, 2022
50 ohm terminal (Support Unit)	NA	50	01	May 10, 2022	May 09, 2023
Measurement Software	AUDIX	e3	6.120210k	NA	NA
Note: Calibration Inter	Note: Calibration Interval of instruments listed above is one year.				

Test Item	Radiated Emission				
Test Site	966 chamber1 / (03CH01-WS)				
Tested Date	Jul. 18 ~ Jul. 19, 2022				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Receiver	R&S	ESR3	101657	Mar. 15, 2022	Mar. 14, 2023
Spectrum Analyzer	R&S	FSV40	101498	Nov. 29, 2021	Nov. 28, 2022
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 08, 2021	Nov. 07, 2022
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-685	Jun. 28, 2022	Jun. 27, 2023
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1096	Dec. 03, 2021	Dec. 02, 2022
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Nov. 04, 2021	Nov. 03, 2022
Preamplifier	EMC	EMC02325	980225	Jun. 28, 2022	Jun. 27, 2023
Preamplifier	Agilent	83017A	MY39501308	Sep. 28, 2021	Sep. 27, 2022
Preamplifier	EMC	EMC184045B	980192	Jul. 08, 2022	Jul. 07, 2023
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Oct. 05, 2021	Oct. 04, 2022
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-001	Oct. 05, 2021	Oct. 04, 2022
LF cable 11M	EMC	EMCCFD400-NW-N W-11000	200801	Oct. 05, 2021	Oct. 04, 2022
LF cable 1M	EMC	EMCCFD400-NM-N M-1000	160502	Oct. 05, 2021	Oct. 04, 2022
RF Cable	EMC	EMC104-35M-35M- 8000	210920	Oct. 05, 2021	Oct. 04, 2022
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16019/4	Oct. 05, 2021	Oct. 04, 2022
Measurement Software	AUDIX	e3	6.120210g	NA	NA
Note: Calibration Inter	val of instruments liste	d above is one year.	•		•



RF Conducted				
(TH01-WS)				
Jul. 27, 2022				
Brand	Model No.	Serial No.	Calibration Date	Calibration Until
R&S	FSV40	101910	Apr. 18, 2022	Apr. 17, 2023
Anritsu	ML2495A	1241002	Nov. 07, 2021	Nov. 06, 2022
Anritsu	MA2411B	1207366	Nov. 07, 2021	Nov. 06, 2022
Sporton	SENSE-15247_FS	V5.10.7.11	NA	NA
-	(TH01-WS) Jul. 27, 2022 Brand R&S Anritsu Anritsu	(TH01-WS) Jul. 27, 2022 Brand Model No. R&S FSV40 Anritsu ML2495A Anritsu MA2411B	Brand Model No. Serial No. R&S FSV40 101910 Anritsu ML2495A 1241002 Anritsu MA2411B 1207366	Model No. Serial No. Calibration Date R&S FSV40 101910 Apr. 18, 2022 Anritsu ML2495A 1241002 Nov. 07, 2021 Anritsu MA2411B 1207366 Nov. 07, 2021

1.5 Test Standards

47 CFR FCC Part 15.247 ANSI C63.10-2013

1.6 Reference Guidance

FCC KDB 558074 D01 15.247 Meas Guidance v05r02

1.7 Deviation from Test Standard and Measurement Procedure

None

1.8 Measurement Uncertainty

The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)).

Measurement Uncertainty		
Parameters	Uncertainty	
Bandwidth	±34.130 Hz	
Conducted power	±0.808 dB	
Power density	±0.583 dB	
Conducted emission	±2.715 dB	
AC conducted emission	±2.92 dB	
Unwanted Emission ≤ 1GHz	±3.41 dB	
Unwanted Emission > 1GHz	±4.59 dB	



2 Test Configuration

2.1 Testing Facility

Test Laboratory	International Certification Corporation
Test Site	CO01-WS, 03CH01-WS, TH01-WS
Address of Test Site	No.3-1, Lane 6, Wen San 3rd St., Kwei Shan Dist., Tao Yuan City 33381, Taiwan (R.O.C.)
> ECC Designation No.	TN/0700

FCC Designation No.: TW2732

➢ FCC site registration No.: 181692

> ISED#: 10807A

➤ CAB identifier: TW2732

2.2 The Worst Test Modes and Channel Details

Test item	Mode	Test Frequency (MHz)	Test Configuration
AC Power Line Conducted Emissions	Charging		1
Unwanted Emissions ≤ 1GHz	BT-LE(1Mbps)	2402, 2440, 2480	2
	Charging		1
Unwanted Emissions > 1GHz	BT-LE(1Mbps)	2402, 2440, 2480	2
Conducted Output Power 6dB bandwidth Power spectral density	BT-LE(1Mbps)	2402, 2440, 2480	2

NOTE:

 The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The **Y-plane** results were found as the worst case and were shown in this report.

2. The EUT had been tested by following test configurations.

1) Configuration 1: Charging mode

2) Configuration 2: Battery mode



3 Transmitter Test Results

3.1 6dB and Occupied Bandwidth

3.1.1 Limit of 6dB Bandwidth

The minimum 6dB bandwidth shall be at least 500 kHz.

3.1.2 Test Procedures


6dB Bandwidth

- 1. Set resolution bandwidth (RBW) = 100 kHz, Video bandwidth = 300 kHz.
- 2. Detector = Peak, Trace mode = max hold.
- 3. Sweep = auto couple, Allow the trace to stabilize.
- 4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

Occupied Bandwidth

- 1. Set resolution bandwidth (RBW) = $1\% \sim 5\%$ of OBW, Video bandwidth = $3 \times RBW$
- 2. Detector = Sample, Trace mode = max hold.
- 3 Sweep = auto couple, Allow the trace to stabilize.
- 4. Use the OBW measurement function of spectrum analyzer to measure the occupied bandwidth.

3.1.3 Test Setup



3.1.4 Test Results

Ambient Condition24°C / 66%Tested ByRoger Lu	Tested By Roger Lu
--	--------------------

Refer to Appendix A.



3.2 Conducted Output Power

3.2.1 Limit of Conducted Output Power

Conducted power shall not exceed 1Watt.

Antenna gain <= 6dBi, no any corresponding reduction is in output power limit.

3.2.2 Test Procedures

A broadband RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.

3.2.3 Test Setup



3.2.4 Test Results

Ambient Condition24°C / 66%Tested ByRoger Lu
--

Refer to Appendix B.



3.3 **Power Spectral Density**


3.3.1 Limit of Power Spectral Density

Power spectral density shall not be greater than 8 dBm in any 3 kHz band.

3.3.2 Test Procedures

- 1. Set the RBW = 3 kHz, VBW = 10 kHz.
- 2. Detector = Peak, Sweep time = auto couple.
- 3. Trace mode = max hold, allow trace to fully stabilize.
- 4. Use the peak marker function to determine the maximum amplitude level.

3.3.3 Test Setup



3.3.4 Test Results

	Ambient Condition	24°C / 66%	Tested By	Roger Lu
--	-------------------	------------	-----------	----------

Refer to Appendix C.



3.4 Unwanted Emissions in Restricted Frequency Bands

3.4.1 Limit of Unwanted Emissions in Restricted Frequency Bands

Restricted Band Emissions Limit				
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)	
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300	
0.490~1.705	24000/F(kHz)	33.8 - 23	30	
1.705~30.0	30	29	30	
30~88	100	40	3	
88~216	150	43.5	3	
216~960	200	46	3	
Above 960	500	54	3	

Note 1:

Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit **Note 2:**

Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

3.4.2 Test Procedures


- Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
- Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
- 3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:

- 1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
- 2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
- 3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.



3.4.3 Test Setup

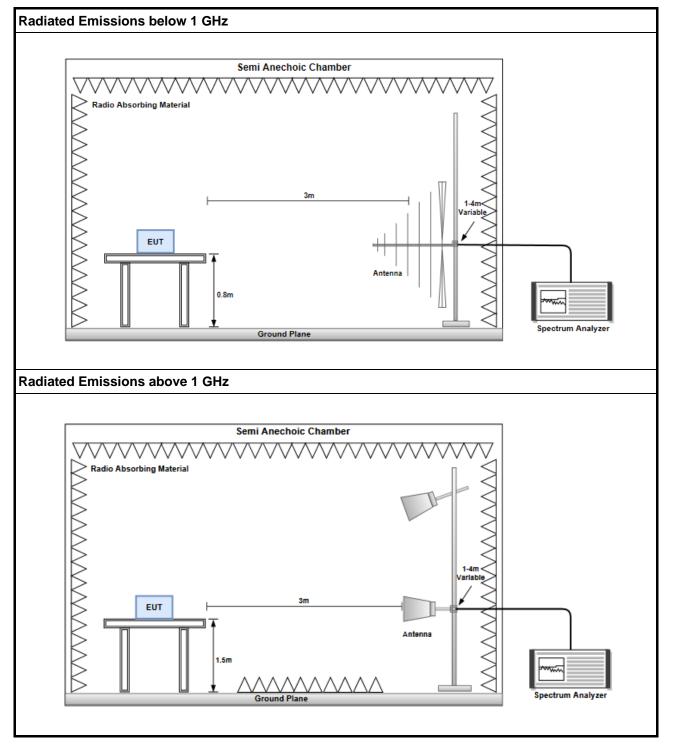

3.4.4 Test Results

Refer to Appendix D.



3.5 Emissions in non-restricted Frequency Bands

3.5.1 Emissions in non-restricted frequency bands limit

Peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz.

3.5.2 Test Procedures


Reference level measurement

- 1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
- 2. Trace = max hold , Allow Trace to fully stabilize
- 3. Use the peak marker function to determine the maximum PSD level

Emission level measurement

- 1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
- 2. Trace = max hold , Allow Trace to fully stabilize
- 3. Scan Frequency range is up to 25GHz
- 4. Use the peak marker function to determine the maximum amplitude level

3.5.3 Test Setup



3.5.4 Test Results

Ambient Condition24°C / 66%Tested ByRoger Lu
--

Refer to Appendix E.



AC Power Line Conducted Emissions 3.6


Limit of AC Power Line Conducted Emissions 3.6.1

Conducted Emissions Limit					
Frequency Emission (MHz) Quasi-Peak Average					
0.15-0.5 66 - 56 * 56 - 46 *					
0.5-5 56 46					
5-30 60 50					
Note 1: * Decreases with the logarithm of the frequency.					

3.6.2 Test Procedures

- 1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
- The device is connected to line impedance stabilization network (LISN) and other accessories are 2. connected to other LISN. Measured levels of AC power line conducted emission are across the 50 Ω LISN port.
- 3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
- This measurement was performed with AC 120V/60Hz 4.

3.6.3 Test Setup

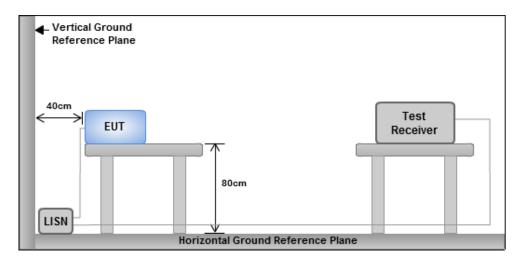

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.6.4 Test Results

Refer to Appendix F.



4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corporation (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <u>http://www.icertifi.com.tw</u>.

Linkou

Tel: 886-2-2601-1640 No.30-2, Ding Fwu Tsuen, Lin Kou District, New Taipei City, Taiwan (R.O.C.)

Kwei Shan

Tel: 886-3-271-8666 No.3-1, Lane 6, Wen San 3rd St., Kwei Shan Dist., Tao Yuan City 33381, Taiwan (R.O.C.) No.2-1, Lane 6, Wen San 3rd St., Kwei Shan Dist., Tao Yuan City 33381, Taiwan (R.O.C.)

Kwei Shan Site II

Tel: 886-3-271-8640 No.14-1, Lane 19, Wen San 3rd St., Kwei Shan Dist., Tao Yuan City 333, Taiwan (R.O.C.)

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666 Fax: 886-3-318-0155 Email: ICC_Service@icertifi.com.tw

—END—



Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
BT-LE(1Mbps)	702.899k	1.031M	1M03F1D	681.159k	1.027M

Max-N dB = Maximum 6dB down bandwidth; Max-OBW = Maximum 99% occupied bandwidth; Min-N dB = Minimum 6dB down bandwidth; Min-OBW = Minimum 99% occupied bandwidth


Result

Mode	Result	Limit	Port 1-N dB	Port 1-OBW
		(Hz)	(Hz)	(Hz)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	500k	695.652k	1.027M
2440MHz	Pass	500k	702.899k	1.031M
2480MHz	Pass	500k	681.159k	1.031M


Port X-N dB = Port X 6dB down bandwidth;

Port X-OBW = Port X 99% occupied bandwidth



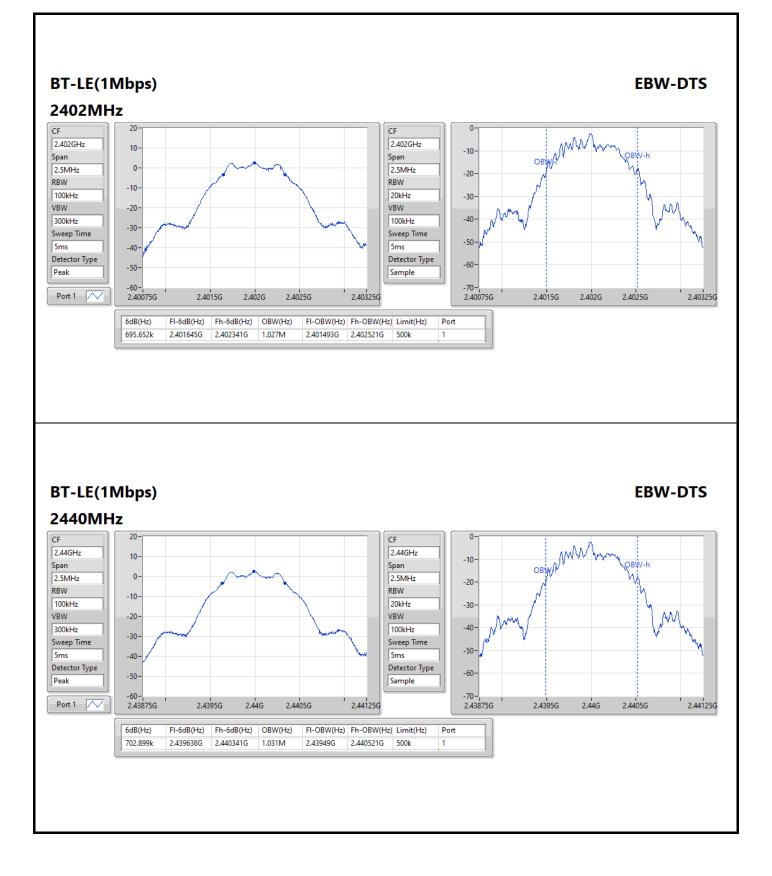



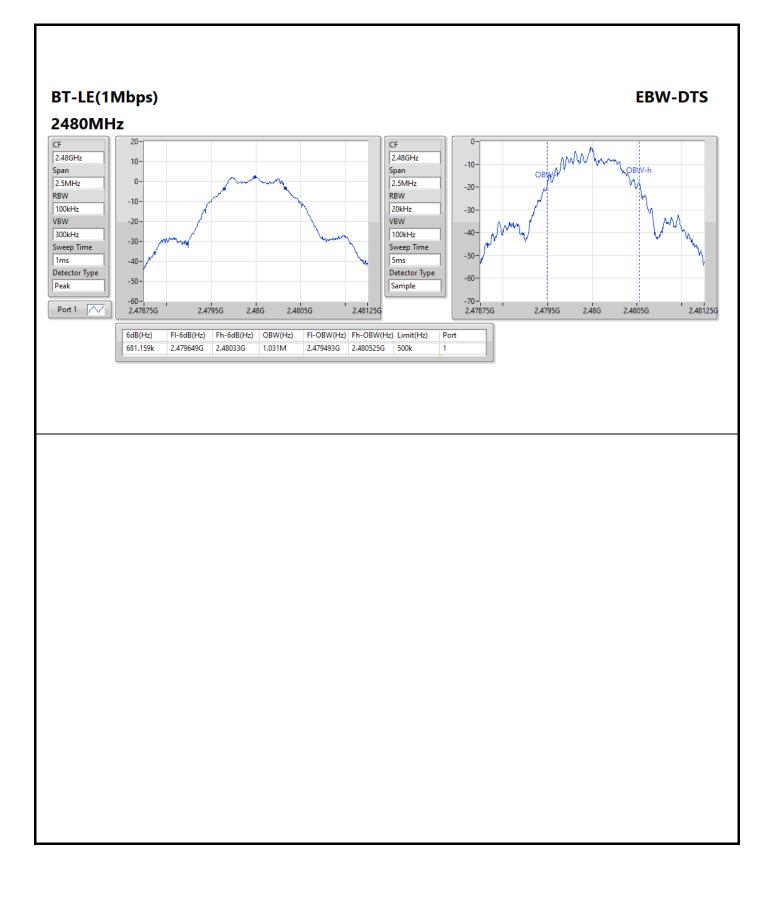



Mode	Power (dBm)	Power (W)
2.4-2.4835GHz	-	-
BT-LE(1Mbps)	3.05	0.00202

Result

Mode	Result	Antenna Gain (dBi)	Power (dBm)	Power Limit (dBm)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	-2.14	3.05	-
2440MHz	Pass	-2.14	2.83	-
2480MHz	Pass	-2.14	2.51	-

Note: Average power is for reference only.



Mode	Power (dBm)	Power (W)
2.4-2.4835GHz	-	-
BT-LE(1Mbps)	3.11	0.00205

Result

Mode	Result	Antenna Gain (dBi)	Power (dBm)	Power Limit (dBm)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	-2.14	3.11	30.00
2440MHz	Pass	-2.14	2.91	30.00
2480MHz	Pass	-2.14	2.59	30.00




Mode	PD
	(dBm/3kHz)
2.4-2.4835GHz	-
BT-LE(1Mbps)	-13.44


Result

Mode	Result	Antenna Gain (dBi)	Power Density (dBm/3kHz)	Power Density Limit (dBm/3kHz)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	-2.14	-13.44	8.00
2440MHz	Pass	-2.14	-13.65	8.00
2480MHz	Pass	-2.14	-13.79	8.00



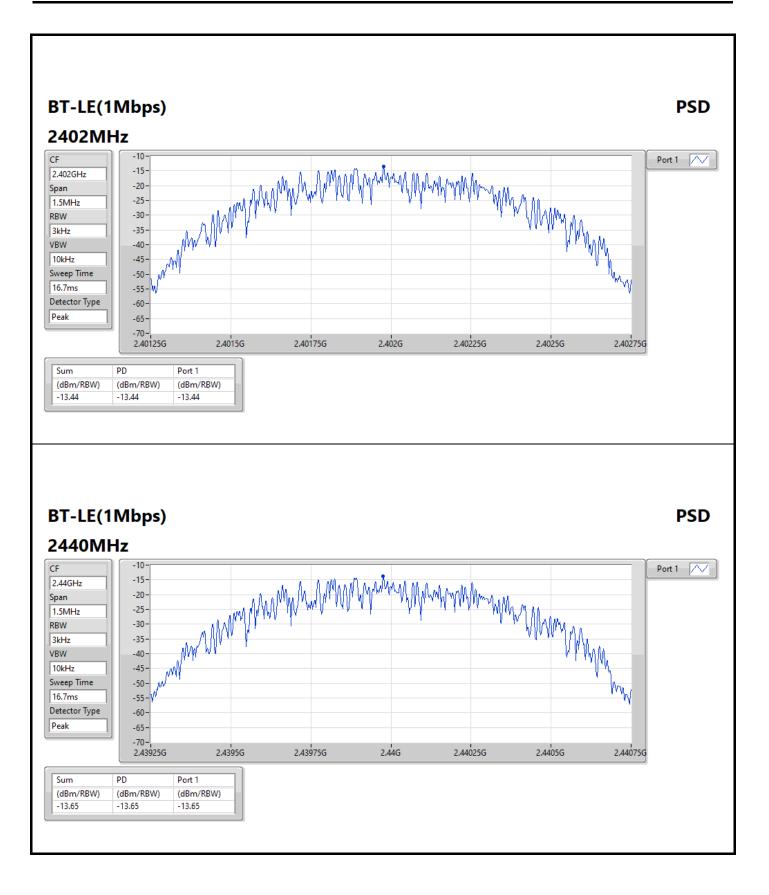




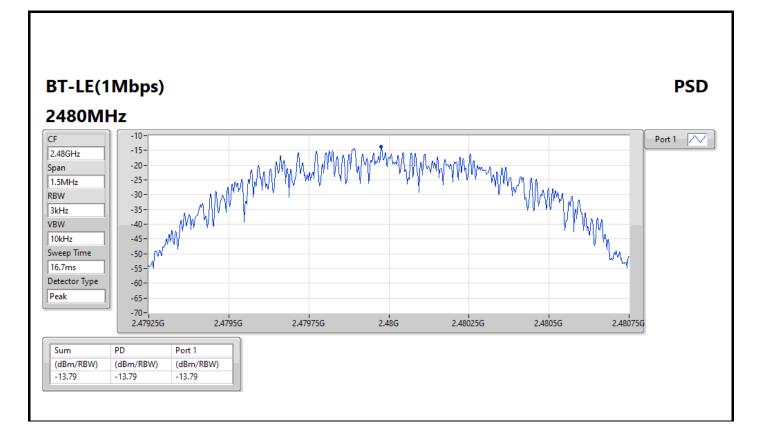




Configuration 2: Battery mode

Unwanted Emissions (Below 1GHz)

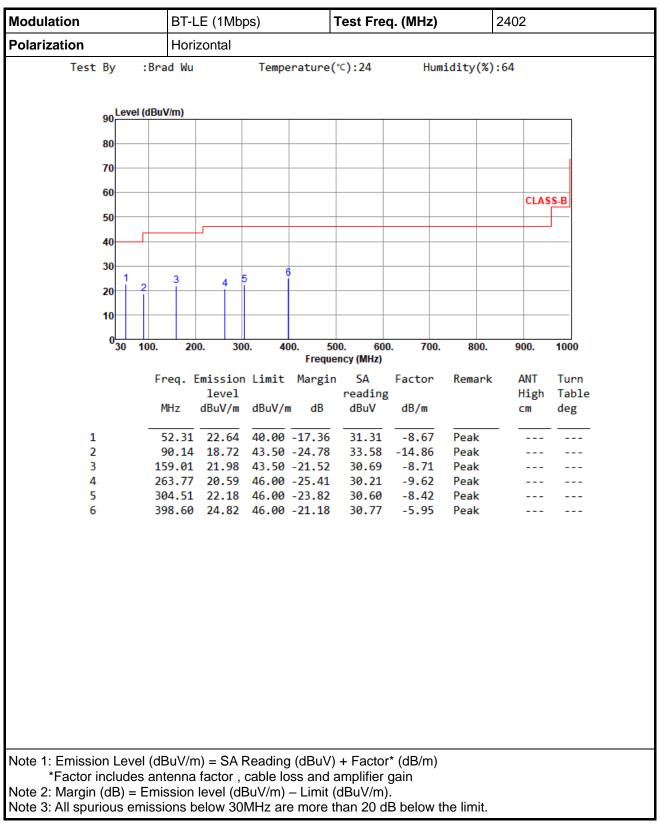



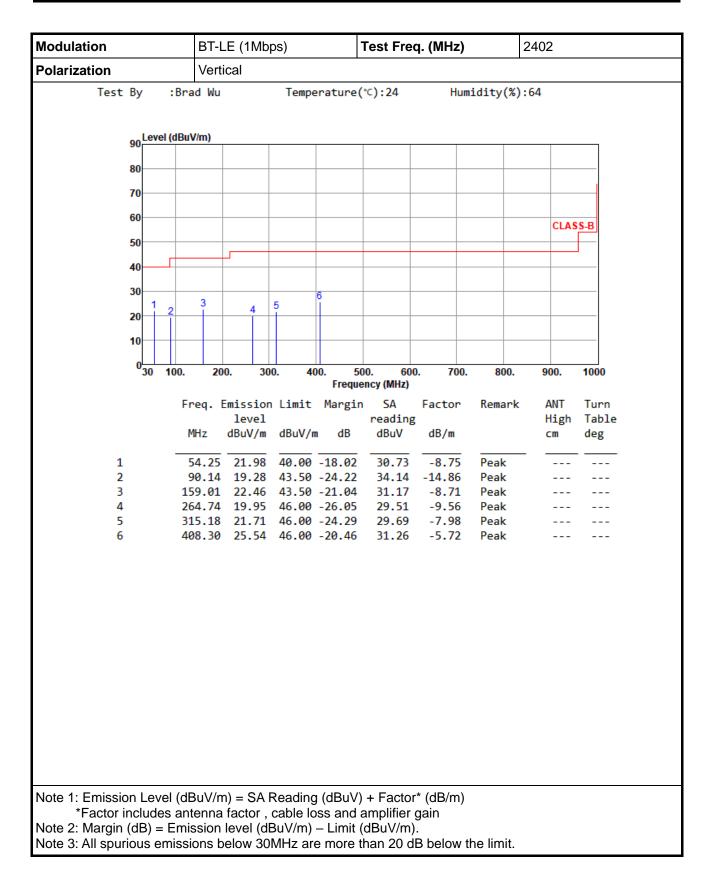




Test By :Brad 90 <mark>Level (dBuV/r</mark>	Horizontal	BT-LE (1Mbps) Test Freq. (MHz) 2402							
90 Level (dBuV/r									
		Temperature(℃):24	Hum	idity(%):6	5			
	m)								
80						CLAS	<u>S-B</u>		
70									
60						ASS-B (A	MG		
50 2	4								
40		5							
	3								
30									
20									
10									
0 1000 400	00. 6000. 8000). 14000. 10 ency (MHz)	6000. 180	00. 20000. 2	2000.	25000		
Fre	q. Emission L			Factor	Remark	ANT	Turn		
	level	_	reading			High	Table		
MH	lz dBuV/m d	BuV/m dB	dBuV	dB/m		CM	deg		
1 2390	.00 38.71 5	4.00 -15.29	41.46	-2.75	Average	117	190		
		4.00 -22.59	54.16	-2.75	Peak	117	190		
	.00 35.34 5 .00 46.95 7		31.21 42.82	4.13 4.13	Average Peak	100 100	114 114		
5 12010	.00 44.00 5			13.62	Average	100	24		
6 12010	.00 57.12 7	4.00 -16.88	43.50	13.62	Peak	100	24		

Unwanted Emissions (Above 1GHz)



lodulation			BT-LI	BT-LE (1Mbps) Test Freq. (MHz) 2402 Vertical							
olarization			Vertic	al							
Test	-	:Bra			Tempe	≥rature	(℃):24	Hur	midity(%)	:65	
	90 Leve	l (dBuV	<u>/m)</u>								
	80									CLAS	C D
	70		<u> </u>							CLAS	
	60					6					
	50	2	<u> </u>							CLASS-B (A	₩G)
			4			5					
	40		3								
	30										
	20										
	10	-									
	0 <mark></mark>	4	00. 6	000. 80	00 100	00 1200	0 14000	16000. 180	00 20000	22000	25000
						Frequ	iency (MHz)			
		Fre	eq. Er	mission level	Limit	Margi	n SA readir	Factor	Remark	ANT High	Turn Table
		M	Hz o	dBuV/m	dBuV/r	m dB	dBuV	dB/m		cm	deg
1		230	0 00	38 3/	54 00	15 66	41.00	2 75	Avonad		213
2			0.00	51.15	74.00	-22.85	53.96		Peak	274	213
3			4.00						Average		125
5						-10.18					
6		1201	0.00	57.68	74.00	-16.32	44.06	5 13.62	Peak	100	15
3 4 5		239 480 480 1201	4.00 4.00 0.00	51.15 34.21 45.76 43.82	74.00 54.00 74.00 54.00	-19.79 -28.24 -10.18	53.90 30.08 41.63 30.20	 -2.75 4.13 4.13 13.62 	Averago Peak Averago	274 e 100 100 e 100	213 125 125 15




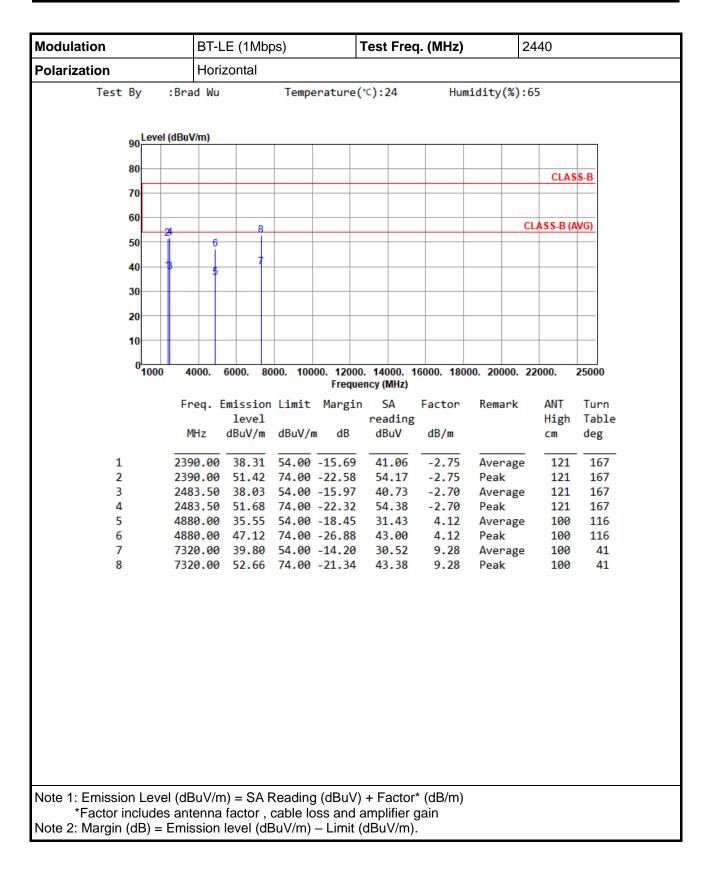



lation	BT-	BT-LE (1Mbps) Test Freq. (MHz) 2440 Vertical							
ization	Ver	ical							
	:Brad Wu		Tempe	erature(℃):24	Hum	idity(%):6	5	
90 Level	(dBuV/m)								
80									
								CLAS	6 <u>S-B</u>
70									
60		8						ASS-B (A	WG
50	¢ 6							-N-3-5-0 (r	
	ļÎ								
40	5								
30									
20									
10									
0 <mark></mark> 1000	4000.	6000. 80	000. 100	00. 12000	. 14000. 1	6000. 180	00. 20000. 2	2000.	25000
					ncy (MHz)				
	Freq.	Emission	Limit	Margin		Factor	Remark	ANT	Turn
		level		10	reading			High	Table
	MHz	dBuV/m	aBuv/r	n dB	dBuV	dB/m		cm	deg
1	2390.00	38.31	54.00	-15.69	41.06	-2.75	Average	276	215
2	2390.00			-22.54	54.21	-2.75	Peak	276	215
3	2483.50			-15.97	40.73	-2.70	Average	276	215
4 5	2483.50	50.94 34.40		-23.06	53.64 30.28	-2.70 4.12		276 103	215 127
6		45.82			41.70	4.12		103	
7	7320.00			-14.54		9.28	Average	100	44
8	7320.00	53.10	74.00	-20.90	43.82	9.28	Peak	100	44



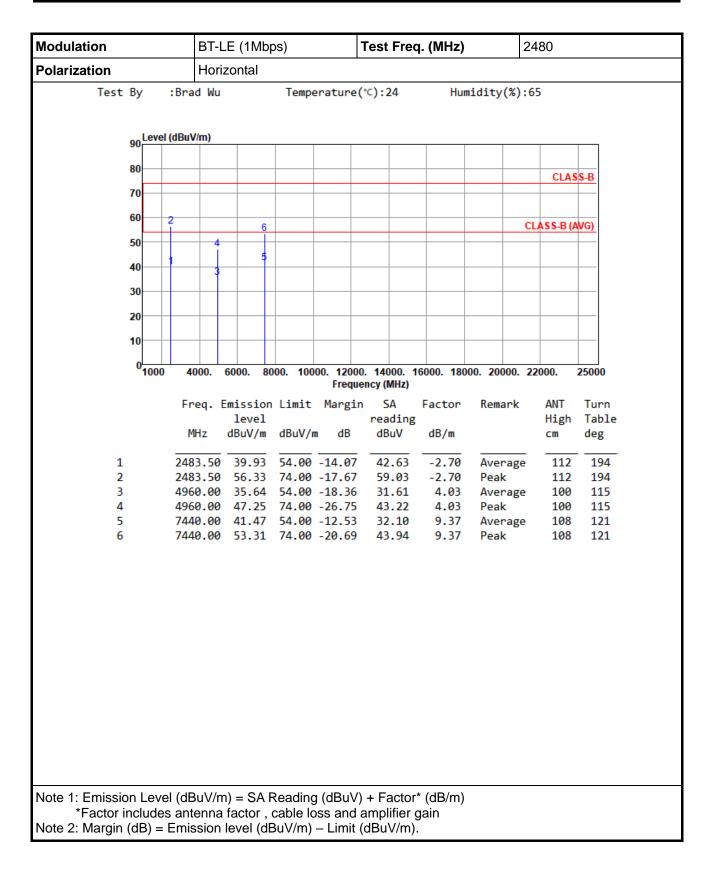




lodulation		BT	BT-LE (1Mbps) Test Freq. (MHz) 2480							
olarization		Ver	tical							
Test B	-	:Brad Wu	I	Temp	erature	(℃):24	Hun	nidity(%):	55	
9	0 Level	(dBuV/m)								
8	0									
7									CLAS	<u>SS-B</u>
6		2	6					C	LASS-B (A	WG)
5	0									
4	0		5							
3	0									
2	0									
1	0									
	0 <mark>1000</mark>	4000.	6000. 8	000. 100		0. 14000. 1 ency (MHz)	16000. 180	00. 20000. 2	2000.	25000
		Freq.	Emissio	n Limit			Factor	Remark	ANT	Turn
			level		101.811	reading		richidr it	High	
		MHz	dBuV/m	dBuV/r	n dB	dBuV	dB/m		cm	deg
1		2483 50	39.34	54 00	-14 66	42.04	-2.70	Average	253	214
2		2483.50		74.00			-2.70	Peak	253	214
3		4960.00		54.00			4.03	Average	101	125
4 5) 45.94) 39.80				4.03 9.37		101 100	125 26
6			52.63				9.37	Peak	100	26




Configuration 1: Charging mode


Unwanted Emissions (Below 1GHz)

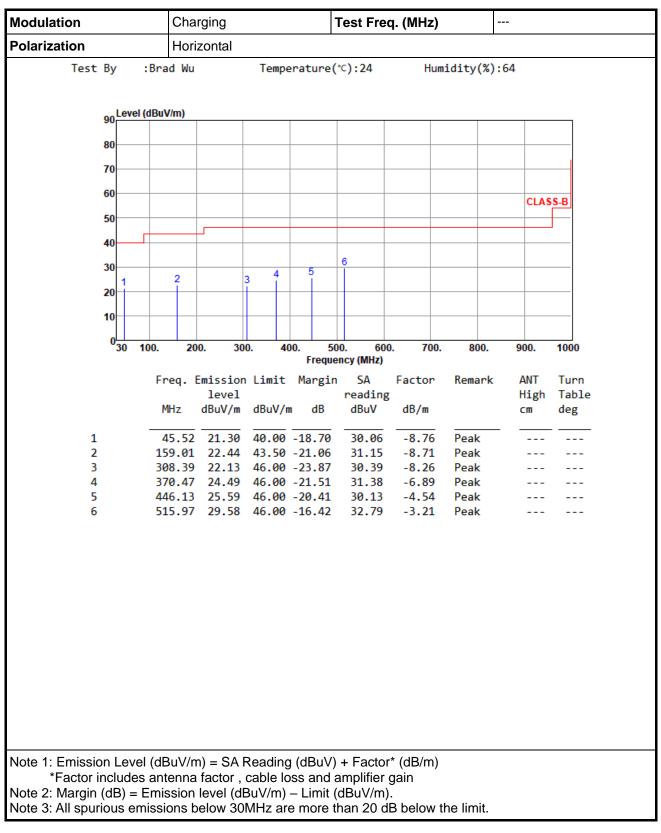




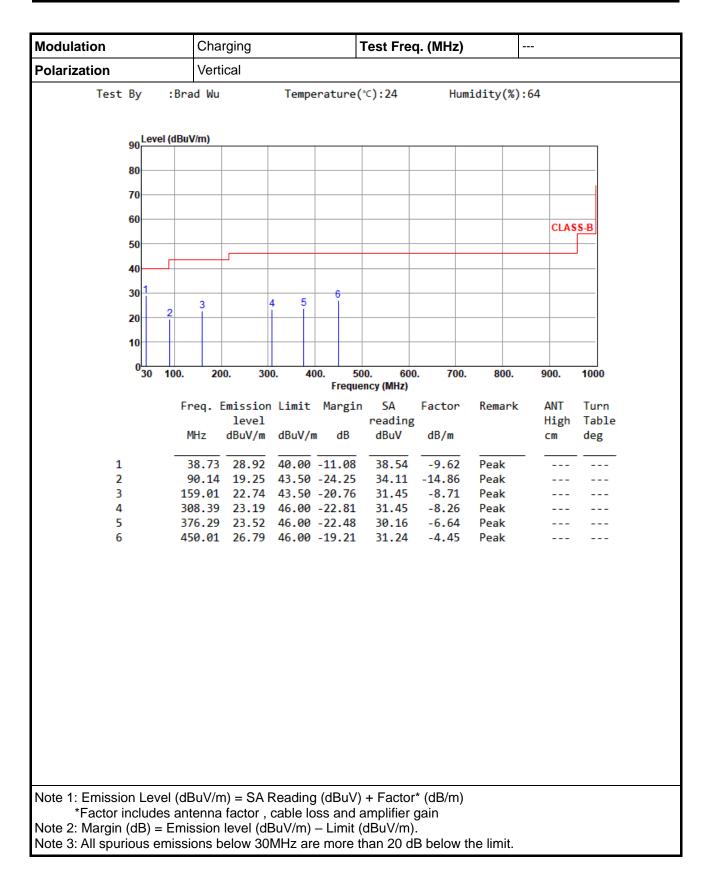




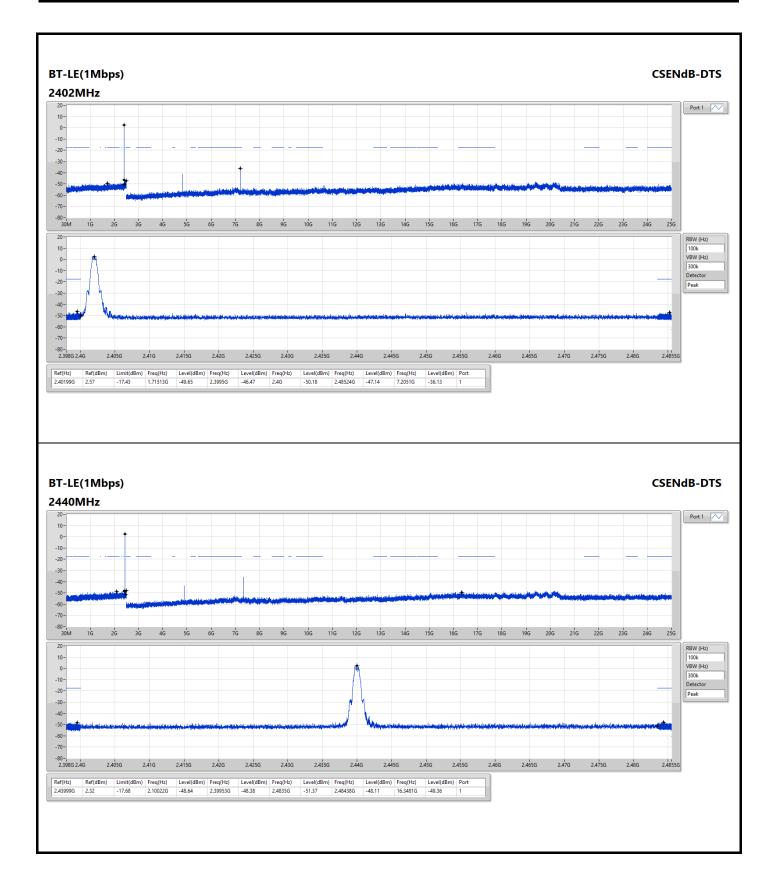



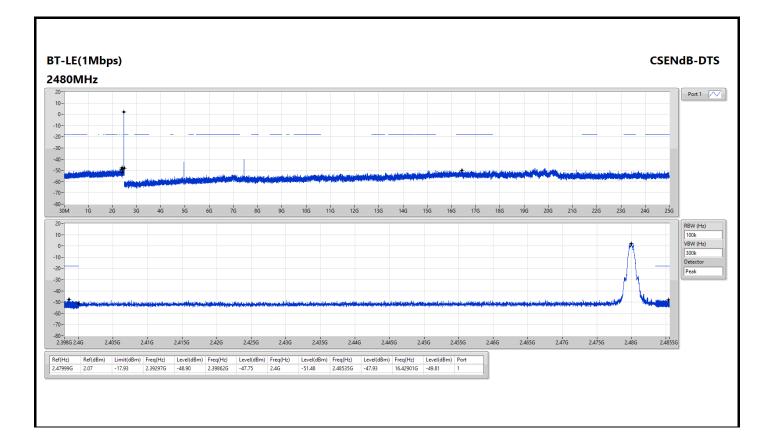



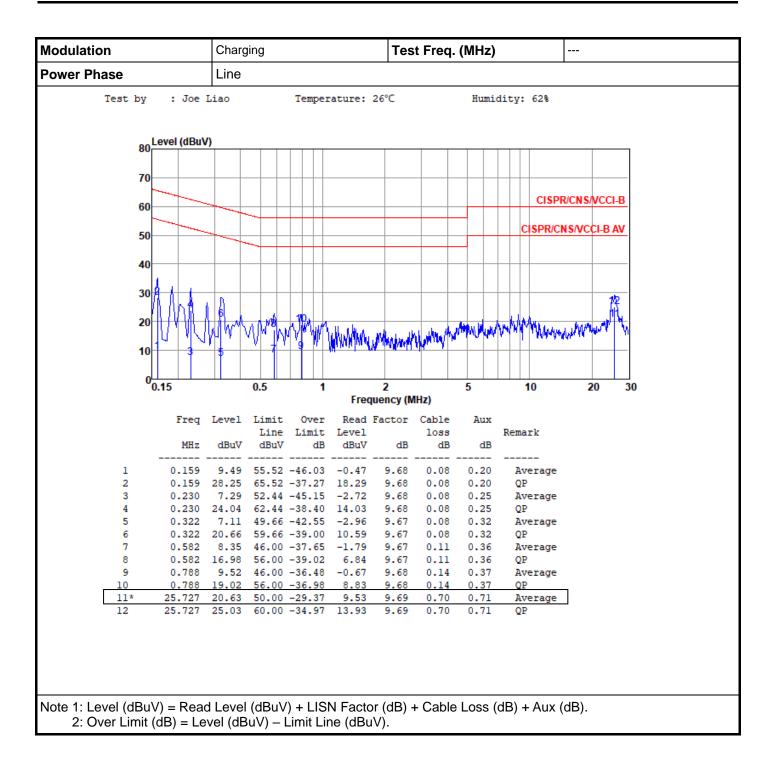



Appendix F

