

System Check_Head_13MHz

DUT: CLA13-1022

Communication System: CW; Frequency: 13 MHz; Duty Cycle: 1:1

Medium: HSL_13_230920 Medium parameters used : $f = 13 \text{ MHz}$; $\sigma = 0.726 \text{ S/m}$; $\epsilon_r = 54.331$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.4 \text{ }^\circ\text{C}$; Liquid Temperature : $22.4 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(18.04, 18.04, 18.04) @ 13 MHz; Calibrated: 2023/5/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn656; Calibrated: 2023/1/23
- Phantom: ELI V8.0 (20deg probe tilt); Type: QD OVA 004 Ax; Serial: 2055
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Pin=1000mW/Area Scan (81x81x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.803 W/kg


Pin=1000mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 32.82 V/m ; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.993 W/kg

SAR(1 g) = 0.536 W/kg ; SAR(10 g) = 0.334 W/kg

Maximum value of SAR (measured) = 0.792 W/kg

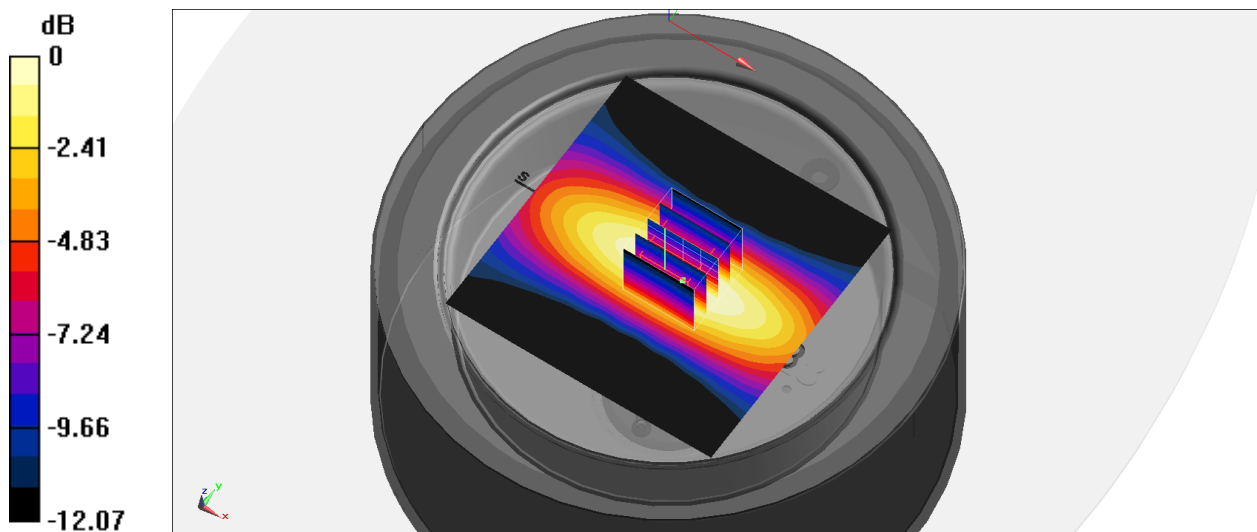

0 dB = $0.792 \text{ W/kg} = -1.01 \text{ dBW/kg}$