



Engineering Solutions & Electromagnetic Compatibility Services

**FCC Part 15.247 Certification Application Report**

<b>Test Lab:</b> Rhein Tech Laboratories, Inc. Phone: 703-689-0368 360 Herndon Parkway Fax: 703-689-2056 Suite 1400 www.rheintech.com Herndon, VA 20170 E-Mail: atcbinfo@rheintech.com		<b>Applicant:</b> Garmin International Inc. 1200 E. 151 <sup>st</sup> Street Olathe, Kansas 66062	
<b>FCC ID</b>	IPH-A3405	<b>Test Report Date</b>	August 18, 2018
<b>Platform</b>	N/A	<b>RTL Work Order #</b>	2018134
<b>Model #</b>	AA3405	<b>RTL Quote #</b>	QRTL18-134A
<b>American National Standard Institute</b>	ANSI C63.10-2013 American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices		
<b>FCC Classification</b>	DTS – Part 15 Digital Transmission System (ANT+, BLE portion)		
<b>FCC Rule Part</b>	Part 15.247: Operation within the bands 920-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz (10/01/17)		
<b>Digital Interface Information</b>	Digital Interface was found to be compliant		
<b>Frequency Range (MHz)</b>	<b>Output Power (W)</b>	<b>Frequency Tolerance</b>	<b>Emission Designator</b>
2402-2480	0.013	N/A	N/A

I, the undersigned, hereby declare that the equipment tested and referenced in this report conforms to the identified standard(s) as described in this test report. No modifications were made to the equipment during testing in order to achieve compliance with these standards. Furthermore, there was no deviation from, additions to, or exclusions from, the applicable parts of FCC Part 2, FCC Part 15, and ANSI C63.10.

Signature: 

Date: August 18, 2018

Typed/Printed Name: Desmond A. Fraser

Position: President

*This report may not be reproduced, except in full, without the written approval of Rhein Tech Laboratories, Inc. and Garmin International Inc. The test results relate only to the item(s) tested.*

*These tests are accredited and meet the requirements of ISO/IEC 17025 as verified by ANAB.  
Refer to certificate and scope of accreditation AT-1445.*

## Table of Contents

1	General Information.....	5
1.1	Scope .....	5
1.2	Description of EUT .....	5
1.3	Test Facility.....	5
1.4	Related Submittal(s)/Grant(s) .....	5
1.5	Modifications.....	5
2	Test Information .....	6
2.1	Description of Test Modes.....	6
2.2	Exercising the EUT .....	6
2.3	Test Result Summary.....	6
2.4	Test System Details.....	6
2.5	Configuration of Tested System .....	7
3	AC Conducted Emissions - FCC 15.207 .....	8
3.1	Site and Test Description .....	8
3.2	Test Limits .....	8
3.3	Measurement Uncertainty .....	8
3.4	Conducted Emissions Test Data .....	8
4	Radiated Emissions – FCC 15.209 .....	12
4.1	Limits of Radiated Emissions Measurement .....	12
4.2	Radiated Emissions Measurement Test Procedure .....	12
4.3	Measurement Uncertainty .....	12
4.4	Radiated Emissions Test Data .....	13
5	6 dB Bandwidth – FCC 15.247(a)(2) .....	17
5.1	6 dB Bandwidth Test Procedure.....	17
5.2	Test Limits .....	17
5.3	Measurement Uncertainty .....	17
5.4	6 dB Bandwidth Test Data.....	17
6	Maximum Peak Output Power – FCC 15.247(b)(3) .....	22
6.1	Max Peak OP Test Procedure.....	22
6.2	Test Limits .....	22
6.3	Measurement Uncertainty .....	22
6.4	Max Peak OP Test Data.....	22
7	Antenna Conducted Spurious Emissions – FCC 15.247(d).....	24
7.1	Antenna Conducted Spurious Emissions Test Procedures .....	24
7.2	Measurement Uncertainty .....	24
7.3	Antenna Conducted Spurious Emissions Test Data.....	24
8	Compliance with the Band Edge – FCC 15.247(d) .....	25
8.1	Band Edge Test Procedure .....	25
8.2	Test Limits .....	25
8.3	Measurement Uncertainty .....	25
8.4	Restricted Band Edge Test Data .....	25
8.4.1	Lower Band Edge.....	26
8.4.2	Upper Band Edge.....	28
9	Power Spectral Density – FCC 15.247€.....	31
9.1	Power Spectral Density Test Procedure .....	31
9.2	Test Limits .....	31
9.3	Measurement Uncertainty .....	31
9.4	Power Spectral Density Test Data.....	31
10	Conclusion .....	35

## Figure Index

Figure 2-1:	Configuration of System Under Test .....	7
-------------	--	---

## Table Index

Table 2-1:	Channels Tested for ANT+ .....	6
Table 2-2:	Channels Tested for BLE .....	6
Table 2-3:	Test Result Summary .....	6
Table 2-4:	Equipment Under Test .....	7
Table 3-1:	Conducted Emissions Limits .....	8
Table 3-2:	Conducted Emissions Environmental Condition .....	8
Table 3-3:	Conducted Emissions Test Equipment .....	11
Table 4-1:	Radiated Emissions Limits .....	12
Table 4-2:	Radiated Emissions Environmental Condition .....	13
Table 4-3:	Radiated Emissions Harmonics/Spurious – 2402 MHz, ANT+, Peak Detector .....	13
Table 4-4:	Radiated Emissions Harmonics/Spurious – 2402 MHz, ANT+, Average Detector .....	13
Table 4-5:	Radiated Emissions Harmonics/Spurious – 2440 MHz, ANT+, Peak Detector .....	13
Table 4-6:	Radiated Emissions Harmonics/Spurious – 2440 MHz, ANT+, Average Detector .....	13
Table 4-7:	Radiated Emissions Harmonics/Spurious – 2480 MHz, ANT+, Peak Detector .....	14
Table 4-8:	Radiated Emissions Harmonics/Spurious – 2480 MHz, ANT+, Average Detector .....	14
Table 4-9:	Radiated Emissions Harmonics/Spurious – 2402 MHz, BLE, Peak Detector .....	14
Table 4-10:	Radiated Emissions Harmonics/Spurious – 2402 MHz, BLE, Average Detector .....	14
Table 4-11:	Radiated Emissions Harmonics/Spurious – 2440 MHz, BLE, Peak Detector .....	15
Table 4-12:	Radiated Emissions Harmonics/Spurious – 2440 MHz, BLE, Average Detector .....	15
Table 4-13:	Radiated Emissions Harmonics/Spurious – 2480 MHz, BLE, Peak Detector .....	15
Table 4-14:	Radiated Emissions Harmonics/Spurious – 2480 MHz, BLE, Average Detector .....	15
Table 4-15:	Radiated Emissions Test Equipment .....	16
Table 5-1:	6 dB BW Limit .....	17
Table 5-2:	6 dB BW Environmental Condition .....	17
Table 5-3:	6 dB BW – ANT+ .....	17
Table 5-4:	6 dB BW – BLE .....	17
Table 5-5:	6 dB BW Test Equipment .....	21
Table 6-1:	Max Peak OP Limit .....	22
Table 6-2:	Max Peak OP Environmental Condition .....	22
Table 6-3:	Max Peak OP – ANT+ .....	22
Table 6-4:	Max Peak OP – BLE .....	22
Table 6-5:	Max Peak OP Test Equipment .....	23
Table 7-1:	Antenna Conducted Spurious Environmental Condition .....	24
Table 7-2:	Antenna Conducted Spurious Test Equipment .....	24
Table 8-1:	Band Edge Limits .....	25
Table 8-2:	Band Edge Environmental Condition .....	25
Table 8-3:	Band Edge Test Data – ANT+ – Average .....	25
Table 8-4:	Band Edge Test Data – ANT+ – Peak .....	25
Table 8-5:	Band Edge Test Data – BLE – Average .....	26
Table 8-6:	Band Edge Test Data – BLE – Peak .....	26
Table 8-7:	Band Edge Test Equipment .....	30
Table 9-1:	PSD Limit .....	31
Table 9-2:	PSD Environmental Condition .....	31
Table 9-3:	PSD Test Data – ANT+ .....	31
Table 9-4:	PSD Test Data – BLE .....	31
Table 9-5:	PSD Test Equipment .....	35

## Plot Index

Plot 3-1:	Conducted Emissions – ANT+ – Neutral .....	9
Plot 3-2:	Conducted Emissions – ANT+ – Phase .....	9
Plot 3-3:	Conducted Emissions – BLE – Neutral .....	10
Plot 3-4:	Conducted Emissions – BLE – Phase .....	10
Plot 5-1:	6 dB BW – ANT+ – 2402 MHz .....	18
Plot 5-2:	6 dB BW – ANT+ – 2440 MHz .....	18
Plot 5-3:	6 dB BW – ANT+ – 2480 MHz .....	19
Plot 5-4:	6 dB BW – BLE – 2402 MHz .....	19
Plot 5-5:	6 dB BW – BLE – 2440 MHz .....	20
Plot 5-6:	6 dB BW – BLE – 2480 MHz .....	20
Plot 8-1:	Lower Band Edge – ANT+ – Average .....	26
Plot 8-2:	Lower Band Edge – ANT+ – Peak .....	27
Plot 8-3:	Lower Band Edge – BLE – Average .....	27
Plot 8-4:	Lower Band Edge – BLE – Peak .....	28
Plot 8-5:	Upper Band Edge – ANT+ – Average .....	28
Plot 8-6:	Upper Band Edge – ANT+ – Peak .....	29
Plot 8-7:	Upper Band Edge – BLE – Average .....	29
Plot 8-8:	Upper Band Edge – BLE – Peak .....	30
Plot 9-1:	PSD – ANT+ – 2402 MHz .....	32
Plot 9-2:	PSD – ANT+ – 2440 MHz .....	32
Plot 9-3:	PSD – ANT+ – 2480 MHz .....	33
Plot 9-4:	PSD – BLE – 2402 MHz .....	33
Plot 9-5:	PSD – BLE – 2440 MHz .....	34
Plot 9-6:	PSD – BLE – 2480 MHz .....	34

## Appendix Index

Appendix A:	RF Exposure Compliance .....	36
Appendix B:	Agency Authorization Letter .....	37
Appendix C:	FCC Confidentiality Request Letter .....	38
Appendix D:	Label and Label Location .....	39
Appendix E:	Technical Operational Description .....	40
Appendix F:	Schematics .....	41
Appendix G:	Block Diagram .....	42
Appendix H:	Manual .....	43
Appendix I:	Test Photographs .....	44
Appendix J:	External Photographs .....	47
Appendix K:	Internal Photographs .....	48

## Photograph Index

Photograph 1:	Radiated Emissions Test Setup – Front (30 MHz – 1000 MHz) .....	44
Photograph 2:	Radiated Emissions Test Setup – Rear (30 MHz – 1000 MHz) .....	44
Photograph 3:	Radiated Emissions Test Setup – Front (Above 1000 MHz) .....	45
Photograph 4:	Radiated Emissions Test Setup – Rear (Above 1000 MHz) .....	45
Photograph 5:	Conducted Emissions Test Setup .....	46

## 1 General Information

### 1.1 Scope

Applicable Standard:

FCC Part 15.247: Operation within the band 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz

### 1.2 Description of EUT

<b>Equipment Under Test</b>	Body-worn transmitter
<b>Model #</b>	AA3405
<b>Power Supply</b>	Battery operated
<b>Modulation Type</b>	ANT+: GFSK BLE: GMSK
<b>Frequency Range</b>	ANT+ and BLE: 2402 – 2480 MHz
<b>Antenna Connector Type</b>	Magnet Loop
<b>Antenna Connector</b>	Internal

### 1.3 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data is located at 360 Herndon Parkway, Suite 1400, Herndon, Virginia 20170. This site has been fully described in a report and approved by the Federal Communications Commission to perform AC line conducted and radiated emissions testing (ANSI C63.10 2013).

### 1.4 Related Submittal(s)/Grant(s)

This is an original certification application for Garmin International Inc. Model # AA3405, FCC ID: IPH-A3405.

The following grant note is requested:

The antenna used with this transmitter may transmit simultaneously with module FCC ID: 2AN5Z-001R1.

### 1.5 Modifications

No modifications were made to the equipment during testing in order to achieve compliance with these standards.

## 2 Test Information

### 2.1 Description of Test Modes

In accordance with FCC 15.31(m), and because the EUT utilizes an operating band greater than 10 MHz, the following frequencies were tested.

**Table 2-1: Channels Tested for ANT+**

Channel	Frequency (MHz)
2 (Low)	2402
40 (Mid)	2440
80 (High)	2480

**Table 2-2: Channels Tested for BLE**

Channel	Frequency (MHz)
2 (Low)	2402
40 (Mid)	2440
80 (High)	2480

### 2.2 Exercising the EUT

The EUT is a watch with touch screen capability and one manual button on the right side. The EUT was tested in all three orthogonal planes in order to determine worst-case emissions. The EUT was provided with software to continuously transmit during testing. The carrier was also checked to verify that information was being transmitted, and all modes were investigated and the worst-case mode was used for final testing. There were no deviations from the test standard(s) and/or methods. The test results reported relate only to the item tested.

### 2.3 Test Result Summary

**Table 2-3: Test Result Summary**

FCC Standard	Test	Pass/Fail or N/A
FCC 15.207	AC Power Conducted Emissions	Pass
FCC 15.209	Radiated Emissions	Pass
FCC 15.247(a)(2)	6 dB Bandwidth	Pass
FCC 15.247(b)(3)	Maximum Peak Power Output	Pass
FCC 15.247(d)	Antenna Conducted Spurious Emissions	Pass
FCC 15.247(d)	Band Edge Measurement	Pass
FCC 15.247(e)	Power Spectral Density	Pass


### 2.4 Test System Details

The test sample was received on July 16, 2018. The FCC identifiers for all applicable equipment, plus descriptions of all cables used in the tested system, are identified in the following tables.

**Table 2-4: Equipment Under Test**

Part	Manufacturer	Model #	Serial Number	FCC ID	Cable Description	RTL Bar Code
Body-worn transmitter (radiated testing)	Garmin International Inc.	AA3405	N/A	IPH-A3405	N/A	23067
Body-worn transmitter (conducted testing)	Garmin International Inc.	AA3405	N/A	IPH-A3405	N/A	23068

## 2.5 Configuration of Tested System

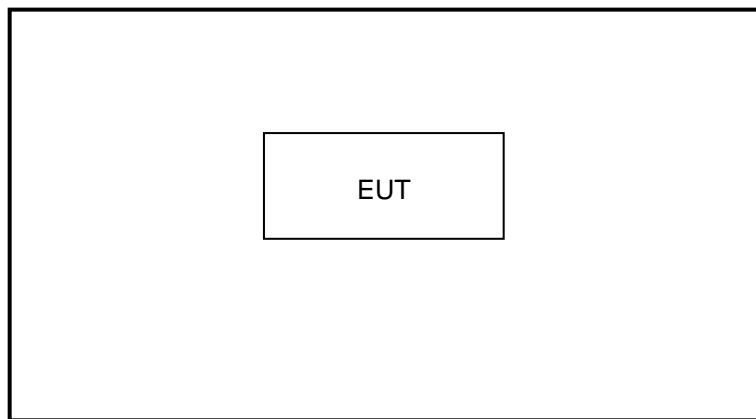

**Figure 2-1: Configuration of System Under Test**

### 3 AC Conducted Emissions - FCC 15.207

#### 3.1 Site and Test Description

The power line conducted emissions measurements were performed in a Series 81 type shielded enclosure manufactured by Rayproof. The EUT was assembled on a wooden table 80 centimeters high. Power was fed to the EUT through a 50-ohm/50 microhenry Line Impedance Stabilization Network (LISN). The EUT LISN was fed power through an A.C. filter box on the outside of the shielded enclosure. The filter box and EUT LISN housing are bonded to the ground plane of the shielded enclosure. A second LISN, the peripheral LISN, provides isolation for the EUT test peripherals. This peripheral LISN was also fed A.C. power. A metal power outlet box, which is bonded to the ground plane and electrically connected to the peripheral LISN, powers the EUT host peripherals.

The spectrum analyzer was connected to the AC line through an isolation transformer. The 50-ohm output of the EUT LISN was connected to the spectrum analyzer input through a Solar 100 kHz high-pass filter. The filter is used to prevent overload of the spectrum analyzer from noise below 100 kHz. Conducted emission levels were measured on each current-carrying line with the spectrum analyzer operating in the CISPR quasi-peak mode (or peak mode if applicable).

The analyzer's 6 dB bandwidth was set to 9 kHz. Video filter less than 10 times the resolution bandwidth is not used. Average measurements are performed in linear mode using a 10 kHz resolution bandwidth, a 1 Hz video bandwidth, and by increasing the sweep time in order to obtain a calibrated measurement. The emission spectrum was scanned from 150 kHz to 30 MHz. The highest emission amplitudes relative to the appropriate limits were measured and have been recorded.

#### 3.2 Test Limits

Table 3-1: Conducted Emissions Limits

Line-Conducted Emissions		
Limit (dB $\mu$ V)		
Frequency (MHz)	Quasi-Peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5.00	56	46
5.00 to 30.00	60	50

#### 3.3 Measurement Uncertainty

Measurement uncertainties shown for these tests are expanded uncertainties expressed at 95% confidence level using a coverage factor  $k = 2$ .

Conducted Emissions:  $\pm 2.5$  dB


#### 3.4 Conducted Emissions Test Data

Table 3-2: Conducted Emissions Environmental Condition


Date	Temperature (°F)	Humidity (%)	Pressure (kPa)
July 20, 2018	74.8	25	101.2




Plot 3-1: Conducted Emissions – ANT+ – Neutral

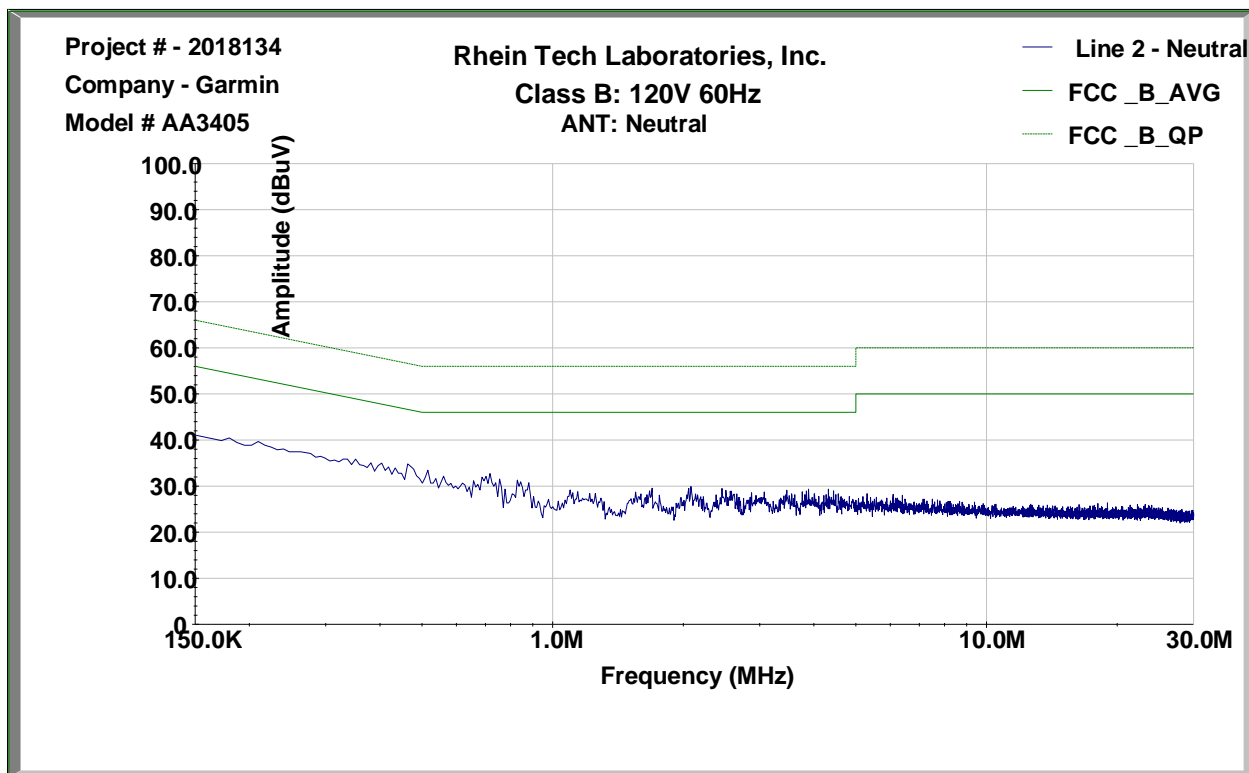


Plot 3-2: Conducted Emissions – ANT+ – Phase

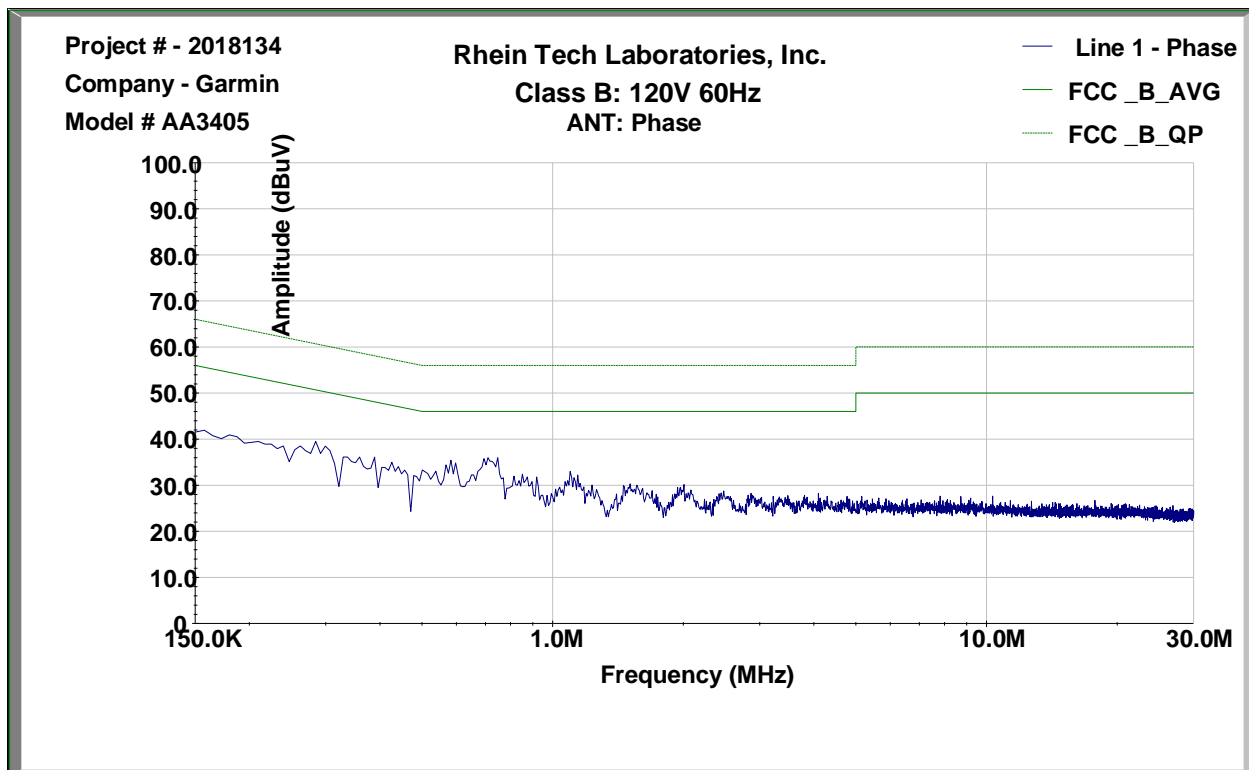

Plot 3-3: Conducted Emissions – BLE – Neutral

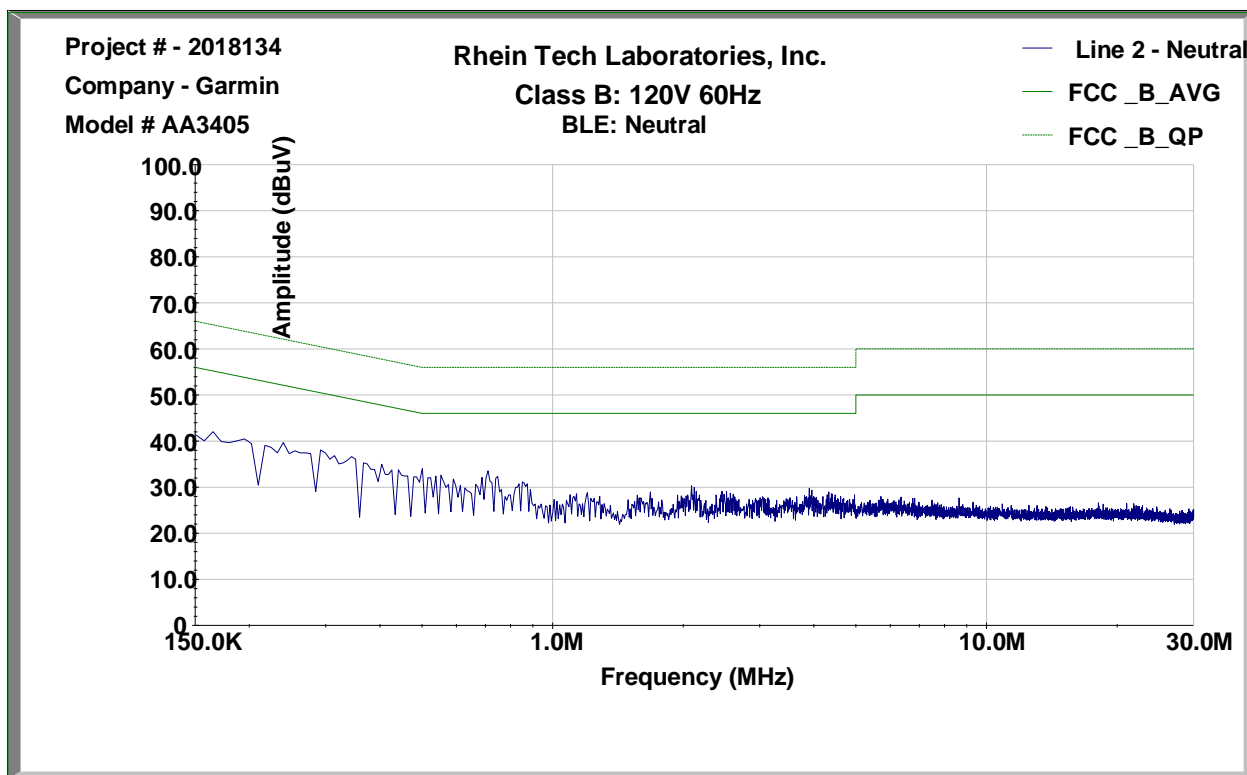

Plot 3-4: Conducted Emissions – BLE – Phase

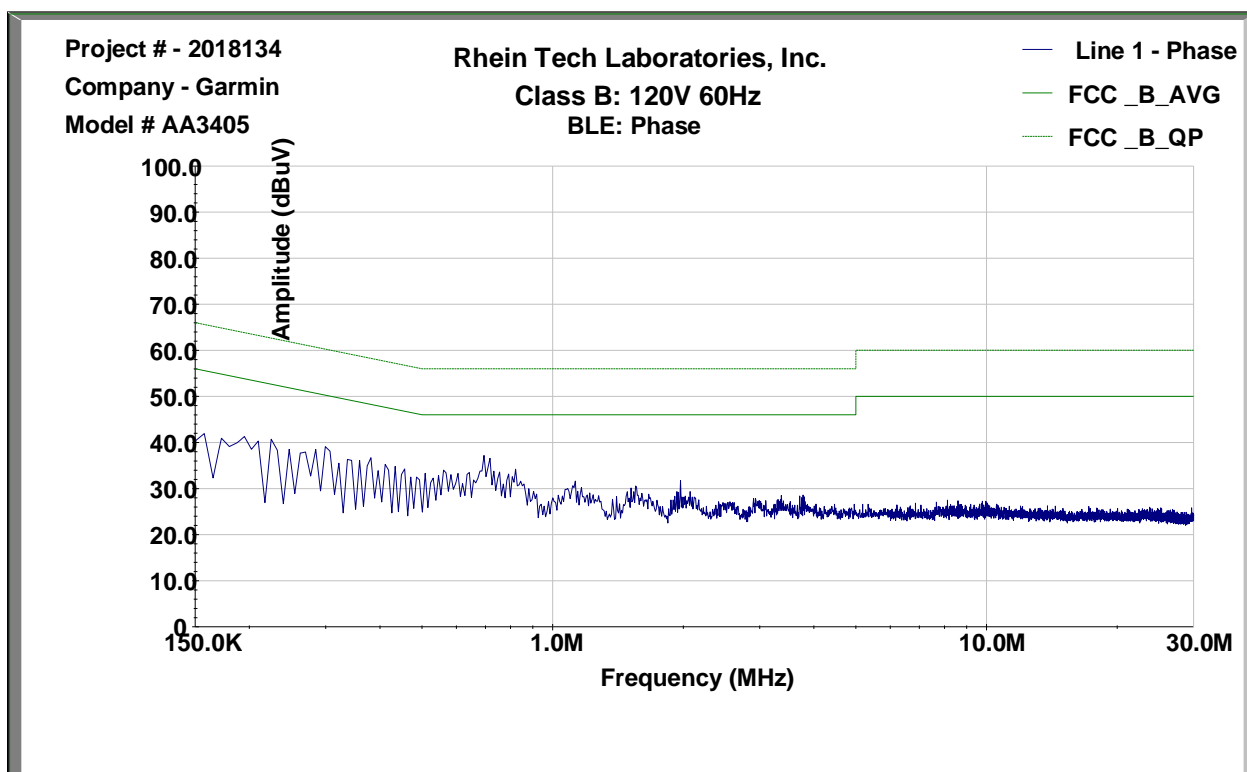

**Result: Pass**

**Table 3-3: Conducted Emissions Test Equipment**

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
900339	Hewlett Packard	85650A	Quasi-Peak Adapter (30 Hz – 1 GHz)	2521A00743	4/26/19
900968	Hewlett Packard	8567A	Spectrum Analyzer (10 kHz – 1.5 GHz)	2602A00160	4/26/19
900970	Hewlett Packard	85662A	Spectrum Analyzer Display	2542A11239	4/26/19
901082	AFJ International	LS16	16A LISN	16010020081	2/13/21
Test Software	Quantum Change	TILE!7	TILE! Test Software	7.1.3.20	N/A

**Test Personnel:**

Khue N. Do		July 20, 2018
EMC Test Engineer	Signature	Date of Test

## 4 Radiated Emissions – FCC 15.209

### 4.1 Limits of Radiated Emissions Measurement

Table 4-1: Radiated Emissions Limits

Frequency (MHz)	Field Strength ( $\mu\text{V/m}$ )	Measurement Distance (m)
0.009-0.490	2400/f (kHz)	300
0.490-1.705	2400/f (kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

As shown in 15.35(b), for frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any circumstances of modulation.

### 4.2 Radiated Emissions Measurement Test Procedure

Before final measurements of radiated emissions were made on the open-field three/ten meter range, the EUT was scanned indoors at one and three meter distances. This was done in order to determine its emissions spectrum signature. The physical arrangement of the test system and associated cabling was varied in order to determine the effect on the EUT's emissions in amplitude, direction and frequency. This process was repeated during final radiated emissions measurements on the open-field range, at each frequency, in order to ensure that maximum emission amplitudes were attained.

Final radiated emissions measurements were made on the three/ten-meter, open-field test site. The EUT was placed on a nonconductive turntable 0.8 meters above the ground plane. The spectrum was examined from 9 kHz to the 10<sup>th</sup> harmonic of the highest fundamental transmitter frequency (135.6 MHz).

At each frequency, the EUT was rotated 360°, and the antenna was raised and lowered from 1 to 4 meters in order to determine the emission's maximum level. Measurements were taken using both horizontal and vertical antenna polarizations. For frequencies between 30 MHz and 1000 MHz, the spectrum analyzer's 6 dB bandwidth was set to 120 kHz, and the analyzer was operated in the CISPR quasi-peak detection mode. For emissions above 1000 MHz, emissions are measured using the average detector function with a minimum resolution bandwidth of 1 MHz. No video filter less than 10 times the resolution bandwidth was used. The highest emission amplitudes relative to the appropriate limit were measured and recorded in this report.

### 4.3 Measurement Uncertainty

Measurement uncertainties shown for these tests are expanded uncertainties expressed at 95% confidence level using a coverage factor  $k = 2$ .

Radiated Emissions:  $\pm 4.6$  dB

#### 4.4 Radiated Emissions Test Data

Based on manufacturer's statement, the maximum duty cycle is 8%.

Average measurements were corrected from the raw peak measurements with the following formula below:

$$\text{Average} = \text{Peak} + (20 * \log(\text{Duty Cycle})) \quad \text{Average} \approx \text{Peak} - 21.9 \text{ dB}$$

**Table 4-2: Radiated Emissions Environmental Condition**

Date	Temperature (°F)	Humidity (%)	Pressure (kPa)
July 27, 2018	85.2	92	99.8

**Table 4-3: Radiated Emissions Harmonics/Spurious – 2402 MHz, ANT+, Peak Detector**

Emission Frequency (MHz)	Analyzer Reading (dBµV/m)	Site Correction Factor (dB/m)	Corrected (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Result (Pass / Fail)
4804	56.4	0.6	57.0	74.0	-17.0	Pass
12010	36.1	8.3	44.4	74.0	-29.6	Pass
19216	28.6	16.7	45.3	74.0	-28.7	Pass

**Table 4-4: Radiated Emissions Harmonics/Spurious – 2402 MHz, ANT+, Average Detector**

Emission Frequency (MHz)	Calculated Average (dBµV/m)	Site Correction Factor (dB/m)	Corrected (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Result (Pass / Fail)
4804	34.5	0.6	35.1	54.0	-18.9	Pass
12010	14.2	8.3	22.5	54.0	-31.5	Pass
19216	6.7	16.7	23.4	54.0	-30.6	Pass

**Table 4-5: Radiated Emissions Harmonics/Spurious – 2440 MHz, ANT+, Peak Detector**

Emission Frequency (MHz)	Analyzer Reading (dBµV/m)	Site Correction Factor (dB/m)	Corrected (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Result (Pass / Fail)
4880	56.8	0.3	57.1	74.0	-16.9	Pass
7320	55.5	1.7	57.2	74.0	-16.8	Pass
12200	36.6	9.5	46.1	74.0	-27.9	Pass
19520	28.0	16.7	44.7	74.0	-29.3	Pass

**Table 4-6: Radiated Emissions Harmonics/Spurious – 2440 MHz, ANT+, Average Detector**

Emission Frequency (MHz)	Calculated Average (dBµV/m)	Site Correction Factor (dB/m)	Corrected (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Result (Pass / Fail)
4880	34.9	0.3	35.2	54.0	-18.8	Pass
7320	33.6	1.7	35.3	54.0	-18.7	Pass
12200	14.7	9.5	24.2	54.0	-29.8	Pass
19520	6.1	16.7	22.8	54.0	-31.2	Pass

**Table 4-7: Radiated Emissions Harmonics/Spurious – 2480 MHz, ANT+, Peak Detector**

Emission Frequency (MHz)	Analyzer Reading (dBµV/m)	Site Correction Factor (dB/m)	Corrected (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Result (Pass / Fail)
4960	58.4	0.5	58.9	74.0	-15.1	Pass
7440	50.6	2.1	52.7	74.0	-21.3	Pass
12400	36.7	9.2	45.9	74.0	-28.1	Pass
19840	20.8	16.4	37.2	74.0	-36.8	Pass
22320	21.4	17.3	38.7	74.0	-35.3	Pass

**Table 4-8: Radiated Emissions Harmonics/Spurious – 2480 MHz, ANT+, Average Detector**

Emission Frequency (MHz)	Calculated Average (dBµV/m)	Site Correction Factor (dB/m)	Corrected (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Result (Pass / Fail)
4960	36.5	0.5	37.0	54.0	-17.0	Pass
7440	28.7	2.1	30.8	54.0	-23.2	Pass
12400	14.8	9.2	24.0	54.0	-30.0	Pass
19840	-1.1	16.4	15.3	54.0	-38.7	Pass
22320	-0.5	17.3	16.8	54.0	-37.2	Pass

**Table 4-9: Radiated Emissions Harmonics/Spurious – 2402 MHz, BLE, Peak Detector**

Emission Frequency (MHz)	Analyzer Reading (dBµV/m)	Site Correction Factor (dB/m)	Corrected (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Result (Pass / Fail)
4804	55.9	0.6	56.5	74.0	-17.5	Pass
12010	36.7	8.3	45.0	74.0	-29.0	Pass
19216	29.2	16.7	45.9	74.0	-28.1	Pass

**Table 4-10: Radiated Emissions Harmonics/Spurious – 2402 MHz, BLE, Average Detector**

Emission Frequency (MHz)	Calculated Average (dBµV/m)	Site Correction Factor (dB/m)	Corrected (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Result (Pass / Fail)
4804	34.0	0.6	34.6	54.0	-19.4	Pass
12010	14.8	8.3	23.1	54.0	-30.9	Pass
19216	7.3	16.7	24.0	54.0	-30.0	Pass

**Table 4-11: Radiated Emissions Harmonics/Spurious – 2440 MHz, BLE, Peak Detector**

Emission Frequency (MHz)	Analyzer Reading (dBµV/m)	Site Correction Factor (dB/m)	Corrected (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Result (Pass / Fail)
4880	56.1	0.3	56.4	74.0	-17.6	Pass
7320	54.4	1.7	56.1	74.0	-17.9	Pass
12200	36.3	9.5	45.8	74.0	-28.2	Pass
19520	26.7	16.7	43.4	74.0	-30.6	Pass

**Table 4-12: Radiated Emissions Harmonics/Spurious – 2440 MHz, BLE, Average Detector**

Emission Frequency (MHz)	Calculated Average (dBµV/m)	Site Correction Factor (dB/m)	Corrected (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Result (Pass / Fail)
4880	34.2	0.3	34.5	54.0	-19.5	Pass
7320	32.5	1.7	34.2	54.0	-19.8	Pass
12200	14.4	9.5	23.9	54.0	-30.1	Pass
19520	4.8	16.7	21.5	54.0	-32.5	Pass

**Table 4-13: Radiated Emissions Harmonics/Spurious – 2480 MHz, BLE, Peak Detector**

Emission Frequency (MHz)	Analyzer Reading (dBµV/m)	Site Correction Factor (dB/m)	Corrected (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Result (Pass / Fail)
4960	58.1	0.5	58.6	74.0	-15.4	Pass
7440	51.2	2.1	53.3	74.0	-20.7	Pass
12400	37.1	9.2	46.3	74.0	-27.7	Pass
19840	22.8	16.4	39.2	74.0	-34.8	Pass
22320	21.6	17.3	38.9	74.0	-35.1	Pass

**Table 4-14: Radiated Emissions Harmonics/Spurious – 2480 MHz, BLE, Average Detector**

Emission Frequency (MHz)	Calculated Average (dBµV/m)	Site Correction Factor (dB/m)	Corrected (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Result (Pass / Fail)
4960	36.2	0.5	36.7	54.0	-17.3	Pass
7440	29.3	2.1	31.4	54.0	-22.6	Pass
12400	15.2	9.2	24.4	54.0	-29.6	Pass
19840	0.9	16.4	17.3	54.0	-36.7	Pass
22320	-0.3	17.3	17.0	54.0	-37.0	Pass

**Result: Pass**

**Table 4-15: Radiated Emissions Test Equipment**

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
900321	EMCO	3161-03	Horn Antenna (4.0 – 8.2 GHz)	9508-1020	4/9/19
900323	EMCO	3160-07	Horn Antenna (8.2 – 12.4 GHz)	9605-1054	4/9/19
900356	EMCO	3160-08	Horn Antenna (12.4 – 18.0 GHz)	9607-1044	4/9/19
900772	EMCO	3161-02	Horn Antenna (2 – 4 GHz)	9804-1044	5/17/21
900791	Antenna Research Associates, Inc.	LPB-2520	Bilog Antenna (25 – 1000 MHz)	1037	10/4/20
900811	Rhein Tech Laboratories	PR-1040	Amplifier (10 MHz – 2 GHz)	1003	7/6/19
900878	Rhein Tech Laboratories	AM3-1197-0005	3 meter Antenna mast, polarizing	Outdoor Range 1	Not Required
901242	Rhein Tech Laboratories	WRT-000-0003	Wood rotating table	N/A	Not Required
901218	EMCO	3160-09	Horn Antenna (18 – 26.5 GHz)	960281-003	4/14/19
901583	Agilent Technologies	N9010A	Spectrum Analyzer (10 Hz – 26.5 GHz)	MY51250846	2/6/20
901723	Hewlett Packard	8449B	Amplifier (1 – 26.5 GHz)	3008A00762	5/22/19

**Test Personnel:**

Khue N. Do		July 27, 2018
EMC Test Engineer	Signature	Date of Test



## 5 6 dB Bandwidth – FCC 15.247(a)(2)

### 5.1 6 dB Bandwidth Test Procedure

The minimum 6 dB bandwidths per FCC 15.247(a)(2) were measured using a 50-ohm spectrum analyzer with the resolution bandwidth set at 100 kHz, and the video bandwidth set at  $\geq 3 \times \text{RBW}$ . The device was modulated. The minimum 6 dB bandwidths are presented below.

### 5.2 Test Limits

**Table 5-1: 6 dB BW Limit**

6 dB Bandwidth Limit	$\geq 500 \text{ kHz}$
----------------------	------------------------

### 5.3 Measurement Uncertainty

Measurement uncertainties shown for these tests are expanded uncertainties expressed at 95% confidence level using a coverage factor  $k = 2$ .

6 dB BW:  $\pm 1.0 \text{ dB}$

### 5.4 6 dB Bandwidth Test Data

**Table 5-2: 6 dB BW Environmental Condition**

Date	Temperature (°F)	Humidity (%)	Pressure (kPa)
July 24, 2018	75.1	25	101.1


**Table 5-3: 6 dB BW – ANT+**

Channel	Frequency (MHz)	6 dB Bandwidth (kHz)	Minimum Limit (kHz)	Pass/Fail
2	2402	513.9	500.0	Pass
40	2440	511.1	500.0	Pass
80	2480	511.1	500.0	Pass


**Table 5-4: 6 dB BW – BLE**

Channel	Frequency (MHz)	6 dB Bandwidth (kHz)	Minimum Limit (kHz)	Pass/Fail
2	2402	511.9	500.0	Pass
40	2440	514.3	500.0	Pass
80	2480	514.3	500.0	Pass


Plot 5-1: 6 dB BW – ANT+ – 2402 MHz

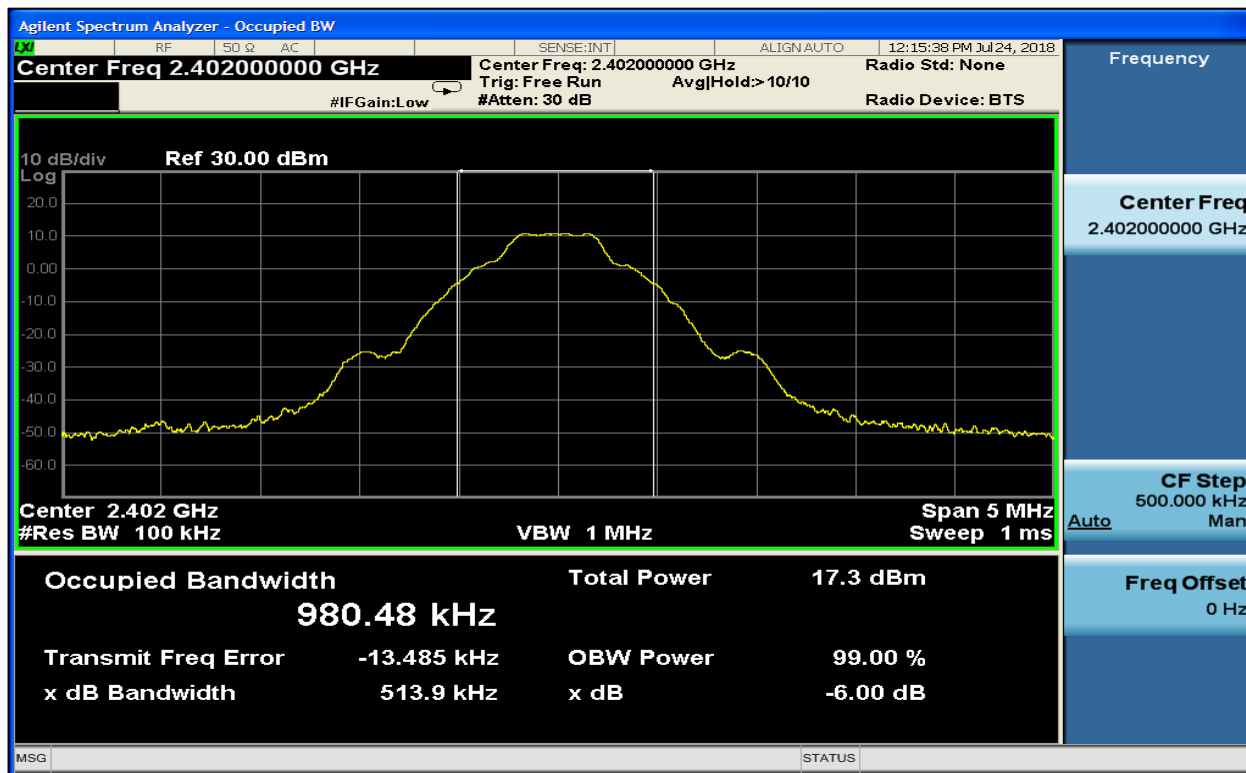


Plot 5-2: 6 dB BW – ANT+ – 2440 MHz

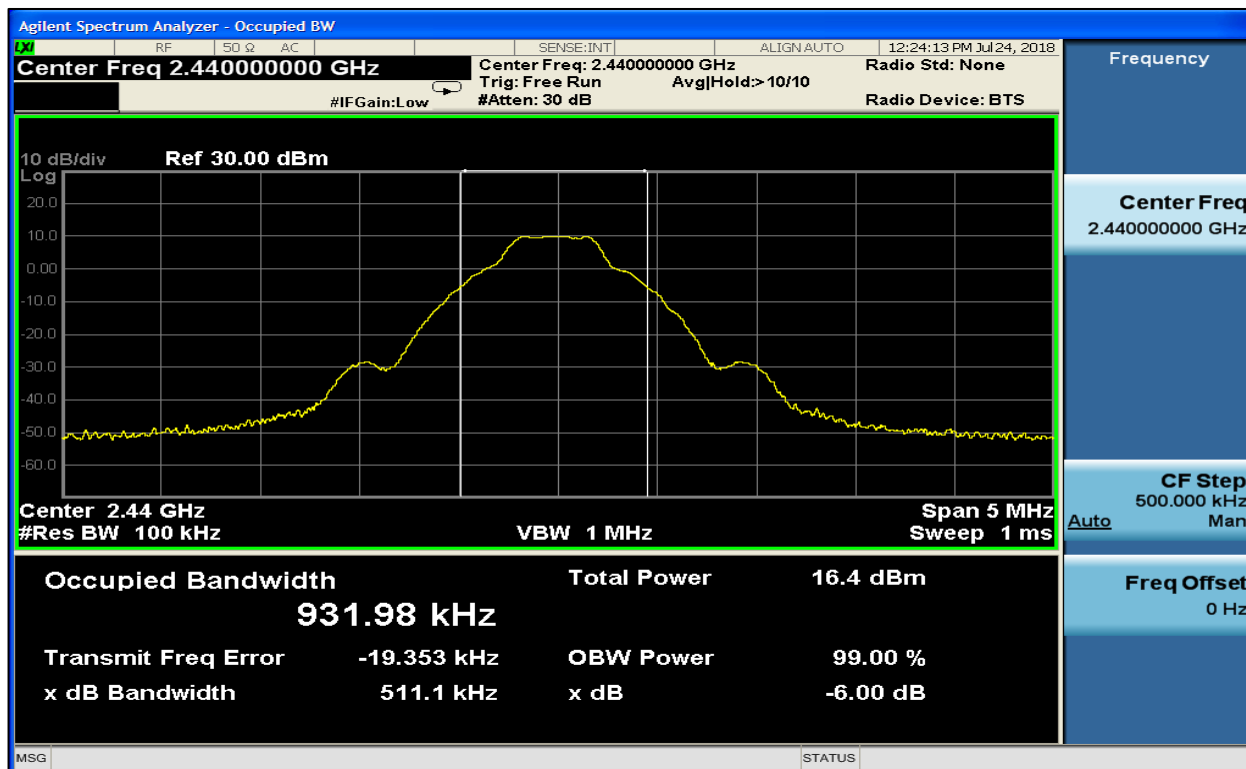


Plot 5-3: 6 dB BW – ANT+ – 2480 MHz

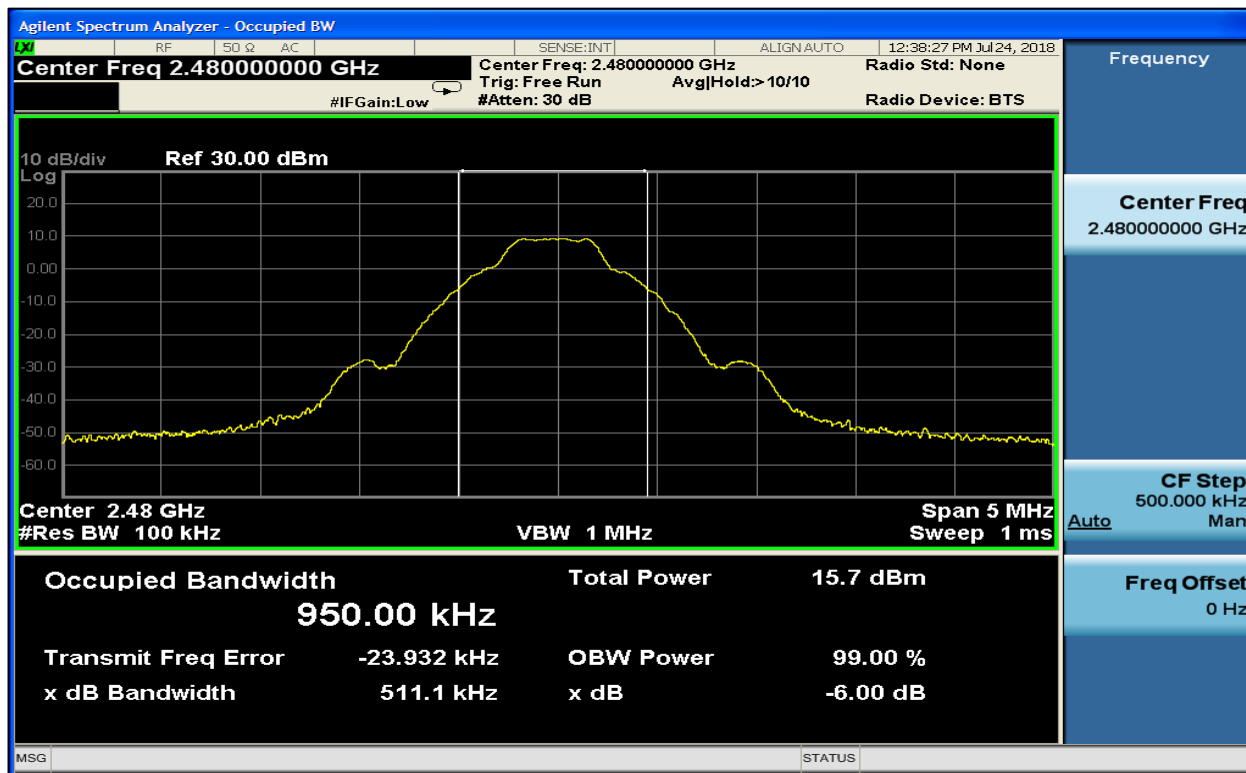


Plot 5-4: 6 dB BW – BLE – 2402 MHz

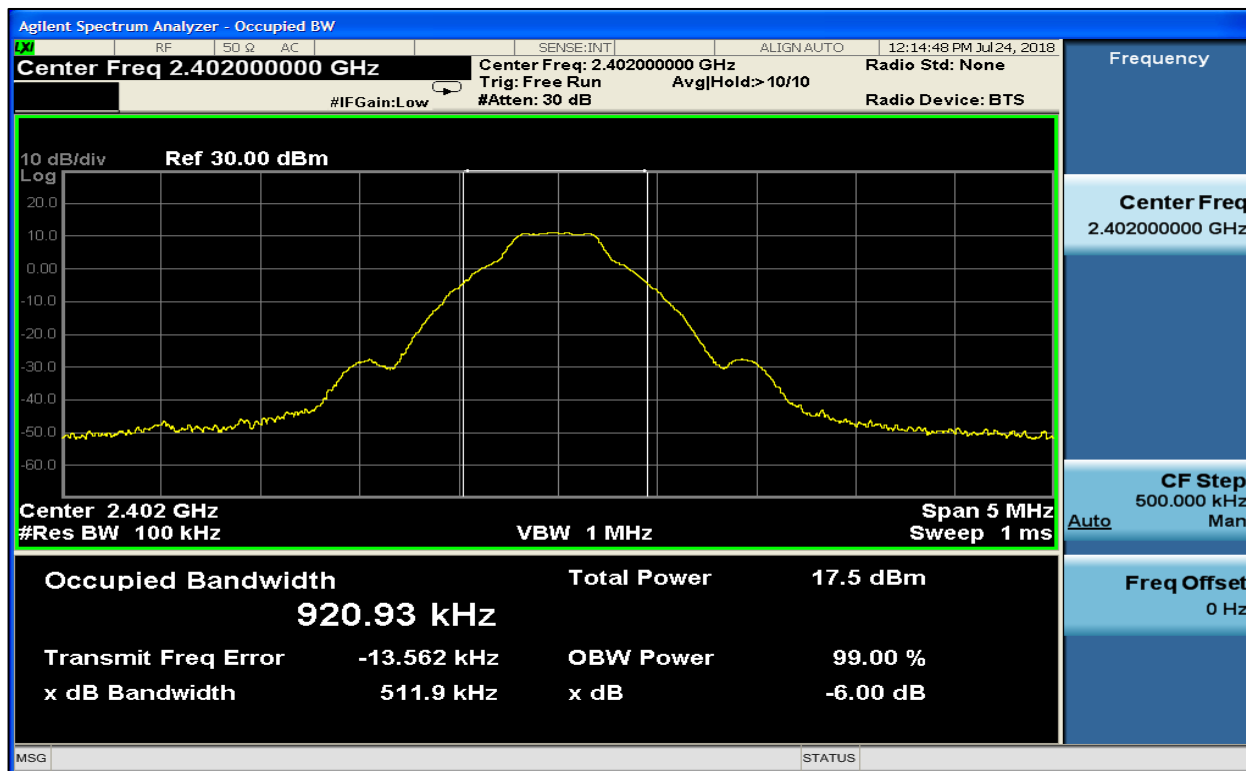

**Plot 5-5: 6 dB BW – BLE – 2440 MHz**

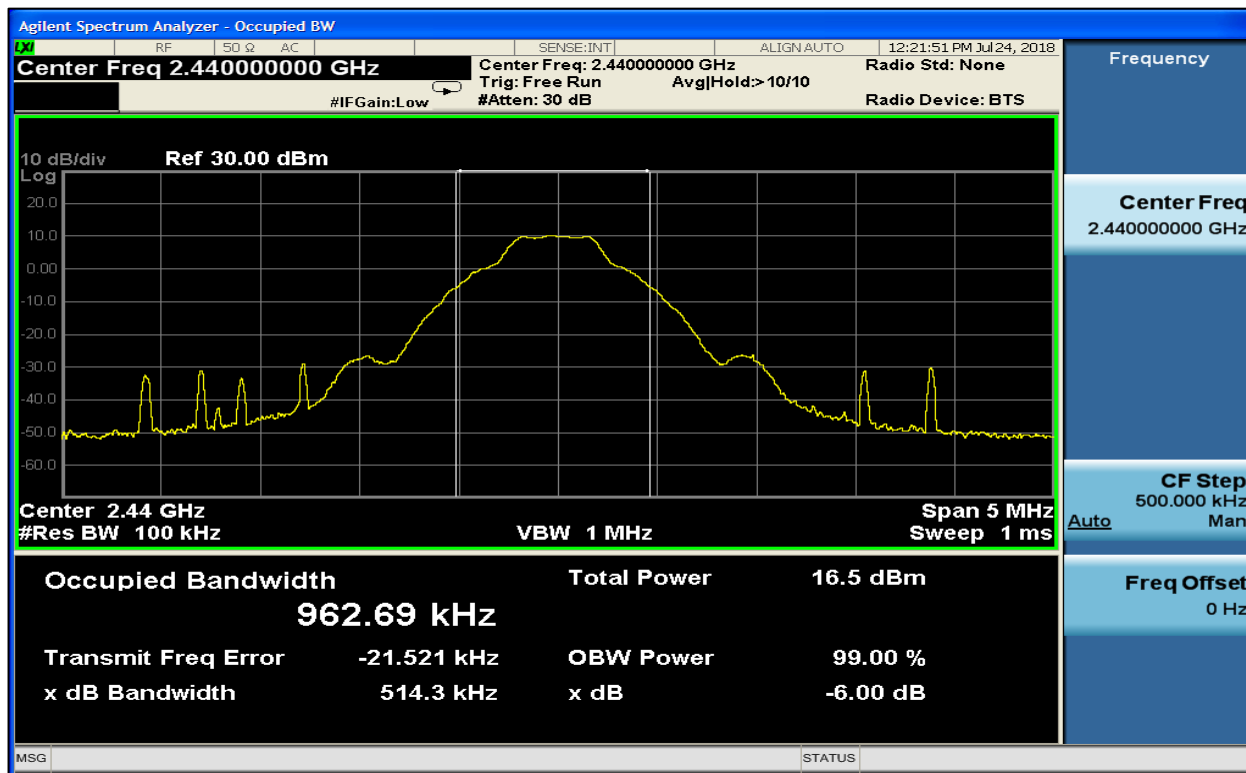

**Plot 5-6: 6 dB BW – BLE – 2480 MHz**

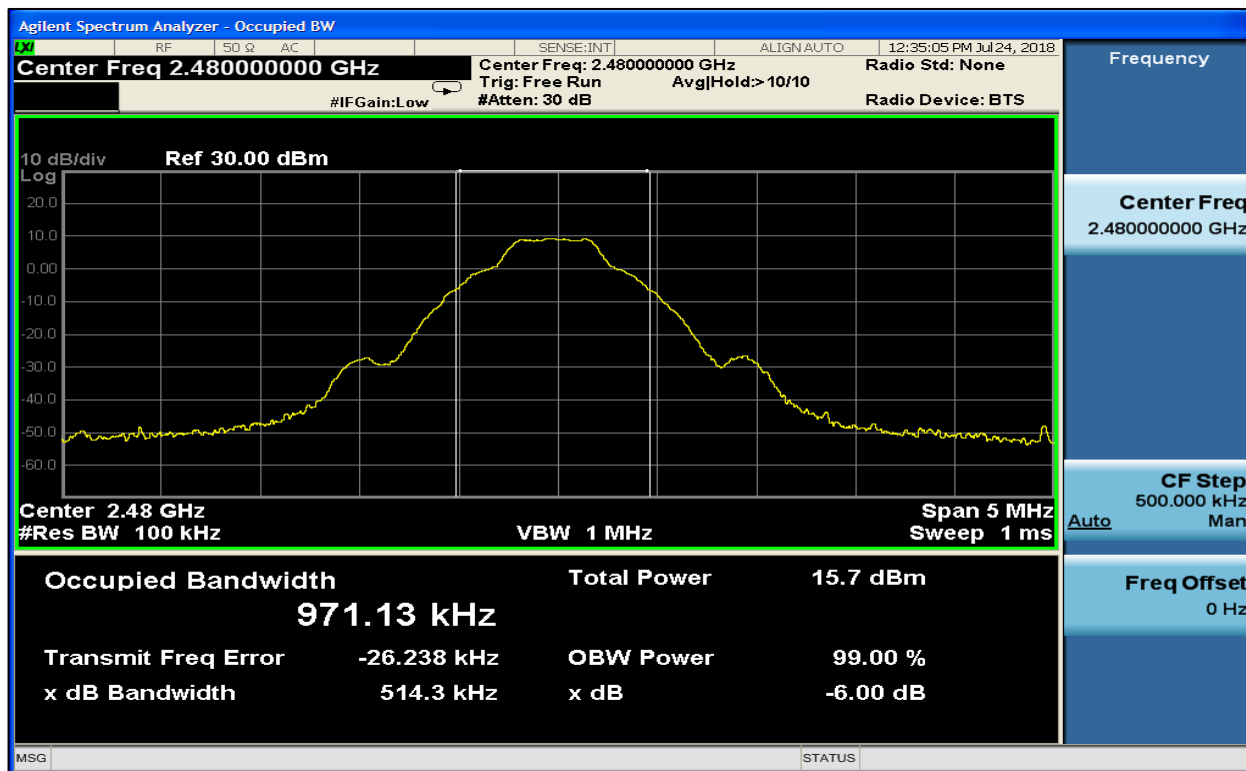

**Result: Pass**

**Table 5-5: 6 dB BW Test Equipment**

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901583	Agilent Technologies	N9010A	Spectrum Analyzer (10 Hz – 26.5 GHz)	MY51250846	2/6/20

**Test Personnel:**

Khue N. Do		July 24, 2018
EMC Test Engineer	Signature	Date of Test

## 6 Maximum Peak Output Power – FCC 15.247(b)(3)

### 6.1 Max Peak OP Test Procedure

A conducted power measurement of the EUT was taken using an Agilent N9010A EXA Signal Analyzer with a 50 ohm attenuator.

### 6.2 Test Limits

**Table 6-1: Max Peak OP Limit**

<b>Maximum Peak Output Power Limit</b>	1.0 W
--	-------

### 6.3 Measurement Uncertainty

Measurement uncertainties shown for these tests are expanded uncertainties expressed at 95% confidence level using a coverage factor  $k = 2$ .

Maximum Peak OP:  $\pm 1.0$  dB

### 6.4 Max Peak OP Test Data

**Table 6-2: Max Peak OP Environmental Condition**

Date	Temperature (°F)	Humidity (%)	Pressure (kPa)
July 24, 2018	75.0	25	101.1

**Table 6-3: Max Peak OP – ANT+**

Channel	Frequency (MHz)	Peak (dBm)	Limit (dBm)	Margin (dB)	Result (Pass / Fail)
2	2402	11.2	30.0	-18.8	Pass
40	2440	10.5	30.0	-19.5	Pass
80	2480	9.5	30.0	-20.5	Pass

**Table 6-4: Max Peak OP – BLE**

Channel	Frequency (MHz)	Peak (dBm)	Limit (dBm)	Margin (dB)	Result (Pass / Fail)
2	2402	11.2	30.0	-18.8	Pass
40	2440	10.6	30.0	-19.4	Pass
80	2480	9.5	30.0	-20.5	Pass

Note 1: 1.0 W  $\approx$  30.0 dBm      11.2 dBm  $\approx$  0.013 W

Note 2: The 10 dB attenuator has been added back into the peak.

**Result: Pass**

**Table 6-5: Max Peak OP Test Equipment**

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
900948	Weinschel Corporation	47-10-43 DC-18GHz	Attenuator, 50 W 10 dB	BH1487	9/1/18
901583	Agilent Technologies	N9010A	Spectrum Analyzer (10 Hz – 26.5 GHz)	MY51250846	2/6/20

**Test Personnel:**

Khue N. Do		July 24, 2018
EMC Test Engineer	Signature	Date of Test

## 7 Antenna Conducted Spurious Emissions – FCC 15.247(d)

### 7.1 Antenna Conducted Spurious Emissions Test Procedures

Antenna conducted spurious emissions per FCC 15.247(d) were measured from the EUT antenna port using a 50-ohm spectrum analyzer with the resolution bandwidth set at 100 kHz, and the video bandwidth set at 300 kHz. The modulated carrier was identified at the following frequencies: 2402 MHz, 2440 MHz and 2480 MHz for ANT+ and BLE modes.

### 7.2 Measurement Uncertainty

Measurement uncertainties shown for these tests are expanded uncertainties expressed at 95% confidence level using a coverage factor  $k = 2$ .

Antenna Conducted Spurious:  $\pm 1.0$  dB

### 7.3 Antenna Conducted Spurious Emissions Test Data

**Table 7-1: Antenna Conducted Spurious Environmental Condition**

Date	Temperature (°F)	Humidity (%)	Pressure (kPa)
July 25, 2018	75.0	25	101.1

No harmonics or spurs were found within 20 dB (note that powers are reported as peaks) of the carrier level from the carrier to the 10<sup>th</sup> harmonic of the carrier frequency for ANT+ and BLE modes. Per FCC 15.31(o), no data is being reported.

**Result: Pass**

**Table 7-2: Antenna Conducted Spurious Test Equipment**

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901583	Agilent Technologies	N9010A	Spectrum Analyzer (10 Hz – 26.5 GHz)	MY51250846	2/6/20

#### Test Personnel:

Khue N. Do		July 25, 2018
EMC Test Engineer	Signature	Date of Test



## 8 Compliance with the Band Edge – FCC 15.247(d)

### 8.1 Band Edge Test Procedure

The transmitter output was connected to its appropriate antenna. 1 MHz integrated peak (100 kHz RBW / 1 MHz VBW) and 1 MHz integrated average (100 MHz RBW / 1 MHz VBW) corrected measurements were taken within the restricted band to show compliance.

### 8.2 Test Limits

**Table 8-1: Band Edge Limits**

<b>Band Edge Average Limit</b>	54.0 dBμV/m
<b>Band Edge Peak Limit</b>	74.0 dBμV/m

### 8.3 Measurement Uncertainty

Measurement uncertainties shown for these tests are expanded uncertainties expressed at 95% confidence level using a coverage factor k = 2.

Band Edge: ±1.0 dB

### 8.4 Restricted Band Edge Test Data

Note: Measurements were conducted. A conversion was used to compare the measurements to radiated at 3 m.

dBm to dBμV/m at 3 m conversion:

$$\text{EIRP [dBm]} = \text{E[dB}\mu\text{V/m]} + (20 * \log(d)) - 104.77 \quad \text{where } d \text{ is } 3 \text{ m}$$

$$\text{E[dB}\mu\text{V/m]} = \text{EIRP [dBm]} + 95.23$$

**Table 8-2: Band Edge Environmental Condition**

Date	Temperature (°F)	Humidity (%)	Pressure (kPa)
July 25, 2018	75.3	25	101.1

**Table 8-3: Band Edge Test Data – ANT+ – Average**

Band Edge	Channel Power (dBm)	Channel Power (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Result (Pass / Fail)
Lower	-66.1	29.1	54.0	-24.9	Pass
Upper	-56.3	38.9	54.0	-15.1	Pass

**Table 8-4: Band Edge Test Data – ANT+ – Peak**

Band Edge	Channel Power (dBm)	Channel Power (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Result (Pass / Fail)
Lower	-55.8	39.4	74.0	-34.6	Pass
Upper	-47.1	48.1	74.0	-25.9	Pass

**Table 8-5: Band Edge Test Data – BLE – Average**


Band Edge	Channel Power (dBm)	Channel Power (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Result (Pass / Fail)
Lower	-65.8	29.4	54.0	-24.6	Pass
Upper	-56.7	38.5	54.0	-15.5	Pass

**Table 8-6: Band Edge Test Data – BLE – Peak**


Band Edge	Channel Power (dBm)	Channel Power (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Result (Pass / Fail)
Lower	-56.2	39.0	74.0	-35.0	Pass
Upper	-45.8	49.4	74.0	-24.6	Pass

#### 8.4.1 Lower Band Edge


**Plot 8-1: Lower Band Edge – ANT+ – Average**

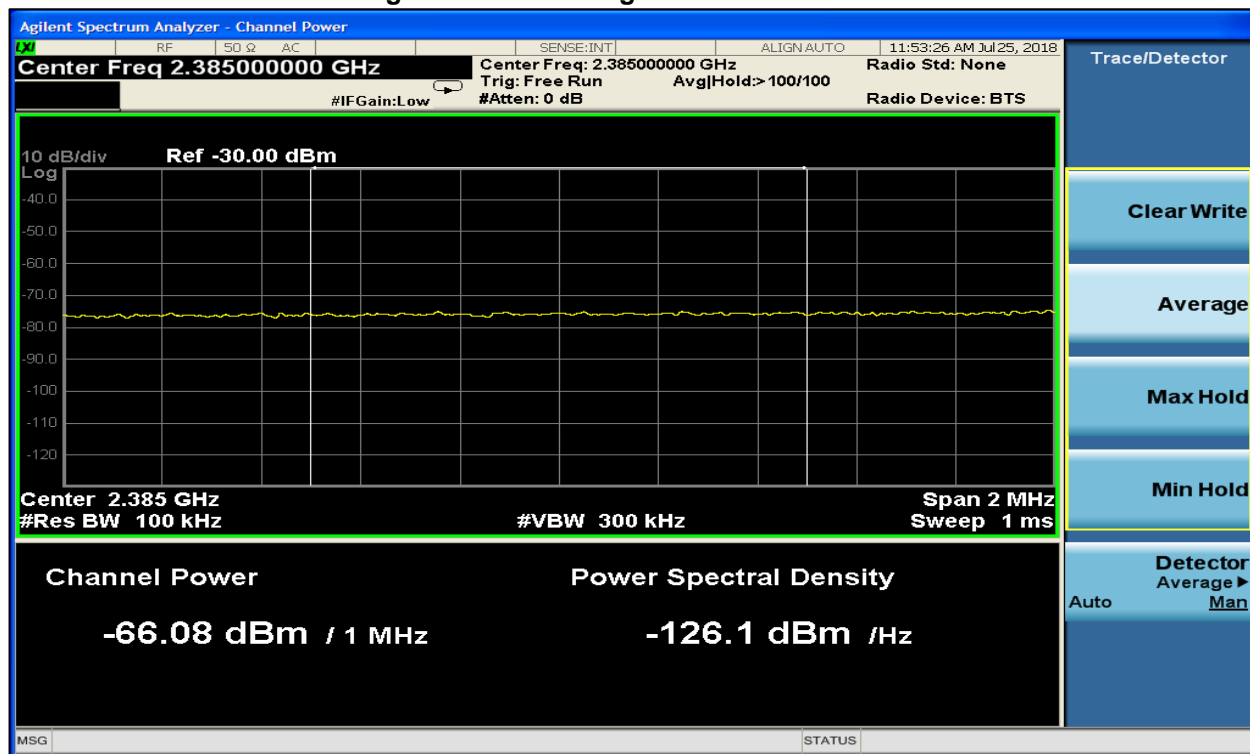


**Plot 8-2: Lower Band Edge – ANT+ – Peak**

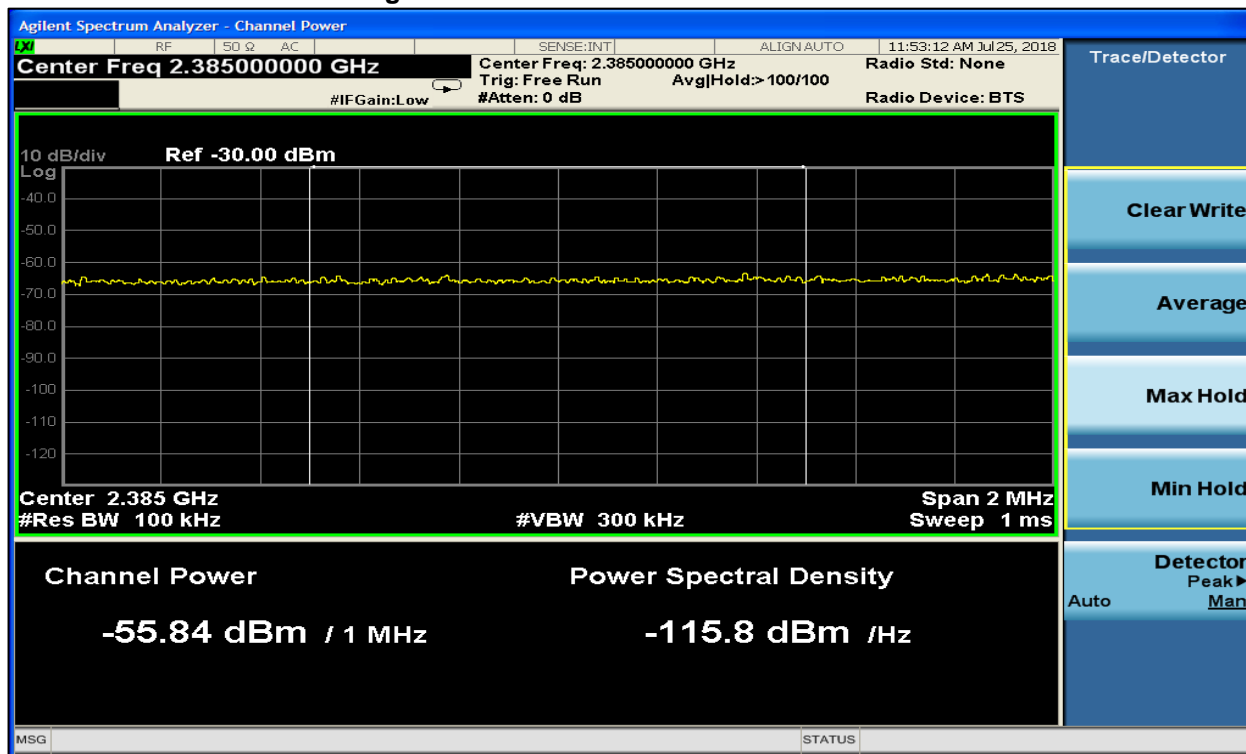

**Plot 8-3: Lower Band Edge – BLE – Average**

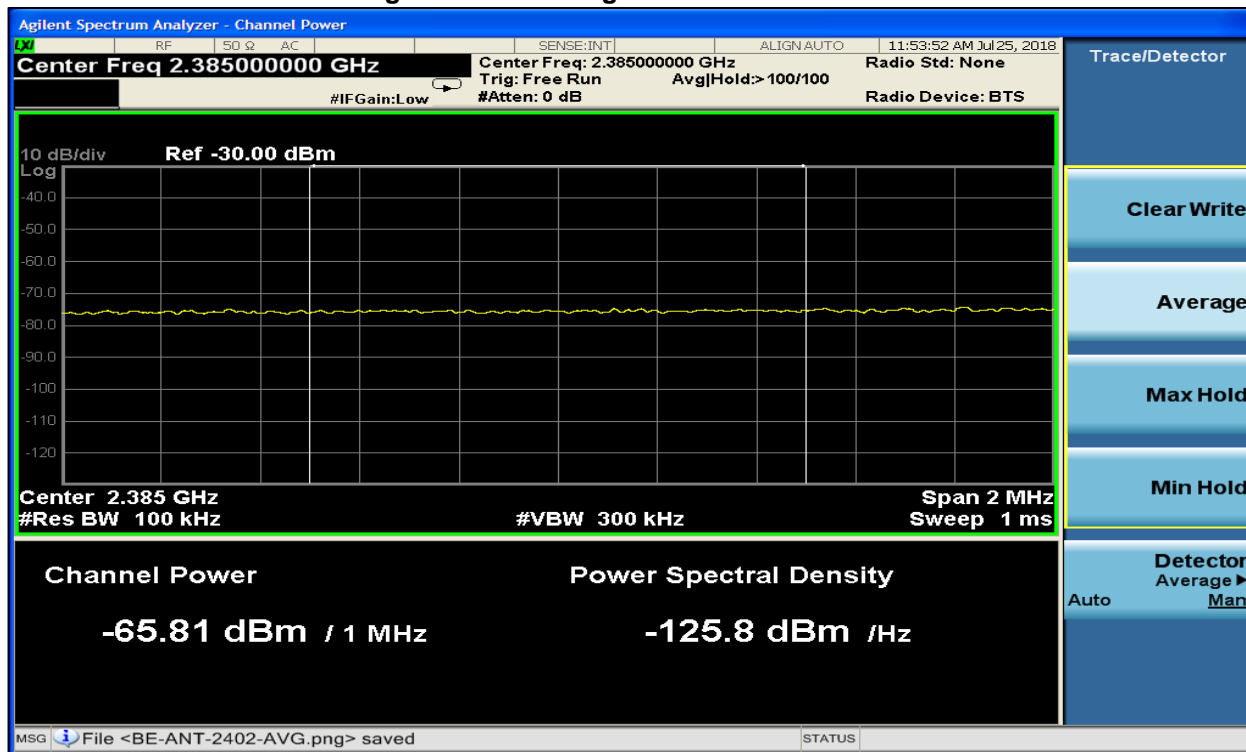


**Plot 8-4: Lower Band Edge – BLE – Peak**

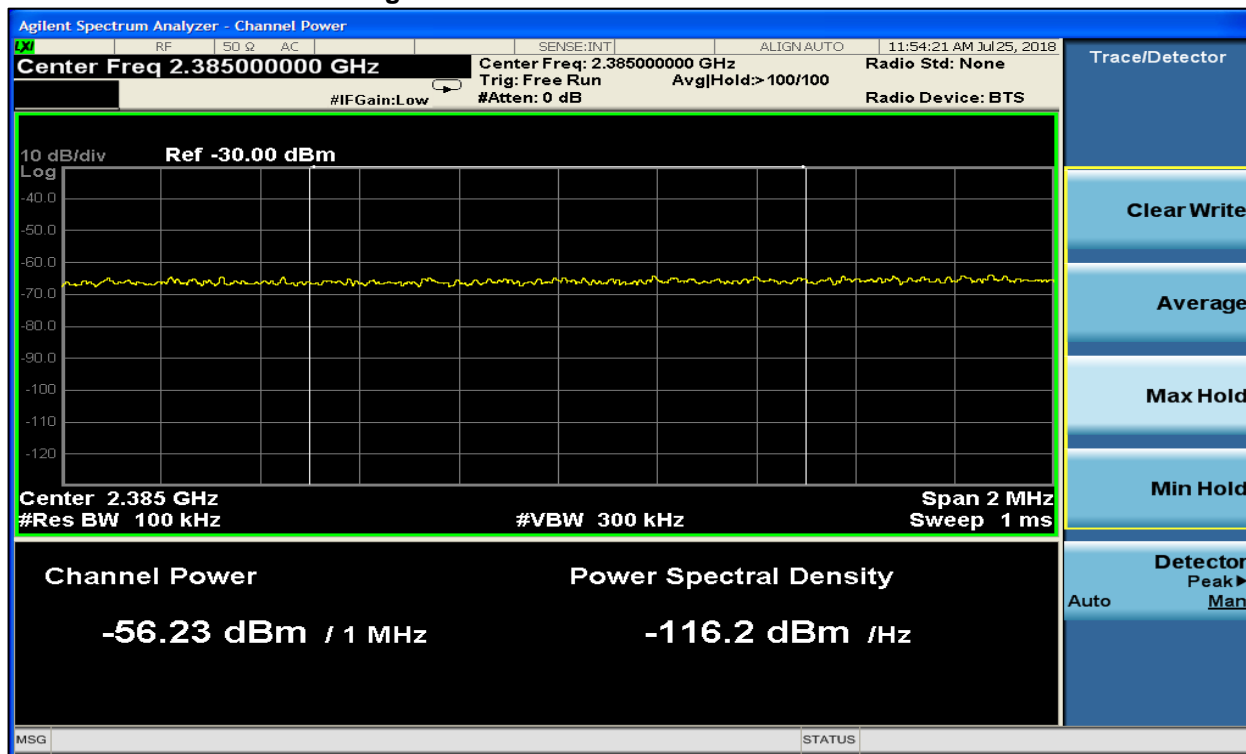


#### 8.4.2 Upper Band Edge


**Plot 8-5: Upper Band Edge – ANT+ – Average**

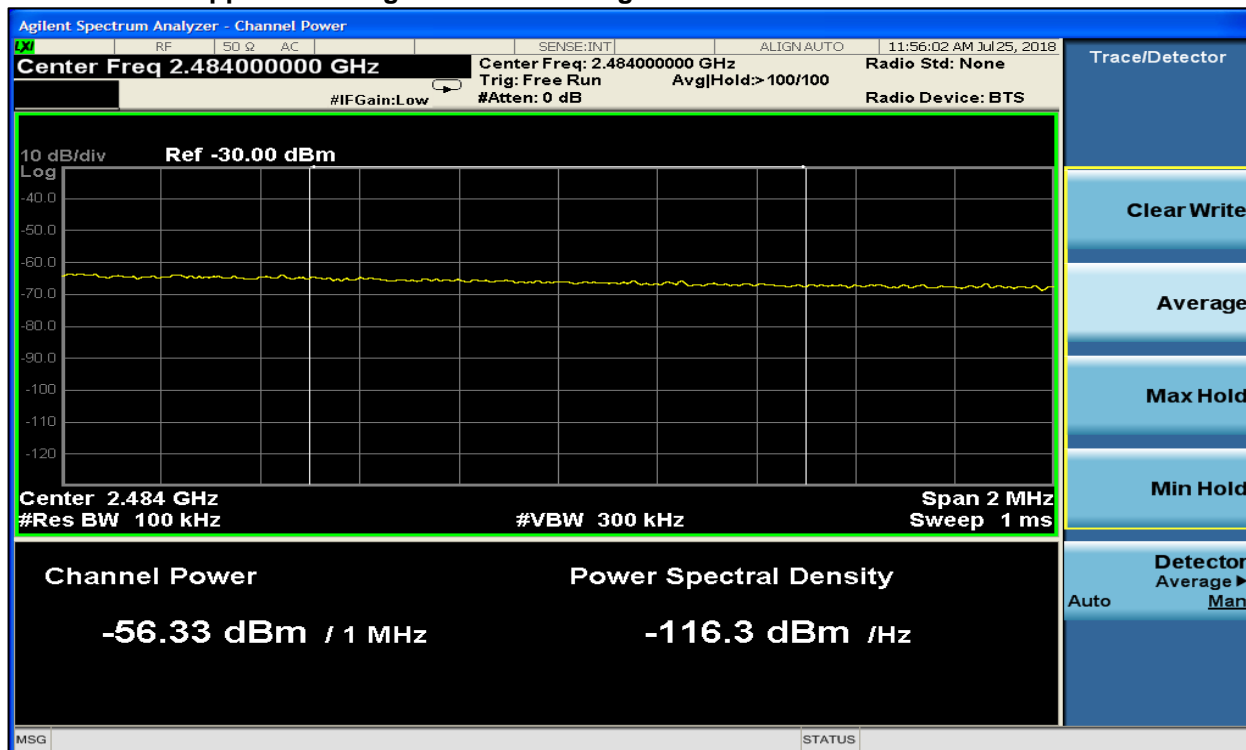


**Plot 8-6: Upper Band Edge – ANT+ – Peak**

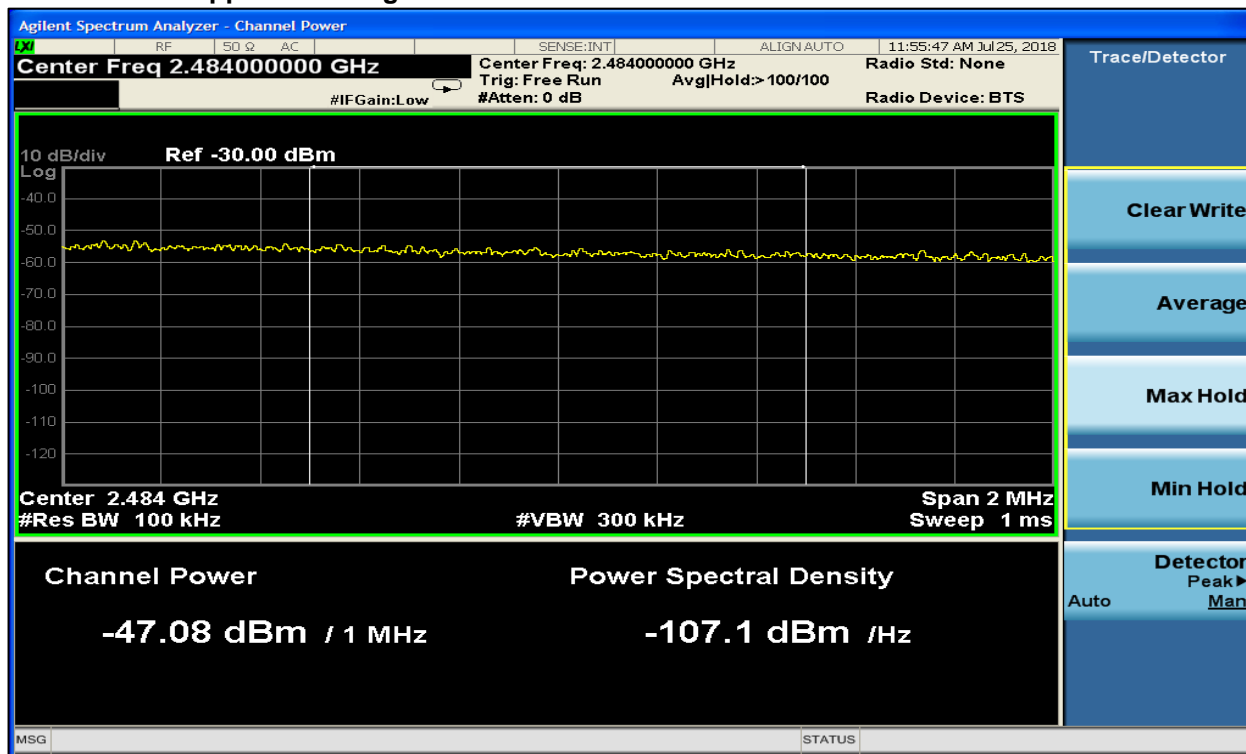

**Plot 8-7: Upper Band Edge – BLE – Average**

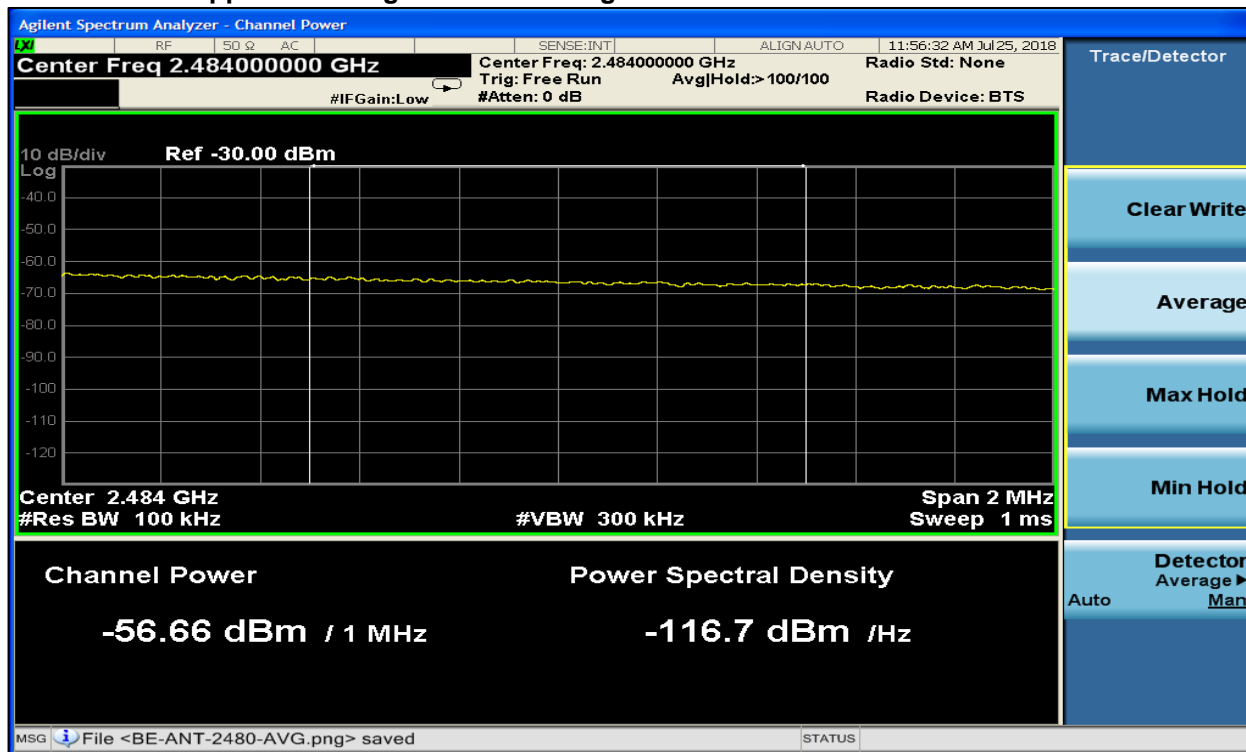

**Plot 8-8: Upper Band Edge – BLE – Peak**

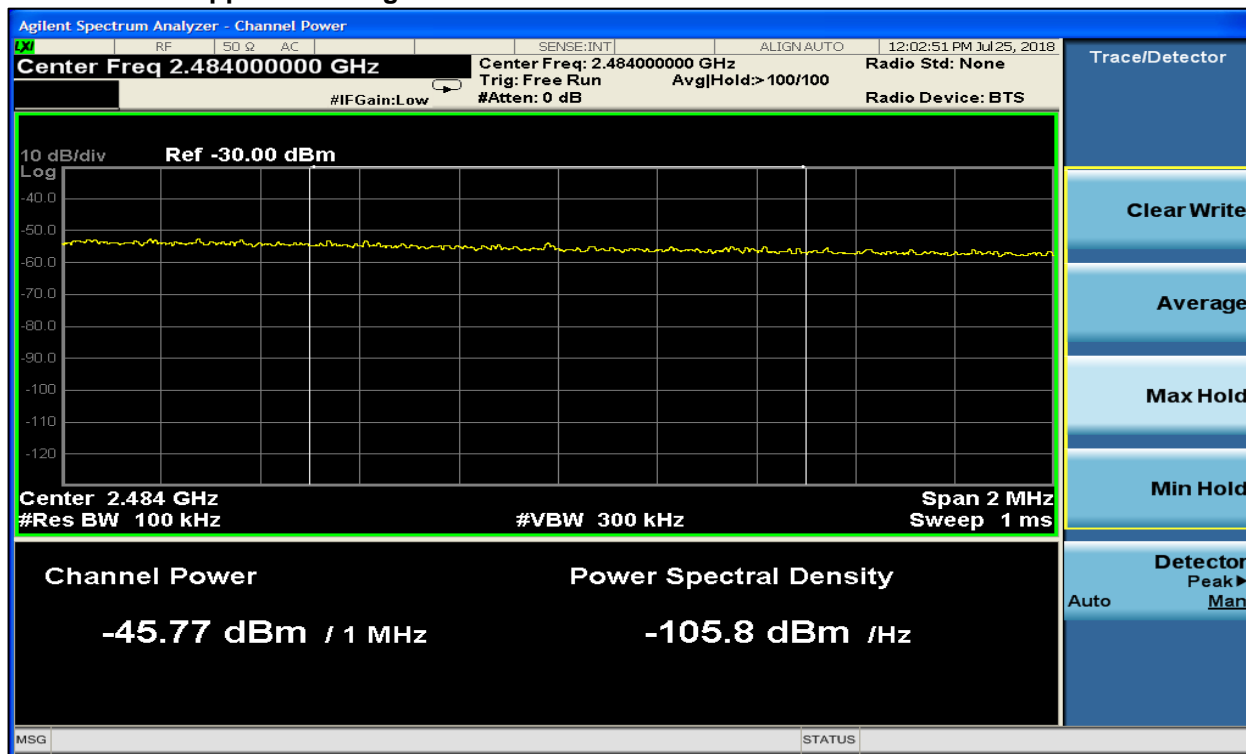

**Result: Pass**

**Table 8-7: Band Edge Test Equipment**

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901583	Agilent Technologies	N9010A	Spectrum Analyzer (10 Hz – 26.5 GHz)	MY51250846	2/6/20

**Test Personnel:**

Khue N. Do		July 25, 2018
EMC Test Engineer	Signature	Date of Test

## 9 Power Spectral Density – FCC 15.247€

### 9.1 Power Spectral Density Test Procedure

The power spectral density per FCC 15.247(e) was measured using a 50-ohm spectrum analyzer with the resolution bandwidth set at 3 kHz, the video bandwidth set at 30 kHz, and the auto sweep time. The spectral lines were resolved for the modulated carriers at 2412 MHz, 2437 MHz and 2462 MHz. These levels are below the +8 dBm limit. See the power spectral density table and plots.

### 9.2 Test Limits

**Table 9-1: PSD Limit**

PSD Limit	8.0 dBm
-----------	---------

### 9.3 Measurement Uncertainty

Measurement uncertainties shown for these tests are expanded uncertainties expressed at 95% confidence level using a coverage factor  $k = 2$ .

PSD:  $\pm 1.0$  dB

### 9.4 Power Spectral Density Test Data

**Table 9-2: PSD Environmental Condition**

Date	Temperature (°F)	Humidity (%)	Pressure (kPa)
July 24, 2018	74.6	25	101.1

**Table 9-3: PSD Test Data – ANT+**

Channel	Frequency (MHz)	PSD (dBm)	Limit (dBm)	Margin (dB)	Result (Pass / Fail)
2	2402	5.9	8.0	-2.1	Pass
40	2440	5.3	8.0	-2.7	Pass
80	2480	3.9	8.0	-4.1	Pass

**Table 9-4: PSD Test Data – BLE**

Channel	Frequency (MHz)	PSD (dBm)	Limit (dBm)	Margin (dB)	Result (Pass / Fail)
2	2402	4.8	8.0	-3.2	Pass
40	2440	4.1	8.0	-3.9	Pass
80	2480	2.9	8.0	-5.1	Pass

Plot 9-1: PSD – ANT+ – 2402 MHz



Plot 9-2: PSD – ANT+ – 2440 MHz






Plot 9-3: PSD – ANT+ – 2480 MHz




Plot 9-4: PSD – BLE – 2402 MHz



Plot 9-5: PSD – BLE – 2440 MHz

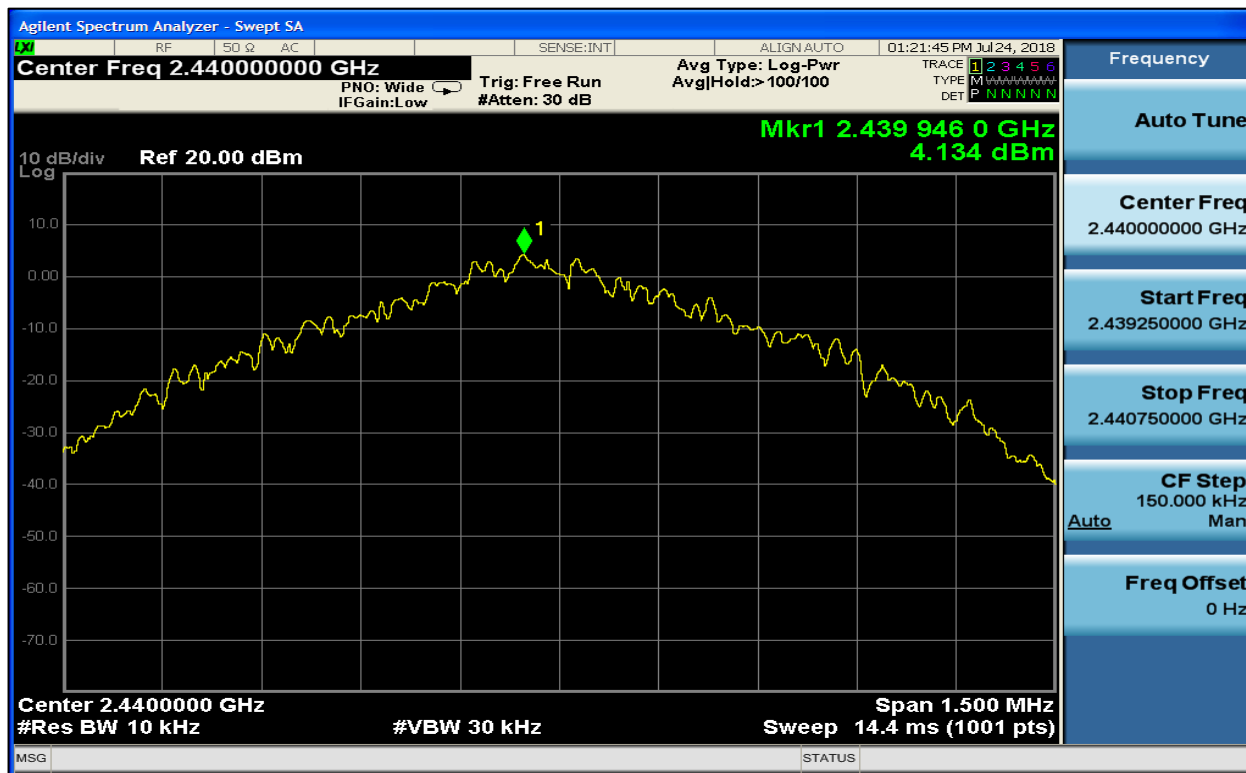

Plot 9-6: PSD – BLE – 2480 MHz

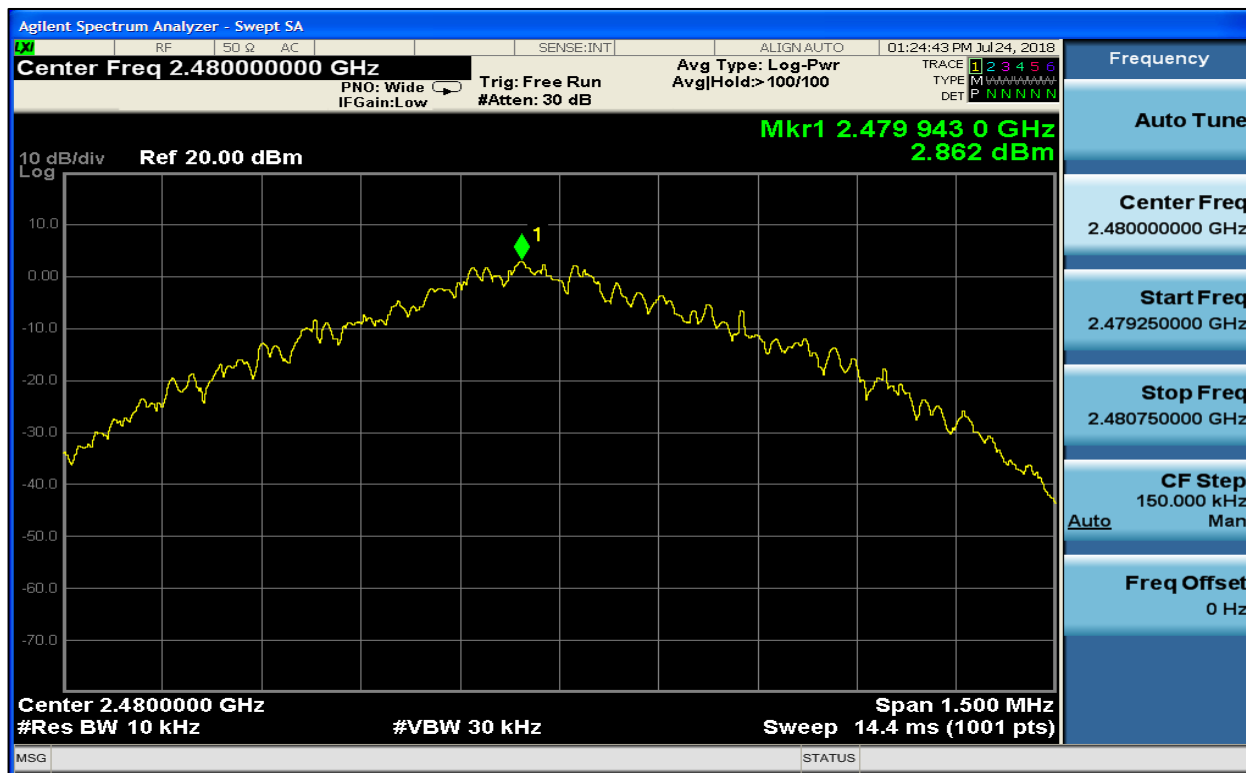

Result: Pass

**Table 9-5: PSD Test Equipment**

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901583	Agilent Technologies	N9010A	Spectrum Analyzer (10 Hz – 26.5 GHz)	MY51250846	2/6/20

**Test Personnel:**

Khue N. Do		July 24, 2018
EMC Test Engineer	Signature	Date of Test

**10 Conclusion**

The data in this measurement report shows that the EUT as tested, Garmin International Inc. Model # AA3405, FCC ID: IPH-A3405, ANT+ and BLE portions, comply with the applicable requirements of Parts 2 and 15 of the FCC Rules and Regulations.