


FCC Co-Location Test Report

FCC ID : IPH-B3697
Equipment : Watch and activity monitor
Model No. : AB3697
Brand Name : GARMIN
Applicant : Garmin International, Inc.
Address : 1200 E. 151st Street Olathe, KS 66062 United States
Standard : 47 CFR FCC Part 15.247
Received Date : May 28, 2019
Tested Date : Jul. 24, 2019

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by:

Approved by:


Along Chen / Assistant Manager



Gary Chang / Manager



Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	The Equipment List	6
1.3	Test Standards	7
1.4	Deviation from Test Standard and Measurement Procedure.....	7
1.5	Measurement Uncertainty	7
2	TEST CONFIGURATION.....	8
2.1	Testing Condition	8
2.2	The Worst Test Modes and Channel Details	8
3	TRANSMITTER TEST RESULTS	9
3.1	Unwanted Emissions into Restricted Frequency Bands	9
4	TEST LABORATORY INFORMATION	19

Release Record

Report No.	Version	Description	Issued Date
FR952804CO	Rev. 01	Initial issue	Aug. 05, 2019

Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.247(d) 15.225(a) 15.249(a)	Radiated Emissions	[dBuV/m at 3m]: 2466.44MHz 41.67 (Margin -12.33dB) - AV	Pass

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

1 General Description

1.1 Information

The EUT comes in three different types of strap materials in the market. One is leather, another is metal, and the other is silicon.

1.1.1 Specification of the Equipment under Test (EUT)

Bluetooth	
Operating Frequency	2402 MHz ~ 2480 MHz
Antenna Type	Slot antenna
Modulaton Type	Bluetooth LE: GFSK
NFC	
Operating Frequency	13.56 MHz
Antenna Type	Loop antenna
Modulaton Type	BPSK
ANT+	
Operating Frequency	2402 MHz ~ 2479 MHz
Antenna Type	Slot antenna
Modulaton Type	GFSK

1.2 The Equipment List

Test Item	Radiated Emission				
Test Site	966 chamber 1 / (03CH01-WS)				
Tested Date	Jul. 24, 2019				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101498	Dec. 27, 2018	Dec. 26, 2019
Receiver	R&S	ESR3	101658	Dec. 11, 2018	Dec. 10, 2019
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-522	Jul. 12, 2019	Jul. 11, 2020
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1096	Dec. 18, 2018	Dec. 17, 2019
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Nov. 15, 2018	Nov. 14, 2019
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 09, 2018	Nov. 08, 2019
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Oct. 08, 2018	Oct. 07, 2019
Preamplifier	EMC	EMC02325	980225	Jul. 09, 2019	Jul. 08, 2020
Preamplifier	Agilent	83017A	MY39501308	Oct. 04, 2018	Oct. 03, 2019
Preamplifier	EMC	EMC184045B	980192	Aug. 09, 2018	Aug. 08, 2019
RF Cable	EMC	EMC104-SM-SM-80 00	181106	Oct. 08, 2018	Oct. 07, 2019
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16019/4	Oct. 08, 2018	Oct. 07, 2019
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16014/4	Oct. 08, 2018	Oct. 07, 2019
LF cable 1M	EMC	EMCCFD400-NM-N M-1000	160502	Oct. 08, 2018	Oct. 07, 2019
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-001	Oct. 08, 2018	Oct. 07, 2019
LF cable 10M	Woken	CFD400NL-LW	CFD400NL-002	Oct. 08, 2018	Oct. 07, 2019
Measurement Software	AUDIX	e3	6.120210g	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

1.3 Test Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.247

ANSI C63.10-2013

FCC KDB 558074 D01 15.247 Meas Guidance v05r02

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01

FCC KDB 412172 D01 Determining ERP and EIRP v01r01

1.4 Deviation from Test Standard and Measurement Procedure

None

1.5 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Measurement Uncertainty	
Parameters	Uncertainty
Radiated emission \leq 1GHz	± 3.41 dB
Radiated emission $>$ 1GHz	± 4.59 dB

2 Test Configuration

2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
Radiated Emissions	03CH01-WS	28°C / 63%	Roger Lu

- FCC Designation No.: TW2732
- FCC site registration No.: 181692
- ISED#: 10807A-1
- CAB identifier: TW2732

2.2 The Worst Test Modes and Channel Details

Test item	Modulation Mode	Test Frequency (MHz)	Test Configuration
Radiated Emissions	BLE + NFC	2480MHz + 13.56MHz	---
	ANT+ + NFC	2402MHz + 13.56MHz	---

NOTE:

1. The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The **Z-plane** results were found as the worst case and were shown in this report.
2. Three different types of strap materials (leather, metal and silicon) had been covered during the pretest and found that silicon strap material was the worst case and was selected for final test.

3 Transmitter Test Results

3.1 Unwanted Emissions into Restricted Frequency Bands

3.1.1 Limit of Unwanted Emissions into Restricted Frequency Bands

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1:
Quasi-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

Note 2:
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.


3.1.2 Test Procedures

1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:


1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

3.1.3 Test Setup

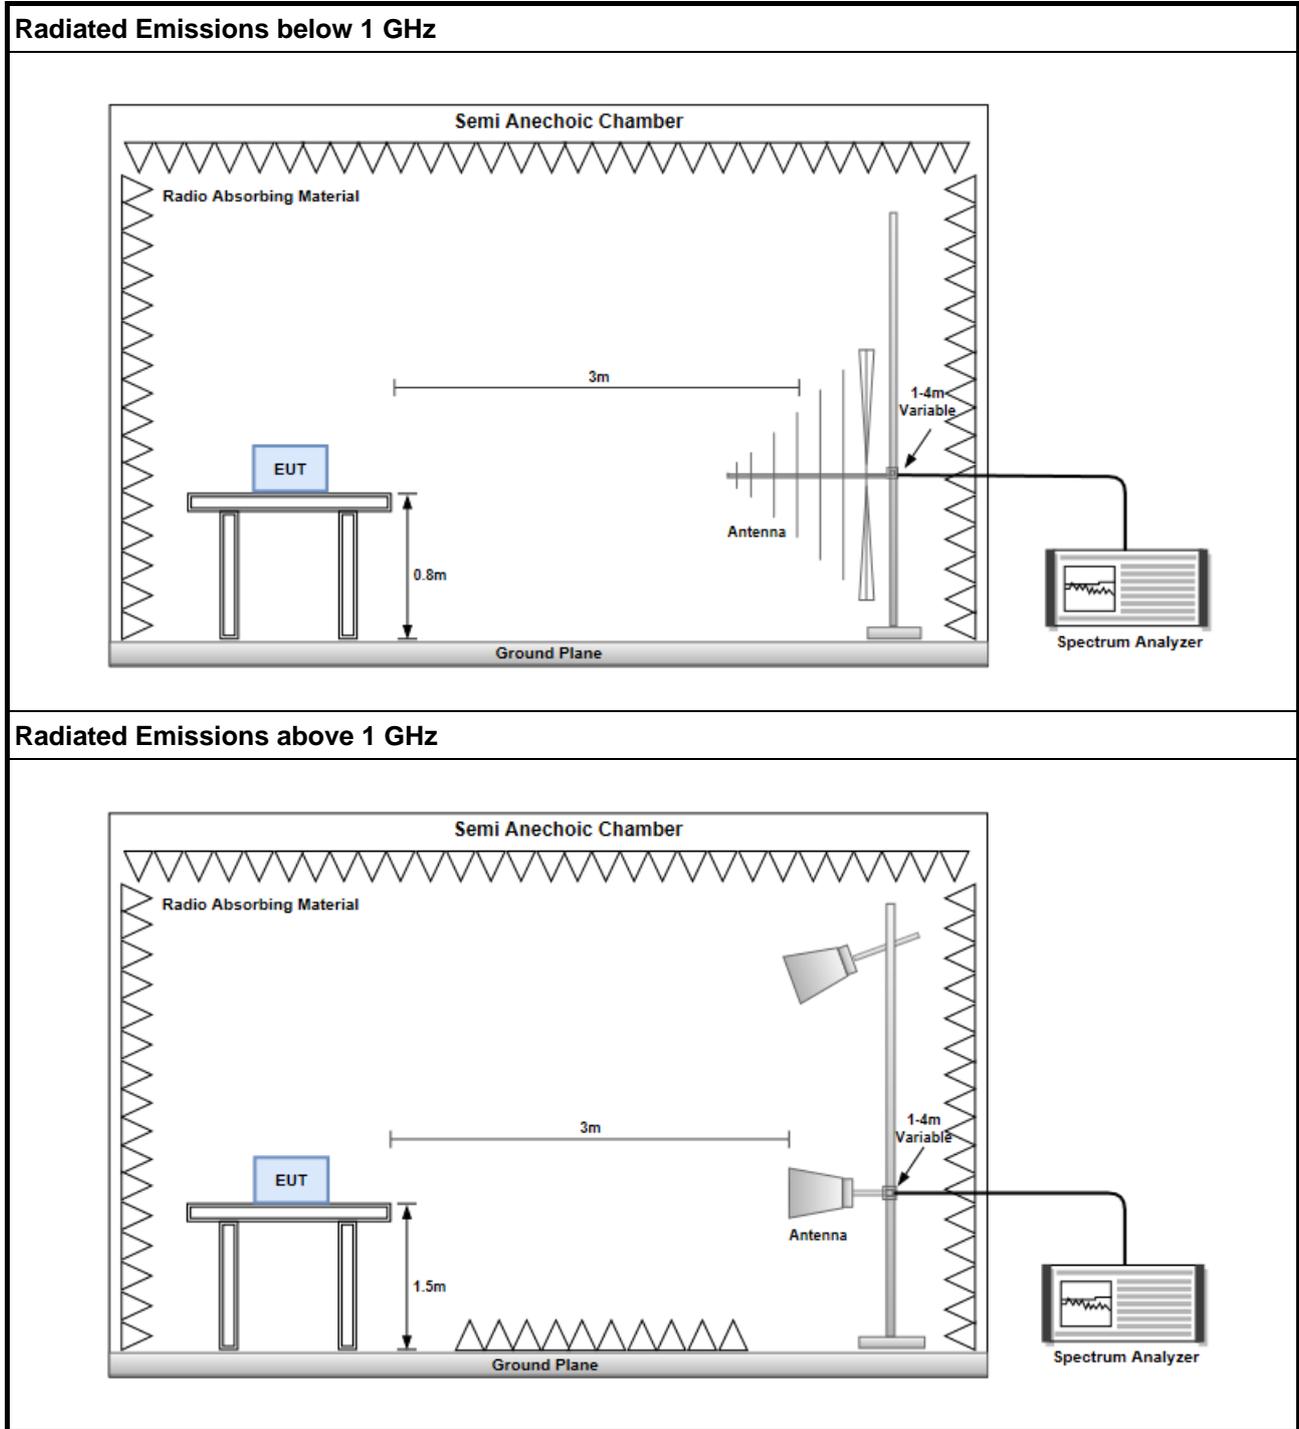

3.1.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

Modulation	BLE + NFC	Test Frequency	2480MHz + 13.56MHz
Polarization	Horizontal		

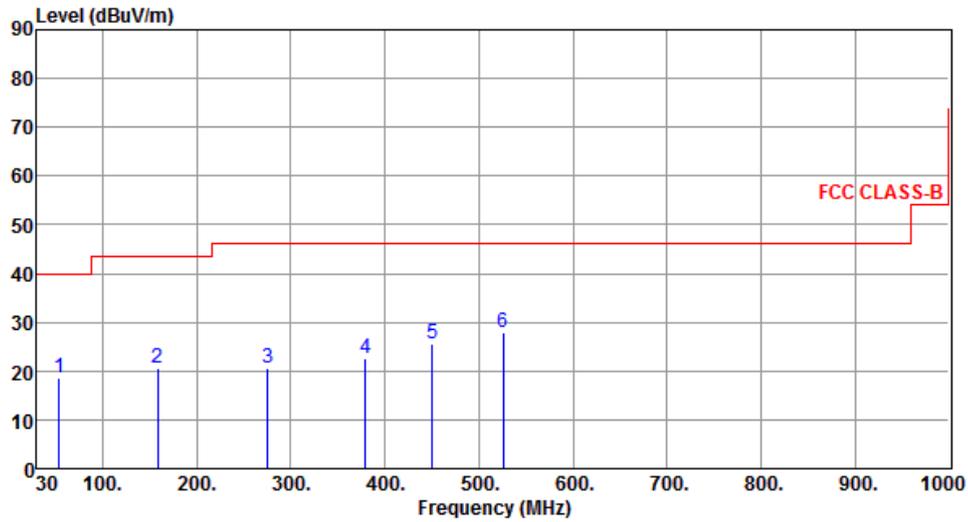

	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	53.52	18.64	40.00	-21.36	27.22	-8.58	Peak	---	---
2	158.88	20.54	43.50	-22.96	28.98	-8.44	Peak	---	---
3	275.54	20.66	46.00	-25.34	29.46	-8.80	Peak	---	---
4	379.51	22.69	46.00	-23.31	28.66	-5.97	Peak	---	---
5	450.52	25.58	46.00	-20.42	29.71	-4.13	Peak	---	---
6	525.50	27.85	46.00	-18.15	30.64	-2.79	Peak	---	---


Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Modulation	BLE + NFC	Test Frequency	2480MHz + 13.56MHz
Polarization	Vertical		

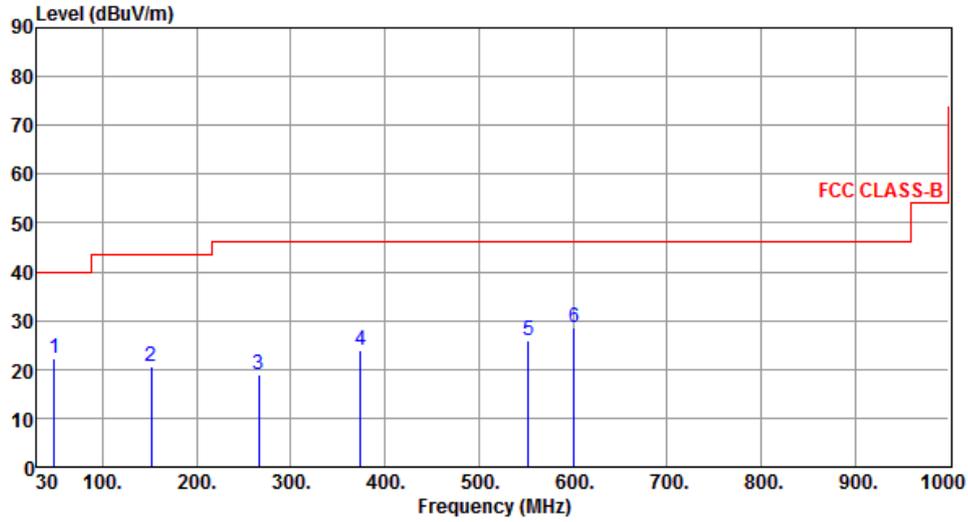

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	48.52	22.25	40.00	-17.75	30.71	-8.46	Peak	---	---
2	151.69	20.52	43.50	-22.98	29.02	-8.50	Peak	---	---
3	265.52	18.96	46.00	-27.04	28.29	-9.33	Peak	---	---
4	374.58	23.86	46.00	-22.14	29.96	-6.10	Peak	---	---
5	552.84	25.96	46.00	-20.04	28.39	-2.43	Peak	---	---
6	600.78	28.54	46.00	-17.46	29.56	-1.02	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Modulation	ANT+ + NFC	Test Frequency	2402MHz + 13.56MHz
Polarization	Horizontal		

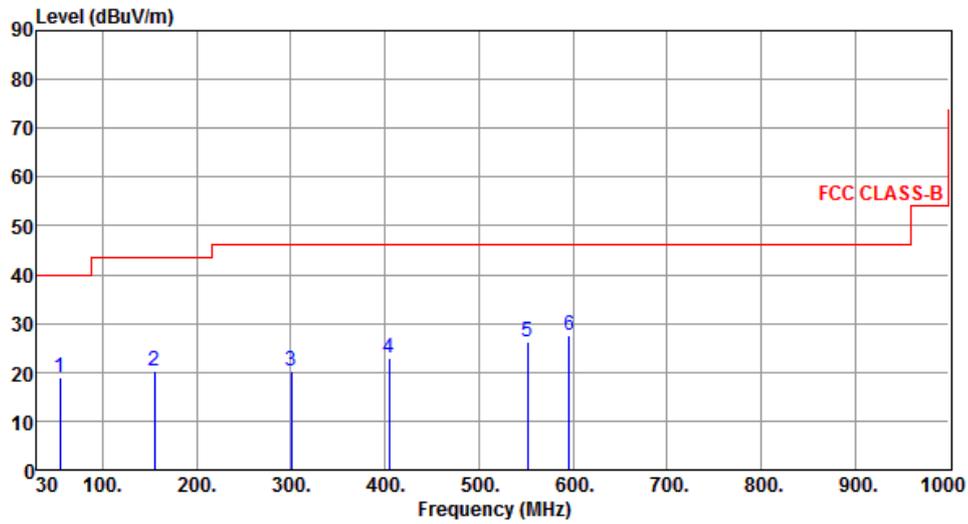

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	54.63	18.95	40.00	-21.05	27.71	-8.76	Peak	---	---
2	155.24	20.25	43.50	-23.25	28.68	-8.43	Peak	---	---
3	300.35	20.24	46.00	-25.76	28.33	-8.09	Peak	---	---
4	404.85	22.82	46.00	-23.18	28.28	-5.46	Peak	---	---
5	551.58	26.36	46.00	-19.64	28.83	-2.47	Peak	---	---
6	596.41	27.57	46.00	-18.43	28.69	-1.12	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Modulation	ANT+ + NFC	Test Frequency	2402MHz + 13.56MHz
Polarization	Vertical		

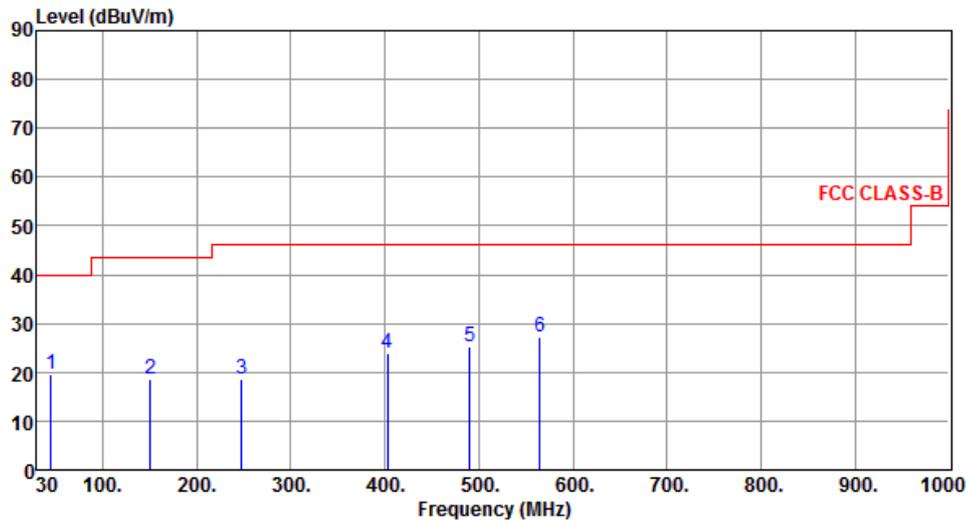

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	44.86	19.65	40.00	-20.35	28.14	-8.49	Peak	---	---
2	150.52	18.56	43.50	-24.94	27.09	-8.53	Peak	---	---
3	247.52	18.62	46.00	-27.38	28.65	-10.03	Peak	---	---
4	402.66	23.84	46.00	-22.16	29.35	-5.51	Peak	---	---
5	490.54	25.24	46.00	-20.76	28.66	-3.42	Peak	---	---
6	564.87	27.24	46.00	-18.76	29.33	-2.09	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

3.1.5 Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation	BLE + NFC	Test Frequency	2480MHz + 13.56MHz
Polarization	Horizontal		

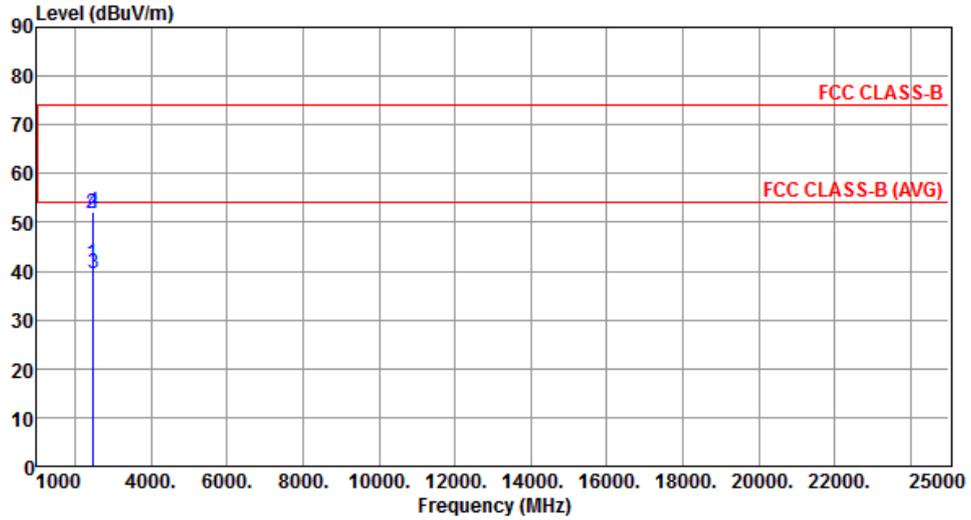


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2466.44	41.36	54.00	-12.64	44.54	-3.18	Average	100	256
2	2466.44	51.68	74.00	-22.32	54.86	-3.18	Peak	100	256
3	2493.56	39.68	54.00	-14.32	42.92	-3.24	Average	100	105
4	2493.56	52.16	74.00	-21.84	55.40	-3.24	Peak	100	105

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	BLE + NFC	Test Frequency	2480MHz + 13.56MHz
Polarization	Vertical		

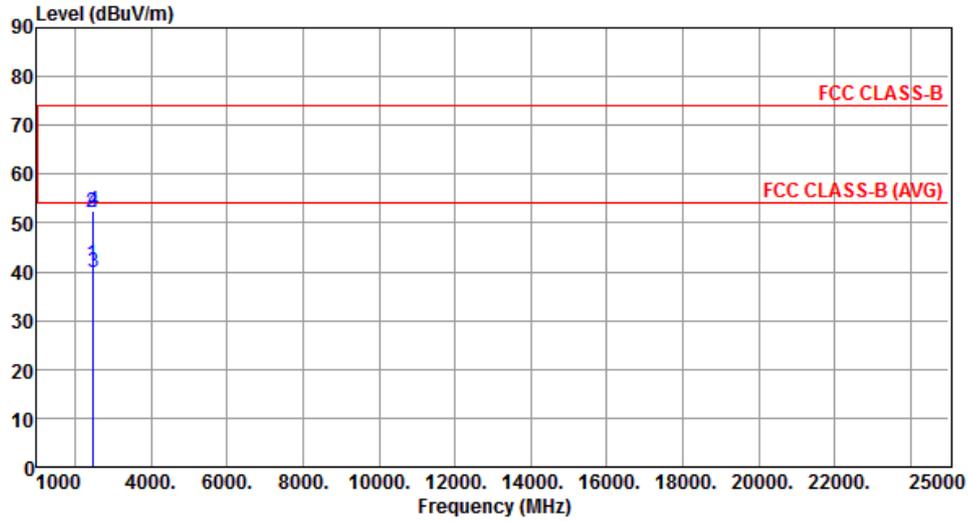


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2466.44	41.67	54.00	-12.33	44.85	-3.18	Average	100	142
2	2466.44	52.14	74.00	-21.86	55.32	-3.18	Peak	100	142
3	2493.56	40.00	54.00	-14.00	43.24	-3.24	Average	100	214
4	2493.56	52.38	74.00	-21.62	55.62	-3.24	Peak	100	214

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	ANT+ + NFC	Test Frequency	2402MHz + 13.56MHz
Polarization	Horizontal		

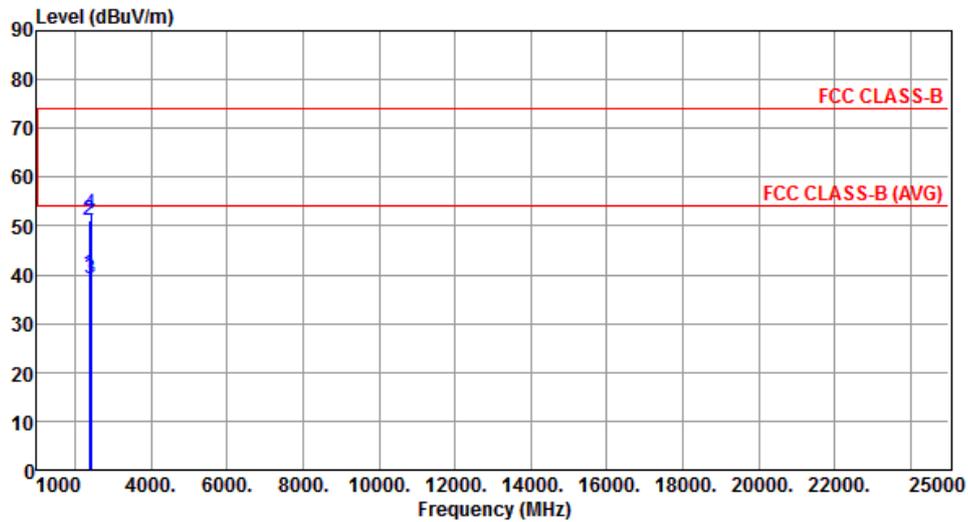


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2388.44	40.18	54.00	-13.82	43.24	-3.06	Average	100	241
2	2388.44	51.14	74.00	-22.86	54.20	-3.06	Peak	100	241
3	2415.56	39.18	54.00	-14.82	42.29	-3.11	Average	100	106
4	2415.56	52.48	74.00	-21.52	55.59	-3.11	Peak	100	106

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	ANT+ + NFC	Test Frequency	2402MHz + 13.56MHz
Polarization	Vertical		

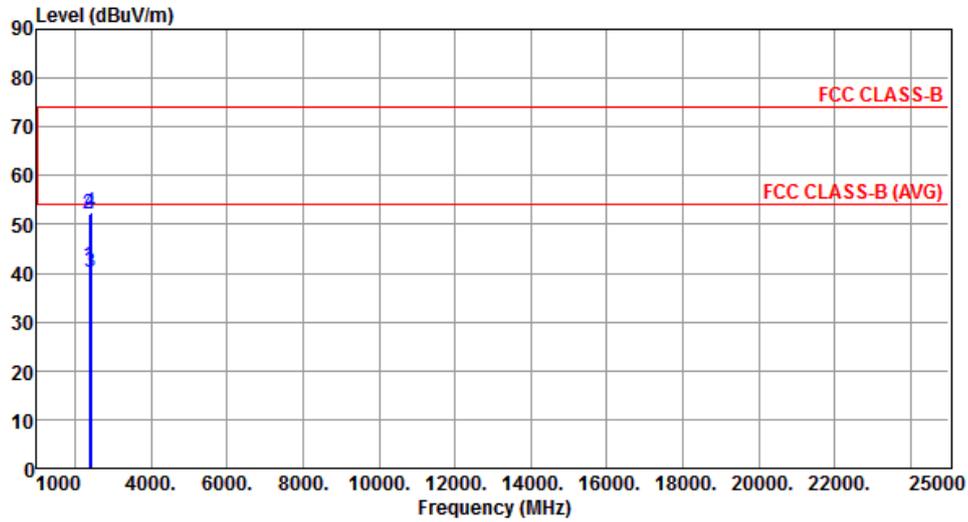

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2388.44	41.45	54.00	-12.55	44.51	-3.06	Average	100	139
2	2388.44	52.18	74.00	-21.82	55.24	-3.06	Peak	100	139
3	2415.56	40.08	54.00	-13.92	43.19	-3.11	Average	100	209
4	2415.56	52.34	74.00	-21.66	55.45	-3.11	Peak	100	209

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <http://www.icertifi.com.tw>.

Linkou

Tel: 886-2-2601-1640

No. 30-2, Ding Fwu Tsuen, Lin
Kou District, New Taipei City,
Taiwan, R.O.C.

Kwei Shan

Tel: 886-3-271-8666

No. 3-1, Lane 6, Wen San 3rd St.,
Kwei Shan District, Tao Yuan City
333, Taiwan, R.O.C.

Kwei Shan Site II

Tel: 886-3-271-8640

No. 14-1, Lane 19, Wen San 3rd
St., Kwei Shan District, Tao Yuan
City 333, Taiwan, R.O.C..

If you have any suggestion, please feel free to contact us as below information

Tel: 886-3-271-8666

Fax: 886-3-318-0155

Email: ICC_Service@icertifi.com.tw

==END==