

# **FCC Test Report**

FCC ID : IPH-B3958

Equipment : Smart Watch

Model No. : AB3958

Brand Name : GARMIN

Applicant : Garmin International, Inc.

Address : 1200 E. 151st Street Olathe, KS 66062 United

**States** 

Standard : 47 CFR FCC Part 15.249

Received Date : Apr. 16, 2021

Tested Date : Apr. 28, 2021 ~ May 6, 2021

We, International Certification Corporation, would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by: Approved by:

Along Chen / Assistant Manager Gary Chang / Manager

Taf Testing Laboratory

2732

Page: 1 of 31

Report Version: Rev. 01

Report No.: FR141601AF



## **Table of Contents**

1	GENERAL DESCRIPTION	5
1.1	Information	5
1.2	Local Support Equipment List	
1.3	Test Setup Chart	7
1.4	The Equipment List	8
1.5	Test Standards	g
1.6	Deviation from Test Standard and Measurement Procedure	
1.7	Measurement Uncertainty	
2	TEST CONFIGURATION	10
2.1	Testing Facility	10
2.2	The Worst Test Modes and Channel Details	10
3	TRANSMITTER TEST RESULTS	11
3.1	Conducted Emissions	11
3.2	Radiated Emission	14
3.3	20dB and Occupied Bandwidth	28
4	TEST LABORATORY INFORMATION	31



## **Release Record**

Report No.	Version	Description	Issued Date
FR141601AF	Rev. 01	Initial issue	Jun. 21, 2021

Report No.: FR141601AF Page: 3 of 31



## **Summary of Test Results**

FCC Rules	Test Items	Measured	Result
15.207	AC Power Line Conducted Emissions	[dBuV]: 0.779MHz 21.09 (Margin -24.91dB) -AV	Pass
15.249(a)	Field Strength of Fundamental	Meet the requirement of limit	Pass
15.249(a)(d)	Field Strength of Harmonics and Emissions Radiated outside of the Specified Frequency Bands	Meet the requirement of limit	Pass
15.215(c)	20dB bandwidth	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

#### **Declaration of Conformity:**

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

#### **Comments and Explanations:**

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Report No.: FR141601AF Page: 4 of 31



## 1 General Description

## 1.1 Information

### 1.1.1 Specification of the Equipment under Test (EUT)

RF General Information							
Frequency Range (MHz)							
2402-2480	GFSK	2402-2480	1-79 [79]	1 Mbps			

#### 1.1.2 Antenna Details

Ant. No.	Brand	Mode	Туре	Gain (dBi)	Connector
1	Garmin	117-01655-0x	Slot	-2.13	N/A

### 1.1.3 Power Supply Type of Equipment under Test (EUT)

Supply Voltage	5.0Vdc from AC adapter
Supply Voltage	3.87Vdc from Battery

#### 1.1.4 Accessories

	Accessories				
No.	Equipment	Description			
1	Battery	Brand: GARMIN Model: 361-00136-10 Power Rating: 3.87Vdc, 195mAh			
2	USB cable	Brand: GARMIN Model: 320-01069-10 Power line: 0.52m shielded without core			

Report No.: FR141601AF Page: 5 of 31



### 1.1.5 Channel List

Frequency band (MHz)				2400~2483.5			
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2402	21	2422	41	2442	61	2462
2	2403	22	2423	42	2443	62	2463
3	2404	23	2424	43	2444	63	2464
4	2405	24	2425	44	2445	64	2465
5	2406	25	2426	45	2446	65	2466
6	2407	26	2427	46	2447	66	2467
7	2408	27	2428	47	2448	67	2468
8	2409	28	2429	48	2449	68	2469
9	2410	29	2430	49	2450	69	2470
10	2411	30	2431	50	2451	70	2471
11	2412	31	2432	51	2452	71	2472
12	2413	32	2433	52	2453	72	2473
13	2414	33	2434	53	2454	73	2474
14	2415	34	2435	54	2455	74	2475
15	2416	35	2436	55	2456	75	2476
16	2417	36	2437	56	2457	76	2477
17	2418	37	2438	57	2458	77	2478
18	2419	38	2439	58	2459	78	2479
19	2420	39	2440	59	2460	79	2480
20	2421	40	2441	60	2461		

## 1.1.6 Test Tool and Duty Cycle

Test Tool	Hardware control, Version: v6.11		
Duty Cycle and Duty Factor	Duty Cycle (%)	Duty Factor (dB)	
Duty Cycle and Duty Factor	100.00	0.00	

### 1.1.7 Power Index of Test Tool

Madulation Mada	Test Frequency (MHz)			
Modulation Mode	2402	2441	2480	
ANT+	default	default	default	


Report No.: FR141601AF Page: 6 of 31




## 1.2 Local Support Equipment List

	Support Equipment List						
No.	No. Equipment Brand Model FCC ID Remarks						
1	Adapter	Samsung	ETA-U90JWS				

## 1.3 Test Setup Chart

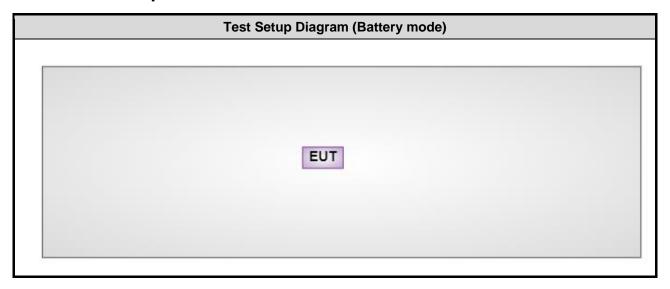

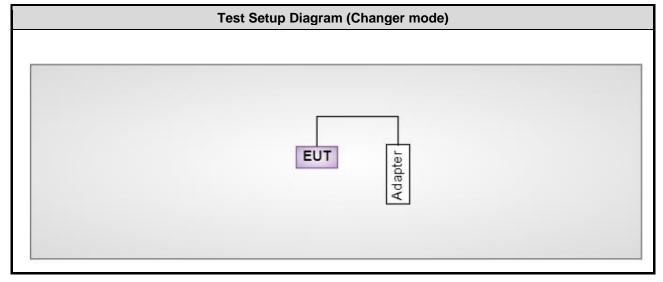

Report No.: FR141601AF Page: 7 of 31



## 1.4 The Equipment List

Test Item	Conducted Emission								
Test Site	Conduction room 1 / (	Conduction room 1 / (CO01-WS) May 12, 2021							
Tested Date	May 12, 2021								
Instrument	Brand	Brand Model No. Serial No. Calibration Date Calibration Until							
Receiver	R&S	ESR3	101658	Feb. 08, 2021	Feb. 07, 2022				
LISN	R&S	ENV216	101579	Mar. 17, 2021	Mar. 16, 2022				
RF Cable-CON	RF Cable-CON Woken CFD200-NL CFD200-NL-001 Oct. 21, 2020 Oct. 20, 20								
Measurement Software	1 ALIDIV 1 62   6.120210k   NA   NA								

Test Item	Radiated Emission				
Test Site	966 chamber1 / (03CH01-WS)				
Tested Date	Apr. 28 ~ May 06, 2021				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Receiver	R&S	ESR3	101657	Mar. 12, 2021	Mar. 11, 2022
Spectrum Analyzer	R&S	FSV40	101498	Dec. 04, 2020	Dec. 03, 2021
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 17, 2020	Nov. 16, 2021
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-522	Jul. 10, 2020	Jul. 09, 2021
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1096	Dec. 11, 2020	Dec. 10, 2021
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Nov. 06, 2020	Nov. 05, 2021
Preamplifier	EMC	EMC02325	980225	Jul. 03, 2020	Jul. 02, 2021
Preamplifier	Agilent	83017A	MY39501308	Sep. 26, 2020	Sep. 25, 2021
Preamplifier	EMC	EMC184045B	980192	Jul. 21, 2020	Jul. 20, 2021
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Oct. 06, 2020	Oct. 05, 2021
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-001	Oct. 06, 2020	Oct. 05, 2021
LF cable 11M	EMC	EMCCFD400-NW-N W-11000	200801	Oct. 06, 2020	Oct. 05, 2021
LF cable 1M	EMC	EMCCFD400-NM-N M-1000	160502	Oct. 06, 2020	Oct. 05, 2021
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16019/4	Oct. 06, 2020	Oct. 05, 2021
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16014/4	Oct. 06, 2020	Oct. 05, 2021
Measurement Software	AUDIX	e3	6.120210g	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

Report No.: FR141601AF Page: 8 of 31



### 1.5 Test Standards

47 CFR FCC Part 15.249 ANSI C63.10-2013

### 1.6 Deviation from Test Standard and Measurement Procedure

None

## 1.7 Measurement Uncertainty

The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)).

Measurement Uncertainty		
Parameters Uncertainty		
Bandwidth	±34.130 Hz	
AC conducted emission	±2.92 dB	
Radiated emission ≤ 1GHz	±3.41 dB	
Radiated emission > 1GHz	±4.59 dB	

Report No.: FR141601AF Page: 9 of 31



## 2 Test Configuration

## 2.1 Testing Facility

Test Laboratory	International Certification Corporation
Test Site	CO01-WS, 03CH01-WS
Address of Test Site	No.3-1, Lane 6, Wen San 3rd St., Kwei Shan Dist., Tao Yuan City 33381, Taiwan (R.O.C.)

FCC Designation No.: TW2732FCC site registration No.: 181692

➤ ISED#: 10807A

➤ CAB identifier: TW2732

### 2.2 The Worst Test Modes and Channel Details

Test item	Mode	Test Frequency (MHz)	Data Rate	Test Configuration
AC Power Line Conducted Emissions	Charging			2
Field Strength of Fundamental	GFSK	2402, 2441, 2480	1 Mbps	1
Radiated Emissions ≤ 1GHz	GFSK	2441	1 Mbps	1
Radiated Emissions > 1GHZ	Charging			2
Radiated Emissions > 1GHz	GFSK	2402, 2441, 2480	1 Mbps	1
20dB bandwidth	GFSK	2402, 2441, 2480	1 Mbps	1

#### NOTE:

1) Configuration 1: Battery mode

2) Configuration 2: Charging mode

Report No.: FR141601AF Page: 10 of 31

<sup>1.</sup> The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The **Y-plane** results were found as the worst case and were shown in this report.

<sup>2.</sup> The EUT had been tested by following test configurations.



## 3 Transmitter Test Results

#### 3.1 Conducted Emissions


#### 3.1.1 Limit of Conducted Emissions

Conducted Emissions Limit				
Frequency Emission (MHz) Quasi-Peak Average				
0.15-0.5	66 - 56 *	56 - 46 *		
0.5-5	56	46		
5-30	60	50		
Note 1: * Decreases with the logarithm of the frequency.				

#### 3.1.2 Test Procedures

- 1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
- 2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50  $\Omega$  LISN port.
- 3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
- 4. This measurement was performed with AC 120V / 60Hz.

#### 3.1.3 Test Setup

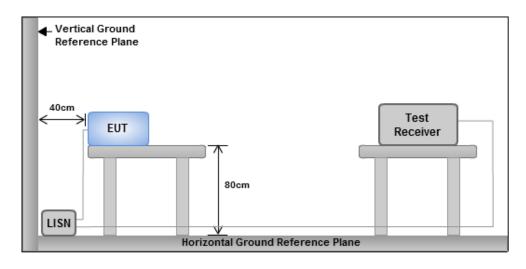


Note: 1. Support units were connected to second LISN.

Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

Report No.: FR141601AF Page: 11 of 31




#### **Test Result of Conducted Emissions**

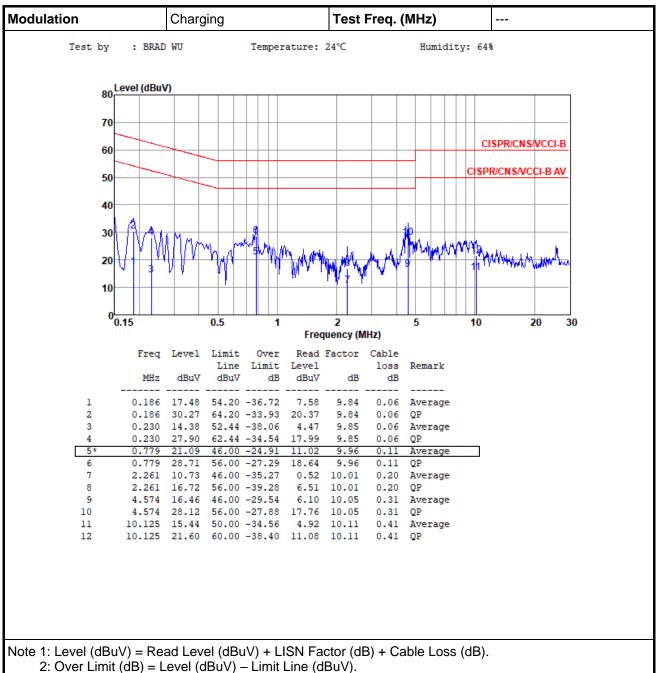

Report No.: FR141601AF Page: 12 of 31



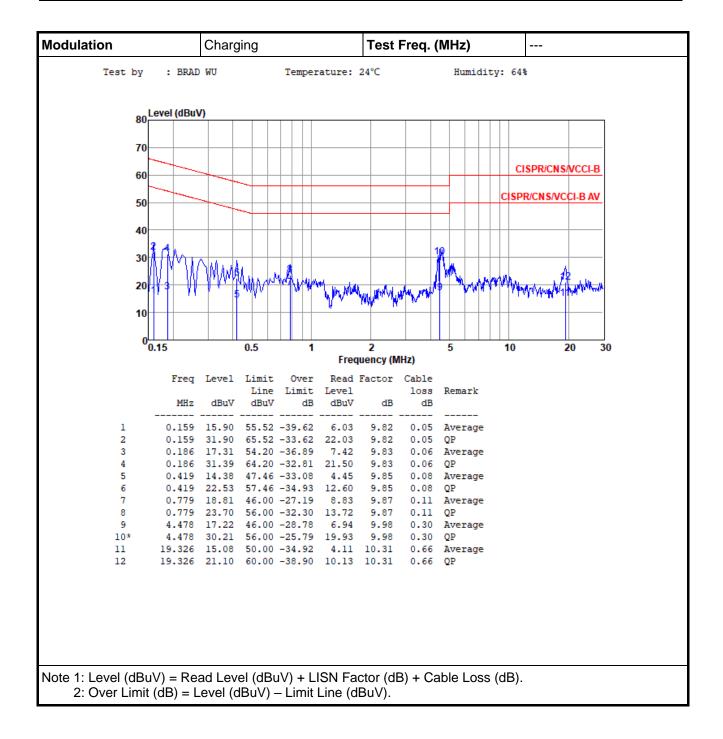

Report No.: FR141601AF Page: 13 of 31



#### 3.2 Radiated Emission

This section includes field strength of fundamental, field strength of harmonics and emissions radiated outside of the operating frequency bands.

#### 3.2.1 Limit of field strength of fundamental and field strength of harmonics

Fundamental Frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)	
2400–2483.5 MHz	50	500	

#### 3.2.2 Limit of Unwanted Emissions

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in below table, whichever is the lesser attenuation.

Radiated emission limits				
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)	
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300	
0.490~1.705	24000/F(kHz)	33.8 - 23	30	
1.705~30.0	30	29	30	
30~88	100	40	3	
88~216	150	43.5	3	
216~960	200	46	3	
Above 960	500	54	3	

#### Note 1:

Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit **Note 2:** 

Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

Report No.: FR141601AF Page: 14 of 31



#### 3.2.3 Test Procedures

- 1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
- 2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
- 3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

#### Note:

- Radiated emission below 1GHz
   120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission
- Radiated emission above 1GHz / Peak value except fundamental RBW=2MHz, VBW=10MHz and Peak detector
- Radiated emission above 1GHz / Average value for field strength of fundamental and harmonics
   The average value is: Average = Peak value + 20log(Duty cycle) Where the duty factor is calculated from following formula:

20log (Duty cycle) = 20log 
$$\frac{0.39855 \times 1 \text{ms}}{100 \text{ ms}}$$
 = -47.99dB


Please see page 27 for plotted duty

- Radiated emission above 1GHz / Average value for other emissions RBW=1MHz, VBW=1/T and Peak detector
- 5. Radiated emission Peak value for fundamental RBW=3MHz, VBW=10MHz and Peak detector

Report No.: FR141601AF Page: 15 of 31



### 3.2.4 Test Setup

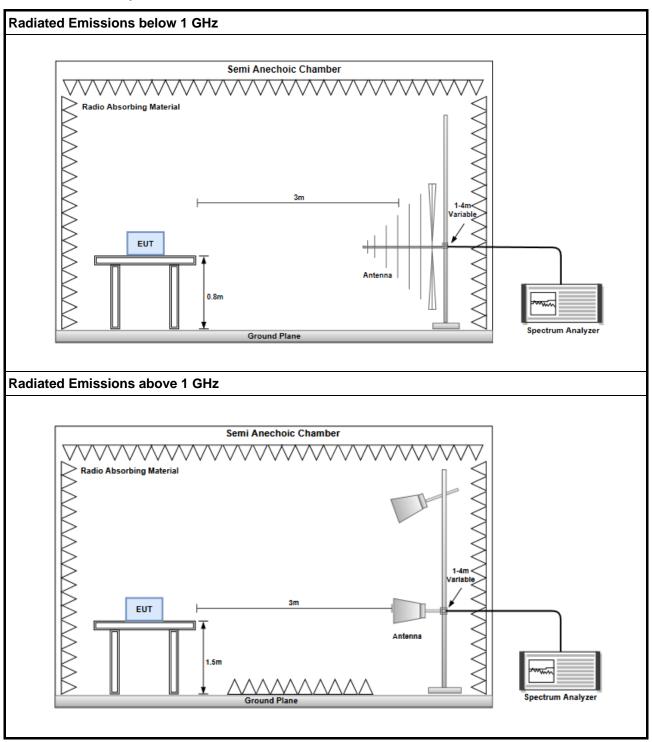


Report No.: FR141601AF Page: 16 of 31



#### **Battery Mode**

#### 3.2.5 Transmitter Radiated Unwanted Emissions (Below 1GHz)

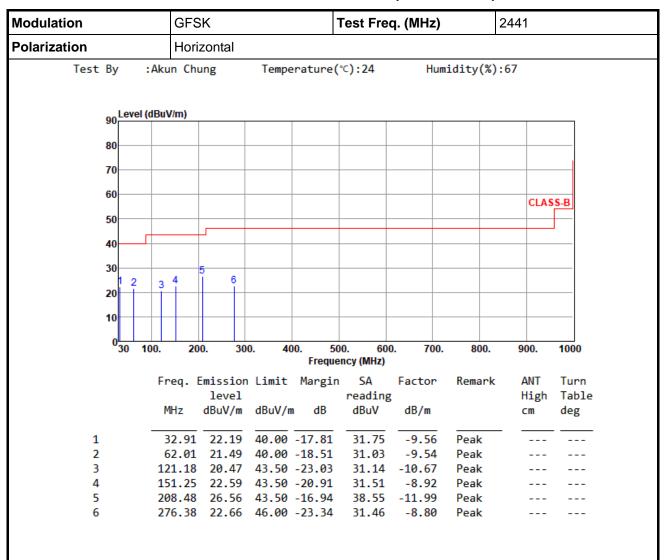

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB/m)


\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Report No.: FR141601AF Page: 17 of 31



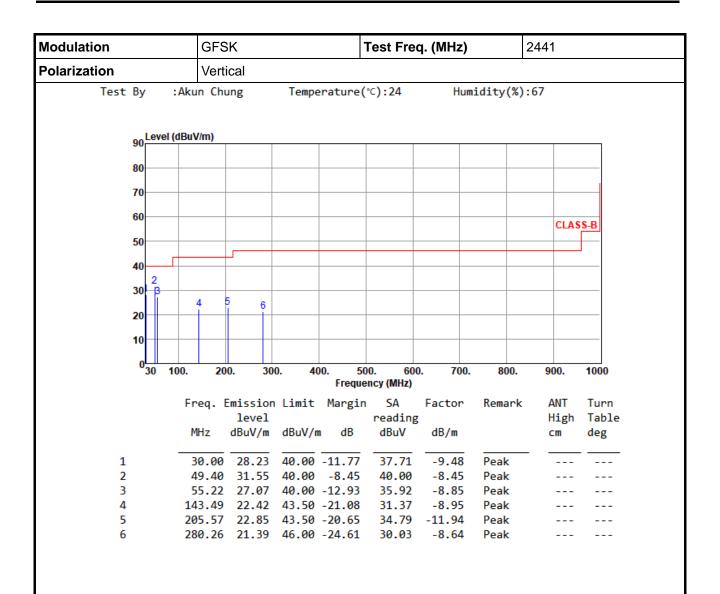


\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR141601AF Page: 18 of 31



#### 3.2.6 Transmitter Radiated Unwanted Emissions (Above 1GHz)

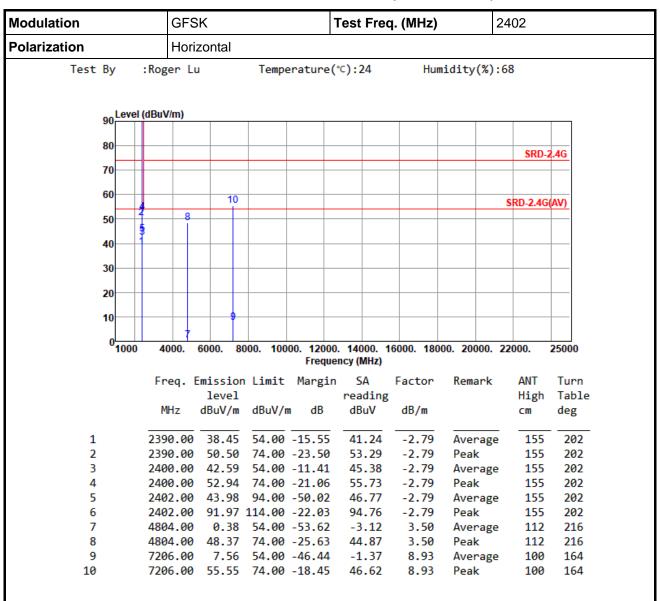


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB/m)

Report No.: FR141601AF Page: 19 of 31

<sup>\*</sup>Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



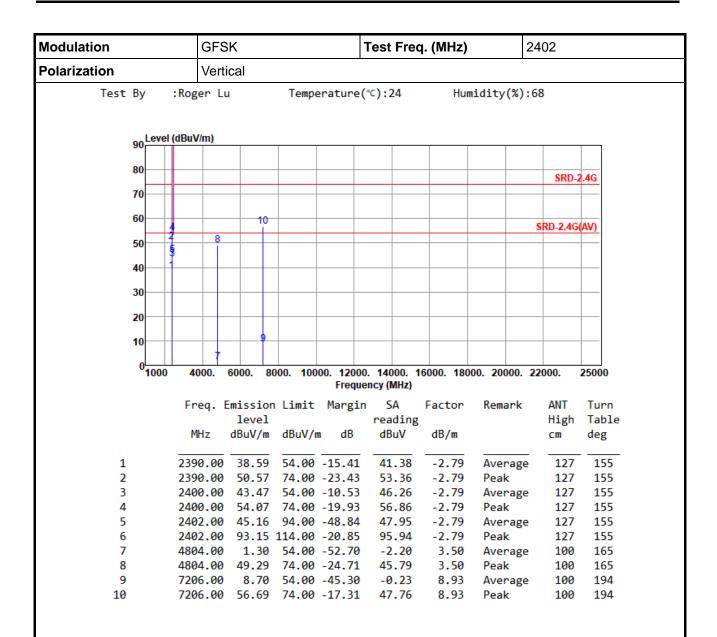


\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR141601AF Page: 20 of 31



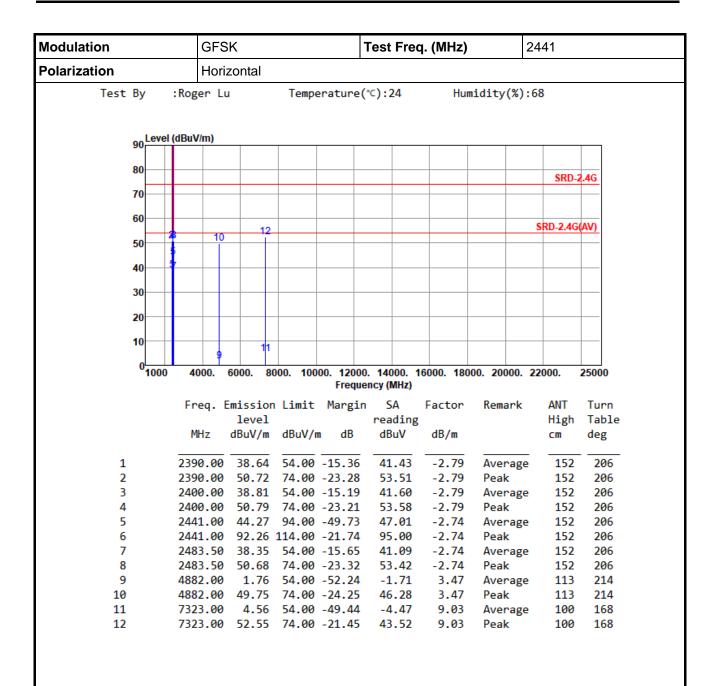


\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR141601AF Page: 21 of 31



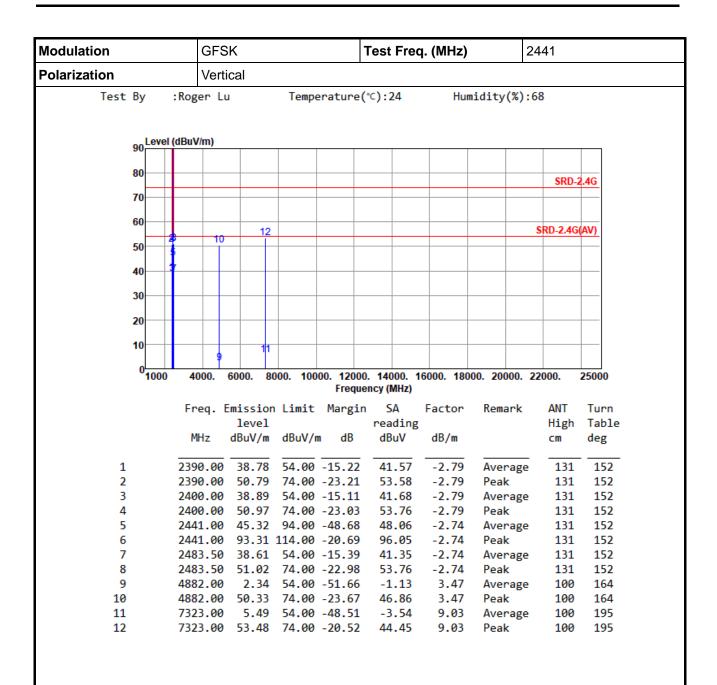


\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR141601AF Page: 22 of 31



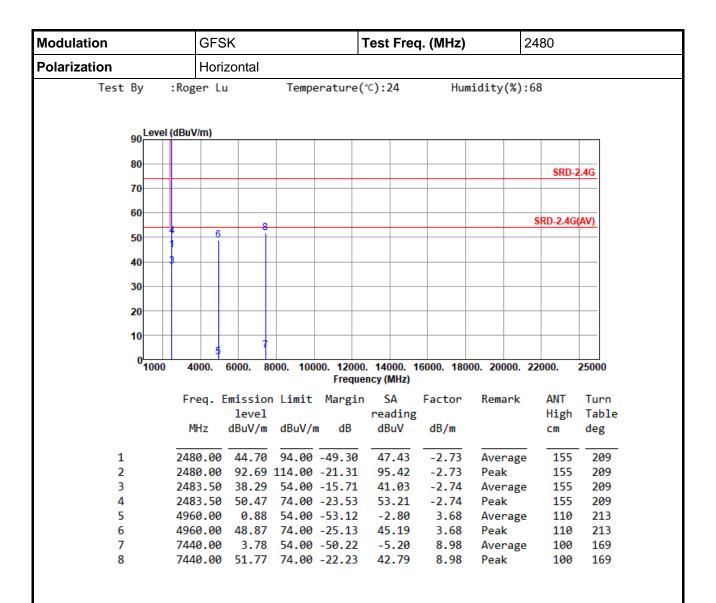


\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR141601AF Page: 23 of 31



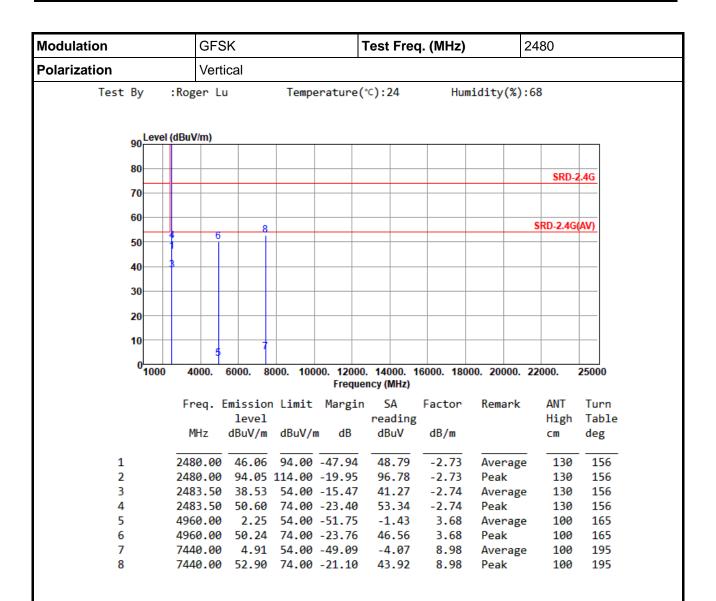

\*Factor includes antenna factor, cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR141601AF Page: 24 of 31



#### **Charging Mode**

#### 3.2.7 Transmitter Radiated Unwanted Emissions (Below 1GHz)

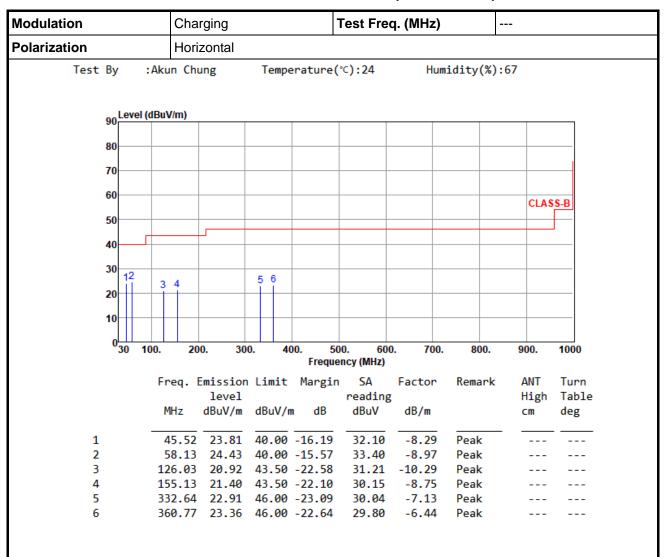

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB/m)


\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Report No.: FR141601AF Page: 25 of 31



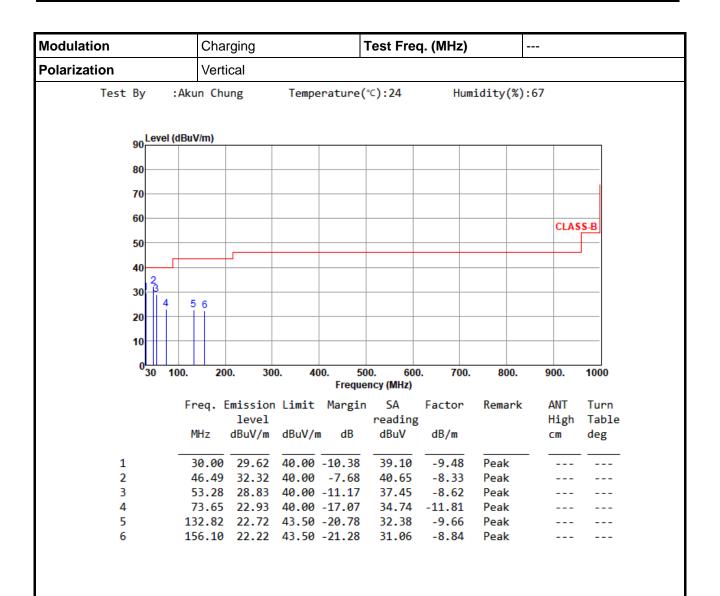


\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR141601AF Page: 26 of 31



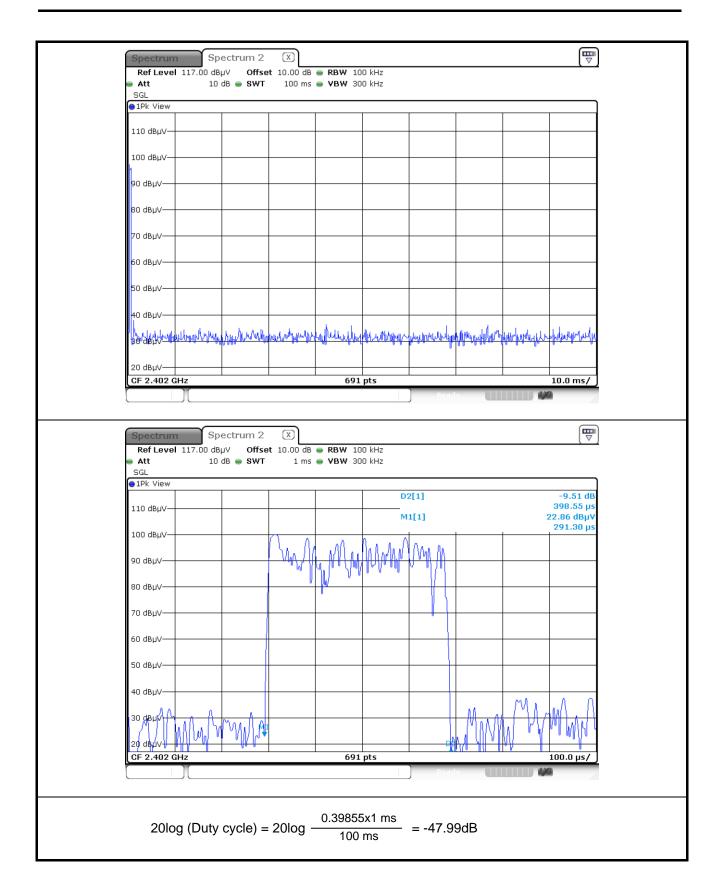

Report No.: FR141601AF Page: 27 of 31



## 3.3 20dB and Occupied Bandwidth

#### 3.3.1 Test Procedures

- 1. Set resolution bandwidth (RBW) = 20 kHz, Video bandwidth = 100 kHz.
- 2. Detector = Peak, Trace mode = max hold
- 3. Sweep = auto couple, Allow the trace to stabilize.
- 4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 20dB relative to the maximum level measured in the fundamental emission.
- 5. Use the occupied measurement function of specturm analyzer to measure 99% occupied bandwidth.

#### 3.3.2 Test Setup




#### 3.3.3 20dB and Occupied Bandwidth

Ambient Condition	24°C / 68%	Tested By	Roger Lu
-------------------	------------	-----------	----------

Frequency (MHz)	20dB Bandwidth (MHz)	99% Occupied BW
2402	1.098	0.981
2441	1.185	1.094
2480	1.016	0.946


Report No.: FR141601AF Page: 28 of 31



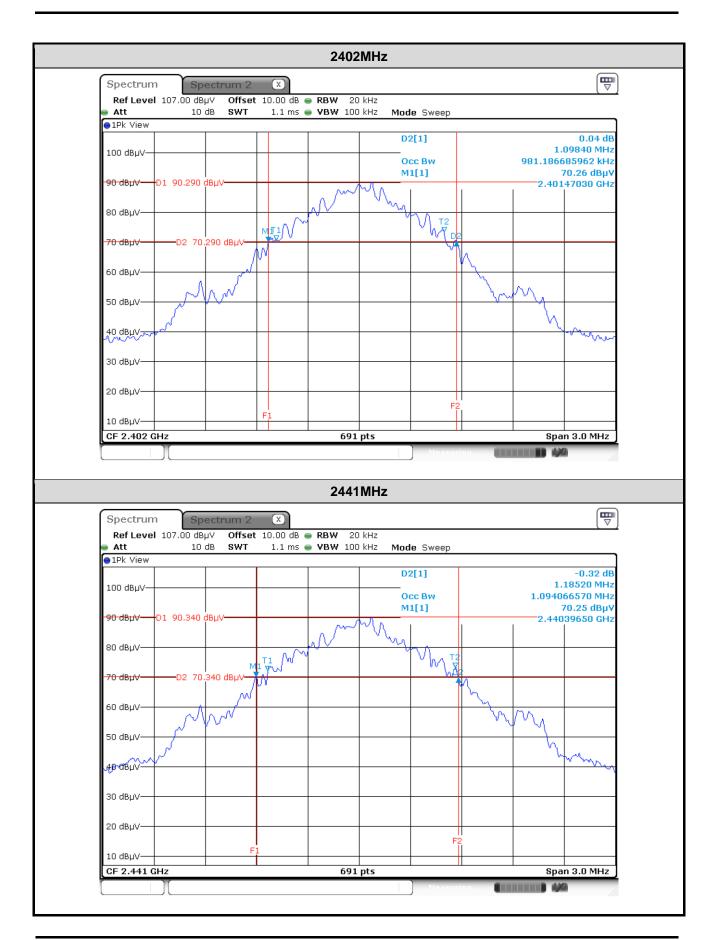

Report No.: FR141601AF Page: 29 of 31



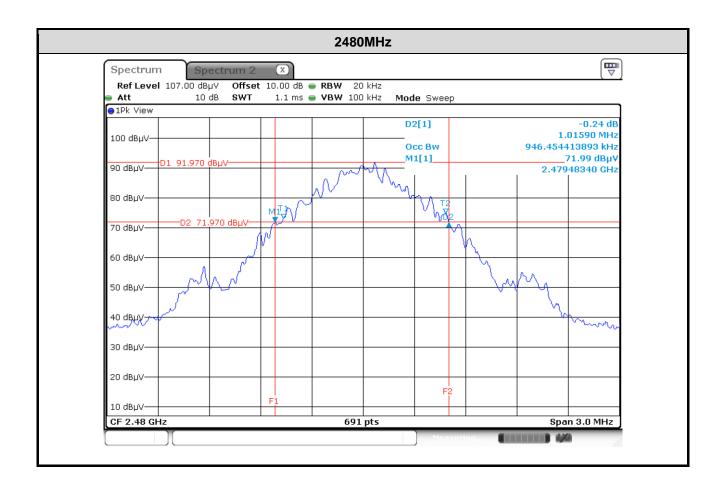

Report No.: FR141601AF Page: 30 of 31



## 4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corporation (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <a href="http://www.icertifi.com.tw">http://www.icertifi.com.tw</a>.

#### Linkou

Tel: 886-2-2601-1640 No.30-2, Ding Fwu Tsuen, Lin Kou District, New Taipei City, Taiwan (R.O.C.)

#### Kwei Shan

Tel: 886-3-271-8666
No.3-1, Lane 6, Wen San 3rd
St., Kwei Shan Dist., Tao Yuan
City 33381, Taiwan (R.O.C.)
No.2-1, Lane 6, Wen San 3rd
St., Kwei Shan Dist., Tao Yuan
City 33381, Taiwan (R.O.C.)

#### Kwei Shan Site II

Tel: 886-3-271-8640 No.14-1, Lane 19, Wen San 3rd St., Kwei Shan Dist., Tao Yuan City 333, Taiwan (R.O.C.)

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666 Fax: 886-3-318-0345

Email: ICC Service@icertifi.com.tw

==END==

Report No.: FR141601AF Page: 31 of 31