

# FCC Test Report

**FCC ID** : IPH-C3958  
**Equipment** : Smart Watch  
**Model No.** : AC3958  
**Brand Name** : GARMIN  
**Applicant** : Garmin International, Inc.  
**Address** : 1200 E. 151st Street Olathe, KS 66062 United States  
**Standard** : 47 CFR FCC Part 15.247  
**Received Date** : Apr. 16, 2021  
**Tested Date** : May 11 ~ May 12, 2021

We, International Certification Corporation, would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by:

  
\_\_\_\_\_  
Along Chen / Assistant Manager

Approved by:

  
\_\_\_\_\_  
Gary Chang / Manager



---

## Table of Contents

<b>1</b>	<b>GENERAL DESCRIPTION .....</b>	<b>5</b>
1.1	Information.....	5
1.2	Local Support Equipment List .....	7
1.3	Test Setup Chart .....	7
1.4	Test Equipment List and Calibration Data.....	8
1.5	Test Standards .....	9
1.6	Reference Guidance .....	9
1.7	Deviation from Test Standard and Measurement Procedure.....	9
1.8	Measurement Uncertainty .....	9
<b>2</b>	<b>TEST CONFIGURATION .....</b>	<b>10</b>
2.1	Testing Facility.....	10
2.2	The Worst Test Modes and Channel Details .....	10
<b>3</b>	<b>TRANSMITTER TEST RESULTS.....</b>	<b>11</b>
3.1	Conducted Emissions.....	11
3.2	6dB and Occupied Bandwidth .....	14
3.3	RF Output Power .....	18
3.4	Power Spectral Density .....	20
3.5	Emissions in Restricted Frequency Bands.....	24
3.6	Emissions in non-restricted Frequency Bands.....	36
<b>4</b>	<b>TEST LABORATORY INFORMATION .....</b>	<b>39</b>

---

## Release Record

Report No.	Version	Description	Issued Date
FR141602AE	Rev. 01	Initial issue	Jun. 21, 2021

## Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	AC Power Line Conducted Emissions	[dBuV]: 4.574MHz 29.98 (Margin -26.02dB) - QP	Pass
15.247(d) 15.209	Radiated Emissions	[dBuV/m at 3m]:12010.00MHz 44.93 (Margin -9.07dB) – AV	Pass
15.247(b)(3)	Maximum Output Power	Power [dBm]: 2.67	Pass
15.247(a)(2)	6dB Bandwidth	Meet the requirement of limit	Pass
15.247(e)	Power Spectral Density	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

### Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

### Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

# 1 General Description

## 1.1 Information

### 1.1.1 Specification of the Equipment under Test (EUT)

RF General Information				
Frequency Range (MHz)	Bluetooth Mode	Ch. Freq. (MHz)	Channel Number	Data Rate
2400-2483.5	LE	2402-2480	0-39 [40]	1 Mbps
Note 1: Bluetooth LE (Low energy) uses GFSK modulation.				

### 1.1.2 Antenna Details

Ant. No.	Brand	Model	Type	Connector	Gain (dBi)
1	Garmin	117-01655-0x	Slot	No	-2.28

### 1.1.3 Power Supply Type of Equipment under Test (EUT)

<b>Power Supply Type</b>	5Vdc from host 3.87Vdc from battery
--------------------------	--

### 1.1.4 Accessories

Accessories		
No.	Equipment	Description
1	Battery	Brand: GARMIN Model: 361-00136-10 Power Rating: 3.87Vdc, 195mAh
2	USB cable	Brand: GARMIN Model: 320-01069-10 Power line: 0.52m shielded without core

### 1.1.5 Channel List

Frequency band (MHz)				2400~2483.5			
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
37	2402	9	2422	18	2442	28	2462
0	2404	10	2424	19	2444	29	2464
1	2406	38	2426	20	2446	30	2466
2	2408	11	2428	21	2448	31	2468
3	2410	12	2430	22	2450	32	2470
4	2412	13	2432	23	2452	33	2472
5	2414	14	2434	24	2454	34	2474
6	2416	15	2436	25	2456	35	2476
7	2418	16	2438	26	2458	36	2478
8	2420	17	2440	27	2460	39	2480

### 1.1.6 Test Tool and Duty Cycle

<b>Test Tool</b>	BLE Test, Version: 1.26	
<b>Duty Cycle and Duty Factor</b>	<b>Duty Cycle (%)</b>	<b>Duty Factor (dB)</b>
	64.65	1.89



### 1.1.7 Power Index of Test Tool

Modulation Mode	Test Frequency (MHz)		
	2402	2440	2480
BT LE-1Mbps	default	default	default

## 1.2 Local Support Equipment List

Support Equipment List					
No.	Equipment	Brand	Model	FCC ID	Remarks
1	Adapter	Samsung	ETA-U90JWS	---	---

## 1.3 Test Setup Chart

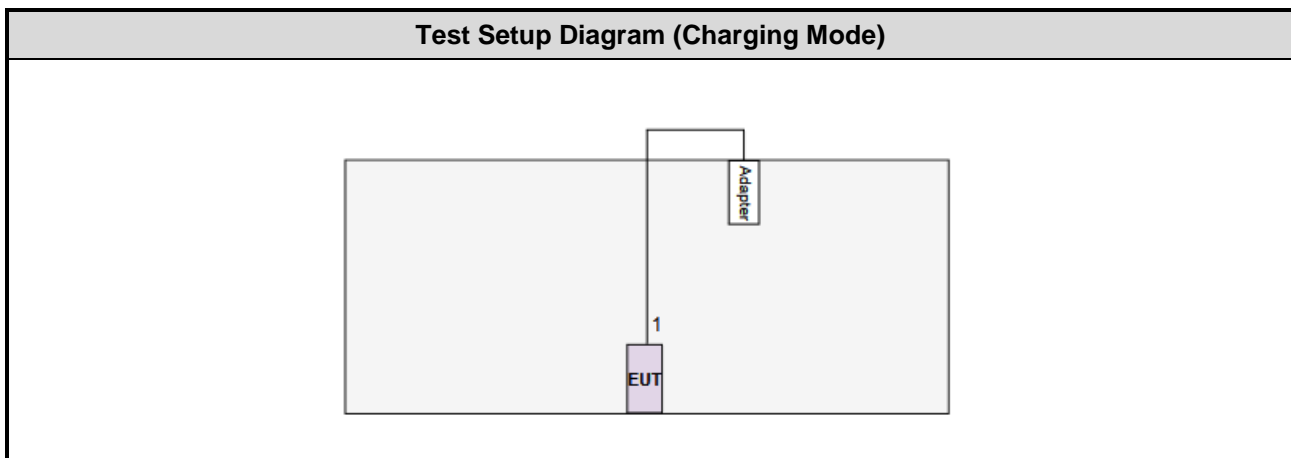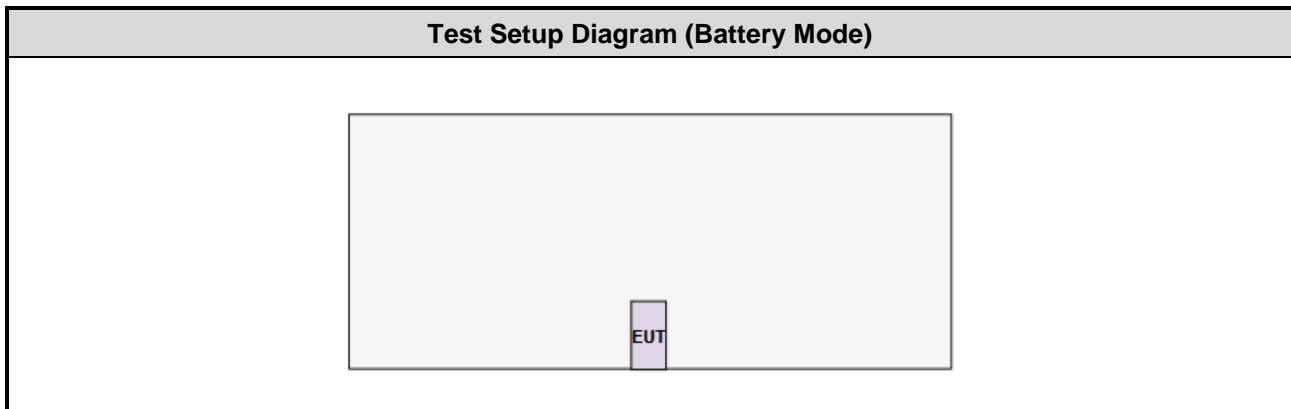

No.	Signal cable / Length (m)
1	USB, 0.52m shielded.

## 1.4 Test Equipment List and Calibration Data

<b>Test Item</b>	Conducted Emission				
<b>Test Site</b>	Conduction room 1 / (CO01-WS)				
<b>Tested Date</b>	May 12, 2021				
<b>Instrument</b>	<b>Brand</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Calibration Date</b>	<b>Calibration Until</b>
Receiver	R&S	ESR3	101658	Feb. 08, 2021	Feb. 07, 2022
LISN	R&S	ENV216	101579	Mar. 17, 2021	Mar. 16, 2022
RF Cable-CON	Woken	CFD200-NL	CFD200-NL-001	Oct. 21, 2020	Oct. 20, 2021
Measurement Software	AUDIX	e3	6.120210k	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

<b>Test Item</b>	Radiated Emission				
<b>Test Site</b>	966 chamber1 / (03CH01-WS)				
<b>Tested Date</b>	May 11, 2021				
<b>Instrument</b>	<b>Brand</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Calibration Date</b>	<b>Calibration Until</b>
Receiver	R&S	ESR3	101657	Mar. 12, 2021	Mar. 11, 2022
Spectrum Analyzer	R&S	FSV40	101498	Dec. 04, 2020	Dec. 03, 2021
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 17, 2020	Nov. 16, 2021
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-522	Jul. 10, 2020	Jul. 09, 2021
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1096	Dec. 11, 2020	Dec. 10, 2021
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Nov. 06, 2020	Nov. 05, 2021
Preamplifier	EMC	EMC02325	980225	Jul. 03, 2020	Jul. 02, 2021
Preamplifier	Agilent	83017A	MY39501308	Sep. 26, 2020	Sep. 25, 2021
Preamplifier	EMC	EMC184045B	980192	Jul. 21, 2020	Jul. 20, 2021
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Oct. 06, 2020	Oct. 05, 2021
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-001	Oct. 06, 2020	Oct. 05, 2021
LF cable 11M	EMC	EMCCFD400-NW-N W-11000	200801	Oct. 06, 2020	Oct. 05, 2021
LF cable 1M	EMC	EMCCFD400-NM-N M-1000	160502	Oct. 06, 2020	Oct. 05, 2021
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16019/4	Oct. 06, 2020	Oct. 05, 2021
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16014/4	Oct. 06, 2020	Oct. 05, 2021
Measurement Software	AUDIX	e3	6.120210g	NA	NA
Note: Calibration Interval of instruments listed above is one year.					



<b>Test Item</b>	RF Conducted				
<b>Test Site</b>	(TH01-WS)				
<b>Tested Date</b>	May 12, 2021				
<b>Instrument</b>	<b>Brand</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Calibration Date</b>	<b>Calibration Until</b>
Spectrum Analyzer	R&S	FSV40	101063	Apr. 19, 2021	Apr. 18, 2022
Power Meter	Anritsu	ML2495A	1241002	Nov. 04, 2020	Nov. 03, 2021
Power Sensor	Anritsu	MA2411B	1207366	Nov. 04, 2020	Nov. 03, 2021
Measurement Software	-	SENSE-15247_FS	V5.10.7.11	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

## 1.5 Test Standards

47 CFR FCC Part 15.247  
ANSI C63.10-2013

## 1.6 Reference Guidance

FCC KDB 558074 D01 15.247 Meas Guidance v05r02

## 1.7 Deviation from Test Standard and Measurement Procedure

None

## 1.8 Measurement Uncertainty

The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)).

Measurement Uncertainty	
Parameters	Uncertainty
Bandwidth	±34.130 Hz
Conducted power	±0.808 dB
Power density	±0.583 dB
Conducted emission	±2.715 dB
AC conducted emission	±2.92 dB
Radiated emission ≤ 1GHz	±3.41 dB
Radiated emission > 1GHz	±4.59 dB

## 2 Test Configuration

### 2.1 Testing Facility

<b>Test Laboratory</b>	International Certification Corporation
<b>Test Site</b>	CO01-WS, 03CH01-WS, TH01-WS
<b>Address of Test Site</b>	No.3-1, Lane 6, Wen San 3rd St., Kwei Shan Dist., Tao Yuan City 33381, Taiwan (R.O.C.)

- FCC Designation No.: TW2732
- FCC site registration No.: 181692
- ISED#: 10807A
- CAB identifier: TW2732

### 2.2 The Worst Test Modes and Channel Details

Test item	Mode	Test Frequency (MHz)	Data Rate	Test Configuration
AC Power Line Conducted Emissions	Charging	---	---	2
Radiated Emissions ≤ 1GHz	BT LE	2402	1Mbps	1
	Charging	---	---	2
Maximum Output Power 6dB bandwidth Power spectral density Radiated Emissions > 1GHz	BT LE	2402, 2440, 2480	1Mbps	1

**NOTE:**

1. The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The **Z-plane** results were found as the worst case and were shown in this report.
2. The EUT had been tested by following test configurations.
  - 1) Configuration 1: Battery mode
  - 2) Configuration 2: Charging mode

## 3 Transmitter Test Results

### 3.1 Conducted Emissions

#### 3.1.1 Limit of Conducted Emissions

Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: \* Decreases with the logarithm of the frequency.

#### 3.1.2 Test Procedures


1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50  $\Omega$  LISN port.
3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
4. This measurement was performed with AC 120V/60Hz

#### 3.1.3 Test Setup




- Note: 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

### 3.1.4 Test Result of Conducted Emissions

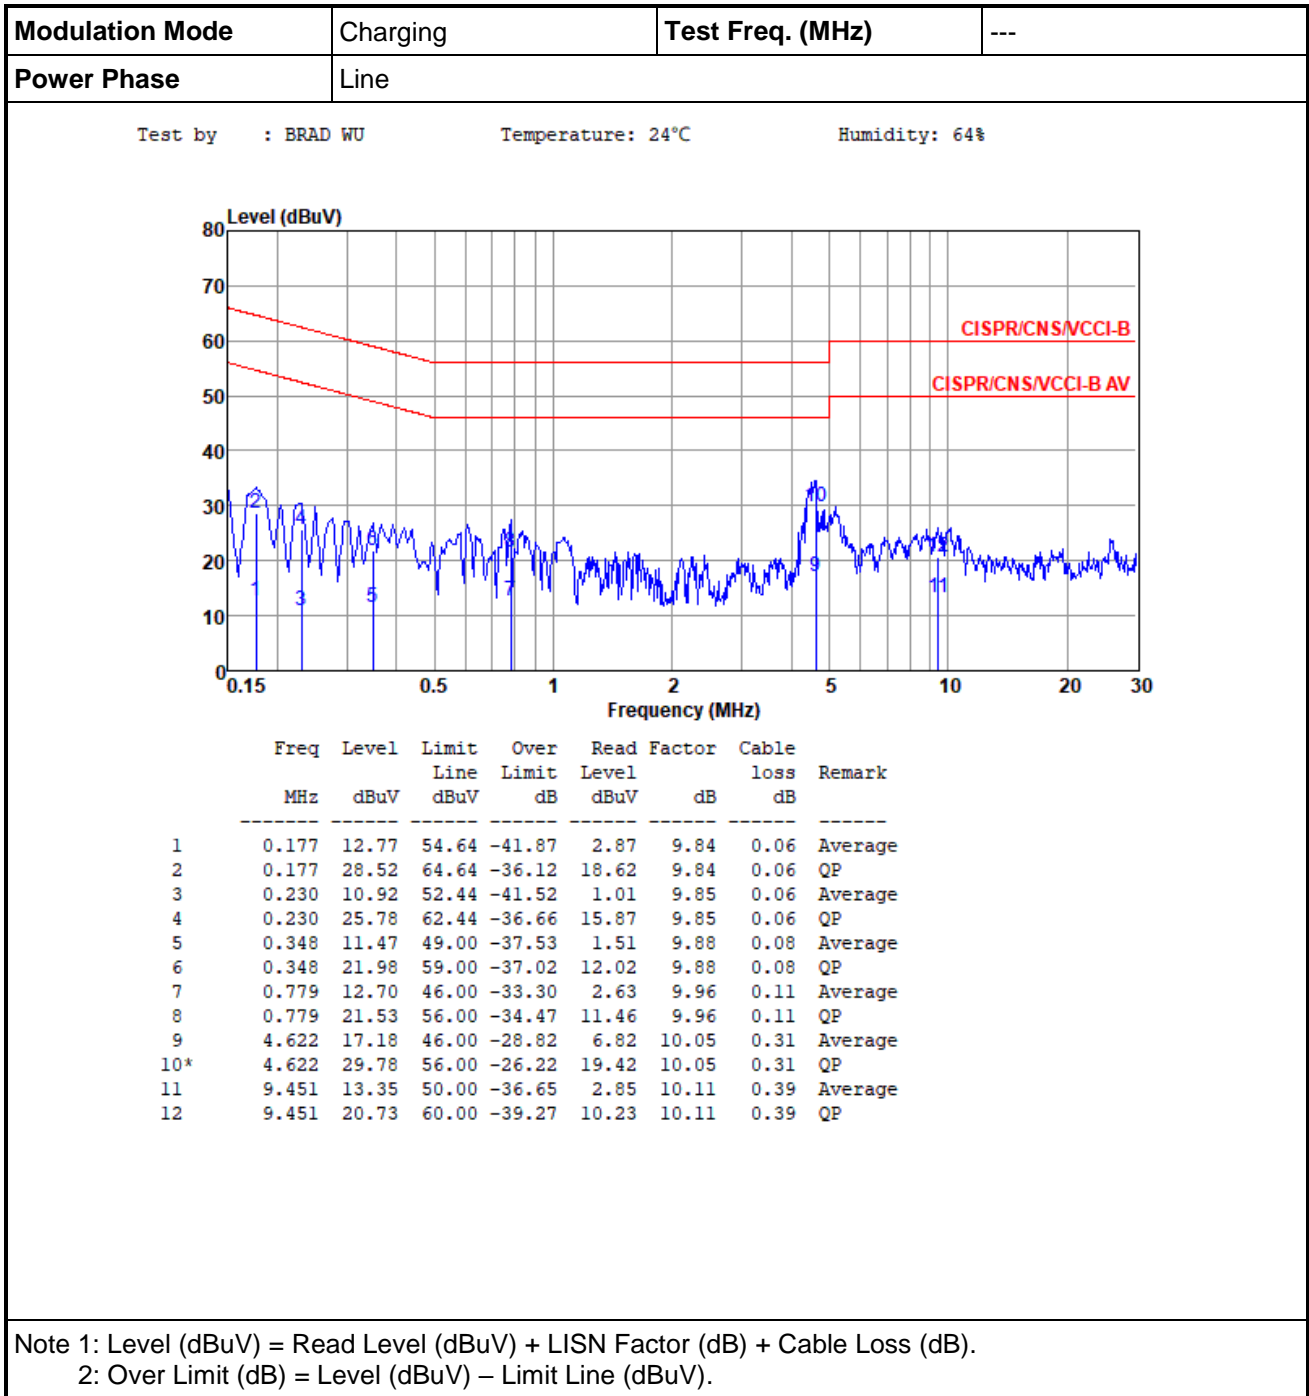

<b>Modulation Mode</b>	Charging	<b>Test Freq. (MHz)</b>	---
<b>Power Phase</b>	Neutral		

Test by : BRAD WU      Temperature: 24°C      Humidity: 64%

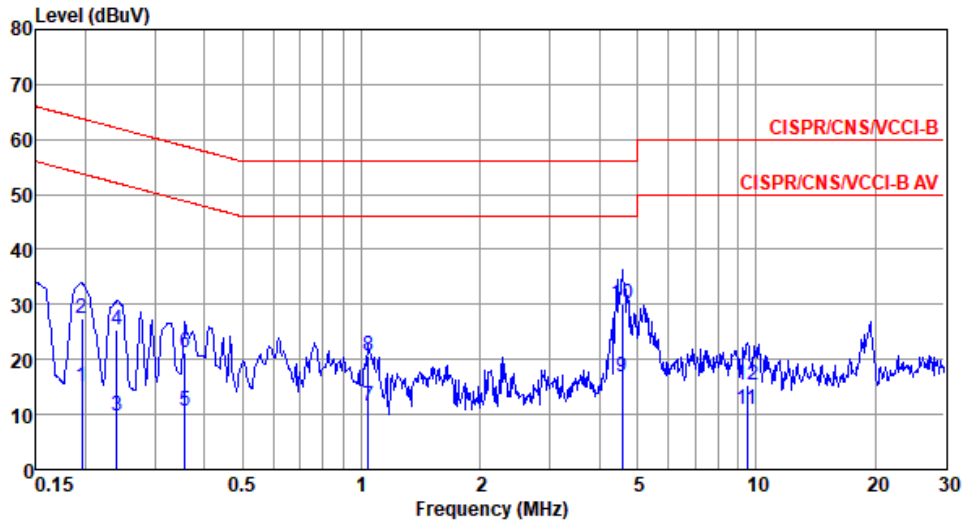

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Remark
1	0.195	15.12	53.80	-38.68	5.23	9.83	0.06	Average
2	0.195	27.44	63.80	-36.36	17.55	9.83	0.06	QP
3	0.240	9.82	52.08	-42.26	-0.09	9.84	0.07	Average
4	0.240	25.29	62.08	-36.79	15.38	9.84	0.07	QP
5	0.358	10.55	48.78	-38.23	0.62	9.85	0.08	Average
6	0.358	21.14	58.78	-37.64	11.21	9.85	0.08	QP
7	1.043	11.55	46.00	-34.45	1.55	9.88	0.12	Average
8	1.043	20.62	56.00	-35.38	10.62	9.88	0.12	QP
9	4.574	16.93	46.00	-29.07	6.64	9.98	0.31	Average
10*	4.574	29.98	56.00	-26.02	19.69	9.98	0.31	QP
11	9.502	10.93	50.00	-39.07	0.46	10.08	0.39	Average
12	9.502	15.34	60.00	-44.66	4.87	10.08	0.39	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).  
 Note 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).

## 3.2 6dB and Occupied Bandwidth

### 3.2.1 Limit of 6dB Bandwidth

The minimum 6dB bandwidth shall be at least 500 kHz.

### 3.2.2 Test Procedures


#### 6dB Bandwidth

1. Set resolution bandwidth (RBW) = 100 kHz, Video bandwidth = 300 kHz.
2. Detector = Peak, Trace mode = max hold.
3. Sweep = auto couple, Allow the trace to stabilize.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

#### Occupied Bandwidth

1. Set resolution bandwidth (RBW) = 1% ~ 5 % of OBW, Video bandwidth = 3 x RBW
2. Detector = Sample, Trace mode = max hold.
3. Sweep = auto couple, Allow the trace to stabilize.
4. Use the OBW measurement function of spectrum analyzer to measure the occupied bandwidth.

### 3.2.3 Test Setup

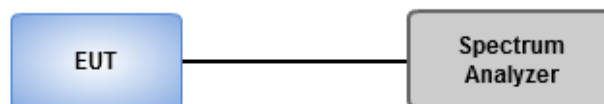

### 3.2.4 Test Result of 6dB and Occupied Bandwidth

<b>Ambient Condition</b>	24°C / 65%	<b>Tested By</b>	Brad Wu
--------------------------	------------	------------------	---------

#### Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
BT-LE(1Mbps)	713.768k	1.038M	1M04F1D	688.406k	1.035M

Max-N dB = Maximum 6dB down bandwidth; Max-OBW = Maximum 99% occupied bandwidth;

Min-N dB = Minimum 6dB down bandwidth; Min-OBW = Minimum 99% occupied bandwidth

#### Result



Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	500k	713.768k	1.038M
2440MHz	Pass	500k	688.406k	1.035M
2480MHz	Pass	500k	695.652k	1.038M

Port X-N dB = Port X 6dB down bandwidth;

Port X-OBW = Port X 99% occupied bandwidth

### BT-LE(1Mbps)



2402MHz

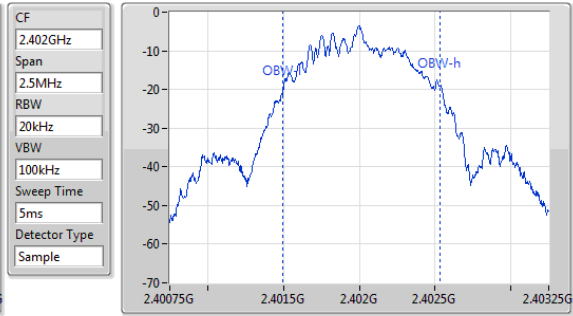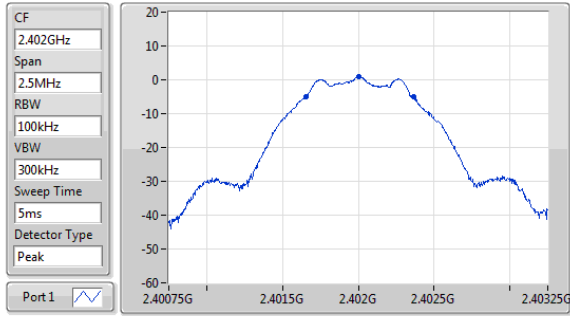

6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
713.768k	2.401652G	2.402366G	1.038M	2.401497G	2.402535G	500k	1

### BT-LE(1Mbps)

2440MHz

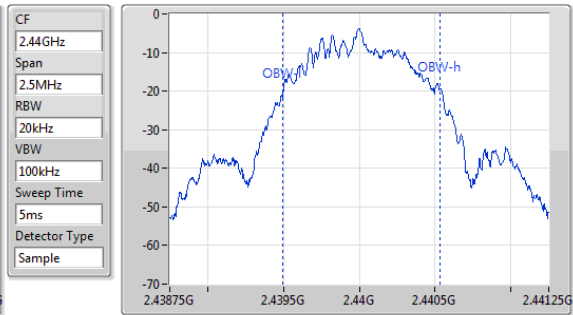
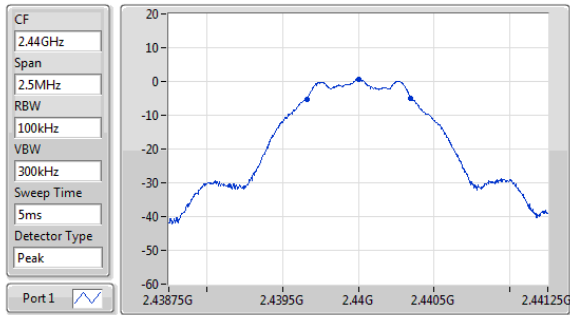


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
688.406k	2.439659G	2.440348G	1.035M	2.439497G	2.440532G	500k	1



### BT-LE(1Mbps)

2480MHz

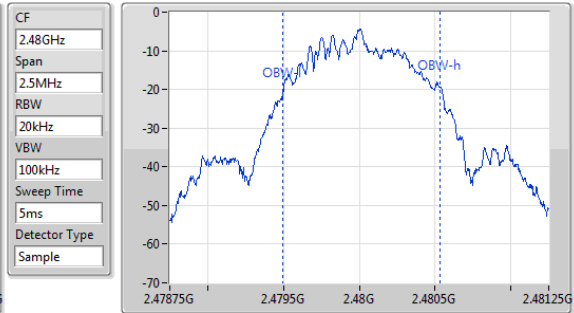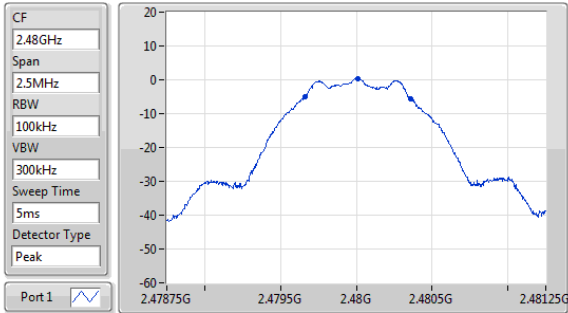

6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
695.652k	2.479663G	2.480359G	1.038M	2.479497G	2.480535G	500k	1

### 3.3 RF Output Power

#### 3.3.1 Limit of RF Output Power


Conducted power shall not exceed 1Watt.

Antenna gain  $\leq 6\text{dBi}$ , no any corresponding reduction is in output power limit.

#### 3.3.2 Test Procedures

A broadband RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.

#### 3.3.3 Test Setup

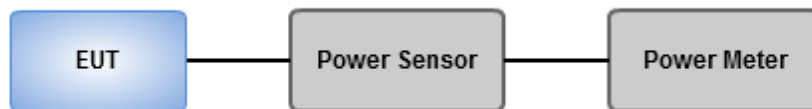

### 3.3.4 Test Result of Maximum Output Power

<b>Ambient Condition</b>	24°C / 65%	<b>Tested By</b>	Brad Wu
--------------------------	------------	------------------	---------

#### Summary of Peak Conducted Output Power

Mode	Power (dBm)	Power (W)
2.4-2.4835GHz	-	-
BT-LE(1Mbps)	2.67	0.00185

#### Result

Mode	Result	Gain (dBi)	Power (dBm)	Power Limit (dBm)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	-2.28	<b>2.67</b>	30.00
2440MHz	Pass	-2.28	2.45	30.00
2480MHz	Pass	-2.28	2.33	30.00

DG = Directional Gain; Port X = Port X output power

#### Summary of Conducted (Average) Output Power

Mode	Power (dBm)	Power (W)
2.4-2.4835GHz	-	-
BT-LE(1Mbps)	2.48	0.00177

#### Result

Mode	Result	Gain (dBi)	Power (dBm)	Power Limit (dBm)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	-2.28	2.48	-
2440MHz	Pass	-2.28	2.29	-
2480MHz	Pass	-2.28	2.15	-

Note: Average power is for reference only.

## 3.4 Power Spectral Density


### 3.4.1 Limit of Power Spectral Density

Power spectral density shall not be greater than 8 dBm in any 3 kHz band.

### 3.4.2 Test Procedures

1. Set the RBW = 3 kHz, VBW = 10 kHz.
2. Detector = Peak, Sweep time = auto couple.
3. Trace mode = max hold, allow trace to fully stabilize.
4. Use the peak marker function to determine the maximum amplitude level.

### 3.4.3 Test Setup



### 3.4.4 Test Result of Power Spectral Density

<b>Ambient Condition</b>	24°C / 65%	<b>Tested By</b>	Brad Wu
--------------------------	------------	------------------	---------

#### Summary

Mode	PD (dBm/3kHz)
2.4-2.4835GHz	-
BT-LE(1Mbps)	-14.07

RBW = 3kHz;

#### Result

Mode	Result	Gain (dBi)	PD (dBm/3kHz)	PD Limit (dBm/3kHz)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	-2.28	-14.07	8.00
2440MHz	Pass	-2.28	-14.09	8.00
2480MHz	Pass	-2.28	-14.69	8.00


DG = Directional Gain

PD =Maximum power density

### BT-LE(1Mbps)

PSD


#### 2402MHz

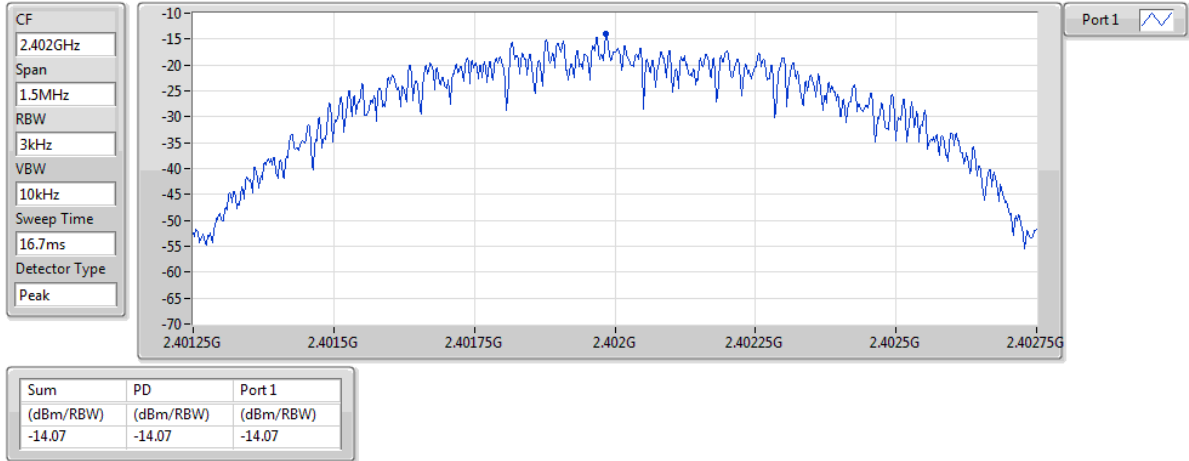

### BT-LE(1Mbps)

PSD


#### 2440MHz

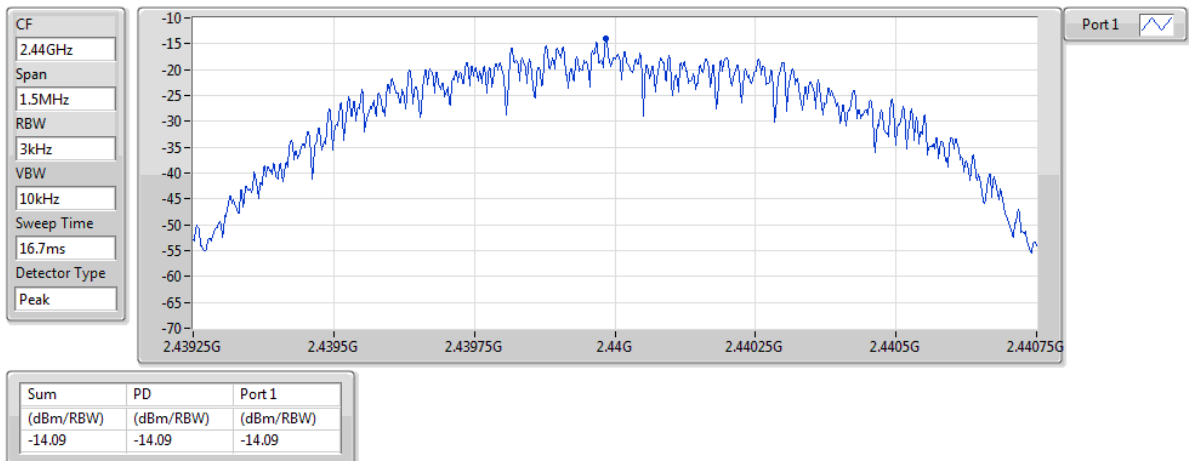

**BT-LE(1Mbps)**

**PSD**

**2480MHz**

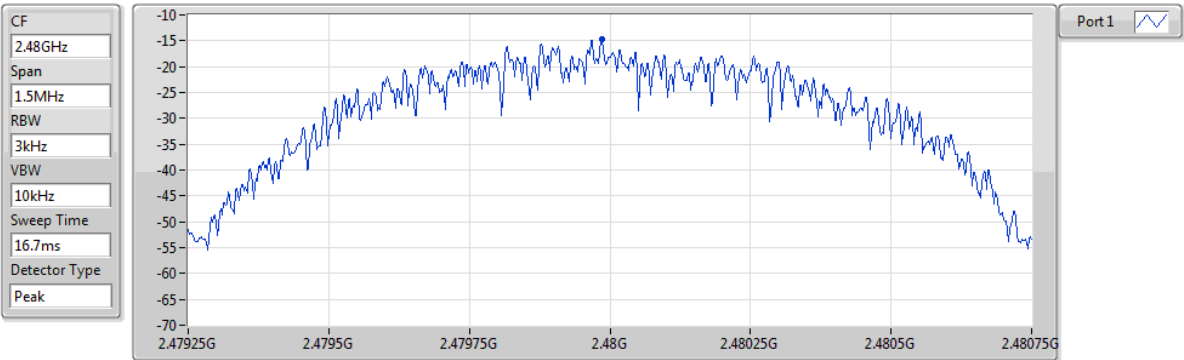

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-14.69	-14.69	-14.69

## 3.5 Emissions in Restricted Frequency Bands

### 3.5.1 Limit of Emissions in Restricted Frequency Bands

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

**Note 1:**  
Quasi-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

**Note 2:**  
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

### 3.5.2 Test Procedures

1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.


Note:

1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.




### 3.5.3 Test Setup

#### Radiated Emissions below 1 GHz

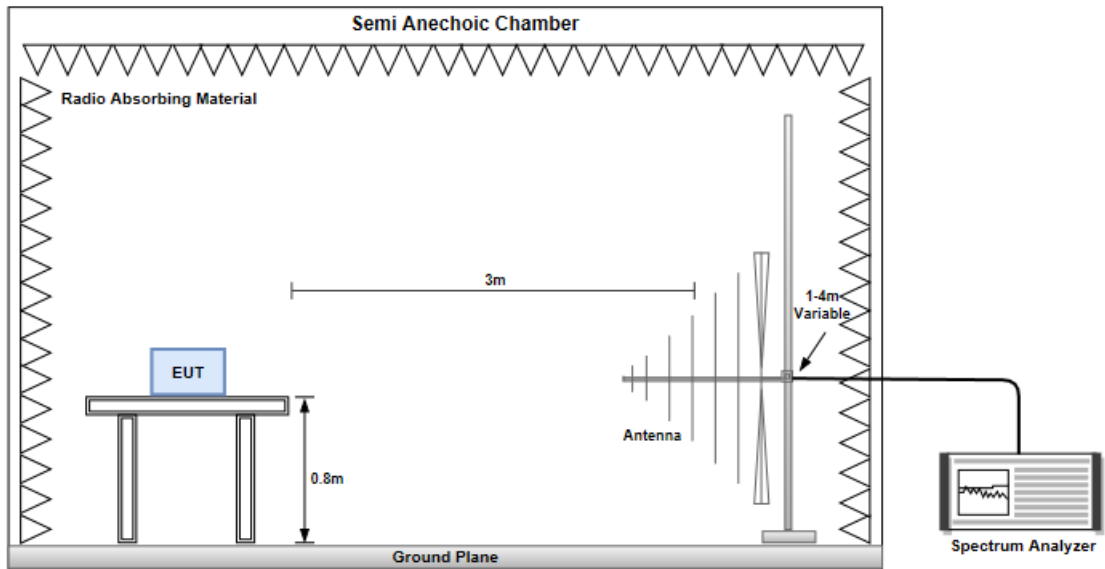


#### Radiated Emissions above 1 GHz

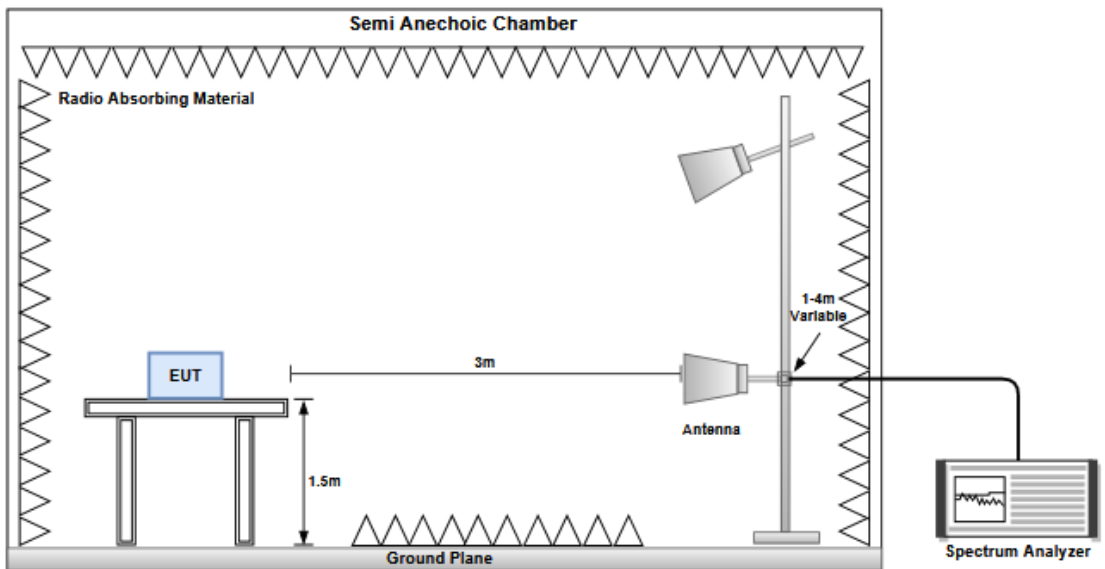


### Configuration 1: Battery mode

#### 3.5.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

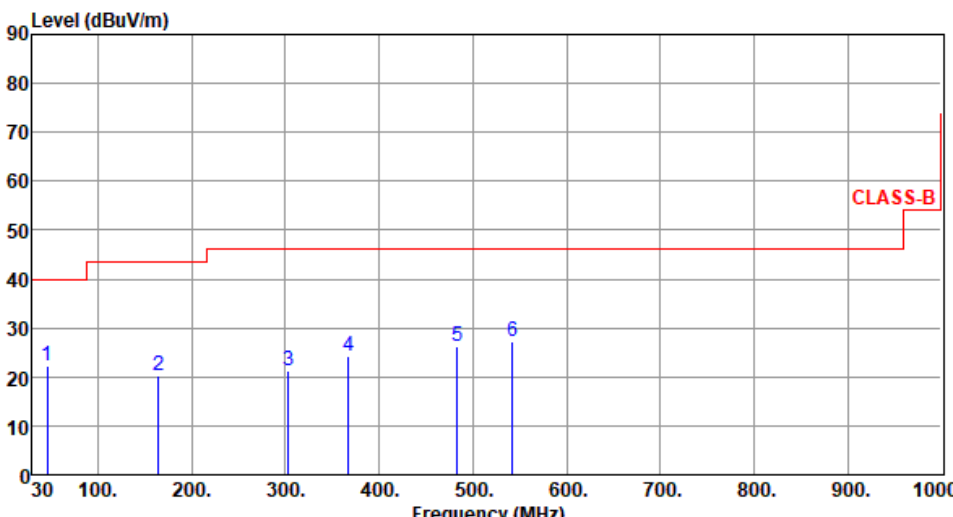Modulation	BT LE	Test Freq. (MHz)	2402																																																																																																																																			
Polarization	Horizontal																																																																																																																																					
Test By : Roger Lu      Temperature(°C):25      Humidity(%):62																																																																																																																																						
 <p>The graph plots Level (dBuV/m) on the y-axis (0 to 90) against Frequency (MHz) on the x-axis (30 to 1000). A red line represents the CLASS-B limit, which is constant at 40 dBuV/m from 30 MHz to 100 MHz, then steps up to 45 dBuV/m from 100 MHz to 1000 MHz. Six blue vertical lines indicate measured peaks at frequencies 1 through 6, with levels around 20-30 dBuV/m.</p>																																																																																																																																						
	<table border="1"> <thead> <tr> <th>1</th> <th>2</th> <th>3</th> <th>4</th> <th>5</th> <th>6</th> </tr> </thead> <tbody> <tr> <td>45.52</td> <td>164.83</td> <td>303.54</td> <td>367.56</td> <td>482.99</td> <td>542.16</td> </tr> <tr> <td>22.15</td> <td>20.39</td> <td>21.38</td> <td>24.36</td> <td>26.34</td> <td>27.21</td> </tr> <tr> <td>40.00</td> <td>43.50</td> <td>46.00</td> <td>46.00</td> <td>46.00</td> <td>46.00</td> </tr> <tr> <td>-17.85</td> <td>-23.11</td> <td>-24.62</td> <td>-21.64</td> <td>-19.66</td> <td>-18.79</td> </tr> <tr> <td>30.44</td> <td>29.41</td> <td>29.41</td> <td>30.65</td> <td>29.99</td> <td>29.77</td> </tr> <tr> <td>-8.29</td> <td>-9.02</td> <td>-8.03</td> <td>-6.29</td> <td>-3.65</td> <td>-2.56</td> </tr> <tr> <td>Peak</td> <td>Peak</td> <td>Peak</td> <td>Peak</td> <td>Peak</td> <td>Peak</td> </tr> <tr> <td>---</td> <td>---</td> <td>---</td> <td>---</td> <td>---</td> <td>---</td> </tr> <tr> <td>---</td> <td>---</td> <td>---</td> <td>---</td> <td>---</td> <td>---</td> </tr> </tbody> </table>	1	2	3	4	5	6	45.52	164.83	303.54	367.56	482.99	542.16	22.15	20.39	21.38	24.36	26.34	27.21	40.00	43.50	46.00	46.00	46.00	46.00	-17.85	-23.11	-24.62	-21.64	-19.66	-18.79	30.44	29.41	29.41	30.65	29.99	29.77	-8.29	-9.02	-8.03	-6.29	-3.65	-2.56	Peak	Peak	Peak	Peak	Peak	Peak	---	---	---	---	---	---	---	---	---	---	---	---	<table border="1"> <thead> <tr> <th>Freq.</th> <th>Emission level</th> <th>Limit</th> <th>Margin</th> <th>SA reading</th> <th>Factor</th> <th>Remark</th> <th>ANT High cm</th> <th>Turn Table deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>45.52</td> <td>22.15</td> <td>40.00</td> <td>-17.85</td> <td>30.44</td> <td>-8.29</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>164.83</td> <td>20.39</td> <td>43.50</td> <td>-23.11</td> <td>29.41</td> <td>-9.02</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>303.54</td> <td>21.38</td> <td>46.00</td> <td>-24.62</td> <td>29.41</td> <td>-8.03</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>367.56</td> <td>24.36</td> <td>46.00</td> <td>-21.64</td> <td>30.65</td> <td>-6.29</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>482.99</td> <td>26.34</td> <td>46.00</td> <td>-19.66</td> <td>29.99</td> <td>-3.65</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>542.16</td> <td>27.21</td> <td>46.00</td> <td>-18.79</td> <td>29.77</td> <td>-2.56</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> </tbody> </table>	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High cm	Turn Table deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m				45.52	22.15	40.00	-17.85	30.44	-8.29	Peak	---	---	164.83	20.39	43.50	-23.11	29.41	-9.02	Peak	---	---	303.54	21.38	46.00	-24.62	29.41	-8.03	Peak	---	---	367.56	24.36	46.00	-21.64	30.65	-6.29	Peak	---	---	482.99	26.34	46.00	-19.66	29.99	-3.65	Peak	---	---	542.16	27.21	46.00	-18.79	29.77	-2.56	Peak	---	---
1	2	3	4	5	6																																																																																																																																	
45.52	164.83	303.54	367.56	482.99	542.16																																																																																																																																	
22.15	20.39	21.38	24.36	26.34	27.21																																																																																																																																	
40.00	43.50	46.00	46.00	46.00	46.00																																																																																																																																	
-17.85	-23.11	-24.62	-21.64	-19.66	-18.79																																																																																																																																	
30.44	29.41	29.41	30.65	29.99	29.77																																																																																																																																	
-8.29	-9.02	-8.03	-6.29	-3.65	-2.56																																																																																																																																	
Peak	Peak	Peak	Peak	Peak	Peak																																																																																																																																	
---	---	---	---	---	---																																																																																																																																	
---	---	---	---	---	---																																																																																																																																	
Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High cm	Turn Table deg																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																																																																																	
45.52	22.15	40.00	-17.85	30.44	-8.29	Peak	---	---																																																																																																																														
164.83	20.39	43.50	-23.11	29.41	-9.02	Peak	---	---																																																																																																																														
303.54	21.38	46.00	-24.62	29.41	-8.03	Peak	---	---																																																																																																																														
367.56	24.36	46.00	-21.64	30.65	-6.29	Peak	---	---																																																																																																																														
482.99	26.34	46.00	-19.66	29.99	-3.65	Peak	---	---																																																																																																																														
542.16	27.21	46.00	-18.79	29.77	-2.56	Peak	---	---																																																																																																																														
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)            *Factor includes antenna factor , cable loss and amplifier gain            Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).            Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.</p>																																																																																																																																						

<b>Modulation</b>	BT LE	<b>Test Freq. (MHz)</b>	2402
<b>Polarization</b>	Vertical		

Test By :Roger Lu      Temperature(°C):25      Humidity(%):62

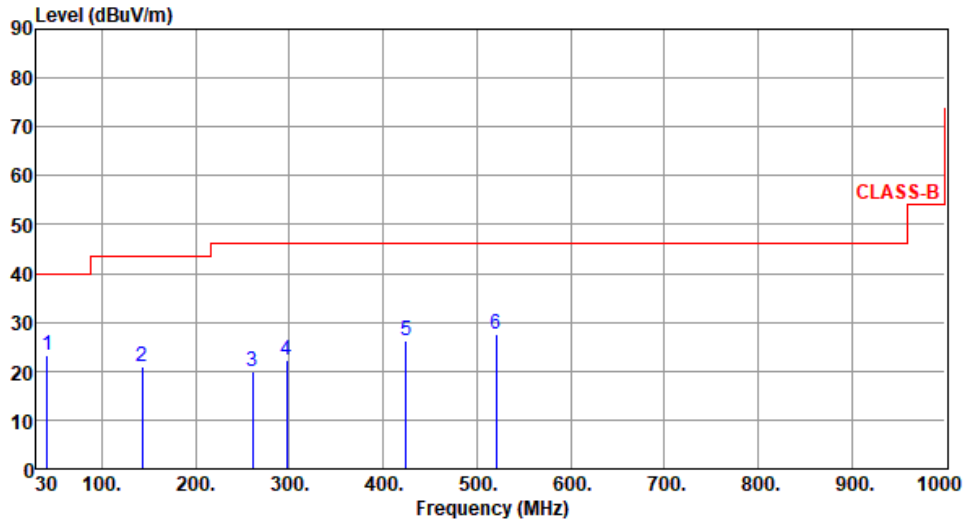

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	41.64	23.09	40.00	-16.91	31.56	-8.47	Peak	---	---
2	142.52	21.01	43.50	-22.49	30.01	-9.00	Peak	---	---
3	260.86	20.05	46.00	-25.95	29.81	-9.76	Peak	---	---
4	296.75	22.32	46.00	-23.68	30.58	-8.26	Peak	---	---
5	424.79	26.40	46.00	-19.60	31.43	-5.03	Peak	---	---
6	520.82	27.73	46.00	-18.27	30.52	-2.79	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.


### 3.5.5 Transmitter Radiated Unwanted Emissions (Above 1GHz)
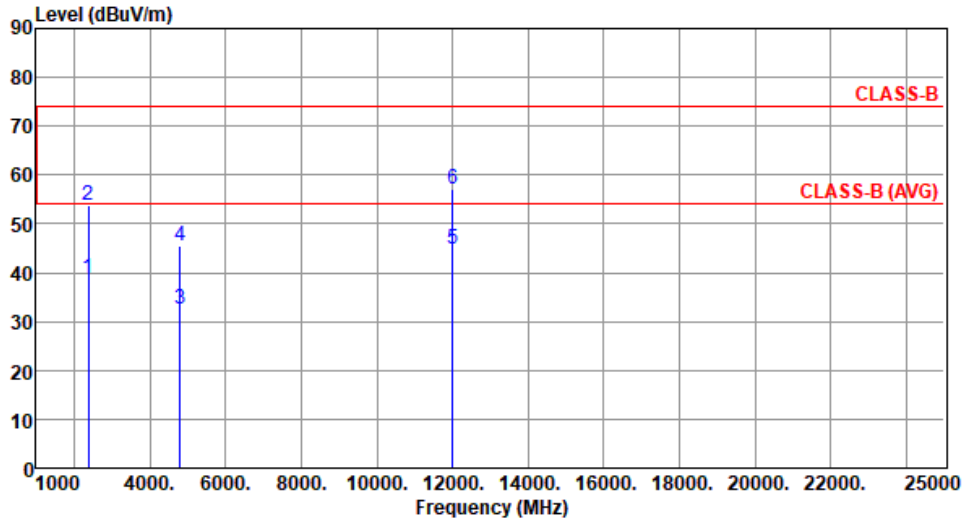
<b>Modulation</b>	BT LE	<b>Test Freq. (MHz)</b>	2402						
<b>Polarization</b>	Horizontal								
Test By : Roger Lu      Temperature(°C):25      Humidity(%):62									
									
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	2390.00	38.78	54.00	-15.22	41.57	-2.79	Average	125	170
2	2390.00	53.80	74.00	-20.20	56.59	-2.79	Peak	125	170
3	4804.00	32.67	54.00	-21.33	29.17	3.50	Average	100	30
4	4804.00	45.59	74.00	-28.41	42.09	3.50	Peak	100	30
5	12010.00	44.93	54.00	-9.07	30.66	14.27	Average	100	80
6	12010.00	57.14	74.00	-16.86	42.87	14.27	Peak	100	80

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)  
\*Factor includes antenna factor , cable loss and amplifier gain  
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	BT LE	<b>Test Freq. (MHz)</b>	2402
<b>Polarization</b>	Vertical		

Test By :Roger Lu      Temperature(°C):25      Humidity(%):62

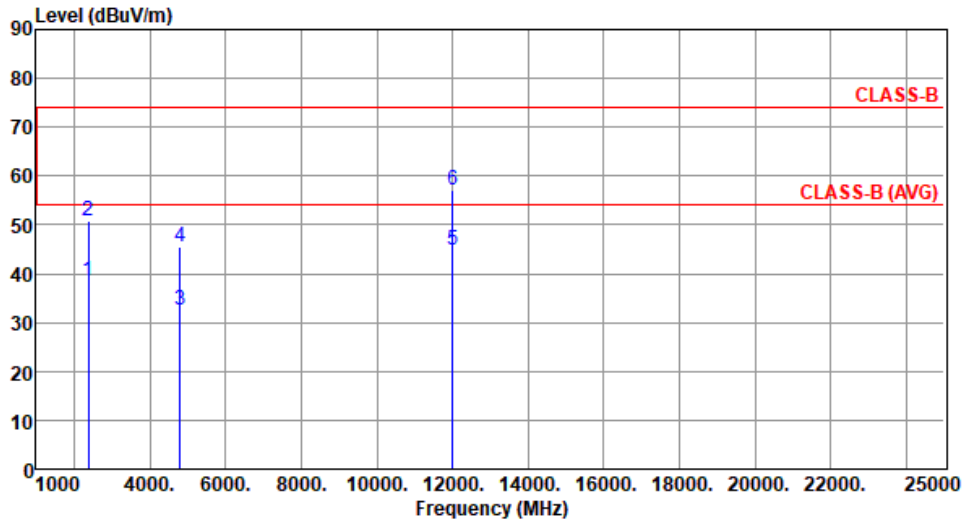

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2390.00	38.61	54.00	-15.39	41.40	-2.79	Average	124	216
2	2390.00	50.72	74.00	-23.28	53.51	-2.79	Peak	124	216
3	4804.00	32.44	54.00	-21.56	28.94	3.50	Average	100	60
4	4804.00	45.47	74.00	-28.53	41.97	3.50	Peak	100	60
5	12010.00	44.79	54.00	-9.21	30.52	14.27	Average	100	70
6	12010.00	56.99	74.00	-17.01	42.72	14.27	Peak	100	70


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	BT LE	<b>Test Freq. (MHz)</b>	2440
<b>Polarization</b>	Horizontal		

Test By :Roger Lu      Temperature(°C):25      Humidity(%):62

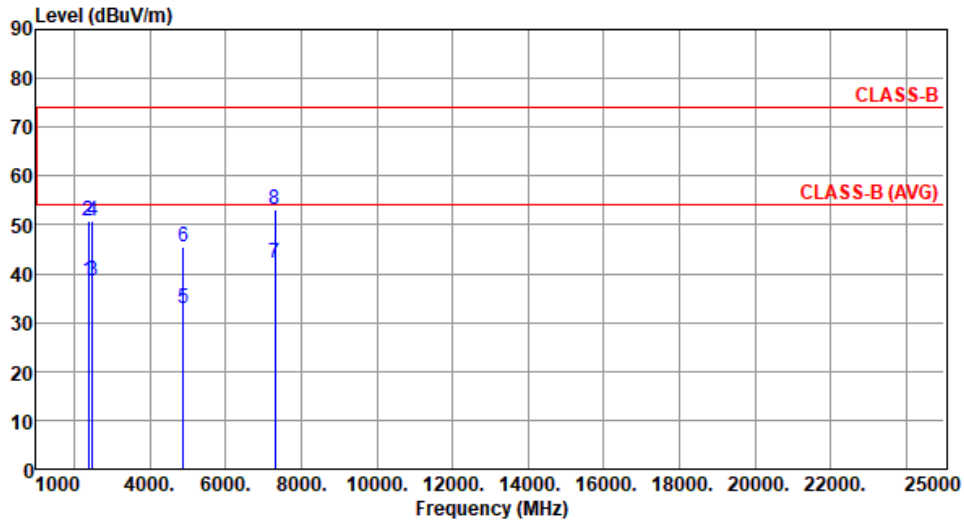

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2390.00	38.59	54.00	-15.41	41.38	-2.79	Average	129	172
2	2390.00	50.82	74.00	-23.18	53.61	-2.79	Peak	129	172
3	2483.50	38.69	54.00	-15.31	41.43	-2.74	Average	129	172
4	2483.50	50.70	74.00	-23.30	53.44	-2.74	Peak	129	172
5	4880.00	32.93	54.00	-21.07	29.46	3.47	Average	100	20
6	4880.00	45.42	74.00	-28.58	41.95	3.47	Peak	100	20
7	7320.00	42.20	54.00	-11.80	33.18	9.02	Average	188	133
8	7320.00	53.22	74.00	-20.78	44.20	9.02	Peak	188	133

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	BT LE	<b>Test Freq. (MHz)</b>	2440						
<b>Polarization</b>	Vertical								
Test By : Roger Lu		Temperature(°C): 25	Humidity(%): 62						
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	2390.00	38.58	54.00	-15.42	41.37	-2.79	Average	123	212
2	2390.00	50.67	74.00	-23.33	53.46	-2.79	Peak	123	212
3	2483.50	38.48	54.00	-15.52	41.22	-2.74	Average	123	212
4	2483.50	50.55	74.00	-23.45	53.29	-2.74	Peak	123	212
5	4880.00	32.54	54.00	-21.46	29.07	3.47	Average	100	40
6	4880.00	45.26	74.00	-28.74	41.79	3.47	Peak	100	40
7	7320.00	41.50	54.00	-12.50	32.48	9.02	Average	100	161
8	7320.00	53.00	74.00	-21.00	43.98	9.02	Peak	100	161
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)  *Factor includes antenna factor , cable loss and amplifier gain  Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>									

<b>Modulation</b>	BT LE	<b>Test Freq. (MHz)</b>	2480
<b>Polarization</b>	Horizontal		

Test By :Roger Lu      Temperature(°C):25      Humidity(%):62

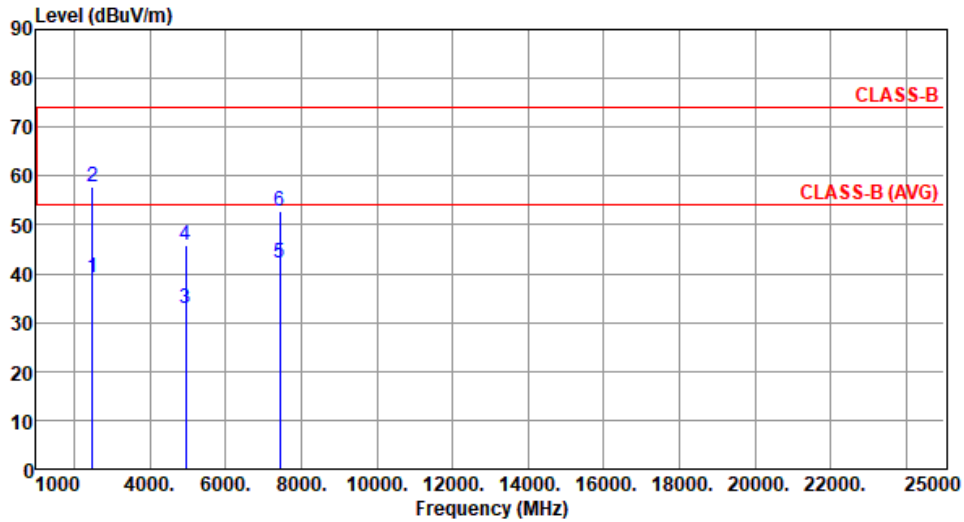

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2483.50	39.33	54.00	-14.67	42.07	-2.74	Average	127	171
2	2483.50	57.88	74.00	-16.12	60.62	-2.74	Peak	127	171
3	4960.00	32.93	54.00	-21.07	29.25	3.68	Average	100	30
4	4960.00	45.78	74.00	-28.22	42.10	3.68	Peak	100	30
5	7440.00	42.18	54.00	-11.82	33.20	8.98	Average	191	122
6	7440.00	52.95	74.00	-21.05	43.97	8.98	Peak	191	122

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



<b>Modulation</b>	BT LE	<b>Test Freq. (MHz)</b>	2480
<b>Polarization</b>	Vertical		

Test By :Roger Lu      Temperature(°C):25      Humidity(%):62

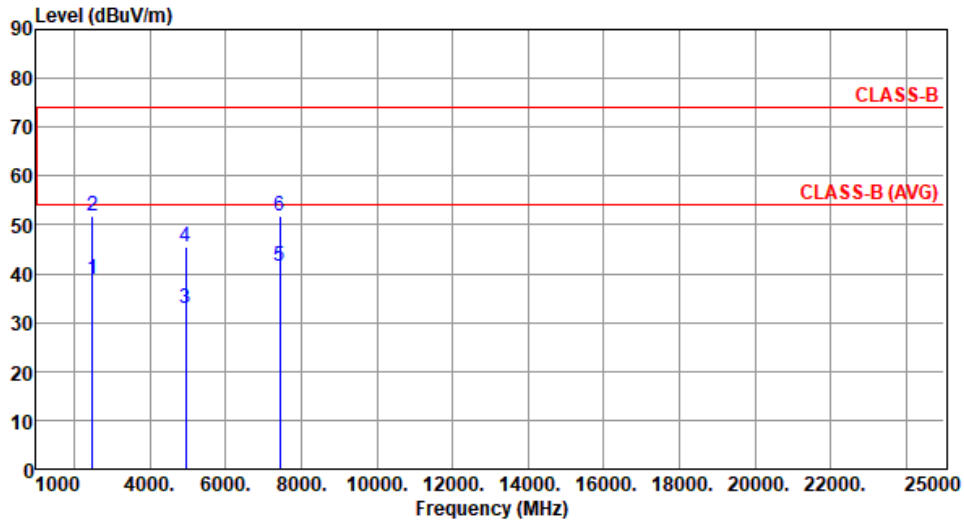

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2483.50	38.79	54.00	-15.21	41.53	-2.74	Average	125	211
2	2483.50	51.73	74.00	-22.27	54.47	-2.74	Peak	125	211
3	4960.00	32.77	54.00	-21.23	29.09	3.68	Average	100	50
4	4960.00	45.61	74.00	-28.39	41.93	3.68	Peak	100	50
5	7440.00	41.40	54.00	-12.60	32.42	8.98	Average	100	165
6	7440.00	51.82	74.00	-22.18	42.84	8.98	Peak	100	165


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

## Configuration 2: Charging mode

### 3.5.6 Transmitter Radiated Unwanted Emissions (Below 1GHz)

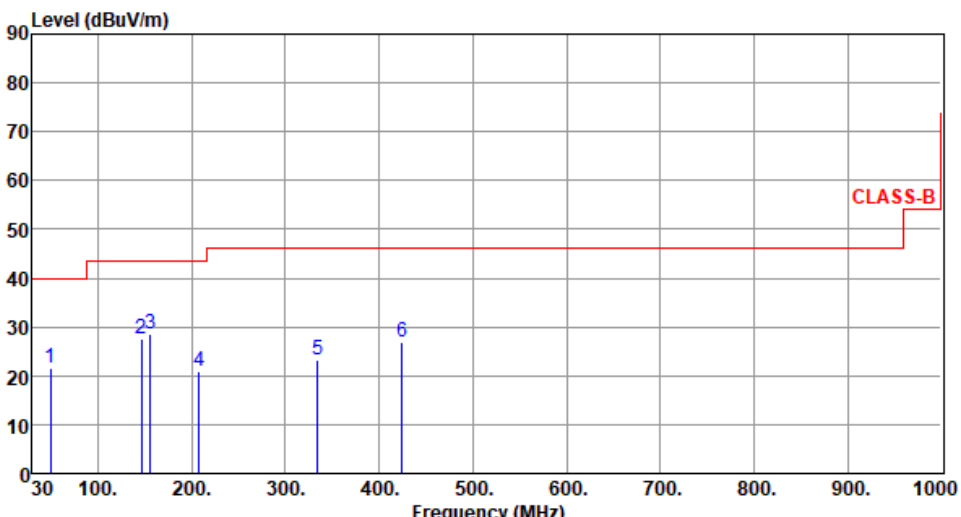Modulation	Charging	Test Freq. (MHz)	---						
Polarization	Horizontal								
Test By : Roger Lu      Temperature(°C):25      Humidity(%):62									
 <p>The graph displays the radiated unwanted emissions for a charging mode transmitter. The y-axis represents the emission level in dBUV/m, ranging from 0 to 90. The x-axis represents the frequency in MHz, ranging from 30 to 1000. A red line indicates the CLASS-B limit, which is constant at 40 dBUV/m from 30 MHz to 100 MHz, then steps up to 45 dBUV/m from 100 MHz to 950 MHz, and finally steps up to 55 dBUV/m from 950 MHz to 1000 MHz. Six emission peaks are identified and numbered 1 through 6, with their respective frequencies and levels marked on the graph.</p>									
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBUV/m	dBUV/m	dB	dBuV	dB/m		cm	deg
1	49.40	21.56	40.00	-18.44	30.01	-8.45	Peak	---	---
2	146.40	27.42	43.50	-16.08	36.45	-9.03	Peak	---	---
3	156.10	28.65	43.50	-14.85	37.49	-8.84	Peak	---	---
4	207.51	20.93	43.50	-22.57	32.90	-11.97	Peak	---	---
5	334.58	23.33	46.00	-22.67	30.40	-7.07	Peak	---	---
6	424.79	26.80	46.00	-19.20	31.83	-5.03	Peak	---	---

Note 1: Emission Level (dBUV/m) = SA Reading (dBuV) + Factor\* (dB/m)  
\*Factor includes antenna factor , cable loss and amplifier gain  
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).  
Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.
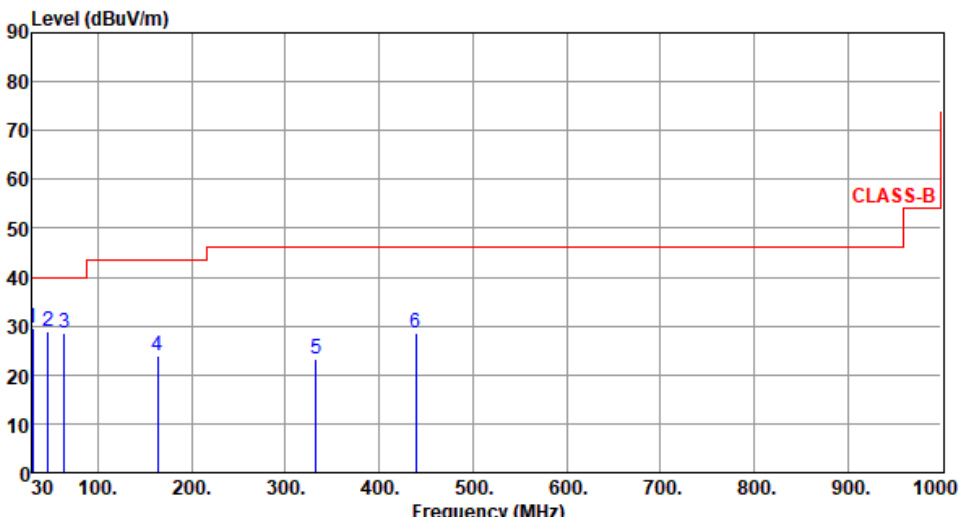
<b>Modulation</b>	Charging	<b>Test Freq. (MHz)</b>	---						
<b>Polarization</b>	Vertical								
Test By : Roger Lu		Temperature(°C): 25			Humidity(%): 62				
									
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	30.00	29.69	40.00	-10.31	39.17	-9.48	Peak	---	---
2	46.49	28.80	40.00	-11.20	37.13	-8.33	Peak	---	---
3	63.95	28.45	40.00	-11.55	37.99	-9.54	Peak	---	---
4	163.86	23.86	43.50	-19.64	32.87	-9.01	Peak	---	---
5	332.64	23.34	46.00	-22.66	30.47	-7.13	Peak	---	---
6	439.34	28.45	46.00	-17.55	33.03	-4.58	Peak	---	---

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor\* (dB/m)  
\*Factor includes antenna factor , cable loss and amplifier gain  
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).  
Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

## 3.6 Emissions in non-restricted Frequency Bands

### 3.6.1 Emissions in non-restricted frequency bands limit

Peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz.

### 3.6.2 Test Procedures


#### Reference level measurement

1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Use the peak marker function to determine the maximum PSD level

#### Emission level measurement



1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Scan Frequency range is up to 25GHz
4. Use the peak marker function to determine the maximum amplitude level


### 3.6.3 Test Setup

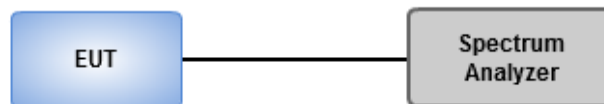

### 3.6.4 Test Result of Emissions in non-restricted Frequency Bands

<b>Ambient Condition</b>	24°C / 65%	<b>Tested By</b>	Brad Wu
--------------------------	------------	------------------	---------

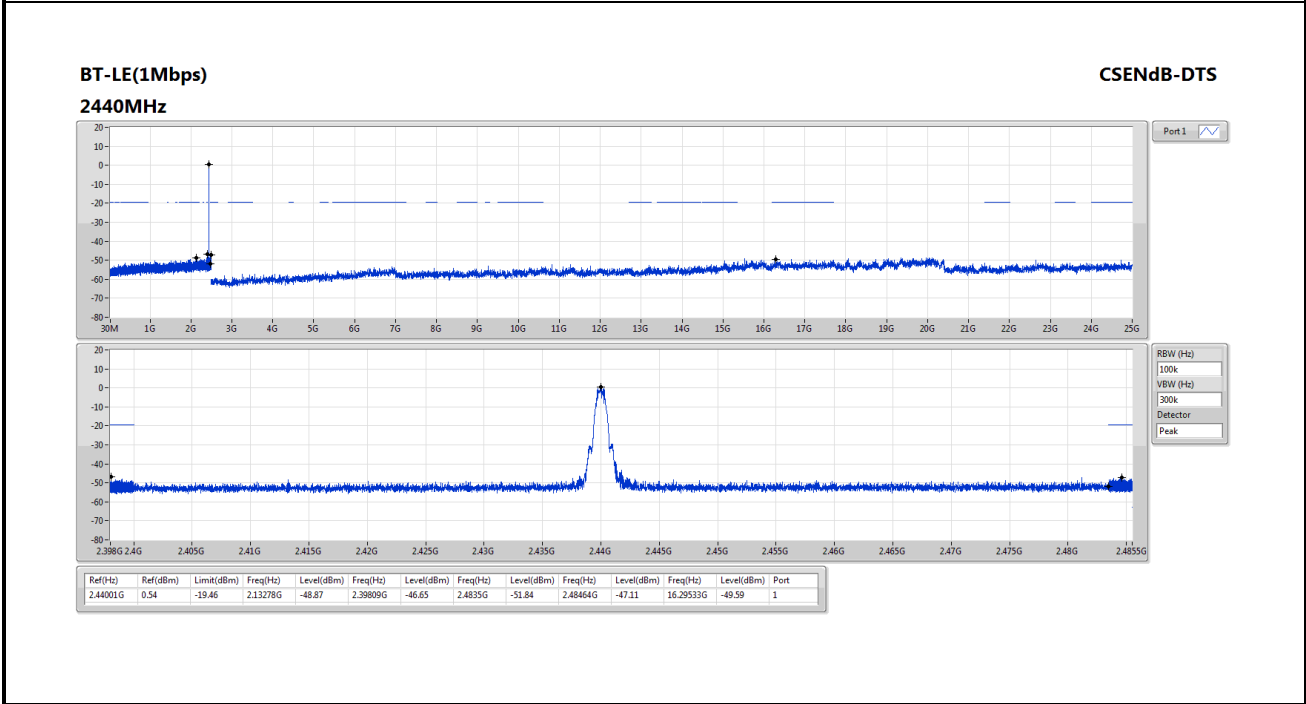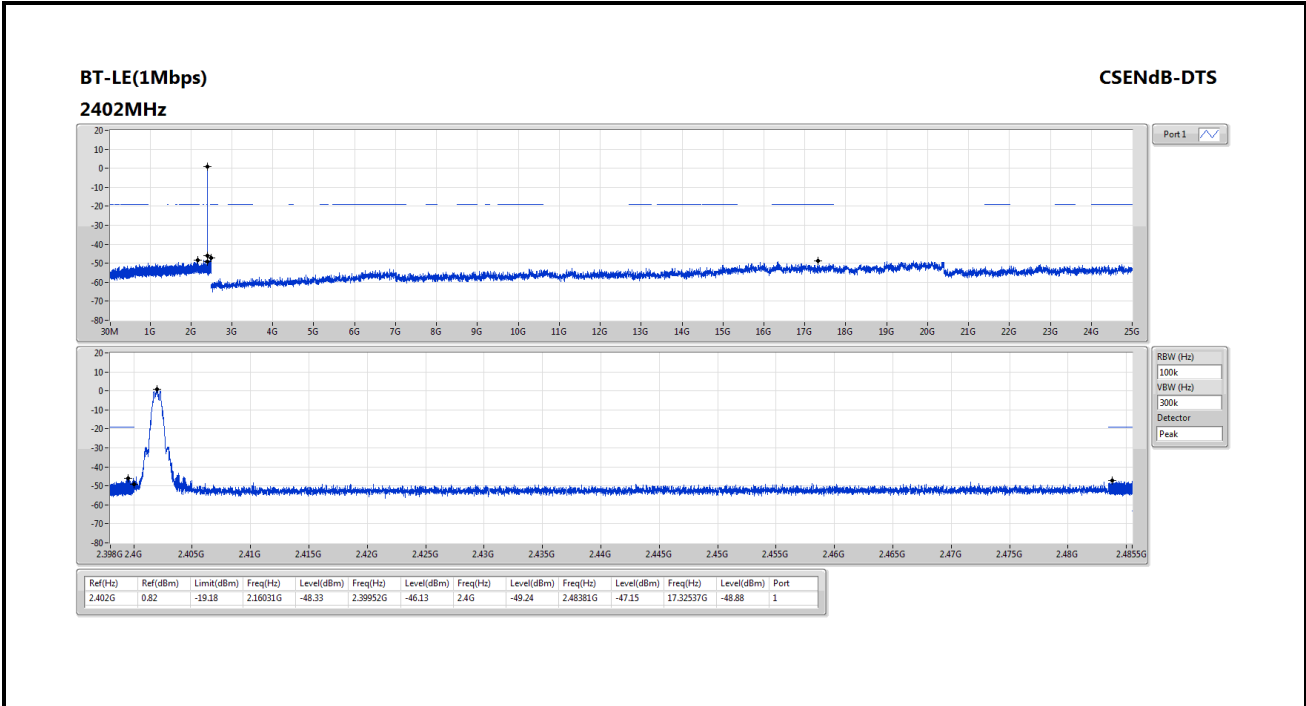

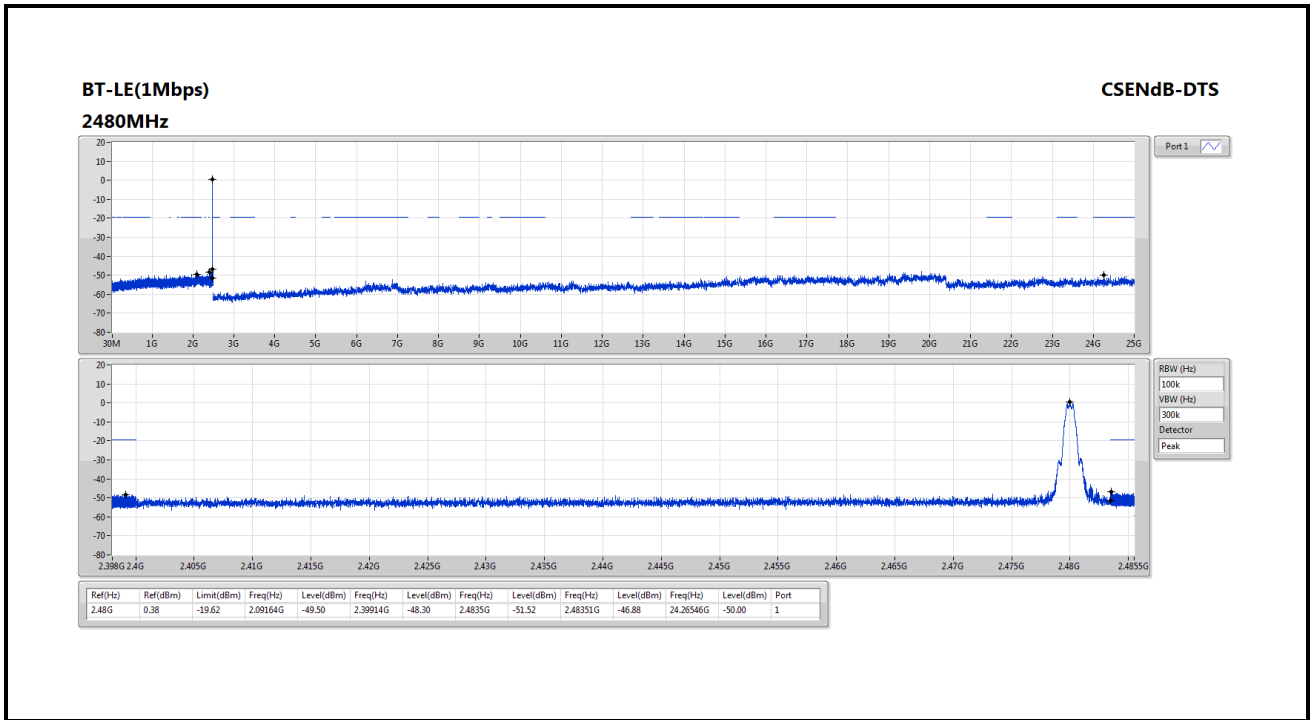

## 4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corporation (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <http://www.icertifi.com.tw>.

### **Linkou**

Tel: 886-2-2601-1640

No.30-2, Ding Fwu Tsuen, Lin Kou  
District, New Taipei City, Taiwan  
(R.O.C.)

### **Kwei Shan**

Tel: 886-3-271-8666

No.3-1, Lane 6, Wen San 3rd  
St., Kwei Shan Dist., Tao Yuan  
City 33381, Taiwan (R.O.C.)  
No.2-1, Lane 6, Wen San 3rd  
St., Kwei Shan Dist., Tao Yuan  
City 33381, Taiwan (R.O.C.)

### **Kwei Shan Site II**

Tel: 886-3-271-8640

No.14-1, Lane 19, Wen San 3rd  
St., Kwei Shan Dist., Tao Yuan  
City 333, Taiwan (R.O.C.)

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666

Fax: 886-3-318-0345

Email: ICC\_Service@icertifi.com.tw

==END==