



## FCC / ISED Test Report

**FOR:**

Garmin International, Inc.

**Model Name:**

A03949

**Product Description:**

Digital transmission system transceiver

**FCC ID:** IPH-03949

**IC ID:** 1792A-03949

**Applied Rules and Standards:**

47 CFR Part 15.247 (DTS)

RSS-247 Issue 2 (DTS) & RSS-Gen Issue 5

**REPORT #:** EMC\_GARMI\_077\_20001\_15.247\_WLAN\_DTS\_R3

**DATE:** 2021-01-29



A2LA Accredited

IC recognized #  
3462B-2

CABID: US0187

**CETECOM Inc.**

411 Dixon Landing Road • Milpitas, CA 95035 • U.S.A.

Phone: + 1 (408) 586 6200 • Fax: + 1 (408) 586 6299 • E-mail: [info@cetecom.com](mailto:info@cetecom.com) • <http://www.cetecom.com>

CETECOM Inc. is a Delaware Corporation with Corporation number: 2905571

## TABLE OF CONTENTS

|           |                                                                           |            |
|-----------|---------------------------------------------------------------------------|------------|
| <b>1</b>  | <b>ASSESSMENT .....</b>                                                   | <b>3</b>   |
| <b>2</b>  | <b>ADMINISTRATIVE DATA.....</b>                                           | <b>4</b>   |
| 2.1       | IDENTIFICATION OF THE TESTING LABORATORY ISSUING THE EMC TEST REPORT..... | 4          |
| 2.2       | IDENTIFICATION OF THE CLIENT .....                                        | 4          |
| 2.3       | IDENTIFICATION OF THE MANUFACTURER .....                                  | 4          |
| <b>3</b>  | <b>EQUIPMENT UNDER TEST (EUT) .....</b>                                   | <b>5</b>   |
| 3.1       | EUT SPECIFICATIONS .....                                                  | 5          |
| 3.2       | EUT SAMPLE DETAILS .....                                                  | 6          |
| 3.3       | ACCESSORY EQUIPMENT DETAILS .....                                         | 6          |
| 3.4       | SUPPORT EQUIPMENT .....                                                   | 6          |
| 3.5       | TEST SAMPLE CONFIGURATION.....                                            | 7          |
| 3.6       | JUSTIFICATION FOR WORST CASE MODE OF OPERATION .....                      | 7          |
| <b>4</b>  | <b>SUBJECT OF INVESTIGATION .....</b>                                     | <b>7</b>   |
| <b>5</b>  | <b>MEASUREMENT RESULTS SUMMARY .....</b>                                  | <b>8</b>   |
| <b>6</b>  | <b>MEASUREMENTS.....</b>                                                  | <b>9</b>   |
| 6.1       | MEASUREMENT UNCERTAINTY .....                                             | 9          |
| 6.2       | ENVIRONMENTAL CONDITIONS DURING TESTING:.....                             | 9          |
| 6.3       | DATES OF TESTING: .....                                                   | 9          |
| <b>7</b>  | <b>MEASUREMENT PROCEDURES.....</b>                                        | <b>10</b>  |
| 7.1       | RADIATED MEASUREMENT .....                                                | 10         |
| <b>8</b>  | <b>TEST RESULT DATA.....</b>                                              | <b>13</b>  |
| 8.1       | DUTY CYCLE .....                                                          | 13         |
| 8.2       | MAXIMUM CONDUCTED OUTPUT POWER .....                                      | 20         |
| 8.3       | POWER SPECTRAL DENSITY .....                                              | 40         |
| 8.4       | BAND EDGE COMPLIANCE.....                                                 | 51         |
| 8.5       | EMISSION BANDWIDTH 6 dB AND 99% OCCUPIED BANDWIDTH .....                  | 72         |
| 8.6       | RADIATED TRANSMITTER SPURIOUS EMISSIONS AND RESTRICTED BANDS.....         | 92         |
| 8.7       | AC POWER LINE CONDUCTED EMISSIONS .....                                   | 106        |
| <b>9</b>  | <b>TEST SETUP PHOTOS.....</b>                                             | <b>108</b> |
| <b>10</b> | <b>TEST EQUIPMENT AND ANCILLARIES USED FOR TESTING .....</b>              | <b>108</b> |
| <b>11</b> | <b>REVISION HISTORY .....</b>                                             | <b>109</b> |

## 1 Assessment

The following device was evaluated against the applicable criteria specified in FCC rules Parts 15.247 of Title 47 of the Code of Federal Regulations and the relevant ISSED Canada standard RSS-247.

No deviations were ascertained.

| Company                    | Description                             | Model # |
|----------------------------|-----------------------------------------|---------|
| Garmin International, Inc. | Digital transmission system transceiver | A03949  |

### Responsible for Testing Laboratory:

| 2021-01-29 | Compliance | Cindy Li<br>(Lab Manager) |           |
|------------|------------|---------------------------|-----------|
| Date       | Section    | Name                      | Signature |

### Responsible for the Report:

| 2021-01-29 | Compliance | Yuchan Lu<br>(Test Engineer) |           |
|------------|------------|------------------------------|-----------|
| Date       | Section    | Name                         | Signature |

The test results of this test report relate exclusively to the test item specified in Section 3.  
CETECOM Inc. USA does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM Inc. USA.

## 2 Administrative Data

### 2.1 Identification of the Testing Laboratory Issuing the EMC Test Report

|                                    |                        |
|------------------------------------|------------------------|
| <b>Company Name:</b>               | CETECOM Inc.           |
| <b>Department:</b>                 | Compliance             |
| <b>Street Address:</b>             | 411 Dixon Landing Road |
| <b>City/Zip Code</b>               | Milpitas, CA 95035     |
| <b>Country</b>                     | USA                    |
| <b>Telephone:</b>                  | +1 (408) 586 6200      |
| <b>Fax:</b>                        | +1 (408) 586 6299      |
| <b>EMC Lab Manager:</b>            | Cindy Li               |
| <b>Responsible Project Leader:</b> | Sangeetha Sivaraman    |

### 2.2 Identification of the Client

|                        |                            |
|------------------------|----------------------------|
| <b>Client's Name:</b>  | Garmin International, Inc. |
| <b>Street Address:</b> | 1200 East 151st Street     |
| <b>City/Zip Code:</b>  | Olathe, KS 66062           |
| <b>Country:</b>        | USA                        |

### 2.3 Identification of the Manufacturer

|                               |                                        |
|-------------------------------|----------------------------------------|
| <b>Manufacturer's Name:</b>   | Garmin Corporation                     |
| <b>Manufacturers Address:</b> | No. 68, Zhangshu 2nd Rd., Xizhi Dist., |
| <b>City/Zip Code</b>          | New Taipei City 221,                   |
| <b>Country</b>                | TAIWAN, R.O.C.                         |

### 3 Equipment Under Test (EUT)

#### 3.1 EUT Specifications

|                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|-----------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Model No:</b>                                    | A03949                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>HW Version :</b>                                 | 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>SW Version :</b>                                 | 1.13                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>FCC-ID:</b>                                      | IPH-03949                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>IC-ID:</b>                                       | 1792A-03949                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>HVIN:</b>                                        | A03949                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>PMN:</b>                                         | N/A                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Product Description:</b>                         | Digital transmission system transceiver                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Frequency Range / number of channels:</b>        | Manufacture: Microchip<br>Module name/number: ATWILC1000<br>Nominal band: 2400 MHz – 2483.5 MHz;<br>Center to center: 2412 MHz (ch 1) – 2462 MHz (ch 11), 11 channels                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Type(s) of Modulation:</b>                       | BPSK, QPSK, 16-QAM, 64QAM                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Modes of Operation:</b>                          | 802.11b/g/n, 20MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Antenna Information as declared:</b>             | <ul style="list-style-type: none"> <li>1.6 dBi</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Max Output Power:</b>                            | Conducted Power 9.49 dBm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Power Supply/ Rated Operating Voltage Range:</b> | Vmin: 3.5 VDC/ Vnom: 3.9 VDC / Vmax: 4.35 VDC                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Operating Temperature Range:</b>                 | Low -20°C, Nominal 25°C, High 60°C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Other Radios included in the device:</b>         | <ul style="list-style-type: none"> <li>❖ <u>LTE</u> <ul style="list-style-type: none"> <li>• Manufacture: Murata</li> <li>• Module name/number: LBAD0XX1SC</li> <li>• FCC ID: HSW-TY1SC</li> <li>• IC ID: 4492A-TY1SC</li> </ul> </li> <li>❖ <u>Classic BT, BLE, ANT</u> <ul style="list-style-type: none"> <li>• Manufacture: Cypress</li> <li>• Module name/number: BCM20719</li> </ul> </li> <li>❖ <u>NFC</u> <ul style="list-style-type: none"> <li>• Manufacture: NXP</li> <li>• Module name/number: SN100T</li> </ul> </li> <li>❖ <u>GNSS/GPS</u></li> </ul> |

|                         |                                                                                                                                       |
|-------------------------|---------------------------------------------------------------------------------------------------------------------------------------|
|                         | <ul style="list-style-type: none"> <li>• Manufacture: Garmin proprietary</li> </ul>                                                   |
| <b>Sample Revision:</b> | <input type="checkbox"/> Prototype Unit; <input type="checkbox"/> Production Unit; <input checked="" type="checkbox"/> Pre-Production |

### 3.2 EUT Sample details

| EUT # | Serial Number | HW Version | SW Version | Notes/Comments     |
|-------|---------------|------------|------------|--------------------|
| 1     | 3340894753    | 1          | 1.13       | Radiated Emissions |
| 2     | 340894642     | 1          | 1.13       | Conducted RF       |

### 3.3 Accessory Equipment details

| AE # | Type               | Manufacture | Model | P/N |
|------|--------------------|-------------|-------|-----|
| 1    | Charging USB Cable | -           | -     | -   |

### 3.4 Support Equipment

| SE # | Description                                                |
|------|------------------------------------------------------------|
| 1    | AC/DC Converter, Manufacture: PHIHONG, Model: PSAI05R-050Q |
| 2    | Laptop, Dell Latitude 7490                                 |

### 3.5 Test Sample Configuration

| EUT Set-up # | Combination of AE used for test set up | Comments                                                                                                                                                                                                                                                                                                                                                                                                                               |
|--------------|----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1            | EUT#1+ AE#1                            | <p>Buttons on the EUT in test mode used to configure the WLAN radio to 802.11n low, mid and high channels provided by the client that will not be available to the end user.</p> <p>LTE CAT M1 Band 4 mid Channel (1732.5 MHz) is co-transmitting simultaneously using command window to configure provided by client that is not available to the end user.</p> <p>For radiated measurements, the internal antenna was connected.</p> |

### 3.6 Justification for Worst Case Mode of Operation

During the testing process, the EUT was tested with transmitter sets on WLAN 802.11n low, mid and high channels, and co-transmitting with LTE radio on LTE CAT M1 Band 4 Mid Channel (1732.5MHz). The EUT was configured to the highest duty cycle and maximum output power.

For radiated measurements, all data in this report shows the worst case between horizontal and vertical antenna polarizations and for all orientations of the EUT.

## 4 Subject of Investigation

The objective of the measurements done by CETECOM Inc. was to assess the performance of the EUT according to the relevant requirements specified in FCC rules Part 15.247 of Title 47 of the Code of Federal Regulations and Radio Standard Specification RSS-247 of ISED Canada.

Testing procedures are based on 558074 D01 DTS Meas Guidance v05r02 – “GUIDANCE FOR PERFORMING COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEMS (DTS) OPERATING UNDER SECTION 15.247” - April 2, 2019, by the Federal Communications Commission, Office of Engineering and Technology, Laboratory Division.

## 5 Measurement Results Summary

| Test Specification                           | Test Case                                       | Temperature and Voltage Conditions | Mode            | Pass | NA | NP | Result   |
|----------------------------------------------|-------------------------------------------------|------------------------------------|-----------------|------|----|----|----------|
| §15.247(a)(1)<br>RSS-247 5.2(1)              | Emission Bandwidth                              | Nominal                            | 802.11<br>b/g/n | ■    | □  | □  | Complies |
| §15.247(e)<br>RSS-247 5.2(2)                 | Power Spectral Density                          | Nominal                            | 802.11<br>b/g/n | ■    | □  | □  | Complies |
| §15.247(b)(1)<br>RSS-247 5.4(4)              | Maximum Conducted Output Power and EIRP         | Nominal                            | 802.11<br>b/g/n | ■    | □  | □  | Complies |
| §15.247(d)<br>RSS-247 5.5                    | Band edge compliance<br>Unrestricted Band Edges | Nominal                            | 802.11<br>b/g/n | ■    | □  | □  | Complies |
| §15.247; 15.209; 15.205<br>RSS-Gen 8.9; 8.10 | Band edge compliance<br>Restricted Band Edges   | Nominal                            | 802.11<br>b/g/n | ■    | □  | □  | Complies |
| §15.247(d); §15.209<br>RSS-Gen 6.13          | TX Spurious emissions-<br>Radiated              | Nominal                            | 802.11n         | ■    | □  | □  | Complies |
| §15.207(a)<br>RSS Gen 8.8                    | AC Conducted Emissions                          | Nominal                            | 802.11n         | ■    | □  | □  | Complies |

**Note1:** NA= Not Applicable; NP= Not Performed.

## **6 Measurements**

### **6.1 Measurement Uncertainty**

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus, with 95% confidence interval (in dB delta to result), based on a coverage factor  $k=1$ .

#### Radiated measurement

|                    |                                      |
|--------------------|--------------------------------------|
| 9 kHz to 30 MHz    | $\pm 2.5$ dB (Magnetic Loop Antenna) |
| 30 MHz to 1000 MHz | $\pm 2.0$ dB (Biconilog Antenna)     |
| 1 GHz to 40 GHz    | $\pm 2.3$ dB (Horn Antenna)          |

#### Conducted measurement

|                   |                     |
|-------------------|---------------------|
| 150 kHz to 30 MHz | $\pm 0.7$ dB (LISN) |
|-------------------|---------------------|

|                          |              |
|--------------------------|--------------|
| RF conducted measurement | $\pm 0.5$ dB |
|--------------------------|--------------|

According to TR 102 273 a multiplicative propagation of error is assumed for RF measurement systems. For this reason the RMS method is applied to dB values and not to linear values as appropriate for additive propagation of error. Also used: <http://physics.nist.gov/cuu/Uncertainty/typeb.html>. The above calculated uncertainties apply to direct application of the Substitution method. The Substitution method is always used when the EUT comes closer than 3 dB to the limit.

### **6.2 Environmental Conditions During Testing:**

The following environmental conditions were maintained during the course of testing:

- Ambient Temperature: 20-25°C
- Relative humidity: 40-60%

### **6.3 Dates of Testing:**


08/31/2020 -- 10/14/2020

## 7 Measurement Procedures


### 7.1 Radiated Measurement

The radiated measurement is performed according to ANSI C63.10 (2013)


- The exploratory measurement is accomplished by running a matrix of 16 sweeps over the required frequency range with R&S Test-SW EMC32 for 4 positions of the turntable, two orthogonal positions of the EUT and both antenna polarizations. This procedure exceeds the requirement of the above standards to cover the 3 orthogonal axis of the EUT. A max peak detector is utilized during the exploratory measurement. The Test-SW creates an overall maximum trace for all 12 sweeps and saves the settings for each point of this trace. The maximum trace is part of the test report.
- The 10 highest emissions are selected with an automatic algorithm of EMC32 searching for peaks in the noise floor and ensuring that broadband signals are not selected multiple times.
- The maxima are then put through the final measurement and again maximized in a 90deg range of the turntable, fine search in frequency domain and height scan between 1m and 4m.
- The above procedure is repeated for all possible ways of power supply to EUT and for all supported modulations.
- In case there are no emissions above noise floor level only the maximum trace is reported as described above.
- The results are split up into up to 4 frequency ranges due to antenna bandwidth restrictions. A magnetic loop is used from 9 kHz to 30 MHz, a Biconilog antenna is used from 30 MHz to 1 GHz, and two different horn antennas are used to cover frequencies up to 40 GHz.

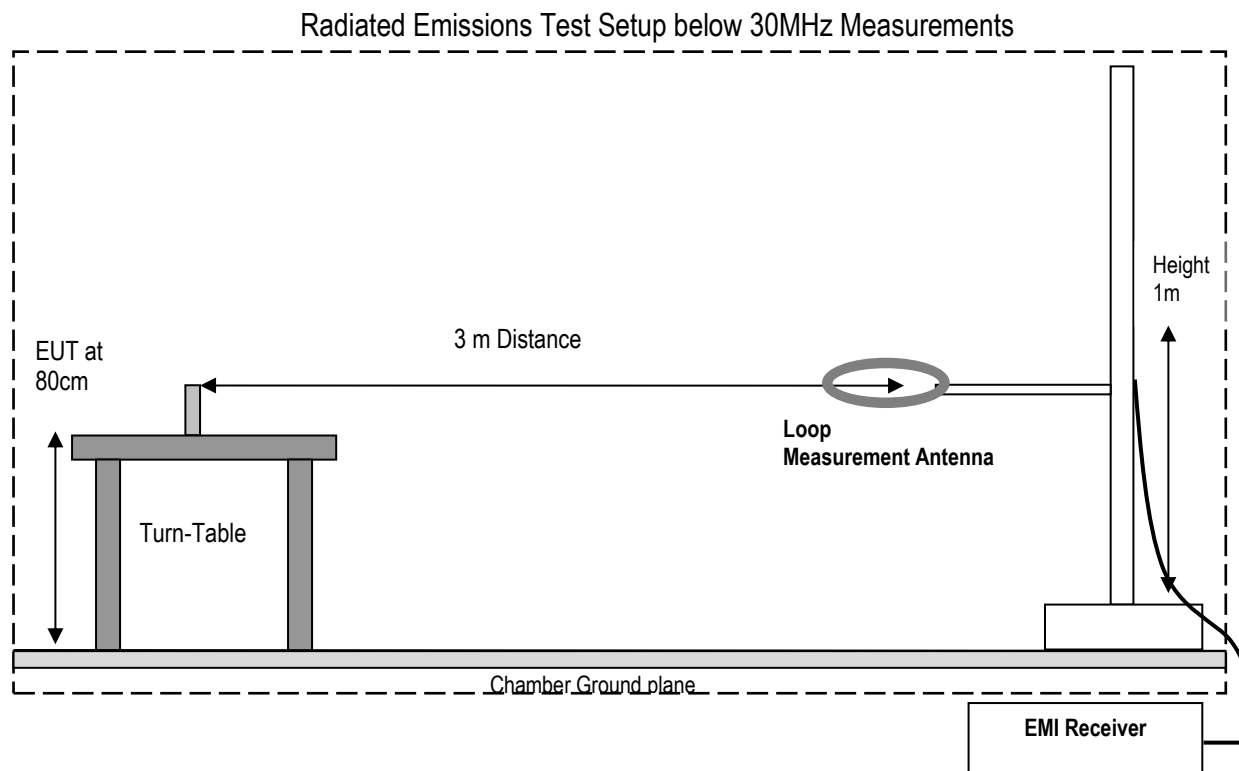

### Radiated Emissions Test Setup 30MHz-1GHz Measurements

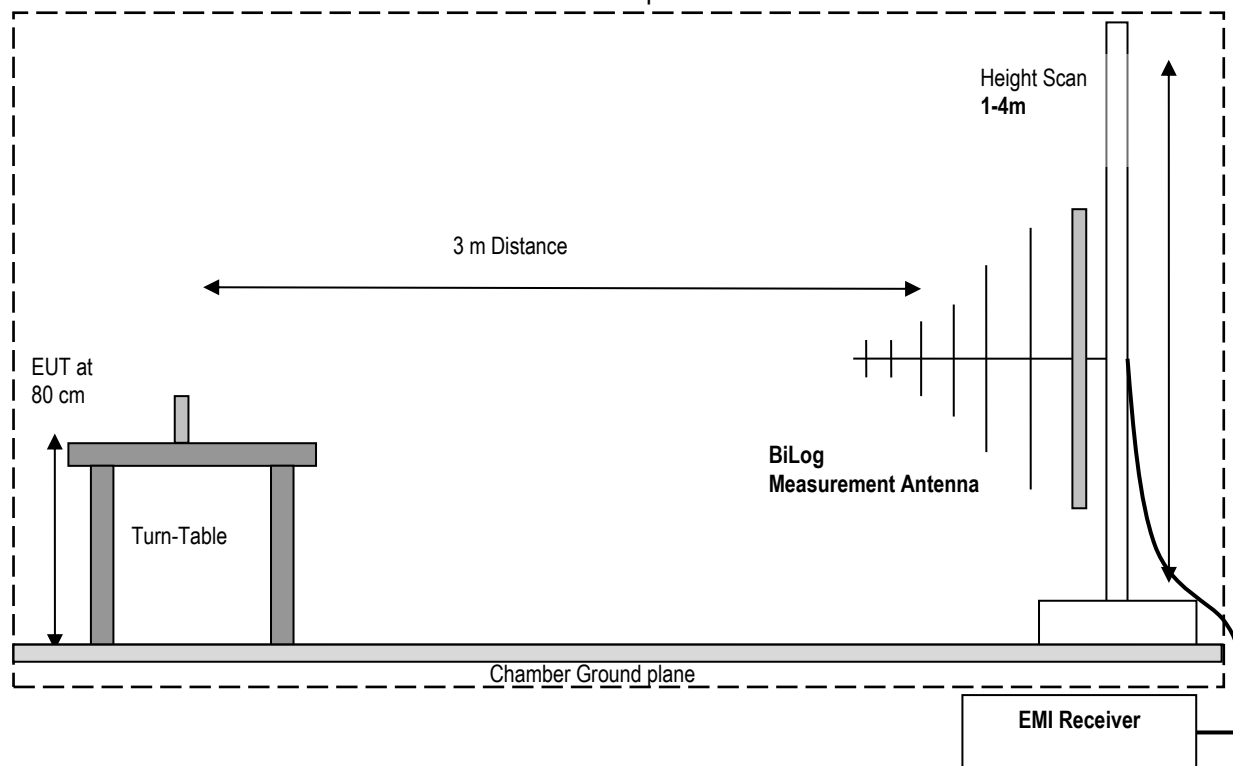

### Radiated Emissions Test Setup above 1GHz Measurements

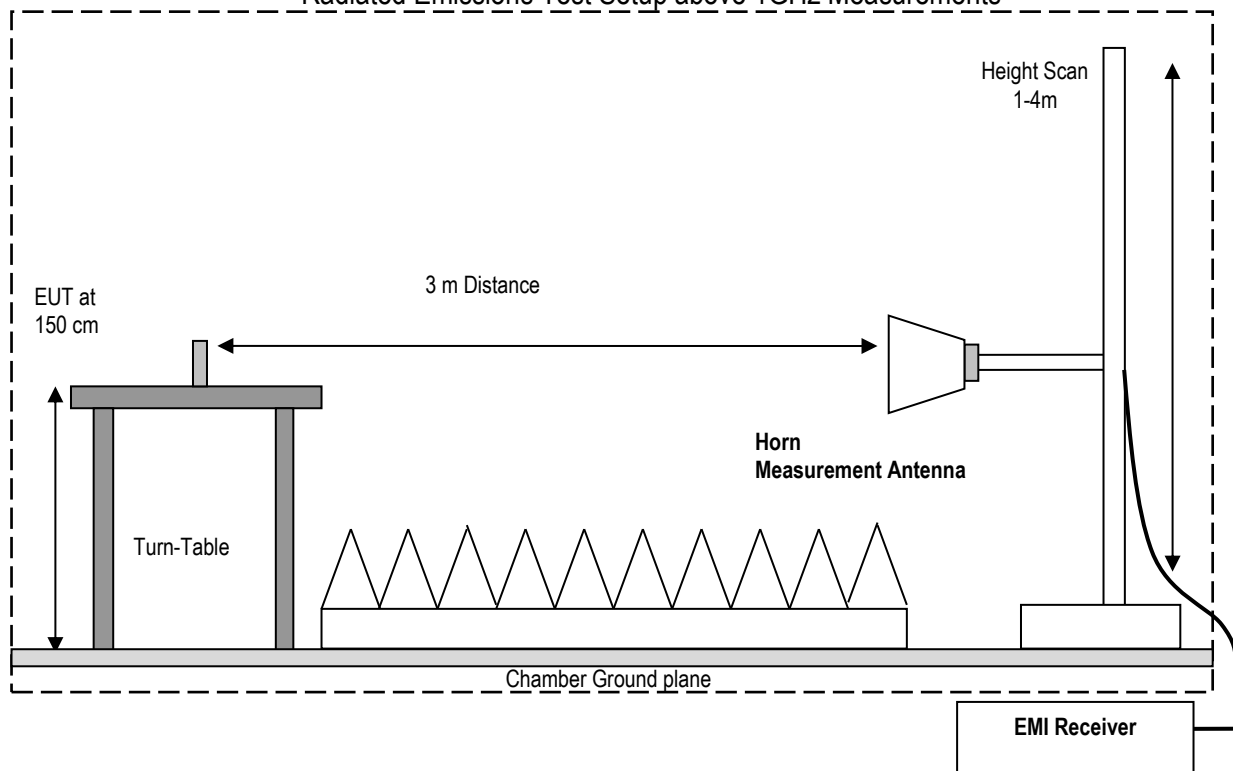

### 7.1.1 Sample Calculations for Field Strength Measurements

Field Strength is calculated from the Spectrum Analyzer/ Receiver readings, taking into account the following parameters:

1. Measured reading in dB $\mu$ V
2. Cable Loss between the receiving antenna and SA in dB and
3. Antenna Factor in dB/m

All radiated measurement plots in this report are taken from a test SW that calculates the Field Strength based on the following equation:

$$FS \text{ (dB}\mu\text{V/m)} = \text{Measured Value on SA (dB}\mu\text{V)} + \text{Cable Loss (dB)} + \text{Antenna Factor (dB/m)}$$

Example:

| Frequency (MHz) | Measured SA (dB $\mu$ V) | Cable Loss (dB) | Antenna Factor Correction (dB) | Field Strength Result (dB $\mu$ V/m) |
|-----------------|--------------------------|-----------------|--------------------------------|--------------------------------------|
| 1000            | 80.5                     | 3.5             | 14                             | 98.0                                 |

## 8 Test Result Data

### 8.1 Duty cycle


#### 8.1.1 Measurement according to FCC 558074 D01 DTS Meas Guidance v05r02


##### Spectrum Analyzer settings:

- Set the center frequency and of the instrument to the center frequency of the transmission
- Zero span
- Set RBW  $\geq$  OBW if possible; otherwise, set RBW to the largest available value
- Detector = Peak or average


#### 8.1.2 Measurement result


| Plot # | Mode         | Data Rate | Duty Cycle | Duty Cycle Correction Factor (dB) |
|--------|--------------|-----------|------------|-----------------------------------|
| 1      | 802.11b      | 1Mbps     | 100.00%    | 0.00                              |
| 2      | 802.11b      | 11Mbps    | 100.00%    | 0.00                              |
| 3      | 802.11g      | 6Mbps     | 100.00%    | 0.00                              |
| 4      | 802.11g      | 54Mbps    | 100.00%    | 0.00                              |
| 5      | 802.11n_HT20 | MCS0      | 100.00%    | 0.00                              |
| 6      | 802.11n_HT20 | MCS7      | 100.00%    | 0.00                              |

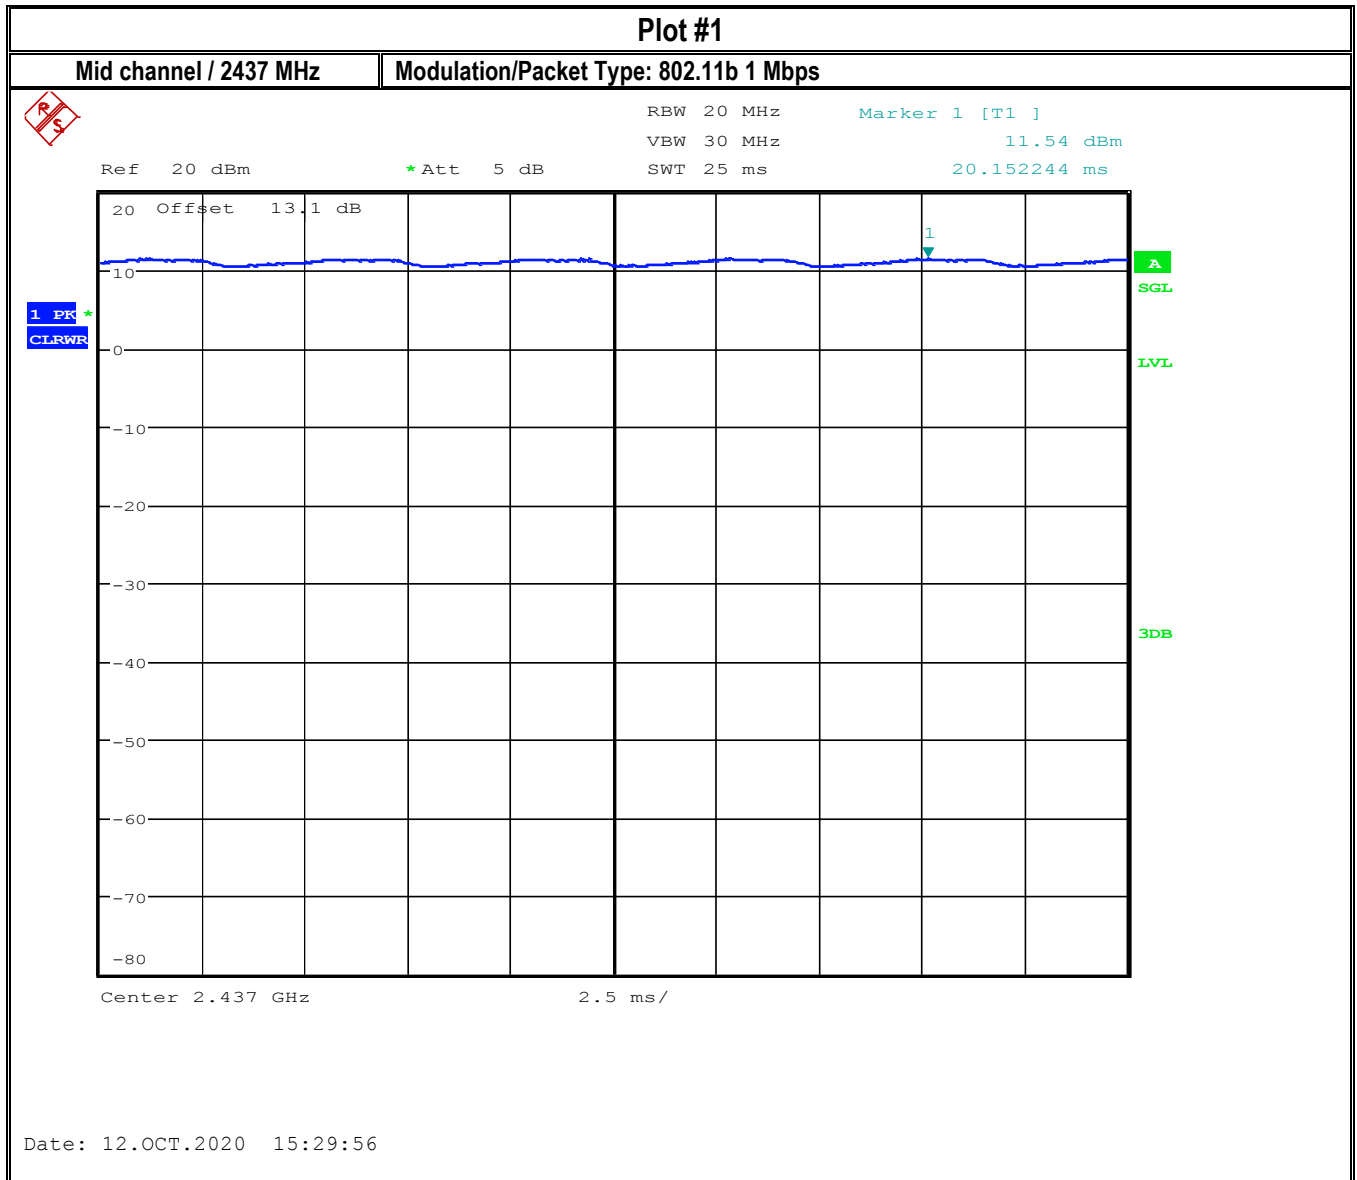


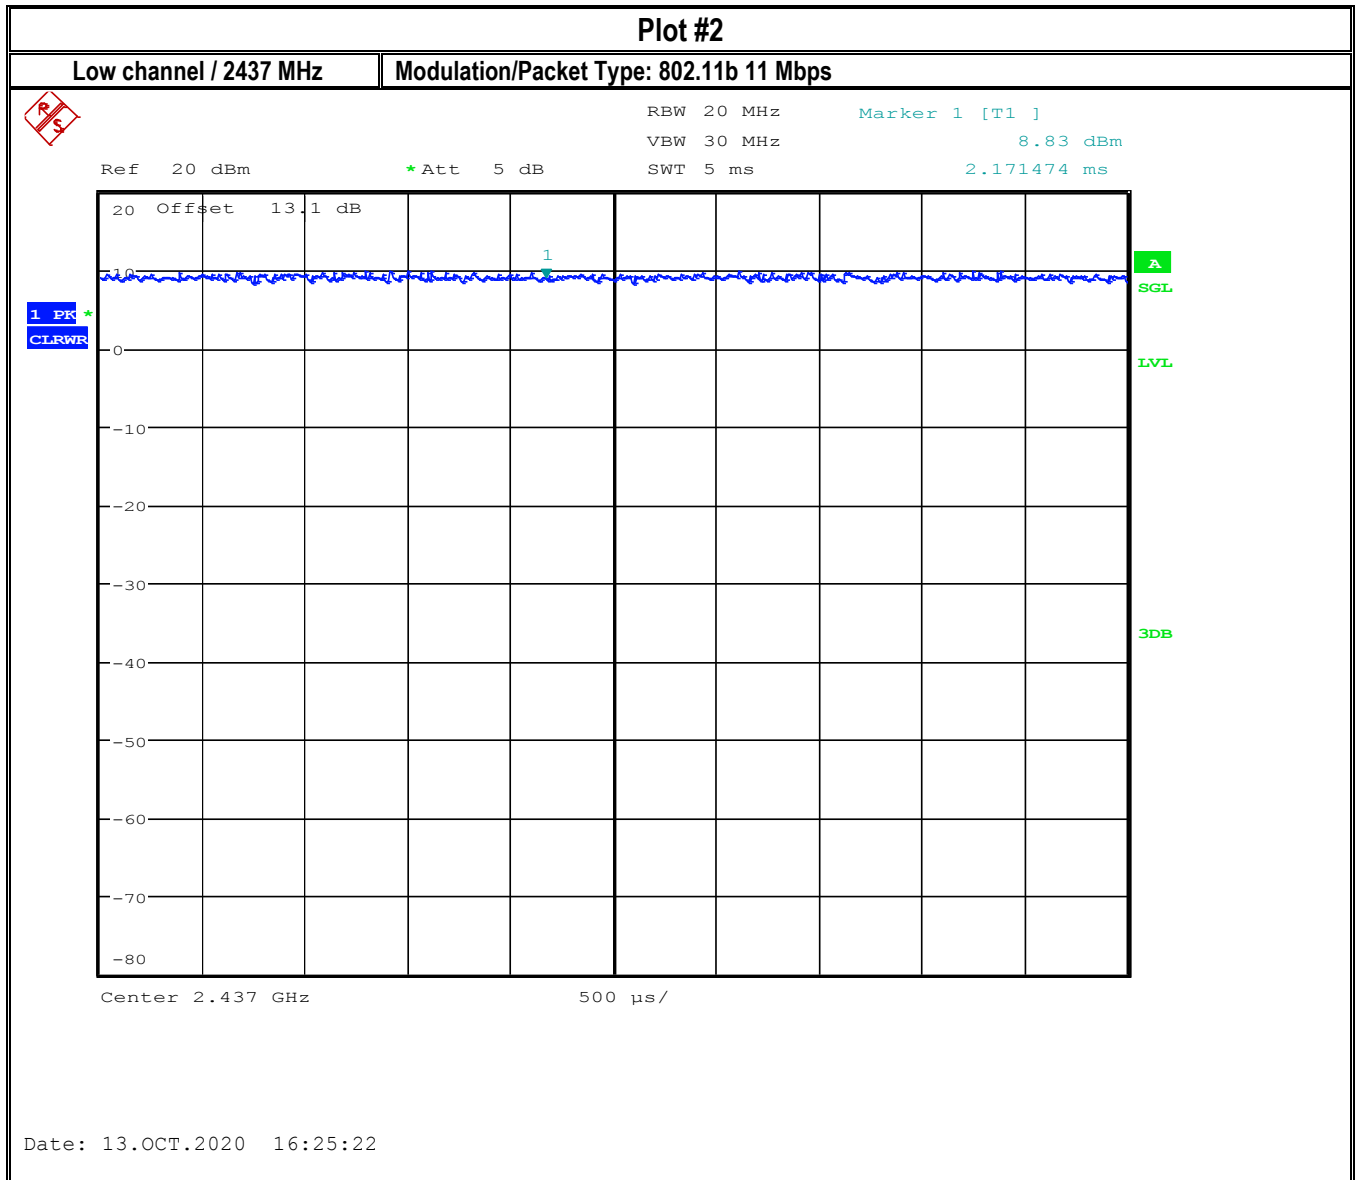


Date: 13.OCT.2020 16:25:22

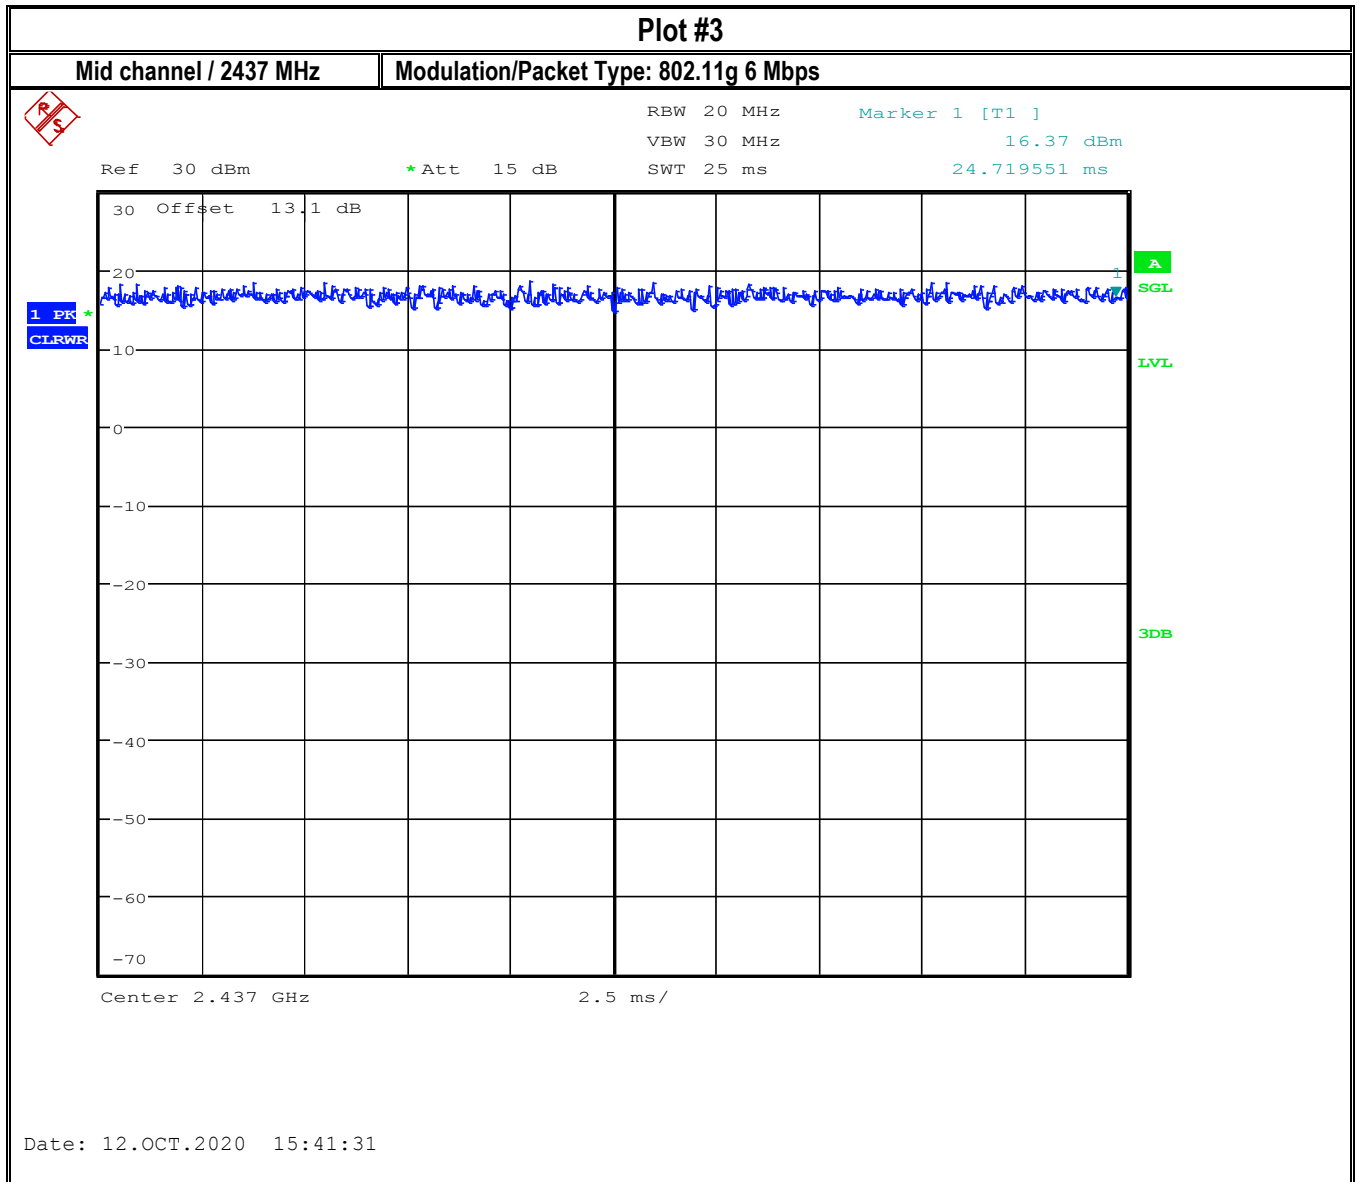

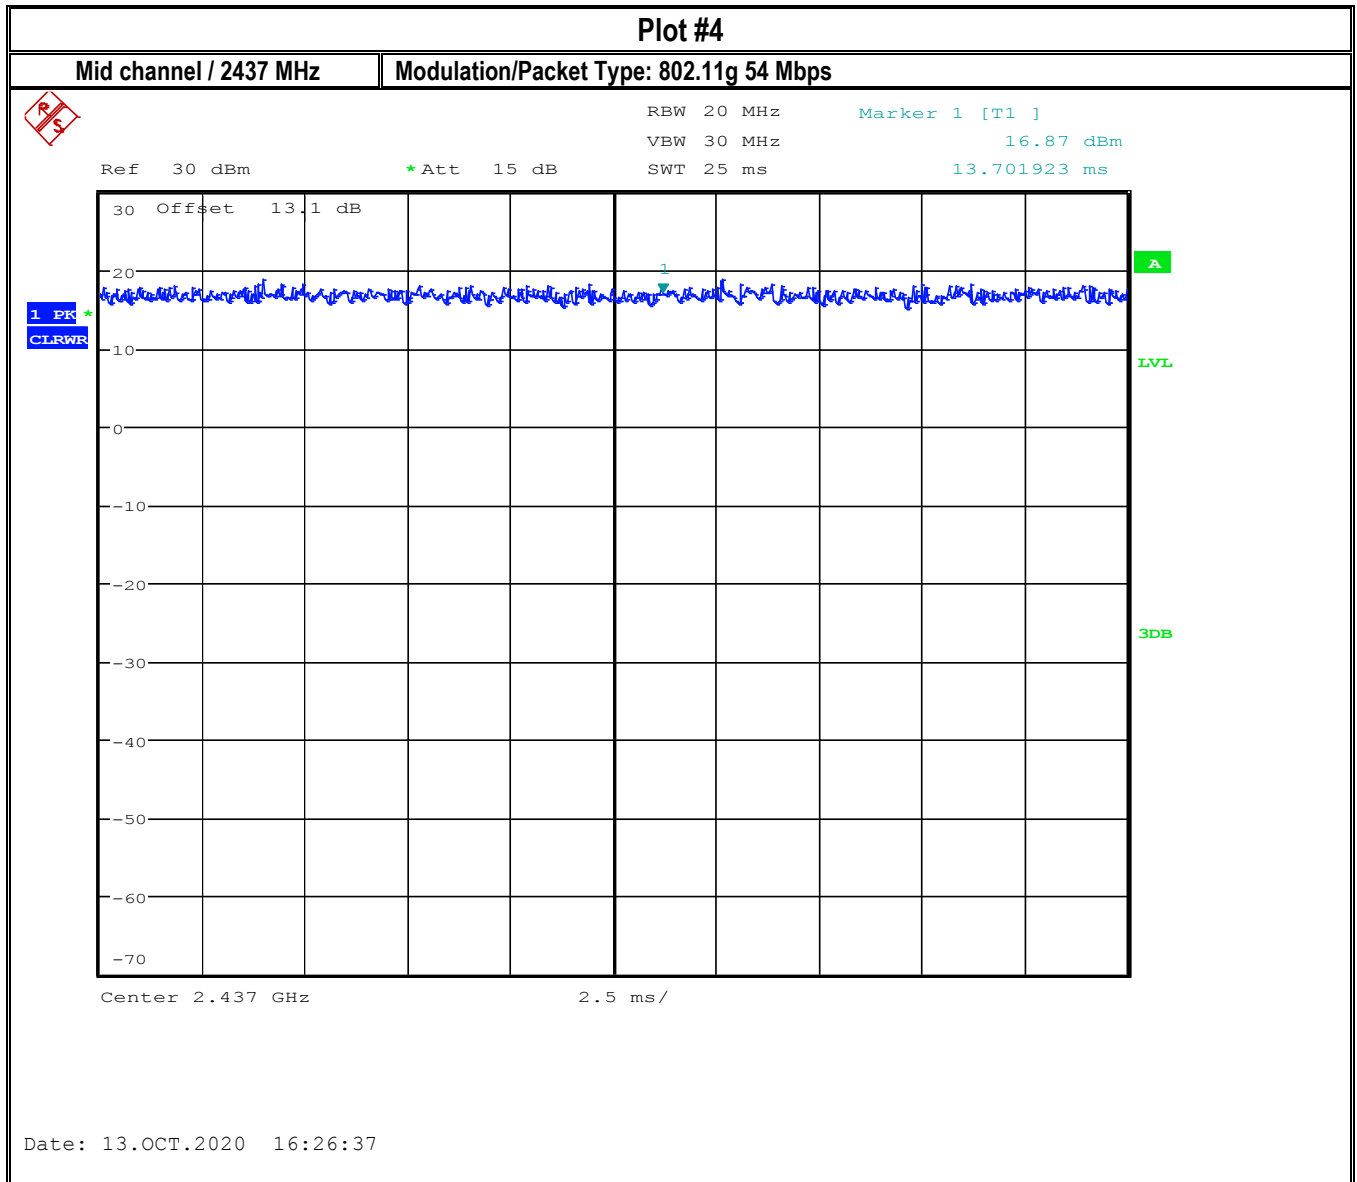

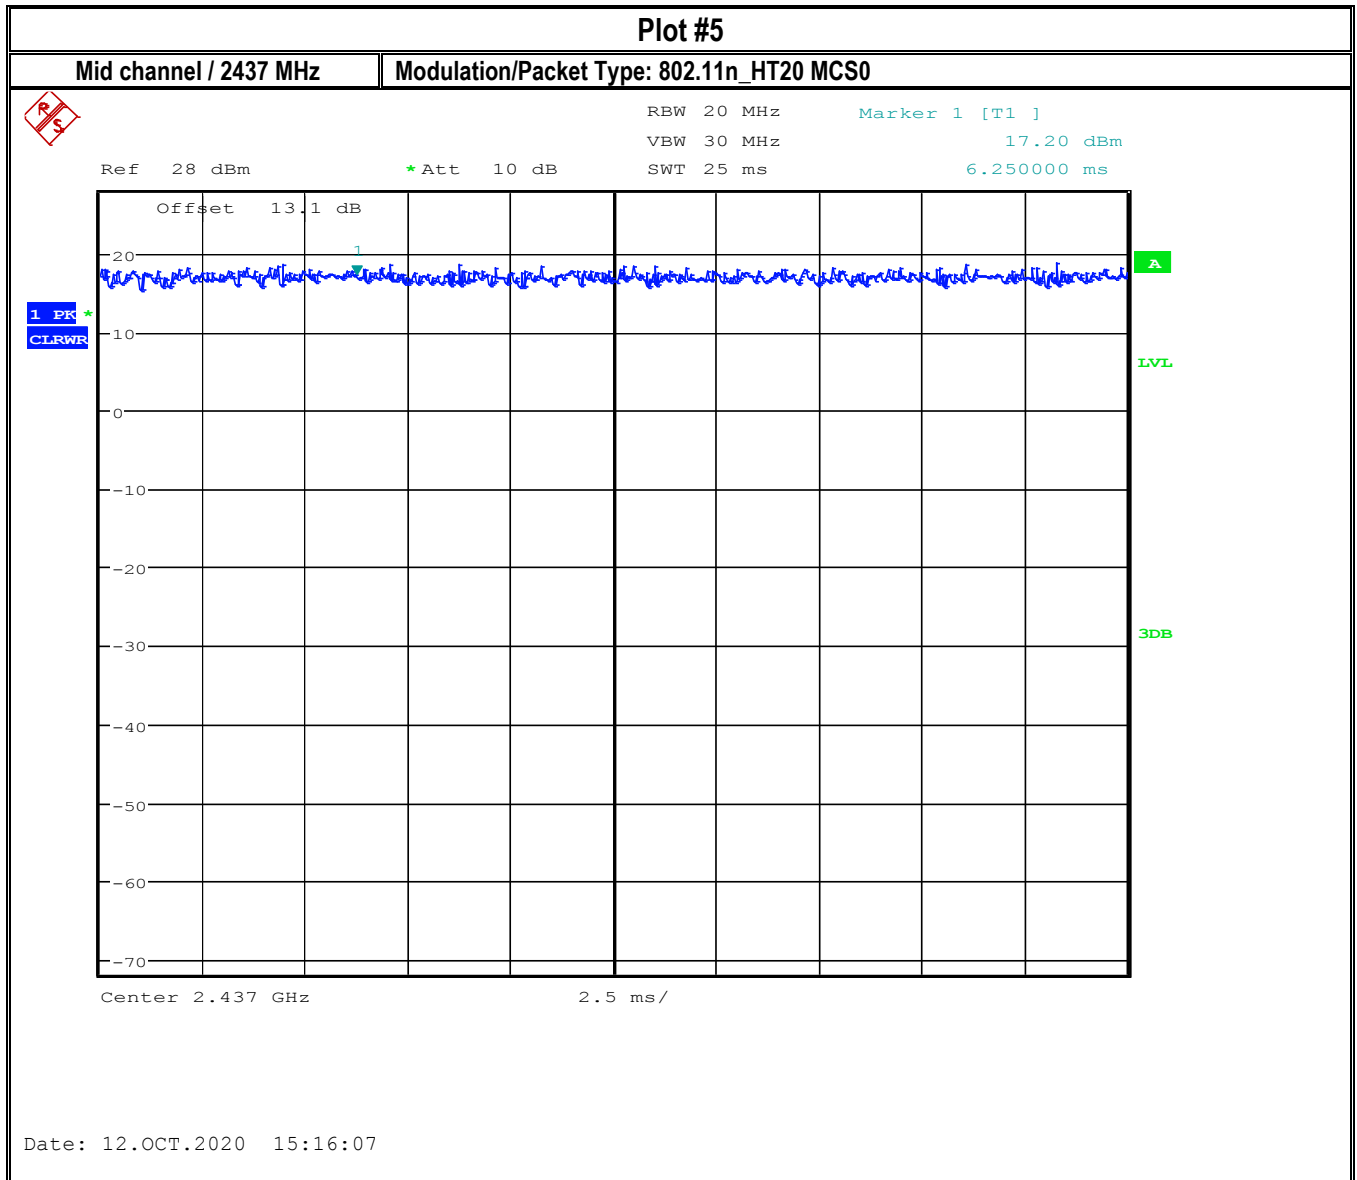

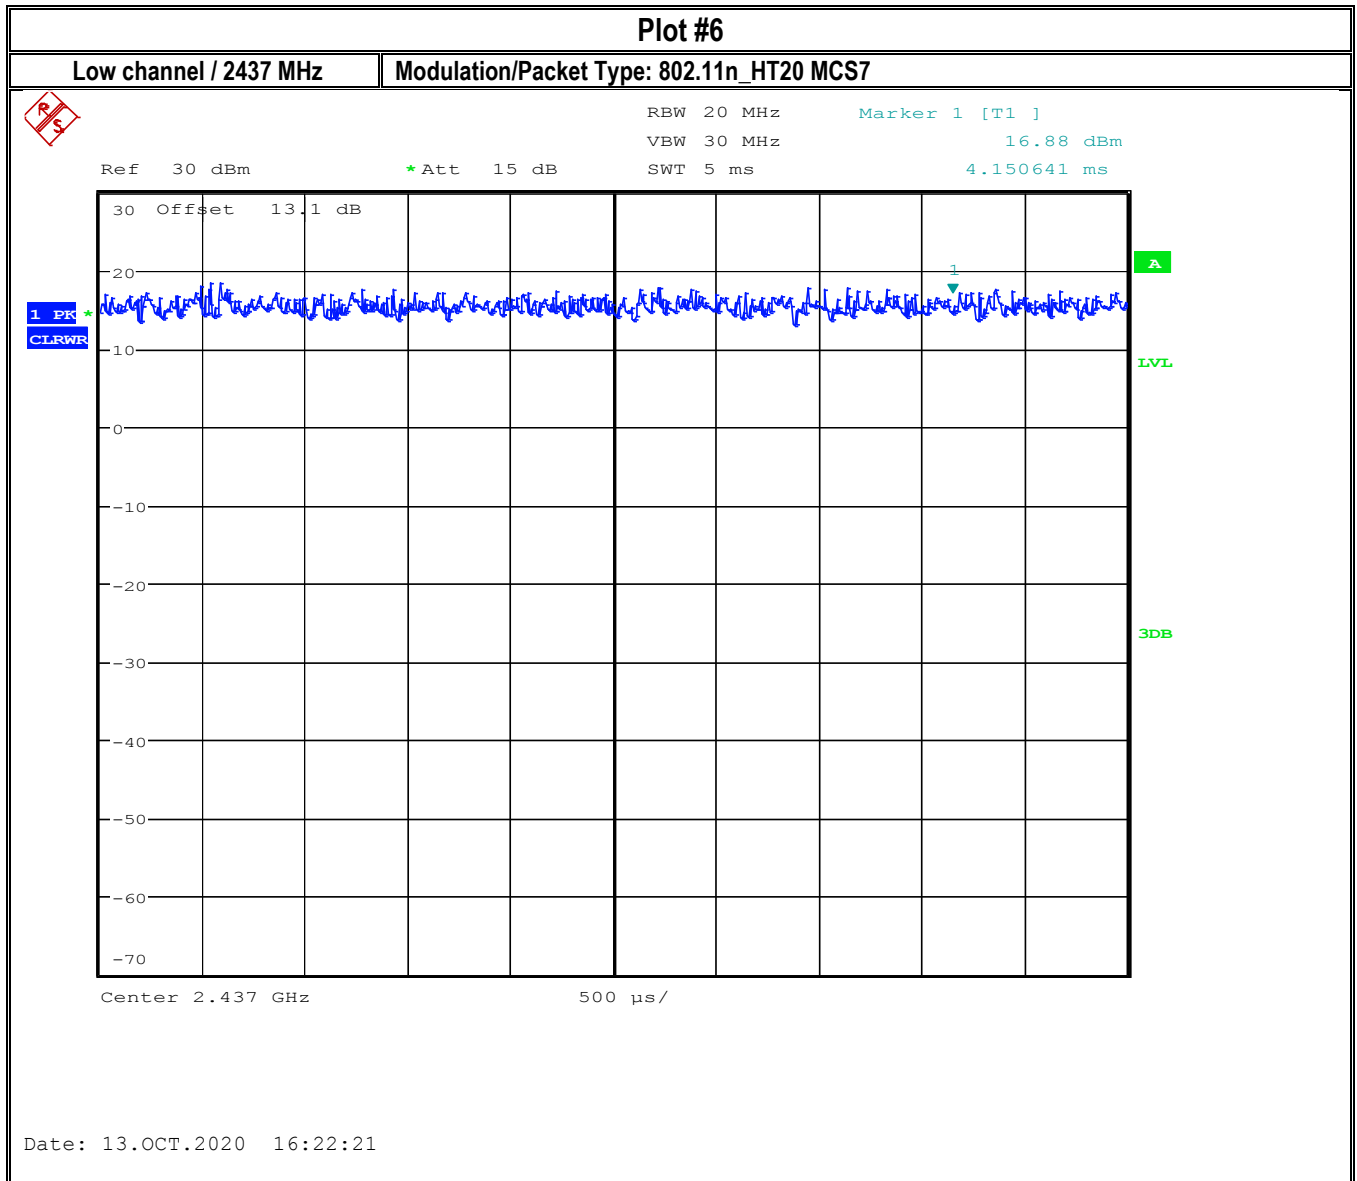

## 8.2 Maximum Conducted Output Power

### 8.2.1 Measurement according to FCC 558074 D01 DTS Meas Guidance v05r02

#### Spectrum Analyzer settings:

- Measure the duty cycle,  $x$ , of the transmitter output signal.
- Set span to at least  $1.5 \times \text{OBW}$ .
- Set RBW = 1 % to 5 % of the OBW, not to exceed 1 MHz.
- Set VBW  $\geq 3 \times \text{RBW}$ .
- Number of points in sweep  $\geq 2 \times \text{span} / \text{RBW}$ . (This gives bin-to-bin spacing  $\leq \text{RBW}/2$ , so that narrowband signals are not lost between frequency bins.)
- Sweep time = auto.
- Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- Allow the sweep to “free run”. RBW  $\geq$  DTS bandwidth
- Trace average at least 100 traces in power averaging (i.e., RMS) mode; however, the number of traces to be averaged shall be increased above 100 as needed such that the average accurately represents the true average over the on and off periods of the transmitter.
- Compute power by integrating the spectrum across the OBW of the signal using the instrument’s band power measurement function with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.
- Add  $10 \log (1/x)$ , where  $x$  is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on- and off-times of the transmission). For example, add  $10 \log (1/0.25) = 6 \text{ dB}$  if the duty cycle is 25 %.

#### 8.2.2 Limits:

##### Maximum Peak Output Power:

- FCC §15.247 (b)(1): 1 W
- IC RSS-247: 1 W


#### 8.2.3 Test conditions and setup:

| Ambient Temperature | EUT Set-Up # | EUT operating mode | Power Input | Single Antenna Gain |
|---------------------|--------------|--------------------|-------------|---------------------|
| 22° C               | 2            | 802.11b/g/n        | 5VDC        | 1.6dBi              |


## 8.2.4 Measurement result:


Attenuation of cable and attenuator (already taken into account): 13.1 dB


| Plot # | Mode         | Date Rate | Channel | Measured average conducted powered(dBm) | Corrected by DCCF(dBm) | EIRP (dBm) | Limit (dBm)    | Result |
|--------|--------------|-----------|---------|-----------------------------------------|------------------------|------------|----------------|--------|
| 1      | 802.11b      | 1Mbps     | 1       | 8.49                                    | 8.49                   | 10.09      | 30 / 36 (EIRP) | Pass   |
| 2      |              |           | 6       | 7.73                                    | 7.73                   | 9.33       | 30 / 36 (EIRP) | Pass   |
| 3      |              |           | 11      | 7.56                                    | 7.56                   | 9.16       | 30 / 36 (EIRP) | Pass   |
| 4      |              | 11Mbps    | 1       | 6.5                                     | 6.50                   | 8.10       | 30 / 36 (EIRP) | Pass   |
| 5      |              |           | 6       | 6.21                                    | 6.21                   | 7.81       | 30 / 36 (EIRP) | Pass   |
| 6      |              |           | 11      | 6.14                                    | 6.14                   | 7.74       | 30 / 36 (EIRP) | Pass   |
| 7      | 802.11g      | 6Mbps     | 1       | 7.88                                    | 7.88                   | 9.48       | 30 / 36 (EIRP) | Pass   |
| 8      |              |           | 6       | 8.21                                    | 8.21                   | 9.81       | 30 / 36 (EIRP) | Pass   |
| 9      |              |           | 11      | 8.07                                    | 8.07                   | 9.67       | 30 / 36 (EIRP) | Pass   |
| 10     |              | 54Mbps    | 1       | 8.11                                    | 8.11                   | 9.71       | 30 / 36 (EIRP) | Pass   |
| 11     |              |           | 6       | 7.98                                    | 7.98                   | 9.58       | 30 / 36 (EIRP) | Pass   |
| 12     |              |           | 11      | 7.63                                    | 7.63                   | 9.23       | 30 / 36 (EIRP) | Pass   |
| 13     | 802.11n_HT20 | MCS0      | 1       | 9.49                                    | 9.49                   | 11.09      | 30 / 36 (EIRP) | Pass   |
| 14     |              |           | 6       | 9.04                                    | 9.04                   | 10.64      | 30 / 36 (EIRP) | Pass   |
| 15     |              |           | 11      | 8.78                                    | 8.78                   | 10.38      | 30 / 36 (EIRP) | Pass   |
| 16     |              | MCS7      | 1       | 8.14                                    | 8.14                   | 9.74       | 30 / 36 (EIRP) | Pass   |
| 17     |              |           | 6       | 7.84                                    | 7.84                   | 9.44       | 30 / 36 (EIRP) | Pass   |
| 18     |              |           | 11      | 7.66                                    | 7.66                   | 9.26       | 30 / 36 (EIRP) | Pass   |

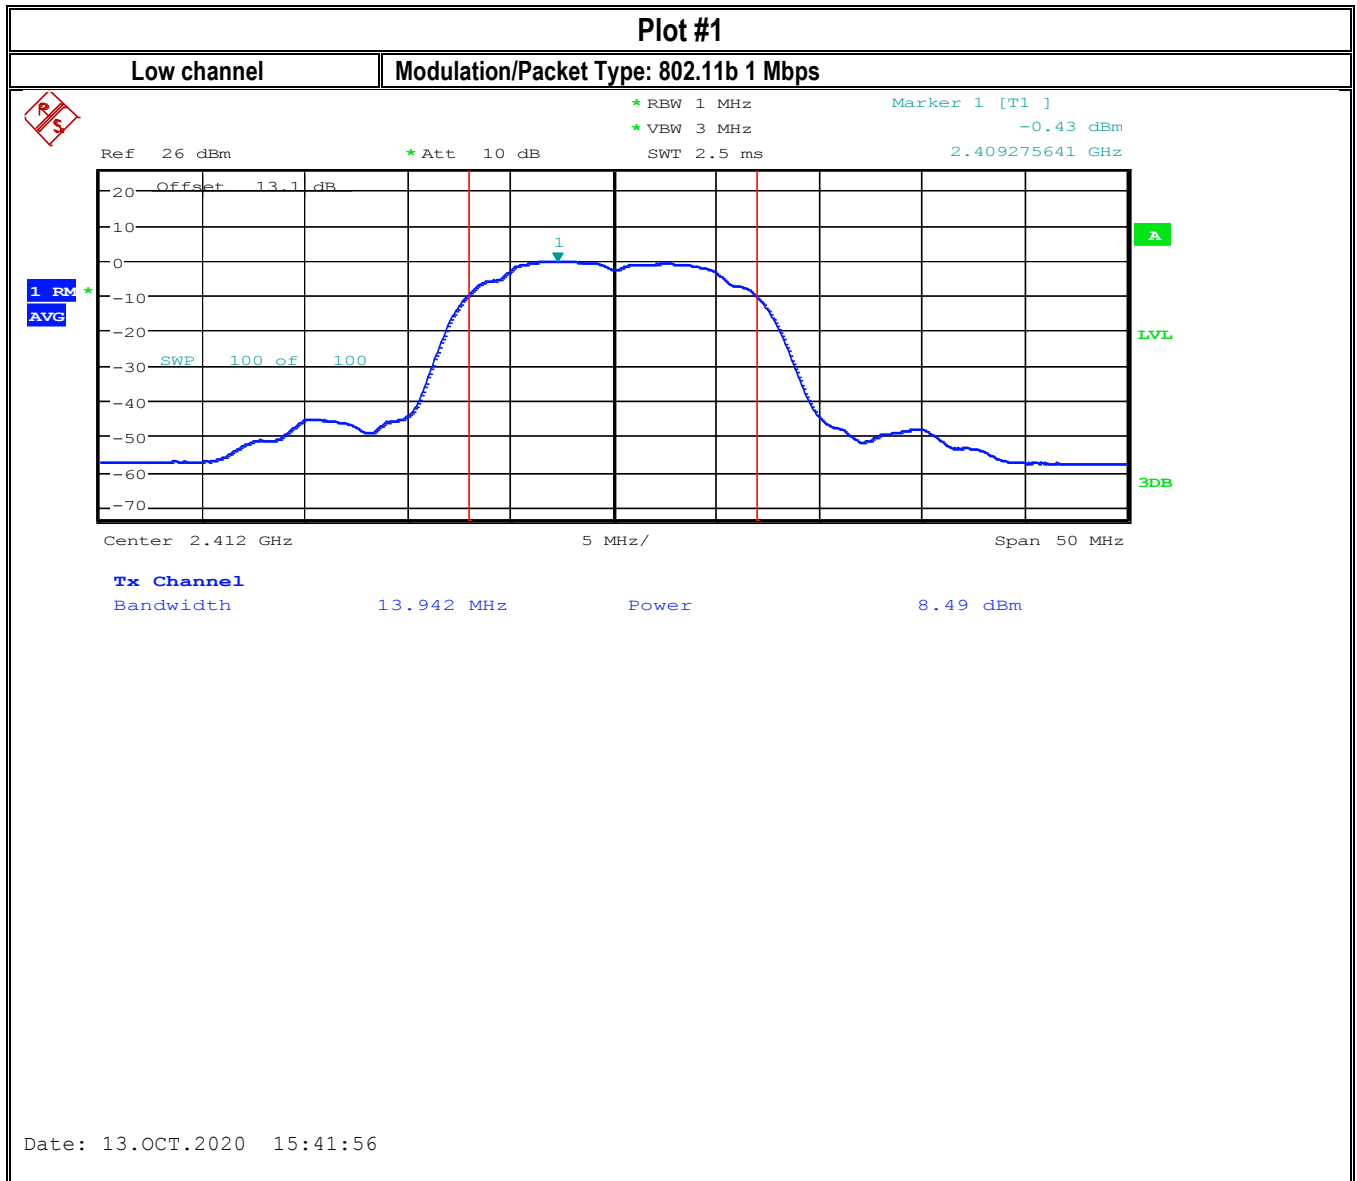



Date: 13.OCT.2020    15:41:56

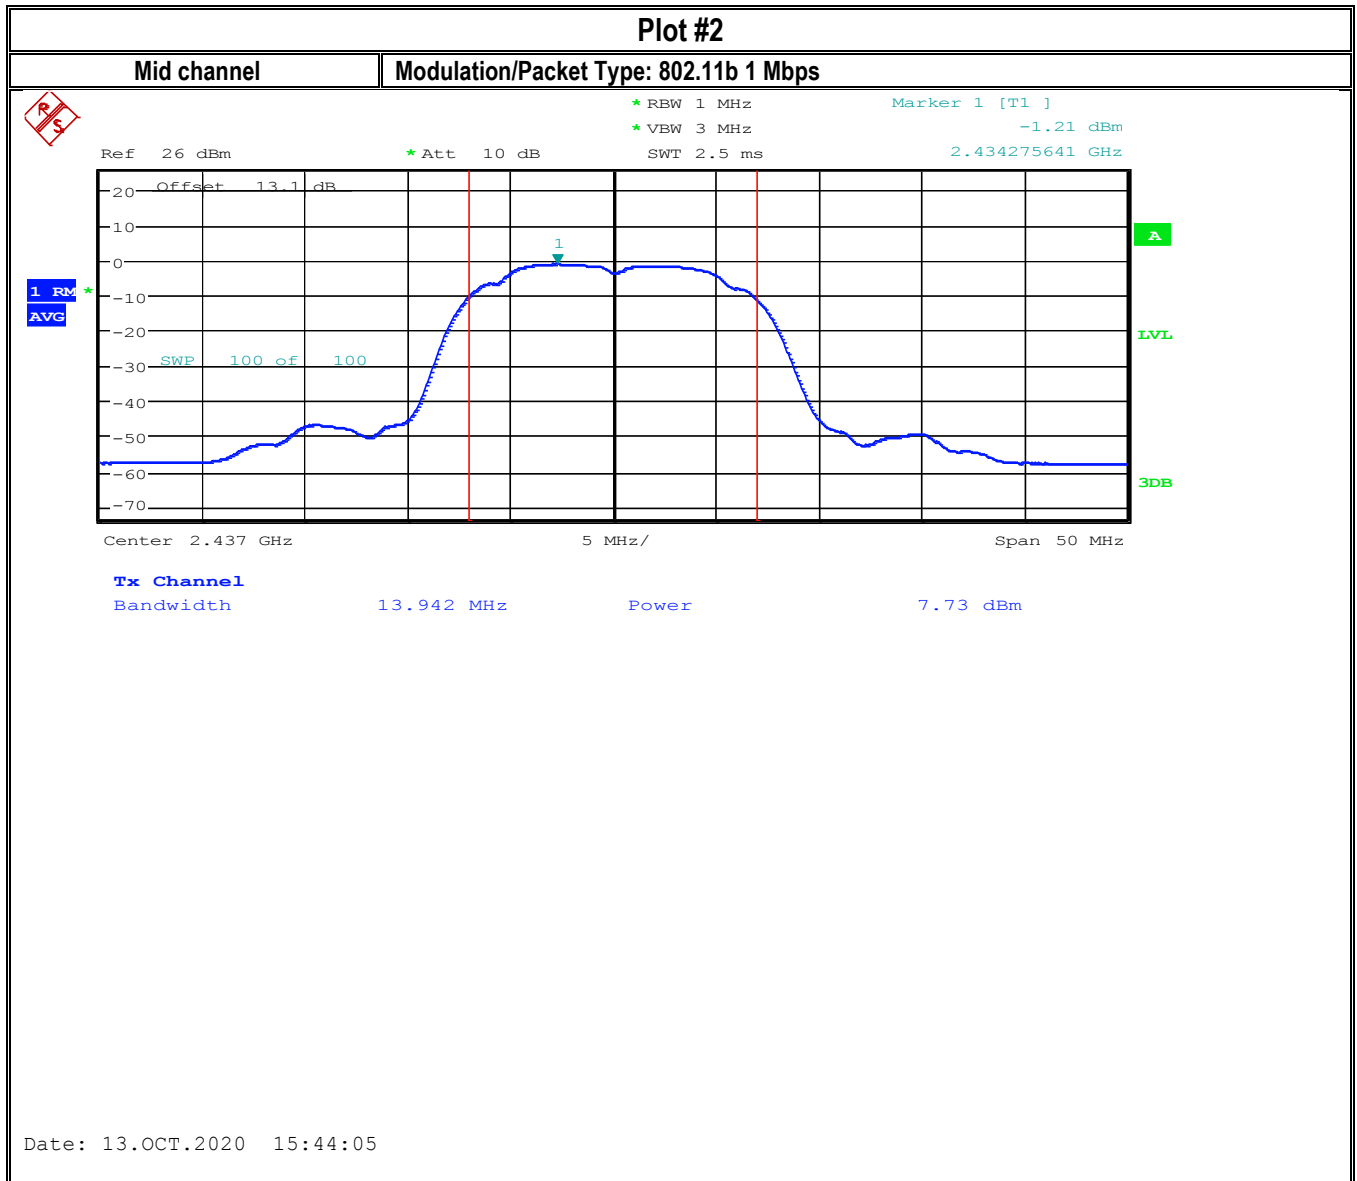


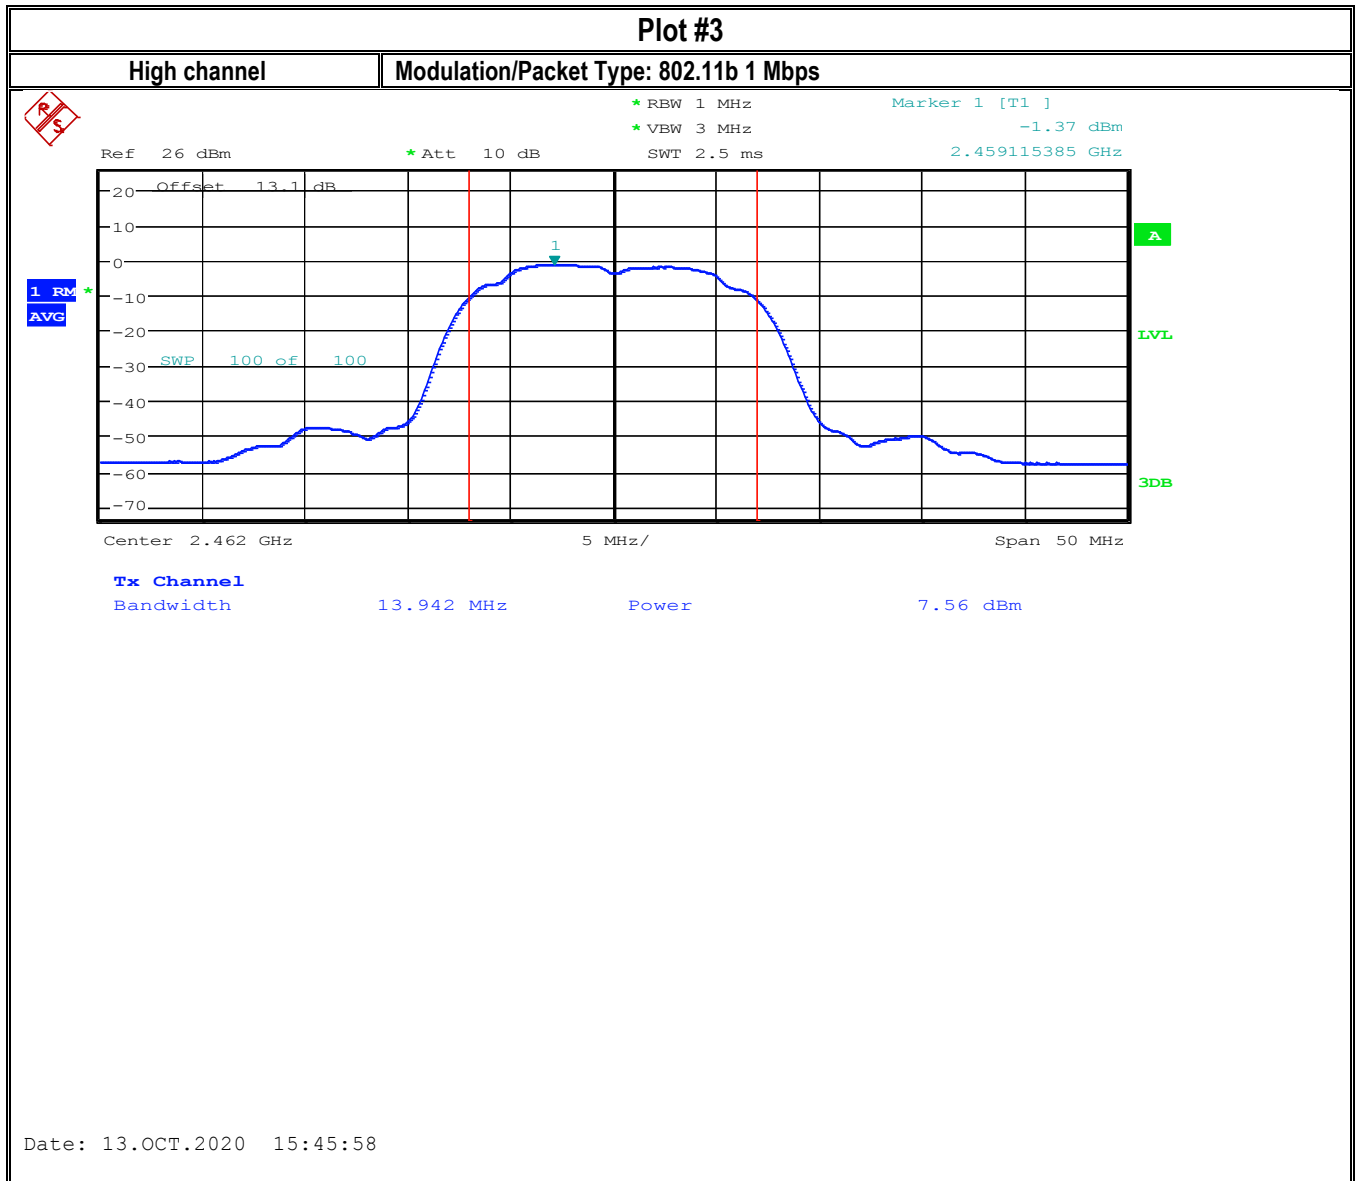


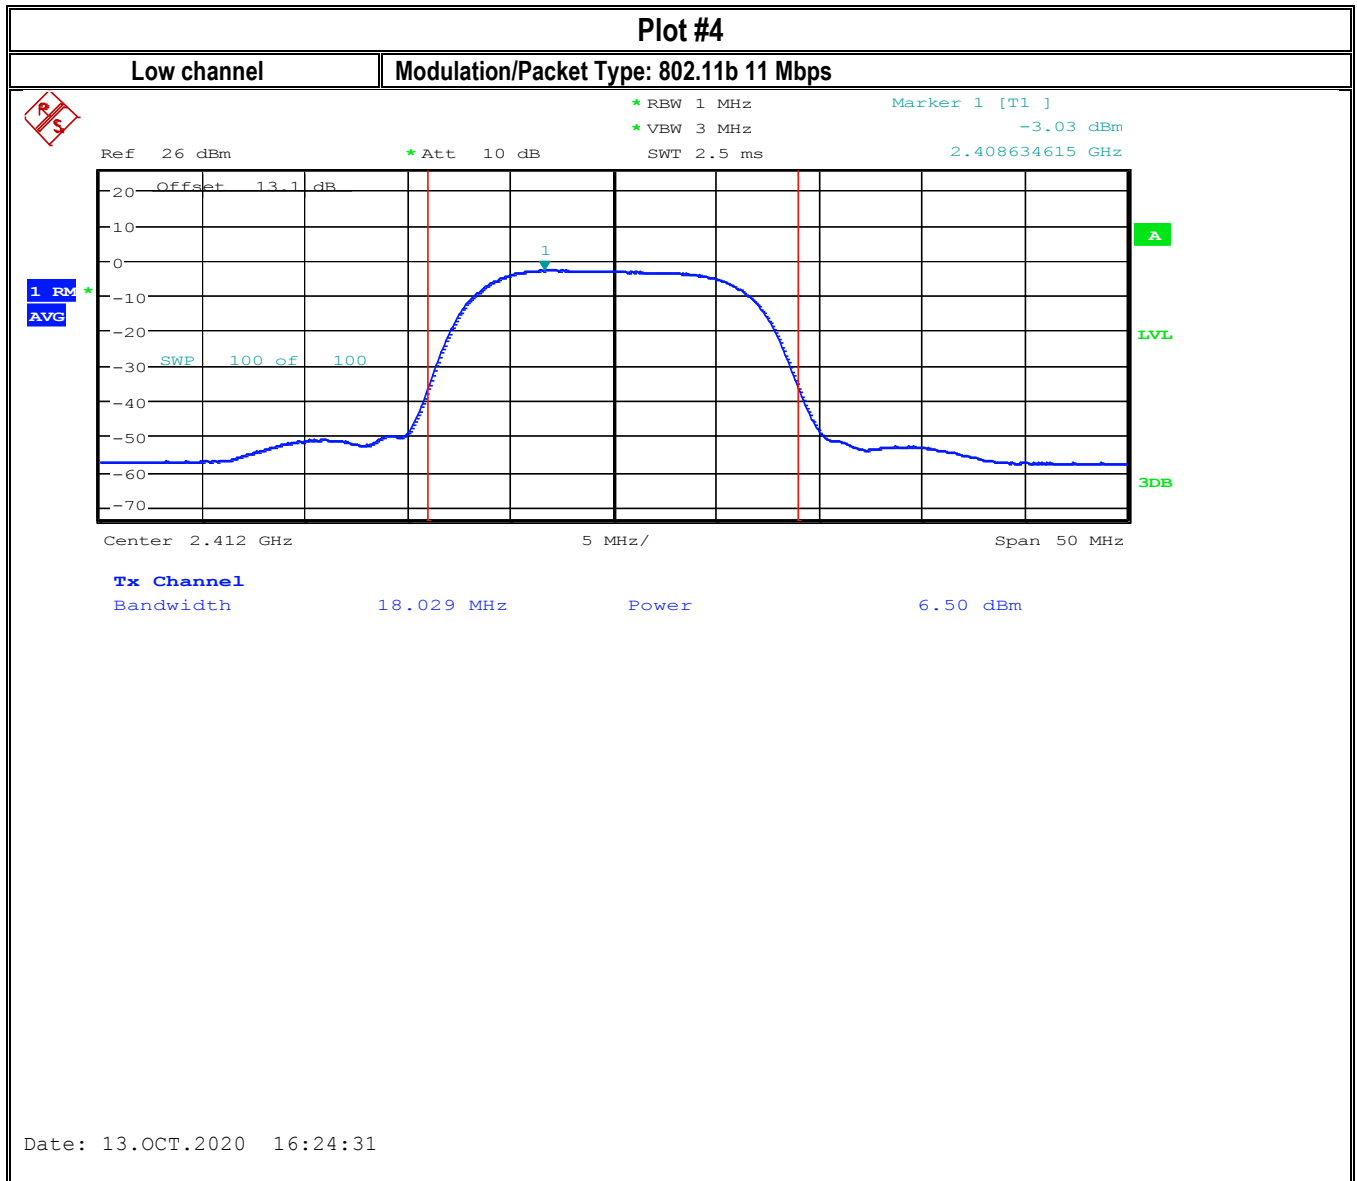


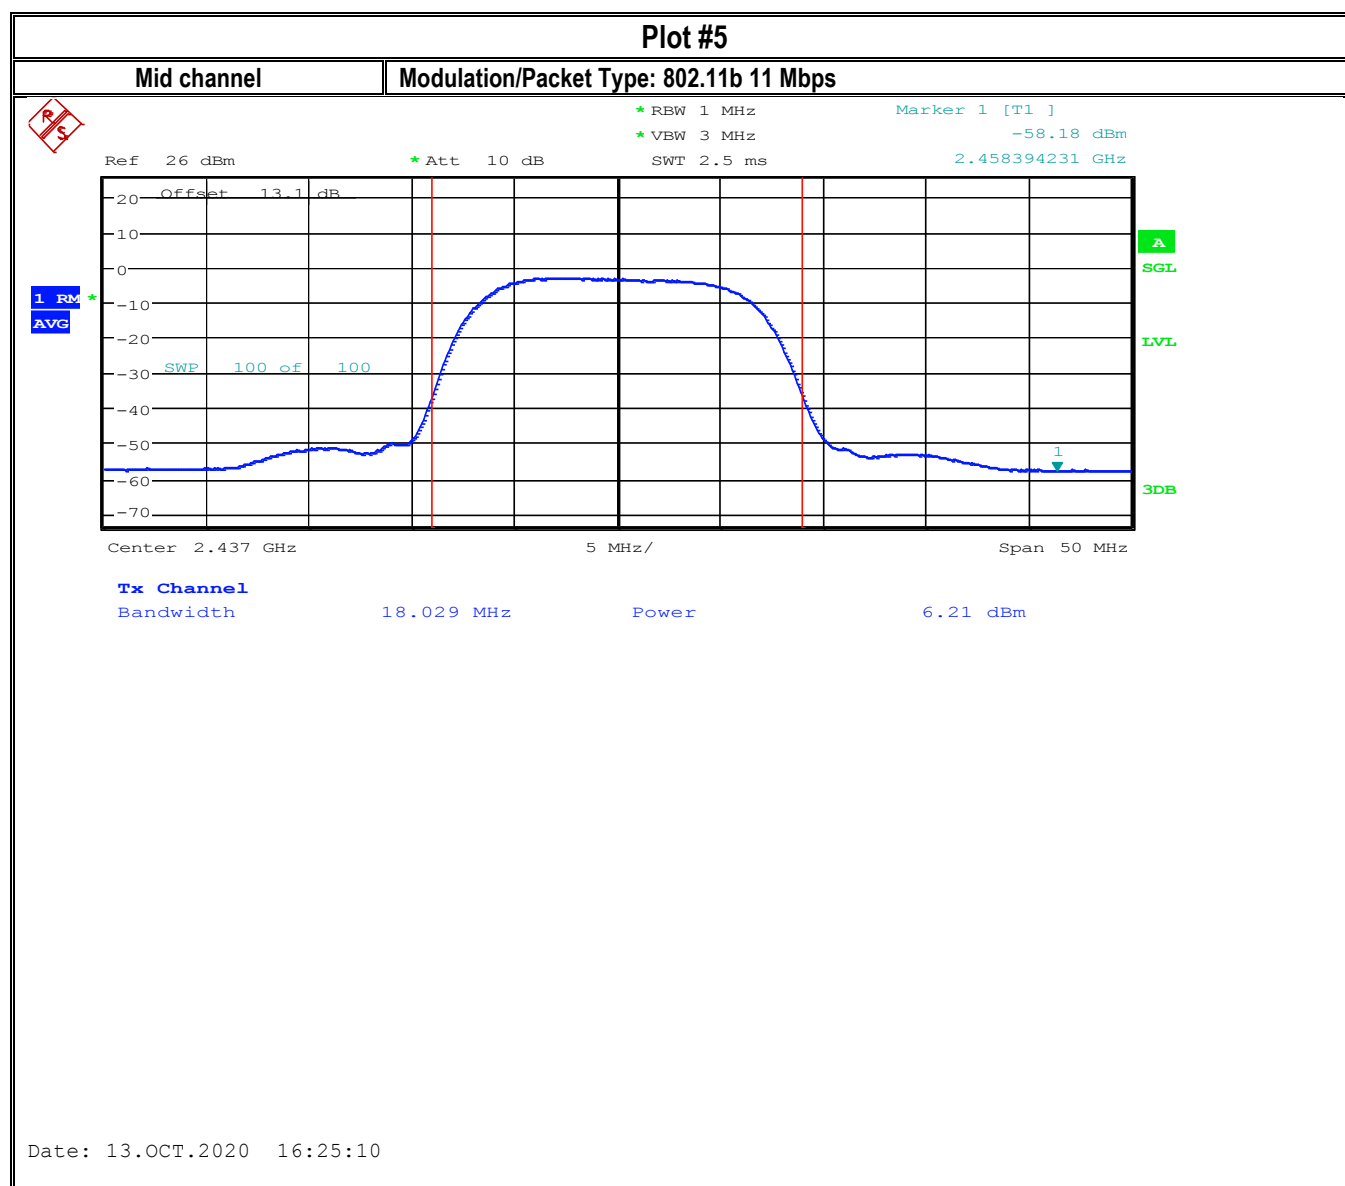

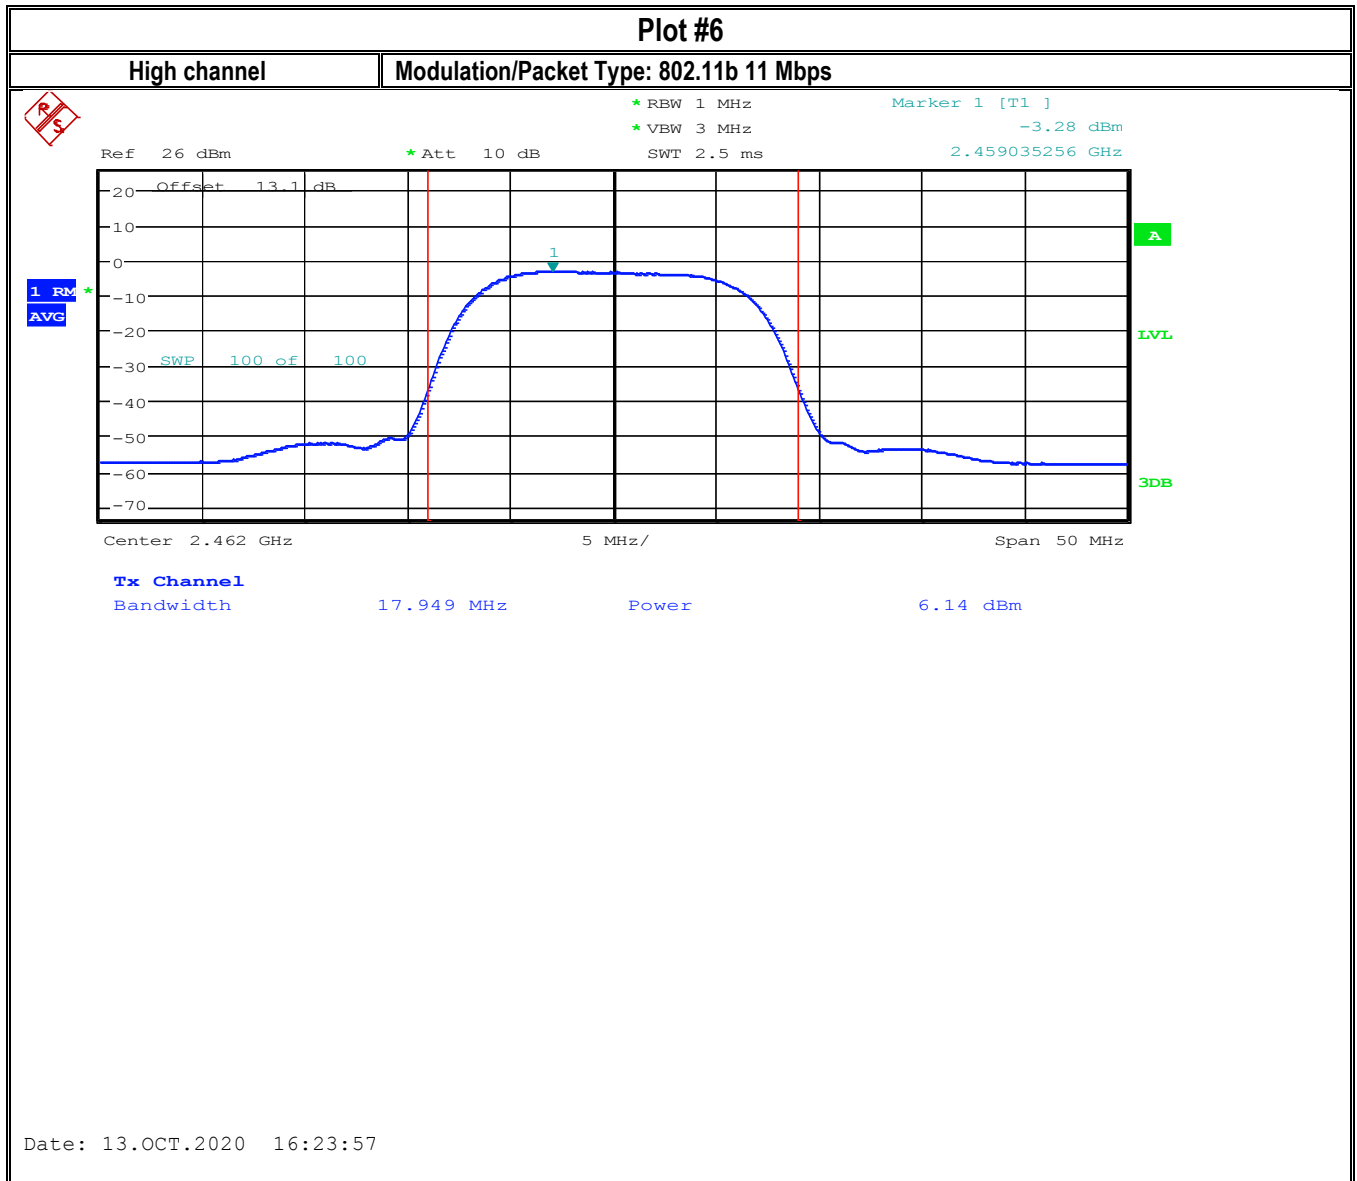

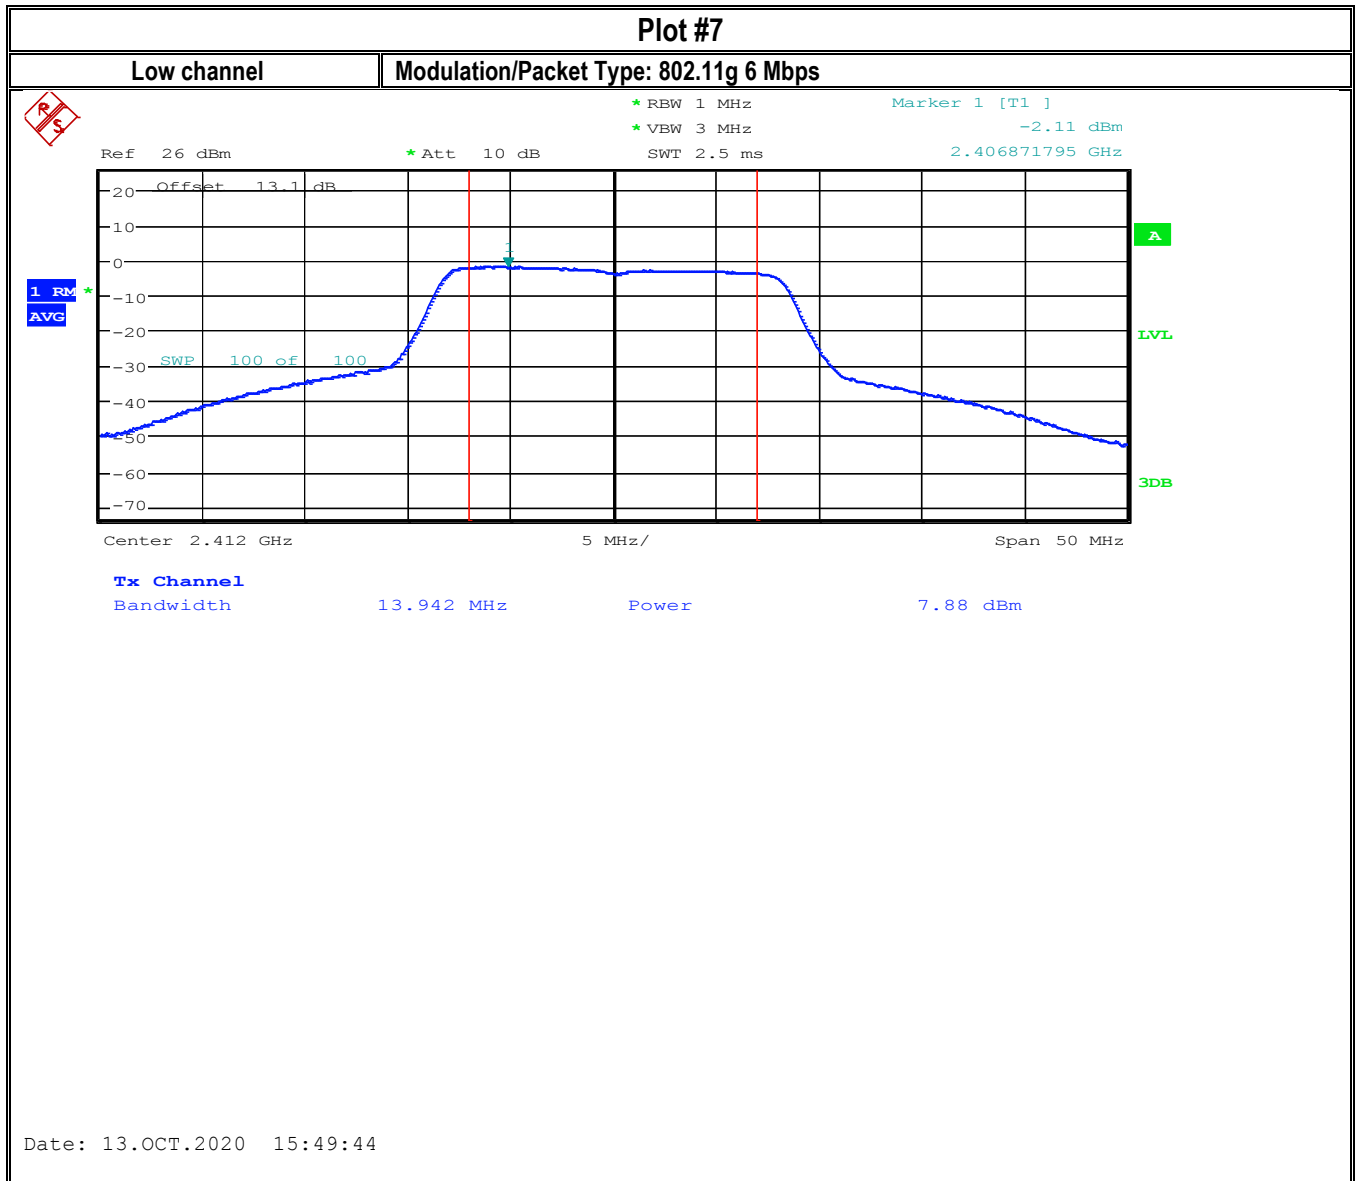

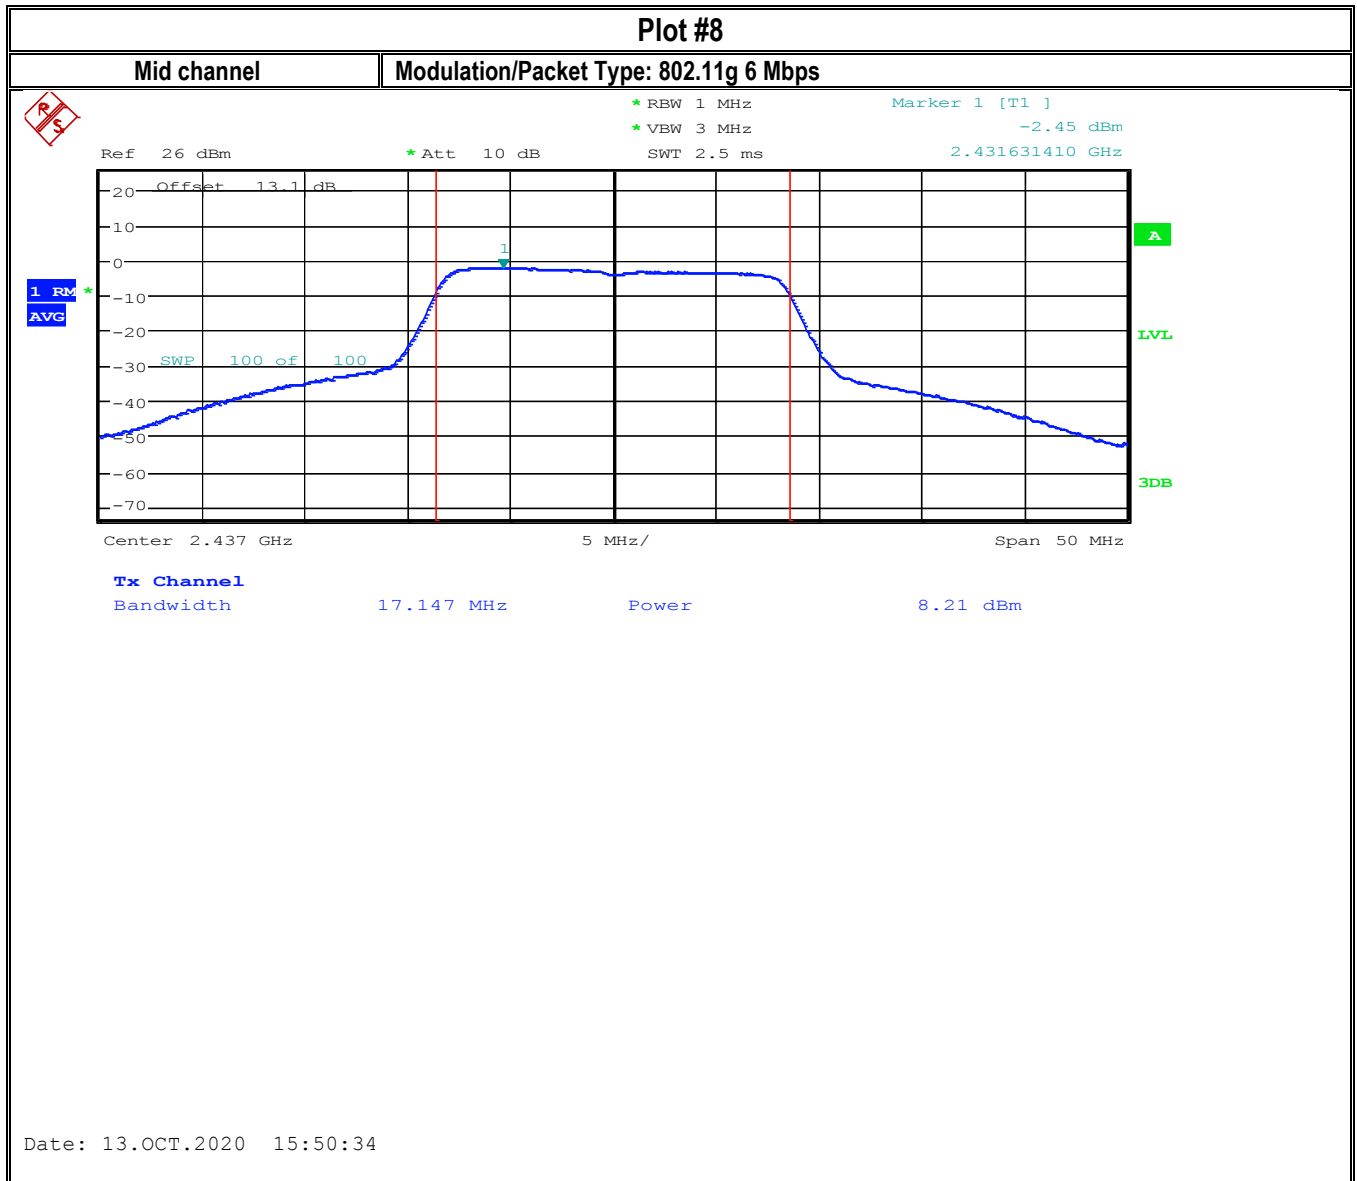

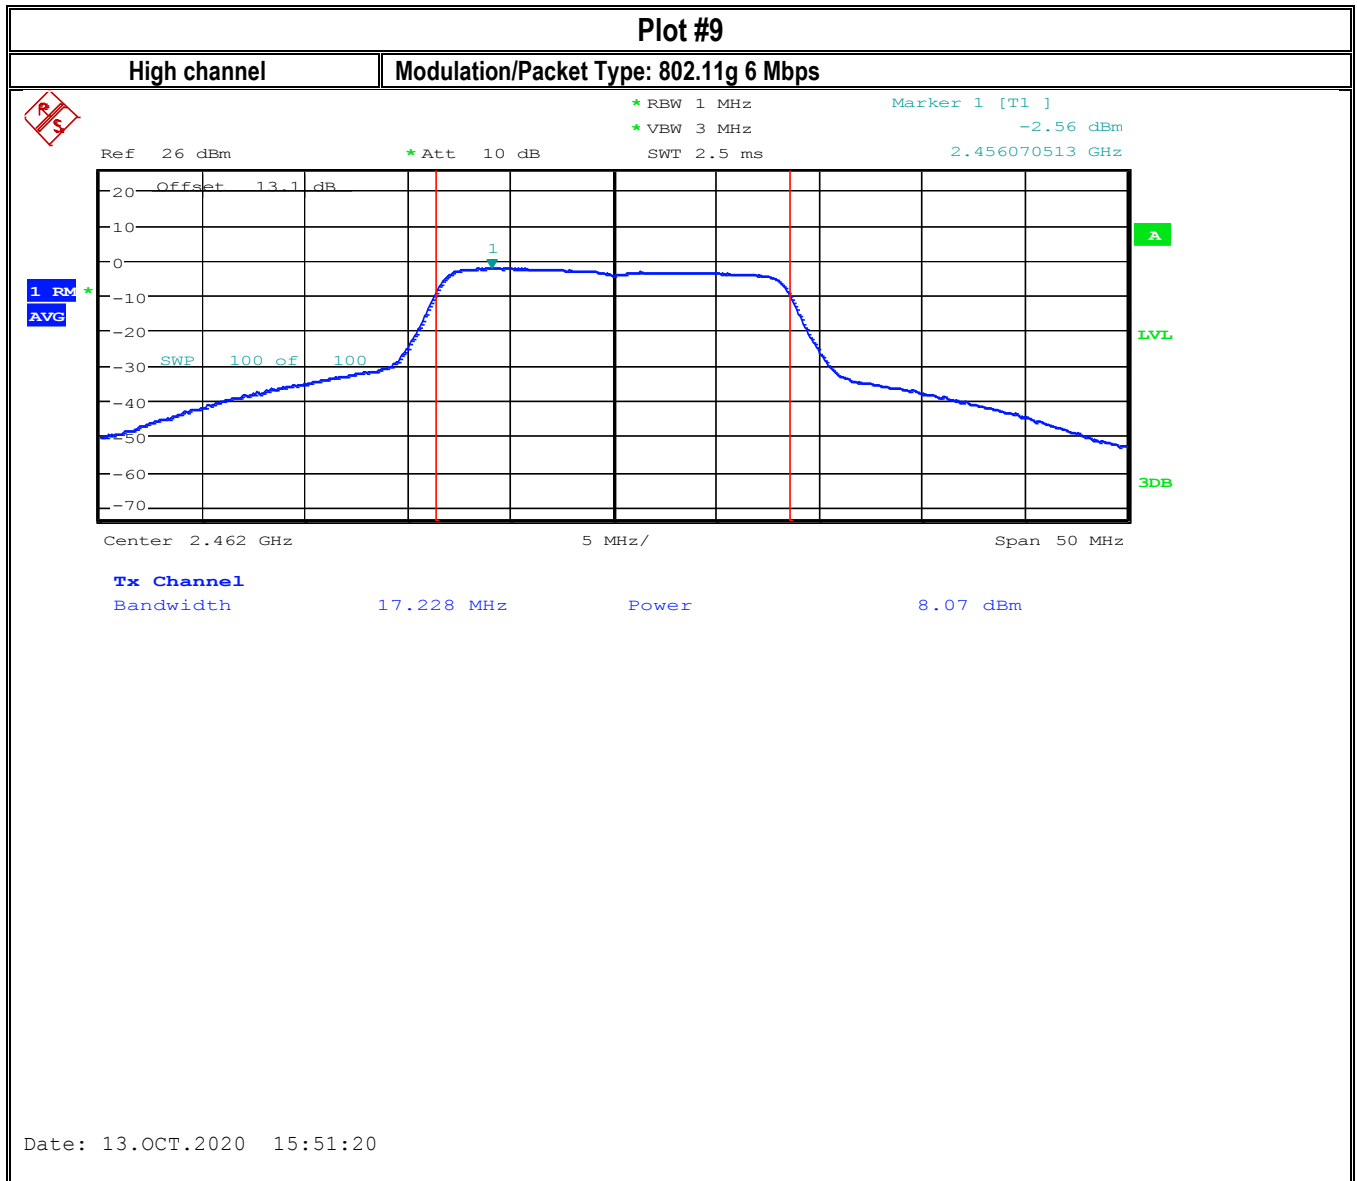





### Plot #10

Low channel

Modulation/Packet Type: 802.11g 54 Mbps

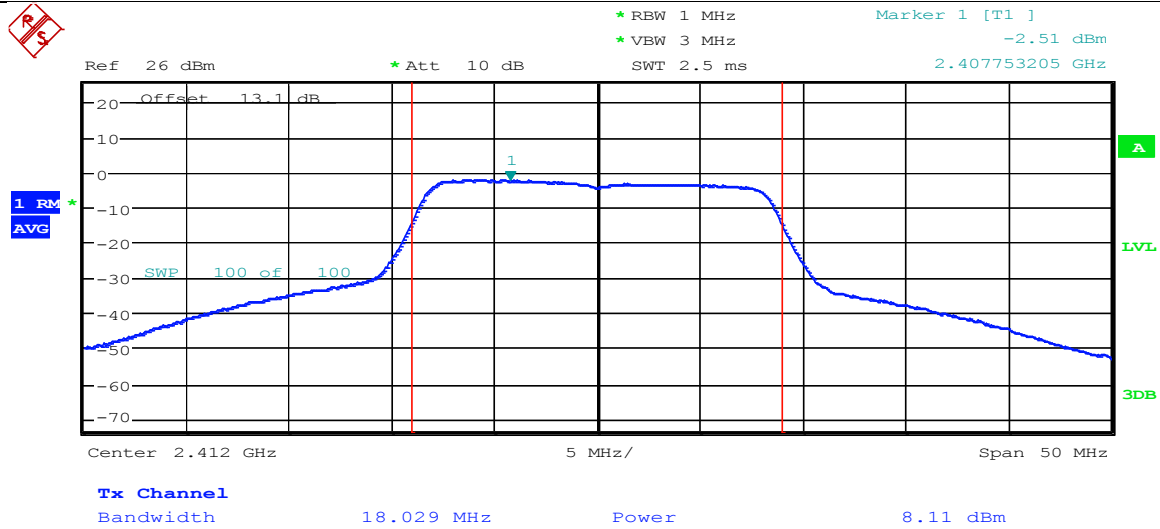


Date: 13.OCT.2020 16:28:05

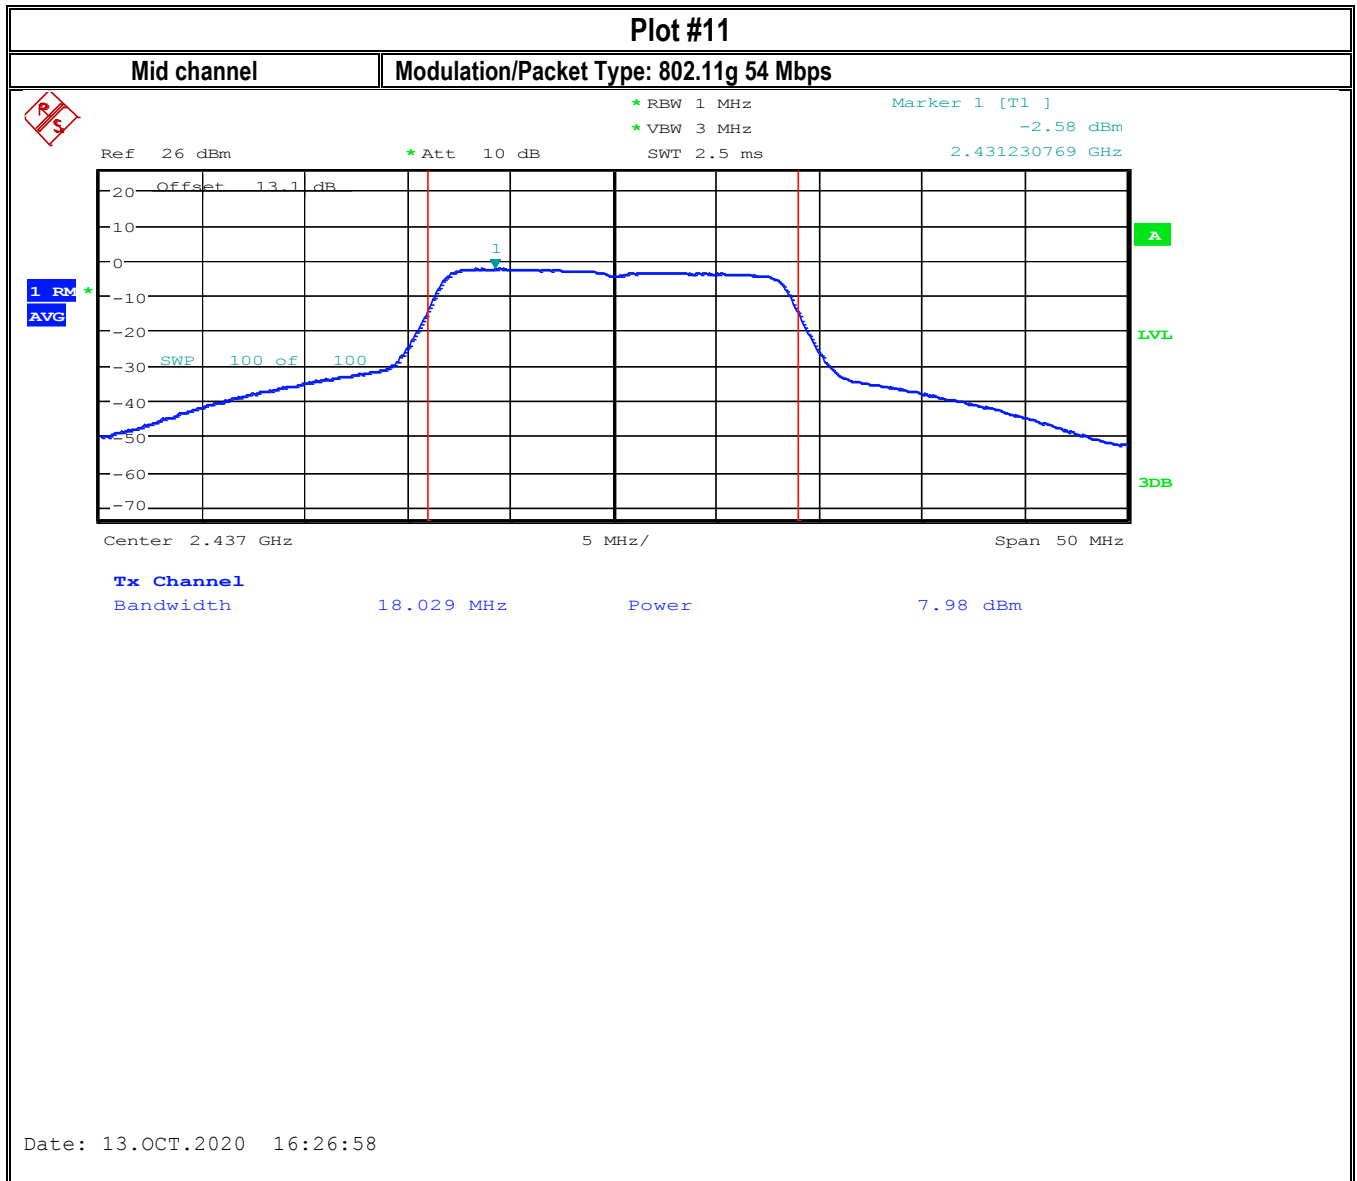

### Plot #12

High channel

Modulation/Packet Type: 802.11g 54 Mbps

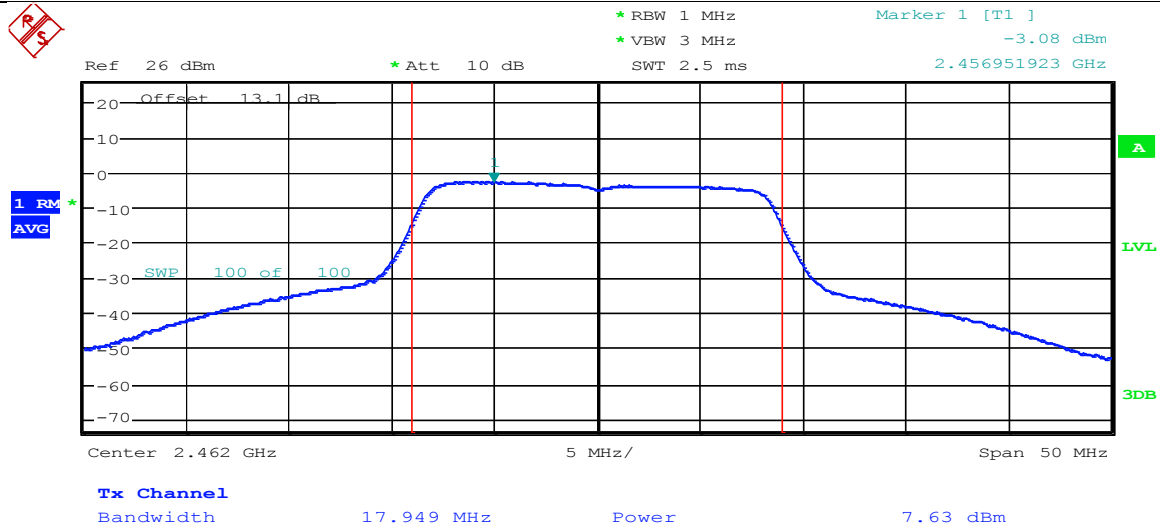


Date: 13.OCT.2020 16:27:30


### Plot #13


Low channel


Modulation/Packet Type: 802.11n\_HT20 MCS0

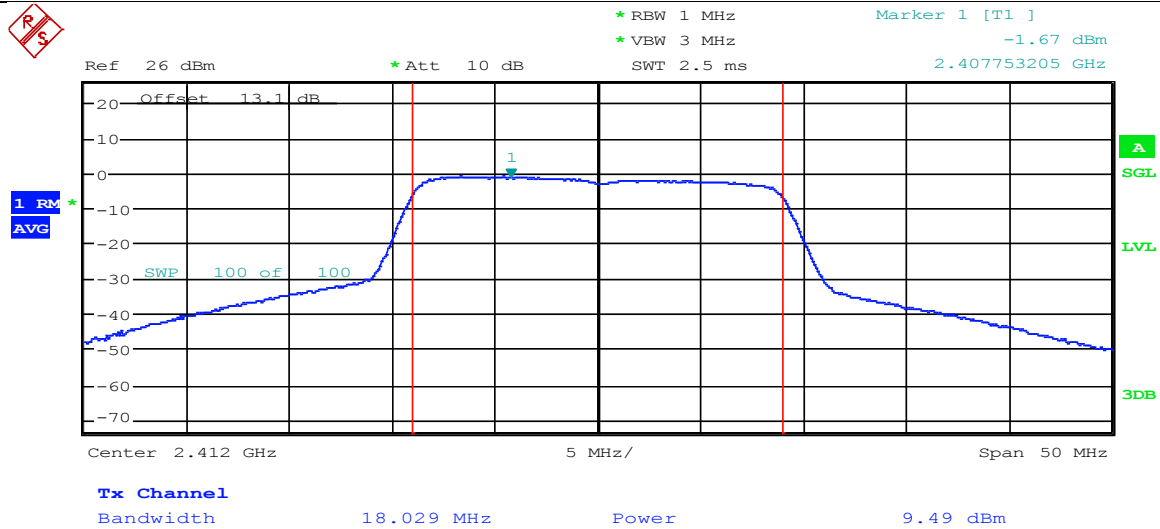


Date: 14.OCT.2020 16:47:19

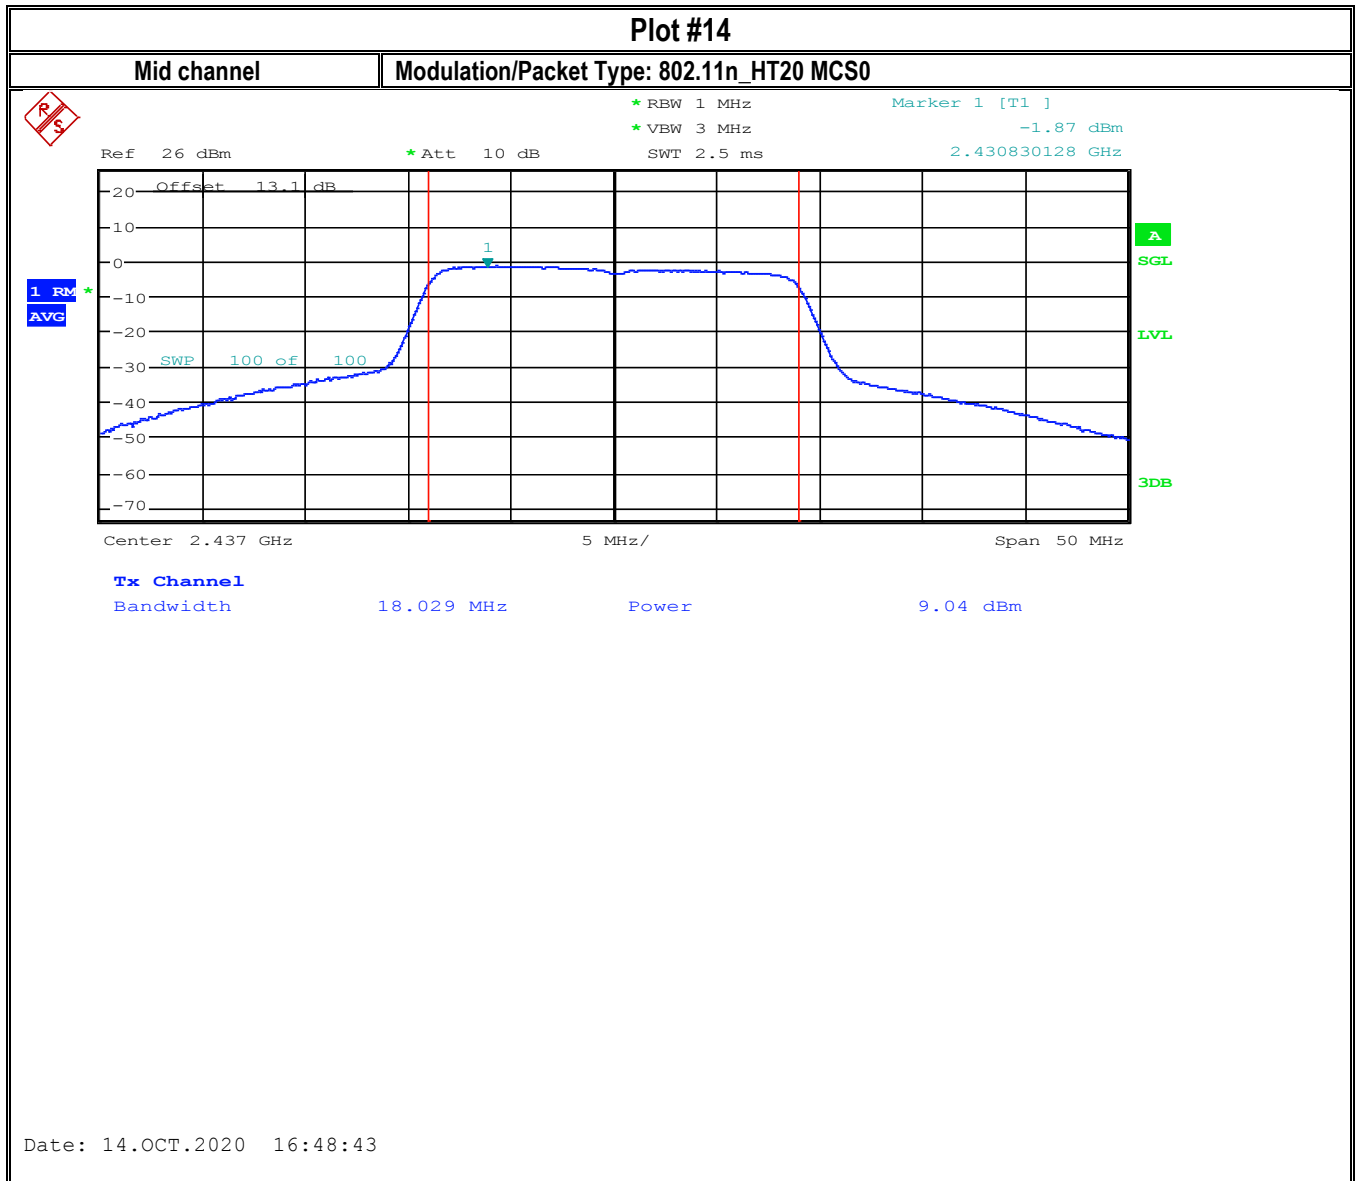

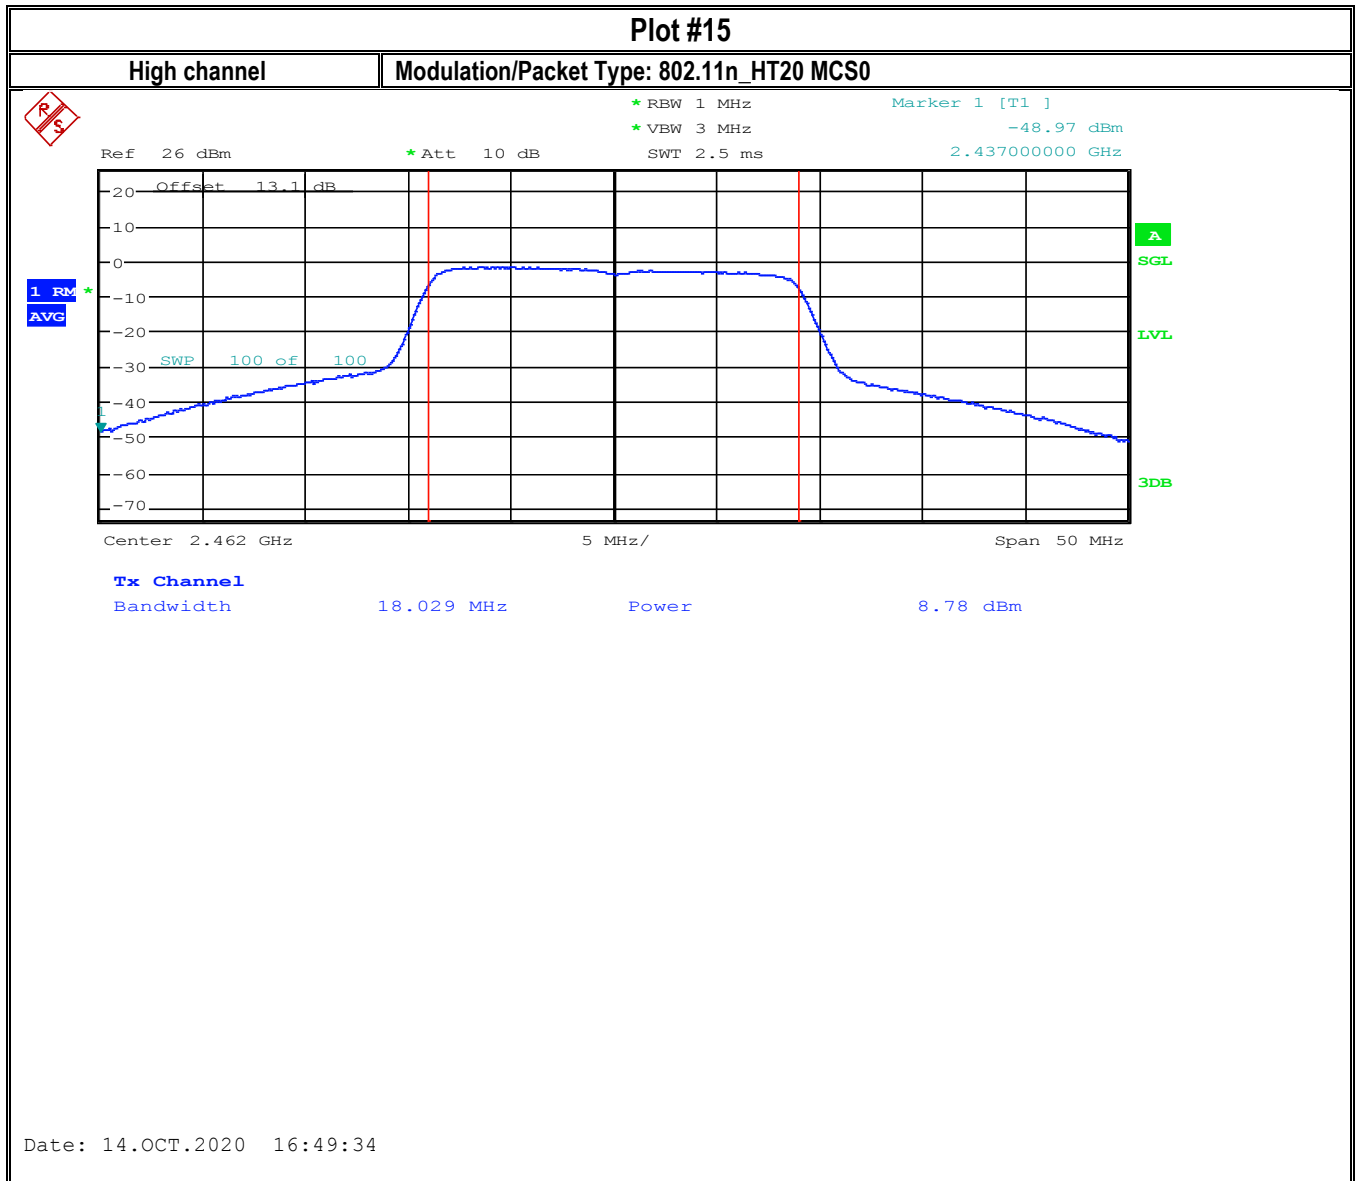

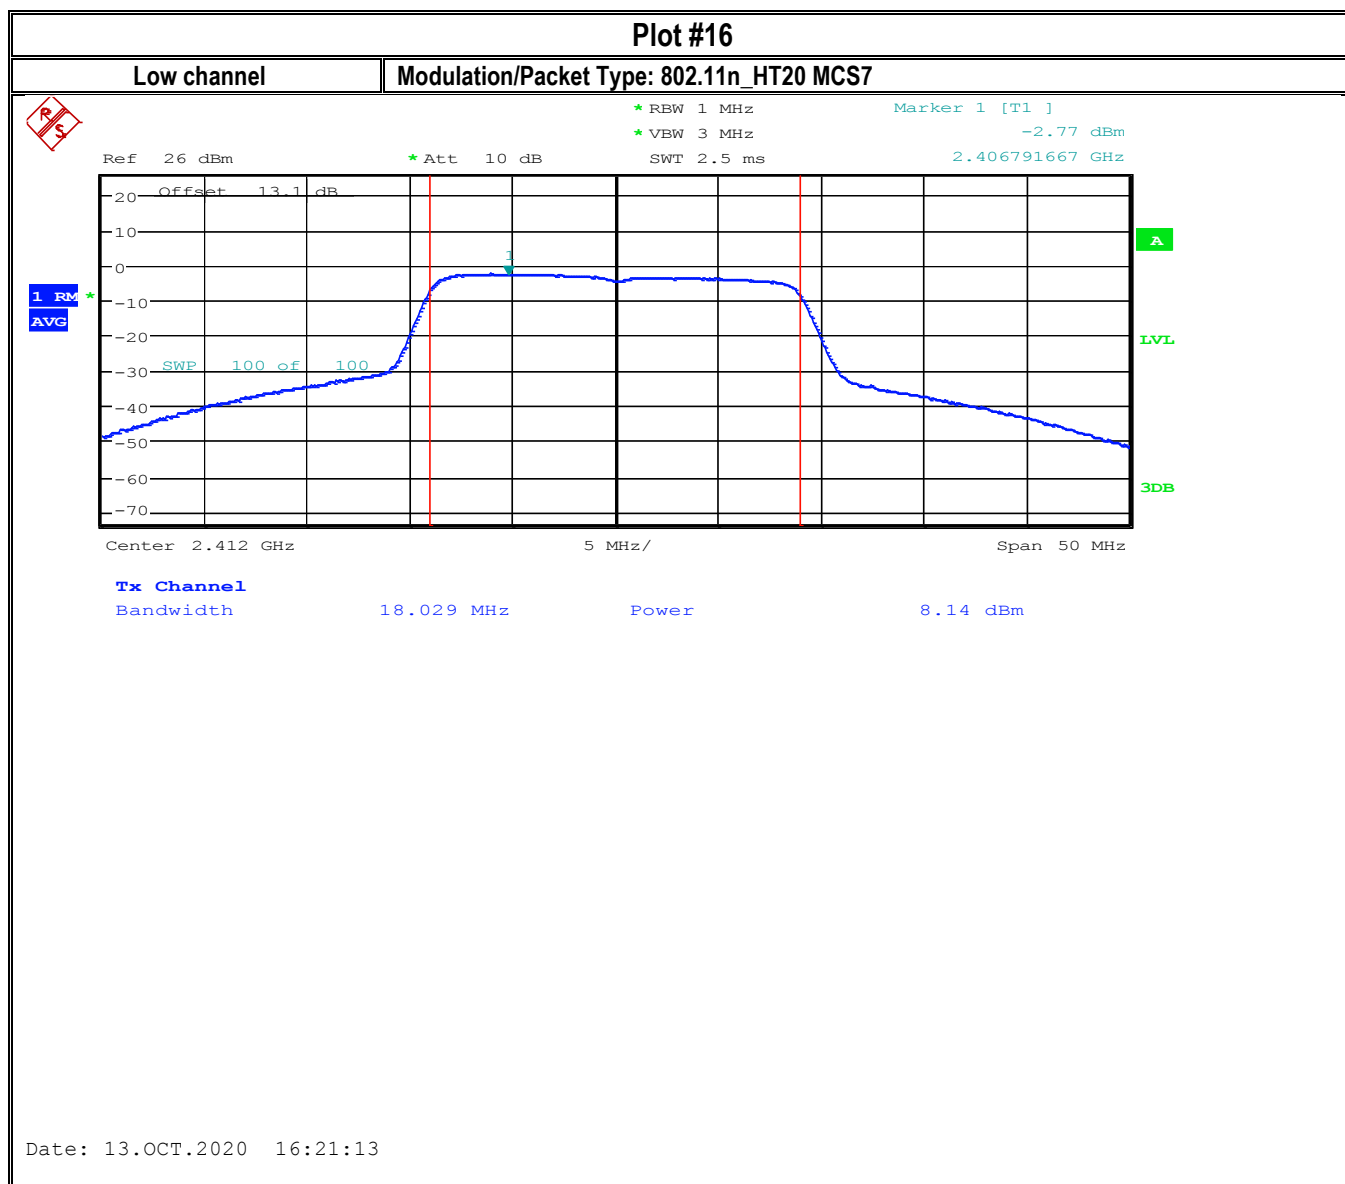


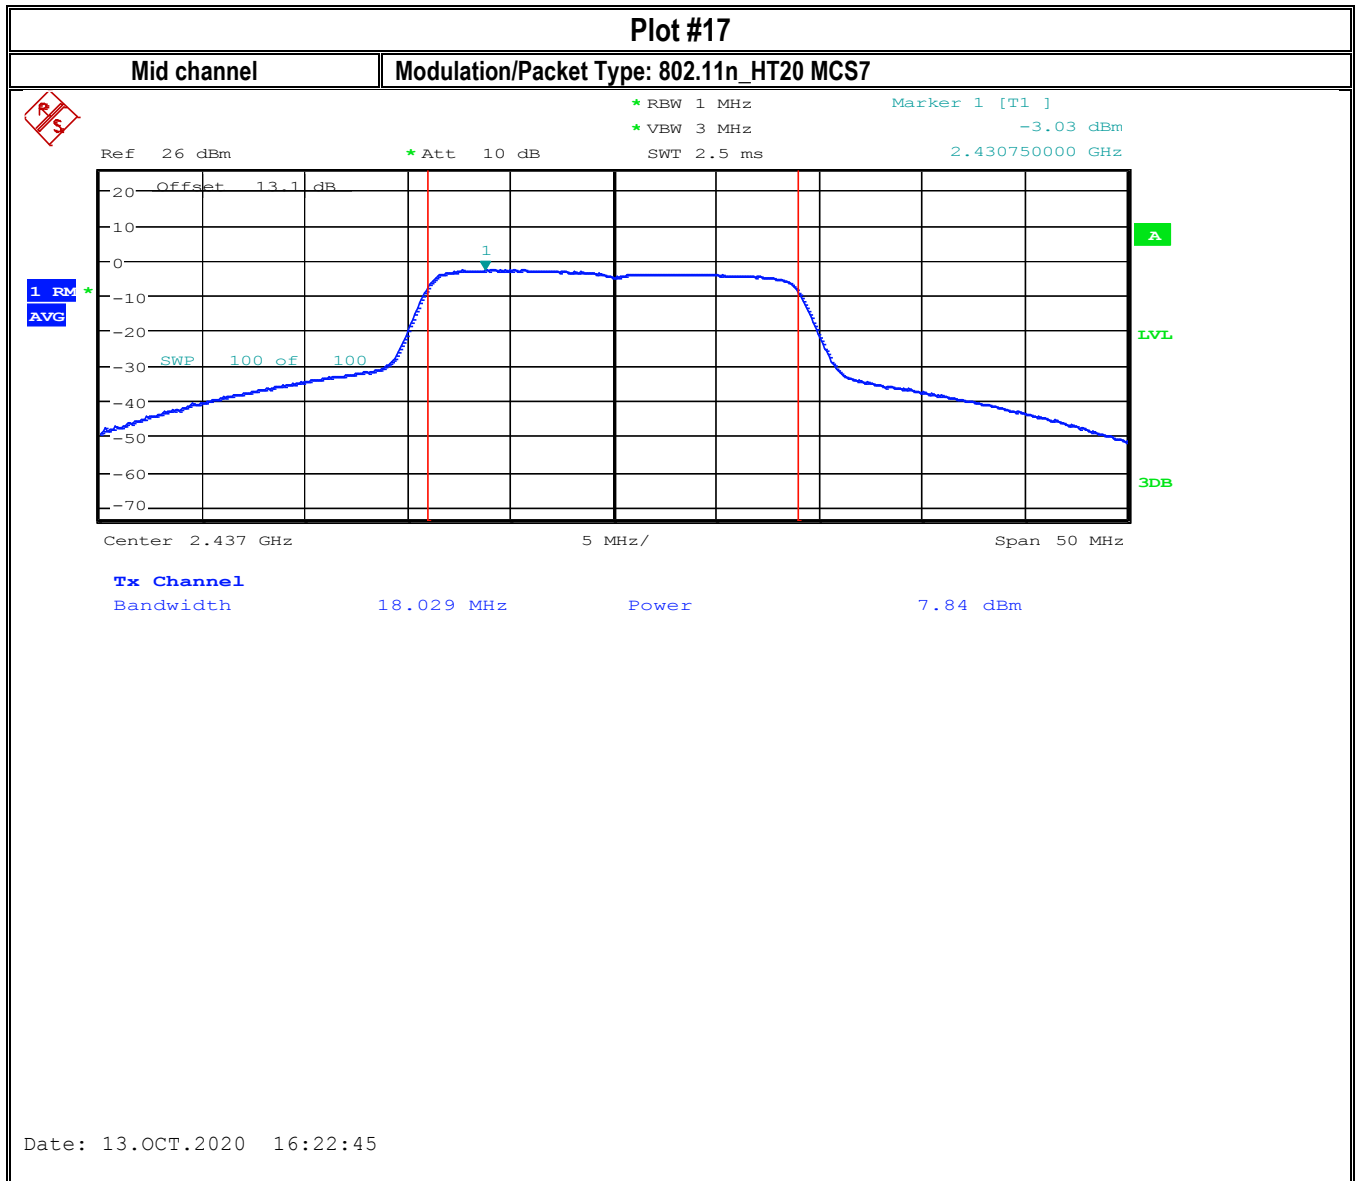

### Plot #18

High channel

Modulation/Packet Type: 802.11n\_HT20 MCS0

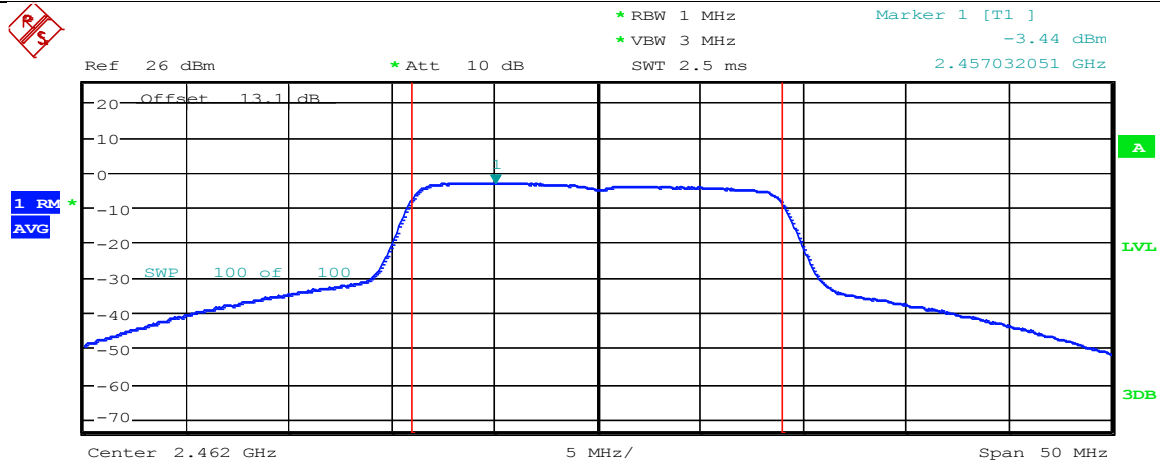

Tx Channel

Bandwidth

17.949 MHz

Power

7.66 dBm

Date: 13.OCT.2020 16:23:20

### 8.3 Power Spectral Density

#### 8.3.1 Measurement according to FCC 558074 D01 DTS Meas Guidance v05r02

##### Spectrum Analyzer settings for Peak PSD method:

- Set analyzer center frequency to DTS channel center frequency
- Set the span to 1.5 x DTS bandwidth
- Set RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
- Set the VBW  $\geq 3 \times \text{RBW}$
- Detector = Peak
- Sweep time = Auto couple
- Trace mode = Max hold
- Allow trace to fully stabilize
- Use the peak marker function to determine the maximum amplitude level within the RBW
- If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat

#### 8.3.2 Limits:

##### FCC§15.247(e) & RSS-247 5.2(2)

- For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

#### 8.3.3 Test conditions and setup:


| Ambient Temperature | EUT Set-Up # | EUT operating mode | Power Input | Single Antenna Gain |
|---------------------|--------------|--------------------|-------------|---------------------|
| 23° C               | 2            | 802.11b/g/n        | 5 VDC       | 1.6dBi              |


### 8.3.4 Measurement result:

Attenuation of cable and attenuator (already taken into account): 13.1 dB

| Plot # | Mode         | Data Rate | channel | Maximum Power Spectral Density (dBm/3 kHz) | PSD Adjusted for Antenna Gain (dBm/3 kHz) | Limit ( dBm / 3 kHz ) | Result |
|--------|--------------|-----------|---------|--------------------------------------------|-------------------------------------------|-----------------------|--------|
| 1      | 802.11b      | 1Mbps     | 1       | -17.06                                     | -15.46                                    | 8                     | Pass   |
| 2      |              |           | 6       | -17.59                                     | -15.99                                    | 8                     | Pass   |
| 3      |              |           | 11      | -18.05                                     | -16.45                                    | 8                     | Pass   |
| 4      | 802.11g      | 6Mbps     | 1       | -16.37                                     | -14.77                                    | 8                     | Pass   |
| 5      |              |           | 6       | -16.75                                     | -15.15                                    | 8                     | Pass   |
| 6      |              |           | 11      | -17.81                                     | -16.21                                    | 8                     | Pass   |
| 7      | 802.11n_HT20 | MCS0      | 1       | -16.71                                     | -15.11                                    | 8                     | Pass   |
| 8      |              |           | 6       | -16.18                                     | -14.58                                    | 8                     | Pass   |
| 9      |              |           | 11      | -17.36                                     | -15.76                                    | 8                     | Pass   |

### 8.3.5 Measurement Plots:

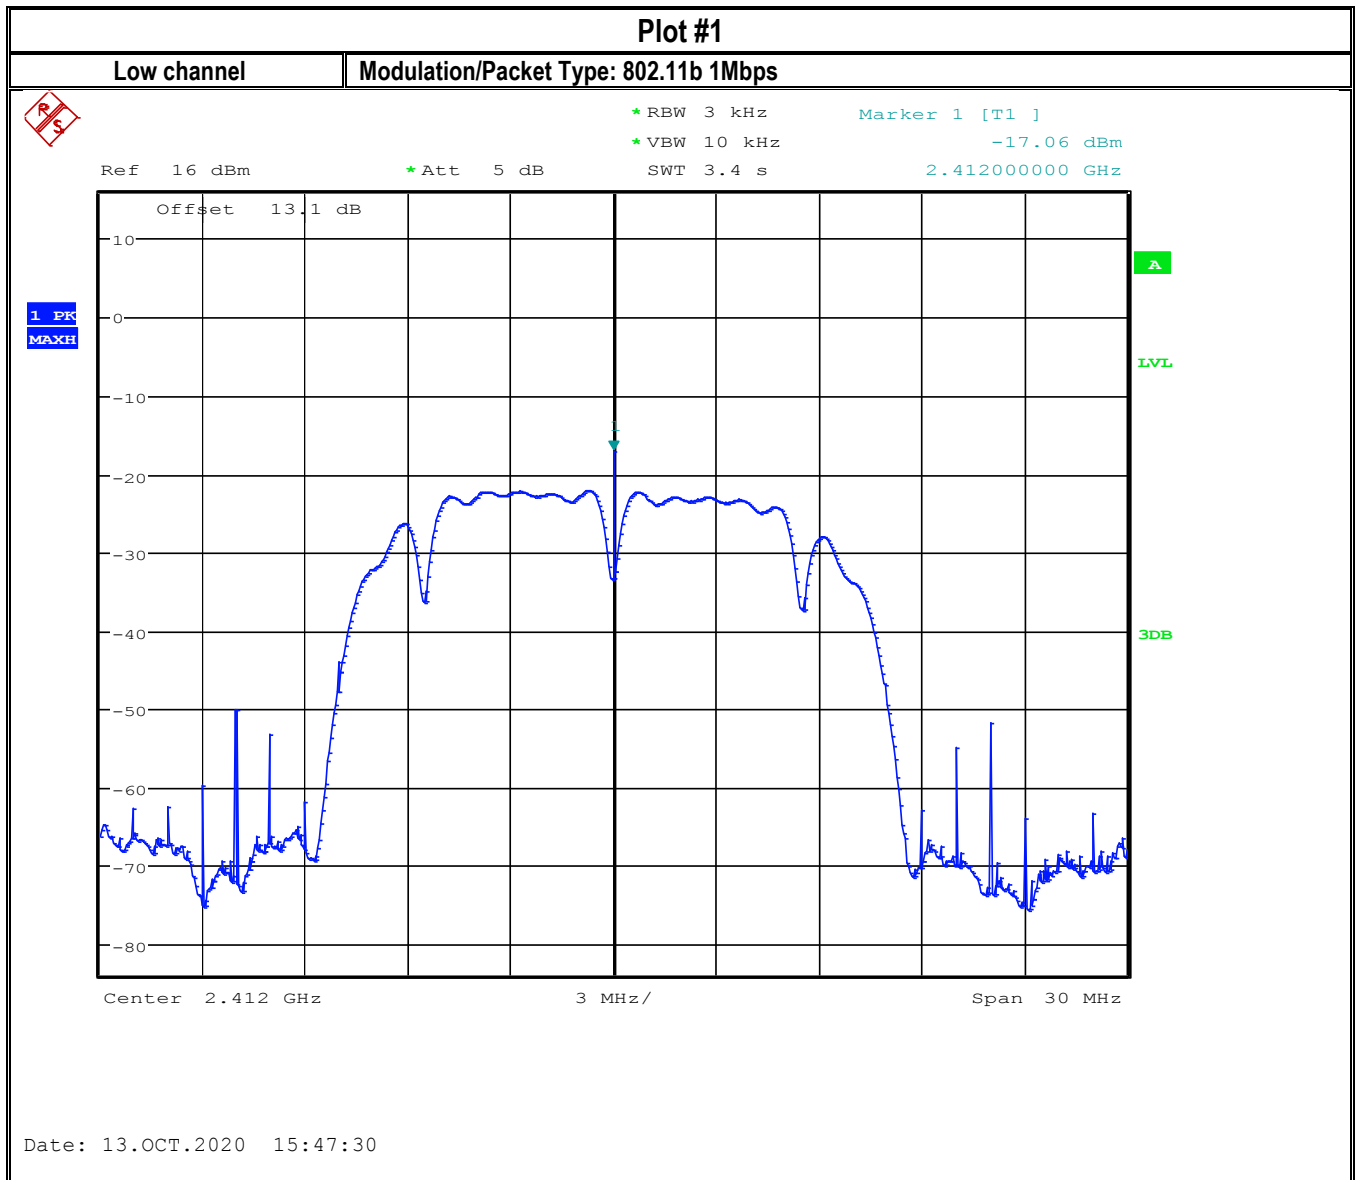

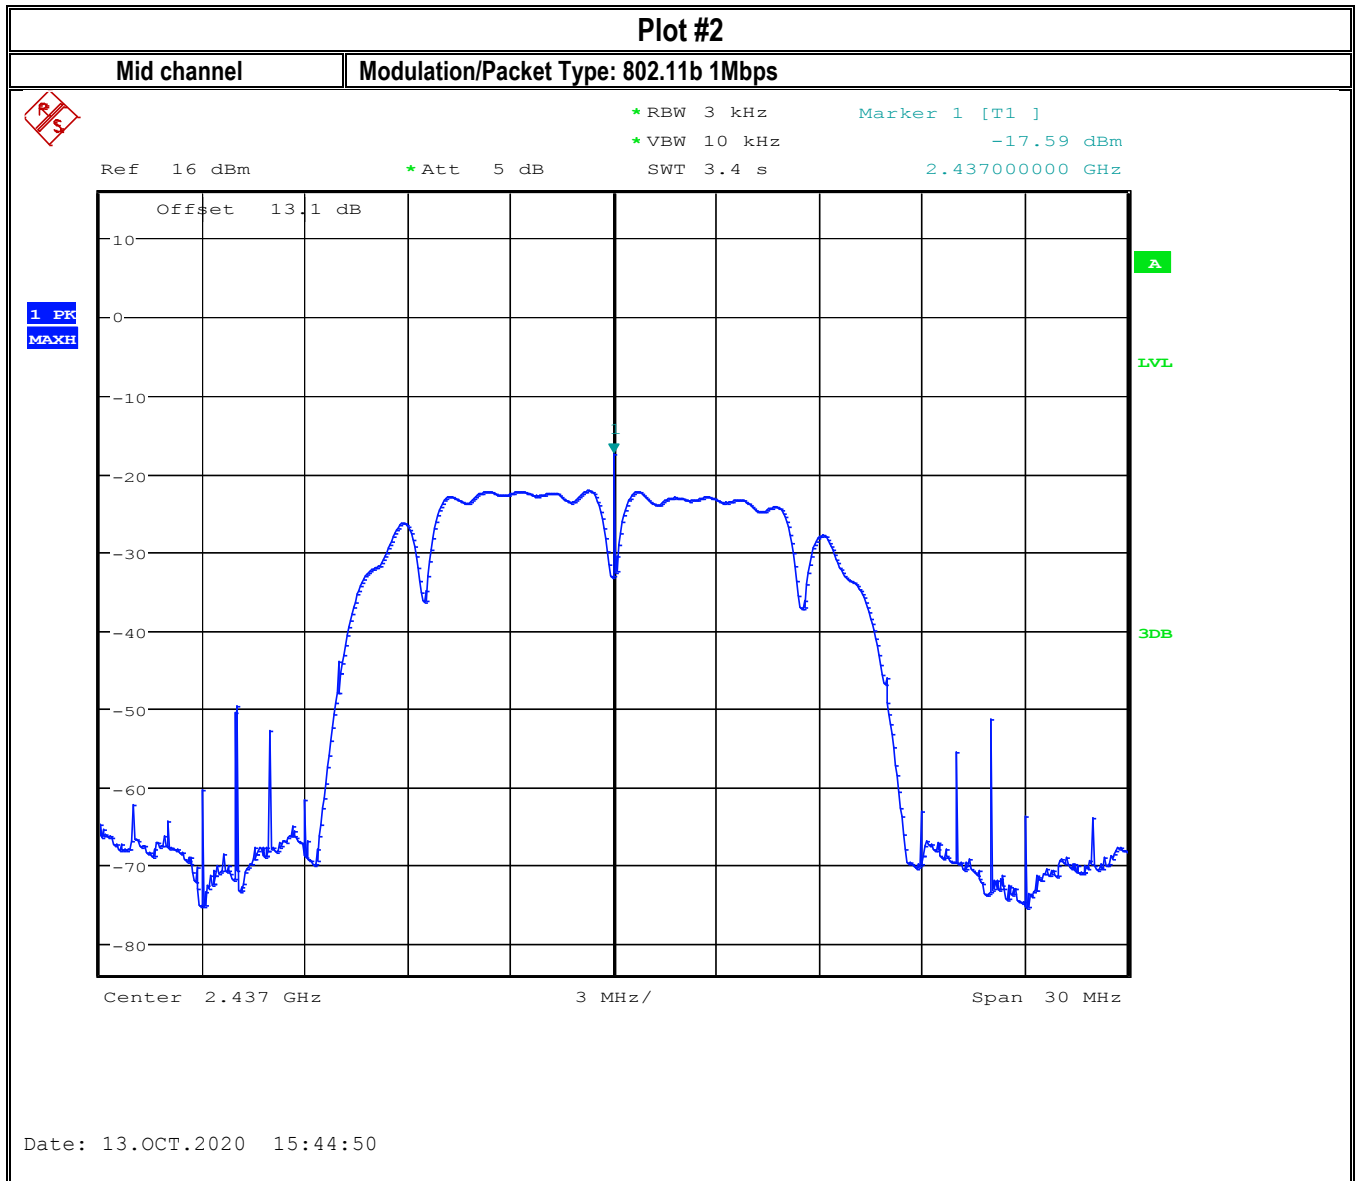

### Plot #3

High channel

Modulation/Packet Type: 802.11b 1Mbps




\*RBW 3 kHz  
\*VBW 10 kHz  
SWT 3.4 s  
Marker 1 [T1 ]  
-18.05 dBm  
2.461975962 GHz


Ref 16 dBm


\*Att 5 dB

1 PK  
MAXH

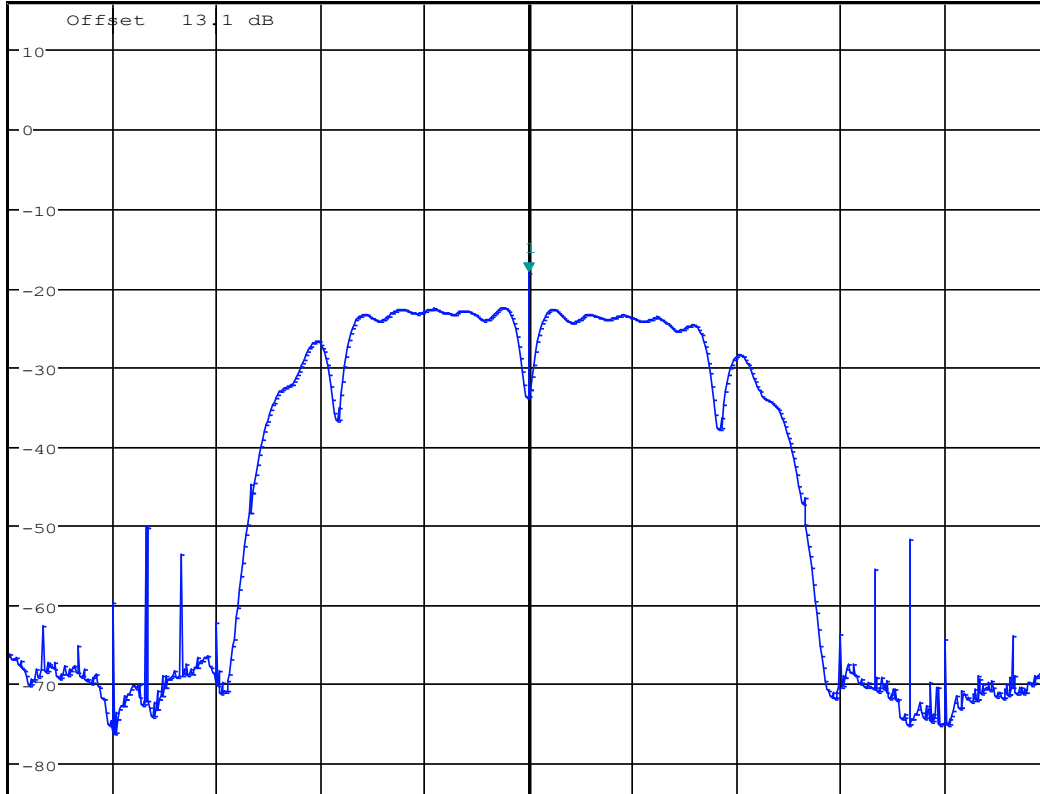

Date: 13.OCT.2020 15:46:39

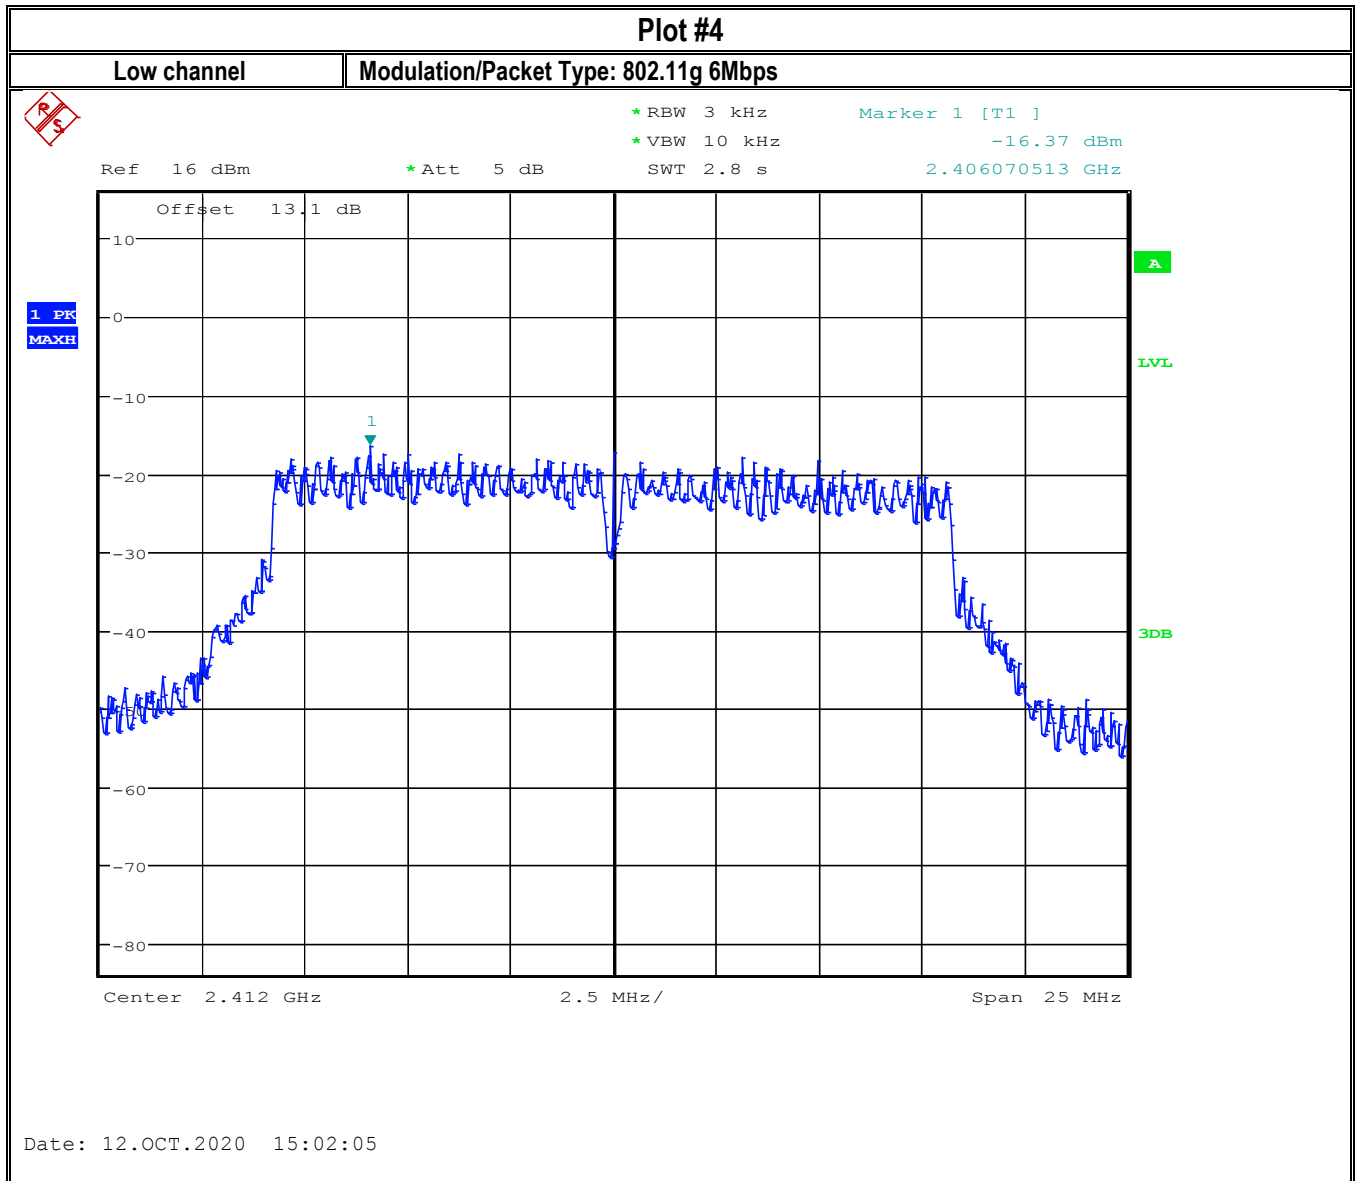

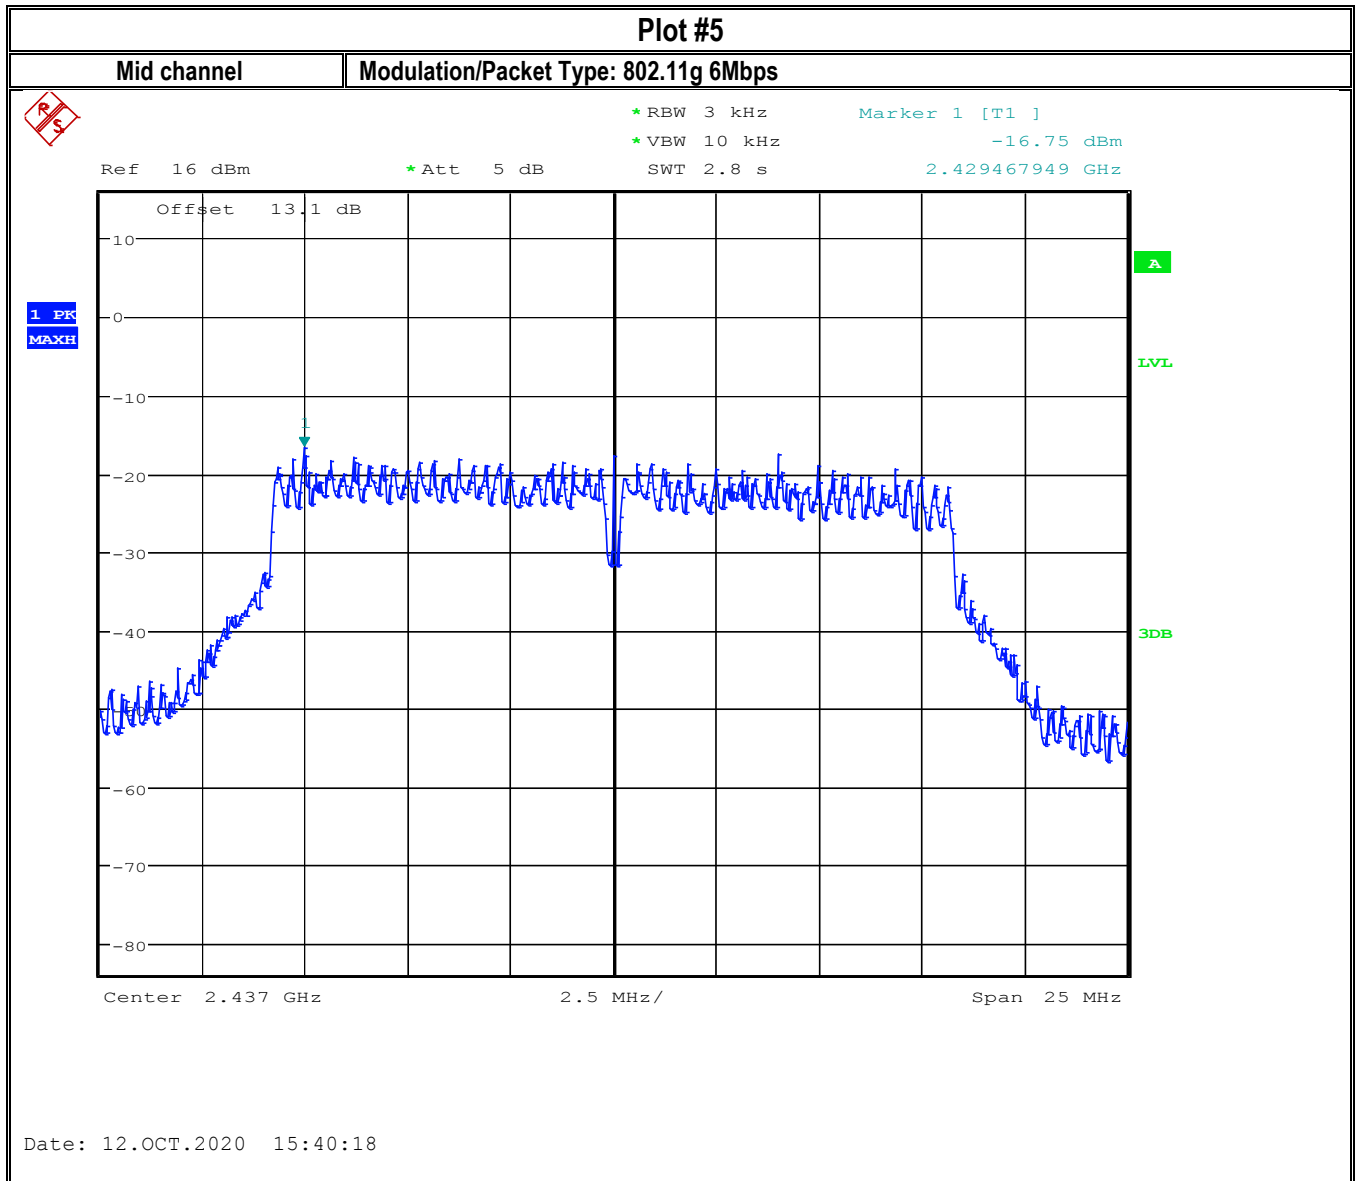

Plot #6

High channel

Modulation/Packet Type: 802.11g 6Mbps




\*RBW 3 kHz  
\*VBW 10 kHz  
SWT 2.8 s  
Marker 1 [T1 ]  
-17.81 dBm  
2.457913462 GHz

Ref 16 dBm

\*Att 5 dB

1 PK  
MAXH

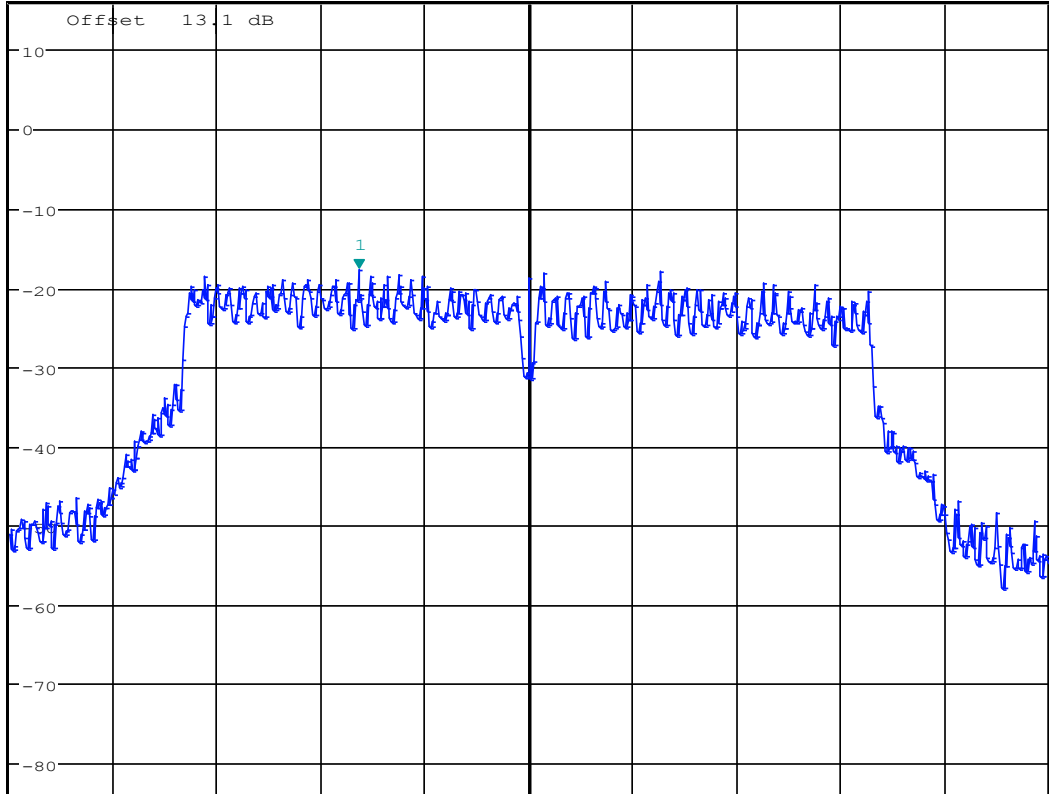



Center 2.462 GHz

2.5 MHz/

Span 25 MHz

Date: 12.OCT.2020 15:45:10

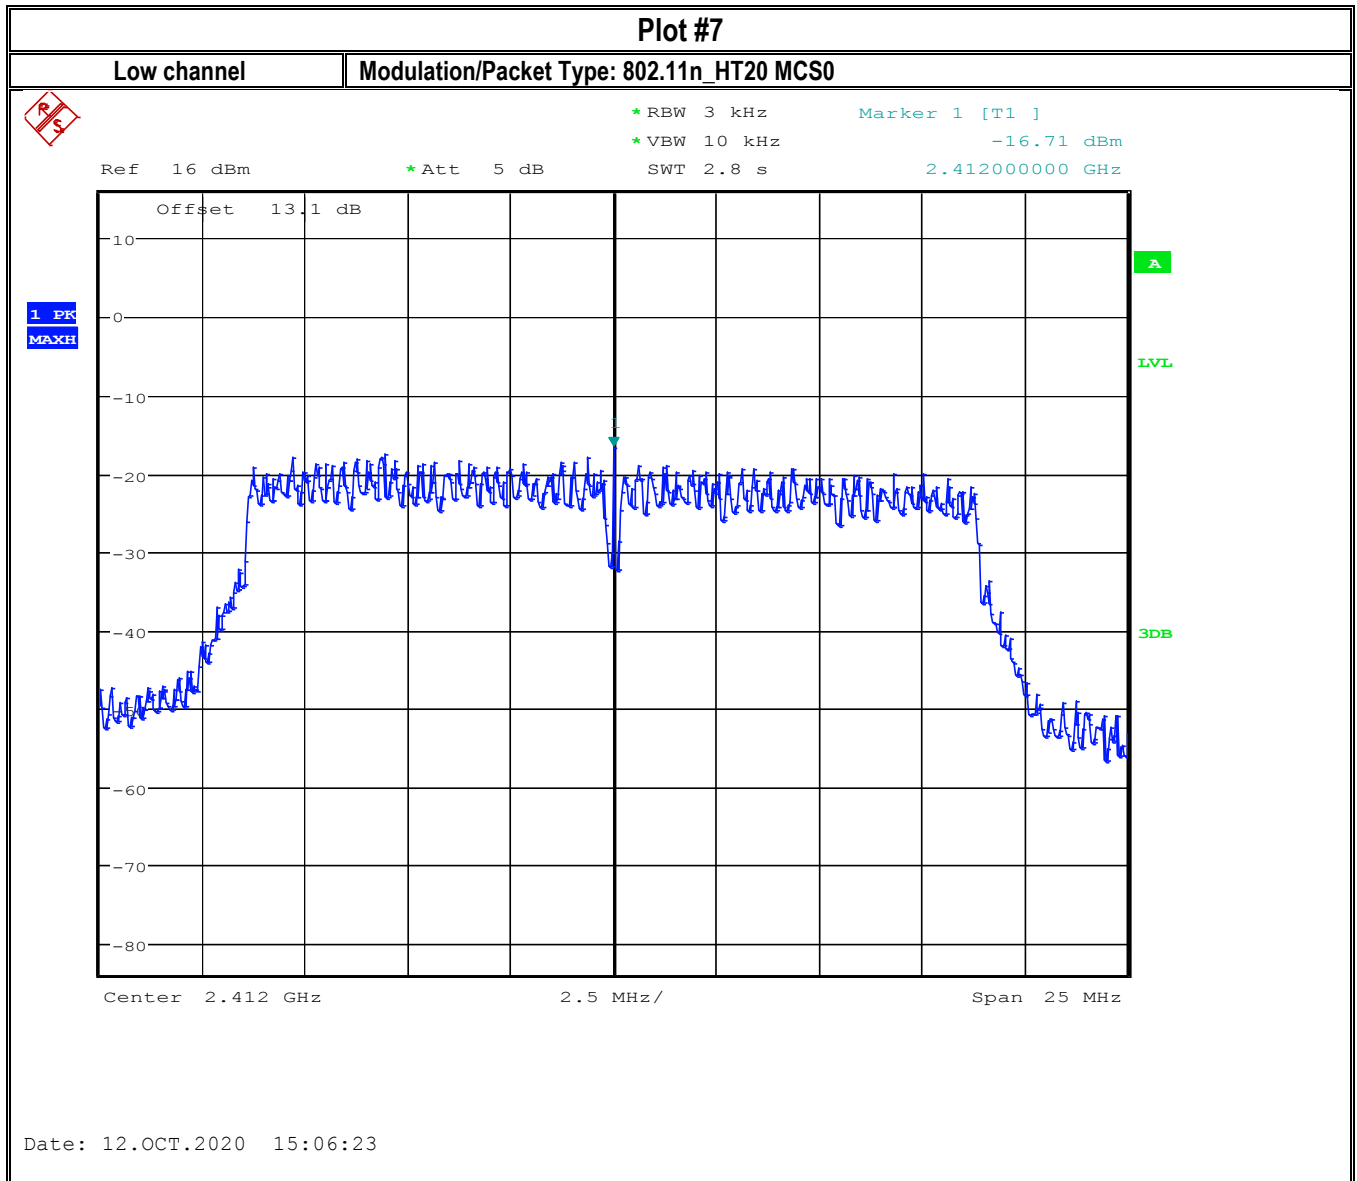

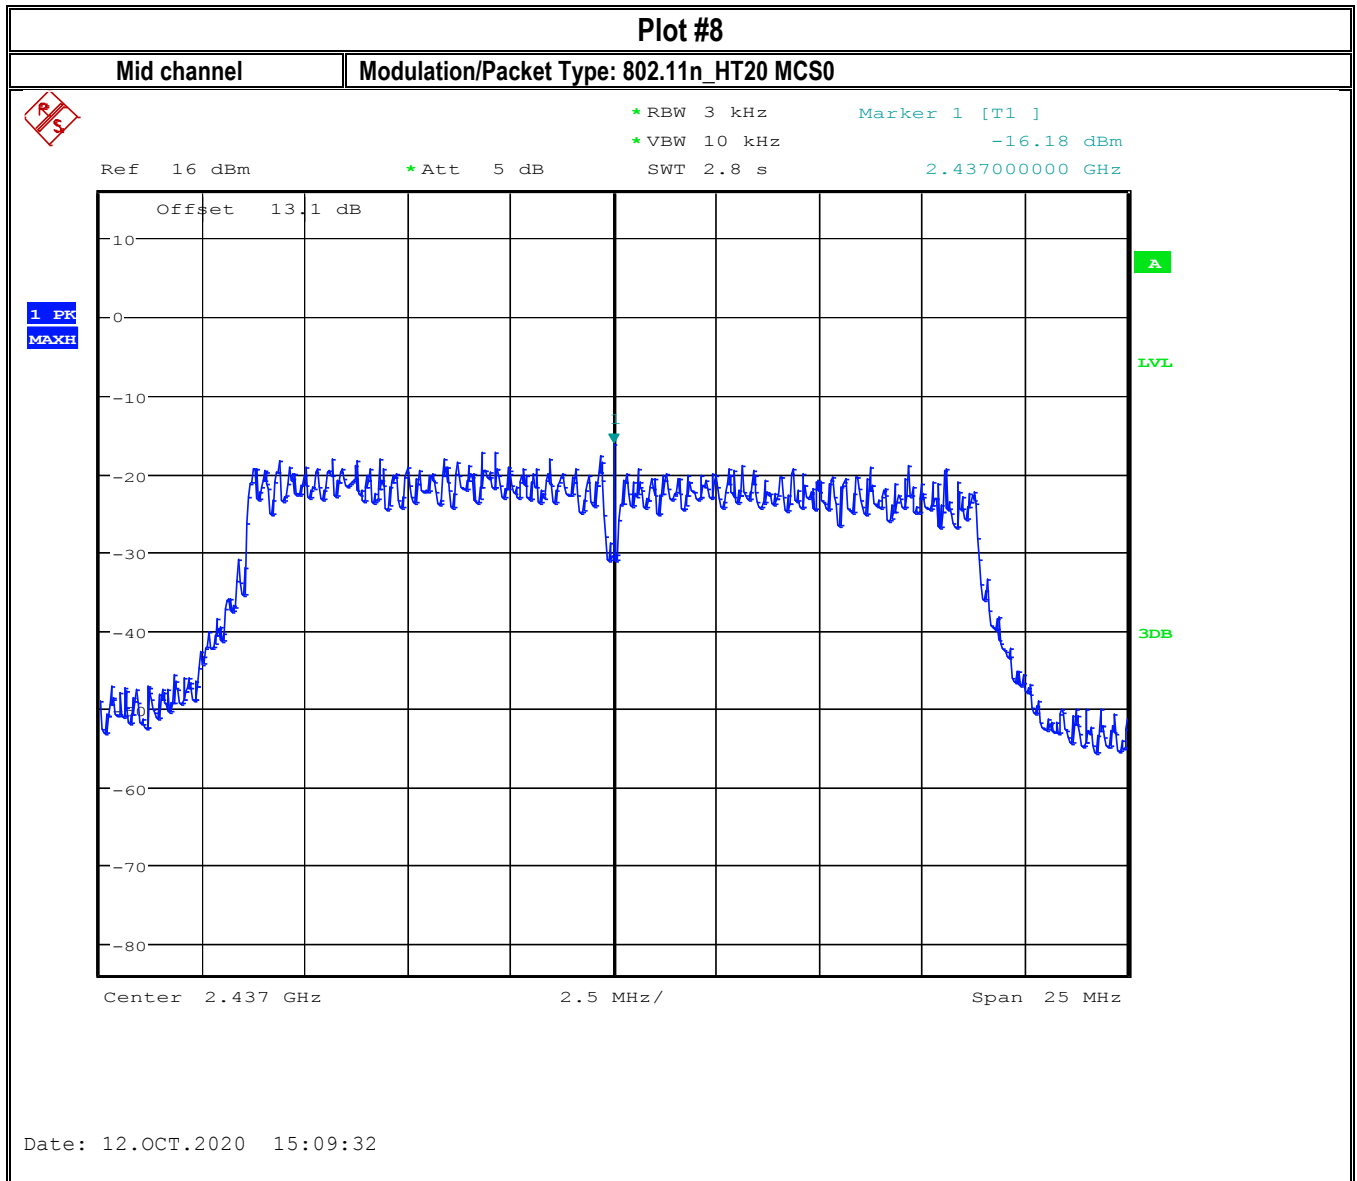

Date: 12.OCT.2020 15:09:32

Plot #9

High channel

Modulation/Package Type: 802.11n\_HT20 MCS0




\*RBW 3 kHz  
\*VBW 10 kHz  
SWT 2.8 s  
Marker 1 [T1 ]  
-17.36 dBm  
2.458193910 GHz

Ref 16 dBm

\*Att 5 dB

1 PK  
MAXH

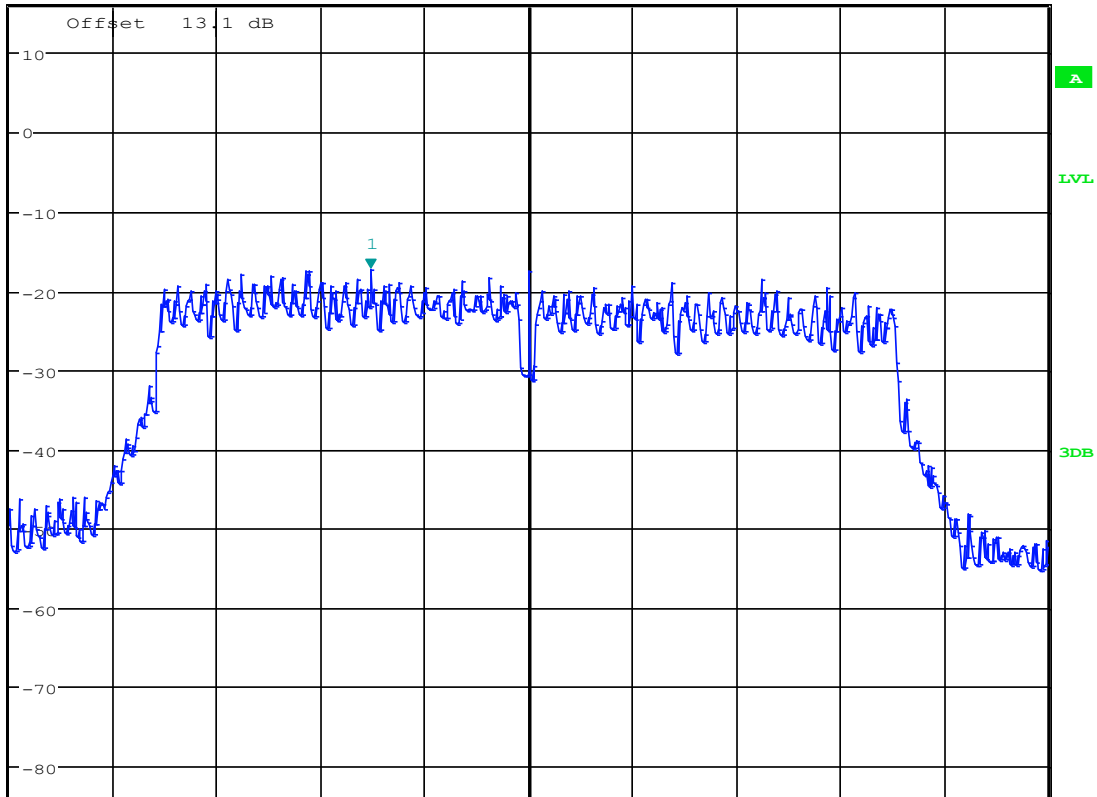

Center 2.462 GHz

2.5 MHz/

Span 25 MHz

Date: 12.OCT.2020 15:18:44

## 8.4 Band Edge Compliance

### 8.4.1 Measurement according to FCC 558074 D01 DTS Meas Guidance v05r02

#### Spectrum Analyzer settings for band edge:

- Set the center frequency and span to encompass frequency range to be measured
- RBW = 100 kHz
- VBW  $\geq 3 \times$  RBW
- Sweep Time: Auto couple
- Detector = Peak
- Trace = Max hold
- Allow trace to fully stabilize
- Use the peak marker function to determine the maximum amplitude level
- Set the marker on the emission at the band edge, or on the highest modulation product outside of the band, if this level is greater than that at the band edge

### 8.4.2 Limits non restricted band:

#### FCC§15.247 (d)

- In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

#### RSS-247 5/5

- In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30dB instead of 20dB.

#### Spectrum Analyzer settings for restricted band:

- Peak measurements are made using a peak detector and RBW=1 MHz

### 8.4.3 Limits restricted band §15.247/15.209/15.205 and RSS-Gen 8.9/8.10

- \*PEAK LIMIT= 74 dBμV/m @3m =-21.23 dBm
  - \*AVG LIMIT= 54 dBμV/m @3m =-41.23 dBm
  - Start frequency & stop frequency according to frequency range specified in the restricted band table in FCC section 15.205 & RSS-Gen 8.10
  - Measurements with a peak detector were used to show compliance to average limits, thus showing compliance to both peak and average limits.
- (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

(b)

| MHz               | MHz                 | MHz           | GHz         |
|-------------------|---------------------|---------------|-------------|
| 0.090-0.110       | 16.42-16.423        | 399.9-410     | 4.5-5.15    |
| 10.495-0.505      | 16.69475-16.69525   | 608-614       | 5.35-5.46   |
| 2.1735-2.1905     | 16.80425-16.80475   | 960-1240      | 7.25-7.75   |
| 4.125-4.128       | 25.5-25.67          | 1300-1427     | 8.025-8.5   |
| 4.17725-4.17775   | 37.5-38.25          | 1435-1626.5   | 9.0-9.2     |
| 4.20725-4.20775   | 73-74.6             | 1645.5-1646.5 | 9.3-9.5     |
| 6.215-6.218       | 74.8-75.2           | 1660-1710     | 10.6-12.7   |
| 6.26775-6.26825   | 108-121.94          | 1718.8-1722.2 | 13.25-13.4  |
| 6.31175-6.31225   | 123-138             | 2200-2300     | 14.47-14.5  |
| 8.291-8.294       | 149.9-150.05        | 2310-2390     | 15.35-16.2  |
| 8.362-8.366       | 156.52475-156.52525 | 2483.5-2500   | 17.7-21.4   |
| 8.37625-8.38675   | 156.7-156.9         | 2690-2900     | 22.01-23.12 |
| 8.41425-8.41475   | 162.0125-167.17     | 3260-3267     | 23.6-24.0   |
| 12.29-12.293      | 167.72-173.2        | 3332-3339     | 31.2-31.8   |
| 12.51975-12.52025 | 240-285             | 3345.8-3358   | 36.43-36.5  |
| 12.57675-12.57725 | 322-335.4           | 3600-4400     | Above 38.6  |
| 13.36-13.41       |                     |               |             |

### 8.4.4 Test conditions and setup:

| Ambient Temperature | EUT Set-Up # | EUT operating mode | Power Input | Single Antenna Gain |
|---------------------|--------------|--------------------|-------------|---------------------|
| 22° C               | 2            | 802.11b/g/n        | 5 VDC       | 1.6 dBi             |

### 8.4.5 Measurement result:


| Plot # | EUT operating mode | Band Edge             | Frequency (MHz) | Band Edge Delta (dBc) | Limit <sup>1</sup> (dBc) | Result |
|--------|--------------------|-----------------------|-----------------|-----------------------|--------------------------|--------|
| 1,2    | 802.11b            | Lower, Non-restricted | 2397.03         | -43.80                | -20                      | Pass   |
| 3,4    | 802.11g            | Lower, Non-restricted | 2399.48         | -24.12                | -20                      | Pass   |
| 5,6    | 802.11n_HT20       | Lower, Non-restricted | 2399.81         | -25.89                | -20                      | Pass   |


**Note 1:** Based on the peak output power measurements are compliant with the limit of output power, -20 dBc limit is used for non-restricted band edge.


| Plot # | EUT operating mode | Band Edge                | Frequency (MHz) | Measured Peak Value (dBm) | Corrected by duty cycle | Corrected by Antenna Gain (dBm) | Limit (dBμV/m @3m) | Result |
|--------|--------------------|--------------------------|-----------------|---------------------------|-------------------------|---------------------------------|--------------------|--------|
| 7      | 802.11b            | Lower Restricted peak    | 2389.20         | -50.16                    | NA                      | -48.56                          | 74 Peak            | Pass   |
| 8      | 802.11b            | Lower Restricted Average | 2387.90         | -61.04                    | -61.04                  | -59.44                          | 54 AVG             | Pass   |
| 9      | 802.11g            | Lower Restricted peak    | 2389.68         | -25.65                    | NA                      | -24.05                          | 74 Peak            | Pass   |
| 10     | 802.11g            | Lower Restricted Average | 2389.95         | -48.19                    | -48.19                  | -46.59                          | 54 AVG             | Pass   |
| 11     | 802.11n_HT20       | Lower Restricted peak    | 2389.60         | -27.02                    | NA                      | -25.42                          | 74 Peak            | Pass   |
| 12     | 802.11n_HT20       | Lower Restricted Average | 2389.88         | -46.16                    | -46.16                  | -44.56                          | 54 AVG             | Pass   |
| 13     | 802.11b            | Upper Restricted peak    | 2485.51         | -50.72                    | NA                      | -49.12                          | 74 Peak            | Pass   |
| 14     | 802.11b            | Upper Restricted Average | 2487.60         | -61.27                    | -61.27                  | -59.67                          | 54 AVG             | Pass   |
| 15     | 802.11g            | Upper Restricted peak    | 2485.17         | -31.32                    | NA                      | -29.72                          | 74 Peak            | Pass   |
| 16     | 802.11g            | Upper Restricted Average | 2483.55         | -49.89                    | -49.89                  | -48.29                          | 54 AVG             | Pass   |
| 17     | 802.11n_HT20       | Upper Restricted peak    | 2483.61         | -29.95                    | NA                      | -28.35                          | 74 Peak            | Pass   |
| 18     | 802.11n_HT20       | Upper Restricted Average | 2483.61         | -48.06                    | -48.06                  | -46.46                          | 54 AVG             | Pass   |


The value of above table shows worst case of each mode.


## 8.4.6 Measurement Plots:

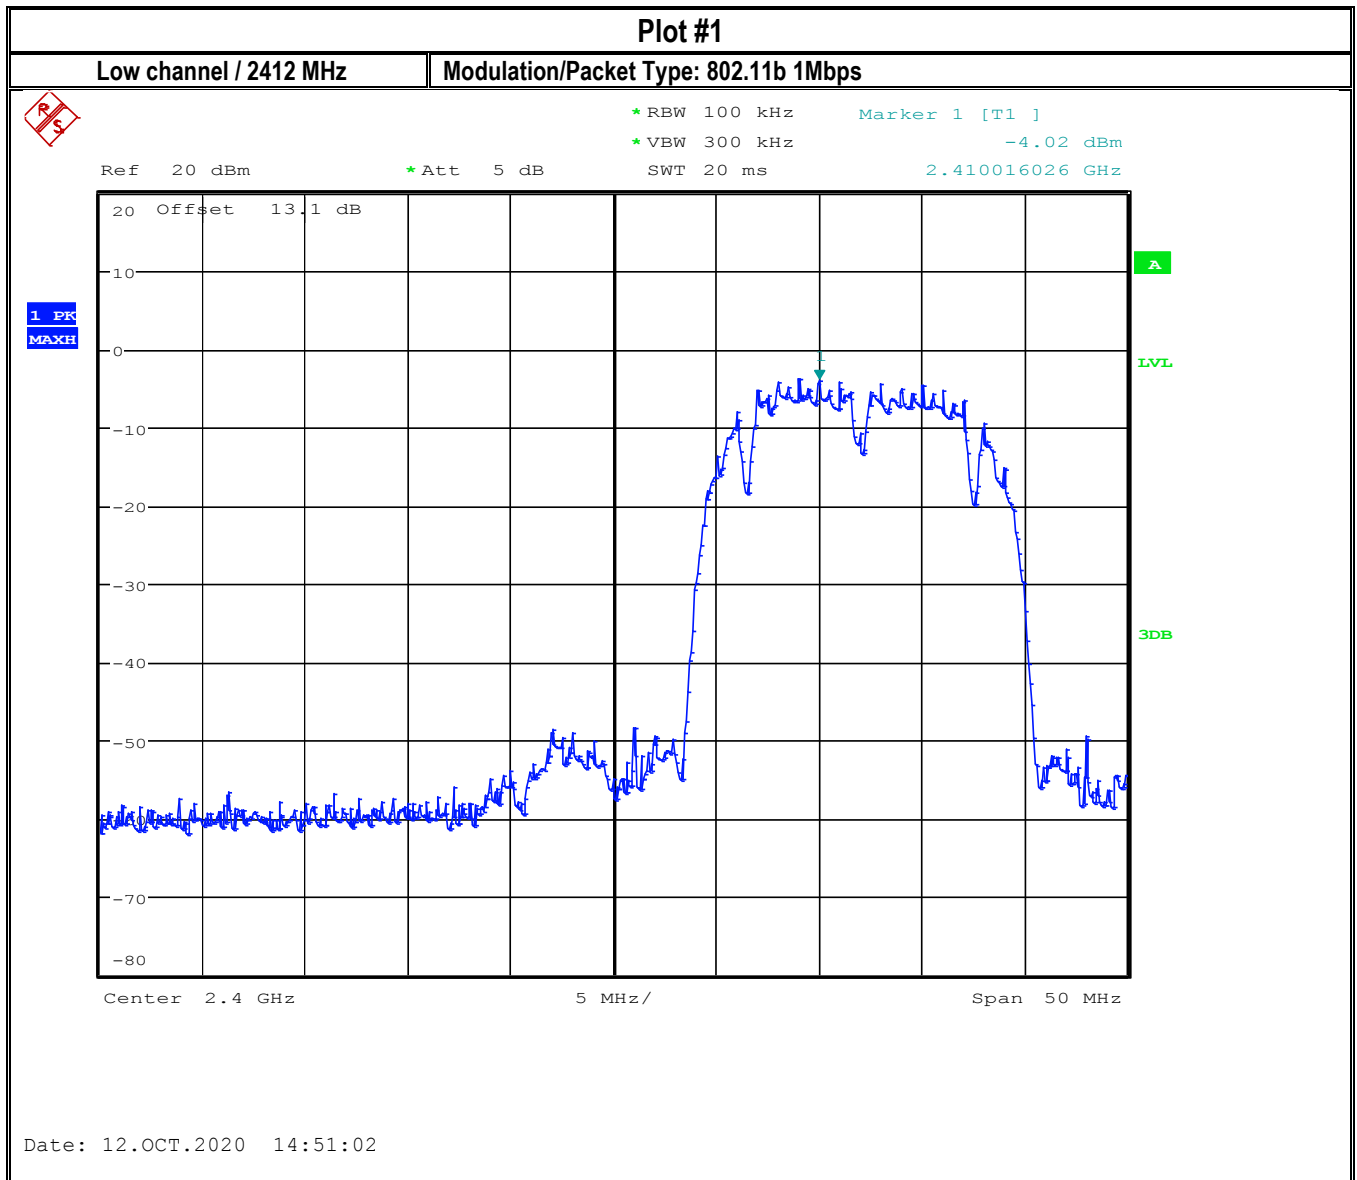


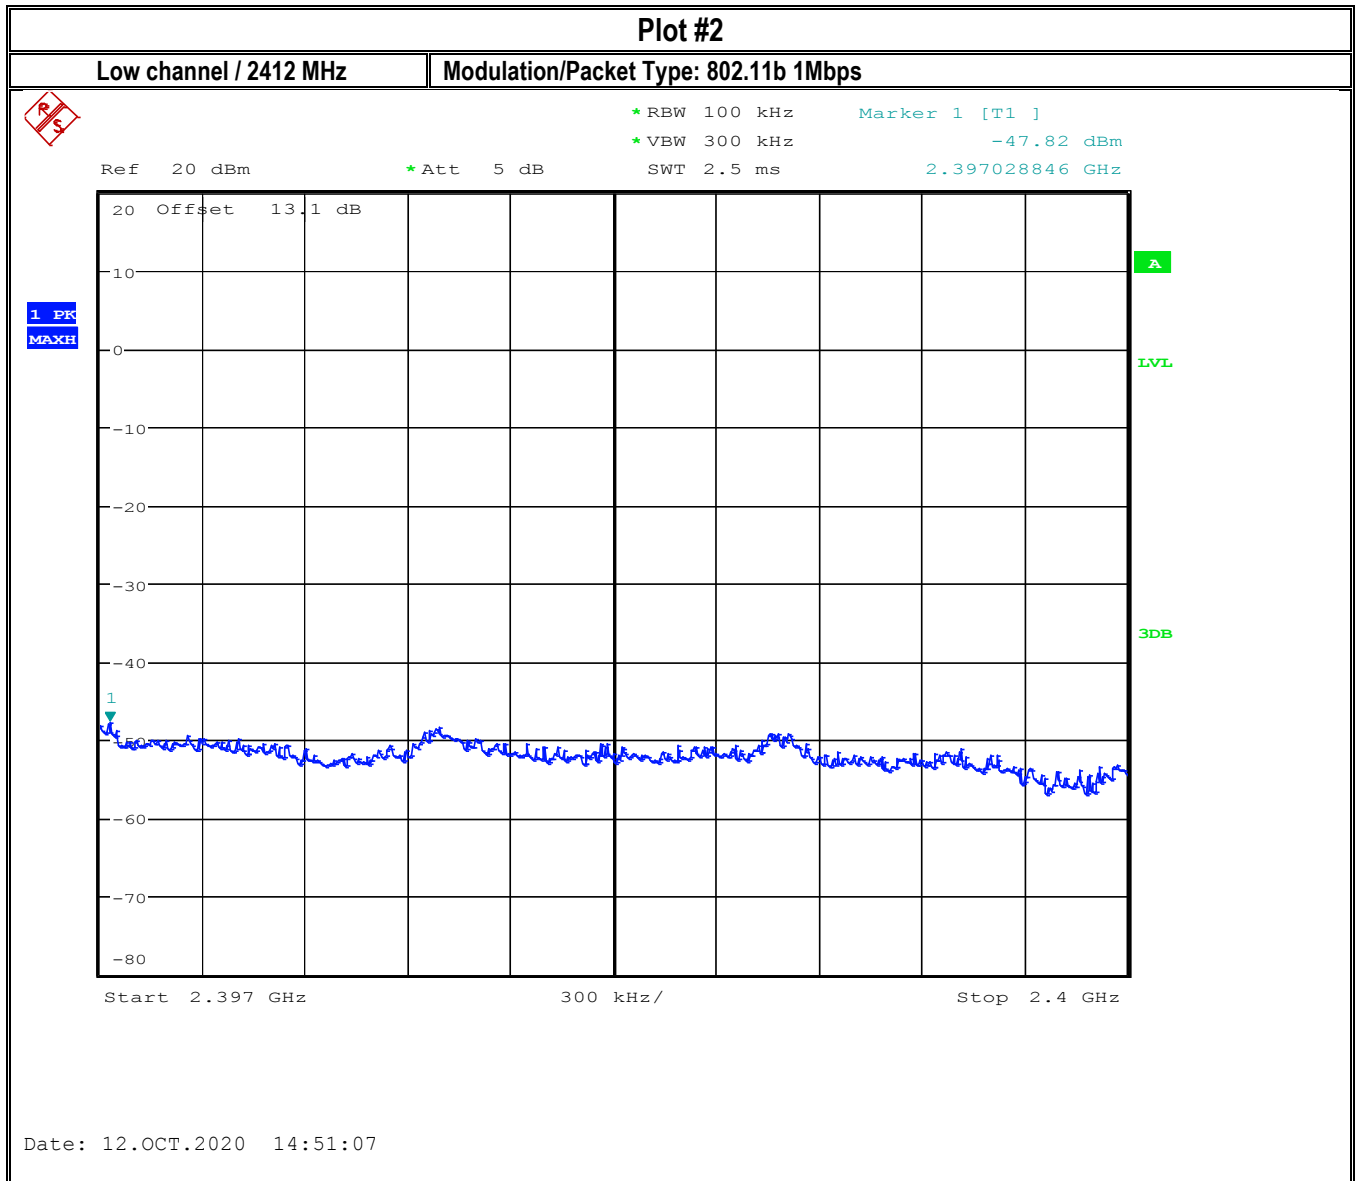


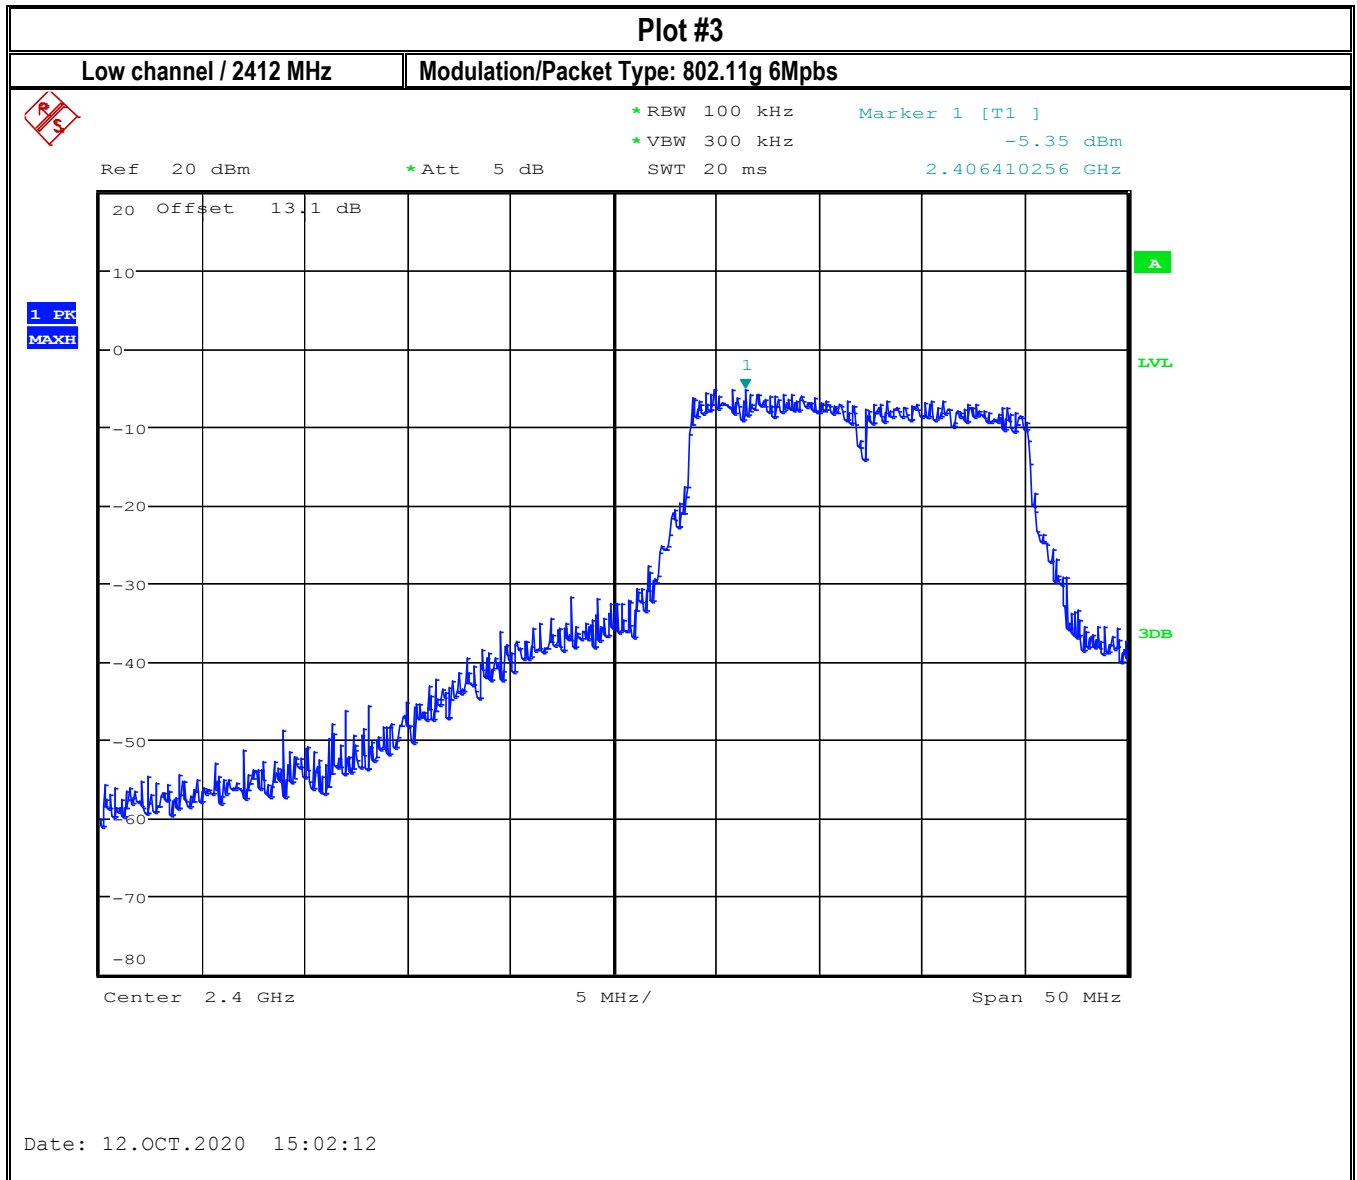


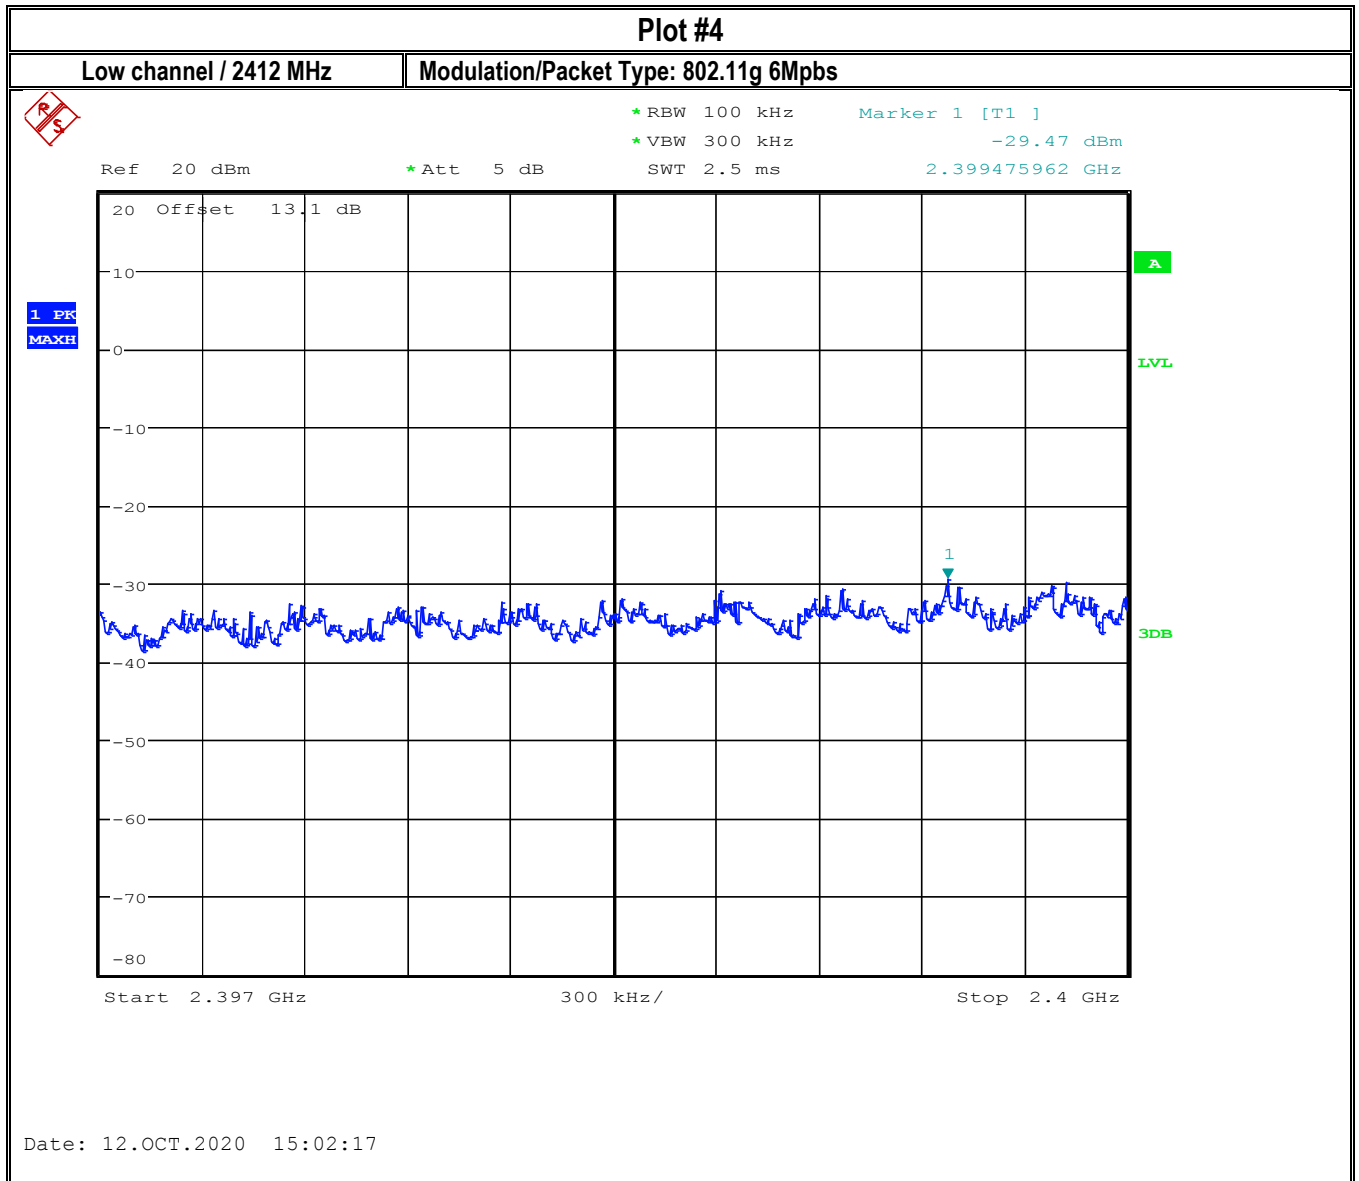

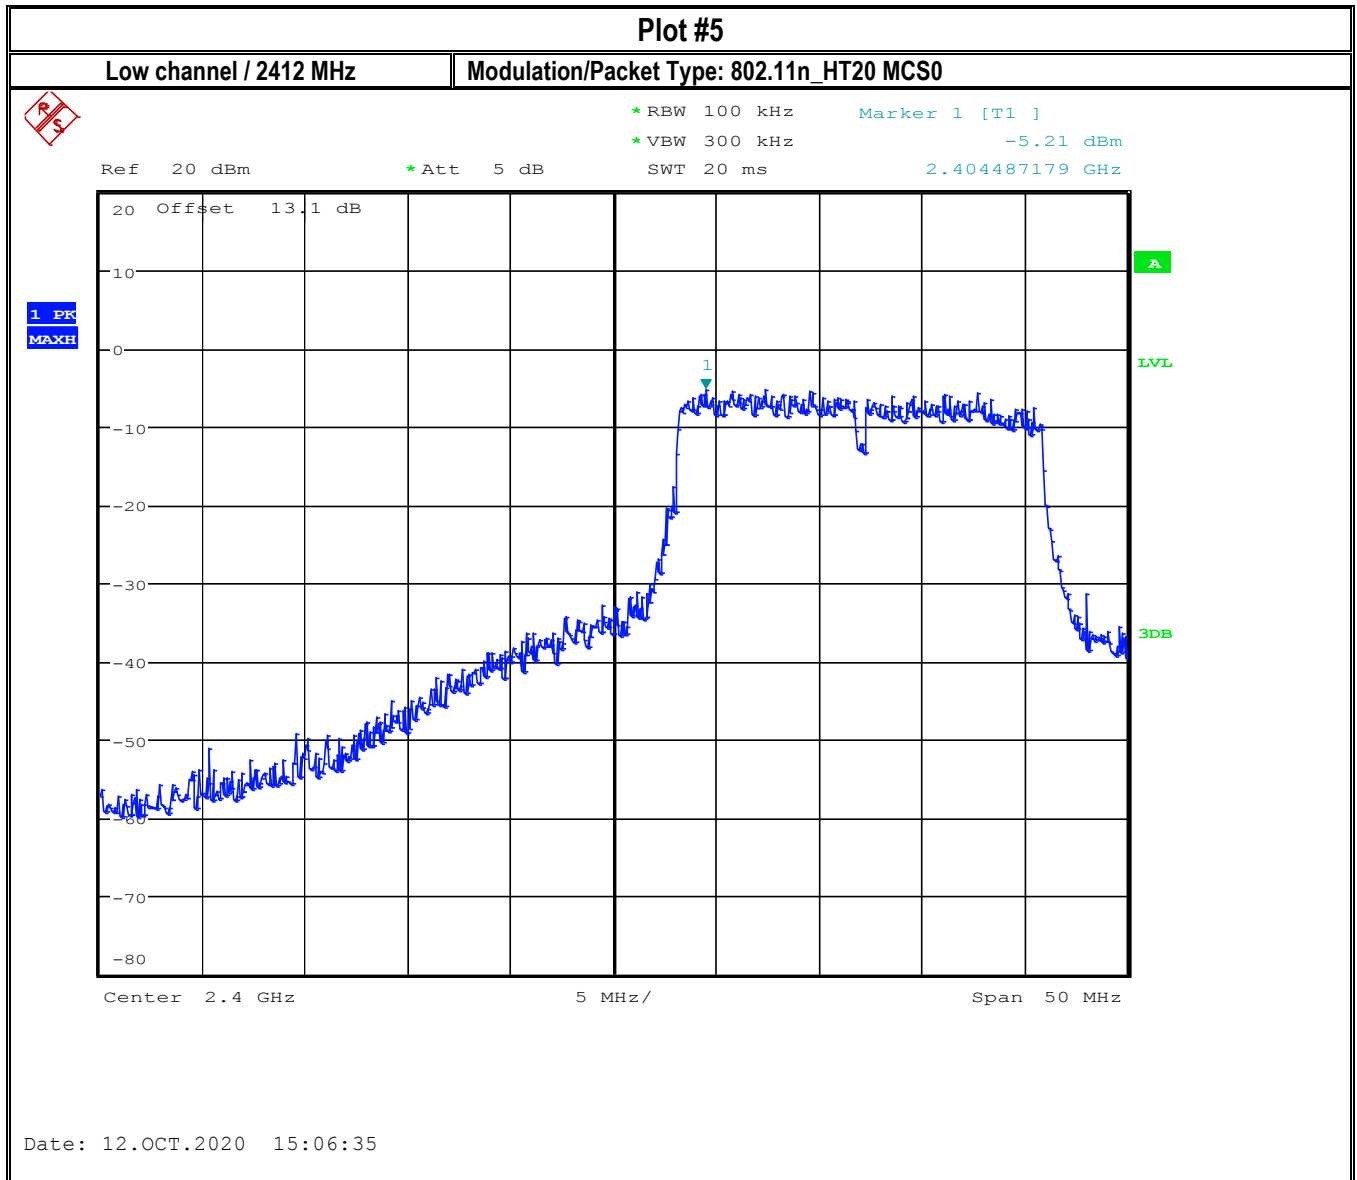


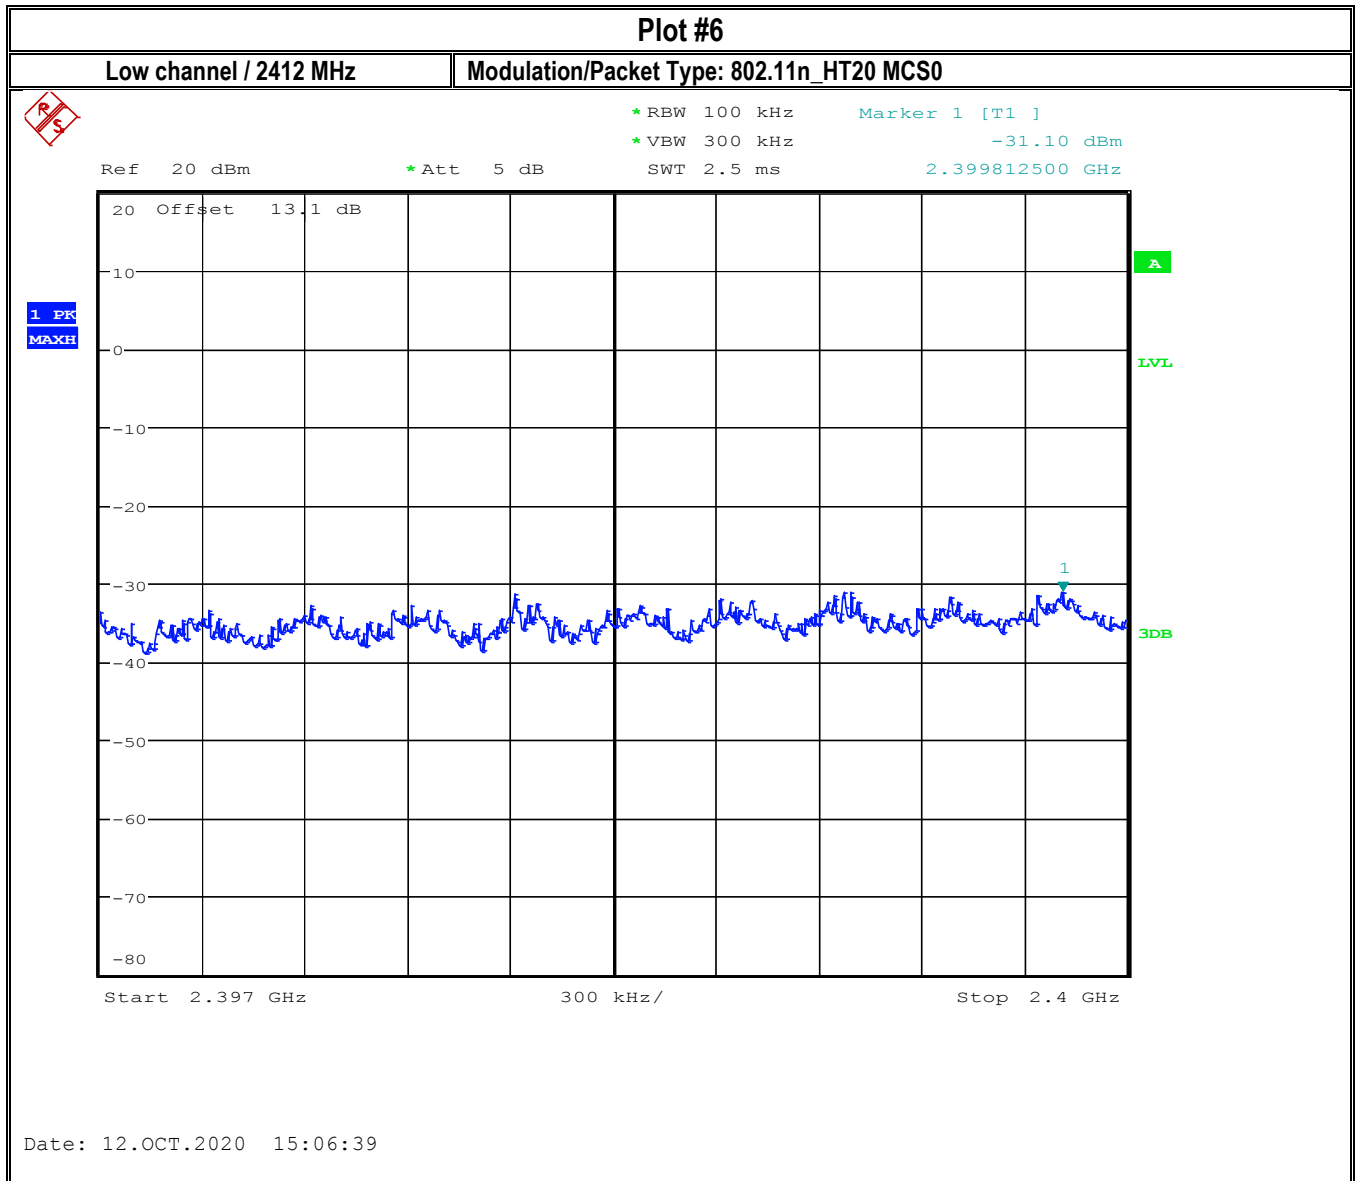

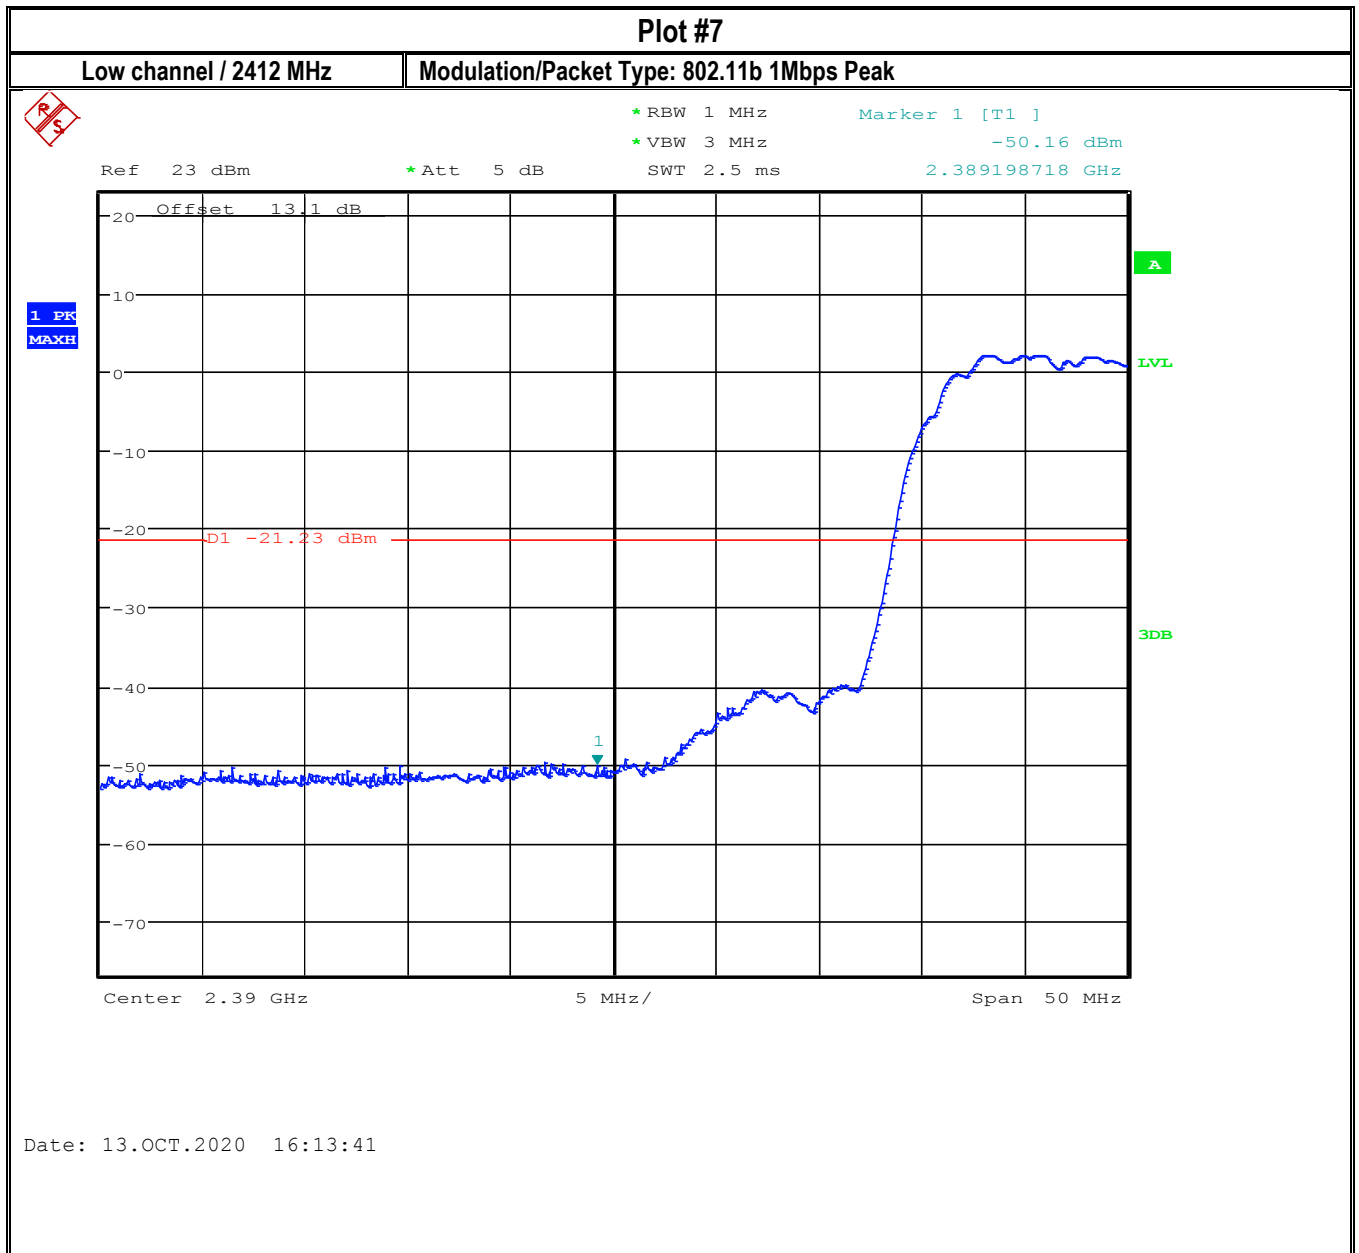

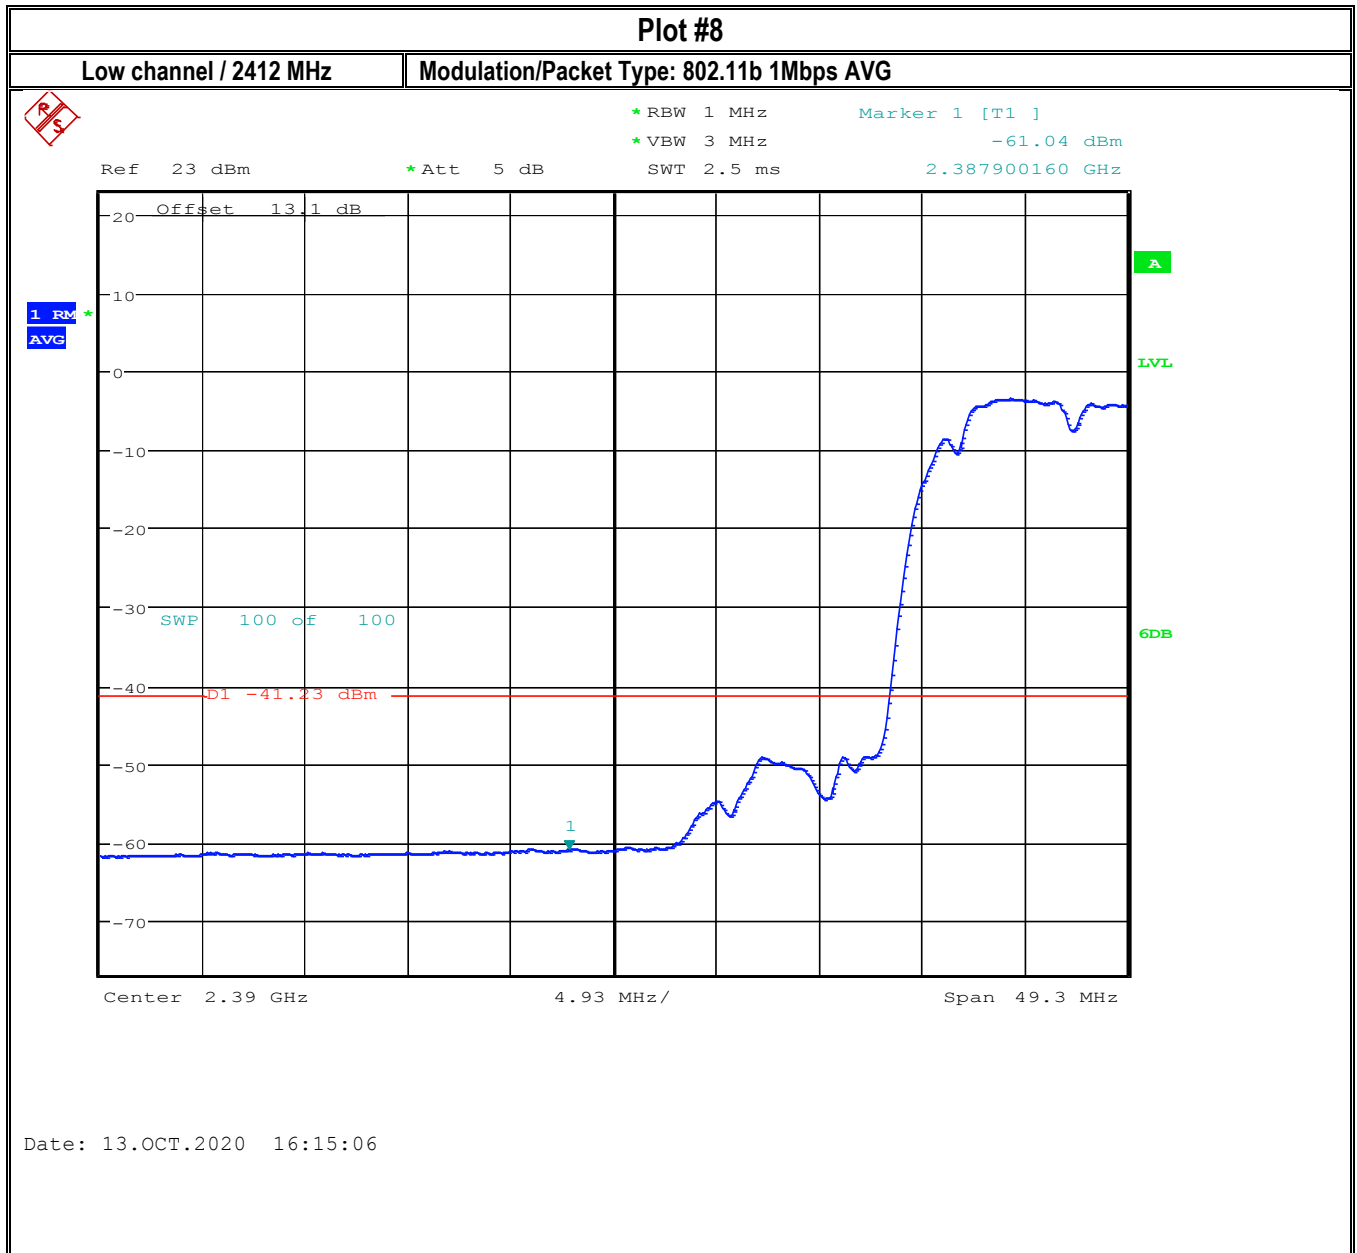

Date: 13.OCT.2020 16:15:06

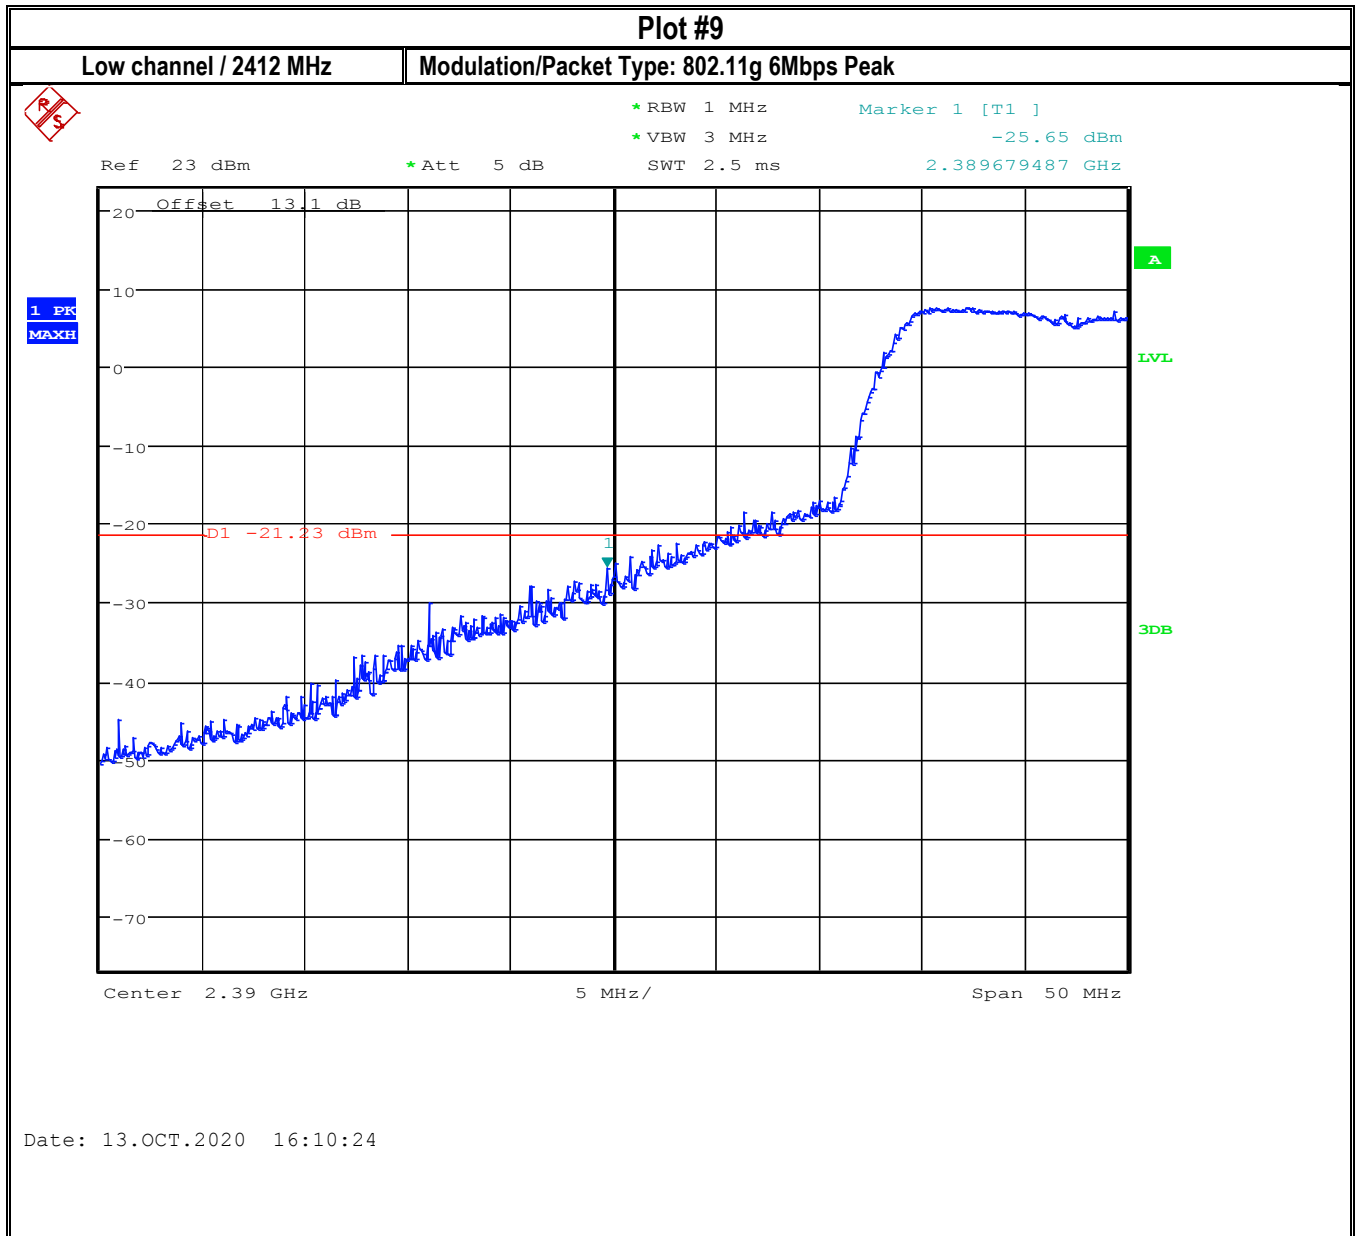

# Plot #10

Low channel / 2412 MHz

Modulation/Packet Type: 802.11g 6Mbps AVG



\* RBW 1 MHz  
 \* VBW 3 MHz  
 SWT 2.5 ms


Marker 1 [T1 ]

-48.19 dBm

Ref 23 dBm


\* Att 5 dB


2.389954327 GHz

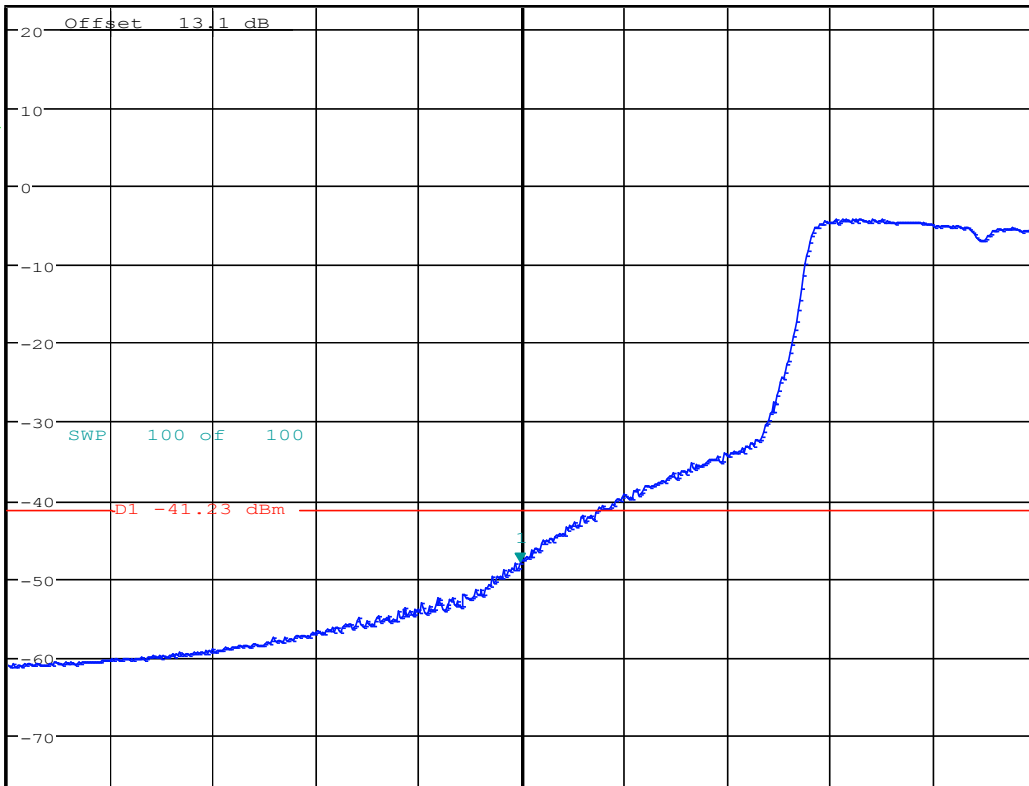

Center 2.39 GHz 4.93 MHz/ Span 49.3 MHz

Date: 13.OCT.2020 16:16:19

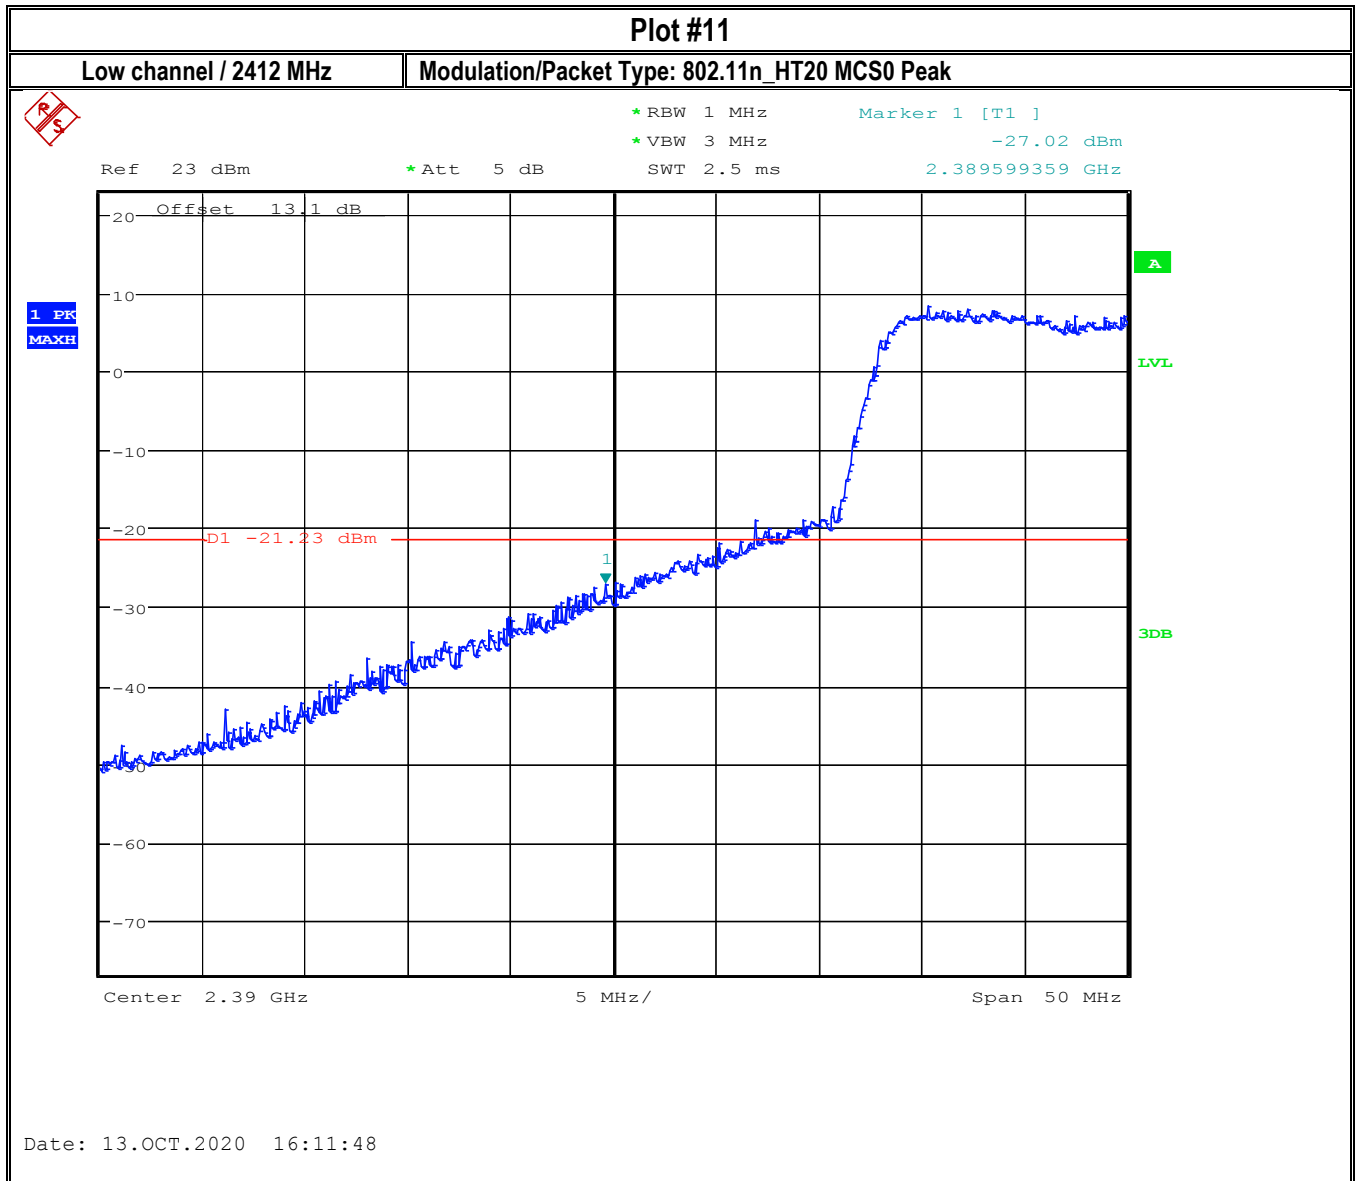


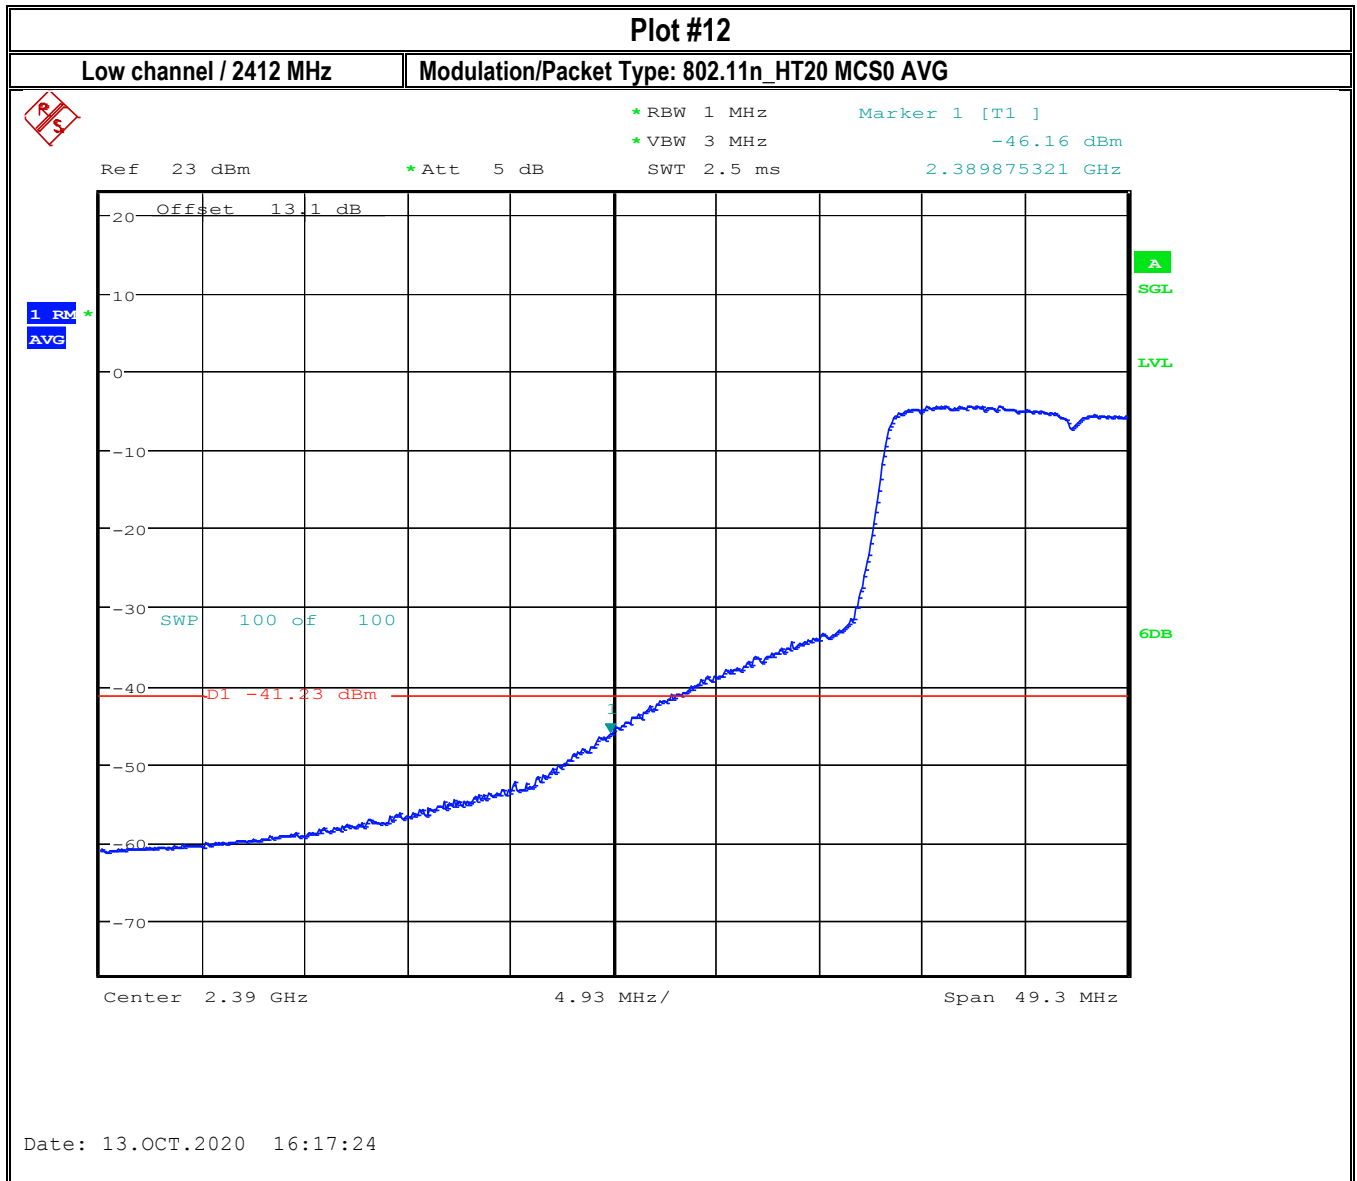

### Plot #13

High channel/ 2462 MHz

Modulation/Package Type: 802.11b 1Mbps Peak

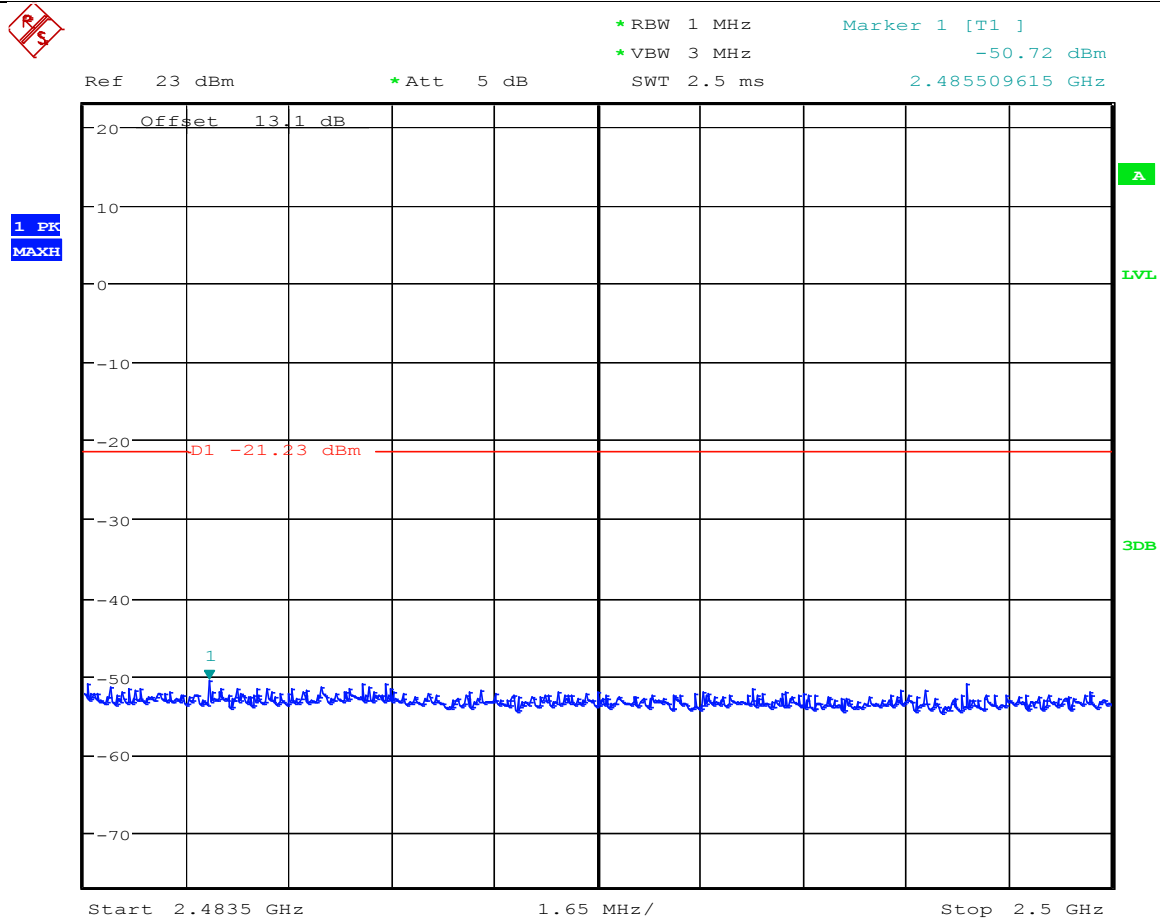


Date: 12.OCT.2020 15:32:26


### Plot #14


High channel/ 2462 MHz


Modulation/Packet Type: 802.11b 1Mbps AVG

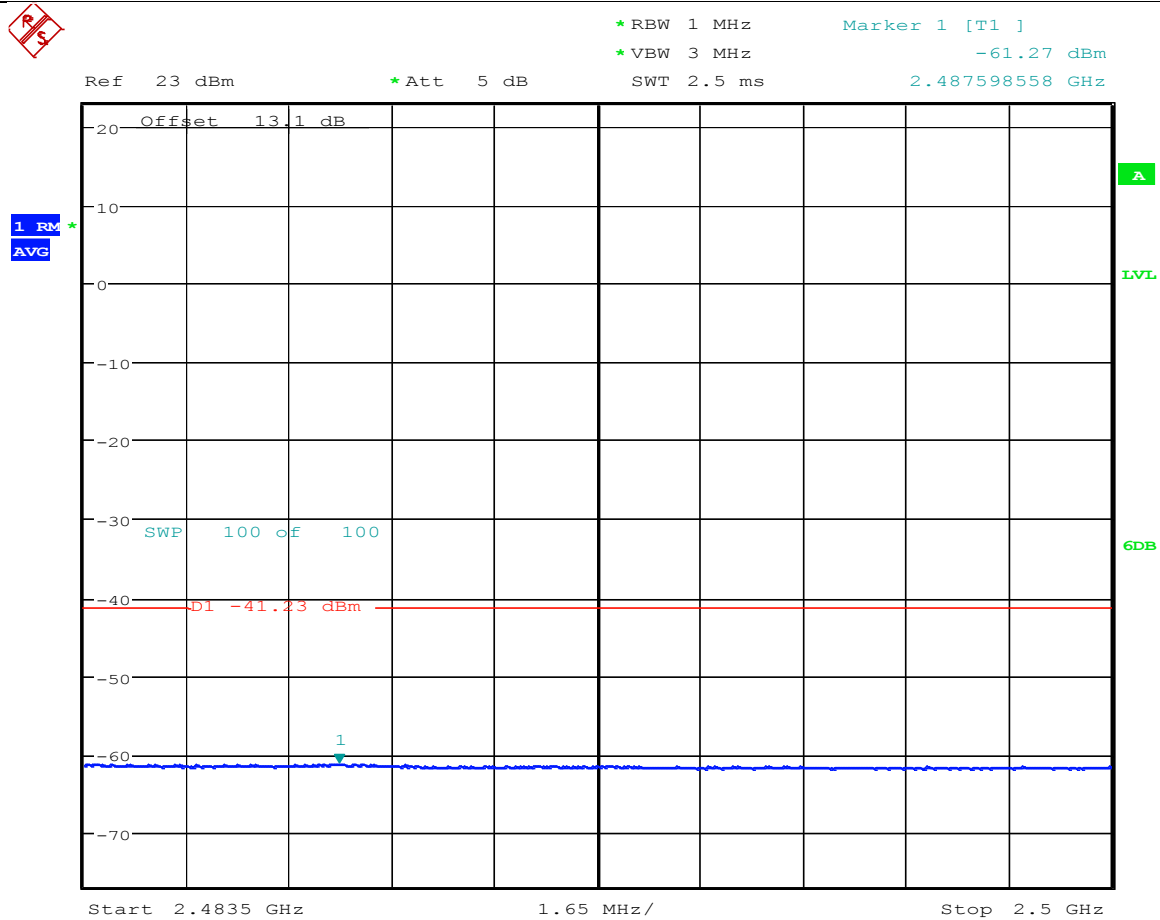


Date: 12.OCT.2020 15:32:35

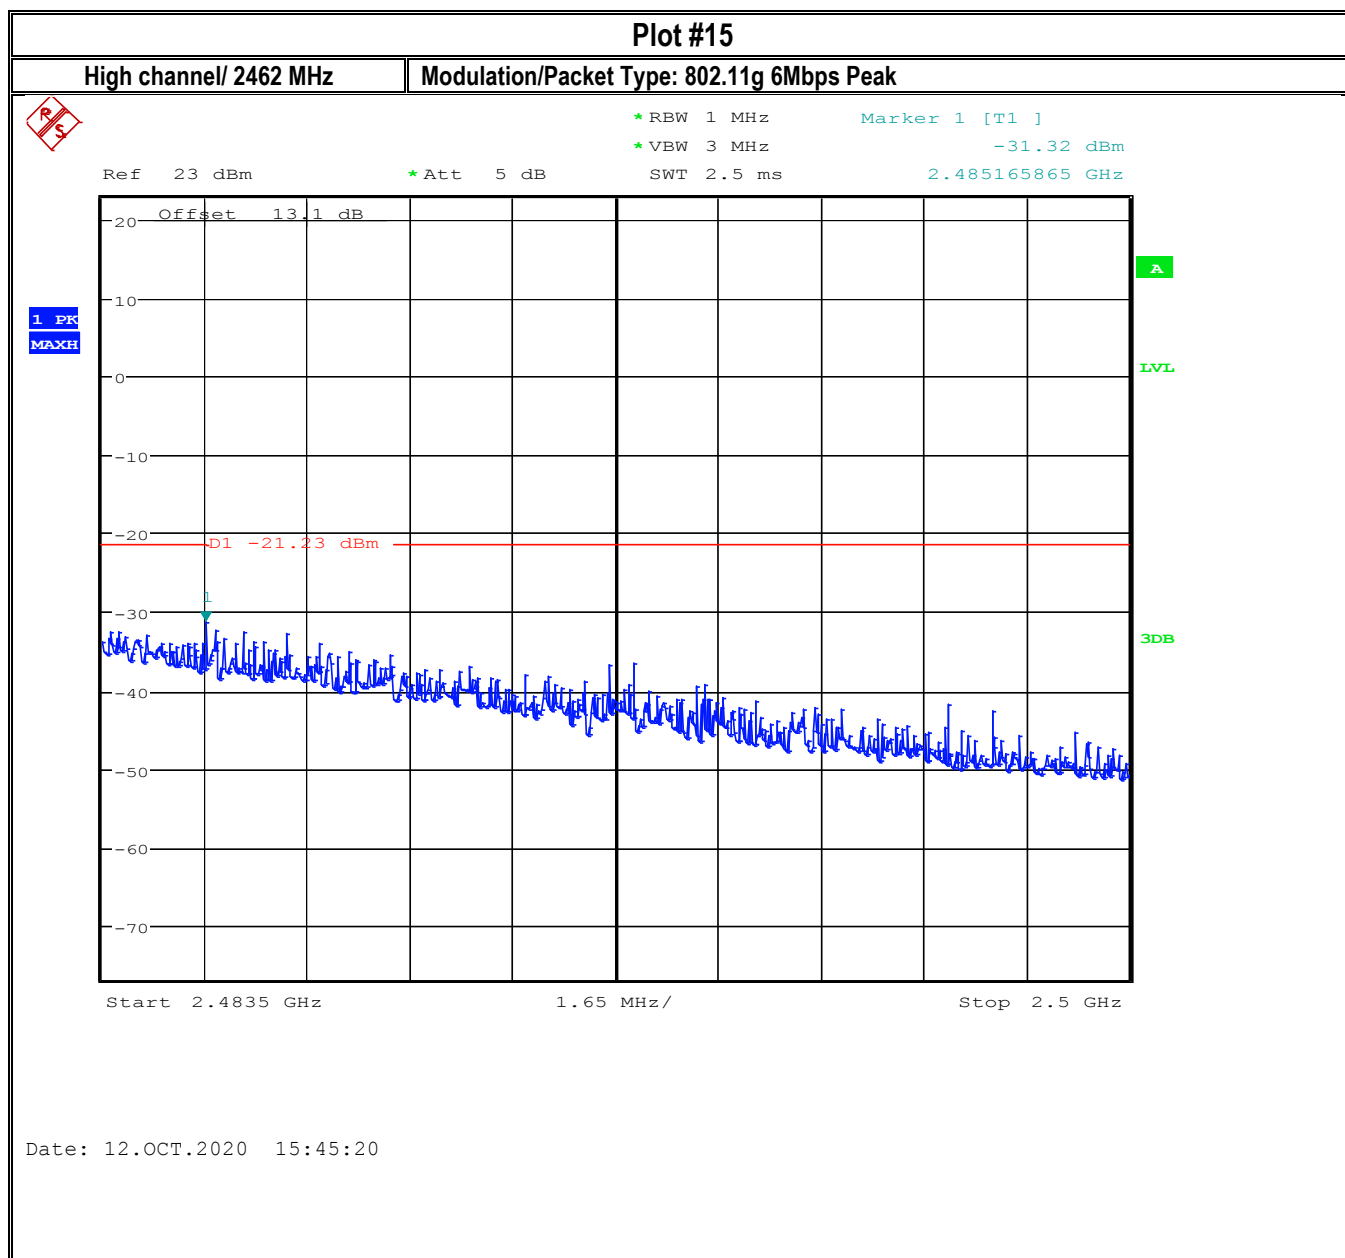

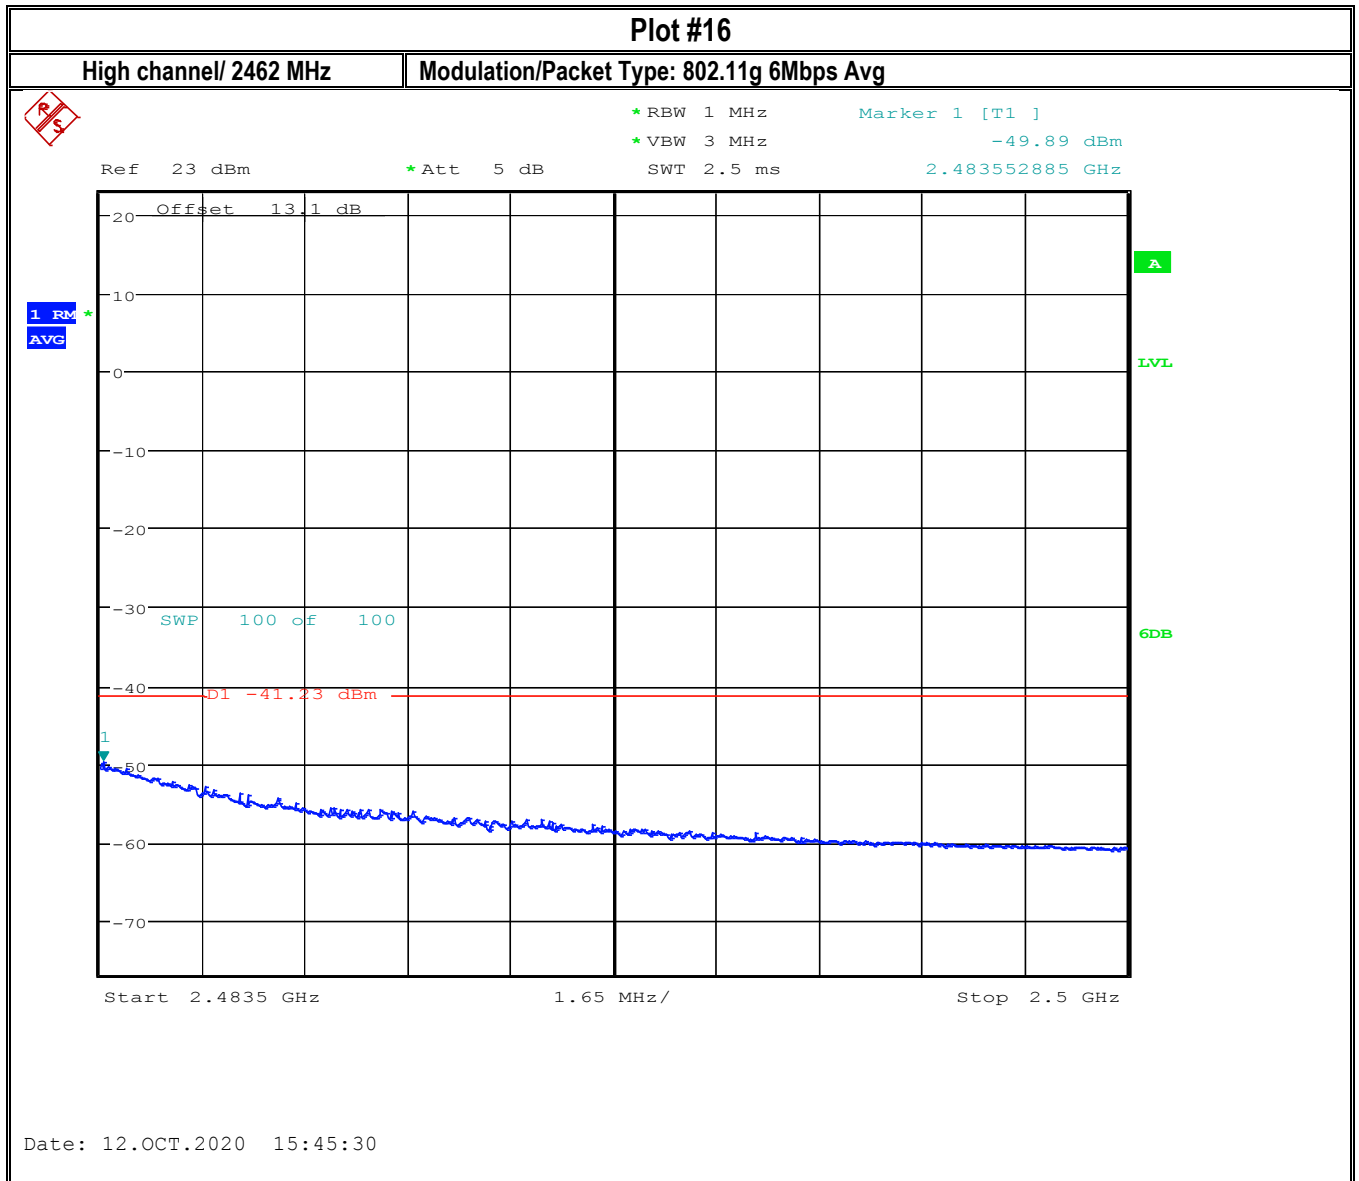

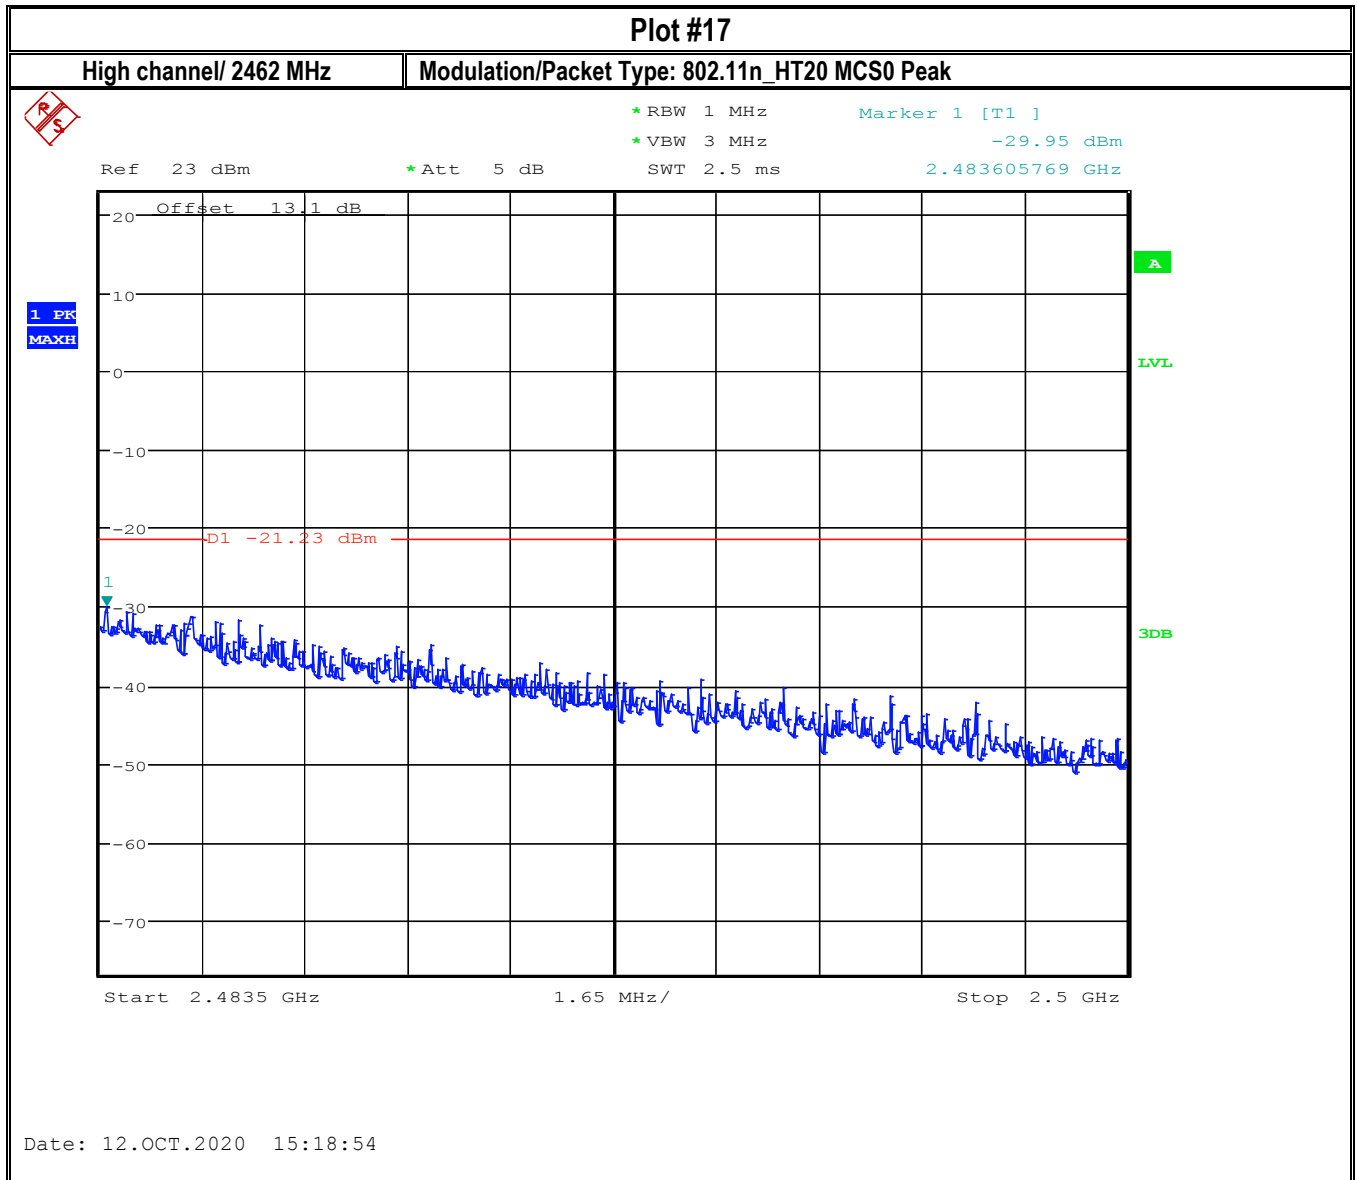

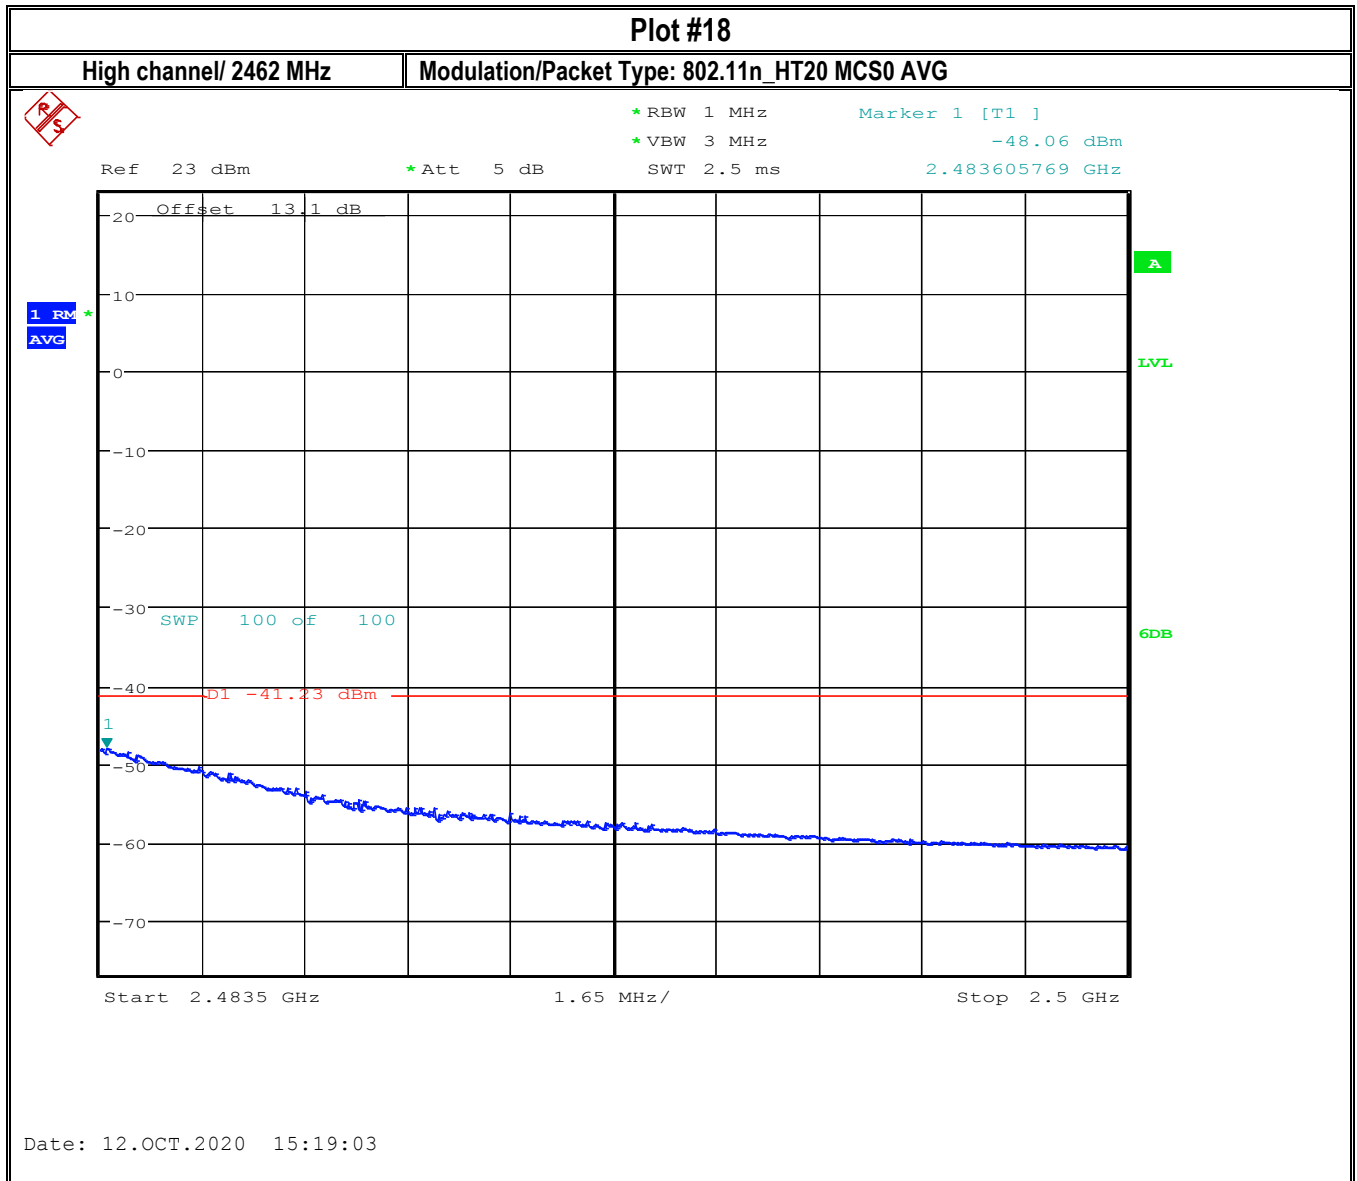

## 8.5 Emission Bandwidth 6 dB and 99% Occupied Bandwidth

### 8.5.1 Measurement according to FCC 558074 D01 DTS Meas Guidance v05r02

#### Spectrum Analyzer settings:

- Set RBW = 100 kHz
- Set the video bandwidth (VBW)  $\geq 3 \times$  RBW
- Detector = Peak
- Trace mode = Max hold
- Sweep = Auto couple
- Allow the trace to stabilize
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### 8.5.2 Limits:

FCC §15.247(a)(1) and RSS-247 5.2(1)

- Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### 8.5.3 Test conditions and setup:


| Ambient Temperature | EUT Set-Up # | EUT operating mode | Power Input |
|---------------------|--------------|--------------------|-------------|
| 22° C               | 2            | 802.11 b/g/n       | 5 VDC       |


#### 8.5.4 Measurement result:

| Plot # | Mode         | Channel | 6 dB Emissions Bandwidth (MHz) | Limit (MHz) | Result |
|--------|--------------|---------|--------------------------------|-------------|--------|
| 1      | 802.11b      | 1       | 12.10                          | > 0.5       | Pass   |
| 2      | 802.11b      | 6       | 12.18                          | > 0.5       | Pass   |
| 3      | 802.11b      | 11      | 12.10                          | > 0.5       | Pass   |
| 4      | 802.11g      | 1       | 16.59                          | > 0.5       | Pass   |
| 5      | 802.11g      | 6       | 16.45                          | > 0.5       | Pass   |
| 6      | 802.11g      | 11      | 16.59                          | > 0.5       | Pass   |
| 7      | 802.11n_HT20 | 1       | 17.71                          | > 0.5       | Pass   |
| 8      | 802.11n_HT20 | 6       | 17.79                          | > 0.5       | Pass   |
| 9      | 802.11n_HT20 | 11      | 17.71                          | > 0.5       | Pass   |


| Plot # | Mode         | Channel | 99% Occupied Bandwidth (MHz) | Limit (MHz) | Result |
|--------|--------------|---------|------------------------------|-------------|--------|
| 10     | 802.11b      | 1       | 13.94                        | > 0.5       | Pass   |
| 11     | 802.11b      | 6       | 13.94                        | > 0.5       | Pass   |
| 12     | 802.11b      | 11      | 13.94                        | > 0.5       | Pass   |
| 13     | 802.11g      | 1       | 17.31                        | > 0.5       | Pass   |
| 14     | 802.11g      | 6       | 17.15                        | > 0.5       | Pass   |
| 15     | 802.11g      | 11      | 17.15                        | > 0.5       | Pass   |
| 16     | 802.11n_HT20 | 1       | 18.03                        | > 0.5       | Pass   |
| 17     | 802.11n_HT20 | 6       | 17.95                        | > 0.5       | Pass   |
| 18     | 802.11n_HT20 | 11      | 17.95                        | > 0.5       | Pass   |


## 8.5.5 Measurement Plots:

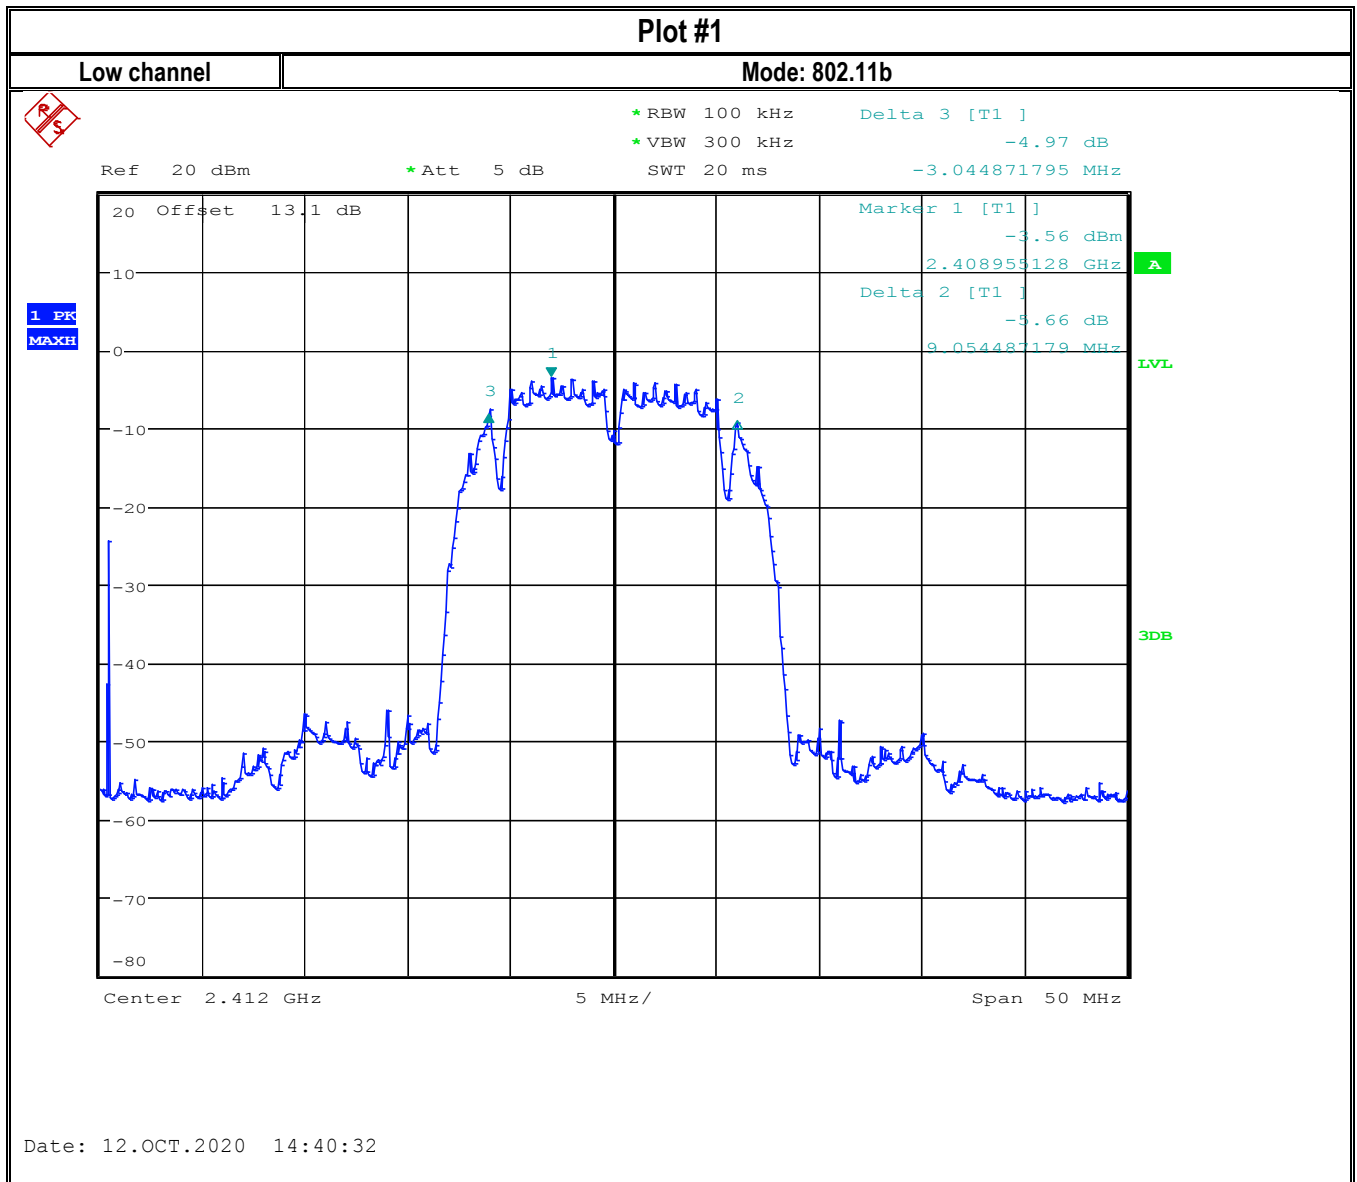


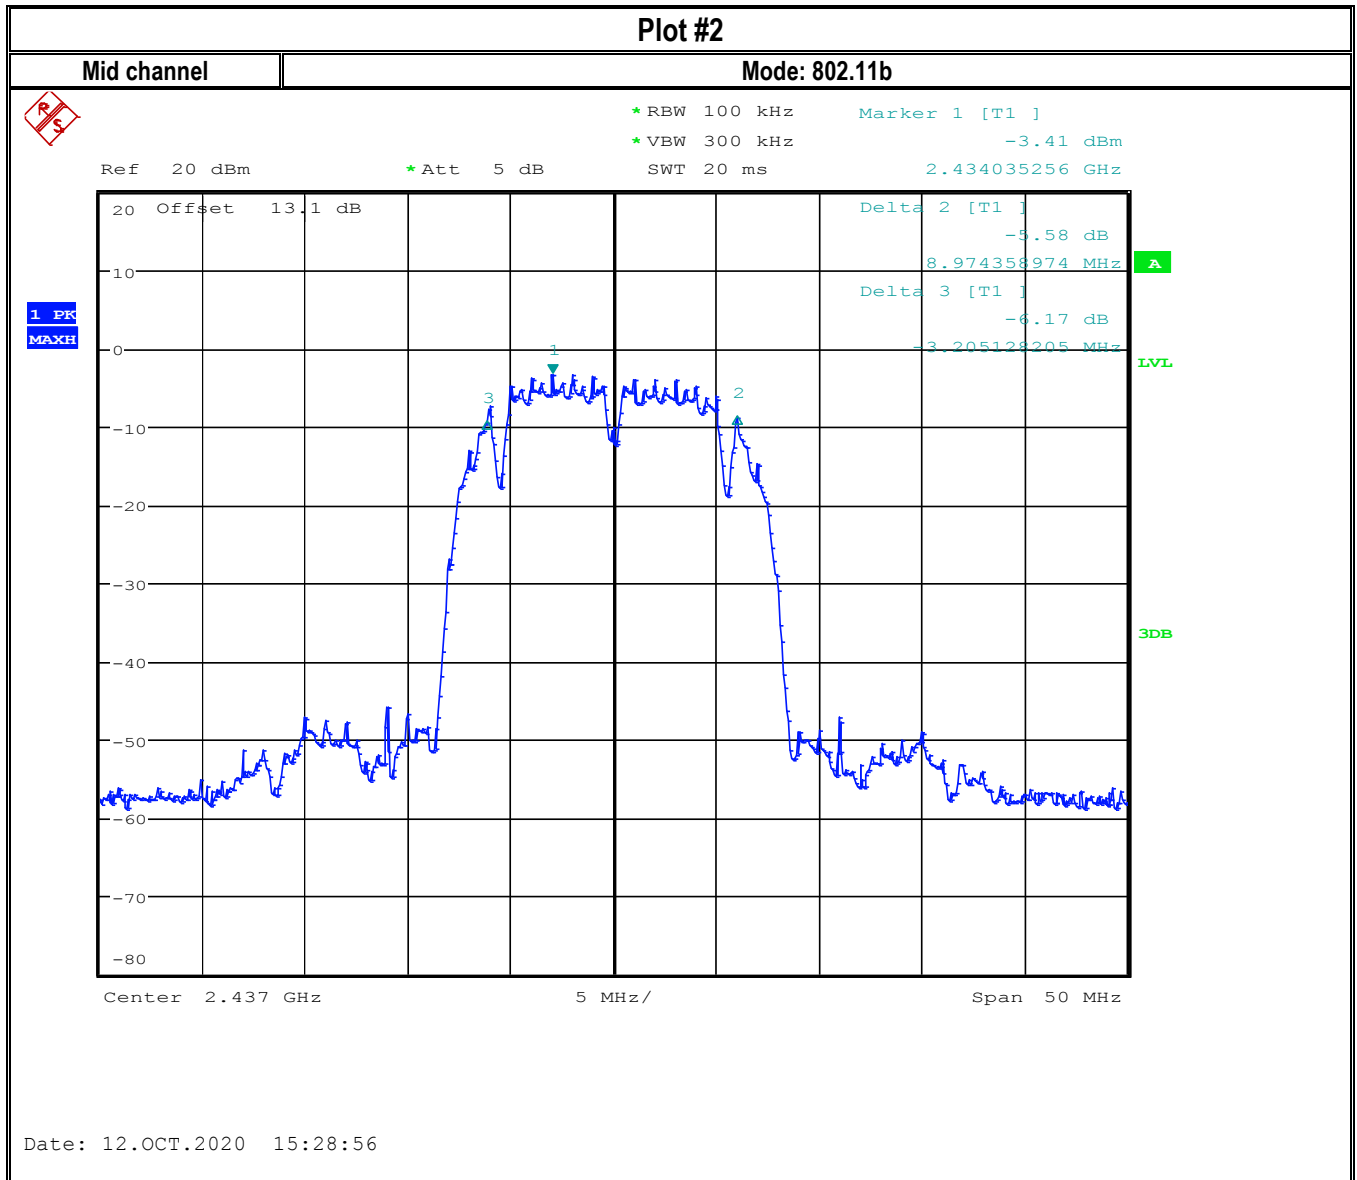



Date: 12.OCT.2020 15:28:56

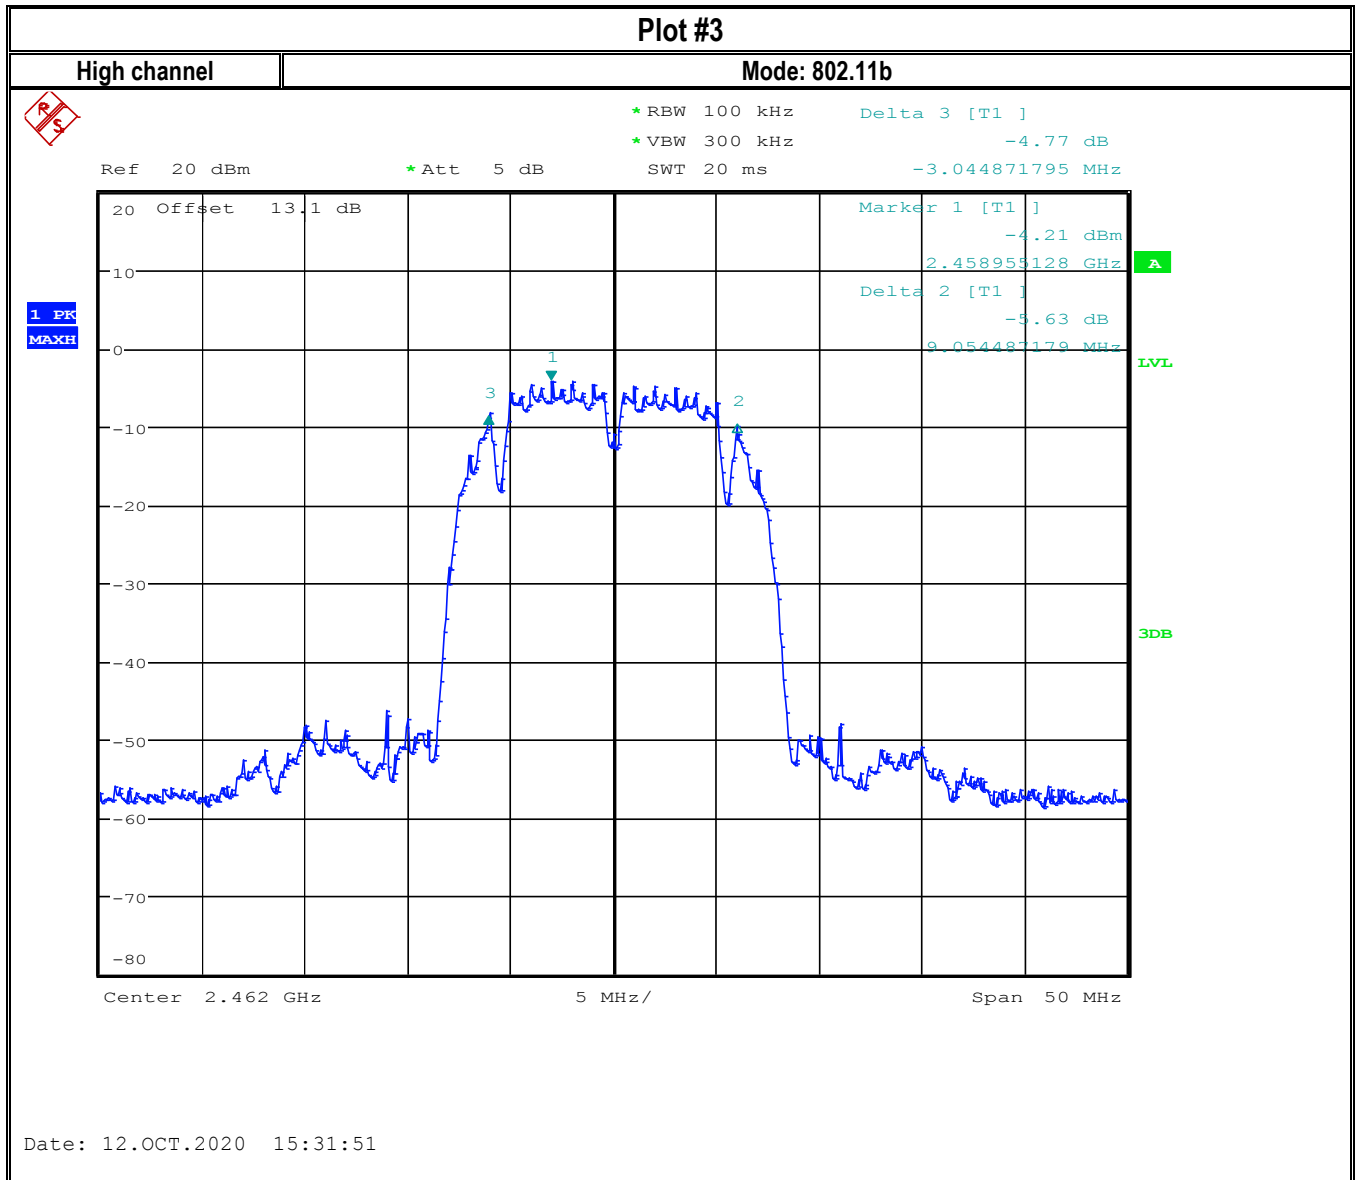


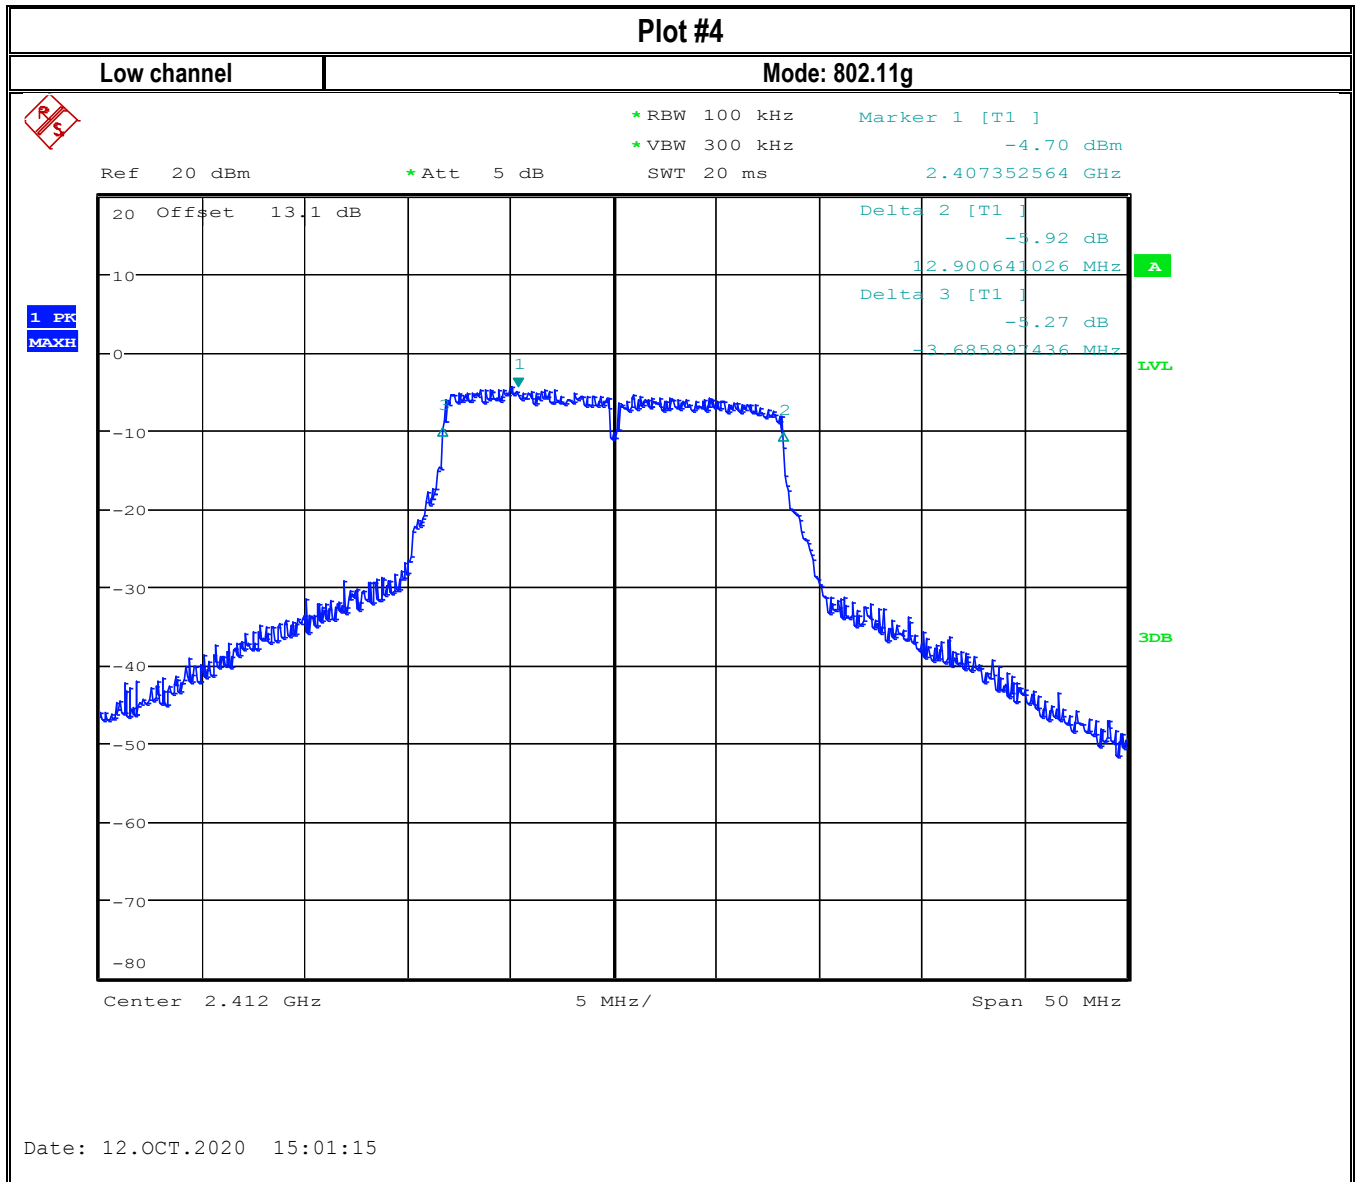


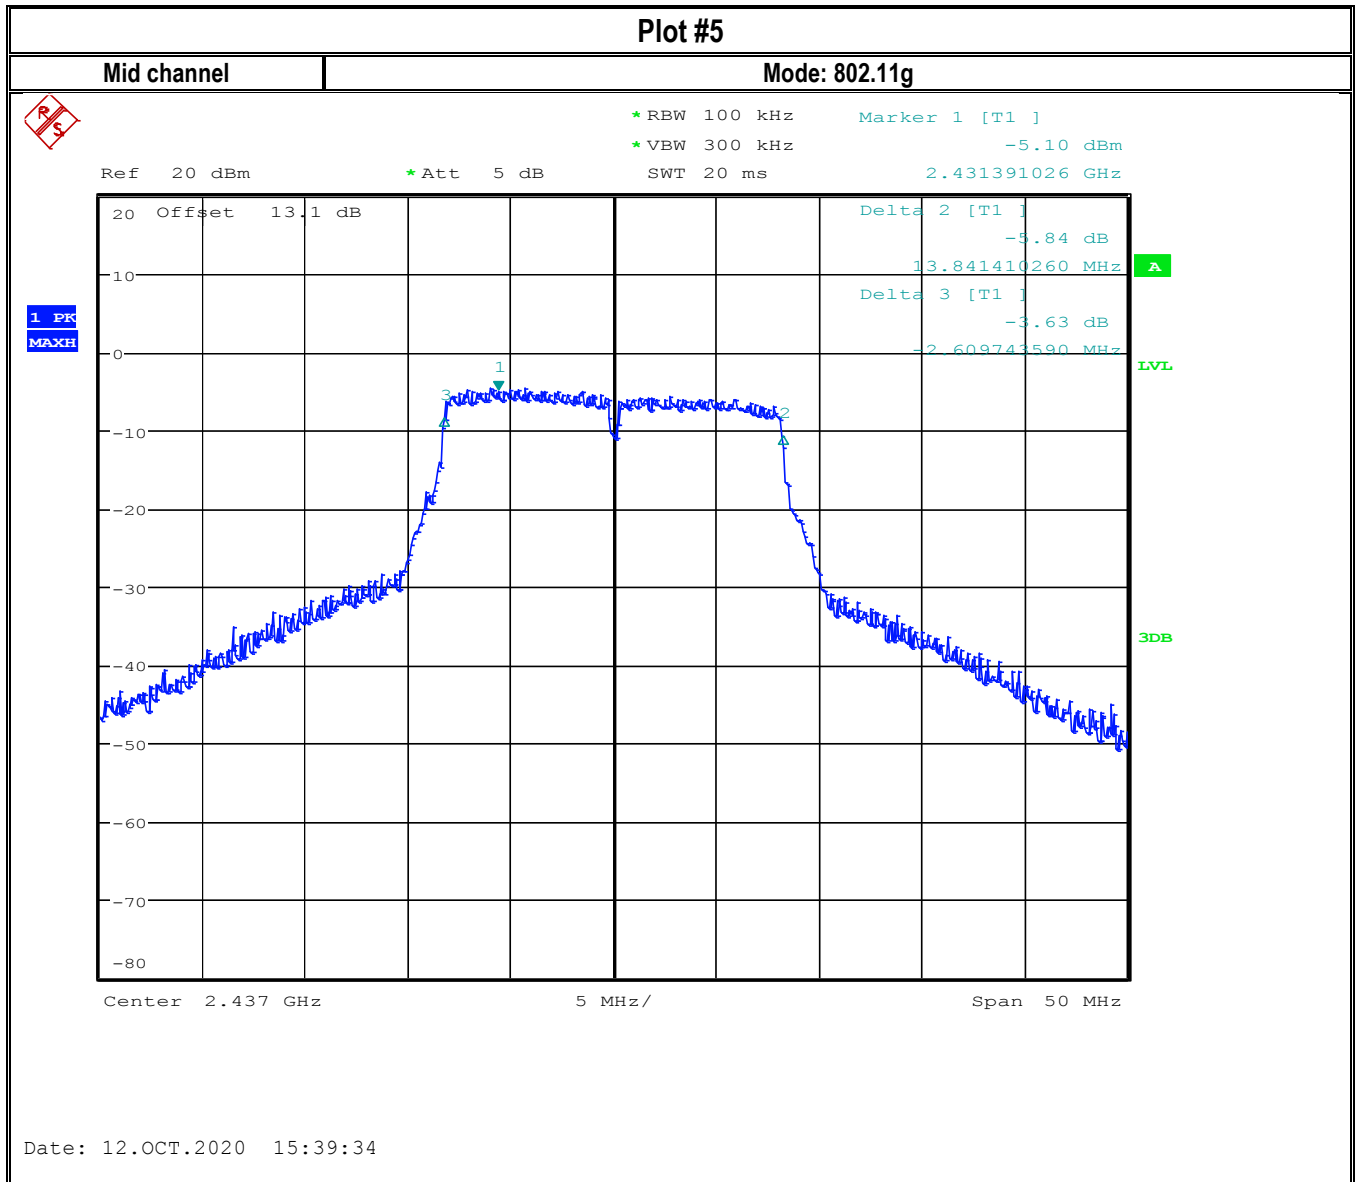


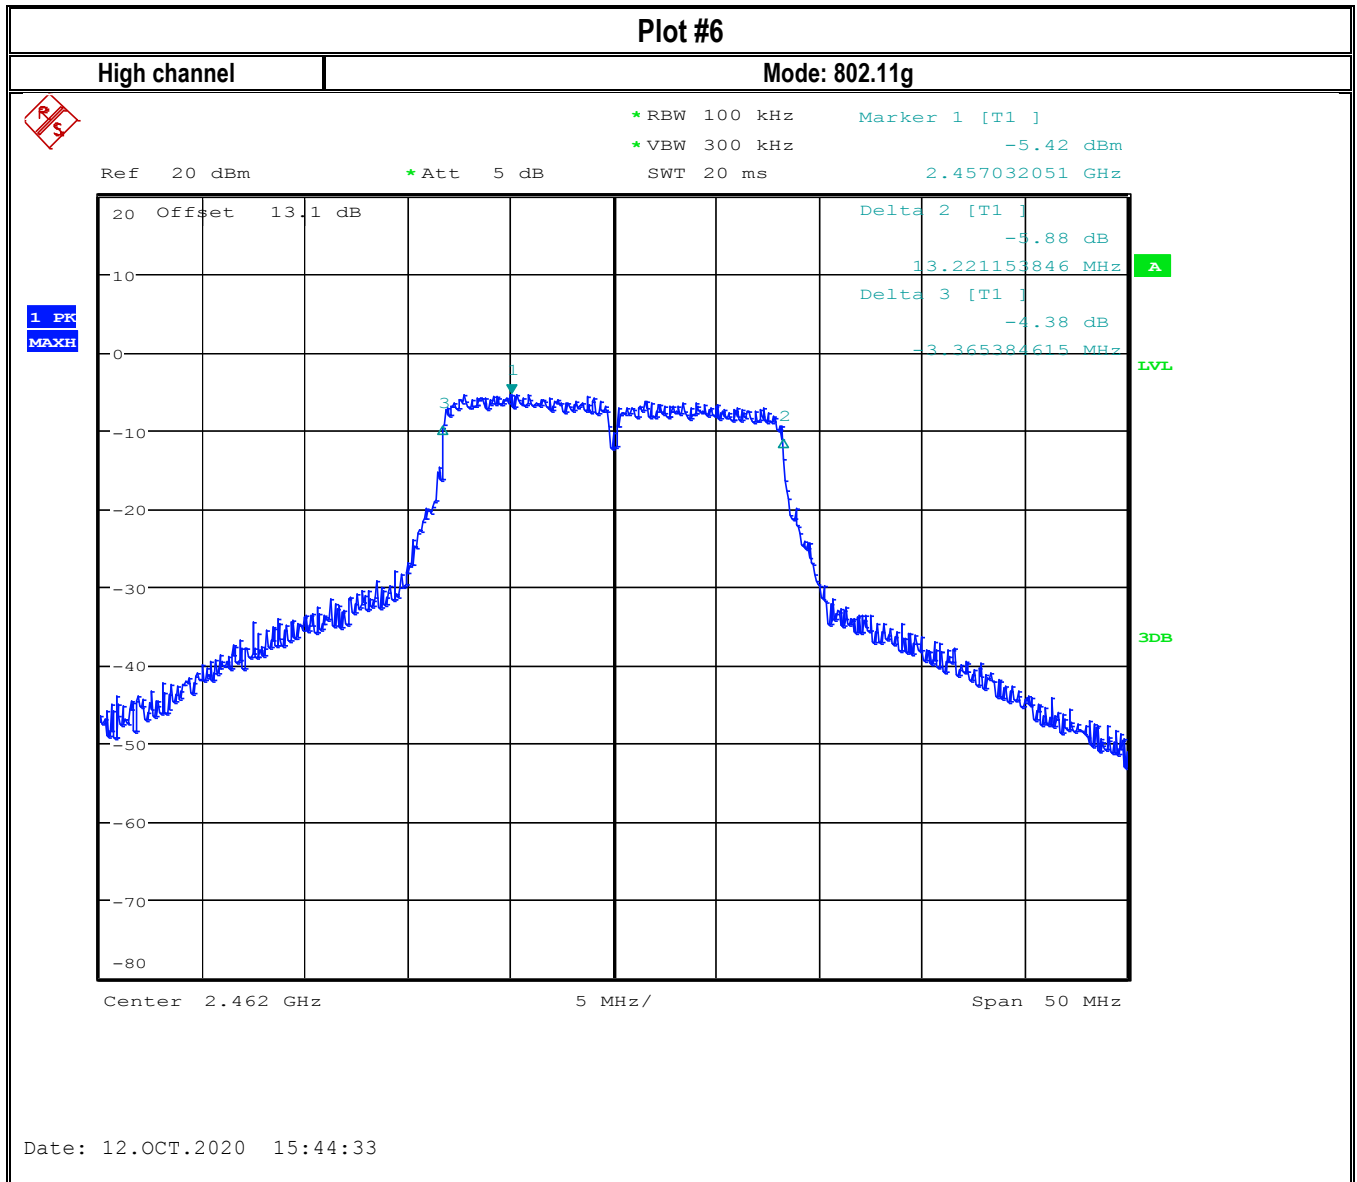


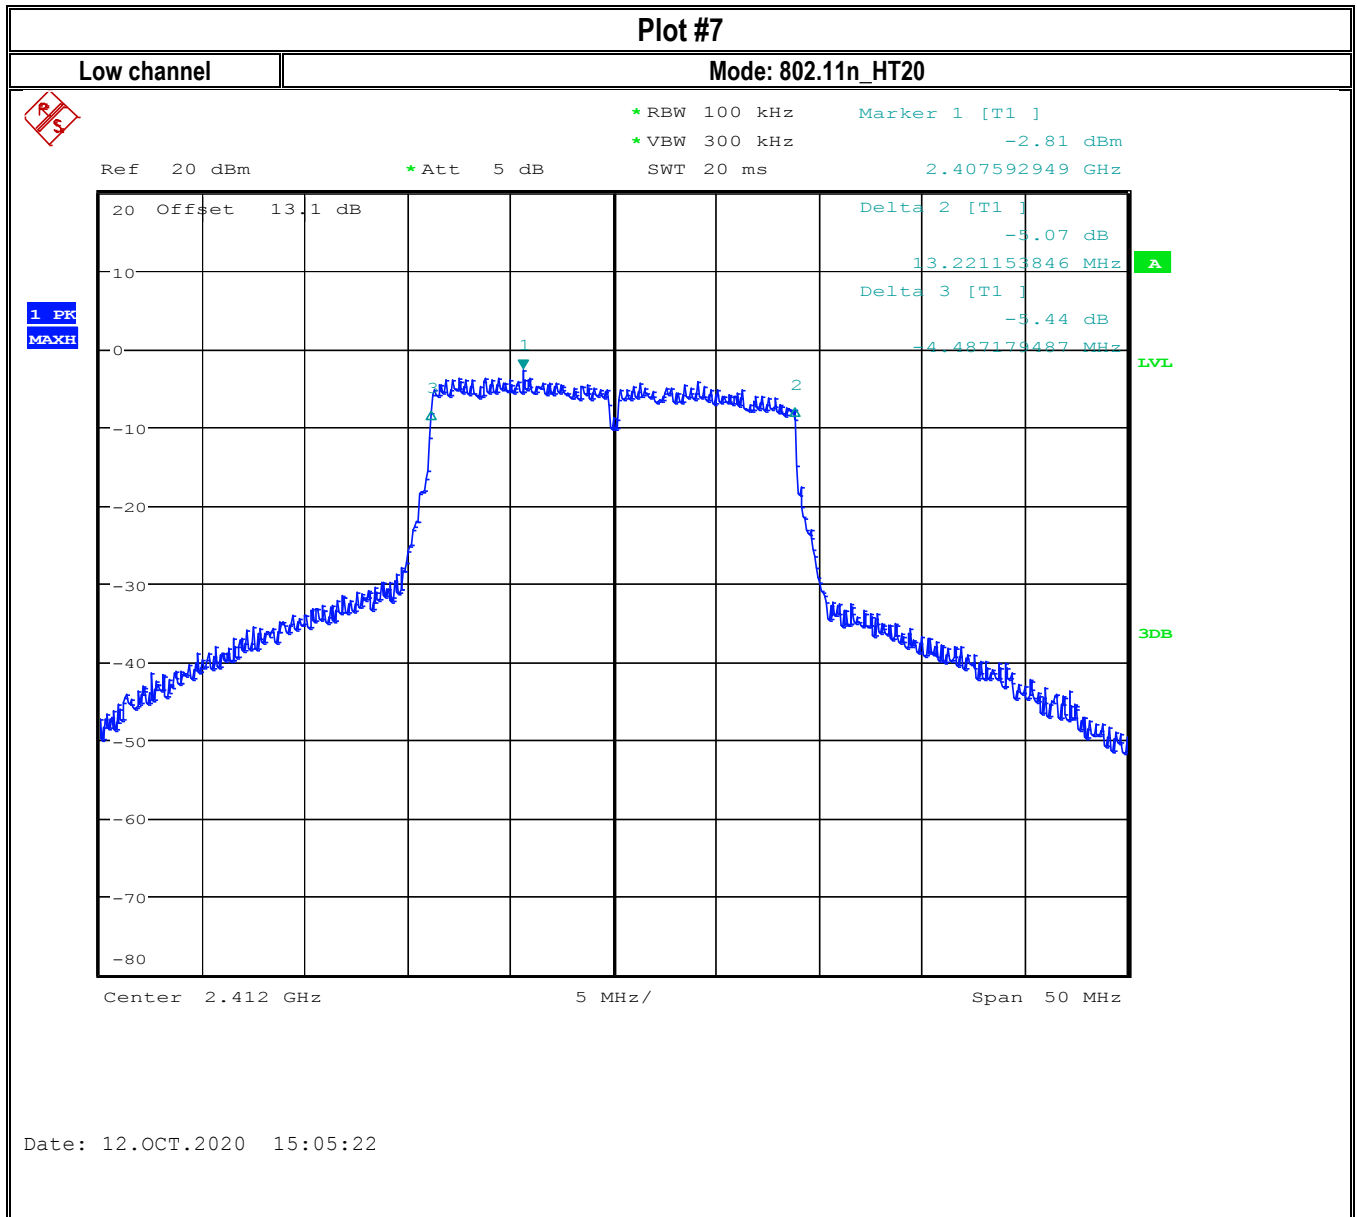


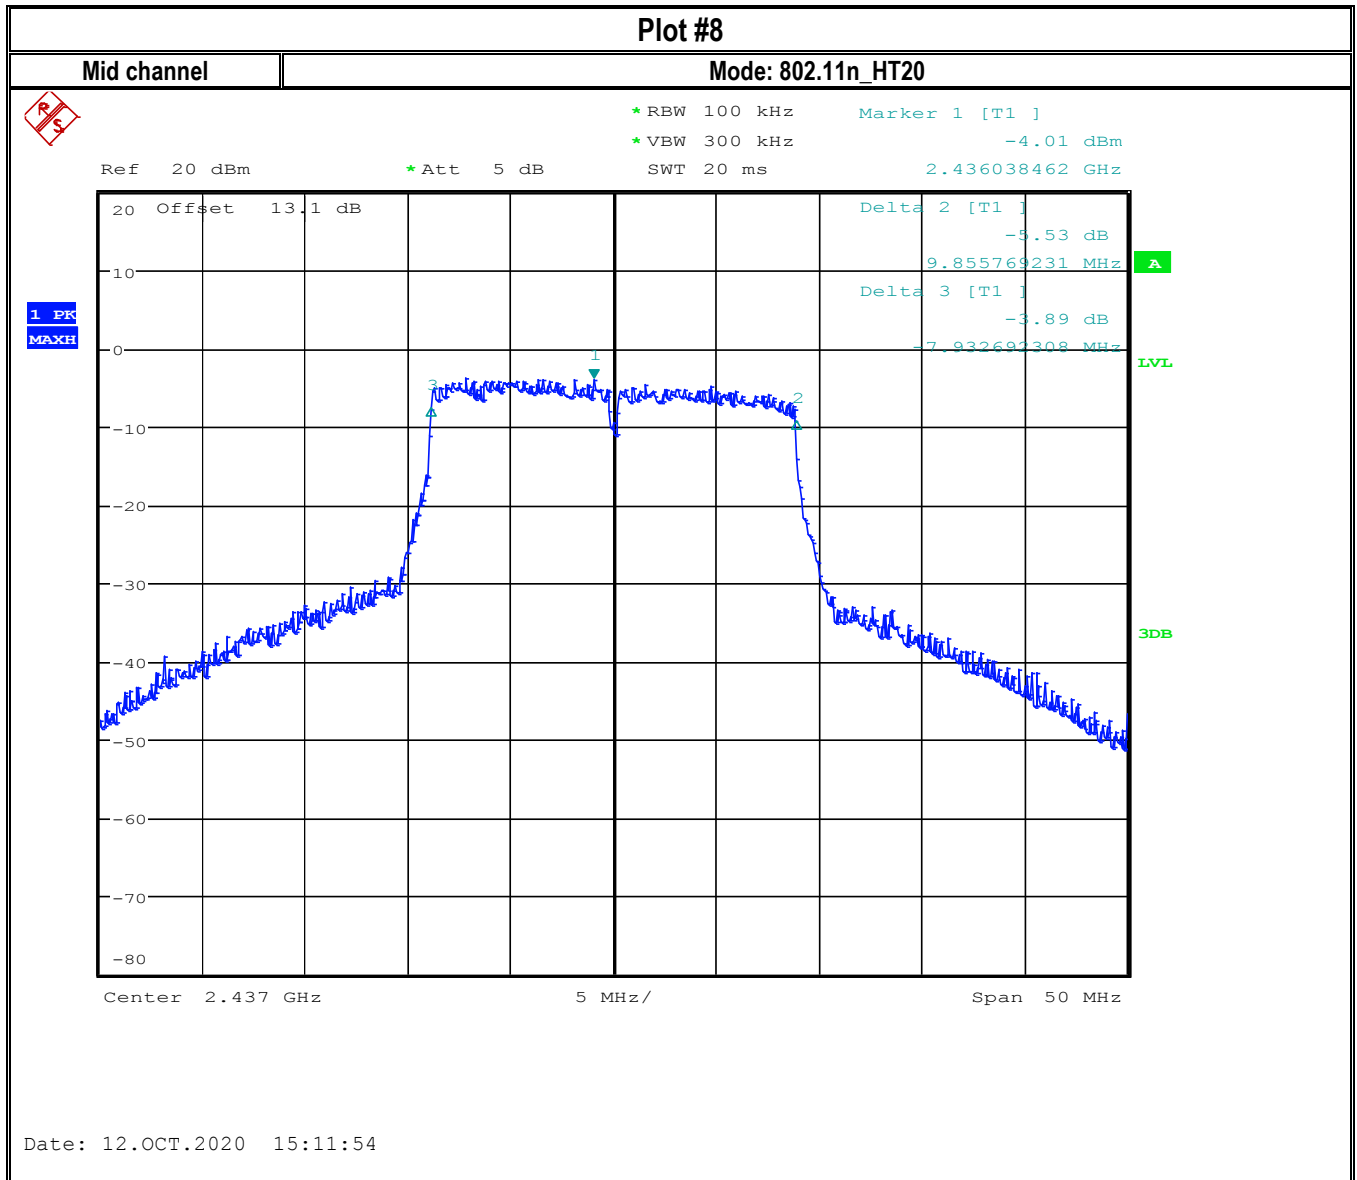


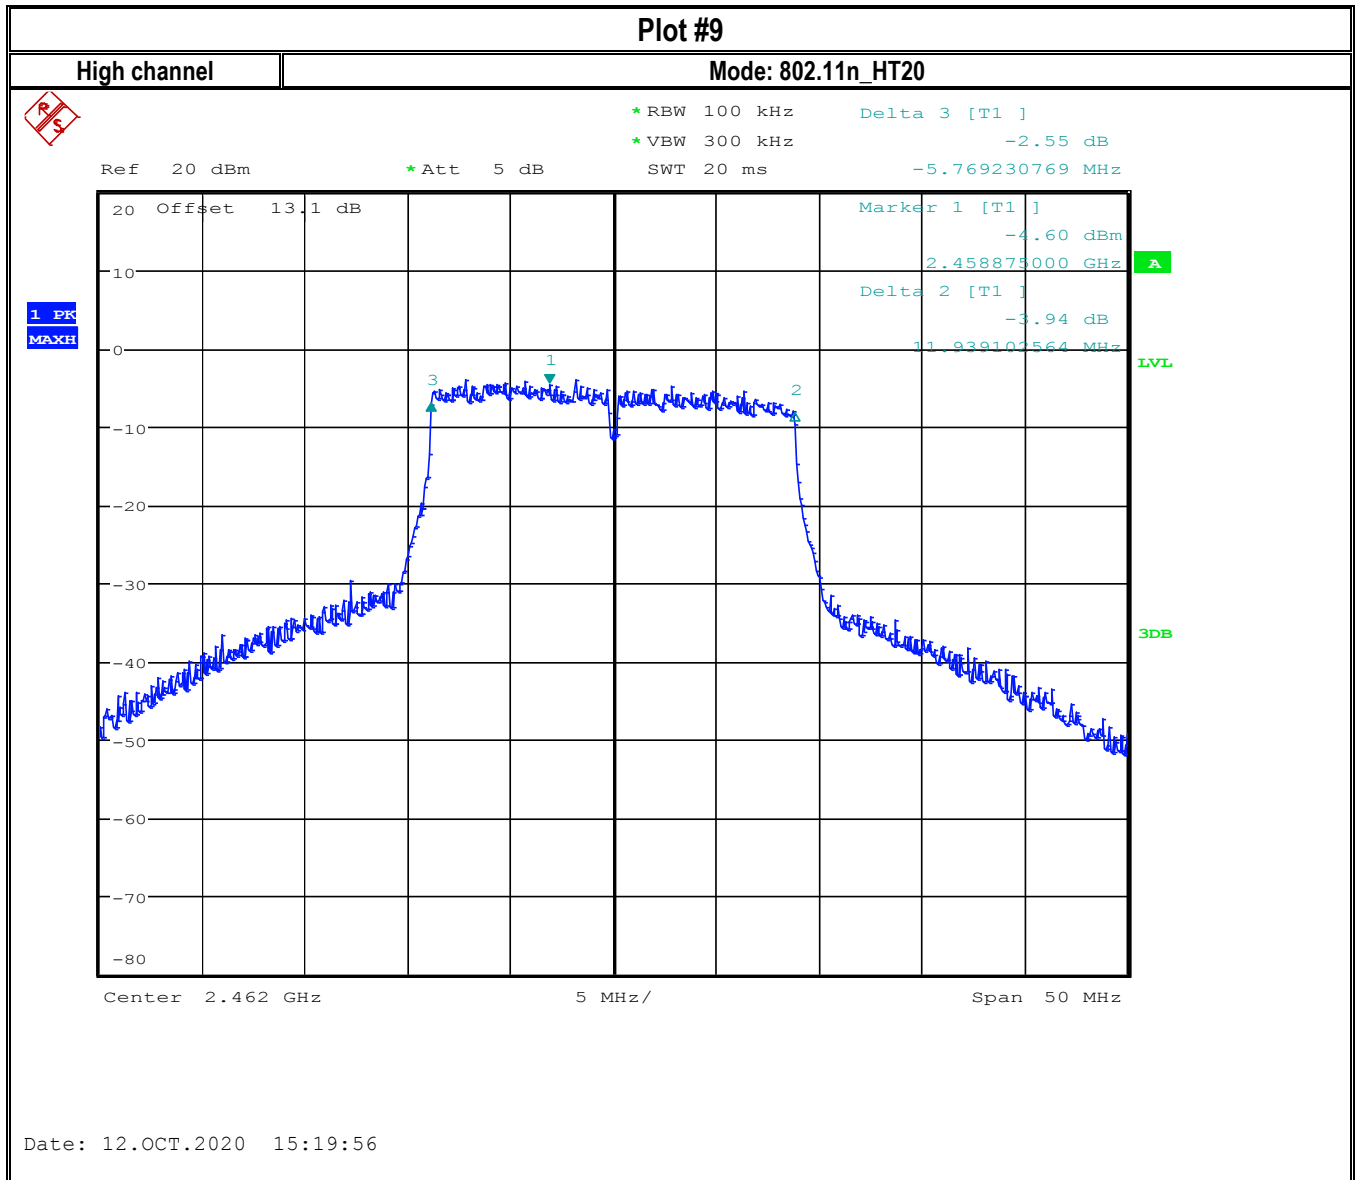


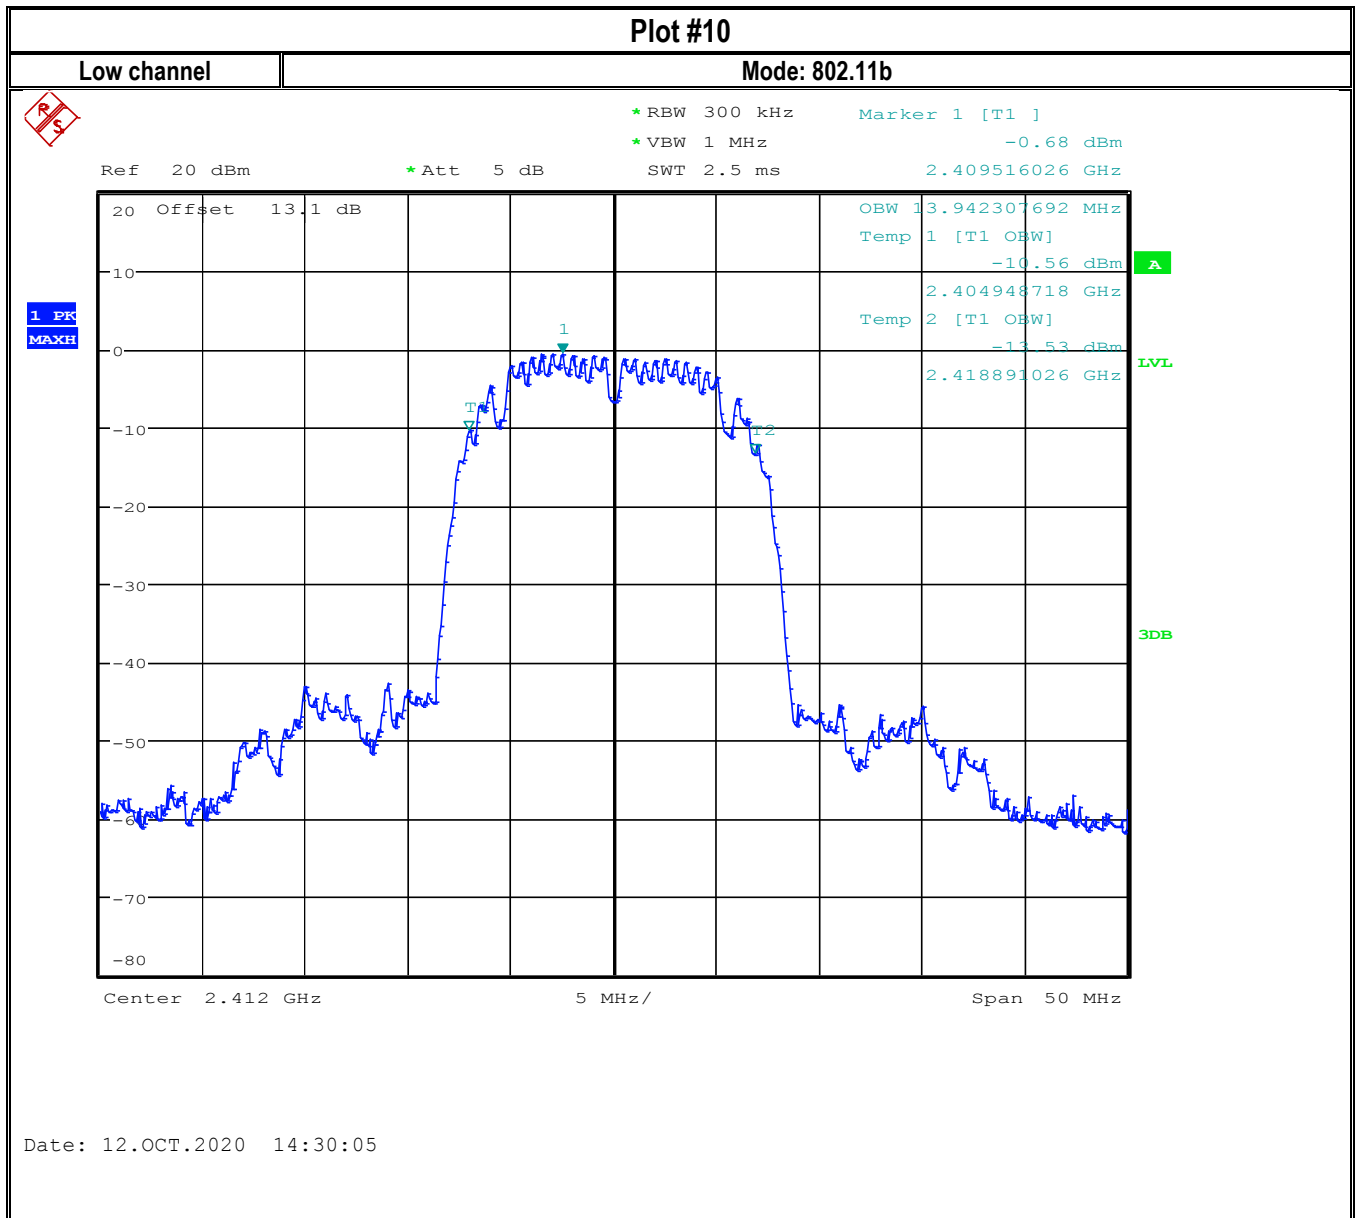


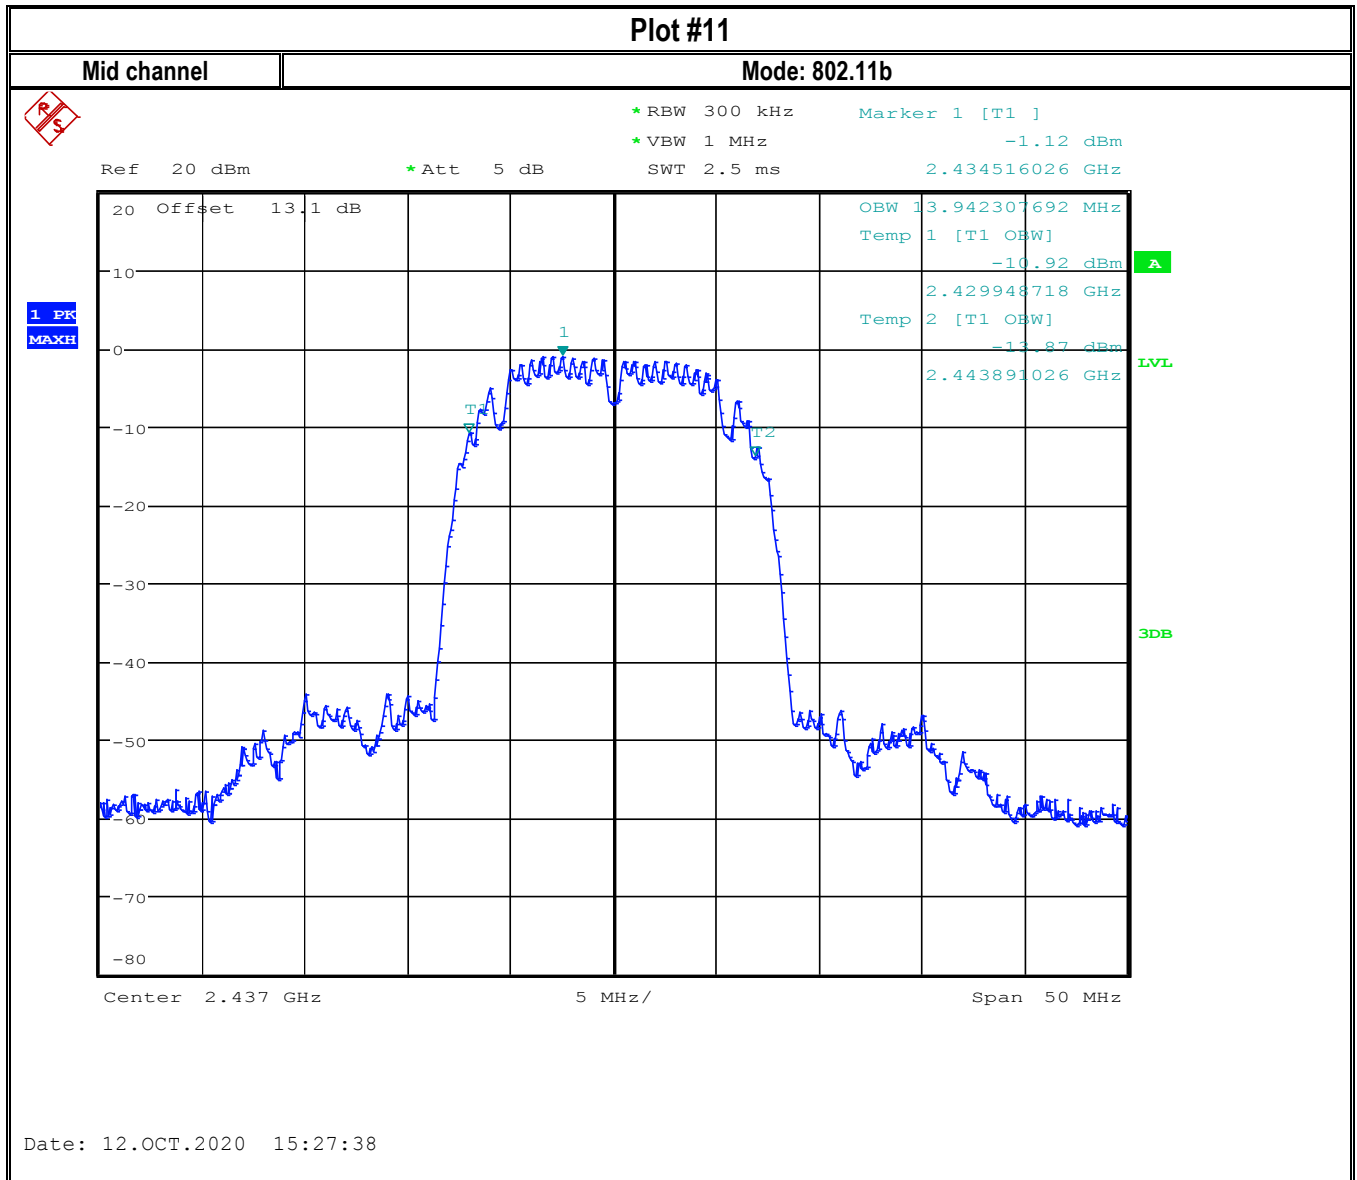


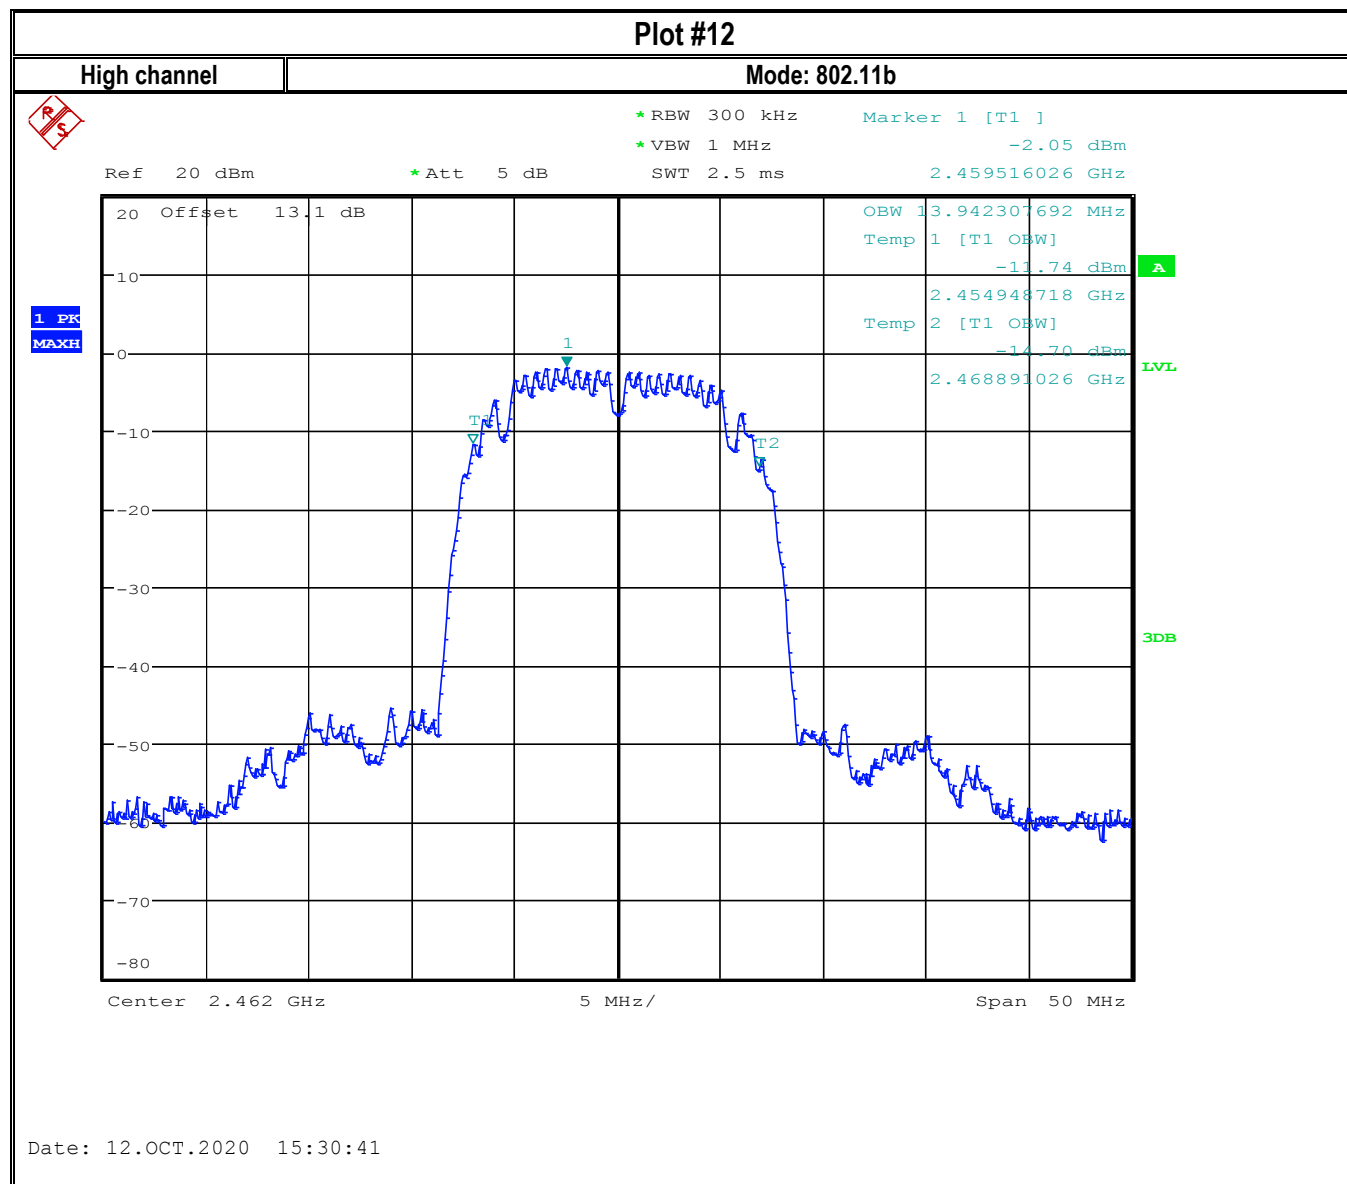


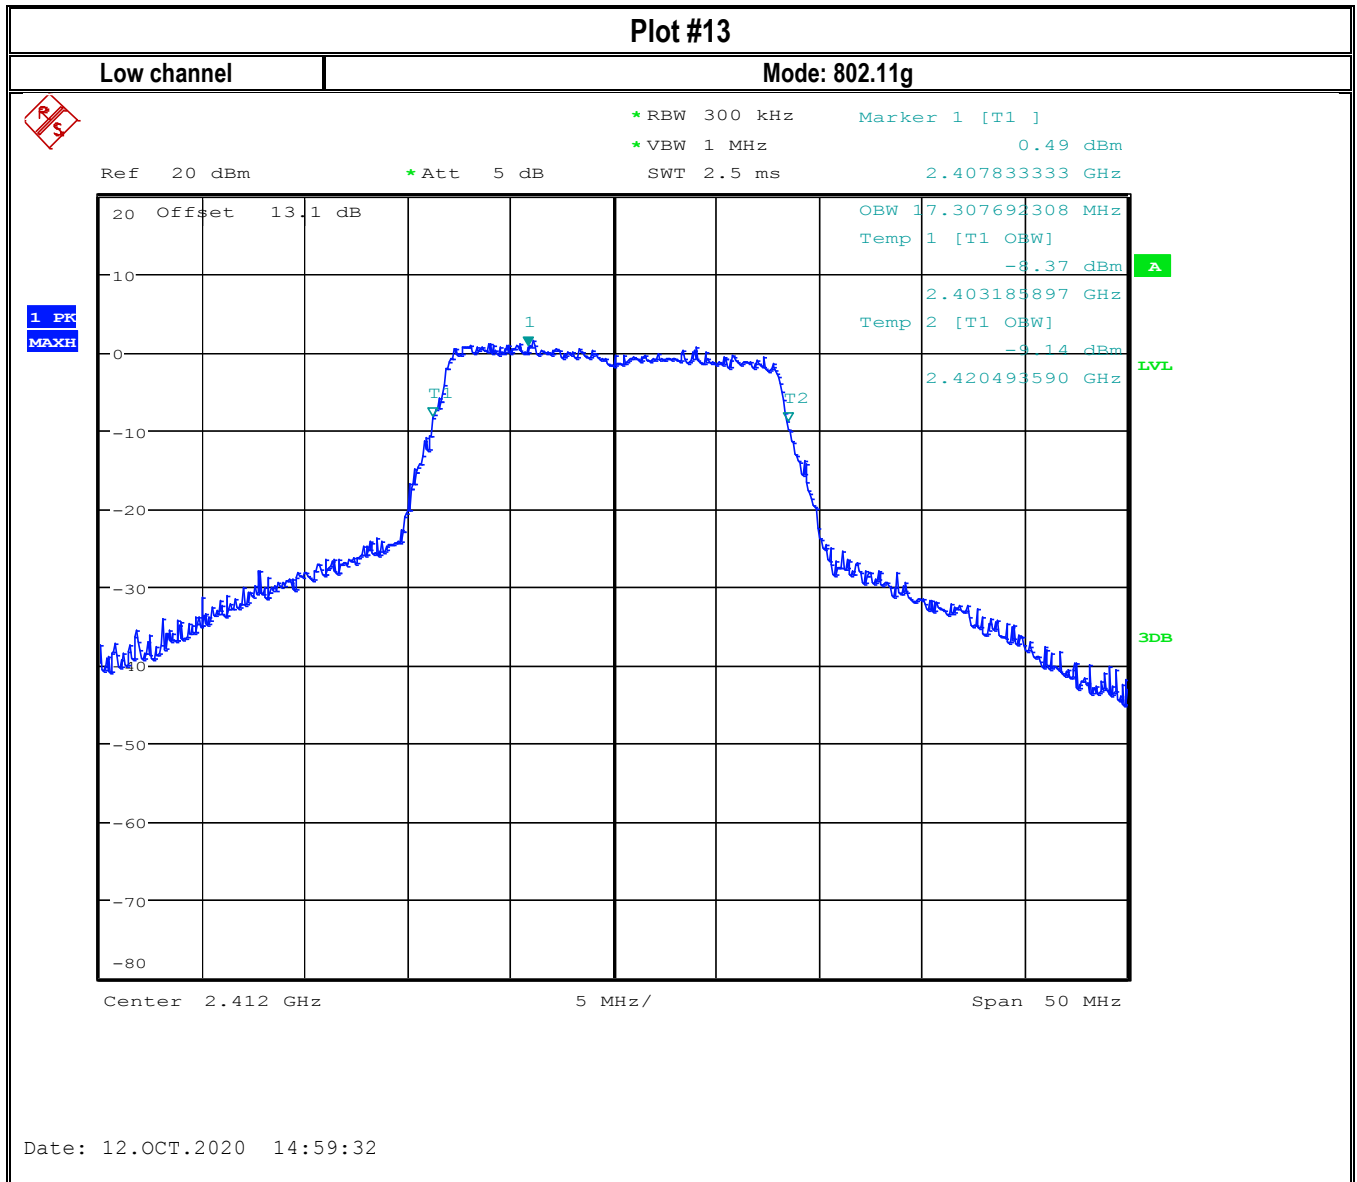


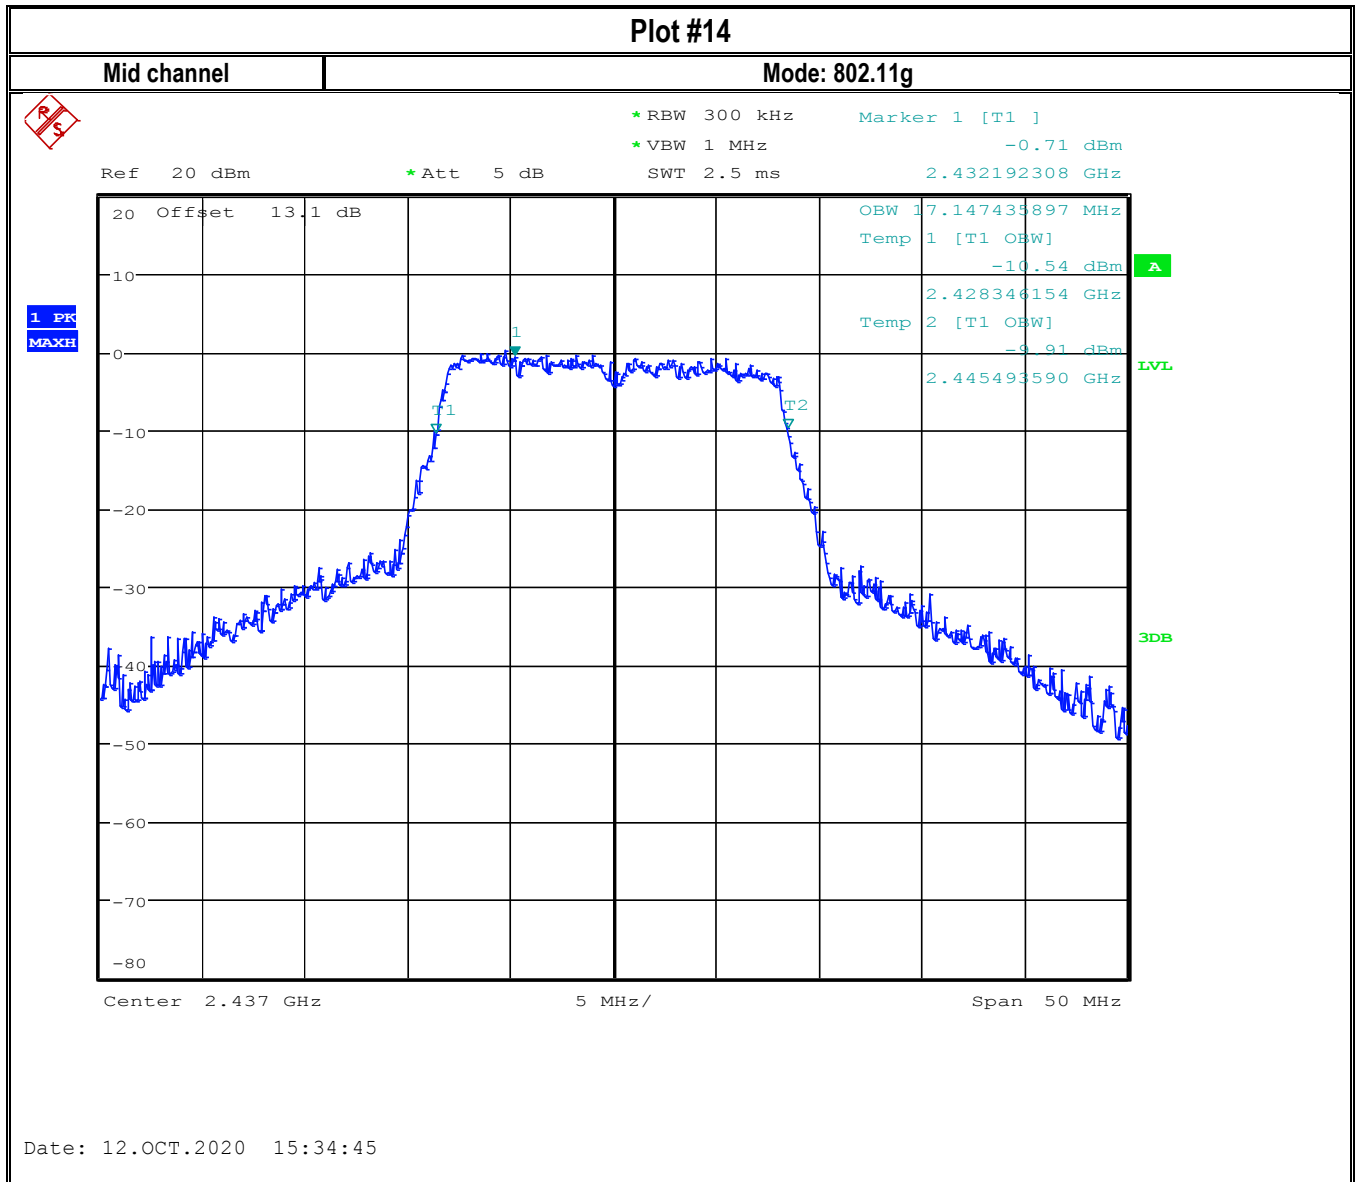

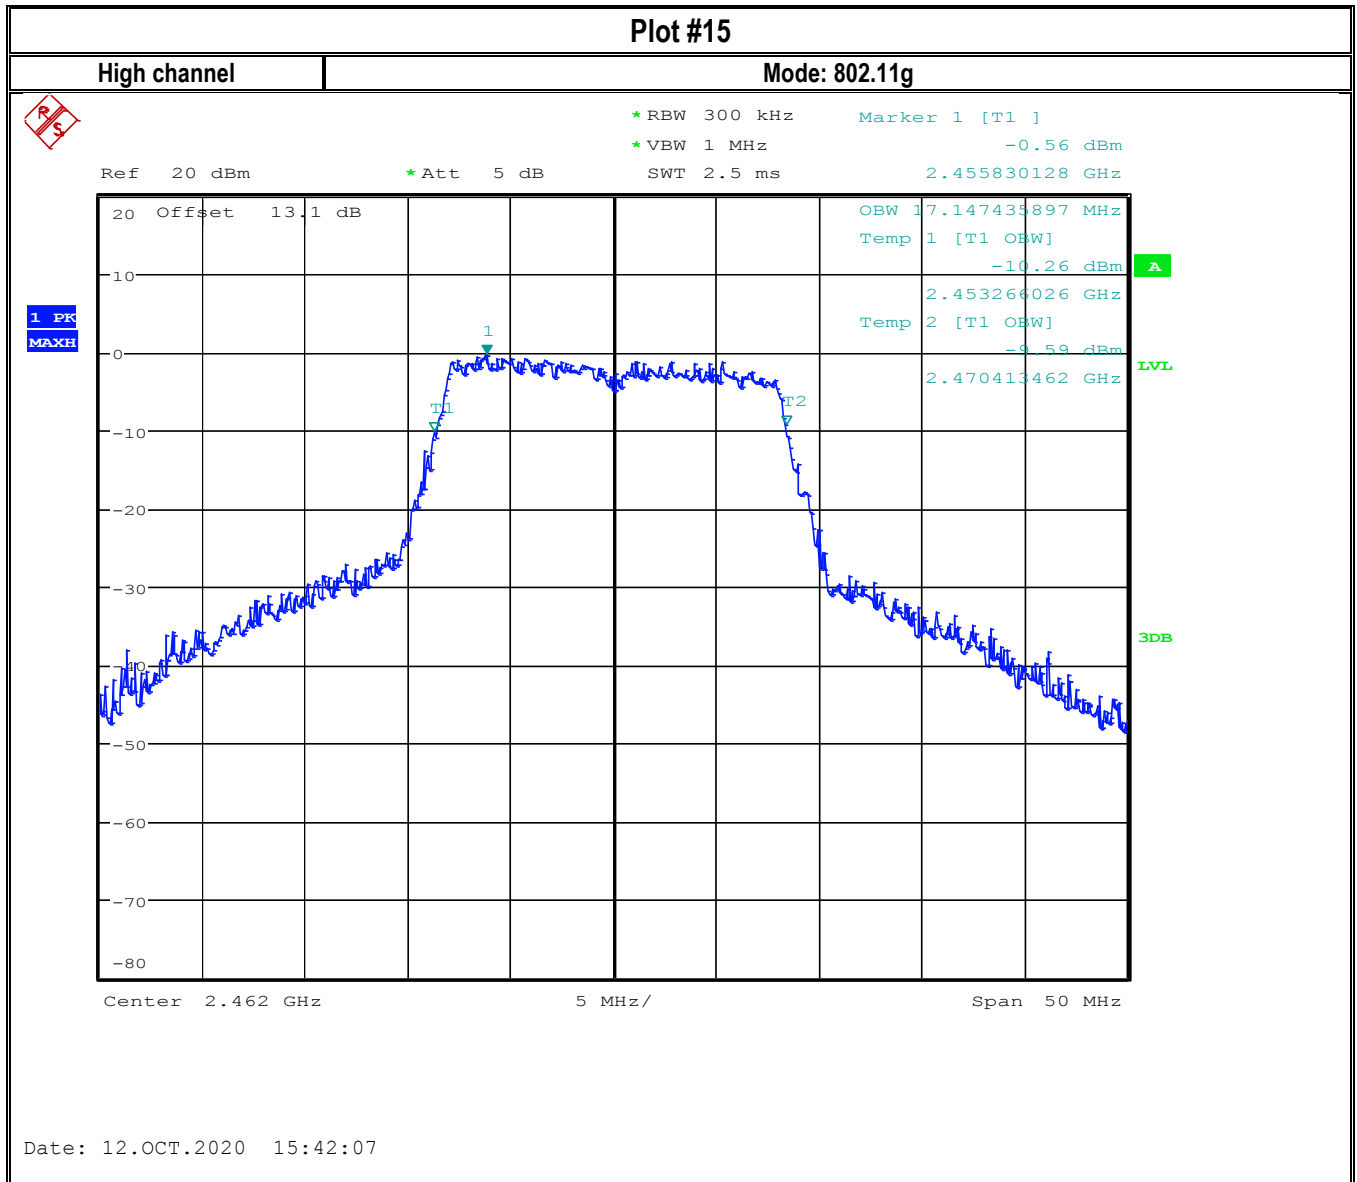

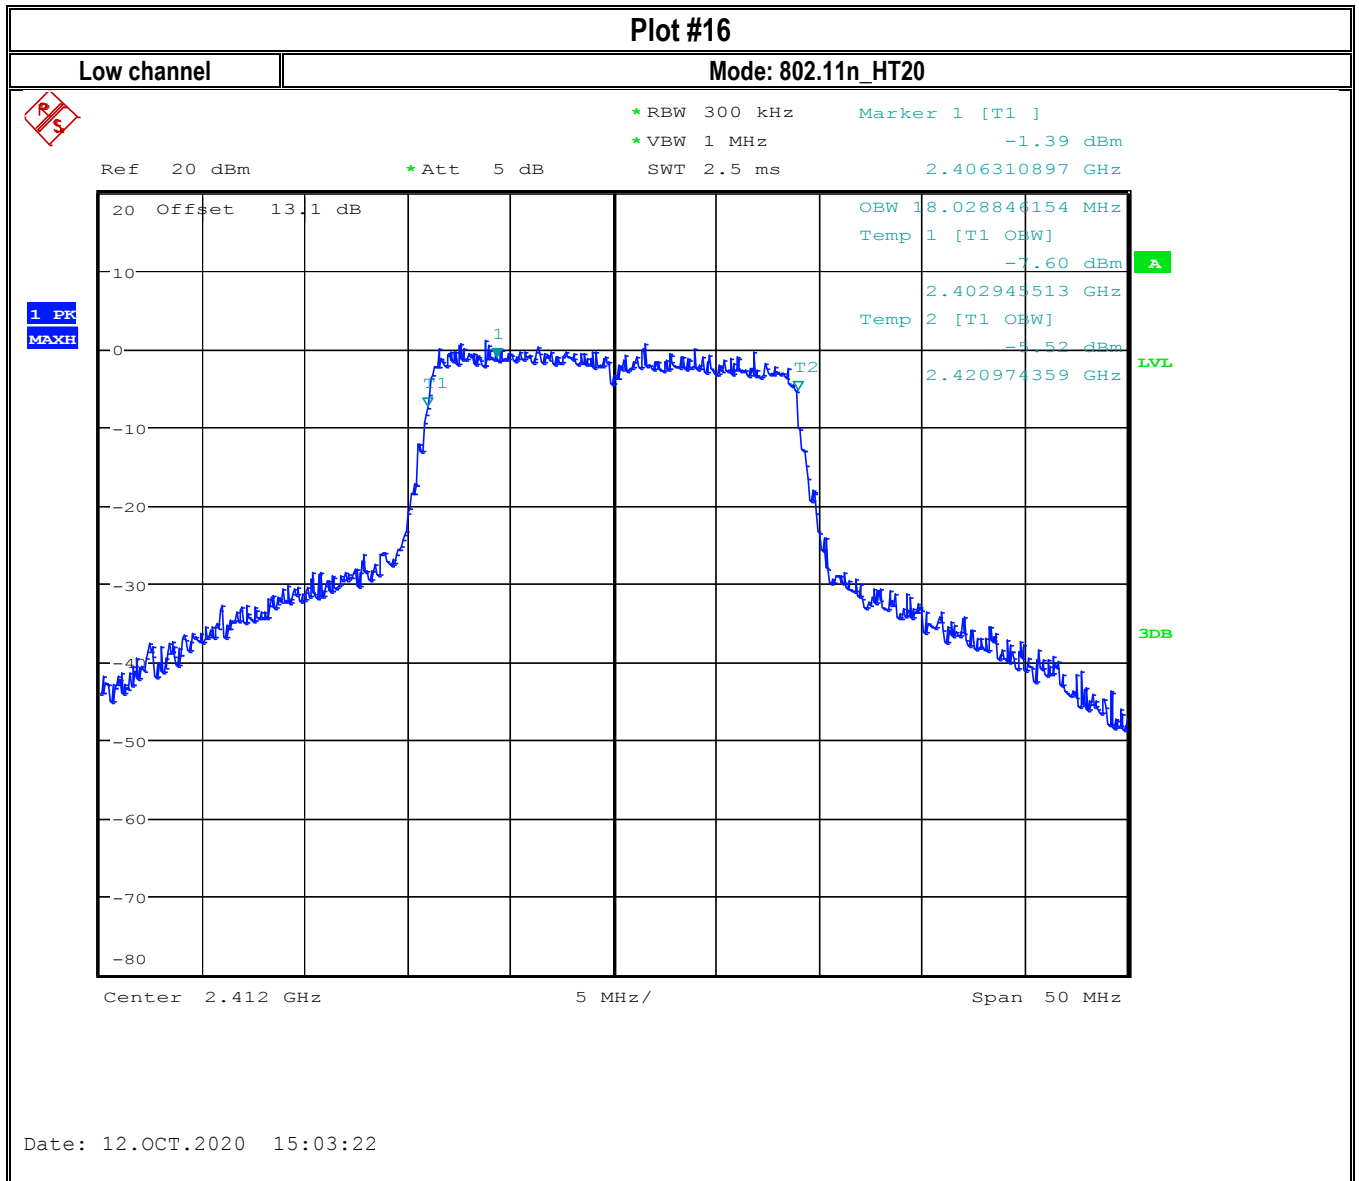

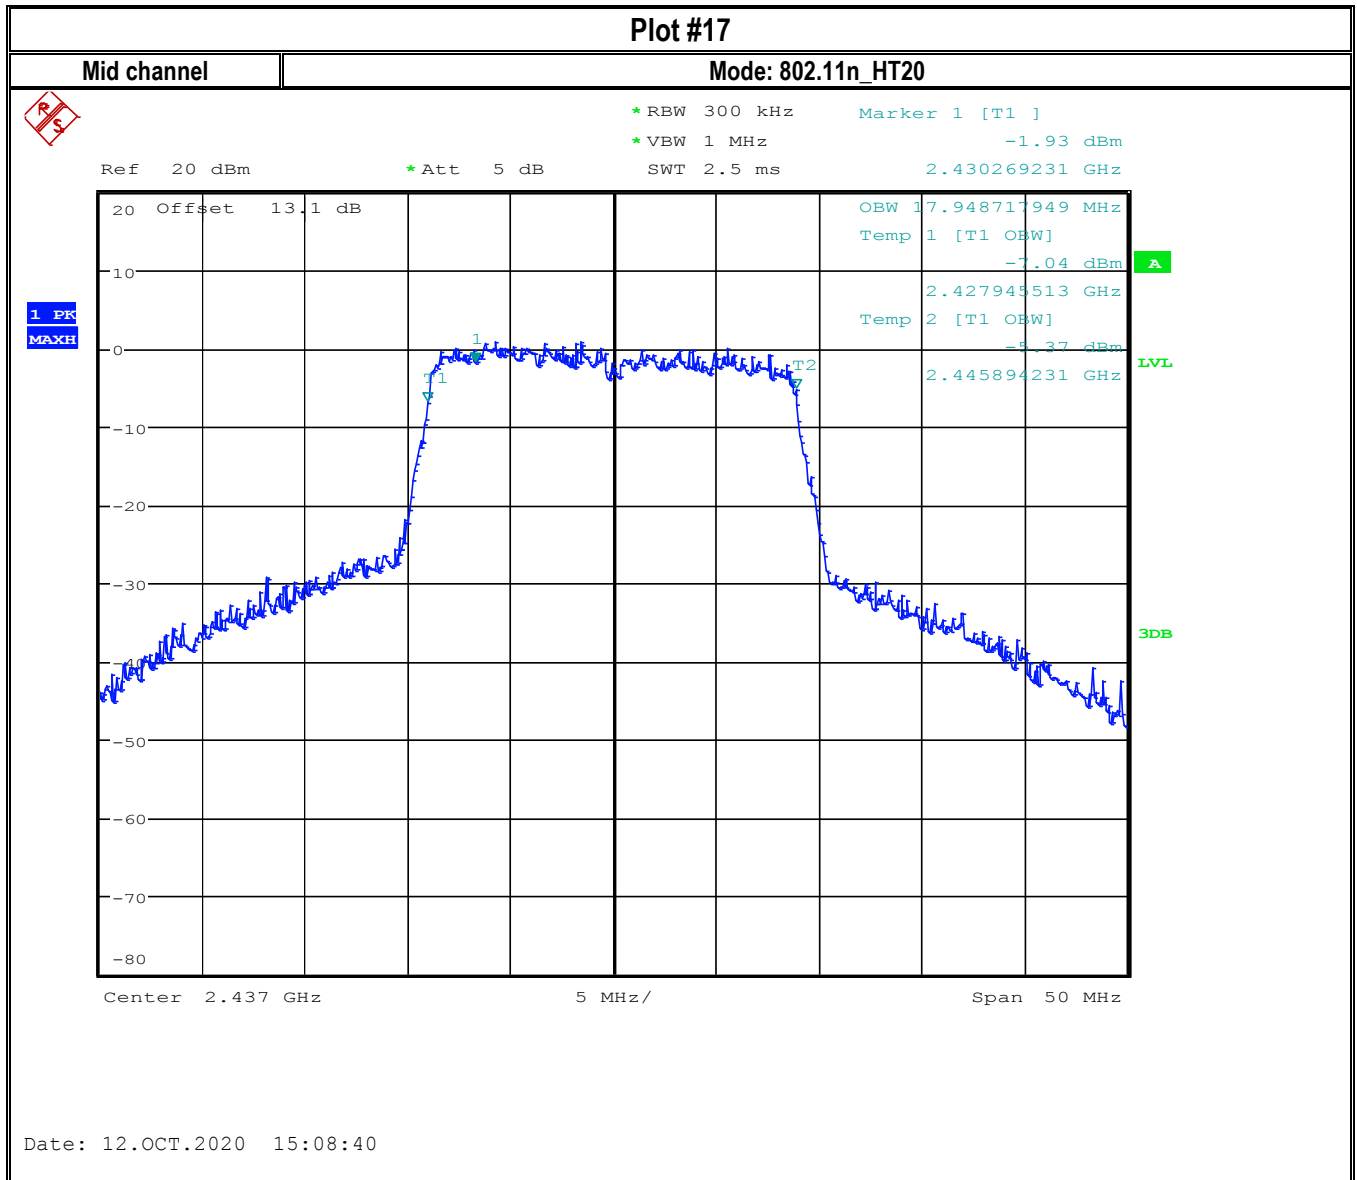

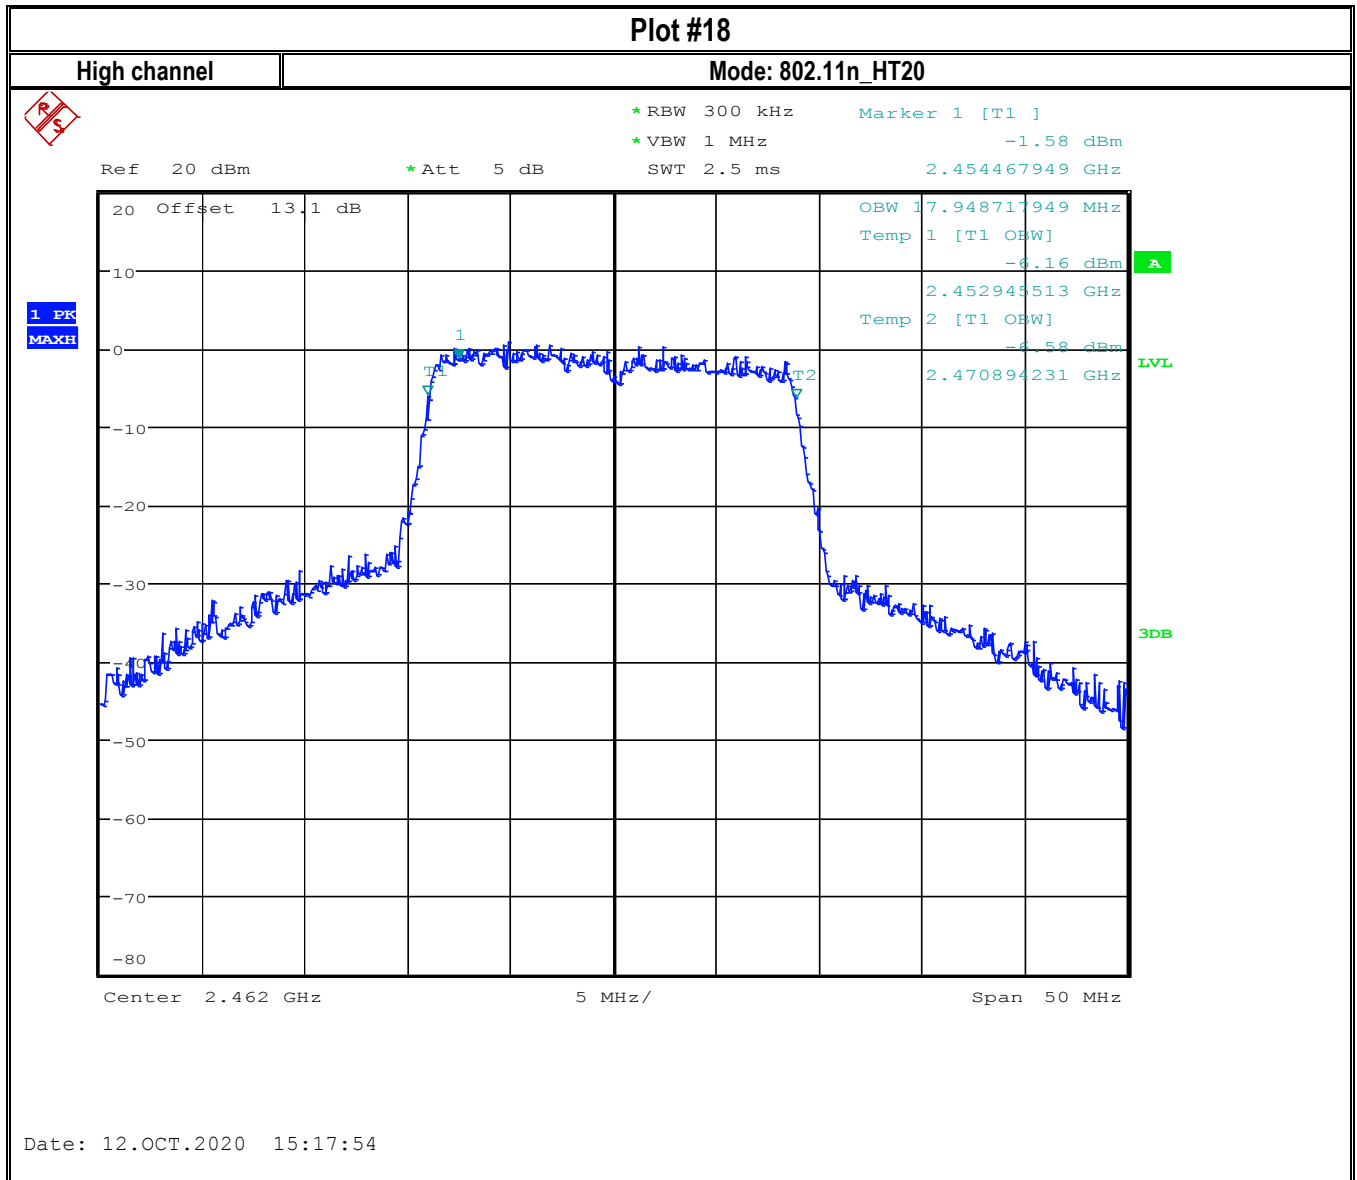

## 8.6 Radiated Transmitter Spurious Emissions and Restricted Bands

### 8.6.1 Measurement according to ANSI C63.10 (2013)

#### Spectrum Analyzer Settings:

- Frequency = 9 KHz – 30 MHz
- RBW = 9 KHz
- Detector: Peak
  
- Frequency = 30 MHz – 1 GHz
- Detector = Peak / Quasi-Peak
- RBW= 120 KHz (<1GHz)
  
- Frequency > 1 GHz
- Detector = Peak / Average
- RBW = 1 MHz
  
- Radiated spurious emissions shall be measured for the transmit frequencies, transmit power, and data rate for the lowest, middle and highest channel in each frequency band of operation and for the highest gain antenna for each antenna type, and using the appropriate parameters and test requirements.
- The highest (or worst-case) data rate shall be recorded for each measurement.
- For testing at distance other than the specified in the standard, the limit conversion is calculated by using 40 dB/decade extrapolation factor as follow: Conversion factor (CF) =  $40 \log (D/d) = 40 \log (300\text{m} / 3\text{m}) = 80\text{dB}$

### 8.6.2 Limits:

#### FCC §15.247

- In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

#### FCC §15.209 & RSS-Gen 8.9

- Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

| Frequency of emission (MHz) | Field strength (μV/m) | Measurement Distance (m) | Field strength @ 3m (dBμV/m) |
|-----------------------------|-----------------------|--------------------------|------------------------------|
| 0.009–0.490                 | 2400/F(kHz) / -----   | 300                      | -                            |
| 0.490–1.705                 | 24000/F(kHz) / -----  | 30                       | -                            |
| 1.705–30.0                  | 30 / (29.5)           | 30                       | -                            |
| 30–88                       | 100                   | 3                        | 40 dBμV/m                    |
| 88–216                      | 150                   | 3                        | 43.5 dBμV/m                  |
| 216–960                     | 200                   | 3                        | 46 dBμV/m                    |
| Above 960                   | 500                   | 3                        | 54 dBμV/m                    |

#### FCC §15.205 & RSS-Gen 8.10

- Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

| MHz               | MHz                 | MHz           | GHz         |
|-------------------|---------------------|---------------|-------------|
| 0.090-0.110       | 16.42-16.423        | 399.9-410     | 4.5-5.15    |
| 10.495-0.505      | 16.69475-16.69525   | 608-614       | 5.35-5.46   |
| 2.1735-2.1905     | 16.80425-16.80475   | 960-1240      | 7.25-7.75   |
| 4.125-4.128       | 25.5-25.67          | 1300-1427     | 8.025-8.5   |
| 4.17725-4.17775   | 37.5-38.25          | 1435-1626.5   | 9.0-9.2     |
| 4.20725-4.20775   | 73-74.6             | 1645.5-1646.5 | 9.3-9.5     |
| 6.215-6.218       | 74.8-75.2           | 1660-1710     | 10.6-12.7   |
| 6.26775-6.26825   | 108-121.94          | 1718.8-1722.2 | 13.25-13.4  |
| 6.31175-6.31225   | 123-138             | 2200-2300     | 14.47-14.5  |
| 8.291-8.294       | 149.9-150.05        | 2310-2390     | 15.35-16.2  |
| 8.362-8.366       | 156.52475-156.52525 | 2483.5-2500   | 17.7-21.4   |
| 8.37625-8.38675   | 156.7-156.9         | 2690-2900     | 22.01-23.12 |
| 8.41425-8.41475   | 162.0125-167.17     | 3260-3267     | 23.6-24.0   |
| 12.29-12.293      | 167.72-173.2        | 3332-3339     | 31.2-31.8   |
| 12.51975-12.52025 | 240-285             | 3345.8-3358   | 36.43-36.5  |
| 12.57675-12.57725 | 322-335.4           | 3600-4400     | Above 38.6  |
| 13.36-13.41       |                     |               |             |

- Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).  
 \*PEAK LIMIT= 74 dBμV/m  
 \*AVG. LIMIT= 54 dBμV/m


### 8.6.3 Test conditions and setup:


| Ambient Temperature | EUT Set-Up # | EUT operating mode | Power Input |
|---------------------|--------------|--------------------|-------------|
| 23° C               | 1            | 802.11n            | 110 VAC     |

### 8.6.4 Measurement result:

| Plot # | Channel # | Scan Frequency  | Limit             | Result |
|--------|-----------|-----------------|-------------------|--------|
| 1-3    | Low       | 30 MHz – 18 GHz | See section 8.6.2 | Pass   |
| 4-8    | Mid       | 9 kHz – 26 GHz  | See section 8.6.2 | Pass   |
| 9-11   | High      | 30 MHz – 18 GHz | See section 8.6.2 | Pass   |

## 8.6.5 Measurement Plots:

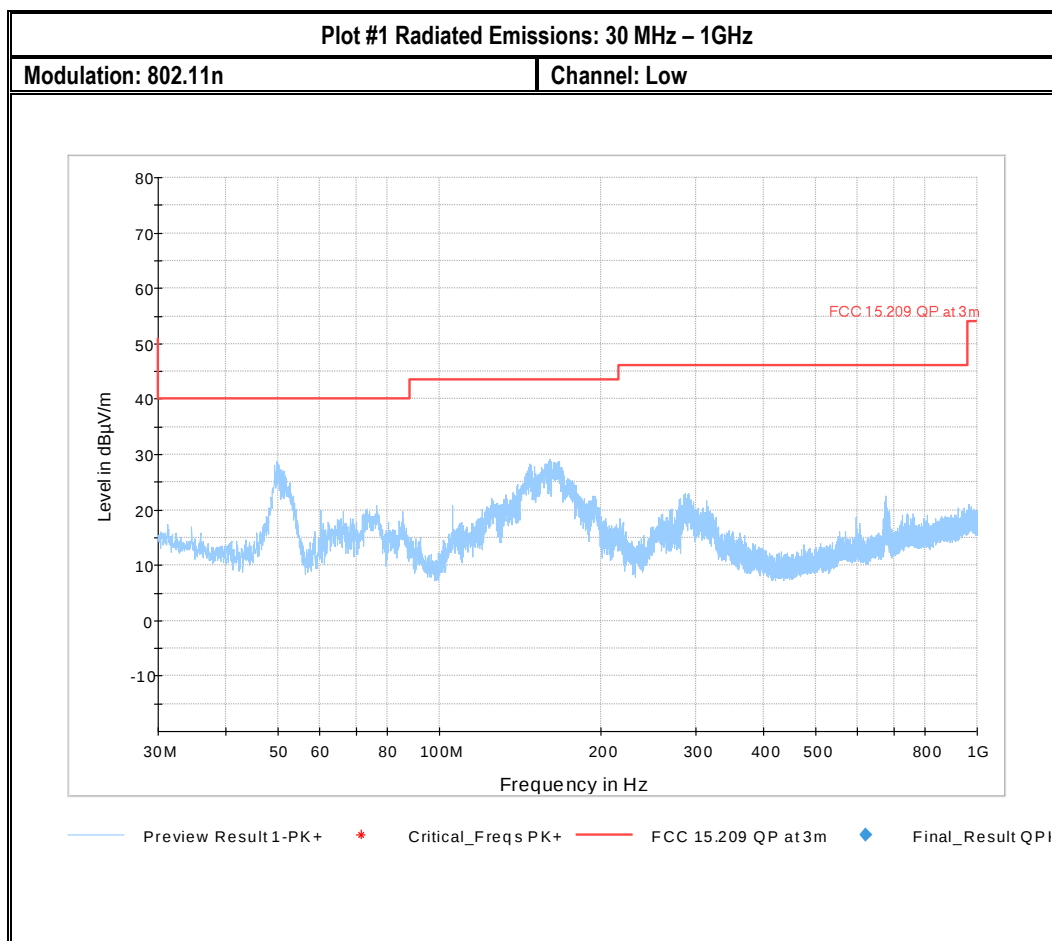

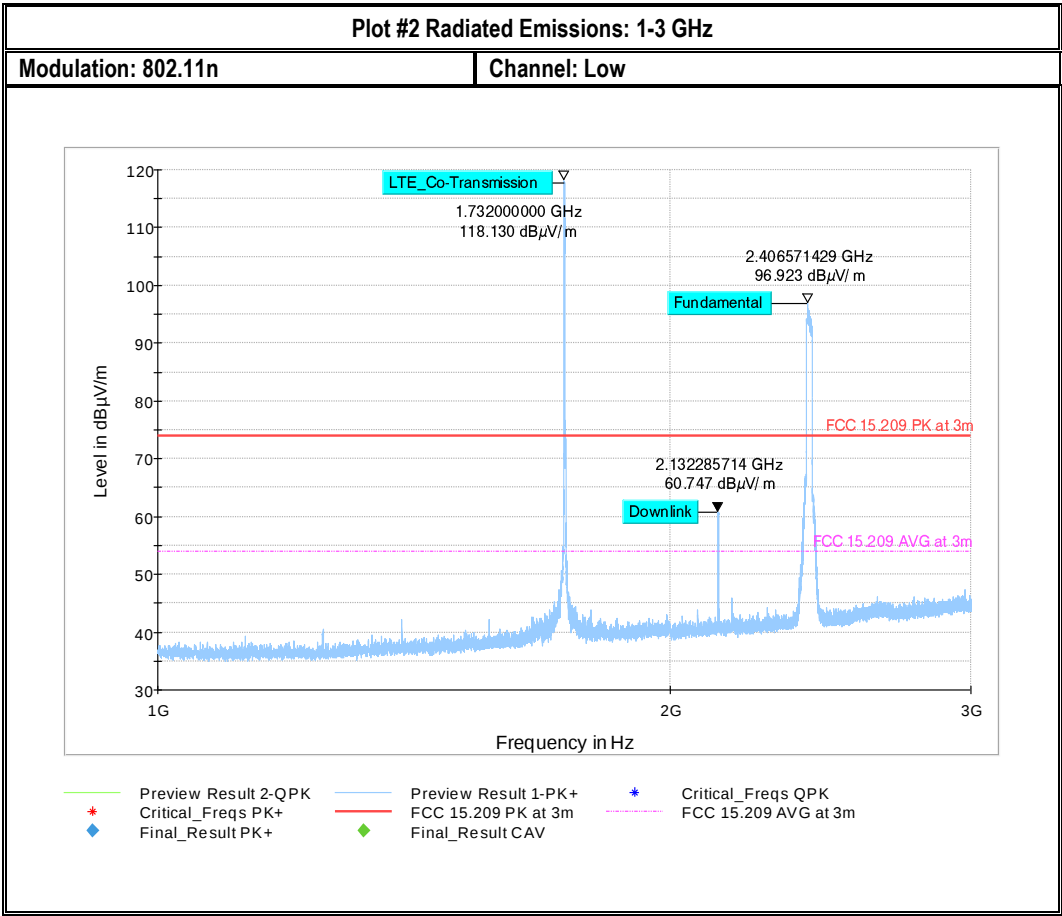


### Plot #3 Radiated Emissions: 3-18 GHz

Modulation: 802.11n

Channel: Low

#### Final Result

| Frequency (MHz) | MaxPeak (dBμV/m) | CAverage (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) | Comment |
|-----------------|------------------|-------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|--------------|---------|
| 3465.250        | 57.32            | ---               | 73.98          | 16.66       | 500.0           | 1000.000        | 107.0       | H   | 142.0         | -8.2         |         |
| 3465.250        | ---              | 33.64             | 53.98          | 20.34       | 500.0           | 1000.000        | 107.0       | H   | 142.0         | -8.2         |         |
| 5198.750        | 62.70            | ---               | 73.98          | 11.28       | 500.0           | 1000.000        | 151.0       | V   | 104.0         | -4.4         |         |
| 5198.750        | ---              | 37.18             | 53.98          | 16.80       | 500.0           | 1000.000        | 151.0       | V   | 104.0         | -4.4         |         |
| 6931.500        | ---              | 34.94             | 53.98          | 19.04       | 500.0           | 1000.000        | 264.0       | H   | 0.0           | -0.7         |         |
| 6931.500        | 62.50            | ---               | 73.98          | 11.48       | 500.0           | 1000.000        | 264.0       | H   | 0.0           | -0.7         |         |

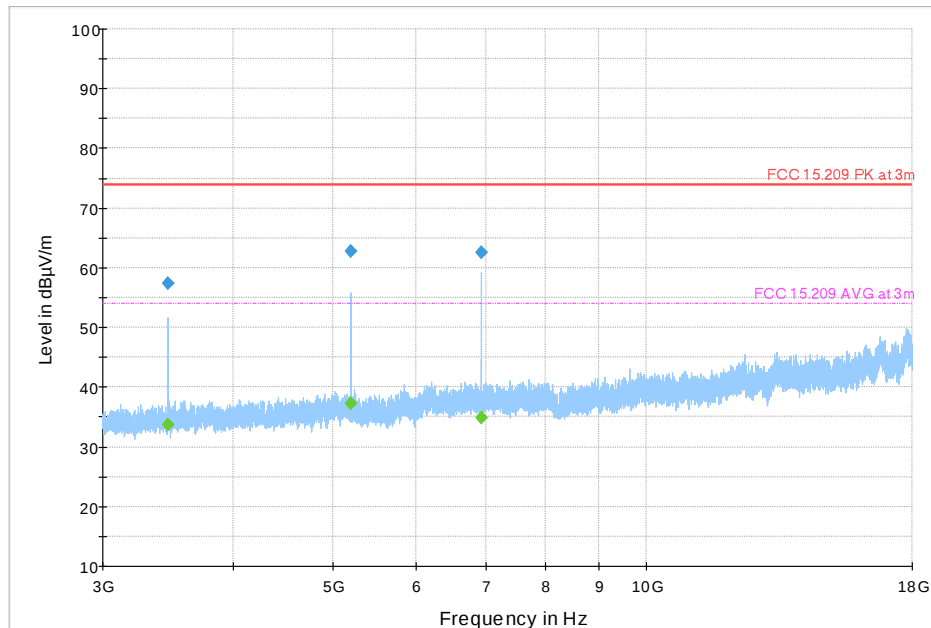


◆ Preview Result 1-PK+ — FCC 15.209 PK at 3m --- FCC 15.209 AVG at 3m  
◆ Final\_Result CAV


**Plot #4 Radiated Emissions: 9 KHz – 30 MHz**


**Modulation: 802.11n**


**Channel: Mid**

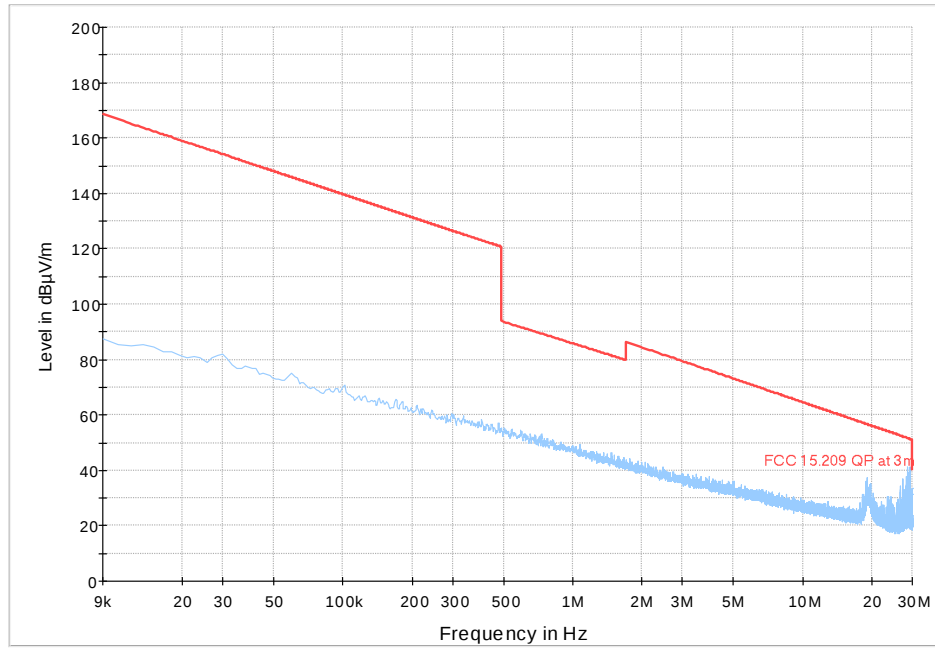


— Preview Result 1-PK+ \* Critical\_Freqs PK+ — FCC 15.209 QP at 3m ◆ Final\_Result QP

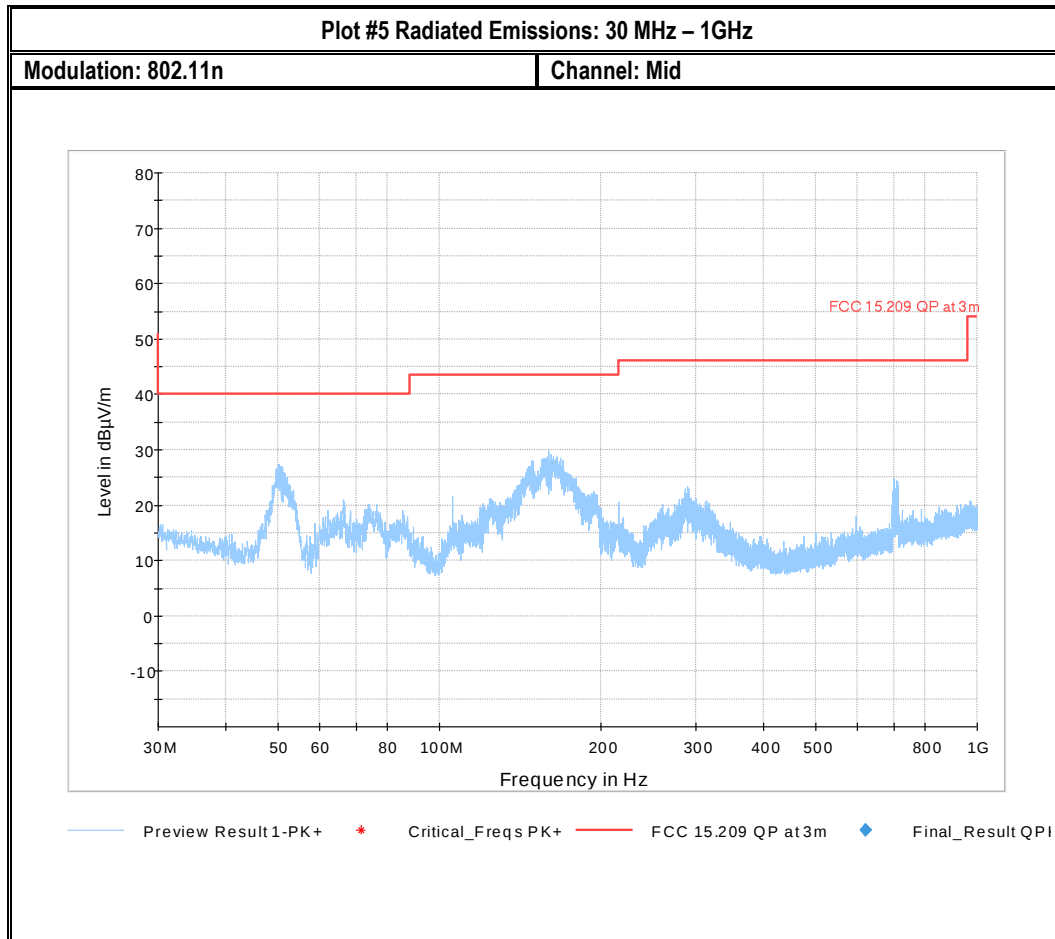

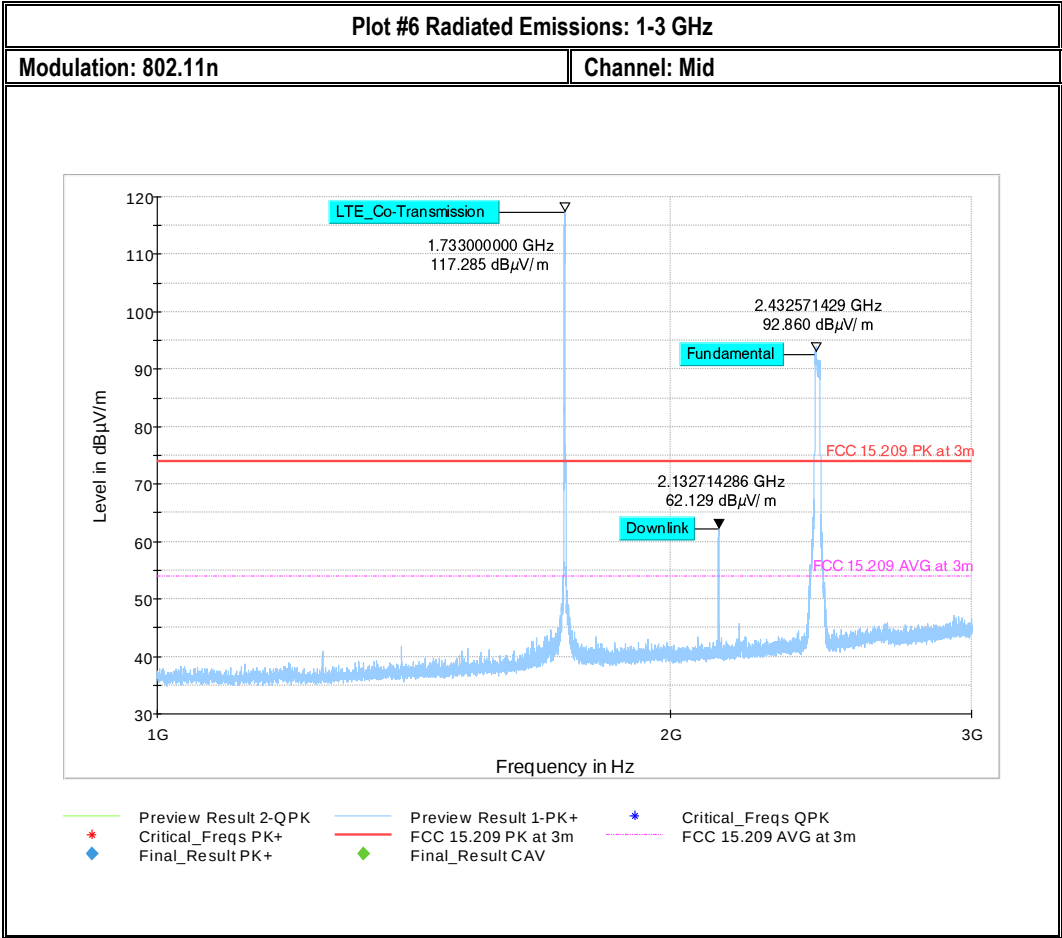

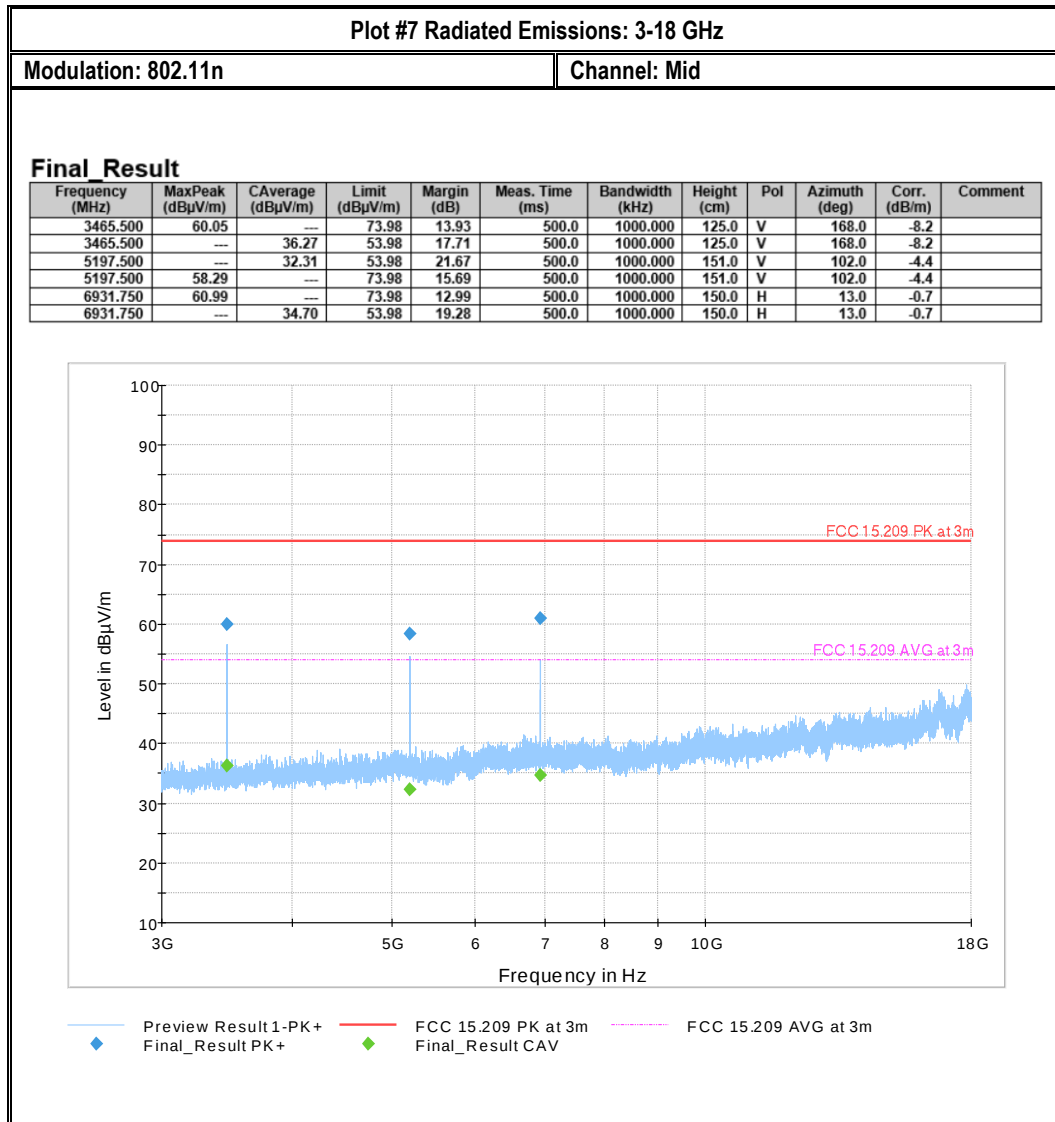


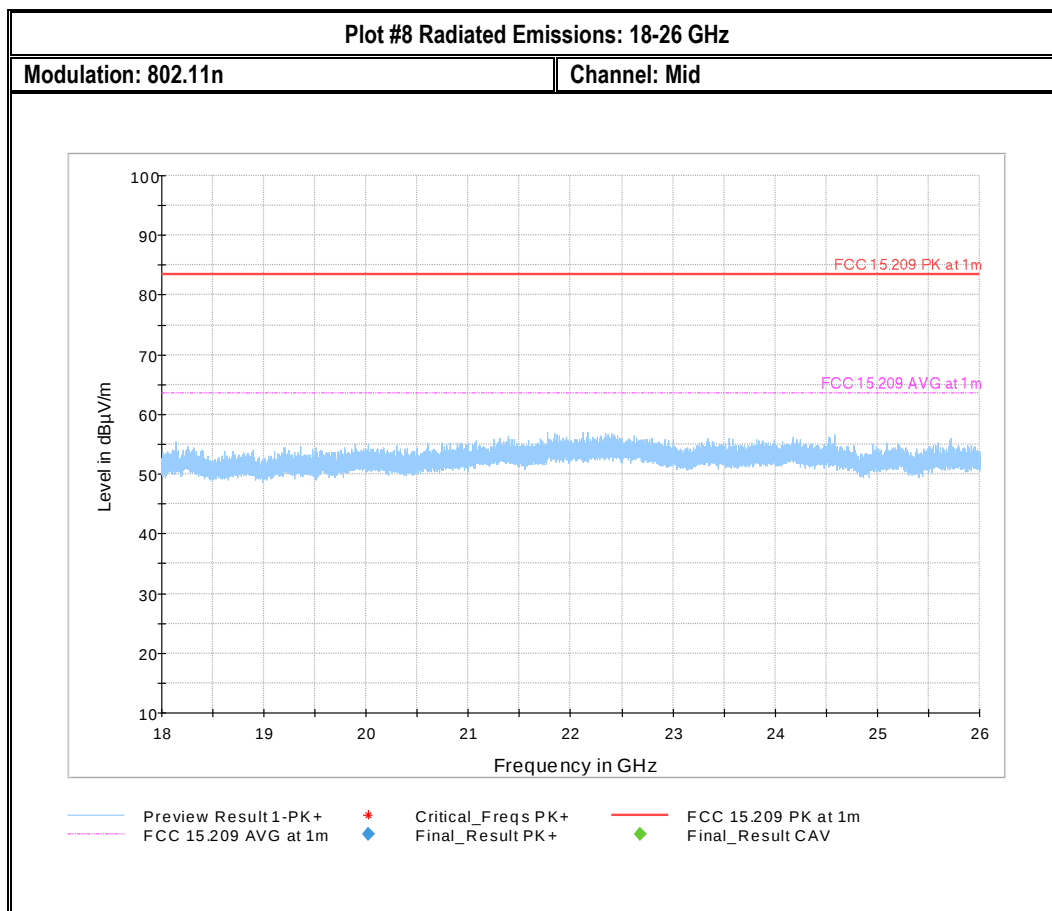


Plot #9 Radiated Emissions: 30 MHz – 1GHz

Modulation: 802.11n

Channel: High

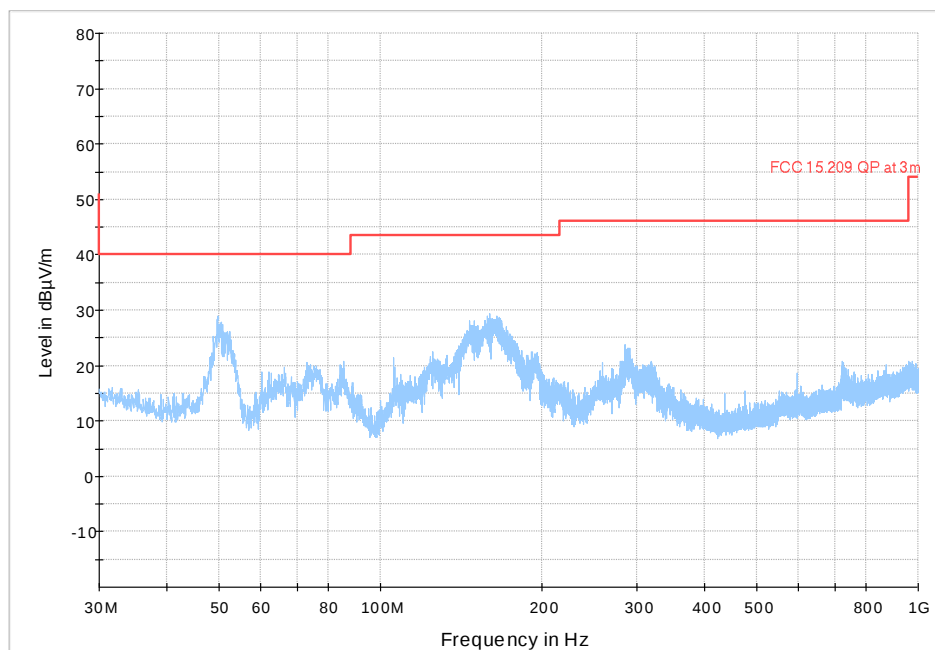

Preview Result 1-PK+ \* Critical\_Freqs PK+ FCC 15.209 QP at 3m Final\_Result QP I

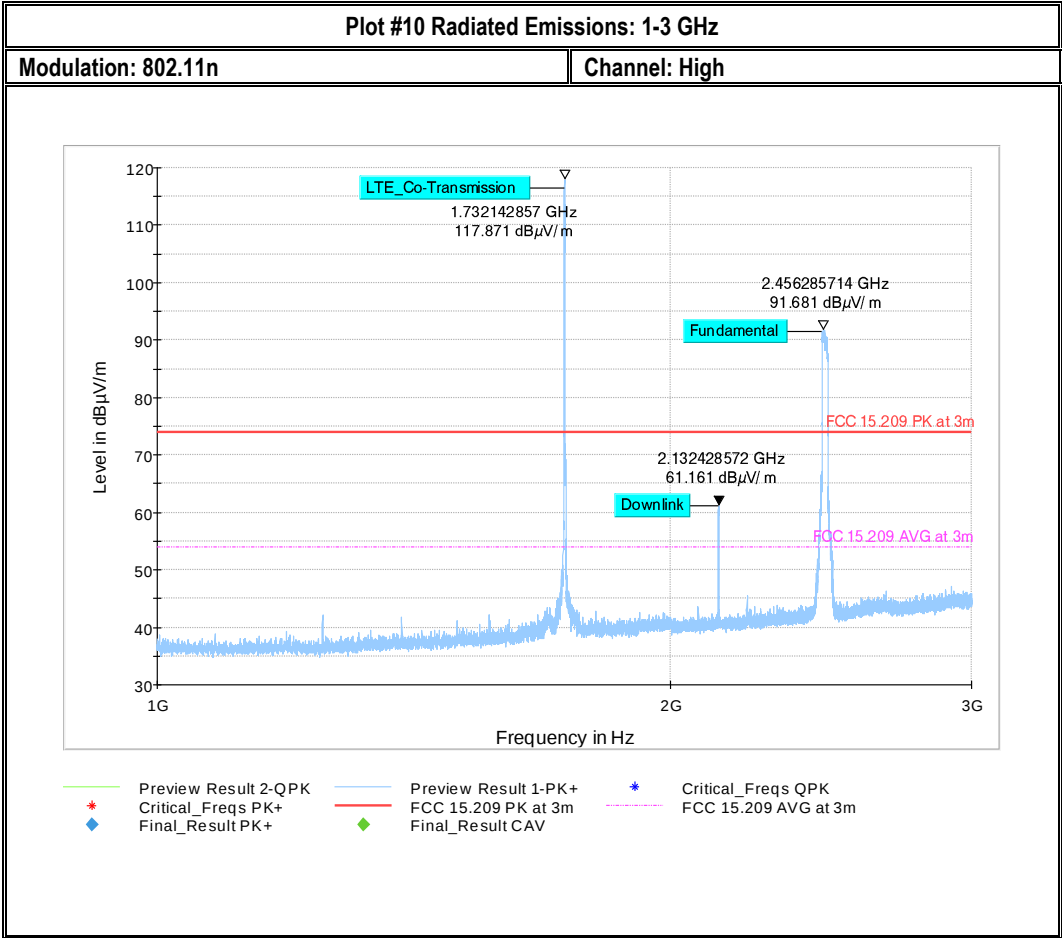


Plot #11 Radiated Emissions: 3-18 GHz

Modulation: 802.11n

Channel: High

Final Result

| Frequency (MHz) | MaxPeak (dBμV/m) | CAverage (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) | Comment |
|-----------------|------------------|-------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|--------------|---------|
| 3462.000        | ---              | 26.61             | 53.98          | 27.36       | 500.0           | 1000.000        | 140.0       | H   | 231.0         | -7.9         |         |
| 3462.000        | 39.23            | ---               | 73.98          | 34.75       | 500.0           | 1000.000        | 140.0       | H   | 231.0         | -7.9         |         |
| 5193.500        | ---              | 28.07             | 53.98          | 25.91       | 500.0           | 1000.000        | 209.0       | H   | 203.0         | -3.9         |         |
| 5193.500        | 40.36            | ---               | 73.98          | 33.62       | 500.0           | 1000.000        | 209.0       | H   | 203.0         | -3.9         |         |
| 6938.500        | ---              | 30.11             | 53.98          | 23.87       | 500.0           | 1000.000        | 164.0       | V   | 109.0         | -0.3         |         |
| 6938.500        | 42.53            | ---               | 73.98          | 31.45       | 500.0           | 1000.000        | 164.0       | V   | 109.0         | -0.3         |         |

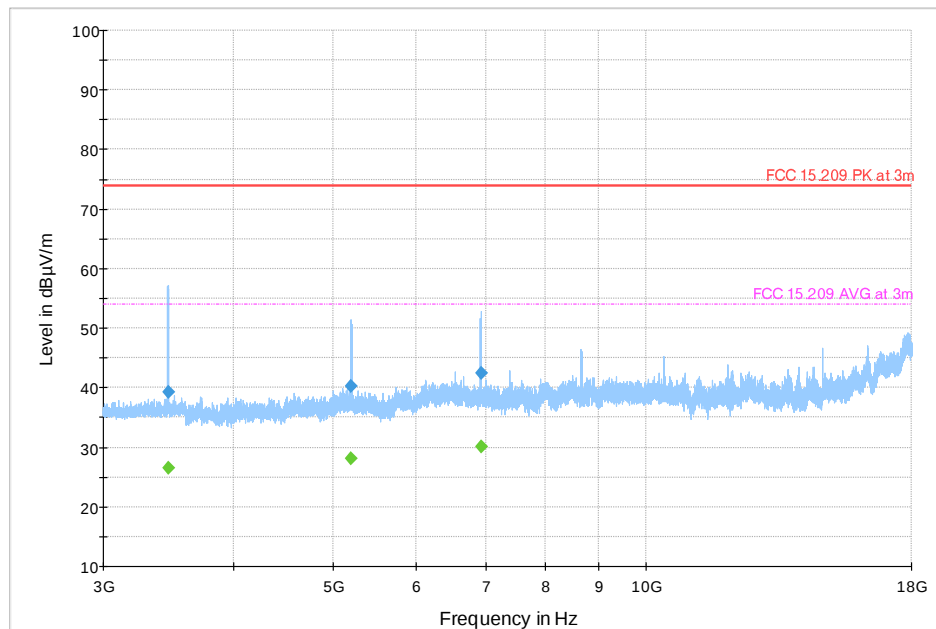

◆ Preview Result 1-PK+ Final\_Result PK+
 — FCC 15.209 PK at 3m
 — FCC 15.209 AVG at 3m
 ◆ Final\_Result CAV

## 8.7 AC Power Line Conducted Emissions

### 8.7.1 Measurement according to ANSI C63.10 (2013)

Analyzer Settings:

- RBW = 9 KHz (CISPR Bandwidth)
- Pre-scan Detector = Peak / Average for
- Final Measurements Detector = Quasi-Peak / Average

### 8.7.2 Limits: FCC 15.207 & RSS-Gen 8.8

(a) Except as shown in paragraphs (b) and (c) of this section of the CFR, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table (1), as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between frequency ranges.

| Frequency of emission (MHz) | Conducted limit (dB $\mu$ V) |           |
|-----------------------------|------------------------------|-----------|
|                             | Quasi-peak                   | Average   |
| 0.15–0.5                    | 66 to 56*                    | 56 to 46* |
| 0.5–5                       | 56                           | 46        |
| 5–30                        | 60                           | 50        |

\*Decreases with the logarithm of the frequency.

### 8.7.3 Test conditions and setup:

| Ambient Temperature (C) | EUT Set-Up # | EUT operating mode | Power line (L1, L2, L3, N) | Power Input   |
|-------------------------|--------------|--------------------|----------------------------|---------------|
| 22                      | 1            | 802.11n            | Line & Neutral             | 110 V / 60 Hz |

### 8.7.4 Measurement Result:

| Plot # | Port     | EUT Set-Up # | EUT operating mode | Scan Frequency   | Limit             | Result |
|--------|----------|--------------|--------------------|------------------|-------------------|--------|
| 1      | AC Mains | 1            | 802.11n            | 150 kHz – 30 MHz | See section 8.2.2 | Pass   |


### 8.7.5 Measurement Plots:

## Plot # 1

*Disclaimer: Any measurement data within 2dB from the limit line is conditional PASS/FAIL due to measurement uncertainty considerations.*

## Final\_Result

| Frequency (MHz) | QuasiPeak (dBμV) | CAverage (dBμV) | Limit (dBμV) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Line | PE  | Corr. (dB) | Comment |
|-----------------|------------------|-----------------|--------------|-------------|-----------------|-----------------|------|-----|------------|---------|
| 0.160           | ---              | 34.13           | 55.49        | 21.35       | 500.0           | 9.000           | L1   | GND | 10.5       |         |
| 0.160           | 41.39            | ---             | 65.49        | 24.09       | 500.0           | 9.000           | L1   | GND | 10.5       |         |
| 0.280           | ---              | 28.78           | 50.81        | 22.04       | 500.0           | 9.000           | L1   | GND | 10.1       |         |
| 0.280           | 32.63            | ---             | 60.81        | 28.19       | 500.0           | 9.000           | L1   | GND | 10.1       |         |
| 0.358           | ---              | 28.95           | 48.78        | 19.82       | 500.0           | 9.000           | L1   | GND | 10.0       |         |
| 0.358           | 34.91            | ---             | 58.78        | 23.86       | 500.0           | 9.000           | L1   | GND | 10.0       |         |
| 0.398           | ---              | 31.66           | 47.89        | 16.23       | 500.0           | 9.000           | L1   | GND | 10.0       |         |
| 0.398           | 35.51            | ---             | 57.89        | 22.37       | 500.0           | 9.000           | L1   | GND | 10.0       |         |
| 0.479           | ---              | 30.57           | 46.35        | 15.78       | 500.0           | 9.000           | L1   | GND | 10.0       |         |
| 0.479           | 33.92            | ---             | 56.35        | 22.43       | 500.0           | 9.000           | L1   | GND | 10.0       |         |
| 0.522           | ---              | 28.55           | 46.00        | 17.45       | 500.0           | 9.000           | L1   | GND | 10.0       |         |
| 0.522           | 32.29            | ---             | 56.00        | 23.71       | 500.0           | 9.000           | L1   | GND | 10.0       |         |

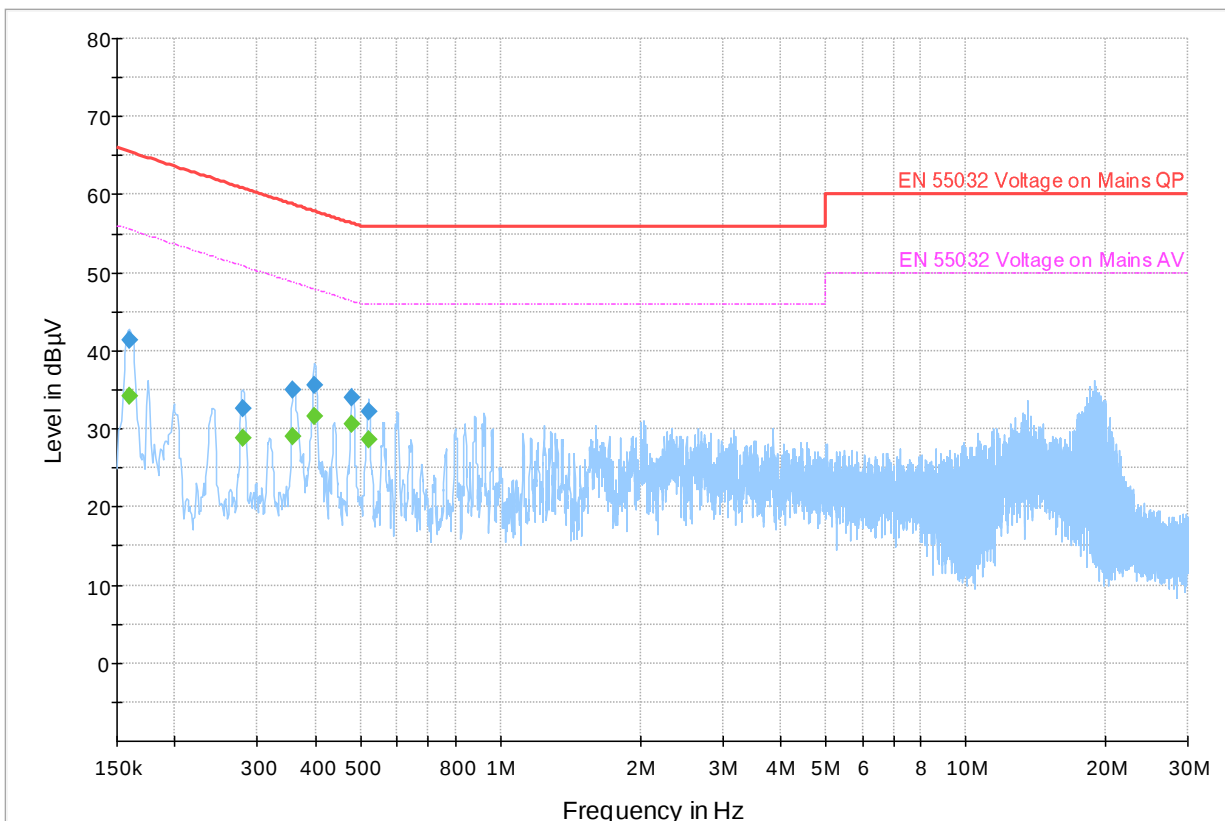

◆ Preview Result 1-PK+ Final\_Result QPK
 ◆ EN 55032 Voltage on Mains QP Final\_Result CAV
 --- EN 55032 Voltage on Mains AV

## 9 Test setup photos

Setup photos are included in supporting file name: "EMC\_GARMI\_077\_20001\_Setup\_Photos\_R1.pdf"

## 10 Test Equipment And Ancillaries Used For Testing

| Equipment Type                       | Manufacturer    | Model               | Serial #  | Calibration Cycle | Last Calibration Date |
|--------------------------------------|-----------------|---------------------|-----------|-------------------|-----------------------|
| ACTIVE LOOP ANTENNA                  | ETS LINDGREN    | 6507                | 00161344  | 3 YEARS           | 10/26/2017            |
| BILOG ANTENNA                        | TESEO           | CBL 6141B           | 41106     | 3 YEARS           | 11/01/2017            |
| HORN ANTENNA                         | ETS.LINDGREN    | 3115                | 00035111  | 3 YEARS           | 04/17/2019            |
| HORN ANTENNA                         | ETS LINDGREN    | 3117                | 00169547  | 3 YEARS           | 09/01/2020            |
| HORN ANTENNA                         | ETS LINDGREN    | 3116C               | 00169535  | 3 YEARS           | 09/24/2017            |
| WIDEBAND RADIO COMMUNICATION         | R&S             | CMW500              | 109825    | 3 YEARS           | 02/12/2018            |
| SIGNAL ANALYZER                      | R&S             | FSV 40              | 101022    | 2 YEARS           | 07/15/2019            |
| COMPACT DIGITAL BAROMETER            | CONTROL COMPANY | 10510-922           | 200236891 | 3 YEARS           | 04/13/2020            |
| DIGITAL THRMOMETER                   | CONTROL COMPANY | 36934-164           | 191871994 | 2 YEARS           | 01/10/2019            |
| LINE IMPEDANCE STABILIZATION NETWORK | FCC             | FCC-LISN-50-25-2-08 | 08014     | 3 YEARS           | 07/19/2019            |

Note: Equipment used meets the measurement uncertainty requirements as required per applicable standards for 95% confidence levels. Calibration due dates, unless defined specifically, falls on the last day of the month. Items indicated "N/A" for cal status either do not specifically require calibration or is internally characterized before use.

## 11 Revision History

| Date       | Report Name                            | Changes to report                                                                                                   | Report prepared by |
|------------|----------------------------------------|---------------------------------------------------------------------------------------------------------------------|--------------------|
| 2020-10-20 | EMC_GARMI_077_20001_15.247_WLAN_DTS    | Initial version                                                                                                     | Yuchan Lu          |
| 2020-11-04 | EMC_GARMI_077_20001_15.247_WLAN_DTS_R1 | Changed Marketing name to "N/A"; Changed the client's and manufacture's addresses; Removed the WLAN FCC and IC IDs. | Yuchan Lu          |
| 2020-11-18 | EMC_GARMI_077_20001_15.247_WLAN_DTS_R2 | Section 3.5 updated                                                                                                 | Yuchan Lu          |
| 2021-01-25 | EMC_GARMI_077_20001_15.247_WLAN_DTS_R3 | Added a note for unrestricted bandedge limit                                                                        | Yuchan Lu          |

<<The End>>