


# FCC Test Report

**FCC ID** : IPH-04799  
**Equipment** : Fitness product  
**Model No.** : A04799  
**Brand Name** : GARMIN  
**Applicant** : Garmin International, Inc.  
**Address** : 1200 E. 151st Street Olathe, KS 66062 United States  
**Standard** : 47 CFR FCC Part 15.247  
**Received Date** : Apr. 22, 2024  
**Tested Date** : Apr. 25 ~ May 11, 2024


We, International Certification Corporation, would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by:

Approved by:



Along Chen / Assistant Manager



Gary Chang / Manager

## Table of Contents

|                                                                       |                                                             |           |
|-----------------------------------------------------------------------|-------------------------------------------------------------|-----------|
| <b>1</b>                                                              | <b>GENERAL DESCRIPTION .....</b>                            | <b>5</b>  |
| 1.1                                                                   | Information.....                                            | 5         |
| 1.2                                                                   | Local Support Equipment List .....                          | 8         |
| 1.3                                                                   | Test Setup Chart .....                                      | 8         |
| 1.4                                                                   | Test Equipment List and Calibration Data.....               | 9         |
| 1.5                                                                   | Test Standards .....                                        | 10        |
| 1.6                                                                   | Reference Guidance .....                                    | 10        |
| 1.7                                                                   | Deviation from Test Standard and Measurement Procedure..... | 10        |
| 1.8                                                                   | Measurement Uncertainty .....                               | 10        |
| <b>2</b>                                                              | <b>TEST CONFIGURATION.....</b>                              | <b>11</b> |
| 2.1                                                                   | Testing Facility .....                                      | 11        |
| 2.2                                                                   | The Worst Test Modes and Channel Details .....              | 11        |
| <b>3</b>                                                              | <b>TRANSMITTER TEST RESULTS .....</b>                       | <b>12</b> |
| 3.1                                                                   | 6dB and Occupied Bandwidth.....                             | 12        |
| 3.2                                                                   | Conducted Output Power .....                                | 13        |
| 3.3                                                                   | Power Spectral Density .....                                | 14        |
| 3.4                                                                   | Unwanted Emissions in Restricted Frequency Bands.....       | 15        |
| 3.5                                                                   | Emissions in non-restricted Frequency Bands.....            | 17        |
| 3.6                                                                   | AC Power Line Conducted Emissions .....                     | 18        |
| <b>4</b>                                                              | <b>TEST LABORATORY INFORMATION .....</b>                    | <b>19</b> |
| <br>                                                                  |                                                             |           |
| <b>Appendix A. 6dB and Occupied Bandwidth</b>                         |                                                             |           |
| <b>Appendix B. Conducted Output Power</b>                             |                                                             |           |
| <b>Appendix C. Power Spectral Density</b>                             |                                                             |           |
| <b>Appendix D. Unwanted Emissions into Restricted Frequency Bands</b> |                                                             |           |
| <b>Appendix E. Emissions in Non-Restricted Frequency Bands</b>        |                                                             |           |
| <b>Appendix F. AC Power Line Conducted Emissions</b>                  |                                                             |           |

---

## Release Record

| Report No. | Version | Description   | Issued Date   |
|------------|---------|---------------|---------------|
| FR442205AE | Rev. 01 | Initial issue | Jun. 13, 2024 |

## Summary of Test Results

| FCC Rules           | Test Items                        | Measured                                               | Result |
|---------------------|-----------------------------------|--------------------------------------------------------|--------|
| 15.207              | AC Power Line Conducted Emissions | [dBuV]: 0.479MHz<br>43.58 (Margin -12.78dB) - QP       | Pass   |
| 15.247(d)<br>15.209 | Unwanted Emissions                | [dBuV/m at 3m]: 49.2MHz<br>30.85 (Margin -9.15dB) - PK | Pass   |
| 15.247(b)(3)        | Conducted Output Power            | Power [dBm]: 2.53                                      | Pass   |
| 15.247(a)(2)        | 6dB Bandwidth                     | Meet the requirement of limit                          | Pass   |
| 15.247(e)           | Power Spectral Density            | Meet the requirement of limit                          | Pass   |
| 15.203              | Antenna Requirement               | Meet the requirement of limit                          | Pass   |

### Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

### Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

# 1 General Description

## 1.1 Information

### 1.1.1 Specification of the Equipment under Test (EUT)

| RF General Information                                |                |                 |                |           |
|-------------------------------------------------------|----------------|-----------------|----------------|-----------|
| Frequency Range (MHz)                                 | Bluetooth Mode | Ch. Freq. (MHz) | Channel Number | Data Rate |
| 2400-2483.5                                           | LE             | 2402-2480       | 40             | 1 Mbps    |
|                                                       |                | 2404-2478       | 37             | 2 Mbps    |
| Note: Bluetooth LE (Low energy) uses GFSK modulation. |                |                 |                |           |

### 1.1.2 Antenna Details

| Ant. No. | Brand  | Model        | Type | Connector | Gain (dBi) |
|----------|--------|--------------|------|-----------|------------|
| 1        | Garmin | 117-02117-0A | Slot | No        | -3.1       |

### 1.1.3 Power Supply Type of Equipment under Test (EUT)

|            |                                        |
|------------|----------------------------------------|
| Power Type | 5Vdc from host<br>3.91Vdc from battery |
|------------|----------------------------------------|

### 1.1.4 Accessories

| Accessories |           |                                                                     |
|-------------|-----------|---------------------------------------------------------------------|
| No.         | Equipment | Description                                                         |
| 1           | Battery   | Brand: Garmin<br>Model: 361-00192-00<br>Rating: 3.91V, 180mAh       |
| 2           | USB cable | Brand: GARMIN<br>Model: 320-01602-00<br>0.56m shielded without core |

### 1.1.5 Channel List

| Frequency band (MHz) |                 |         |                 | 2402-2480 / BT-LE(1Mbps) |                 |         |                 |
|----------------------|-----------------|---------|-----------------|--------------------------|-----------------|---------|-----------------|
| Channel              | Frequency (MHz) | Channel | Frequency (MHz) | Channel                  | Frequency (MHz) | Channel | Frequency (MHz) |
| 37                   | 2402            | 9       | 2422            | 18                       | 2442            | 28      | 2462            |
| 0                    | 2404            | 10      | 2424            | 19                       | 2444            | 29      | 2464            |
| 1                    | 2406            | 38      | 2426            | 20                       | 2446            | 30      | 2466            |
| 2                    | 2408            | 11      | 2428            | 21                       | 2448            | 31      | 2468            |
| 3                    | 2410            | 12      | 2430            | 22                       | 2450            | 32      | 2470            |
| 4                    | 2412            | 13      | 2432            | 23                       | 2452            | 33      | 2472            |
| 5                    | 2414            | 14      | 2434            | 24                       | 2454            | 34      | 2474            |
| 6                    | 2416            | 15      | 2436            | 25                       | 2456            | 35      | 2476            |
| 7                    | 2418            | 16      | 2438            | 26                       | 2458            | 36      | 2478            |
| 8                    | 2420            | 17      | 2440            | 27                       | 2460            | 39      | 2480            |

| Frequency band (MHz) |                 |         |                 | 2404-2478 / BT-LE(2Mbps) |                 |         |                 |
|----------------------|-----------------|---------|-----------------|--------------------------|-----------------|---------|-----------------|
| Channel              | Frequency (MHz) | Channel | Frequency (MHz) | Channel                  | Frequency (MHz) | Channel | Frequency (MHz) |
| 0                    | 2404            | 10      | 2424            | 20                       | 2446            | 30      | 2466            |
| 1                    | 2406            | 11      | 2428            | 21                       | 2448            | 31      | 2468            |
| 2                    | 2408            | 12      | 2430            | 22                       | 2450            | 32      | 2470            |
| 3                    | 2410            | 13      | 2432            | 23                       | 2452            | 33      | 2472            |
| 4                    | 2412            | 14      | 2434            | 24                       | 2454            | 34      | 2474            |
| 5                    | 2414            | 15      | 2436            | 25                       | 2456            | 35      | 2476            |
| 6                    | 2416            | 16      | 2438            | 26                       | 2458            | 36      | 2478            |
| 7                    | 2418            | 17      | 2440            | 27                       | 2460            | --      | --              |
| 8                    | 2420            | 18      | 2442            | 28                       | 2462            | --      | --              |
| 9                    | 2422            | 19      | 2444            | 29                       | 2464            | --      | --              |

### 1.1.6 Test Tool and Duty Cycle

| Test Tool       | BT Test, Version: SW 1.11     |                  |
|-----------------|-------------------------------|------------------|
| Modulation Mode | Duty Cycle Of Test Signal (%) | Duty Factor (dB) |
| BT-LE(1Mbps)    | 42.59%                        | 3.71             |
| BT-LE(2Mbps)    | 23.61%                        | 6.27             |

### 1.1.7 Power Index of Test Tool



| Modulation Mode | Test Frequency (MHz) |         |         |
|-----------------|----------------------|---------|---------|
|                 | 2402                 | 2440    | 2480    |
| BT-LE(1Mbps)    | default              | default | default |

| Modulation Mode | Test Frequency (MHz) |         |         |
|-----------------|----------------------|---------|---------|
|                 | 2404                 | 2440    | 2478    |
| BT-LE(2Mbps)    | default              | default | default |

## 1.2 Local Support Equipment List

| Support Equipment List |           |         |            |        |         |
|------------------------|-----------|---------|------------|--------|---------|
| No.                    | Equipment | Brand   | Model      | FCC ID | Remarks |
| 1                      | Adapter   | Samsung | ETA-U90JWS | ---    | ---     |

## 1.3 Test Setup Chart

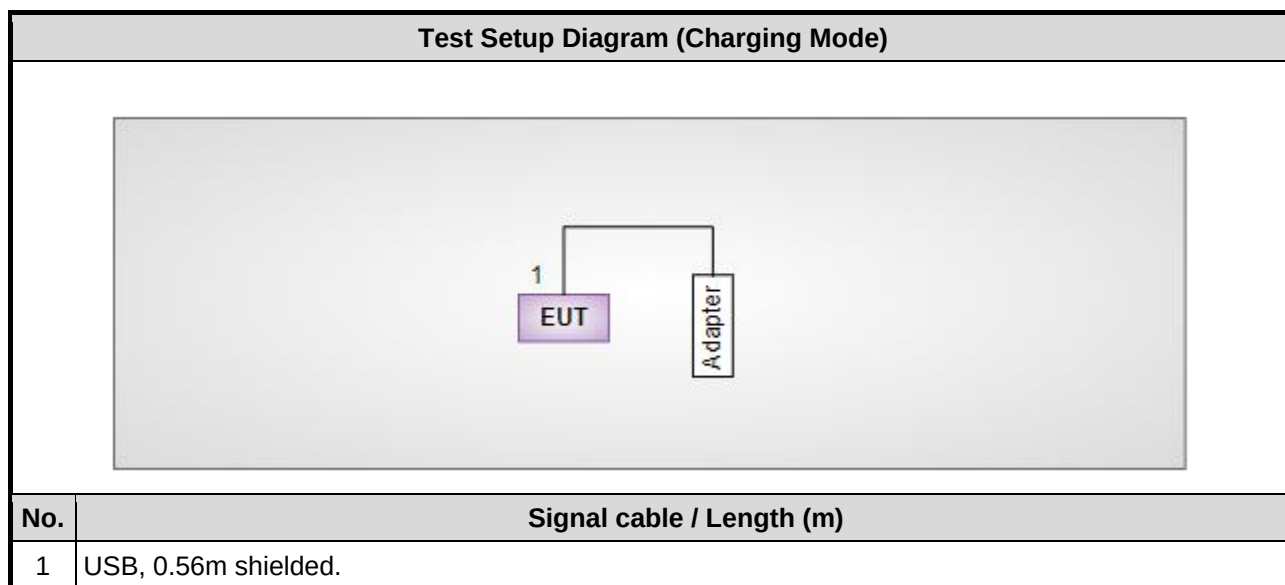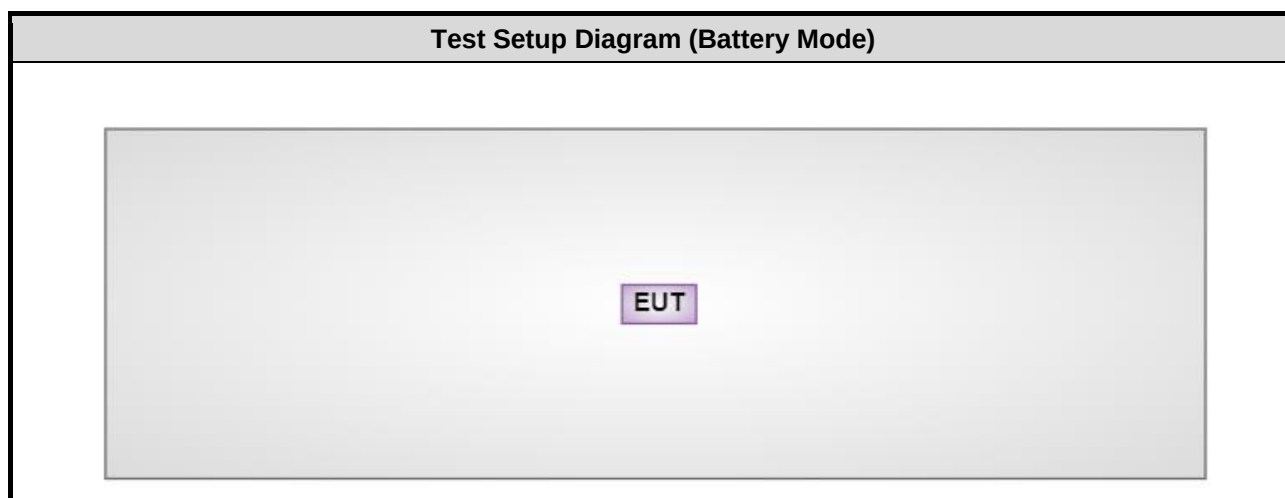



## 1.4 Test Equipment List and Calibration Data

|                                                                     |                               |                  |                   |                         |                          |
|---------------------------------------------------------------------|-------------------------------|------------------|-------------------|-------------------------|--------------------------|
| <b>Test Item</b>                                                    | Conducted Emission            |                  |                   |                         |                          |
| <b>Test Site</b>                                                    | Conduction room 1 / (CO01-WS) |                  |                   |                         |                          |
| <b>Tested Date</b>                                                  | May. 06, 2024                 |                  |                   |                         |                          |
| <b>Instrument</b>                                                   | <b>Brand</b>                  | <b>Model No.</b> | <b>Serial No.</b> | <b>Calibration Date</b> | <b>Calibration Until</b> |
| Receiver                                                            | R&S                           | ESR3             | 101658            | Feb. 23, 2024           | Feb. 22, 2025            |
| LISN                                                                | R&S                           | ENV216           | 101579            | May 09, 2023            | May 08, 2024             |
| RF Cable-CON                                                        | Woken                         | CFD200-NL        | CFD200-NL-001     | Oct. 11, 2023           | Oct. 10, 2024            |
| Measurement Software                                                | AUDIX                         | e3               | 6.120210k         | NA                      | NA                       |
| Note: Calibration Interval of instruments listed above is one year. |                               |                  |                   |                         |                          |

|                                                                     |                            |                        |                   |                         |                          |
|---------------------------------------------------------------------|----------------------------|------------------------|-------------------|-------------------------|--------------------------|
| <b>Test Item</b>                                                    | Radiated Emission          |                        |                   |                         |                          |
| <b>Test Site</b>                                                    | 966 chamber1 / (03CH01-WS) |                        |                   |                         |                          |
| <b>Tested Date</b>                                                  | Apr. 25, 2024              |                        |                   |                         |                          |
| <b>Instrument</b>                                                   | <b>Brand</b>               | <b>Model No.</b>       | <b>Serial No.</b> | <b>Calibration Date</b> | <b>Calibration Until</b> |
| Receiver                                                            | R&S                        | ESR3                   | 101657            | Mar. 05, 2024           | Mar. 04, 2025            |
| Spectrum Analyzer                                                   | R&S                        | FSV40                  | 101498            | Nov. 23, 2023           | Nov. 22, 2024            |
| Loop Antenna                                                        | R&S                        | HFH2-Z2                | 100330            | Oct. 31, 2023           | Oct. 30, 2024            |
| Bilog Antenna                                                       | SCHWARZBECK                | VULB9168               | VULB9168-522      | Jul. 31, 2023           | Jul. 30, 2024            |
| Horn Antenna 1G-18G                                                 | SCHWARZBECK                | BBHA 9120 D            | BBHA 9120 D 1096  | Nov. 27, 2023           | Nov. 26, 2024            |
| Horn Antenna 18G-40G                                                | SCHWARZBECK                | BBHA 9170              | BBHA 9170517      | Oct. 30, 2023           | Oct. 29, 2024            |
| Preamplifier                                                        | EMC                        | EMC02325               | 980225            | Jun. 28, 2023           | Jun. 27, 2024            |
| Preamplifier                                                        | EMC                        | EMC118A45SE            | 980898            | Jul. 14, 2023           | Jul. 13, 2024            |
| Preamplifier                                                        | EMC                        | EMC184045SE            | 980903            | Jul. 17, 2023           | Jul. 16, 2024            |
| Loop Antenna Cable                                                  | KOAX KABEL                 | 101354-BW              | 101354-BW         | Oct. 03, 2023           | Oct. 02, 2024            |
| LF cable 3M                                                         | Woken                      | CFD400NL-LW            | CFD400NL-001      | Oct. 03, 2023           | Oct. 02, 2024            |
| LF cable 11M                                                        | EMC                        | EMCCFD400-NW-N W-11000 | 200801            | Oct. 03, 2023           | Oct. 02, 2024            |
| LF cable 1M                                                         | EMC                        | EMCCFD400-NM-N M-1000  | 160502            | Oct. 03, 2023           | Oct. 02, 2024            |
| RF Cable                                                            | EMC                        | EMC104-35M-35M-8000    | 210920            | Oct. 03, 2023           | Oct. 02, 2024            |
| RF Cable                                                            | EMC                        | EMC104-35M-35M-3000    | 210922            | Oct. 03, 2023           | Oct. 02, 2024            |
| Attenuator                                                          | Pasternack                 | PE7005-10              | 10-1              | Oct. 05, 2023           | Oct. 04, 2024            |
| HIGHPASS FILTER 3.1-18G                                             | WHK                        | WHK3.1/18G-10SS        | 39                | Oct. 05, 2023           | Oct. 04, 2024            |
| Measurement Software                                                | Sporton                    | SENSE-15247_FS         | V5.11.16          | NA                      | NA                       |
| Measurement Software                                                | Sporton                    | SENSE-EMI              | V5.11.6           | NA                      | NA                       |
| Note: Calibration Interval of instruments listed above is one year. |                            |                        |                   |                         |                          |

|                                                                     |              |                  |                   |                         |                          |
|---------------------------------------------------------------------|--------------|------------------|-------------------|-------------------------|--------------------------|
| <b>Test Item</b>                                                    | RF Conducted |                  |                   |                         |                          |
| <b>Test Site</b>                                                    | (TH01-WS)    |                  |                   |                         |                          |
| <b>Tested Date</b>                                                  | May 11, 2024 |                  |                   |                         |                          |
| <b>Instrument</b>                                                   | <b>Brand</b> | <b>Model No.</b> | <b>Serial No.</b> | <b>Calibration Date</b> | <b>Calibration Until</b> |
| Spectrum Analyzer                                                   | R&S          | FSV40            | 101910            | Apr. 18, 2024           | Apr. 17, 2025            |
| Power Meter                                                         | Anritsu      | ML2495A          | 1241002           | Nov. 21, 2023           | Nov. 20, 2024            |
| Power Sensor                                                        | Anritsu      | MA2411B          | 1207366           | Nov. 21, 2023           | Nov. 20, 2024            |
| Attenuator                                                          | Pasternack   | PE7005-10        | 10-2              | Oct. 05, 2023           | Oct. 04, 2024            |
| Measurement Software                                                | Sporton      | SENSE-15247_FS   | V5.10.8           | NA                      | NA                       |
| Note: Calibration Interval of instruments listed above is one year. |              |                  |                   |                         |                          |

## 1.5 Test Standards

47 CFR FCC Part 15.247  
ANSI C63.10-2013

## 1.6 Reference Guidance

FCC KDB 558074 D01 15.247 Meas Guidance v05r02

## 1.7 Deviation from Test Standard and Measurement Procedure

None

## 1.8 Measurement Uncertainty

The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor ( $k=2$ )).

| Measurement Uncertainty        |                 |
|--------------------------------|-----------------|
| Parameters                     | Uncertainty     |
| Bandwidth                      | $\pm 34.130$ Hz |
| Conducted power                | $\pm 0.808$ dB  |
| Power density                  | $\pm 0.583$ dB  |
| Conducted emission             | $\pm 2.715$ dB  |
| AC conducted emission          | $\pm 2.92$ dB   |
| Unwanted Emission $\leq 1$ GHz | $\pm 3.41$ dB   |
| Unwanted Emission $> 1$ GHz    | $\pm 4.59$ dB   |

## 2 Test Configuration

### 2.1 Testing Facility

|                             |                                                                                        |
|-----------------------------|----------------------------------------------------------------------------------------|
| <b>Test Laboratory</b>      | International Certification Corporation                                                |
| <b>Test Site</b>            | CO01-WS, 03CH01-WS, TH01-WS                                                            |
| <b>Address of Test Site</b> | No.3-1, Lane 6, Wen San 3rd St., Kwei Shan Dist., Tao Yuan City 33381, Taiwan (R.O.C.) |

- FCC Designation No.: TW2732
- FCC site registration No.: 181692
- ISSED#: 10807A
- CAB identifier: TW2732

### 2.2 The Worst Test Modes and Channel Details

| Test item                                                                                                                                                                                                                                                                                                                                   | Modulation Mode              | Test Frequency (MHz)                 | Test Configuration |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|--------------------------------------|--------------------|
| AC Power Line Conducted Emissions                                                                                                                                                                                                                                                                                                           | Charging mode                | ---                                  | 2                  |
| Unwanted Emissions ≤ 1GHz                                                                                                                                                                                                                                                                                                                   | BT-LE(1Mbps)                 | 2402                                 | 1                  |
|                                                                                                                                                                                                                                                                                                                                             | Charging mode                | ---                                  | 2                  |
| Unwanted Emissions > 1GHz                                                                                                                                                                                                                                                                                                                   | BT-LE(1Mbps)                 | 2402, 2440, 2480                     | 1                  |
|                                                                                                                                                                                                                                                                                                                                             | BT-LE(2Mbps)                 | 2404, 2440, 2478                     |                    |
| Conducted Output Power<br>6dB bandwidth<br>Power spectral density                                                                                                                                                                                                                                                                           | BT-LE(1Mbps)<br>BT-LE(2Mbps) | 2402, 2440, 2480<br>2404, 2440, 2478 | 1                  |
| <b>NOTE:</b><br>1. The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The <b>X-plane</b> result was found as the worst case and was shown in this report.<br>2. The test configurations are listed as follows:<br>1) Mode 1: Battery mode<br>2) Mode 2: Charging mode |                              |                                      |                    |

### 3 Transmitter Test Results

#### 3.1 6dB and Occupied Bandwidth

##### 3.1.1 Limit of 6dB Bandwidth

The minimum 6dB bandwidth shall be at least 500 kHz.

##### 3.1.2 Test Procedures


###### 6dB Bandwidth

1. Set resolution bandwidth (RBW) = 100 kHz, Video bandwidth = 300 kHz.
2. Detector = Peak, Trace mode = max hold.
3. Sweep = auto couple, Allow the trace to stabilize.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

###### Occupied Bandwidth

1. Set resolution bandwidth (RBW) = 1% ~ 5 % of OBW, Video bandwidth = 3 x RBW
2. Detector = Sample, Trace mode = max hold.
3. Sweep = auto couple, Allow the trace to stabilize.
4. Use the OBW measurement function of spectrum analyzer to measure the occupied bandwidth.

##### 3.1.3 Test Setup



##### 3.1.4 Test Results

|                   |            |           |         |
|-------------------|------------|-----------|---------|
| Ambient Condition | 23°C / 63% | Tested By | Brad Wu |
|-------------------|------------|-----------|---------|

Refer to Appendix A.

## 3.2 Conducted Output Power

### 3.2.1 Limit of Conducted Output Power

Conducted power shall not exceed 1Watt.

Antenna gain  $\leq 6\text{dBi}$ , no any corresponding reduction is in output power limit.

### 3.2.2 Test Procedures

A broadband RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.

### 3.2.3 Test Setup



### 3.2.4 Test Results

|                   |            |           |         |
|-------------------|------------|-----------|---------|
| Ambient Condition | 23°C / 63% | Tested By | Brad Wu |
|-------------------|------------|-----------|---------|

Refer to Appendix B.

### 3.3 Power Spectral Density


#### 3.3.1 Limit of Power Spectral Density

Power spectral density shall not be greater than 8 dBm in any 3 kHz band.

#### 3.3.2 Test Procedures

1. Set the RBW = 3 kHz, VBW = 10 kHz.
2. Detector = Peak, Sweep time = auto couple.
3. Trace mode = max hold, allow trace to fully stabilize.
4. Use the peak marker function to determine the maximum amplitude level.

#### 3.3.3 Test Setup



#### 3.3.4 Test Results

|                   |            |           |         |
|-------------------|------------|-----------|---------|
| Ambient Condition | 23°C / 63% | Tested By | Brad Wu |
|-------------------|------------|-----------|---------|

Refer to Appendix C.

### 3.4 Unwanted Emissions in Restricted Frequency Bands

#### 3.4.1 Limit of Unwanted Emissions in Restricted Frequency Bands

| Restricted Band Emissions Limit |                       |                         |                      |
|---------------------------------|-----------------------|-------------------------|----------------------|
| Frequency Range (MHz)           | Field Strength (uV/m) | Field Strength (dBuV/m) | Measure Distance (m) |
| 0.009~0.490                     | 2400/F(kHz)           | 48.5 - 13.8             | 300                  |
| 0.490~1.705                     | 24000/F(kHz)          | 33.8 - 23               | 30                   |
| 1.705~30.0                      | 30                    | 29                      | 30                   |
| 30~88                           | 100                   | 40                      | 3                    |
| 88~216                          | 150                   | 43.5                    | 3                    |
| 216~960                         | 200                   | 46                      | 3                    |
| Above 960                       | 500                   | 54                      | 3                    |

**Note 1:**  
Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

**Note 2:**  
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

#### 3.4.2 Test Procedures


1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:


1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

### 3.4.3 Test Setup

#### Radiated Emissions below 1 GHz

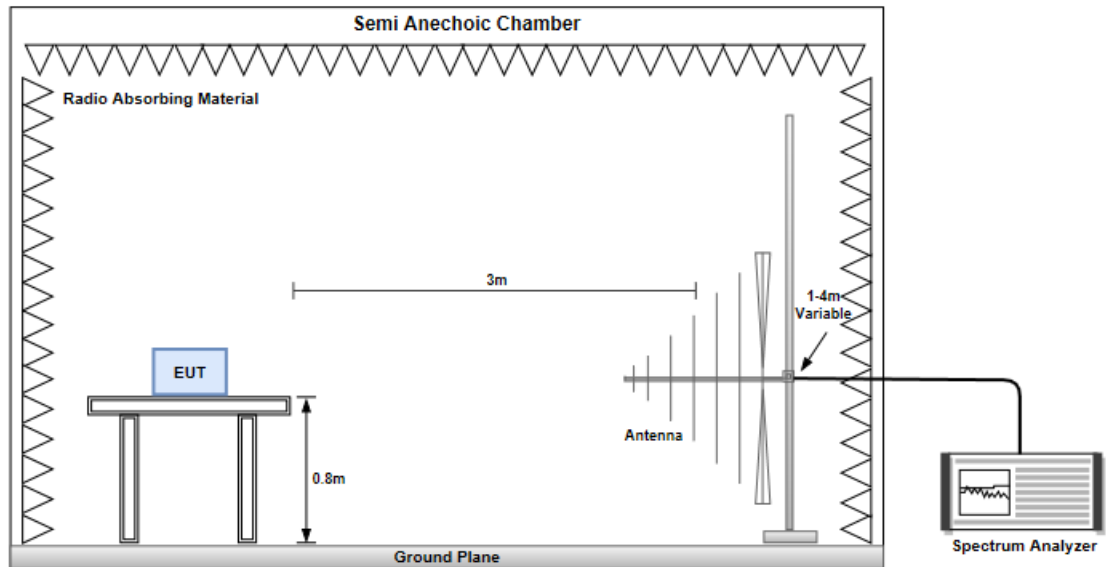

#### Radiated Emissions above 1 GHz

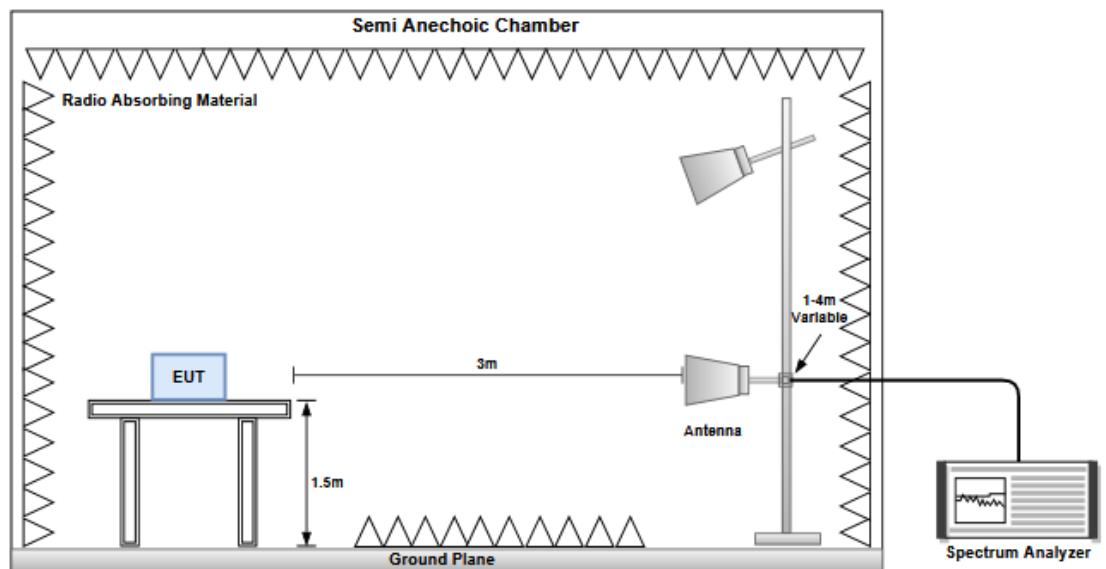

### 3.4.4 Test Results

Refer to Appendix D.



## 3.5 Emissions in non-restricted Frequency Bands

### 3.5.1 Emissions in non-restricted frequency bands limit

Peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz.

### 3.5.2 Test Procedures


#### Reference level measurement

1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Use the peak marker function to determine the maximum PSD level

#### Emission level measurement

1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Scan Frequency range is up to 25GHz
4. Use the peak marker function to determine the maximum amplitude level

### 3.5.3 Test Setup



### 3.5.4 Test Results

|                   |            |           |         |
|-------------------|------------|-----------|---------|
| Ambient Condition | 23°C / 63% | Tested By | Brad Wu |
|-------------------|------------|-----------|---------|

Refer to Appendix E.

### 3.6 AC Power Line Conducted Emissions

#### 3.6.1 Limit of AC Power Line Conducted Emissions


| Conducted Emissions Limit |            |           |
|---------------------------|------------|-----------|
| Frequency Emission (MHz)  | Quasi-Peak | Average   |
| 0.15-0.5                  | 66 - 56 *  | 56 - 46 * |
| 0.5-5                     | 56         | 46        |
| 5-30                      | 60         | 50        |

Note 1: \* Decreases with the logarithm of the frequency.

#### 3.6.2 Test Procedures

1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50  $\Omega$  LISN port.
3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
4. This measurement was performed with AC 120V/60Hz

#### 3.6.3 Test Setup

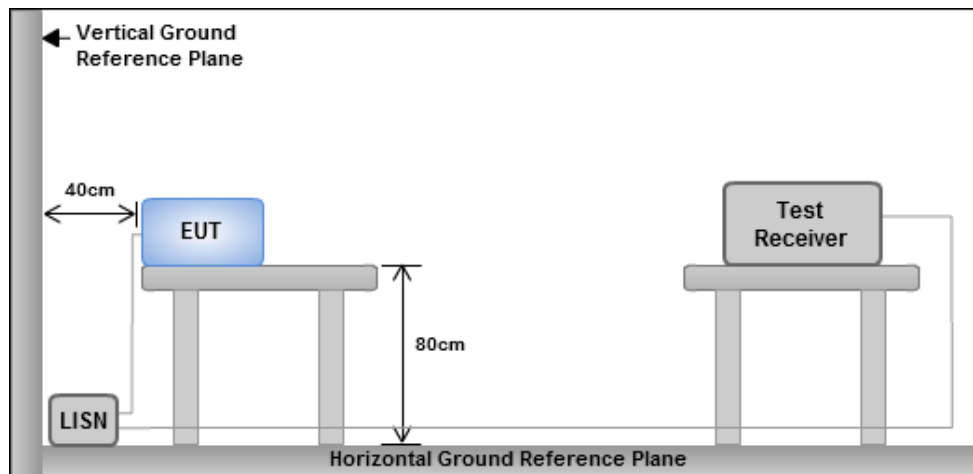

- Note: 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

#### 3.6.4 Test Results

Refer to Appendix F.

## 4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corporation (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <http://www.icertifi.com.tw>.

### **Linkou**

Tel: 886-2-2601-1640

No.30-2, Ding Fwu Tsuen, Lin Kou  
District, New Taipei City, Taiwan  
(R.O.C.)

### **Kwei Shan**

Tel: 886-3-271-8666

No.3-1, Lane 6, Wen San 3rd  
St., Kwei Shan Dist., Tao Yuan  
City 33381, Taiwan (R.O.C.)  
No.2-1, Lane 6, Wen San 3rd  
St., Kwei Shan Dist., Tao Yuan  
City 33381, Taiwan (R.O.C.)

### **Kwei Shan Site II**

Tel: 886-3-271-8640

No.14-1, Lane 19, Wen San 3rd  
St., Kwei Shan Dist., Tao Yuan  
City 33381, Taiwan (R.O.C.)

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

Email: ICC\_Service@icertifi.com.tw

==END==

**Summary**

| Mode          | Max-N dB<br>(Hz) | Max-OBW<br>(Hz) | ITU-Code | Min-N dB<br>(Hz) | Min-OBW |
|---------------|------------------|-----------------|----------|------------------|---------|
|               |                  |                 |          |                  | (Hz)    |
| 2.4-2.4835GHz | -                | -               | -        | -                | -       |
| BT-LE(1Mbps)  | 710k             | 1.037M          | 1M04F1D  | 695k             | 1.026M  |
| BT-LE(2Mbps)  | 1.17M            | 2.042M          | 2M04F1D  | 1.165M           | 2.034M  |

Max-N dB = Maximum 6dB down bandwidth; Max-OBW = Maximum 99% occupied bandwidth;  
Min-N dB = Minimum 6dB down bandwidth; Min-OBW = Minimum 99% occupied bandwidth

**Result**



| Mode         | Result | Limit<br>(Hz) | Port 1-N dB<br>(Hz) | Port 1-OBW<br>(Hz) |
|--------------|--------|---------------|---------------------|--------------------|
| BT-LE(1Mbps) | -      | -             | -                   | -                  |
| 2402MHz      | Pass   | 500k          | 710k                | 1.026M             |
| 2440MHz      | Pass   | 500k          | 695k                | 1.031M             |
| 2480MHz      | Pass   | 500k          | 703.75k             | 1.037M             |
| BT-LE(2Mbps) | -      | -             | -                   | -                  |
| 2404MHz      | Pass   | 500k          | 1.17M               | 2.034M             |
| 2440MHz      | Pass   | 500k          | 1.168M              | 2.038M             |
| 2478MHz      | Pass   | 500k          | 1.165M              | 2.042M             |

Port X-N dB = Port X 6dB down bandwidth;  
Port X-OBW = Port X 99% occupied bandwidth

## 2.4-2.4835GHz\_BT-LE(1Mbps)

EBW-DTS



### 2402MHz

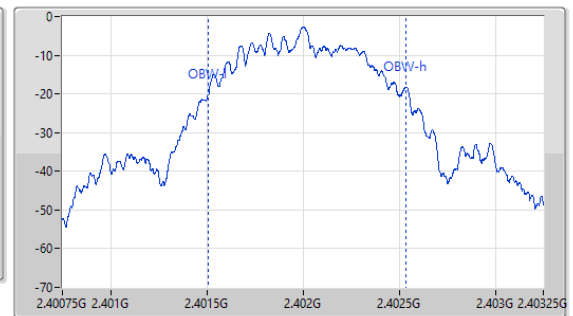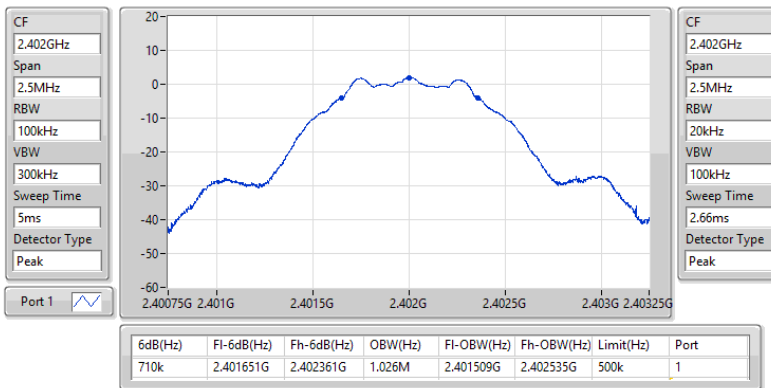

## 2.4-2.4835GHz\_BT-LE(1Mbps)

EBW-DTS



### 2440MHz

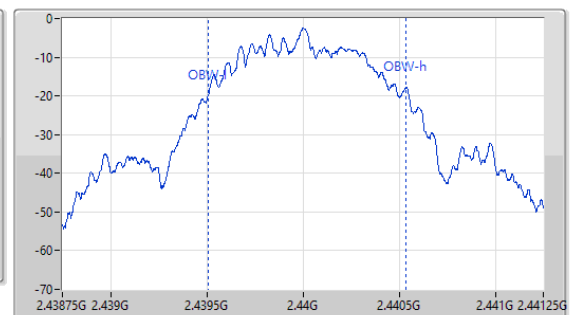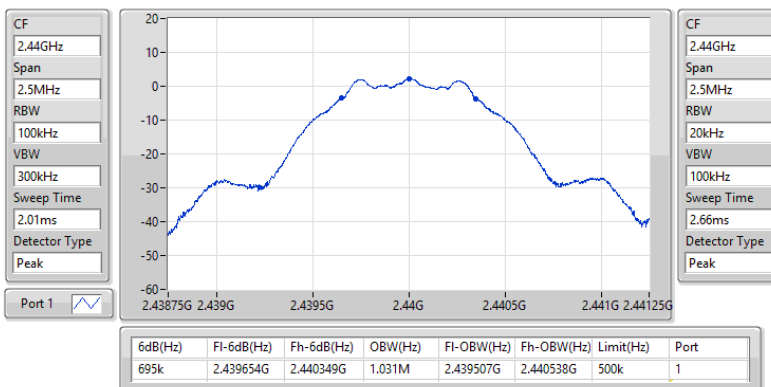

## 2.4-2.4835GHz\_BT-LE(1Mbps)

EBW-DTS



2480MHz

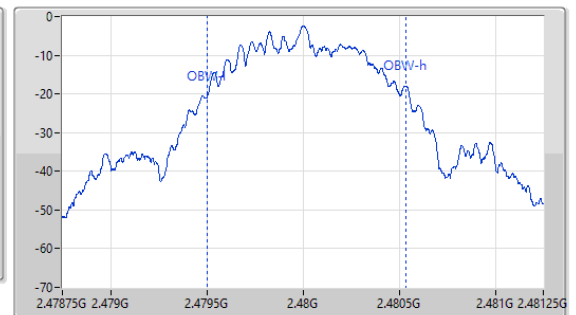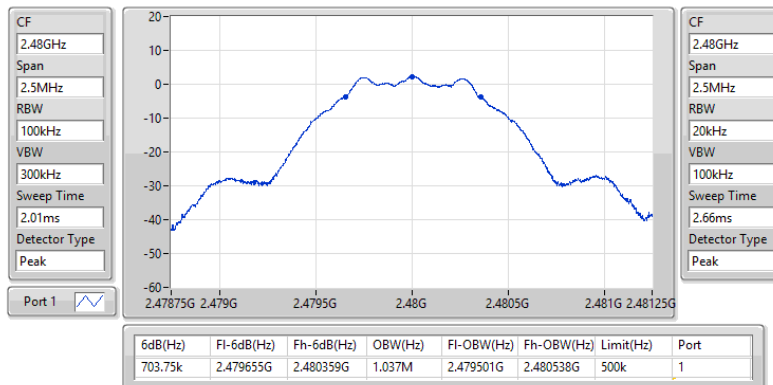

## 2.4-2.4835GHz\_BT-LE(2Mbps)

EBW-DTS



2404MHz

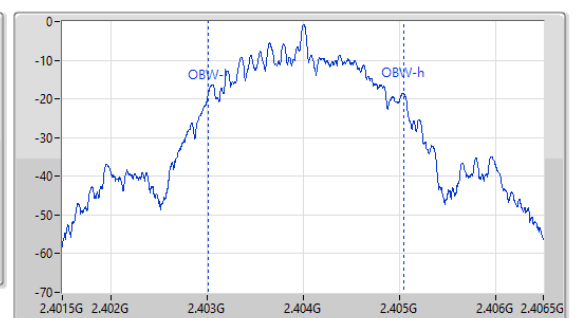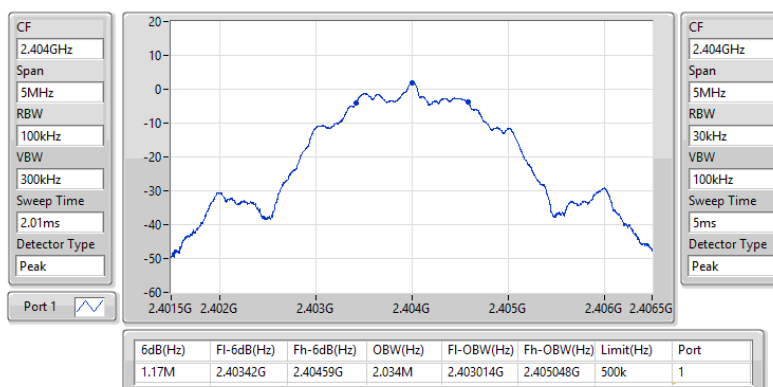

## 2.4-2.4835GHz\_BT-LE(2Mbps)

EBW-DTS



2440MHz

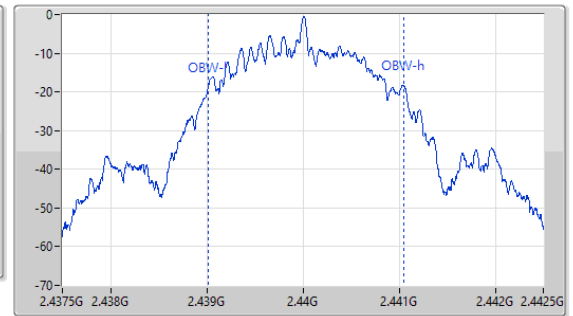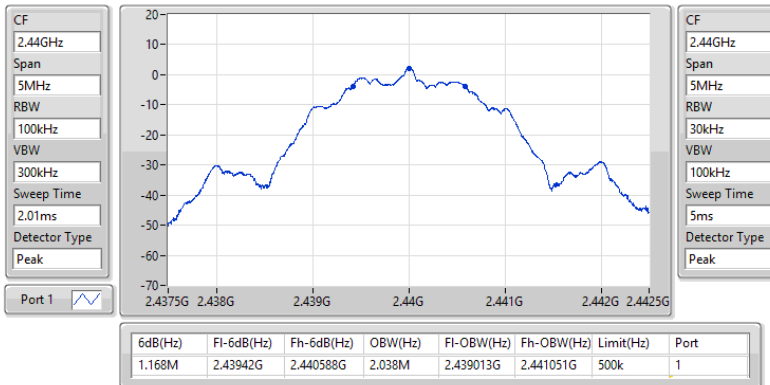

## 2.4-2.4835GHz\_BT-LE(2Mbps)

EBW-DTS

2478MHz

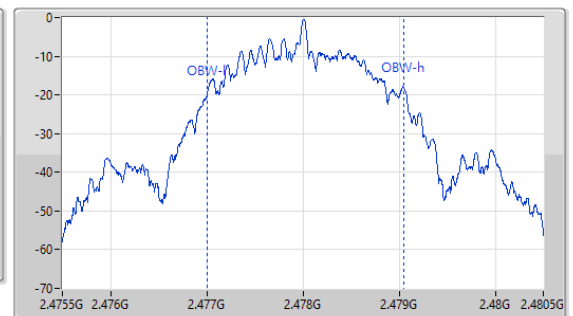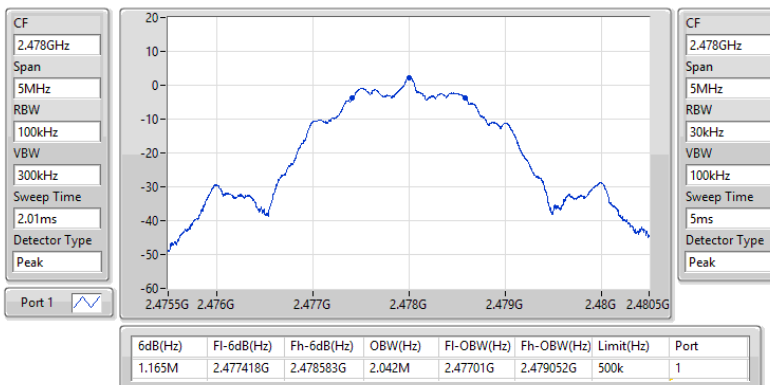

**Conducted Output Power (Peak)****Appendix B****Summary**

| Mode          | Total Power<br>(dBm) | Power<br>(W) |
|---------------|----------------------|--------------|
| 2.4-2.4835GHz | -                    | -            |
| BT-LE(1Mbps)  | 2.53                 | 0.00179      |
| BT-LE(2Mbps)  | 2.52                 | 0.00179      |

**Result**

| Mode         | Result | Antenna<br>Gain<br>(dBi) | Total Power<br>(dBm) | Power Limit<br>(dBm) | EIRP<br>(dBm) | EIRP Limit<br>(dBm) |
|--------------|--------|--------------------------|----------------------|----------------------|---------------|---------------------|
| BT-LE(1Mbps) | -      | -                        | -                    | -                    | -             | -                   |
| 2402MHz      | Pass   | -3.10                    | 2.53                 | 30.00                | -0.57         | 36.00               |
| 2440MHz      | Pass   | -3.10                    | 2.51                 | 30.00                | -0.59         | 36.00               |
| 2480MHz      | Pass   | -3.10                    | 2.48                 | 30.00                | -0.62         | 36.00               |
| BT-LE(2Mbps) | -      | -                        | -                    | -                    | -             | -                   |
| 2404MHz      | Pass   | -3.10                    | 2.52                 | 30.00                | -0.58         | 36.00               |
| 2440MHz      | Pass   | -3.10                    | 2.52                 | 30.00                | -0.58         | 36.00               |
| 2478MHz      | Pass   | -3.10                    | 2.51                 | 30.00                | -0.59         | 36.00               |





## Conducted Output Power (Average)

## Appendix B

### Summary

| Mode          | Total Power<br>(dBm) | Power<br>(W) |
|---------------|----------------------|--------------|
| 2.4-2.4835GHz | -                    | -            |
| BT-LE(1Mbps)  | 2.47                 | 0.00177      |
| BT-LE(2Mbps)  | 2.47                 | 0.00177      |

### Result

| Mode         | Result | Antenna<br>Gain<br>(dBi) | Total Power<br>(dBm) | Power Limit<br>(dBm) | EIRP<br>(dBm) | EIRP Limit<br>(dBm) |
|--------------|--------|--------------------------|----------------------|----------------------|---------------|---------------------|
| BT-LE(1Mbps) | -      | -                        | -                    | -                    | -             | -                   |
| 2402MHz      | Pass   | -3.10                    | 2.47                 | -                    | -0.63         | -                   |
| 2440MHz      | Pass   | -3.10                    | 2.45                 | -                    | -0.65         | -                   |
| 2480MHz      | Pass   | -3.10                    | 2.41                 | -                    | -0.69         | -                   |
| BT-LE(2Mbps) | -      | -                        | -                    | -                    | -             | -                   |
| 2404MHz      | Pass   | -3.10                    | 2.47                 | -                    | -0.63         | -                   |
| 2440MHz      | Pass   | -3.10                    | 2.46                 | -                    | -0.64         | -                   |
| 2478MHz      | Pass   | -3.10                    | 2.42                 | -                    | -0.68         | -                   |

Note: Average power is for reference only.

**Summary**

| Mode          | PD<br>(dBm/3kHz) |
|---------------|------------------|
| 2.4-2.4835GHz | -                |
| BT-LE(1Mbps)  | -14.06           |
| BT-LE(2Mbps)  | -15.53           |

**Result**

| Mode         | Result | Antenna<br>Gain<br>(dBi) | Power Density<br>(dBm/3kHz) | Power Density Limit<br>(dBm/3kHz) |
|--------------|--------|--------------------------|-----------------------------|-----------------------------------|
| BT-LE(1Mbps) | -      | -                        | -                           | -                                 |
| 2402MHz      | Pass   | -3.10                    | -14.23                      | 8.00                              |
| 2440MHz      | Pass   | -3.10                    | -14.06                      | 8.00                              |
| 2480MHz      | Pass   | -3.10                    | -14.06                      | 8.00                              |
| BT-LE(2Mbps) | -      | -                        | -                           | -                                 |
| 2404MHz      | Pass   | -3.10                    | -15.92                      | 8.00                              |
| 2440MHz      | Pass   | -3.10                    | -15.53                      | 8.00                              |
| 2478MHz      | Pass   | -3.10                    | -15.61                      | 8.00                              |




2.4-2.4835GHz\_BT-LE(1Mbps)

PSD

2402MHz

CF  
2.402GHz  
Span  
1.5MHz  
RBW  
3kHz  
VBW  
10kHz  
Sweep Time  
167ms  
Detector Type  
Peak

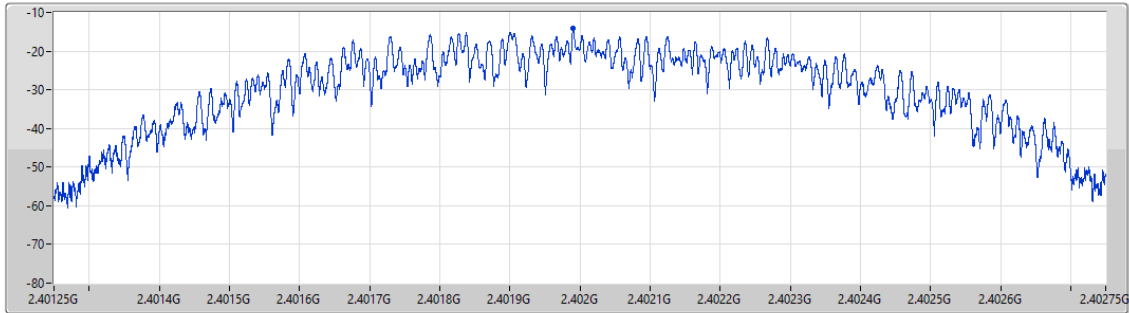

Port 1


| Sum       | PD        | Port 1    |
|-----------|-----------|-----------|
| (dBm/RBW) | (dBm/RBW) | (dBm/RBW) |
| -14.23    | -14.23    | -14.23    |

2.4-2.4835GHz\_BT-LE(1Mbps)

PSD

2440MHz

CF  
2.44GHz  
Span  
1.5MHz  
RBW  
3kHz  
VBW  
10kHz  
Sweep Time  
167ms  
Detector Type  
Peak

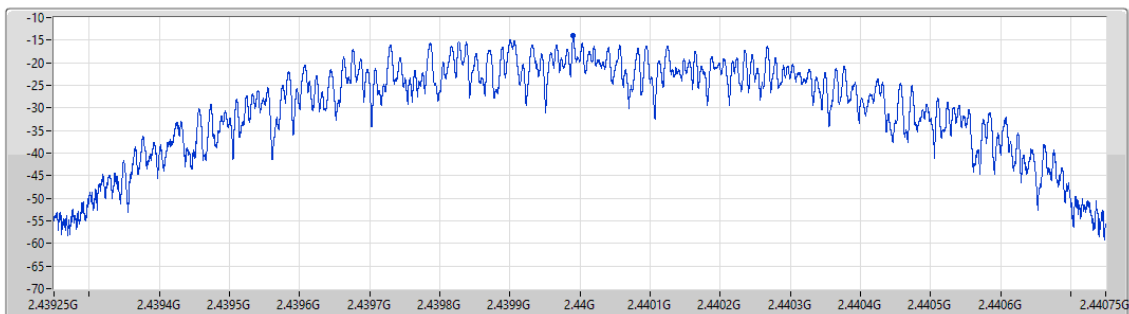

Port 1

| Sum       | PD        | Port 1    |
|-----------|-----------|-----------|
| (dBm/RBW) | (dBm/RBW) | (dBm/RBW) |
| -14.06    | -14.06    | -14.06    |




2.4-2.4835GHz\_BT-LE(1Mbps)

PSD

2480MHz

CF  
2.48GHz  
Span  
1.5MHz  
RBW  
3kHz  
VBW  
10kHz  
Sweep Time  
167ms  
Detector Type  
Peak

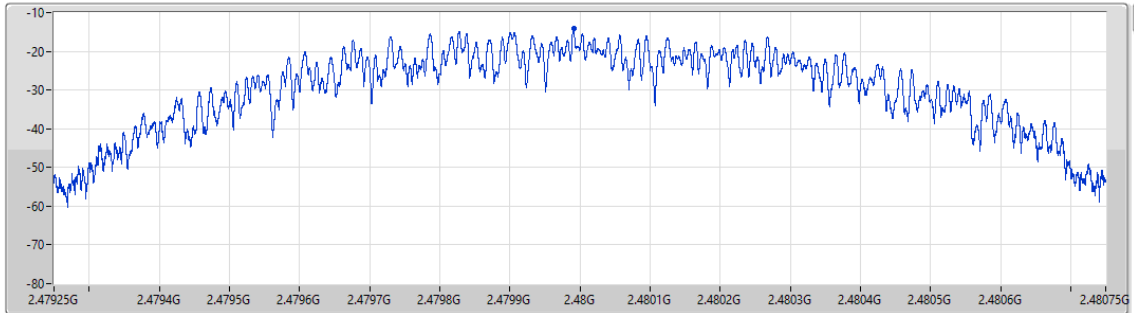

Port 1


| Sum       | PD        | Port 1    |
|-----------|-----------|-----------|
| (dBm/RBW) | (dBm/RBW) | (dBm/RBW) |
| -14.06    | -14.06    | -14.06    |

2.4-2.4835GHz\_BT-LE(2Mbps)

PSD

2404MHz

CF  
2.404GHz  
Span  
3MHz  
RBW  
3kHz  
VBW  
10kHz  
Sweep Time  
284ms  
Detector Type  
Peak

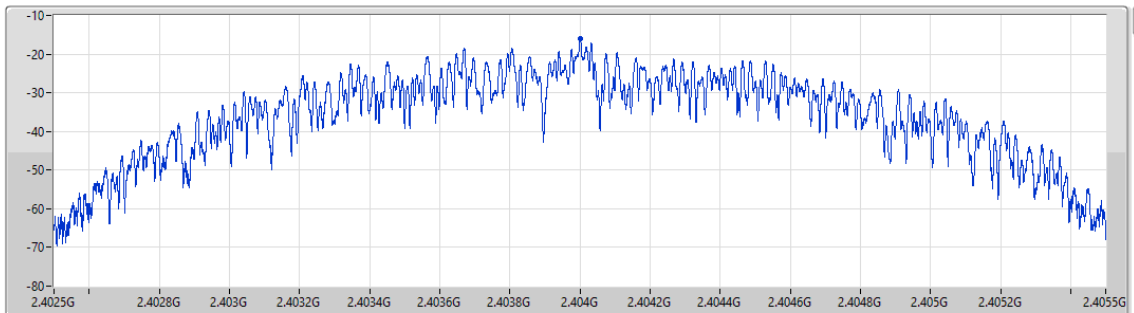

Port 1

| Sum       | PD        | Port 1    |
|-----------|-----------|-----------|
| (dBm/RBW) | (dBm/RBW) | (dBm/RBW) |
| -15.92    | -15.92    | -15.92    |




2.4-2.4835GHz\_BT-LE(2Mbps)

PSD

2440MHz

CF  
2.44GHz  
Span  
3MHz  
RBW  
3kHz  
VBW  
10kHz  
Sweep Time  
284ms  
Detector Type  
Peak

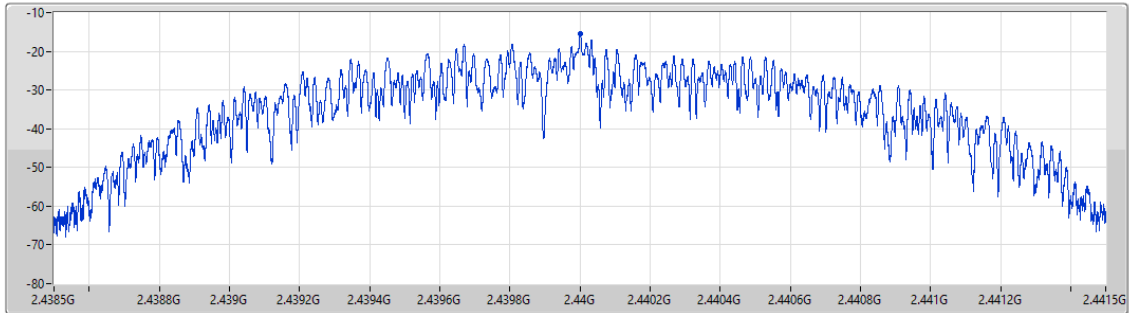

Port 1


| Sum       | PD        | Port 1    |
|-----------|-----------|-----------|
| (dBm/RBW) | (dBm/RBW) | (dBm/RBW) |
| -15.53    | -15.53    | -15.53    |

2.4-2.4835GHz\_BT-LE(2Mbps)

PSD

2478MHz

CF  
2.478GHz  
Span  
3MHz  
RBW  
3kHz  
VBW  
10kHz  
Sweep Time  
284ms  
Detector Type  
Peak

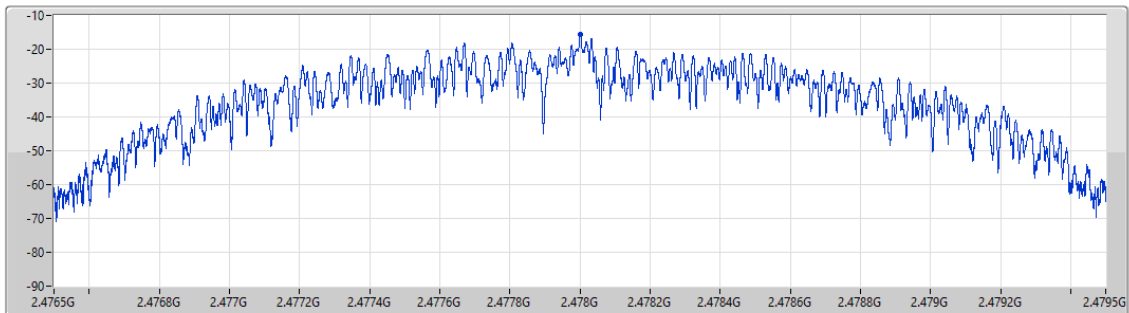

Port 1

| Sum       | PD        | Port 1    |
|-----------|-----------|-----------|
| (dBm/RBW) | (dBm/RBW) | (dBm/RBW) |
| -15.61    | -15.61    | -15.61    |




**Summary**

| Mode   | Result | Type | Freq (Hz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Condition |
|--------|--------|------|-----------|----------------|----------------|-------------|-----------|
| Mode 1 | Pass   | PK   | 80M       | 25.95          | 40.00          | -14.05      | Vertical  |
| Mode 2 | Pass   | PK   | 49.2M     | 30.85          | 40.00          | -9.15       | Vertical  |




Mode 1

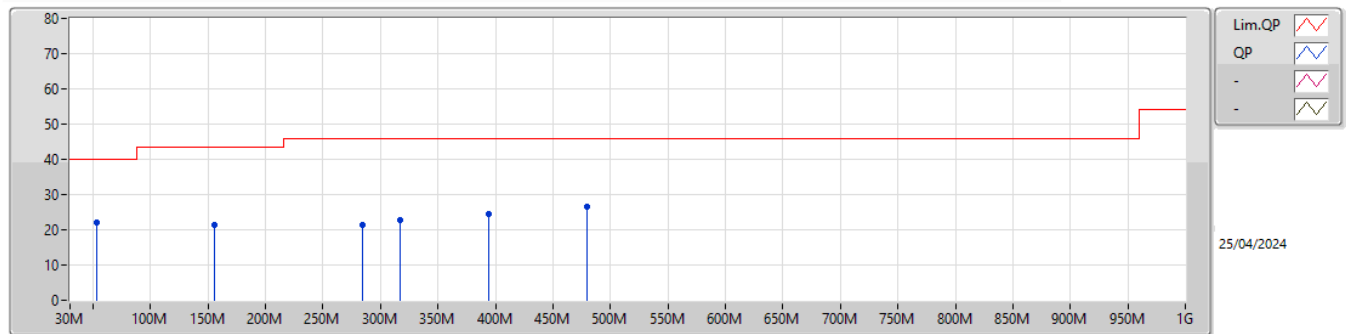

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB/m) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV/m) | AF<br>(dB/m) | CL<br>(dB) | PA<br>(dB) |  |  |
|------|--------------|-------------------|-------------------|----------------|------------------|-------------|------------|----------------|---------------|---------|-----------------|--------------|------------|------------|--|--|
| PK   | 52.9M        | 22.04             | 40.00             | -17.96         | -7.95            | 3           | Horizontal | -              | -             | -       | 29.99           | 19.50        | 0.65       | 28.10      |  |  |
| PK   | 155.6M       | 21.33             | 43.50             | -22.17         | -8.61            | 3           | Horizontal | -              | -             | -       | 29.94           | 18.64        | 1.16       | 28.41      |  |  |
| PK   | 284.9M       | 21.48             | 46.00             | -24.52         | -8.32            | 3           | Horizontal | -              | -             | -       | 29.80           | 18.49        | 1.61       | 28.42      |  |  |
| PK   | 317.4M       | 22.72             | 46.00             | -23.28         | -7.46            | 3           | Horizontal | -              | -             | -       | 30.18           | 19.25        | 1.69       | 28.40      |  |  |
| PK   | 394.3M       | 24.63             | 46.00             | -21.37         | -5.51            | 3           | Horizontal | -              | -             | -       | 30.14           | 20.99        | 1.84       | 28.34      |  |  |
| PK   | 479.7M       | 26.44             | 46.00             | -19.56         | -3.47            | 3           | Horizontal | -              | -             | -       | 29.91           | 22.69        | 2.10       | 28.26      |  |  |




Mode 1

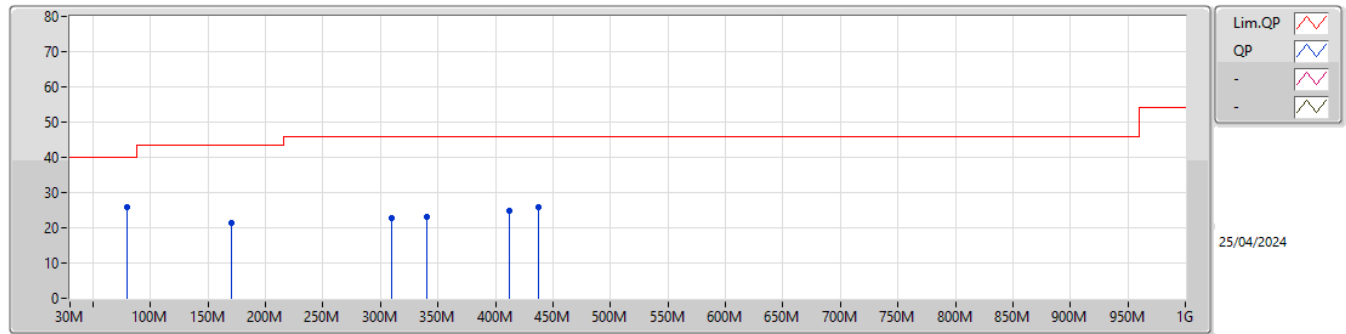

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB/m) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV/m) | AF<br>(dB/m) | CL<br>(dB) | PA<br>(dB) |  |  |
|------|--------------|-------------------|-------------------|----------------|------------------|-------------|-----------|----------------|---------------|---------|-----------------|--------------|------------|------------|--|--|
| PK   | 80M          | 25.95             | 40.00             | -14.05         | -13.52           | 3           | Vertical  | -              | -             | -       | 39.47           | 13.90        | 0.84       | 28.26      |  |  |
| PK   | 170M         | 21.50             | 43.50             | -22.00         | -9.39            | 3           | Vertical  | -              | -             | -       | 30.89           | 17.80        | 1.23       | 28.42      |  |  |
| PK   | 309.4M       | 22.60             | 46.00             | -23.40         | -7.75            | 3           | Vertical  | -              | -             | -       | 30.35           | 18.98        | 1.68       | 28.41      |  |  |
| PK   | 340.5M       | 22.94             | 46.00             | -23.06         | -7.05            | 3           | Vertical  | -              | -             | -       | 29.99           | 19.60        | 1.73       | 28.38      |  |  |
| PK   | 412.4M       | 24.80             | 46.00             | -21.20         | -4.99            | 3           | Vertical  | -              | -             | -       | 29.79           | 21.45        | 1.88       | 28.32      |  |  |
| PK   | 437.5M       | 25.76             | 46.00             | -20.24         | -4.29            | 3           | Vertical  | -              | -             | -       | 30.05           | 22.05        | 1.96       | 28.30      |  |  |




## Mode 2

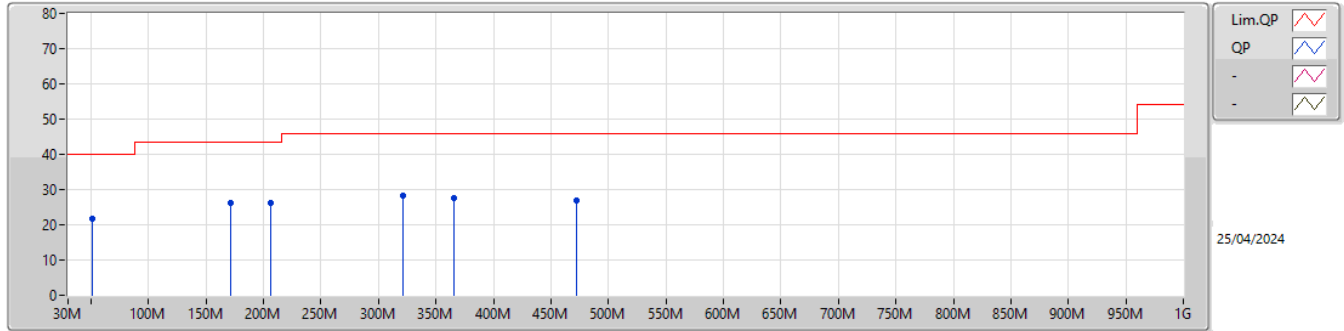

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB/m) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV/m) | AF<br>(dB/m) | CL<br>(dB) | PA<br>(dB) |  |  |
|------|--------------|-------------------|-------------------|----------------|------------------|-------------|------------|----------------|---------------|---------|-----------------|--------------|------------|------------|--|--|
| PK   | 51M          | 21.69             | 40.00             | -18.31         | -7.85            | 3           | Horizontal | -              | -             | -       | 29.54           | 19.60        | 0.64       | 28.09      |  |  |
| PK   | 171M         | 26.16             | 43.50             | -17.34         | -9.29            | 3           | Horizontal | -              | -             | -       | 35.45           | 17.90        | 1.23       | 28.42      |  |  |
| PK   | 206M         | 26.12             | 43.50             | -17.38         | -11.91           | 3           | Horizontal | -              | -             | -       | 38.03           | 15.18        | 1.35       | 28.44      |  |  |
| PK   | 320.8M       | 28.43             | 46.00             | -17.57         | -7.38            | 3           | Horizontal | -              | -             | -       | 35.81           | 19.32        | 1.70       | 28.40      |  |  |
| PK   | 365.4M       | 27.48             | 46.00             | -18.52         | -6.46            | 3           | Horizontal | -              | -             | -       | 33.94           | 20.12        | 1.78       | 28.36      |  |  |
| PK   | 472.1M       | 26.93             | 46.00             | -19.07         | -3.66            | 3           | Horizontal | -              | -             | -       | 30.59           | 22.54        | 2.07       | 28.27      |  |  |



Mode 2

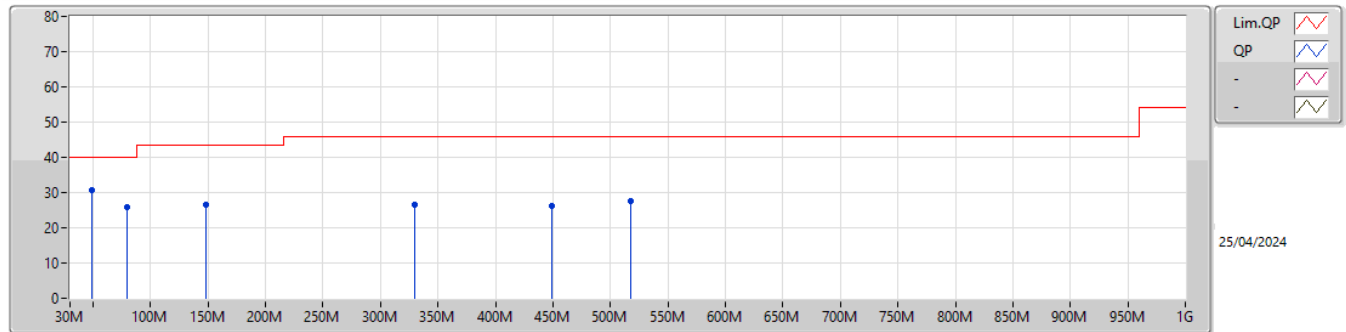

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB/m) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV/m) | AF<br>(dB/m) | CL<br>(dB) | PA<br>(dB) |  |  |
|------|--------------|-------------------|-------------------|----------------|------------------|-------------|-----------|----------------|---------------|---------|-----------------|--------------|------------|------------|--|--|
| PK   | 49.2M        | 30.85             | 40.00             | -9.15          | -7.87            | 3           | Vertical  | -              | -             | -       | 38.72           | 19.58        | 0.63       | 28.08      |  |  |
| PK   | 80M          | 25.94             | 40.00             | -14.06         | -13.52           | 3           | Vertical  | -              | -             | -       | 39.46           | 13.90        | 0.84       | 28.26      |  |  |
| PK   | 147.7M       | 26.45             | 43.50             | -17.05         | -8.81            | 3           | Vertical  | -              | -             | -       | 35.26           | 18.46        | 1.14       | 28.41      |  |  |
| PK   | 329.5M       | 26.68             | 46.00             | -19.32         | -7.19            | 3           | Vertical  | -              | -             | -       | 33.87           | 19.49        | 1.71       | 28.39      |  |  |
| PK   | 448.6M       | 26.14             | 46.00             | -19.86         | -4.10            | 3           | Vertical  | -              | -             | -       | 30.24           | 22.20        | 1.99       | 28.29      |  |  |
| PK   | 517.2M       | 27.64             | 46.00             | -18.36         | -2.63            | 3           | Vertical  | -              | -             | -       | 30.27           | 23.40        | 2.21       | 28.24      |  |  |




**Summary**

| Mode          | Result | Type | Freq (Hz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Dist (m) | Condition  | Azimuth (°) | Height (m) | Comments |
|---------------|--------|------|-----------|----------------|----------------|-------------|----------|------------|-------------|------------|----------|
| 2.4-2.4835GHz | -      | -    | -         | -              | -              | -           | -        | -          | -           | -          | -        |
| BT-LE(1Mbps)  | Pass   | PK   | 2.4835G   | 62.63          | 74.00          | -11.37      | 3        | Vertical   | 179         | 2.00       | -        |
| BT-LE(2Mbps)  | Pass   | AV   | 12.02G    | 41.77          | 54.00          | -12.23      | 3        | Horizontal | 216         | 1.00       | -        |

## 2.4-2.4835GHz\_BT-LE(1Mbps)


### 2402MHz\_TX

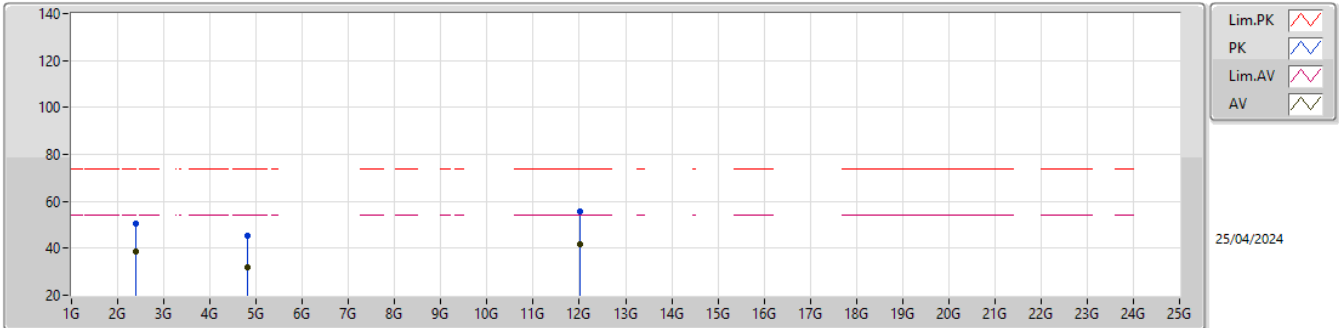

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| AV   | 2.39G        | 38.74             | 54.00             | -15.26         | 43.12         | 3           | Horizontal | 187            | 1.90          | -       | 27.60      | 4.95       | 36.93      |  |  |  |
| PK   | 2.39G        | 50.30             | 74.00             | -23.70         | 54.68         | 3           | Horizontal | 187            | 1.90          | -       | 27.60      | 4.95       | 36.93      |  |  |  |
| AV   | 4.804G       | 32.03             | 54.00             | -21.97         | 32.41         | 3           | Horizontal | 241            | 1.00          | -       | 31.29      | 6.85       | 38.52      |  |  |  |
| PK   | 4.804G       | 45.38             | 74.00             | -28.62         | 45.76         | 3           | Horizontal | 241            | 1.00          | -       | 31.29      | 6.85       | 38.52      |  |  |  |
| AV   | 12.01G       | 41.75             | 54.00             | -12.25         | 35.48         | 3           | Horizontal | 208            | 1.00          | -       | 39.20      | 10.02      | 42.95      |  |  |  |
| PK   | 12.01G       | 55.48             | 74.00             | -18.52         | 49.21         | 3           | Horizontal | 208            | 1.00          | -       | 39.20      | 10.02      | 42.95      |  |  |  |

## 2.4-2.4835GHz\_BT-LE(1Mbps)


### 2402MHz\_TX

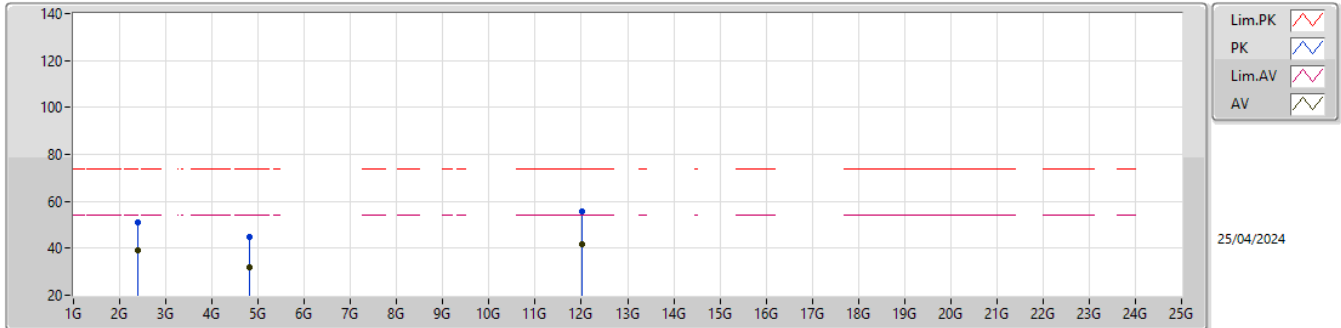

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| AV   | 2.39G        | 39.32             | 54.00             | -14.68         | 43.70         | 3           | Vertical  | 195            | 1.99          | -       | 27.60      | 4.95       | 36.93      |  |  |  |
| PK   | 2.39G        | 50.88             | 74.00             | -23.12         | 55.26         | 3           | Vertical  | 195            | 1.99          | -       | 27.60      | 4.95       | 36.93      |  |  |  |
| AV   | 4.804G       | 31.88             | 54.00             | -22.12         | 32.26         | 3           | Vertical  | 126            | 1.00          | -       | 31.29      | 6.85       | 38.52      |  |  |  |
| PK   | 4.804G       | 45.05             | 74.00             | -28.95         | 45.43         | 3           | Vertical  | 126            | 1.00          | -       | 31.29      | 6.85       | 38.52      |  |  |  |
| AV   | 12.01G       | 41.69             | 54.00             | -12.31         | 35.42         | 3           | Vertical  | 155            | 1.00          | -       | 39.20      | 10.02      | 42.95      |  |  |  |
| PK   | 12.01G       | 55.60             | 74.00             | -18.40         | 49.33         | 3           | Vertical  | 155            | 1.00          | -       | 39.20      | 10.02      | 42.95      |  |  |  |

## 2.4-2.4835GHz\_BT-LE(1Mbps)


### 2440MHz\_TX

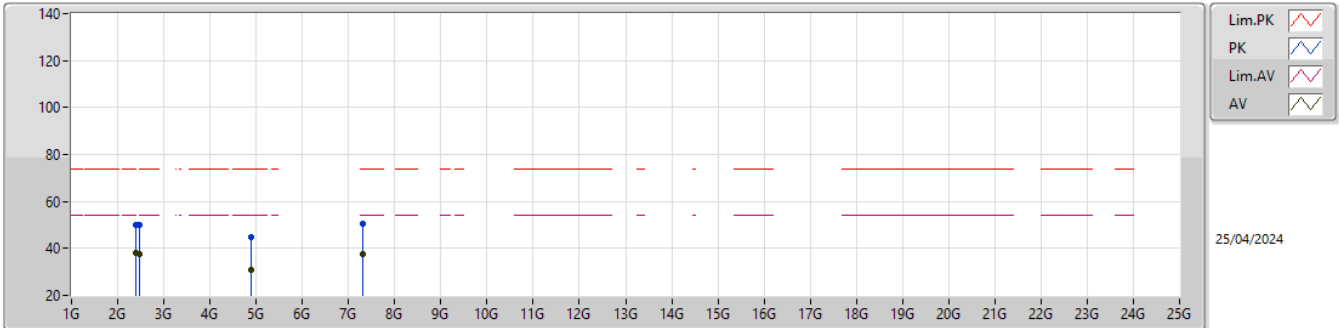

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| AV   | 2.39G        | 38.08             | 54.00             | -15.92         | 42.46         | 3           | Horizontal | 173            | 1.84          | -       | 27.60      | 4.95       | 36.93      |  |  |  |
| PK   | 2.39G        | 49.95             | 74.00             | -24.05         | 54.33         | 3           | Horizontal | 173            | 1.84          | -       | 27.60      | 4.95       | 36.93      |  |  |  |
| AV   | 2.4835G      | 37.76             | 54.00             | -16.24         | 42.51         | 3           | Horizontal | 173            | 1.84          | -       | 27.20      | 5.06       | 37.01      |  |  |  |
| PK   | 2.4835G      | 49.82             | 74.00             | -24.18         | 54.57         | 3           | Horizontal | 173            | 1.84          | -       | 27.20      | 5.06       | 37.01      |  |  |  |
| AV   | 4.88G        | 31.00             | 54.00             | -23.00         | 31.51         | 3           | Horizontal | 108            | 1.00          | -       | 31.14      | 6.92       | 38.57      |  |  |  |
| PK   | 4.88G        | 44.65             | 74.00             | -29.35         | 45.16         | 3           | Horizontal | 108            | 1.00          | -       | 31.14      | 6.92       | 38.57      |  |  |  |
| AV   | 7.32G        | 37.49             | 54.00             | -16.51         | 32.36         | 3           | Horizontal | 192            | 1.00          | -       | 36.16      | 8.43       | 39.46      |  |  |  |
| PK   | 7.32G        | 50.61             | 74.00             | -23.39         | 45.48         | 3           | Horizontal | 192            | 1.00          | -       | 36.16      | 8.43       | 39.46      |  |  |  |

## 2.4-2.4835GHz\_BT-LE(1Mbps)


### 2440MHz\_TX

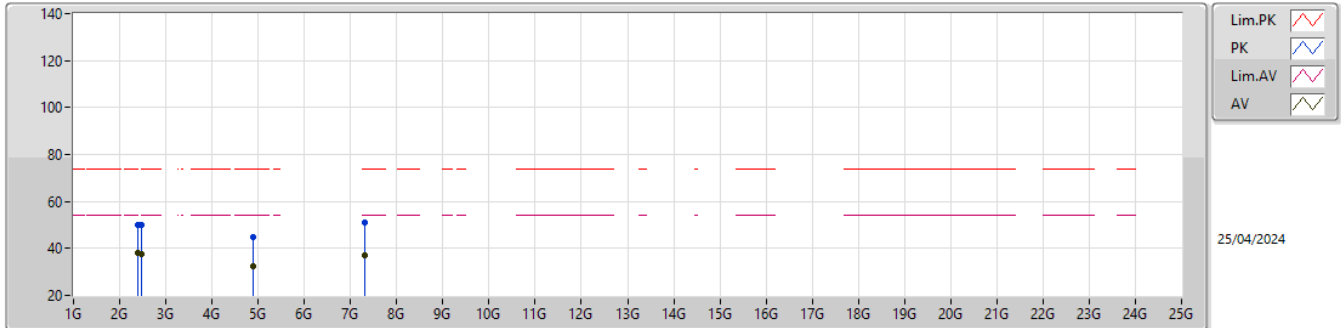

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| AV   | 2.39G        | 37.95             | 54.00             | -16.05         | 42.33         | 3           | Vertical  | 180            | 2.08          | -       | 27.60      | 4.95       | 36.93      |  |  |  |
| PK   | 2.39G        | 49.99             | 74.00             | -24.01         | 54.37         | 3           | Vertical  | 180            | 2.08          | -       | 27.60      | 4.95       | 36.93      |  |  |  |
| AV   | 2.4835G      | 37.70             | 54.00             | -16.30         | 42.45         | 3           | Vertical  | 180            | 2.08          | -       | 27.20      | 5.06       | 37.01      |  |  |  |
| PK   | 2.4835G      | 49.78             | 74.00             | -24.22         | 54.53         | 3           | Vertical  | 180            | 2.08          | -       | 27.20      | 5.06       | 37.01      |  |  |  |
| AV   | 4.88G        | 32.39             | 54.00             | -21.61         | 32.90         | 3           | Vertical  | 198            | 1.00          | -       | 31.14      | 6.92       | 38.57      |  |  |  |
| PK   | 4.88G        | 44.75             | 74.00             | -29.25         | 45.26         | 3           | Vertical  | 198            | 1.00          | -       | 31.14      | 6.92       | 38.57      |  |  |  |
| AV   | 7.32G        | 37.27             | 54.00             | -16.73         | 32.14         | 3           | Vertical  | 65             | 1.00          | -       | 36.16      | 8.43       | 39.46      |  |  |  |
| PK   | 7.32G        | 50.79             | 74.00             | -23.21         | 45.66         | 3           | Vertical  | 65             | 1.00          | -       | 36.16      | 8.43       | 39.46      |  |  |  |

## 2.4-2.4835GHz\_BT-LE(1Mbps)

### 2480MHz\_TX

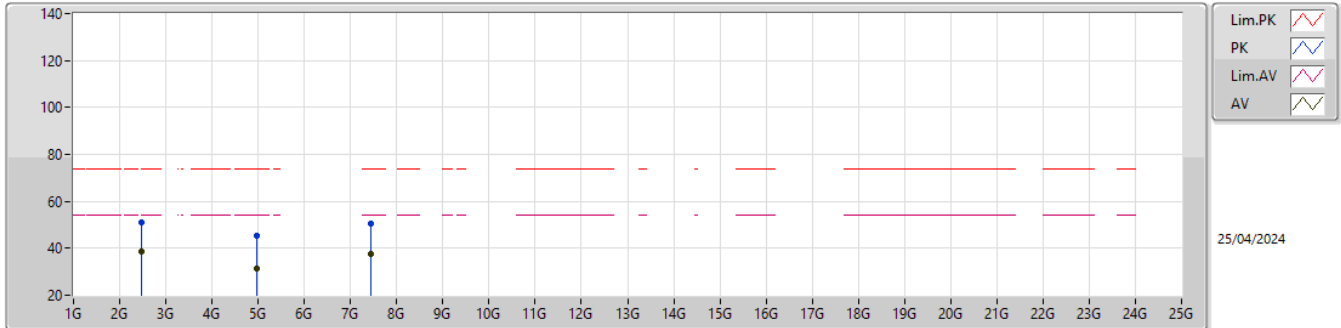


| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| AV   | 2.4835G      | 38.57             | 54.00             | -15.43         | 43.32         | 3           | Horizontal | 201            | 1.73          | -       | 27.20      | 5.06       | 37.01      |  |  |  |
| PK   | 2.4835G      | 50.89             | 74.00             | -23.11         | 55.64         | 3           | Horizontal | 201            | 1.73          | -       | 27.20      | 5.06       | 37.01      |  |  |  |
| AV   | 4.96G        | 31.21             | 54.00             | -22.79         | 31.48         | 3           | Horizontal | 188            | 1.00          | -       | 31.36      | 6.99       | 38.62      |  |  |  |
| PK   | 4.96G        | 45.21             | 74.00             | -28.79         | 45.48         | 3           | Horizontal | 188            | 1.00          | -       | 31.36      | 6.99       | 38.62      |  |  |  |
| AV   | 7.44G        | 37.34             | 54.00             | -16.66         | 32.11         | 3           | Horizontal | 261            | 1.00          | -       | 36.34      | 8.50       | 39.61      |  |  |  |
| PK   | 7.44G        | 50.49             | 74.00             | -23.51         | 45.26         | 3           | Horizontal | 261            | 1.00          | -       | 36.34      | 8.50       | 39.61      |  |  |  |



## 2.4-2.4835GHz\_BT-LE(1Mbps)


### 2480MHz\_TX

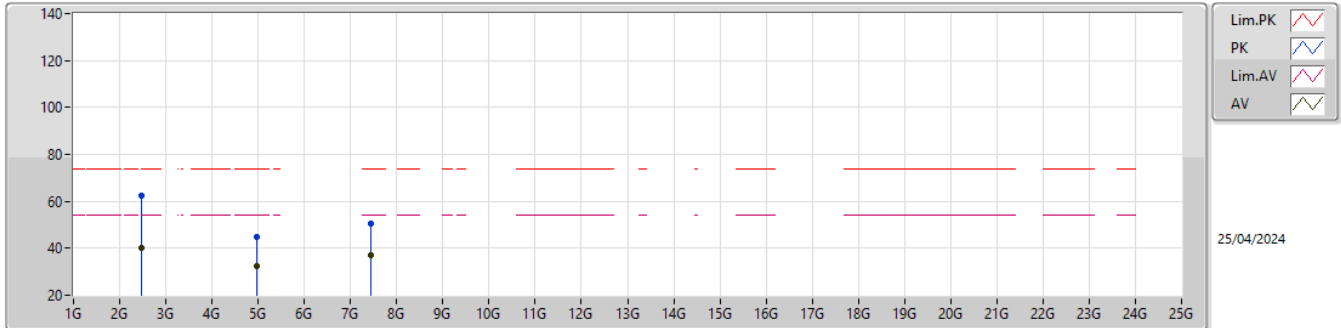

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| AV   | 2.4835G      | 40.41             | 54.00             | -13.59         | 45.16         | 3           | Vertical  | 179            | 2.00          | -       | 27.20      | 5.06       | 37.01      |  |  |  |
| PK   | 2.4835G      | 62.63             | 74.00             | -11.37         | 67.38         | 3           | Vertical  | 179            | 2.00          | -       | 27.20      | 5.06       | 37.01      |  |  |  |
| AV   | 4.96G        | 32.57             | 54.00             | -21.43         | 32.84         | 3           | Vertical  | 251            | 1.00          | -       | 31.36      | 6.99       | 38.62      |  |  |  |
| PK   | 4.96G        | 45.06             | 74.00             | -28.94         | 45.33         | 3           | Vertical  | 251            | 1.00          | -       | 31.36      | 6.99       | 38.62      |  |  |  |
| AV   | 7.44G        | 37.24             | 54.00             | -16.76         | 32.01         | 3           | Vertical  | 143            | 1.00          | -       | 36.34      | 8.50       | 39.61      |  |  |  |
| PK   | 7.44G        | 50.50             | 74.00             | -23.50         | 45.27         | 3           | Vertical  | 143            | 1.00          | -       | 36.34      | 8.50       | 39.61      |  |  |  |

## 2.4-2.4835GHz\_BT-LE(2Mbps)


### 2404MHz\_TX

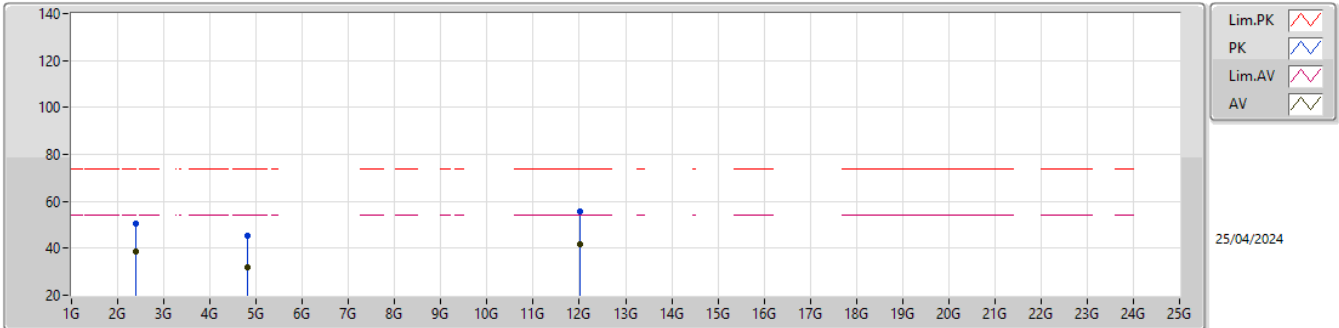

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|--|--|--|--|
| AV   | 2.39G        | 38.78             | 54.00             | -15.22         | 43.16         | 3           | Horizontal | 187            | 2.33          | -       | 27.60      | 4.95       | 36.93      |  |  |  |  |
| PK   | 2.39G        | 50.28             | 74.00             | -23.72         | 54.66         | 3           | Horizontal | 187            | 2.33          | -       | 27.60      | 4.95       | 36.93      |  |  |  |  |
| AV   | 4.808G       | 31.83             | 54.00             | -22.17         | 32.21         | 3           | Horizontal | 188            | 1.00          | -       | 31.28      | 6.86       | 38.52      |  |  |  |  |
| PK   | 4.808G       | 45.28             | 74.00             | -28.72         | 45.66         | 3           | Horizontal | 188            | 1.00          | -       | 31.28      | 6.86       | 38.52      |  |  |  |  |
| AV   | 12.02G       | 41.77             | 54.00             | -12.23         | 35.51         | 3           | Horizontal | 216            | 1.00          | -       | 39.20      | 10.02      | 42.96      |  |  |  |  |
| PK   | 12.02G       | 55.64             | 74.00             | -18.36         | 49.38         | 3           | Horizontal | 216            | 1.00          | -       | 39.20      | 10.02      | 42.96      |  |  |  |  |

## 2.4-2.4835GHz\_BT-LE(2Mbps)


### 2404MHz\_TX

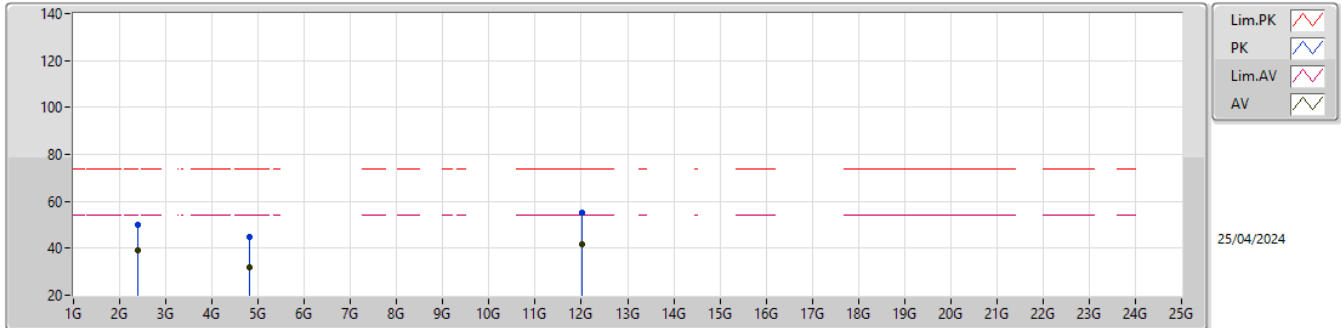

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| AV   | 2.39G        | 39.06             | 54.00             | -14.94         | 43.44         | 3           | Vertical  | 178            | 1.96          | -       | 27.60      | 4.95       | 36.93      |  |  |  |
| PK   | 2.39G        | 49.88             | 74.00             | -24.12         | 54.26         | 3           | Vertical  | 178            | 1.96          | -       | 27.60      | 4.95       | 36.93      |  |  |  |
| AV   | 4.808G       | 31.78             | 54.00             | -22.22         | 32.16         | 3           | Vertical  | 156            | 1.00          | -       | 31.28      | 6.86       | 38.52      |  |  |  |
| PK   | 4.808G       | 44.88             | 74.00             | -29.12         | 45.26         | 3           | Vertical  | 156            | 1.00          | -       | 31.28      | 6.86       | 38.52      |  |  |  |
| AV   | 12.02G       | 41.69             | 54.00             | -12.31         | 35.43         | 3           | Vertical  | 277            | 1.00          | -       | 39.20      | 10.02      | 42.96      |  |  |  |
| PK   | 12.02G       | 55.42             | 74.00             | -18.58         | 49.16         | 3           | Vertical  | 277            | 1.00          | -       | 39.20      | 10.02      | 42.96      |  |  |  |

## 2.4-2.4835GHz\_BT-LE(2Mbps)


### 2440MHz\_TX

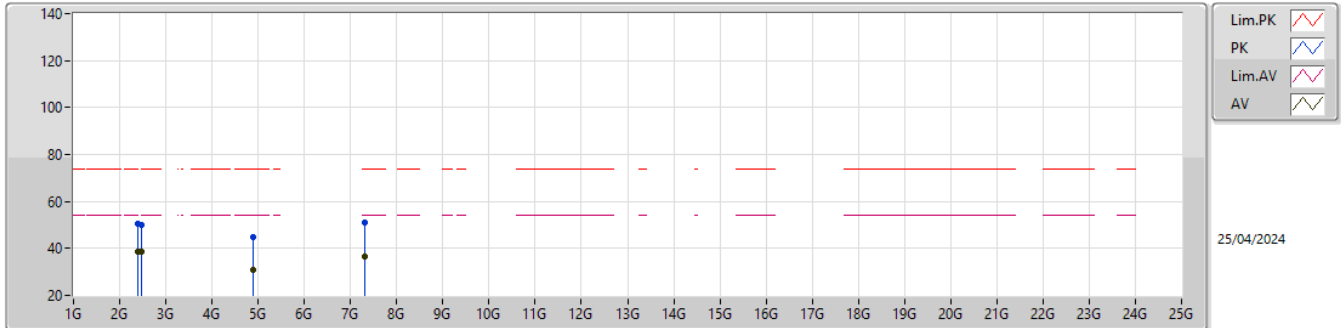

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| AV   | 2.39G        | 38.73             | 54.00             | -15.27         | 43.11         | 3           | Horizontal | 201            | 2.37          | -       | 27.60      | 4.95       | 36.93      |  |  |  |
| PK   | 2.39G        | 50.30             | 74.00             | -23.70         | 54.68         | 3           | Horizontal | 201            | 2.37          | -       | 27.60      | 4.95       | 36.93      |  |  |  |
| AV   | 2.4835G      | 38.52             | 54.00             | -15.48         | 43.27         | 3           | Horizontal | 201            | 2.37          | -       | 27.20      | 5.06       | 37.01      |  |  |  |
| PK   | 2.4835G      | 49.96             | 74.00             | -24.04         | 54.71         | 3           | Horizontal | 201            | 2.37          | -       | 27.20      | 5.06       | 37.01      |  |  |  |
| AV   | 4.88G        | 30.76             | 54.00             | -23.24         | 31.27         | 3           | Horizontal | 177            | 1.00          | -       | 31.14      | 6.92       | 38.57      |  |  |  |
| PK   | 4.88G        | 45.06             | 74.00             | -28.94         | 45.57         | 3           | Horizontal | 177            | 1.00          | -       | 31.14      | 6.92       | 38.57      |  |  |  |
| AV   | 7.32G        | 36.71             | 54.00             | -17.29         | 31.58         | 3           | Horizontal | 254            | 1.00          | -       | 36.16      | 8.43       | 39.46      |  |  |  |
| PK   | 7.32G        | 50.89             | 74.00             | -23.11         | 45.76         | 3           | Horizontal | 254            | 1.00          | -       | 36.16      | 8.43       | 39.46      |  |  |  |

## 2.4-2.4835GHz\_BT-LE(2Mbps)


### 2440MHz\_TX

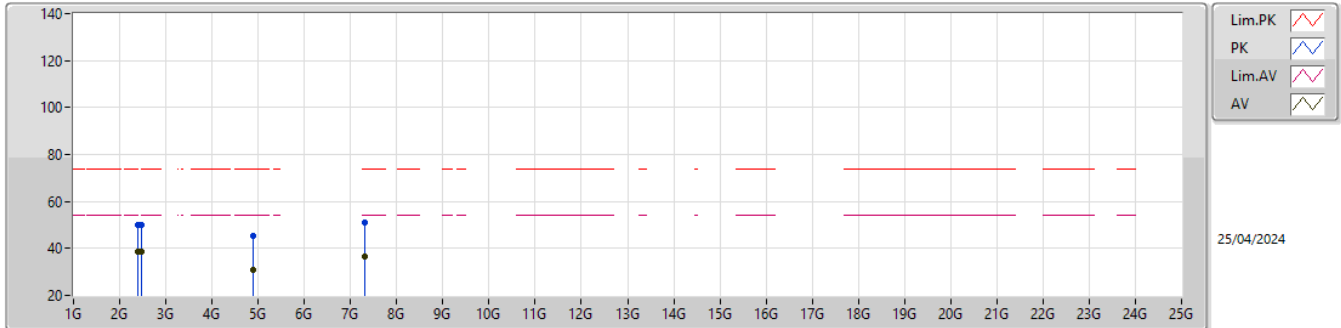

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| AV   | 2.39G        | 38.78             | 54.00             | -15.22         | 43.16         | 3           | Vertical  | 188            | 2.06          | -       | 27.60      | 4.95       | 36.93      |  |  |  |
| PK   | 2.39G        | 50.13             | 74.00             | -23.87         | 54.51         | 3           | Vertical  | 188            | 2.06          | -       | 27.60      | 4.95       | 36.93      |  |  |  |
| AV   | 2.4835G      | 38.52             | 54.00             | -15.48         | 43.27         | 3           | Vertical  | 188            | 2.06          | -       | 27.20      | 5.06       | 37.01      |  |  |  |
| PK   | 2.4835G      | 49.83             | 74.00             | -24.17         | 54.58         | 3           | Vertical  | 188            | 2.06          | -       | 27.20      | 5.06       | 37.01      |  |  |  |
| AV   | 4.88G        | 30.96             | 54.00             | -23.04         | 31.47         | 3           | Vertical  | 123            | 1.00          | -       | 31.14      | 6.92       | 38.57      |  |  |  |
| PK   | 4.88G        | 45.15             | 74.00             | -28.85         | 45.66         | 3           | Vertical  | 123            | 1.00          | -       | 31.14      | 6.92       | 38.57      |  |  |  |
| AV   | 7.32G        | 36.77             | 54.00             | -17.23         | 31.64         | 3           | Vertical  | 257            | 1.00          | -       | 36.16      | 8.43       | 39.46      |  |  |  |
| PK   | 7.32G        | 51.02             | 74.00             | -22.98         | 45.89         | 3           | Vertical  | 257            | 1.00          | -       | 36.16      | 8.43       | 39.46      |  |  |  |

## 2.4-2.4835GHz\_BT-LE(2Mbps)


### 2478MHz\_TX

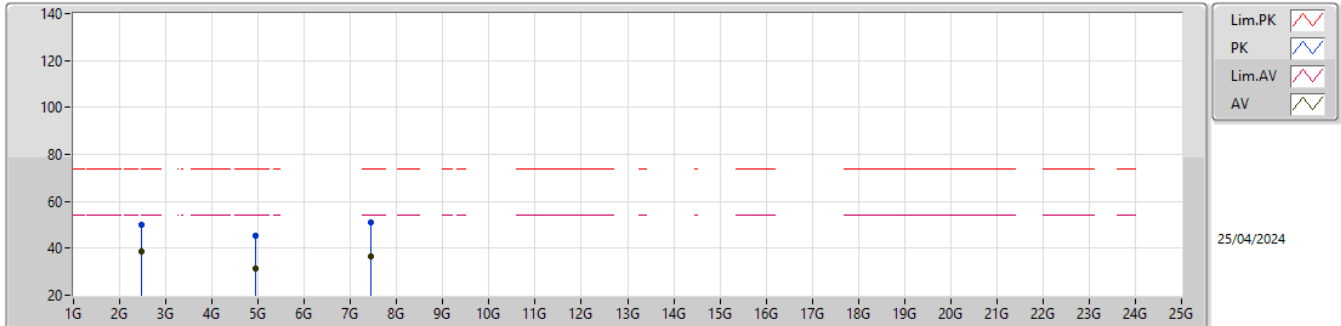

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|------------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| AV   | 2.4835G      | 38.73             | 54.00             | -15.27         | 43.48         | 3           | Horizontal | 206            | 2.35          | -       | 27.20      | 5.06       | 37.01      |  |  |  |
| PK   | 2.4835G      | 49.81             | 74.00             | -24.19         | 54.56         | 3           | Horizontal | 206            | 2.35          | -       | 27.20      | 5.06       | 37.01      |  |  |  |
| AV   | 4.956G       | 31.19             | 54.00             | -22.81         | 31.48         | 3           | Horizontal | 143            | 1.00          | -       | 31.34      | 6.99       | 38.62      |  |  |  |
| PK   | 4.956G       | 45.30             | 74.00             | -28.70         | 45.59         | 3           | Horizontal | 143            | 1.00          | -       | 31.34      | 6.99       | 38.62      |  |  |  |
| AV   | 7.434G       | 36.78             | 54.00             | -17.22         | 31.58         | 3           | Horizontal | 116            | 1.00          | -       | 36.30      | 8.50       | 39.60      |  |  |  |
| PK   | 7.434G       | 50.87             | 74.00             | -23.13         | 45.67         | 3           | Horizontal | 116            | 1.00          | -       | 36.30      | 8.50       | 39.60      |  |  |  |

## 2.4-2.4835GHz\_BT-LE(2Mbps)

### 2478MHz\_TX

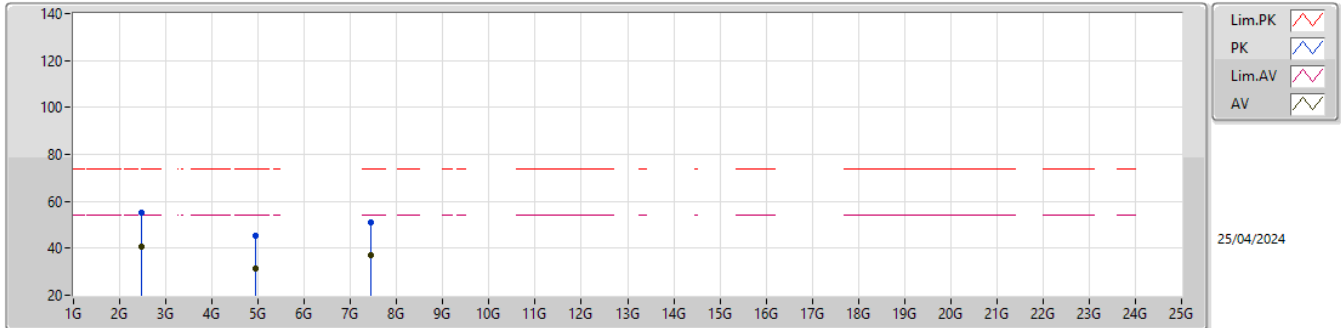


| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Raw<br>(dBuV) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |  |  |  |
|------|--------------|-------------------|-------------------|----------------|---------------|-------------|-----------|----------------|---------------|---------|------------|------------|------------|--|--|--|
| AV   | 2.4835G      | 40.47             | 54.00             | -13.53         | 45.22         | 3           | Vertical  | 159            | 1.99          | -       | 27.20      | 5.06       | 37.01      |  |  |  |
| PK   | 2.4835G      | 55.28             | 74.00             | -18.72         | 60.03         | 3           | Vertical  | 159            | 1.99          | -       | 27.20      | 5.06       | 37.01      |  |  |  |
| AV   | 4.956G       | 31.22             | 54.00             | -22.78         | 31.51         | 3           | Vertical  | 201            | 1.00          | -       | 31.34      | 6.99       | 38.62      |  |  |  |
| PK   | 4.956G       | 45.28             | 74.00             | -28.72         | 45.57         | 3           | Vertical  | 201            | 1.00          | -       | 31.34      | 6.99       | 38.62      |  |  |  |
| AV   | 7.434G       | 36.86             | 54.00             | -17.14         | 31.66         | 3           | Vertical  | 172            | 1.00          | -       | 36.30      | 8.50       | 39.60      |  |  |  |
| PK   | 7.434G       | 50.92             | 74.00             | -23.08         | 45.72         | 3           | Vertical  | 172            | 1.00          | -       | 36.30      | 8.50       | 39.60      |  |  |  |



2.4-2.4835GHz\_BT-LE(1Mbps)

CSEndB-DTS


2402MHz

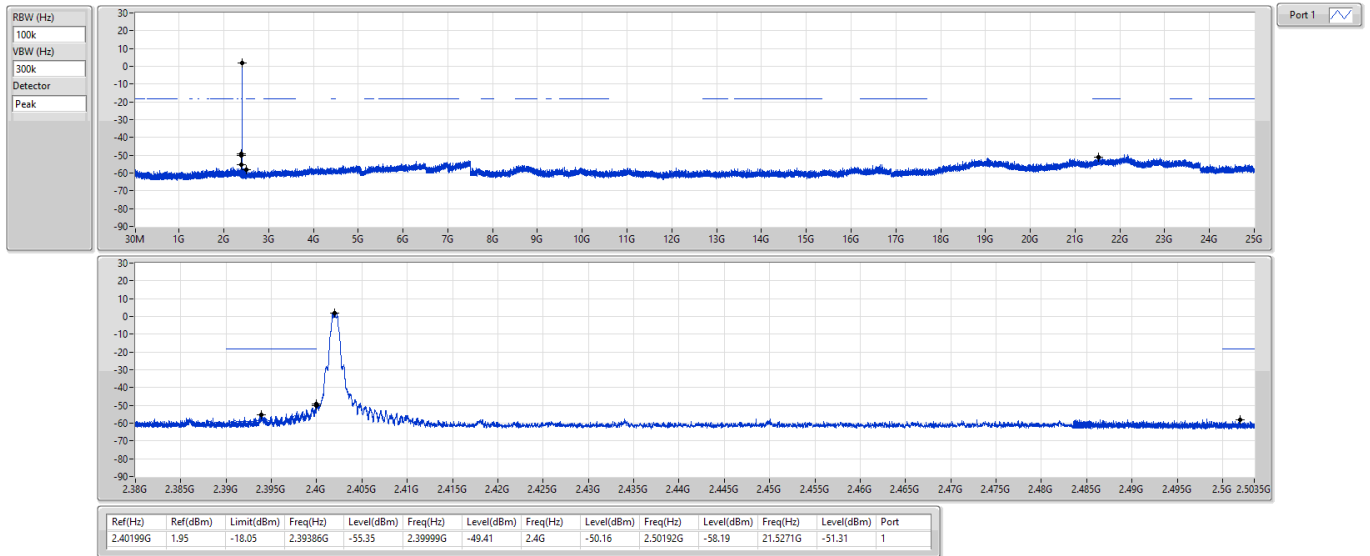

2.4-2.4835GHz\_BT-LE(1Mbps)

CSEndB-DTS

2440MHz

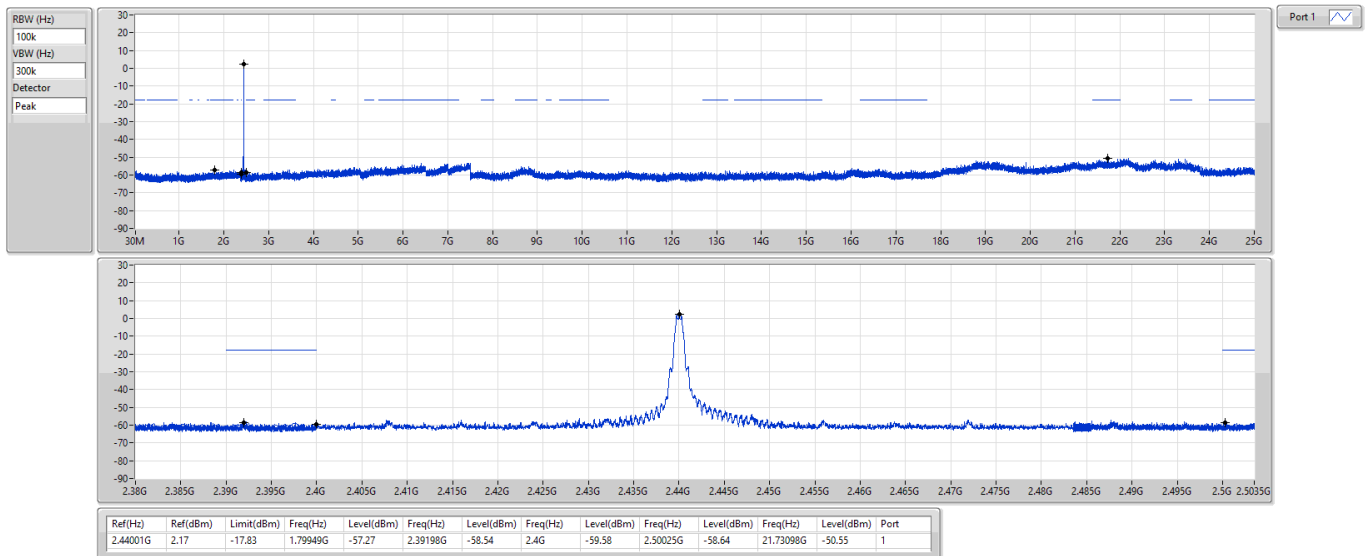




2.4-2.4835GHz\_BT-LE(1Mbps)

CSEndB-DTS


2480MHz

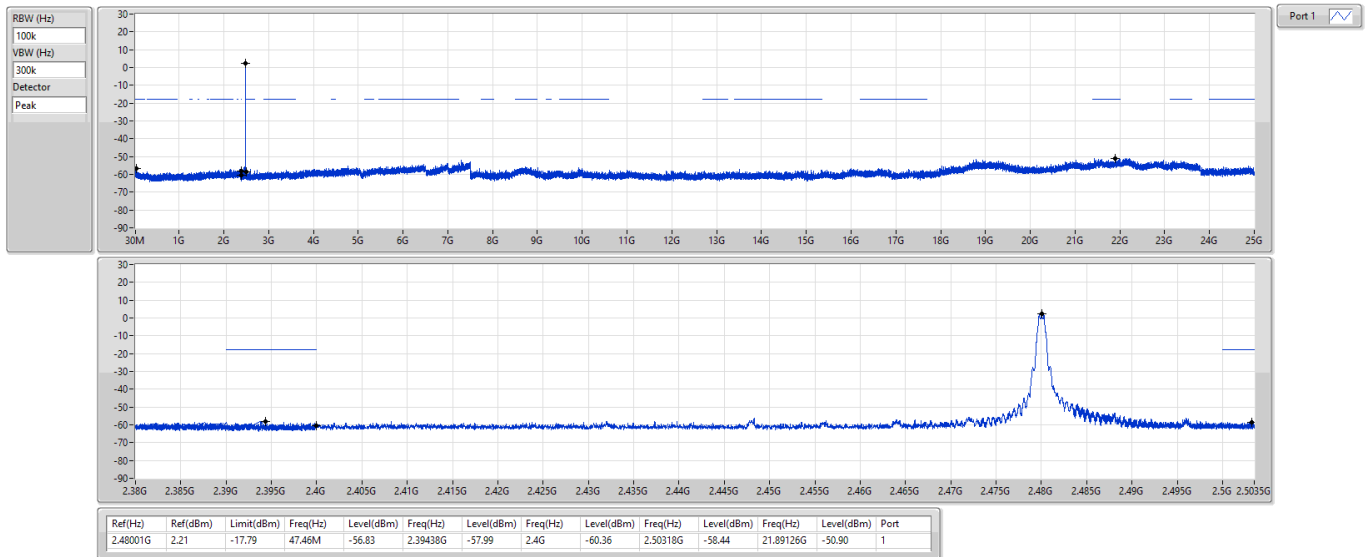

2.4-2.4835GHz\_BT-LE(2Mbps)

CSEndB-DTS


2404MHz

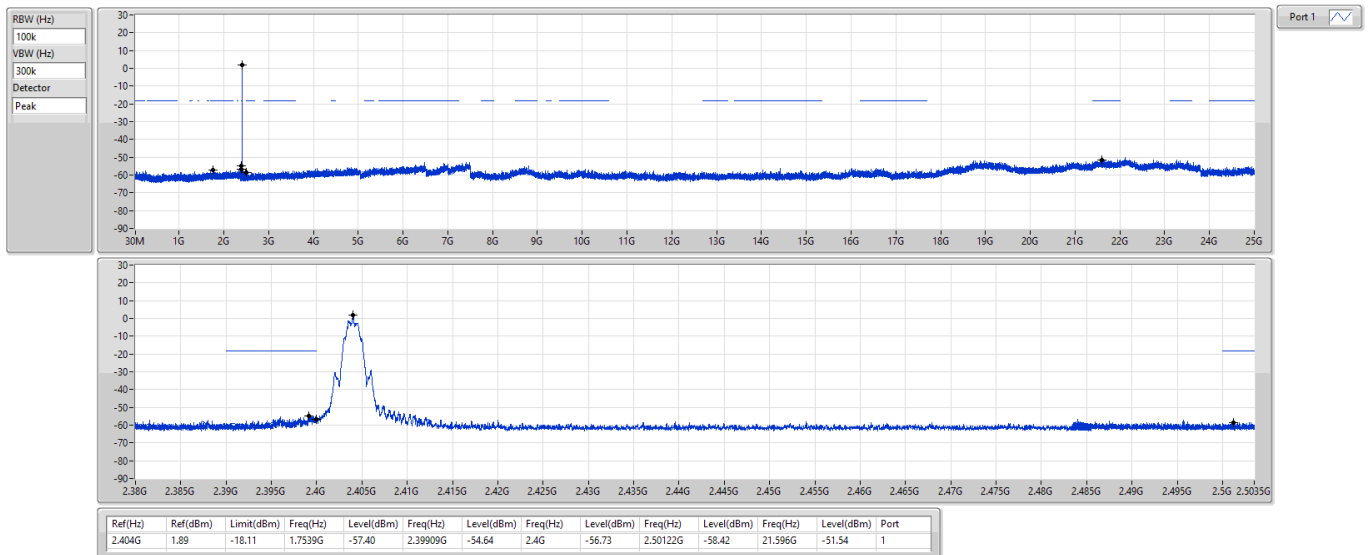

2.4-2.4835GHz\_BT-LE(2Mbps)

CSEndB-DTS


2440MHz

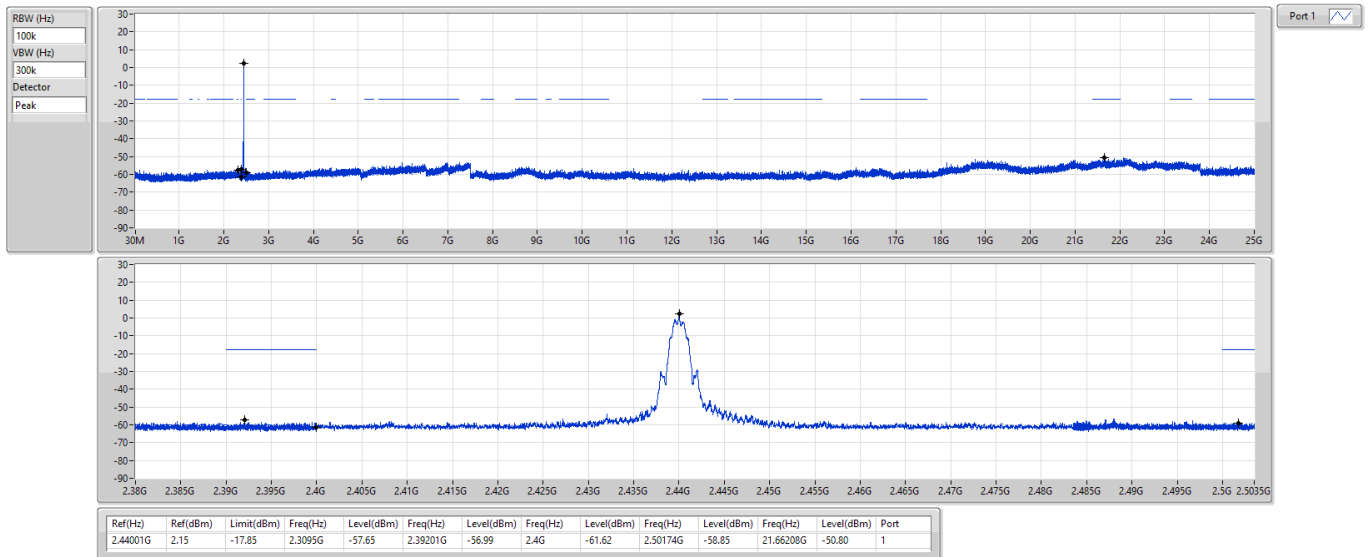

2.4-2.4835GHz\_BT-LE(2Mbps)

CSEndB-DTS

2478MHz

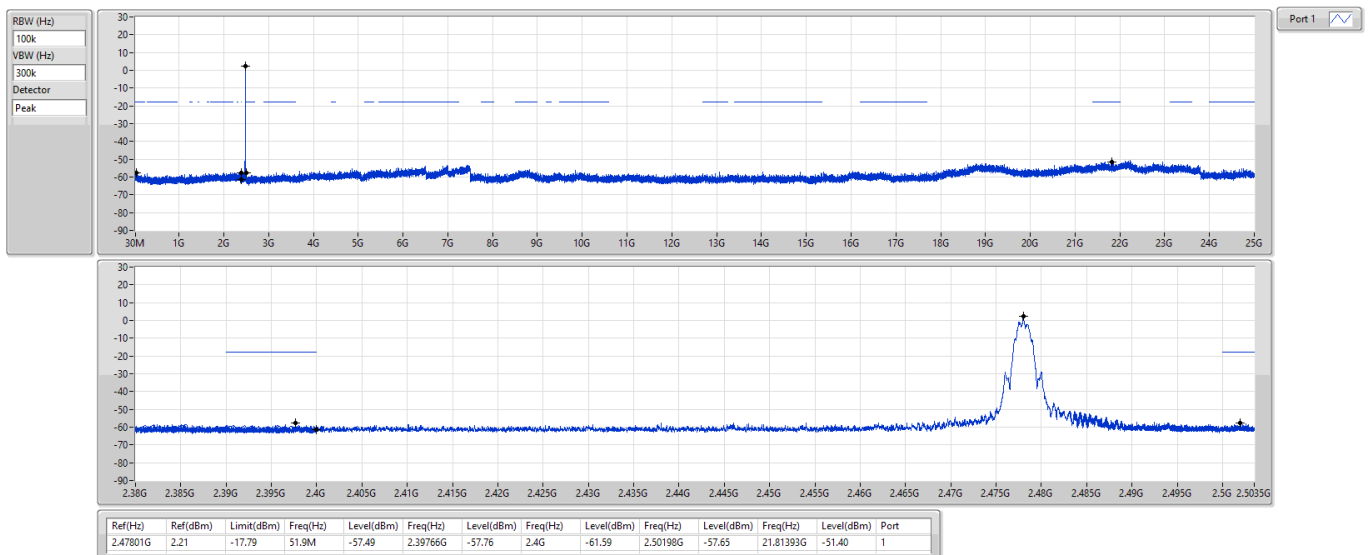



|                 |               |
|-----------------|---------------|
| Modulation Mode | Charging Mode |
| Power Phase     | Line          |

Test by : Joe Liao      Temperature: 23°C      Humidity: 63%

Level (dBuV)

Frequency (MHz)

|     | Freq<br>MHz | Level<br>dBuV | Limit<br>Line<br>dBuV | Over<br>Limit<br>dB | Read<br>Level<br>dBuV | Factor<br>dB | Cable<br>loss<br>dB | Aux<br>dB | Remark  |
|-----|-------------|---------------|-----------------------|---------------------|-----------------------|--------------|---------------------|-----------|---------|
| 1   | 0.159       | 21.73         | 55.52                 | -33.79              | 11.81                 | 9.63         | 0.08                | 0.21      | Average |
| 2   | 0.159       | 41.77         | 65.52                 | -23.75              | 31.85                 | 9.63         | 0.08                | 0.21      | QP      |
| 3   | 0.249       | 18.13         | 51.78                 | -33.65              | 8.16                  | 9.62         | 0.07                | 0.28      | Average |
| 4   | 0.249       | 37.55         | 61.78                 | -24.23              | 27.58                 | 9.62         | 0.07                | 0.28      | QP      |
| 5   | 0.267       | 15.68         | 51.20                 | -35.52              | 5.71                  | 9.62         | 0.07                | 0.28      | Average |
| 6   | 0.267       | 35.54         | 61.20                 | -25.66              | 25.57                 | 9.62         | 0.07                | 0.28      | QP      |
| 7   | 0.322       | 12.45         | 49.66                 | -37.21              | 2.46                  | 9.62         | 0.07                | 0.30      | Average |
| 8   | 0.322       | 31.04         | 59.66                 | -28.62              | 21.05                 | 9.62         | 0.07                | 0.30      | QP      |
| 9   | 0.466       | 22.52         | 46.58                 | -24.06              | 12.48                 | 9.62         | 0.08                | 0.34      | Average |
| 10  | 0.466       | 36.22         | 56.58                 | -20.36              | 26.18                 | 9.62         | 0.08                | 0.34      | QP      |
| 11  | 0.484       | 23.67         | 46.27                 | -22.60              | 13.63                 | 9.62         | 0.08                | 0.34      | Average |
| 12* | 0.484       | 38.16         | 56.27                 | -18.11              | 28.12                 | 9.62         | 0.08                | 0.34      | QP      |

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).  
2: Over Limit (dB) = Level (dBuV) - Limit Line (dBuV).



|                 |               |
|-----------------|---------------|
| Modulation Mode | Charging Mode |
| Power Phase     | Neutral       |

Test by : Joe Liao      Temperature: 23°C      Humidity: 63%

Level (dBuV)

Frequency (MHz)

|    | Freq<br>MHz | Level<br>dBuV | Limit<br>dBuV | Over<br>Limit<br>dB | Read<br>Level<br>dBuV | Factor<br>dB | Cable<br>loss<br>dB | Aux<br>dB | Remark  |
|----|-------------|---------------|---------------|---------------------|-----------------------|--------------|---------------------|-----------|---------|
| 1  | 0.258       | 22.19         | 51.51         | -29.32              | 12.29                 | 9.63         | 0.07                | 0.20      | Average |
| 2  | 0.258       | 35.49         | 61.51         | -26.02              | 25.59                 | 9.63         | 0.07                | 0.20      | QP      |
| 3  | 0.456       | 26.35         | 46.76         | -20.41              | 16.39                 | 9.62         | 0.08                | 0.26      | Average |
| 4  | 0.456       | 38.13         | 56.76         | -18.63              | 28.17                 | 9.62         | 0.08                | 0.26      | QP      |
| 5  | 0.474       | 31.80         | 46.45         | -14.65              | 21.84                 | 9.62         | 0.08                | 0.26      | Average |
| 6  | 0.474       | 42.94         | 56.45         | -13.51              | 32.98                 | 9.62         | 0.08                | 0.26      | QP      |
| 7  | 0.479       | 32.08         | 46.36         | -14.28              | 22.12                 | 9.62         | 0.08                | 0.26      | Average |
| 8* | 0.479       | 43.58         | 56.36         | -12.78              | 33.62                 | 9.62         | 0.08                | 0.26      | QP      |
| 9  | 0.502       | 27.19         | 46.00         | -18.81              | 17.23                 | 9.62         | 0.08                | 0.26      | Average |
| 10 | 0.502       | 38.16         | 56.00         | -17.84              | 28.20                 | 9.62         | 0.08                | 0.26      | QP      |
| 11 | 0.844       | 21.15         | 46.00         | -24.85              | 11.14                 | 9.63         | 0.09                | 0.29      | Average |
| 12 | 0.844       | 32.89         | 56.00         | -23.11              | 22.88                 | 9.63         | 0.09                | 0.29      | QP      |

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).  
2: Over Limit (dB) = Level (dBuV) - Limit Line (dBuV).