

FCC/ISED Test Report


Prepared for: Garmin International, Inc.

Address: 1200 E. 151st Street
Olathe, Kansas, 66062, USA

Product: AA4308

Test Report No: R20211005-21-E9A

Approved by:



Fox Lane
EMC Test Engineer

DATE: May 13, 2022

Total Pages: 118

The Nebraska Center for Excellence in Electronics (NCEE) authorizes the above-named company to reproduce this report provided it is reproduced in its entirety for use by the company's employees only. Any use that a third party makes of this report, or any reliance on or decisions made based on it, are the responsibility of such third parties. NCEE accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report. This report applies only to the items tested.



Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

REVISION PAGE

Rev. No.	Date	Description
0	5 March 2022	Original – KVepuri Prepared by FLane and SProbst
A	13 May 2022	PSD plots and tabular data updated Delta from spurious emissions changed



Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

CONTENTS

Revision Page	2
1.0 Summary of test results	4
2.0 EUT Description	5
2.1 Equipment under test	5
2.2 Description of test modes	5
2.3 Description of support units	5
3.0 Laboratory and General Test Description	6
3.1 Laboratory description	6
3.2 Test personnel	6
3.3 Test equipment	7
3.4 General Test Procedure and Setup for Radio Measuremnts	8
4.0 Results	9
4.1 Output Power	13
4.2 Bandwidth	14
4.3 Duty Cycle	15
4.4 Radiated emissions	16
4.5 Conducted Spurious Emissions	23
4.5 Band edges	29
4.6 Power Spectral Density	31
4.7 Conducted AC Mains Emissions	32
Appendix A: Sample Calculation	37
Appendix B – Measurement Uncertainty	39
Appendix C – Graphs and Tables	40
REPORT END	118



Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

1.0 SUMMARY OF TEST RESULTS

The worst-case measurements were reported in this report. Summary of test results presented in this report correspond to the following section:

FCC Part 15.247

The EUT has been tested according to the following specifications:

- (1) US Code of Federal Regulations, Title 47, Part 15
- (2) ISED RSS-Gen, Issue 5
- (3) ISED RSS-247, Issue 2

APPLIED STANDARDS AND REGULATIONS		
Standard Section	Test Type	Result
FCC Part 15.35 RSS Gen, Issue 5, Section 6.10	Duty Cycle	Pass
FCC Part 15.247(b)(3) RSS-247 Issue 2 Section 5.4(d)	Peak output power	Pass
FCC Part 15.247(a)(2) RSS-247 Issue 2 Section 5.2	Bandwidth	Pass
FCC Part 15.209 RSS-Gen Issue 5, Section 7.3	Receiver Radiated Emissions	Pass
FCC Part 15.209 (restricted bands), 15.247 (unrestricted) RSS-247 Issue 2 Section 5.5, RSS-Gen Issue 5, Section 8.9	Transmitter Radiated Emissions	Pass
FCC Part 15.247(e) RSS-247 Issue 2 Section 5.2	Power Spectral Density	Pass
FCC Part 15.209, 15.247(d) RSS-247 Issue 2 Section 5.5	Band Edge Measurement	Pass
FCC Part 15.207 RSS-Gen Issue 5, Section 8.8	Conducted Emissions	Pass



Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

2.0 EUT DESCRIPTION

2.1 EQUIPMENT UNDER TEST

Summary and Operating Condition:

EUT	AA4308
EUT Received	6 December 2021
EUT Tested	8 December 2021- 2 March 2022
Serial No.	3392435192 (Radiated Measurements) 3392435208(Conducted Measurements)
Operating Band	2400 – 2483.5 MHz
Device Type	<input type="checkbox"/> GMSK <input type="checkbox"/> GFSK <input type="checkbox"/> BT BR <input type="checkbox"/> BT EDR 2MB <input type="checkbox"/> BT EDR 3MB <input checked="" type="checkbox"/> 802.11x
Power Supply / Voltage	Internal Battery/ 5VDC Charger: Garmin (Phi Hong) MN: PSAI10R-050Q (Representative Power Supply)

NOTE: For more detailed features description, please refer to the manufacturer's specifications or user's manual.

2.2 DESCRIPTION OF TEST MODES

The operating range of the EUT is dependent on the device type found in section 2.1:

For Bluetooth Transmissions:

Channel	Frequency
Low	2402 MHz
Mid	2440/2441 MHz
High	2480 MHz

For 802.11x Transmissions:

Channel	Frequency
Low	2412 MHz
Mid	2437 MHz
High	2462 MHz

These are the only representative channels tested in the frequency range according to FCC Part 15.31 and RSS-Gen Table A1. See the operational description for a list of all channel frequency and designations.

Power Settings used:

Modulation	Low	Mid	High
802.11b	33	34	26
802.11g	18	29	20
802.11n	18	29	19

2.3 DESCRIPTION OF SUPPORT UNITS

None

	Report Number:	R20211005-21-E9A	Rev	A
	Prepared for:	Garmin International, Inc.		

3.0 LABORATORY AND GENERAL TEST DESCRIPTION

3.1 LABORATORY DESCRIPTION

All testing was performed at the following Facility:

The Nebraska Center for Excellence in Electronics (NCEE Labs)
 4740 Discovery Drive
 Lincoln, NE 68521

A2LA Certificate Number:	1953.01
FCC Accredited Test Site Designation No:	US1060
Industry Canada Test Site Registration No:	4294A-1
NCC CAB Identification No:	US0177

Environmental conditions varied slightly throughout the tests:

Relative humidity of $35 \pm 4\%$
 Temperature of $22 \pm 3^\circ$ Celsius



3.2 TEST PERSONNEL

No.	PERSONNEL	TITLE	ROLE
1	Fox Lane	Test Engineer	Testing and Report
2	Karthik Vepuri	Test Engineer	Review/Editing and Report
3	Blake Winter	Test Engineer	Testing
4	Grace Larsen	Test Technician	Testing and Report
5	Samuel Probst	Test Technician	Testing and Report
6	Matthew Emory	Test Technician	Testing

Notes:

All personnel are permanent staff members of NCEE Labs. No testing or review was sub-contracted or performed by sub-contracted personnel.



Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

3.3 TEST EQUIPMENT

DESCRIPTION AND MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CALIBRATION DATE	CALIBRATION DUE DATE
Keysight MXE Signal Analyzer (44GHz)	N9038A	MY59050109	July 21, 2021	July 21, 2023
Keysight MXE Signal Analyzer (26.5GHz)	N9038A	MY56400083	May 5, 2020	May 5, 2022
Keysight EXA Signal Analyzer	N9010A	MY56070862	July 20, 2021	July 20, 2023
SunAR RF Motion	JB1	A091418	July 27, 2021	July 27, 2022
EMCO Horn Antenna	3115	6415	March 16, 2020	March 16, 2022
EMCO Horn Antenna	3116	2576	March 9, 2020	March 9, 2022
Com-Power LISN 50µH / 250µH - 50Ω	LI-220C	20070017	September 22, 2020	September 22, 2022
8447F POT H64 Preampfier*	8447F POT H64	3113AD4667	February 1, 2021	February 1, 2023
Rohde & Schwarz Preampfier*	TS-PR18	3545700803	April 14, 2020	April 14, 2022
Trilithic High Pass Filter*	6HC330	23042	April 14, 2020	April 14, 2022
ETS – Lindgren- VSWR on 10m Chamber	10m Semi-anechoic chamber-VSWR	4740 Discovery Drive	July 30, 2020	July 30, 2023
NCEE Labs-NSA on 10m Chamber	10m Semi-anechoic chamber-NSA	NCEE-001	October 25, 2019	October 25, 2022
TDK Emissions Lab Software	V11.25	700307	NA	NA
RF Cable (preampfier to antenna)*	MFR-57500	01-07-002	April 14, 2020	April 14, 2022
RF Cable (antenna to 10m chamber bulkhead)*	FSCM 64639	01E3872	September 24, 2021	September 24, 2023
RF Cable (10m chamber bulkhead to control room bulkhead)*	FSCM 64639	01E3864	September 24, 2021	September 24, 2023
RF Cable (control room bulkhead to test receiver)*	FSCM 64639	01F1206	September 24, 2021	September 24, 2023
N connector bulkhead (10m chamber)**	PE9128	NCEEBH1	September 24, 2021	September 24, 2023
N connector bulkhead (control room)**	PE9128	NCEEBH2	September 24, 2021	September 24, 2023

*Internal Characterization

Notes:

All equipment is owned by NCEE Labs and stored permanently at NCEE Labs facilities.

3.4 GENERAL TEST PROCEDURE AND SETUP FOR RADIO MEASUREMENTS

Measurement type presented in this report (Please see the checked box below):

Conducted

The conducted measurements were performed by connecting the output of the transmitter directly into a spectrum analyzer using an impedance matched cable and connector soldered to the EUT in place of the antenna. The information regarding resolution bandwidth, video bandwidth, span and the detector used can be found in the graphs provided in the Appendix C. All the radio measurements were performed using the sections from ANSI C63.10, details about the section used can be found in the spectrum analyzer titles on the graph.

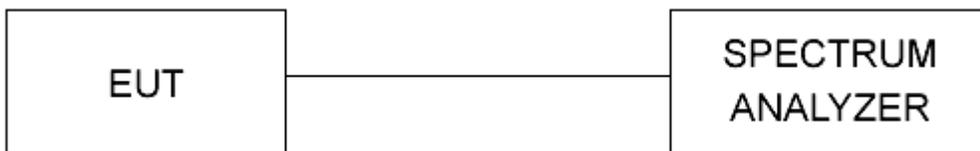


Figure 1 - Bandwidth Measurements Test Setup

Radiated

All the radiated measurements were taken at a distance of 3m from the EUT. The information regarding resolution bandwidth, video bandwidth, span and the detector used can be found in the graphs provided in the Appendix C. All the radio measurements were performed using the sections from ANSI C63.10, details about the section used can be found in the spectrum analyzer titles on the graph.

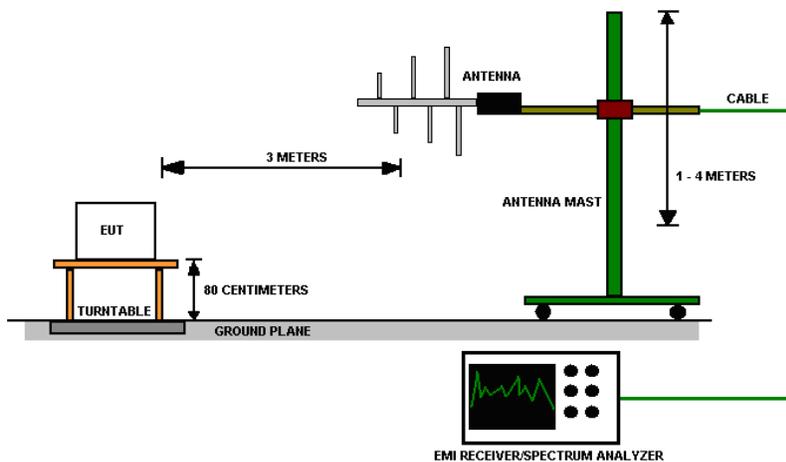


Figure 2 - Radiated Emissions Test Setup



Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

4.0 RESULTS

DTS Radio Measurements Low Data Rate							
CHANNEL	Transmitter	Occupied Bandwidth (MHz)	6 dB Bandwidth (MHz)	AVERAGE OUTPUT POWER (dBm)	AVERAGE OUTPUT POWER (mW)	PSD (dBm)	RESULT
Low	802.11 b	15.16	10.06	16.340	43.053	-6.416	PASS
Mid	802.11 b	15.08	9.57	16.720	46.989	3.709	PASS
High	802.11 b	15.00	10.05	13.610	22.961	0.673	PASS
Low	802.11 g	16.61	16.55	8.070	6.412	-11.635	PASS
Mid	802.11 g	16.59	16.57	13.730	23.605	-10.699	PASS
High	802.11 g	16.55	16.55	7.350	5.433	-16.299	PASS
Low	802.11 n	17.544	17.63	8.56	7.178	-12.614	PASS
Mid	802.11 n	17.58	17.66	13.08	20.324	-10.858	PASS
High	802.11 n	17.565	17.60	7.86	6.109	-17.729	PASS

Occupied Bandwidth = N/A; 6 dB Bandwidth Limit = 500 kHz Output Power Limit = 30 dBm; PSD Limit = 8 dBm

Unrestricted Band-Edge Low Data Rate							
CHANNEL	Mode	Band edge /Measurement Frequency (MHz)	Relative Highest out of band level (dBuV)	Relative Fundamental (dBuV)	Delta (dB)	Min Delta (dB)	Result
Low	802.11 b	2400.00	81.08	114.46	33.38	30.00	PASS
Low	802.11 g	2400.00	67.55	101.73	34.18	30.00	PASS
Low	802.11 n	2400.00	66.99	102.49	35.50	30.00	PASS
High	802.11 b	2483.50	55.08	111.11	56.02	30.00	PASS
High	802.11 g	2483.50	56.34	103.62	47.28	30.00	PASS
High	802.11 n	2483.50	55.91	102.69	46.78	30.00	PASS

Radiated Peak Restricted Band-Edge Low Data Rate							
CHANNEL	Mode	Band edge /Measurement Frequency (MHz)	Highest out of band level (dBuV/m @ 3m)	Measurement Type	Limit (dBuV/m @ 3m)	Margin	Result
Low	802.11 b	2390.00	60.10	Peak	73.98	13.88	PASS
Low	802.11 g	2390.00	62.22	Peak	73.98	11.77	PASS
Low	802.11 n	2390.00	64.03	Peak	73.98	9.95	PASS
High	802.11 b	2483.50	56.50	Peak	73.98	17.48	PASS
High	802.11 g	2483.50	59.65	Peak	73.98	14.33	PASS
High	802.11 n	2483.50	57.04	Peak	73.98	16.94	PASS

*Limit shown is the peak limit taken from FCC Part 15.209

Radiated Average Restricted Band-Edge Low Data Rate



Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

CHANNEL	Mode	Band edge /Measurement Frequency (MHz)	Highest out of band level (dBuV/m @ 3m)	Measurement Type	Limit (dBuV/m @ 3m)	Margin	Result
Low	802.11 b	2390.00	49.20	Average	53.98	4.78	PASS
Low	802.11 g	2390.00	48.84	Average	53.98	5.14	PASS
Low	802.11 n	2390.00	49.57	Average	53.98	4.41	PASS
High	802.11 b	2483.50	45.31	Average	53.98	8.67	PASS
High	802.11 g	2483.50	46.28	Average	53.98	7.70	PASS
High	802.11 n	2483.50	44.84	Average	53.98	9.14	PASS

*Limit shown is the average limit taken from FCC Part 15.209



Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

DTS Radio Measurements High Data Rate							
CHANNEL	Transmitter	Occupied Bandwidth (MHz)	6 dB Bandwidth (MHz)	AVERAGE OUTPUT POWER (dBm)	AVERAGE OUTPUT POWER (mW)	PSD (dBm)	RESULT
Low	802.11 b	14.77	9.15	16.650	46.238	-6.221	PASS
Mid	802.11 b	14.78	9.51	17.670	58.479	-5.54	PASS
High	802.11 b	14.77	9.50	13.550	22.646	-8.378	PASS
Low	802.11 g	16.44	16.54	7.900	6.166	-11.969	PASS
Mid	802.11 g	16.44	16.55	13.590	22.856	-9.839	PASS
High	802.11 g	16.43	16.53	9.090	8.110	-14.714	PASS
Low	802.11 n	17.50	17.68	8.100	8.531	-12.944	PASS
Mid	802.11 n	17.54	17.72	11.360	13.68	-13.733	PASS
High	802.11 n	17.53	17.70	9.310	8.53	-16.878	PASS

Occupied Bandwidth = N/A; 6 dB Bandwidth Limit =500 kHz Output Power Limit = 30 dBm; PSD Limit = 8 dBm

Unrestricted Band-Edge High Data Rate							
CHANNEL	Mode	Band edge /Measurement Frequency (MHz)	Relative Highest out of band level (dBuV)	Relative Fundamenta l (dBuV)	Delta (dB)	Min Delta (dB)	Result
Low	802.11 b	2390.00	79.99	114.59	34.60	20.00	PASS
Low	802.11 g	2390.00	67.46	104.20	36.74	20.00	PASS
Low	802.11 n	2390.00	67.68	104.24	36.56	20.00	PASS
High	802.11 b	2483.50	56.21	111.22	55.00	20.00	PASS
High	802.11 g	2483.50	57.63	104.14	46.50	20.00	PASS
High	802.11 n	2483.50	58.40	104.21	45.81	20.00	PASS

Radiated Peak Restricted Band-Edge High Data Rate							
CHANNEL	Mode	Band edge /Measurement Frequency (MHz)	Highest out of band level (dBuV/m @ 3m)	Measuremen t Type	Limit (dBuV/m @ 3m)	Margin	Result
Low	802.11 b	2390.00	59.42	Peak	73.98	14.56	PASS
Low	802.11 g	2390.00	64.28	Peak	73.98	9.70	PASS
Low	802.11 n	2390.00	65.20	Peak	73.98	8.79	PASS
High	802.11 b	2483.50	55.78	Peak	73.98	18.20	PASS
High	802.11 g	2483.50	61.83	Peak	73.98	12.16	PASS
High	802.11 n	2483.50	61.50	Peak	73.98	12.48	PASS

*Limit shown is the peak limit taken from FCC Part 15.209



Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

Radiated Average Restricted Band-Edge High Data Rate

CHANNEL	Mode	Band edge /Measurement Frequency (MHz)	Highest out of band level (dBuV/m @ 3m)	Measurement Type	Limit (dBuV/m @ 3m)	Margin	Result
Low	802.11 b	2390.00	48.39	Average	53.98	5.59	PASS
Low	802.11 g	2390.00	49.29	Average	53.98	4.69	PASS
Low	802.11 n	2390.00	50.35	Average	53.98	3.63	PASS
High	802.11 b	2483.50	44.76	Average	53.98	9.22	PASS
High	802.11 g	2483.50	46.31	Average	53.98	7.67	PASS
High	802.11 n	2483.50	45.53	Average	53.98	8.45	PASS

*Limit shown is the average limit taken from FCC Part 15.209



Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

4.1 OUTPUT POWER

Test Method: Power measurements were performed using ANSI C63.10, Section 11.9.2.2.2.

Limits of power measurements:

For FCC Part 15.247 Device:

The maximum allowed output power is 30 dBm.

Test procedures:

Details can be found in section 3.4 of this report.

Deviations from test standard:

No deviation.

Test setup:

Details can be found in section 3.4 of this report.

EUT operating conditions:

Details can be found in section 2.1 of this report.

Test results:

Pass

Comments:

1. All the output power plots can be found in the Appendix C.
2. All the measurements were found to be compliant.
3. The measurements are listed in the tables in section 4.0.



Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

4.2 BANDWIDTH

Test Method: All the radio measurements were performed using the sections from ANSI C63.10, details about the section used can be found in the spectrum analyzer titles on the graph.

Limits of bandwidth measurements:

For FCC Part 15.247 Device:

The 99% occupied bandwidth is for informational purpose only. The 6dB bandwidth of the signal must be greater than 500 kHz.

Test procedures:

Details can be found in section 3.4 of this report.

Deviations from test standard:

No deviation.

Test setup:

Test setup details can be found in section 3.4 of this report.

EUT operating conditions:

Details can be found in section 2.1 of this report.

Test results:

Pass

Comments:

1. All the bandwidth plots can be found in the Appendix C.
2. All the measurements were found to be compliant.
3. The measurements are listed in the tables in section 4.0.



Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

4.3 DUTY CYCLE

Test Method:

All Modulations/Transmitters in this report had a duty cycle of >98%

Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

4.4 RADIATED EMISSIONS

Test Method: ANSI C63.10-2013, Section 6.5, 6.6

Limits for radiated emissions measurements:

Emissions radiated outside of the specified bands shall be applied to the limits in 15.209 as followed:

FREQUENCIES (MHz)	FIELD STRENGTH ($\mu\text{V/m}$)	MEASUREMENT DISTANCE (m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	3
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:


1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = $20 * \log * \text{Emission level } (\mu\text{V/m})$.
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits by more than 20dB under any condition of modulation.
4. The EUT was tested for spurious emissions while running off of battery power and external USB power. The worse-case emissions were produced while running off of USB power, so results from this mode are presented.



Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

Test procedures:

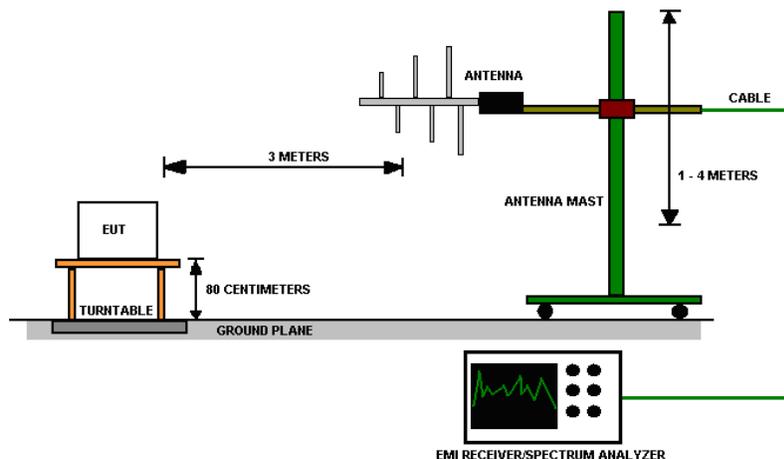- a. The EUT was placed on the top of a rotating table above the ground plane in a 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. The table was 0.8m high for measurements from 30MHz-1Ghz and 1.5m for measurements from 1GHz and higher.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna was a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are used to make the measurement.
- d. For each suspected emission, the EUT was arranged to maximize its emissions and then the antenna height was varied from 1 meter to 4 meters and the rotating table was turned from 0 degrees to 360 degrees to find the maximum emission reading.
- e. The test-receiver system was set to use a peak detector with a specified resolution bandwidth. For spectrum analyzer measurements, the composite maximum of several analyzer sweeps was used for final measurements.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise, the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. The EUT was maximized in all 3 orthogonal positions. The results are presented for the axis that had the highest emissions.

Test setup:

Figure 3 - Radiated Emissions Test Setup
NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequencies below 1GHz.
2. The resolution bandwidth 1 MHz for all measurements and at frequencies above 1GHz, A peak detector was used for all measurements above 1GHz. Measurements were made with an EMI Receiver.

Deviations from test standard:

No deviation.

EUT operating conditions

Details can be found in section 2.1 of this report.

Test results:

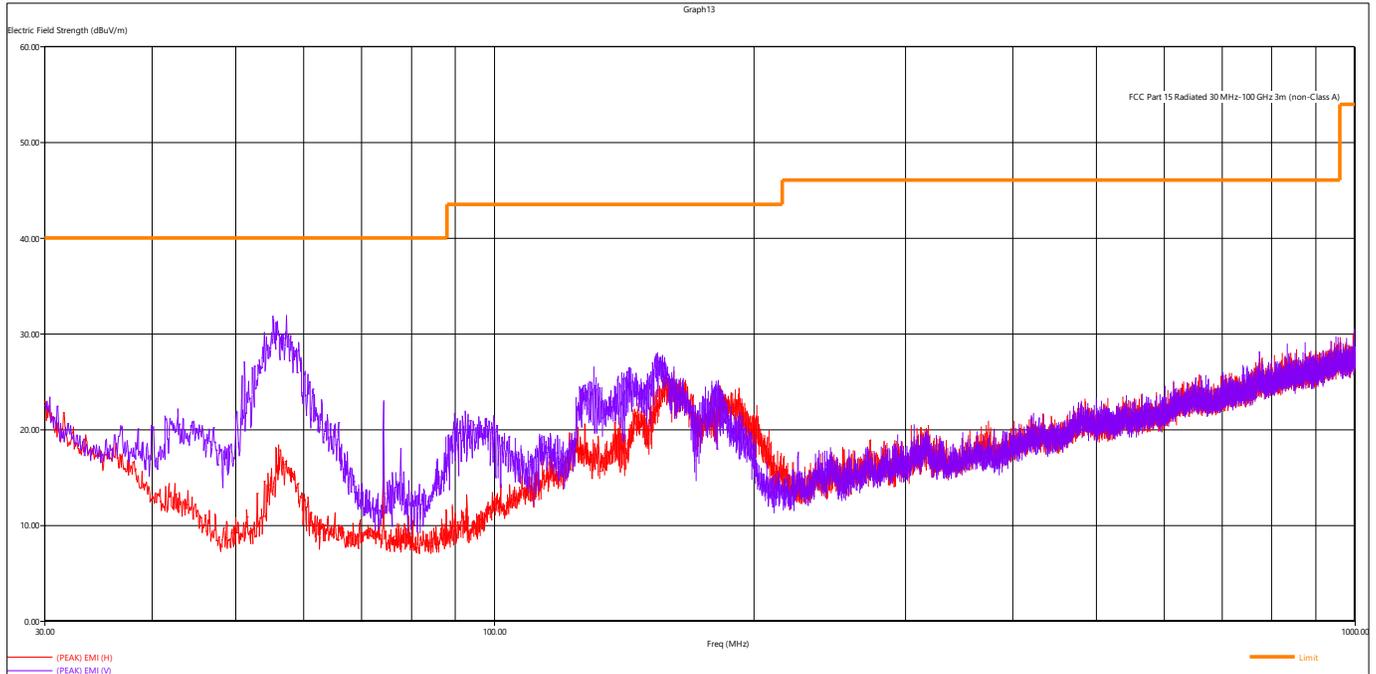


Figure 4 - Radiated Emissions Plot, Receive

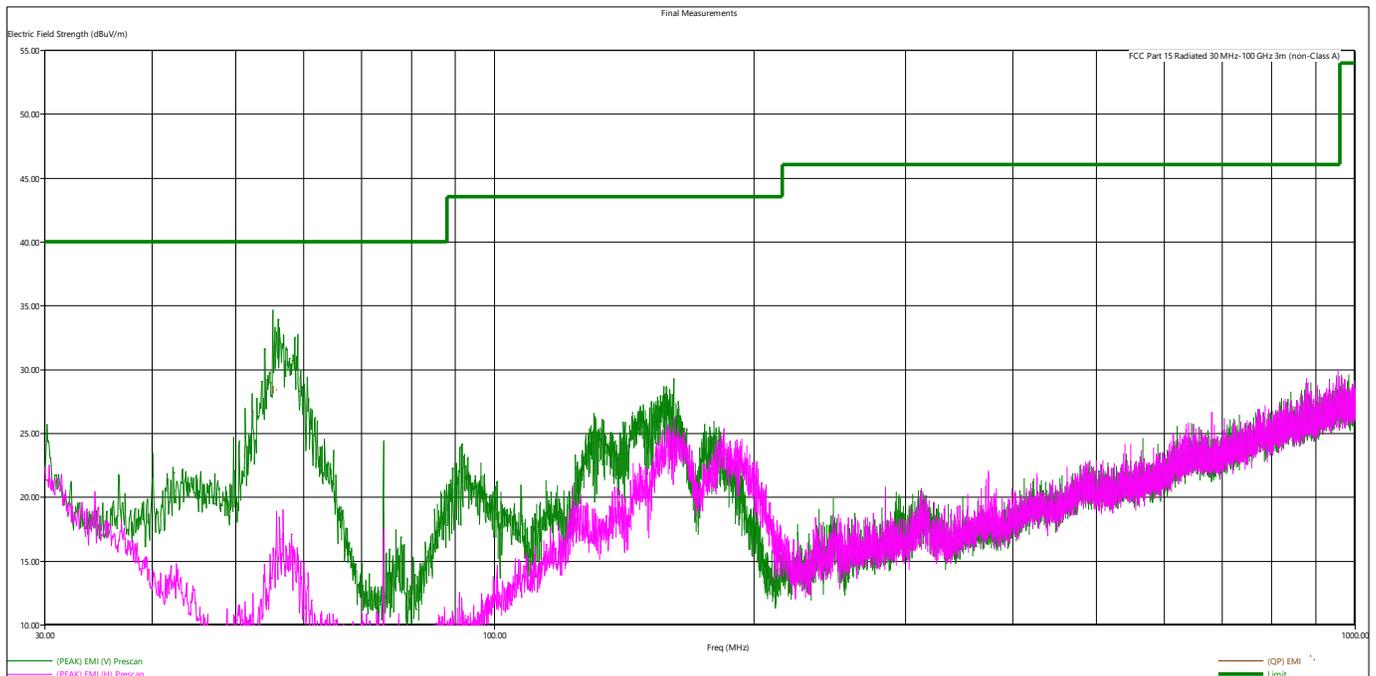


Figure 5 - Radiated Emissions Plot, 802.11b

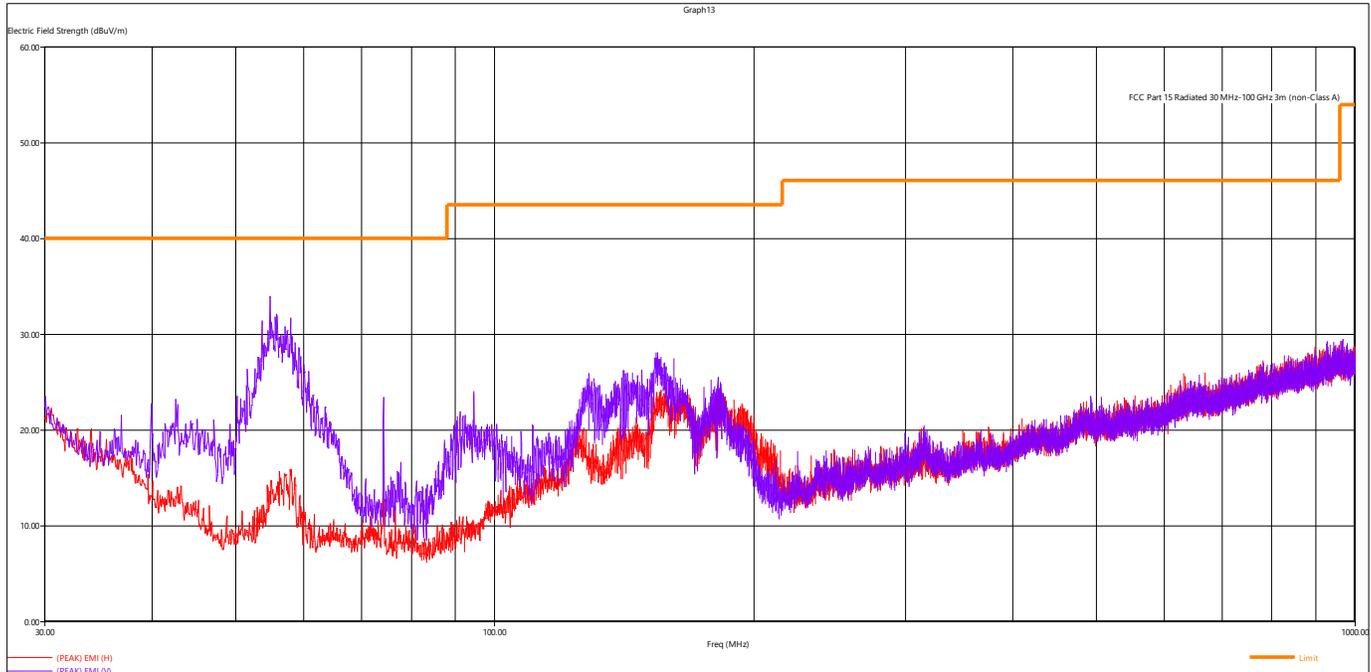


Figure 6 - Radiated Emissions Plot, 802.11g

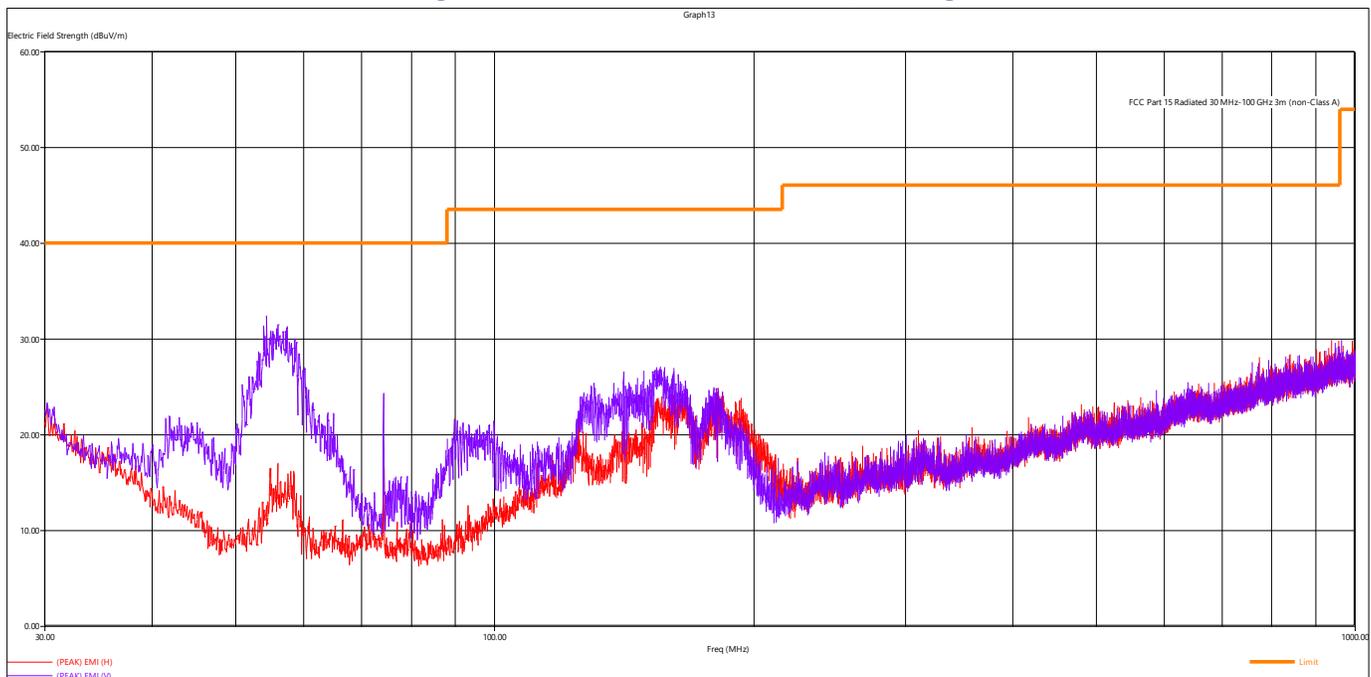


Figure 7 - Radiated Emissions Plot, 802.11n

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Limit value - Emission level



Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

Quasi-Peak Measurements, 802.11x								
Frequency	Level	Limit	Margin	Height	Angle	Pol	Channel	Modulation
MHz	dBµV/m	dBµV/m	dB	cm.	deg.			
55.204800	28.38	40.00	11.62	107.00	347.00	V	Low	802.11b

All other measurements were found to be at least 6 dB below the limit. Worst case emissions are reported.

Peak Measurements, 802.11x, Low Data Rate									
Frequency	Level	Limit	Margin	Height	Angle	Pol	Channel	Modulation	Data Rate
MHz	dBµV/m	dBµV/m	dB	cm.	deg.				
2411.138000	105.44	NA	NA	384.00	104.00	H	Low	802.11b	1MHz
2436.078000	105.68	NA	NA	375.00	107.00	H	Mid	802.11b	1MHz
2461.012000	102.96	NA	NA	365.00	108.00	H	High	802.11b	1MHz
2412.102000	110.01	NA	NA	380.00	98.00	H	Low	802.11b	11MHz
2438.142000	109.96	NA	NA	373.00	95.00	H	Mid	802.11b	11MHz
2462.206000	106.32	NA	NA	364.00	104.00	H	High	802.11b	11MHz
2411.020000	103.24	NA	NA	393.00	105.00	H	Low	802.11g	6MHz
2439.412000	105.68	NA	NA	371.00	105.00	H	Mid	802.11g	6MHz
2459.444000	100.28	NA	NA	362.00	115.00	H	High	802.11g	6MHz
2409.232000	105.77	NA	NA	387.00	101.00	H	Low	802.11g	54MHz
2438.960000	106.20	NA	NA	382.00	107.00	H	Mid	802.11g	54MHz
2463.992000	102.70	NA	NA	233.00	105.00	H	High	802.11g	54MHz
2414.178000	103.13	NA	NA	213.00	238.00	H	Low	802.11n	MCS0
2436.126000	105.15	NA	NA	397.00	106.00	H	Mid	802.11n	MCS0
2463.710000	98.81	NA	NA	509.00	112.00	H	High	802.11n	MCS0
2414.692000	101.95	NA	NA	410.00	108.00	H	Low	802.11n	MCS7
2434.938000	102.49	NA	NA	176.00	106.00	H	Mid	802.11n	MCS7
2457.902000	99.51	NA	NA	510.00	106.00	H	High	802.11n	MCS7

The EUT was maximized on all 3 orthogonal axes. The worst-case is shown in the plot and table above.
All other measurements were found to be at least 6 dB Below the limit.



Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

Average Measurements, 802.11x									
Frequency	Level	Limit	Margin	Height	Angle	Pol	Channel	Modulation	Data Rate
MHz	dB μ V/m	dB μ V/m	dB	cm.	deg.				
2411.138000	102.68	NA	NA	384.00	104.00	H	Low	802.11b	1MHz
2436.078000	102.82	NA	NA	375.00	107.00	H	Mid	802.11b	1MHz
2461.012000	99.95	NA	NA	365.00	108.00	H	High	802.11b	1MHz
2412.102000	102.38	NA	NA	380.00	98.00	H	Low	802.11b	11MHz
2438.142000	101.81	NA	NA	373.00	95.00	H	Mid	802.11b	11MHz
2462.206000	98.78	NA	NA	364.00	104.00	H	High	802.11b	11MHz
2411.020000	94.44	NA	NA	393.00	105.00	H	Low	802.11g	6MHz
2439.412000	96.87	NA	NA	371.00	105.00	H	Mid	802.11g	6MHz
2459.444000	91.36	NA	NA	362.00	115.00	H	High	802.11g	6MHz
2409.232000	95.72	NA	NA	387.00	101.00	H	Low	802.11g	54MHz
2438.960000	96.00	NA	NA	382.00	107.00	H	Mid	802.11g	54MHz
2463.992000	91.99	NA	NA	233.00	105.00	H	High	802.11g	54MHz
2414.178000	93.14	NA	NA	213.00	238.00	H	Low	802.11n	MCS0
2436.126000	95.18	NA	NA	397.00	106.00	H	Mid	802.11n	MCS0
2463.710000	89.38	NA	NA	509.00	112.00	H	High	802.11n	MCS0
2414.692000	91.96	NA	NA	410.00	108.00	H	Low	802.11n	MCS7
2434.938000	92.43	NA	NA	176.00	106.00	H	Mid	802.11n	MCS7
2457.902000	89.06	NA	NA	510.00	106.00	H	High	802.11n	MCS7

The EUT was maximized on all 3 orthogonal axes. The worst-case is shown in the plot and table above.
All other measurements were found to be at least 6 dB Below the limit.



Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

4.5 CONDUCTED SPURIOUS EMISSIONS

Test Method: ANSI C63.10-2013, Section 6.7

Limits of spurious emissions:

From FCC Part 15.247:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Test procedures:

The highest emissions level was measured and recorded. All spurious measurements were evaluated to 30dB below the fundamental. More details can be found in section 3.4 of this report. The line shown in the plots is a reference line placed at -20dBm.

Deviations from test standard:

Test performed at 120kHz RBW

Test setup:

Test setup details can be found in section 3.4 of this report.

EUT operating conditions:

Details can be found in section 2.1 of this report.

Test results:

Data rates and channels were investigated and worst case was reported, no emissions exceeded the limits.

There was no distinguishable difference between low and high data rate.

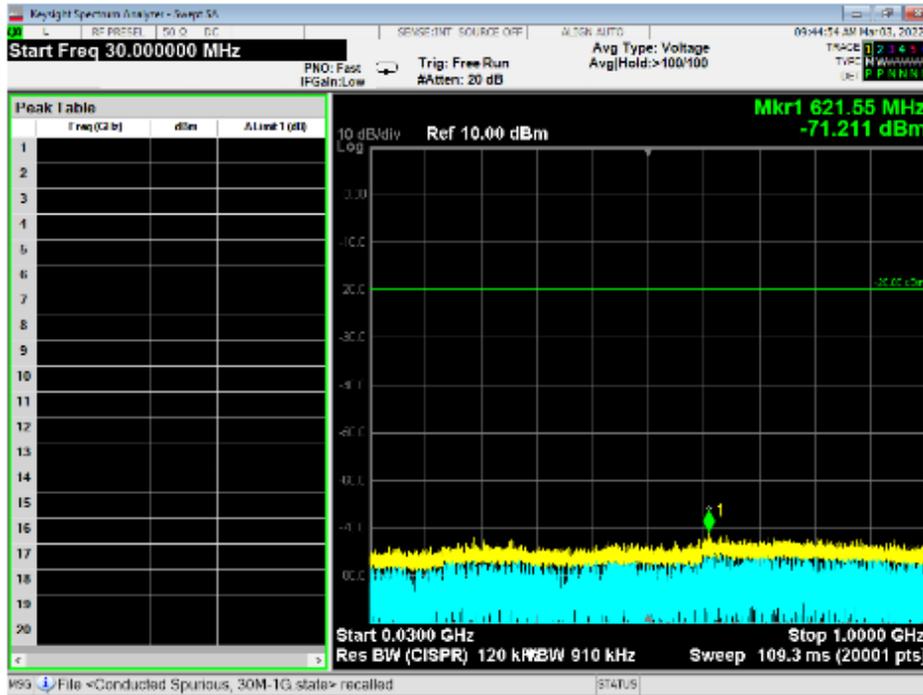


Figure 8 - Radiated Emissions Plot, WIFI 802.11b, 30M – 1G, Low

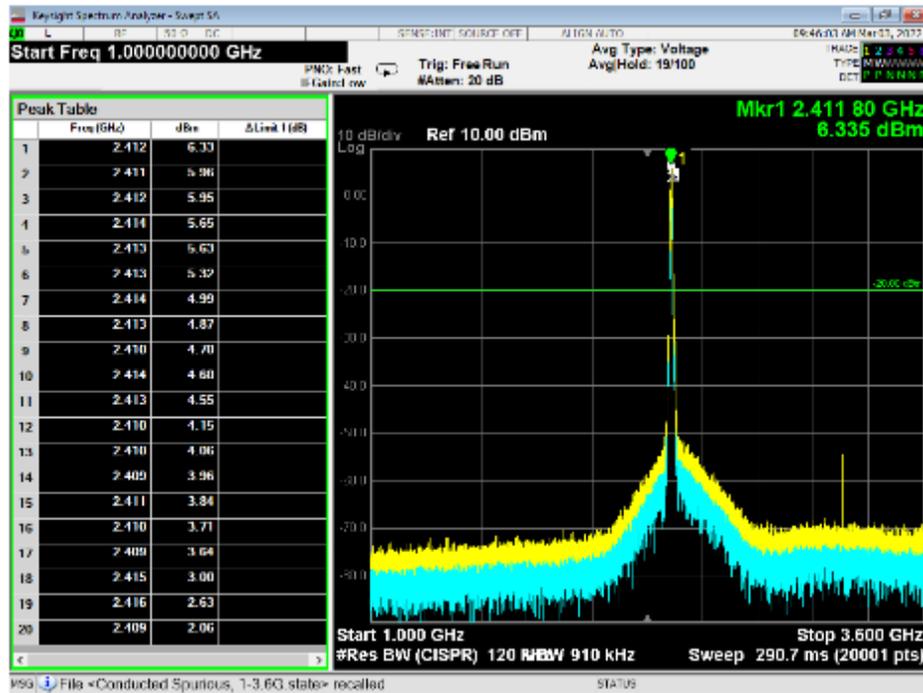


Figure 9 - Radiated Emissions Plot, WIFI 802.11b, 1G – 3.6G, Low

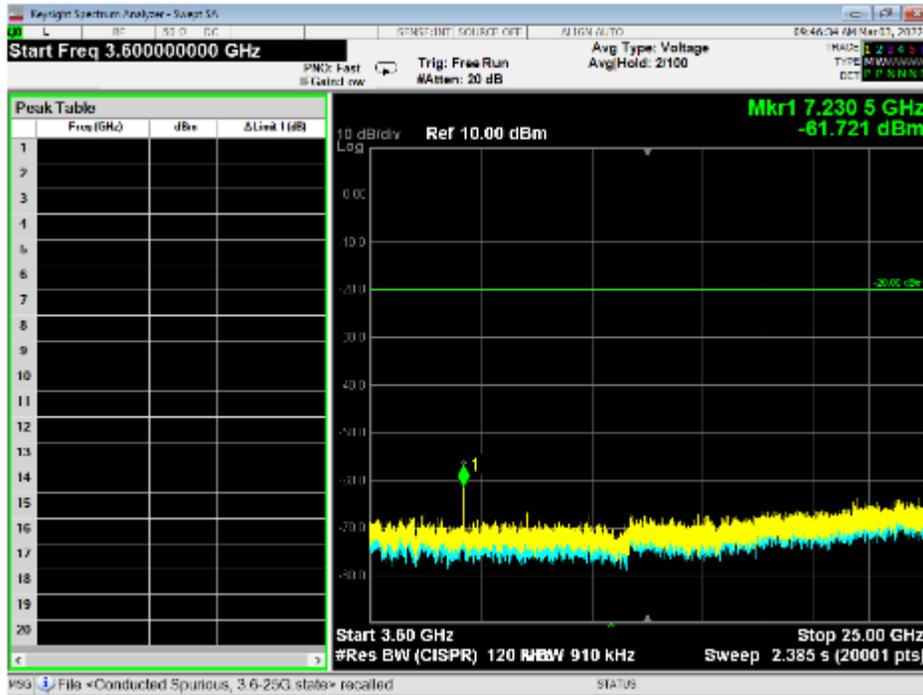


Figure 10 - Radiated Emissions Plot, WIFI 802.11b, 3.6G – 25G, Low

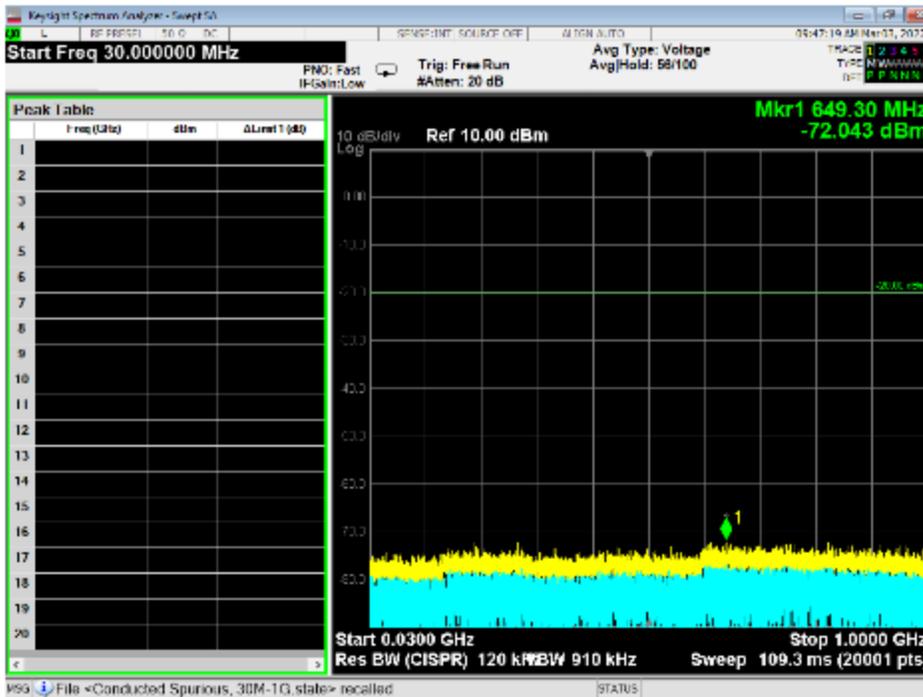


Figure 11 - Radiated Emissions Plot, WIFI 802.11g, 30M – 1G, Low

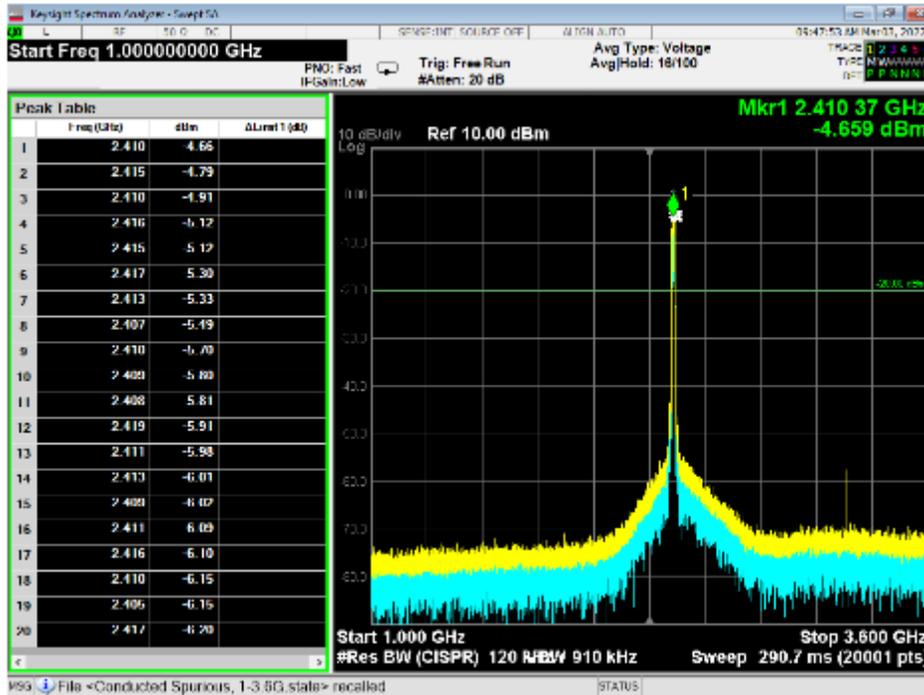


Figure 12 - Radiated Emissions Plot, WIFI 802.11g, 1G – 3.6G, Low

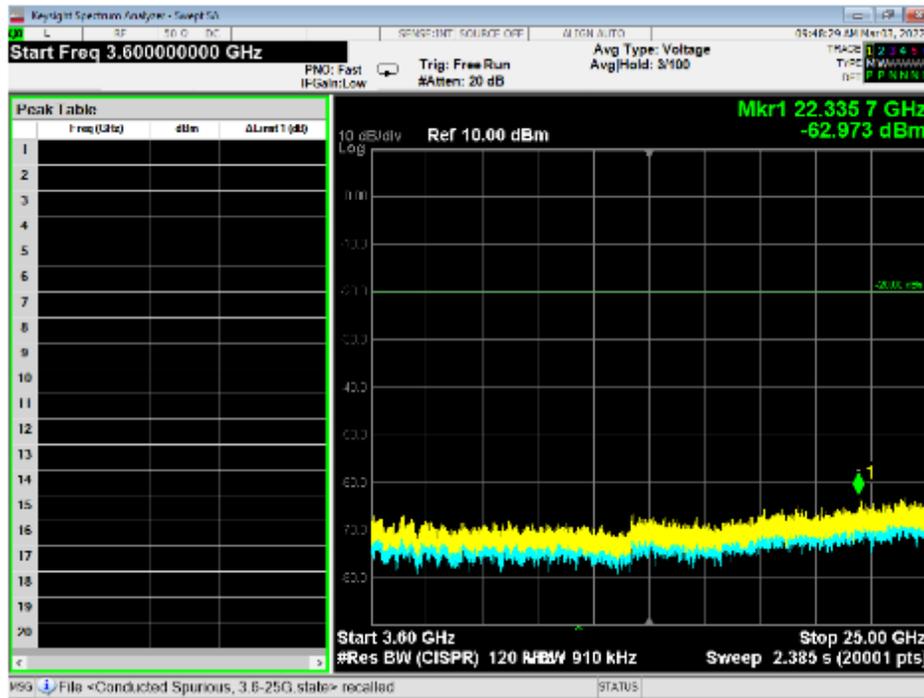


Figure 13 - Radiated Emissions Plot, WIFI 802.11g, 3.6G – 25G, Low

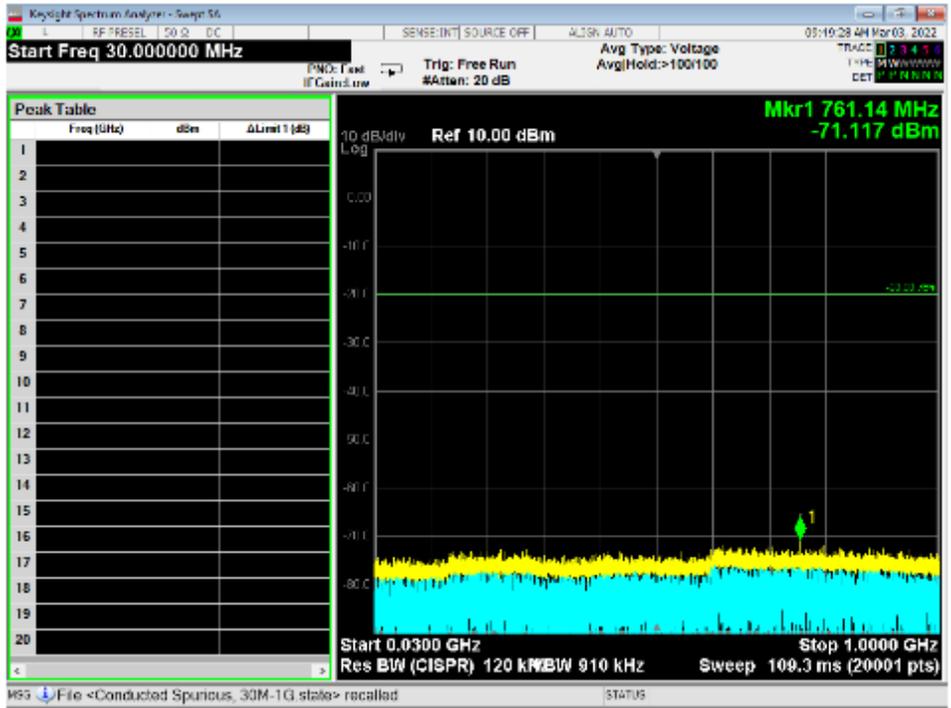


Figure 14 - Radiated Emissions Plot, WIFI 802.11n, 30M – 1G, Low

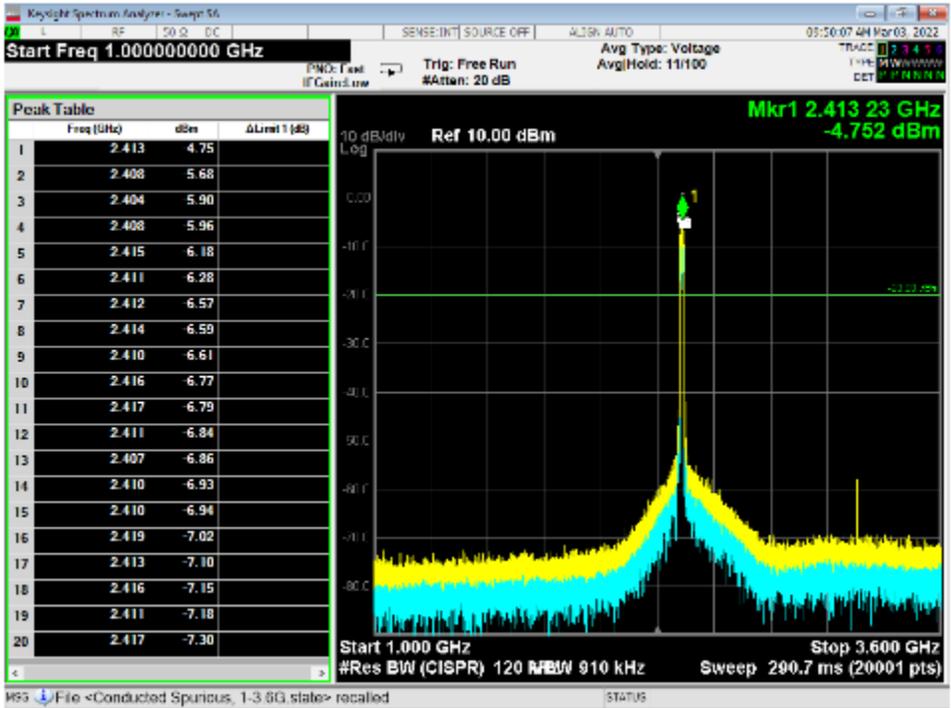


Figure 15 - Radiated Emissions Plot, WIFI 802.11n, 1G – 3.6G, Low

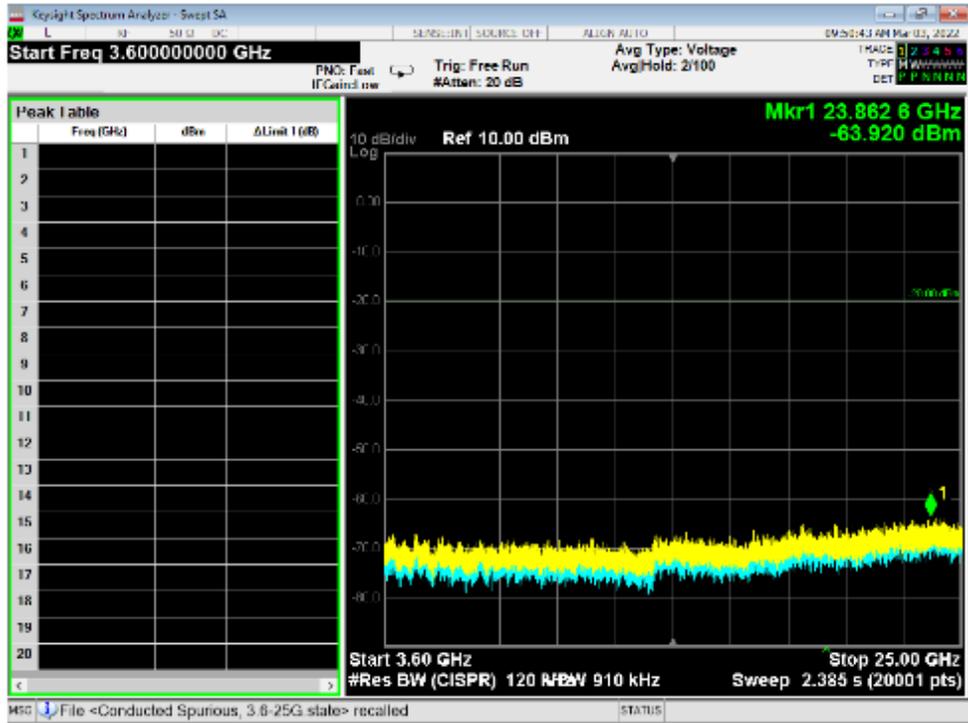


Figure 16 - Radiated Emissions Plot, WIFI 802.11n, 3.6G – 25G, Low



Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

4.5 BAND EDGES

Test Method: All the radio measurements were performed using the sections from ANSI C63.10, details about the section used can be found in the spectrum analyzer titles on the graph.

Limits of band-edge measurements:

For FCC Part 15.247 Device:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c))

Test procedures:

The highest emissions level beyond the band-edge was measured and recorded. All band edge measurements were evaluated to the general limits in Part 15.209. More details can be found in section 3.4 of this report.

Deviations from test standard:

No deviation.

Test setup:

Test setup details can be found in section 3.4 of this report.

EUT operating conditions:

Details can be found in section 2.1 of this report.



Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

Test results:

Pass

Comments:

1. All the band edge plots can be found in the Appendix C.
2. If the device falls under FCC Part 15.247 (Details can be found in summary of test results), compliance is shown in the unrestricted band edges by showing minimum delta of 20 dB between peak and the band edge.
3. The restricted band edge compliance is shown by comparing to the general limit defined in Part 15.209. The limit shown in the graph accounts for the antenna gain of the device.



Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

4.6 POWER SPECTRAL DENSITY

Test Method: All the radio measurements were performed using the sections from ANSI C63.10, details about the section used can be found in the spectrum analyzer titles on the graph.

Limits of power measurements:

For FCC Part 15.247 Device:

The maximum PSD allowed is 8 dBm.

Test procedures:

Details can be found in section 3.4 of this report.

Deviations from test standard:

No deviation.

Test setup:

Details can be found in section 3.4 of this report.

EUT operating conditions:

Details can be found in section 2.1 of this report.

Test results:

Pass

Comments:

1. All the Power Spectral Density (PSD) plots can be found in the Appendix C.
2. All the measurements were found to be compliant.
3. The measurements are reported on the graph.
4. The measurements are listed in the tables in section 4.0.

Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

4.7 CONDUCTED AC MAINS EMISSIONS

Test Method: ANSI C63.10-2013, Section(s) 6.2

Limits for conducted emissions measurements:

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

Notes:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz
3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

Test Procedures:

- a. The EUT was placed 0.8m above a ground reference plane and 0.4 meters from the conducting wall of a shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). The LISN provides 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference as well as the ground.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits are not reported.
- d. Results were compared to the 15.207 limits.

Deviation from the test standard:

No deviation

EUT operating conditions:

Details can be found in section 2.1 of this report.

Test Results:

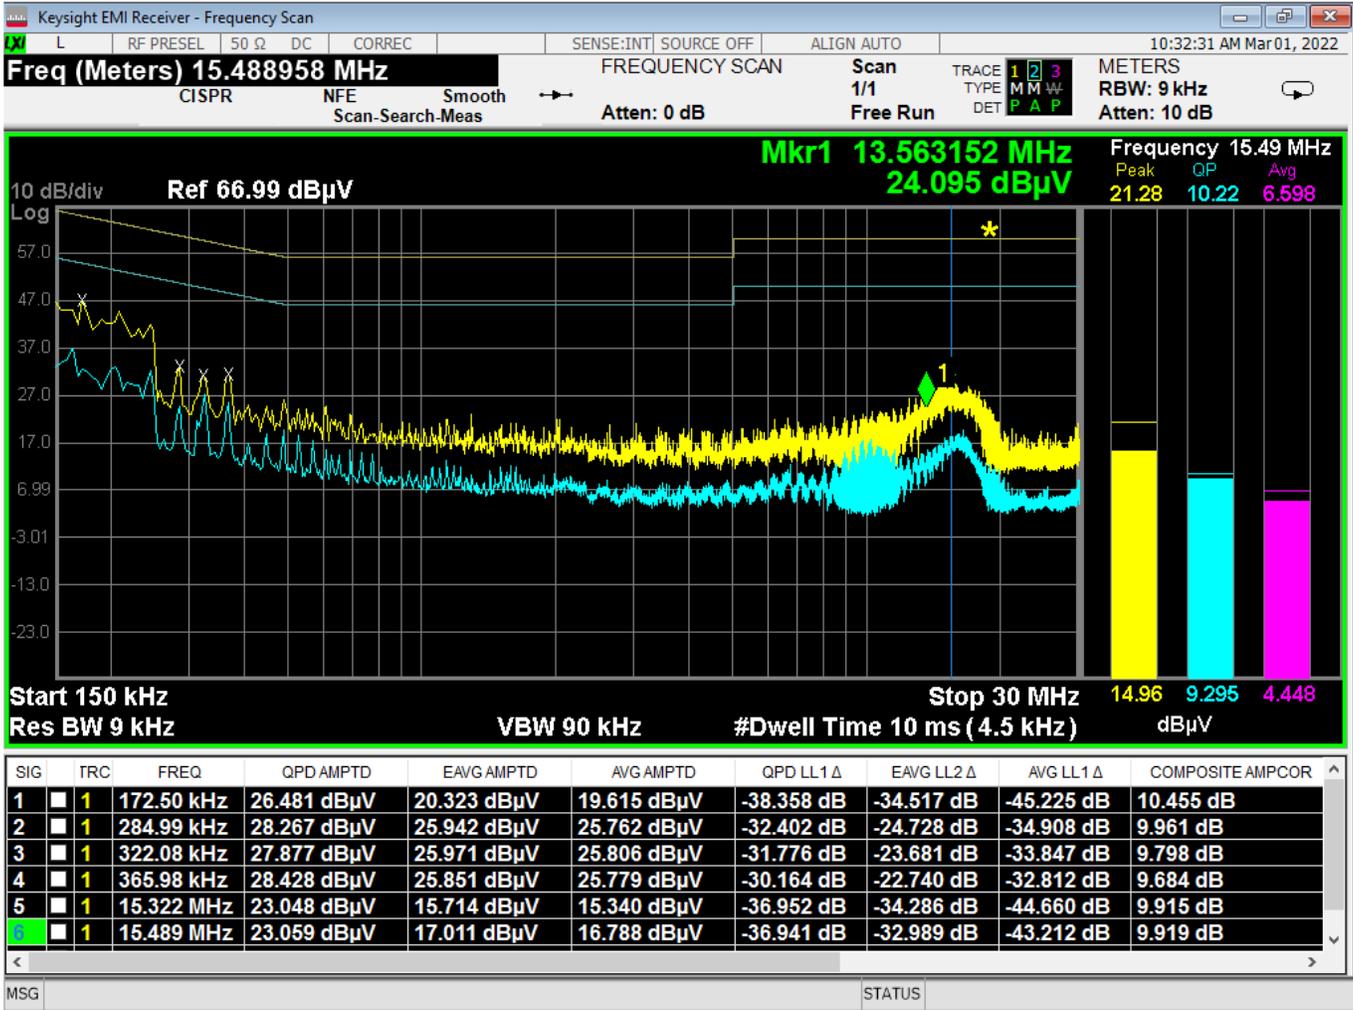


Figure 17 - Conducted Emissions Plot, Line, TX

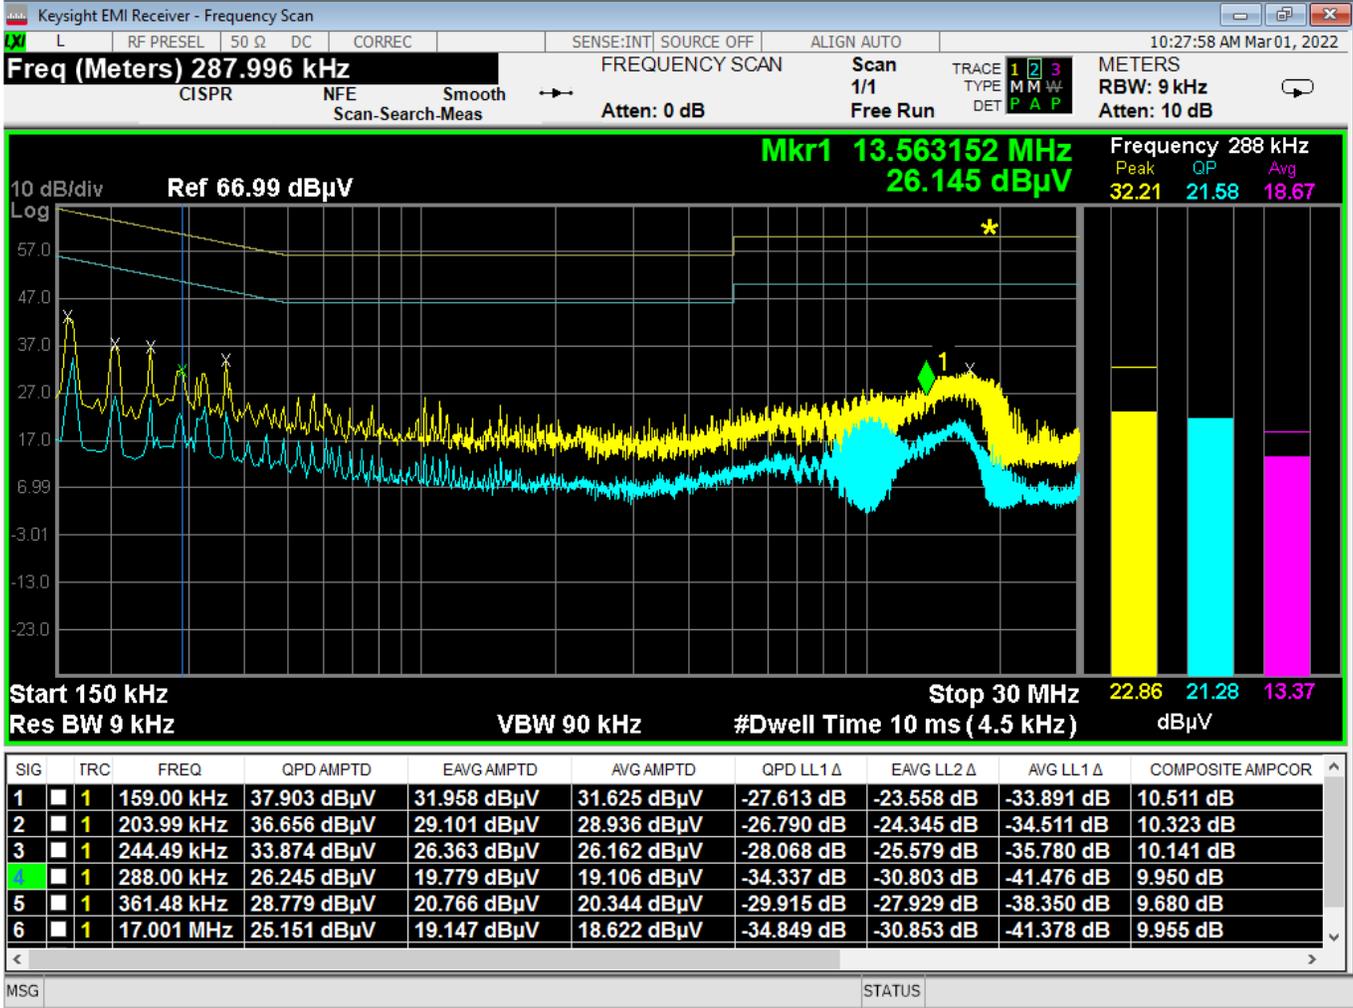


Figure 18 - Conducted Emissions Plot, Neutral, TX

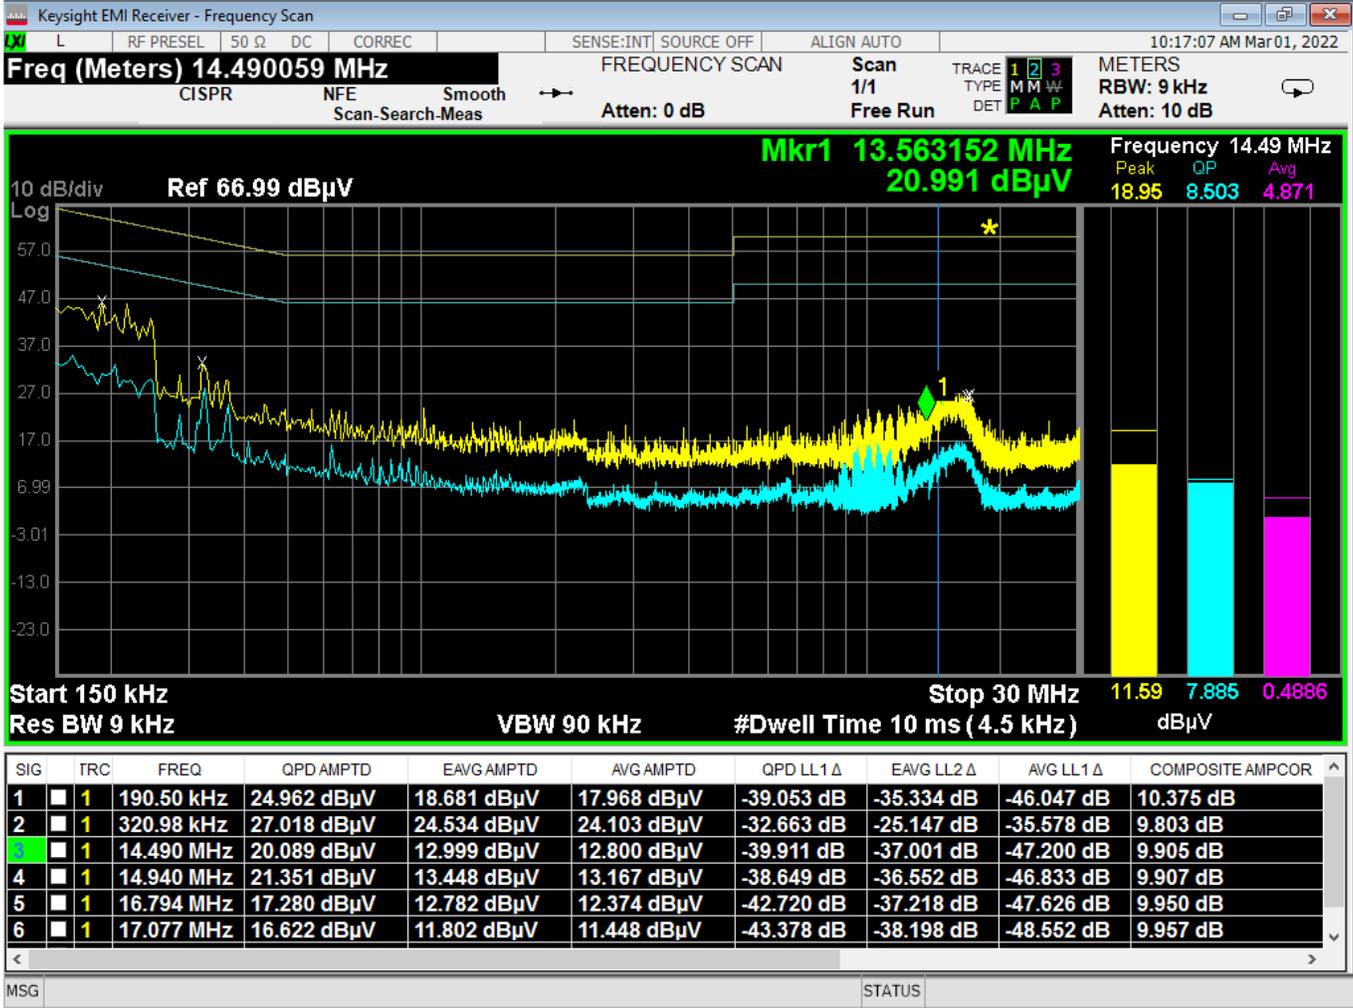


Figure 19 - Conducted Emissions Plot, Line, IDLE

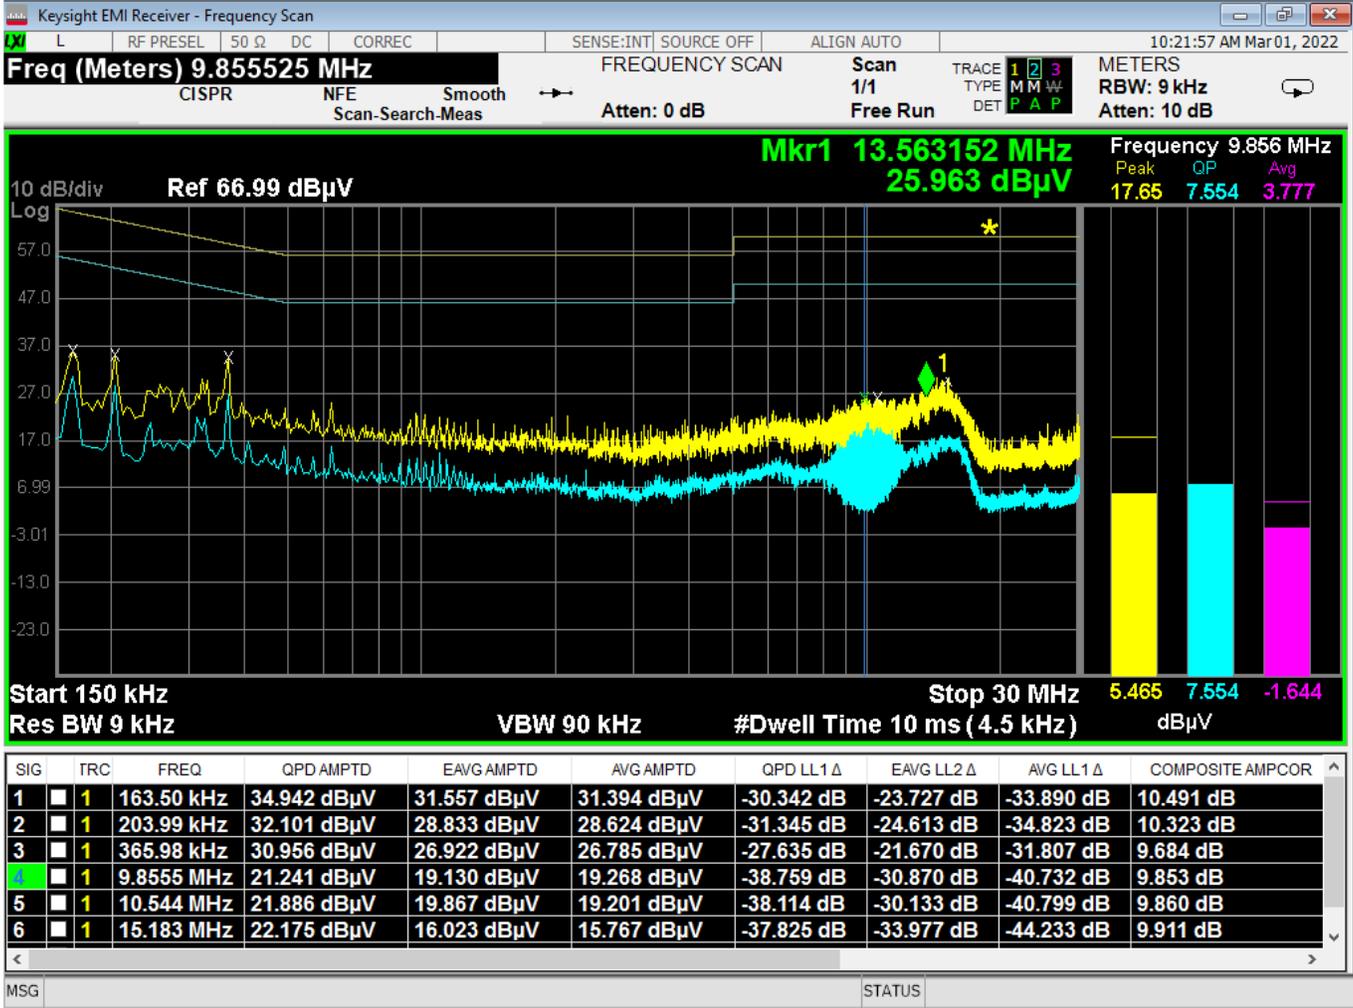


Figure 20 - Conducted Emissions Plot, Neutral, IDLE



Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

APPENDIX A: SAMPLE CALCULATION

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF - (-CF + AG) + AV$$

where FS = Field Strength

- RA = Receiver Amplitude
- AF = Antenna Factor
- CF = Cable Attenuation Factor
- AG = Amplifier Gain
- AV = Averaging Factor (if applicable)

Assume a receiver reading of 55 dB μ V is obtained. The Antenna Factor of 12 and a Cable Factor of 1.1 is added. The Amplifier Gain of 20 dB is subtracted, giving a field strength of 48.1 dB μ V/m.

$$FS = 55 + 12 - (-1.1 + 20) + 0 = 48.1 \text{ dB}\mu\text{V/m}$$

The 48.1 dB μ V/m value can be mathematically converted to its corresponding level in μ V/m.

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(48.1 \text{ dB}\mu\text{V/m})/20] = 254.1 \mu\text{V/m}$$

AV is calculated by the taking the $20 \cdot \log(T_{on}/100)$ where T_{on} is the maximum transmission time in any 100ms window.



Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

EIRP Calculations

In cases where direct antenna port measurement is not possible or would be inaccurate, output power is measured in EIRP. The maximum field strength is measured at a specified distance and the EIRP is calculated using the following equation;

$$EIRP (Watts) = [Field Strength (V/m) \times antenna distance (m)]^2 / 30$$

$$Power (watts) = 10^{[Power (dBm)/10]} / 1000$$

$$Voltage (dB\mu V) = Power (dBm) + 107 \text{ (for } 50\Omega \text{ measurement systems)}$$

$$Field Strength (V/m) = 10^{[Field Strength (dB\mu V/m) / 20]} / 10^6$$

$$Gain = 1 \text{ (numeric gain for isotropic radiator)}$$

Conversion from 3m field strength to EIRP (d=3):

$$EIRP = [FS(V/m) \times d^2]/30 = FS [0.3] \quad \text{for } d = 3$$

$$EIRP(dBm) = FS(dB\mu V/m) - 10(\log 10^9) + 10\log[0.3] = FS(dB\mu V/m) - 95.23$$

10log(10^9) is the conversion from micro to milli



Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

APPENDIX B – MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been for tests performed in this test report:


Test	Frequency Range	Uncertainty Value (dB)
Radiated Emissions, 3m	30MHz - 1GHz	3.82
Radiated Emissions, 3m	1GHz - 18GHz	4.44
Emissions limits, conducted	30MHz – 18GHz	±3.30 dB

Expanded uncertainty values are calculated to a confidence level of 95%.



Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

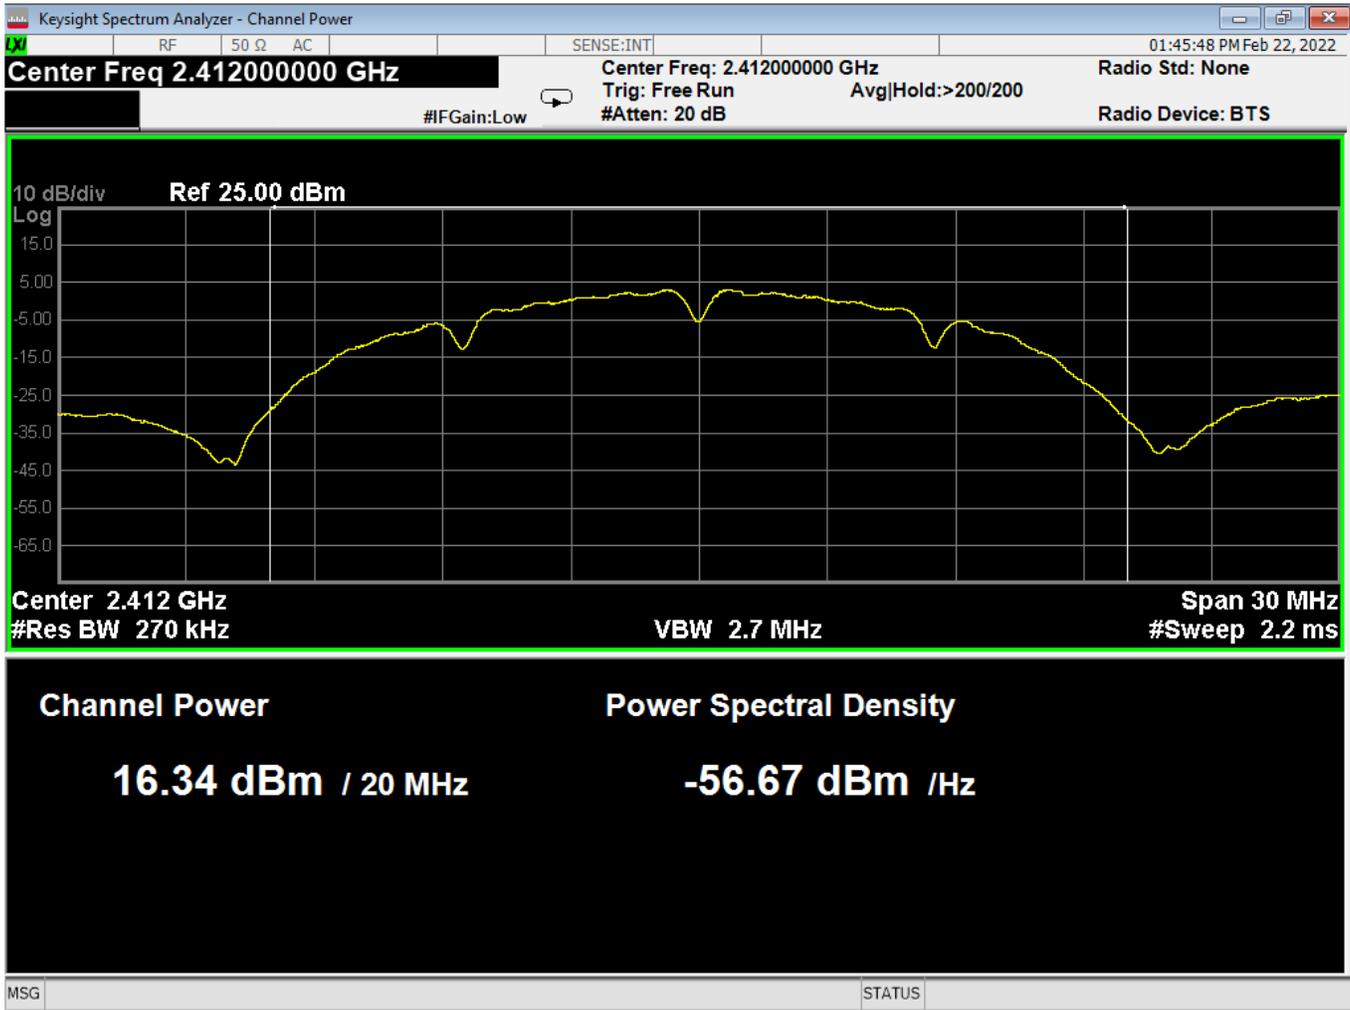
APPENDIX C – GRAPHS AND TABLES



01 Average Power, Low, Wifi B, Low Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

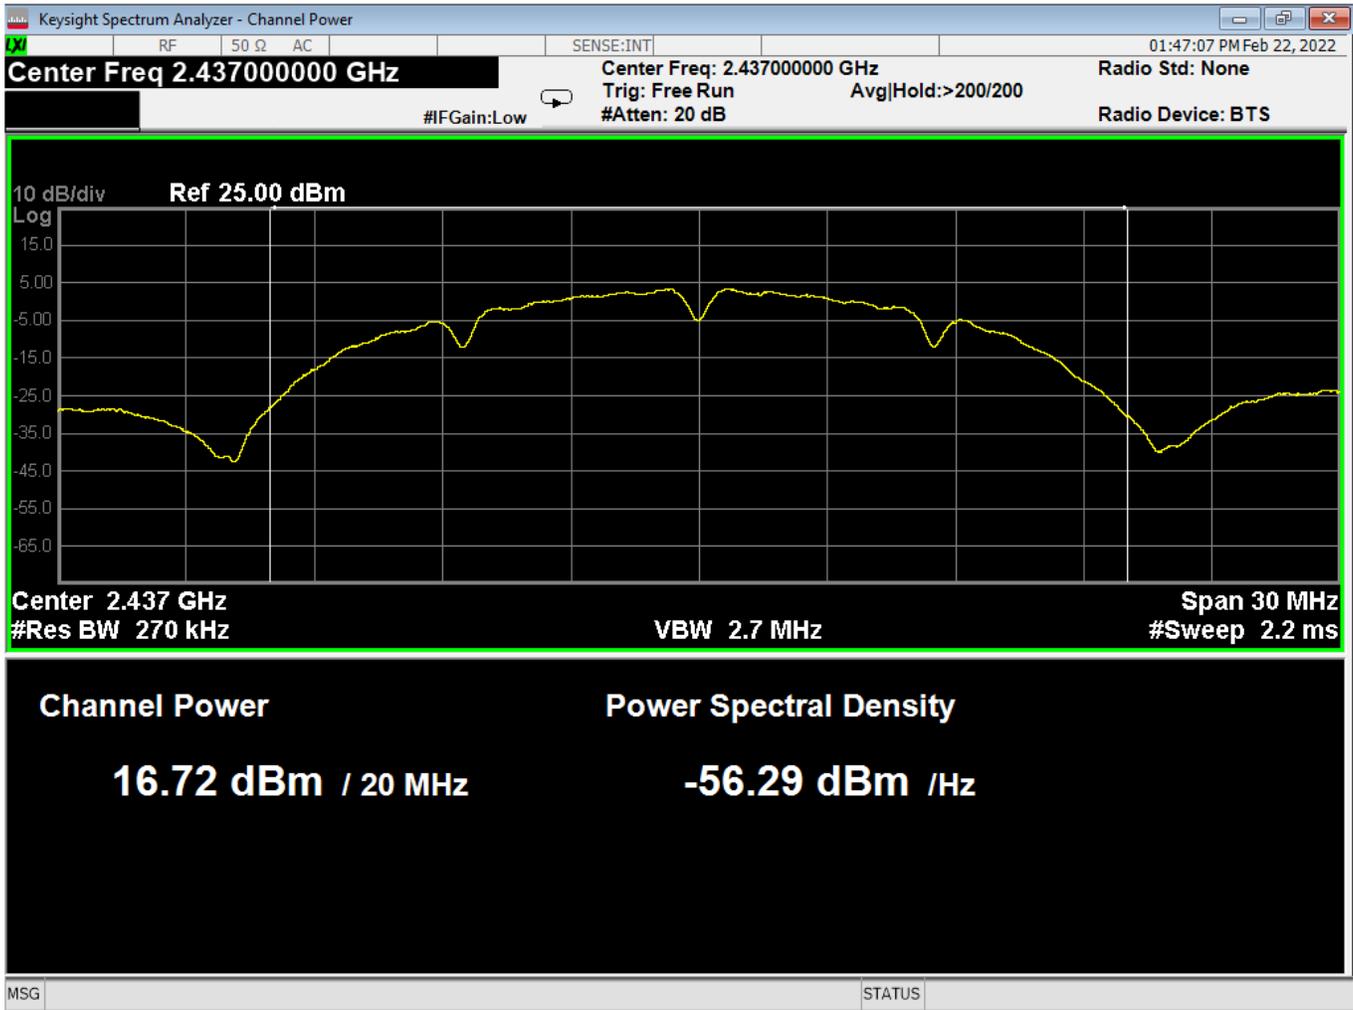

02 Average Power, Mid, Wifi B, Low Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

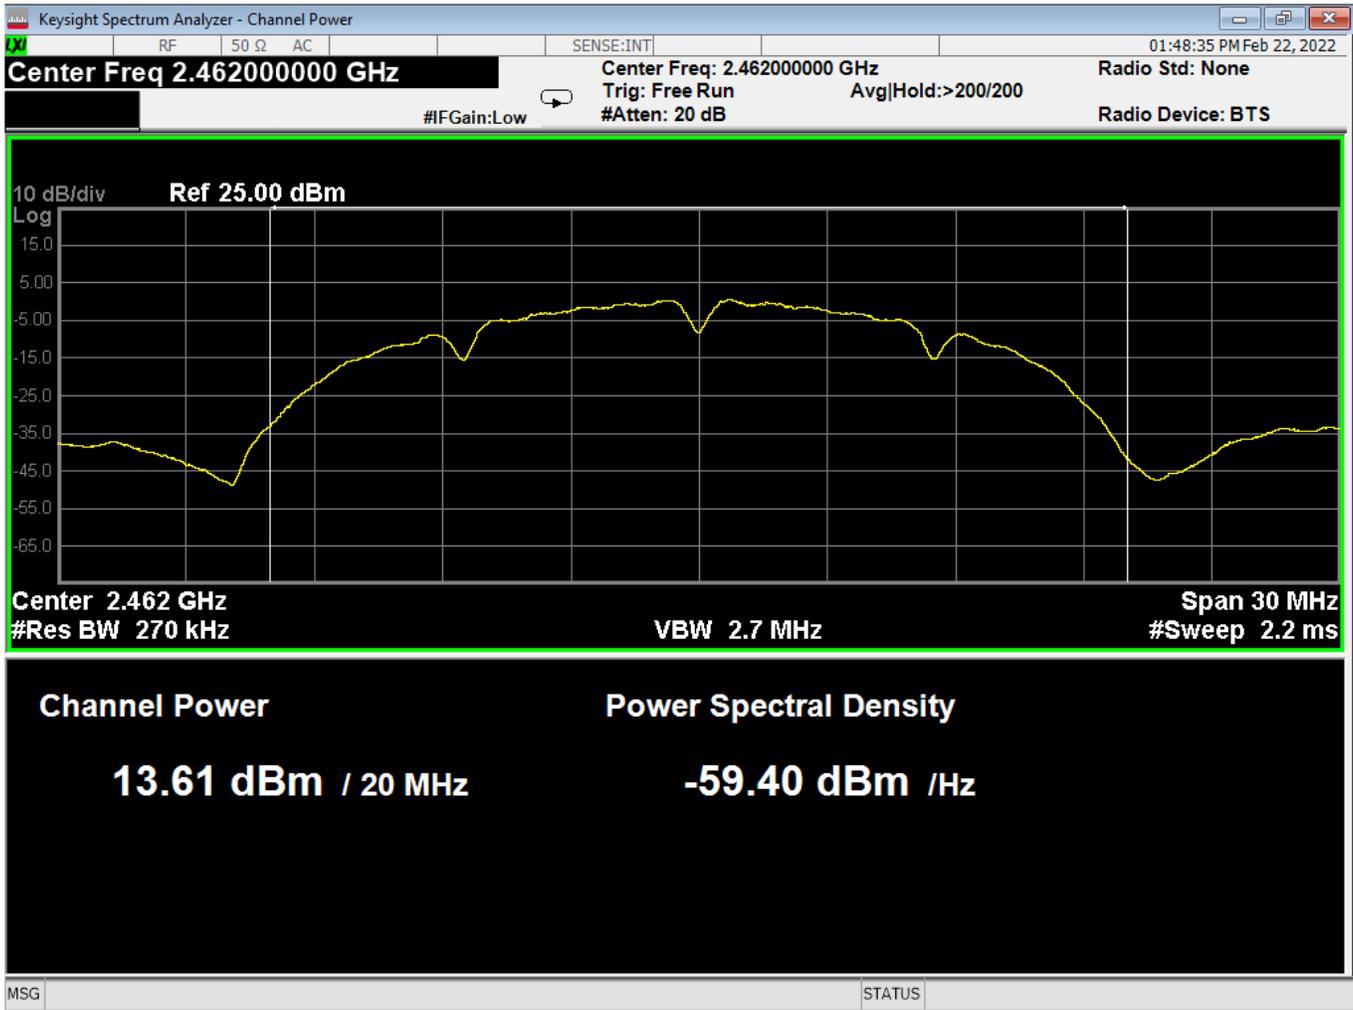

03 Average Power, High, Wifi B, Low Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

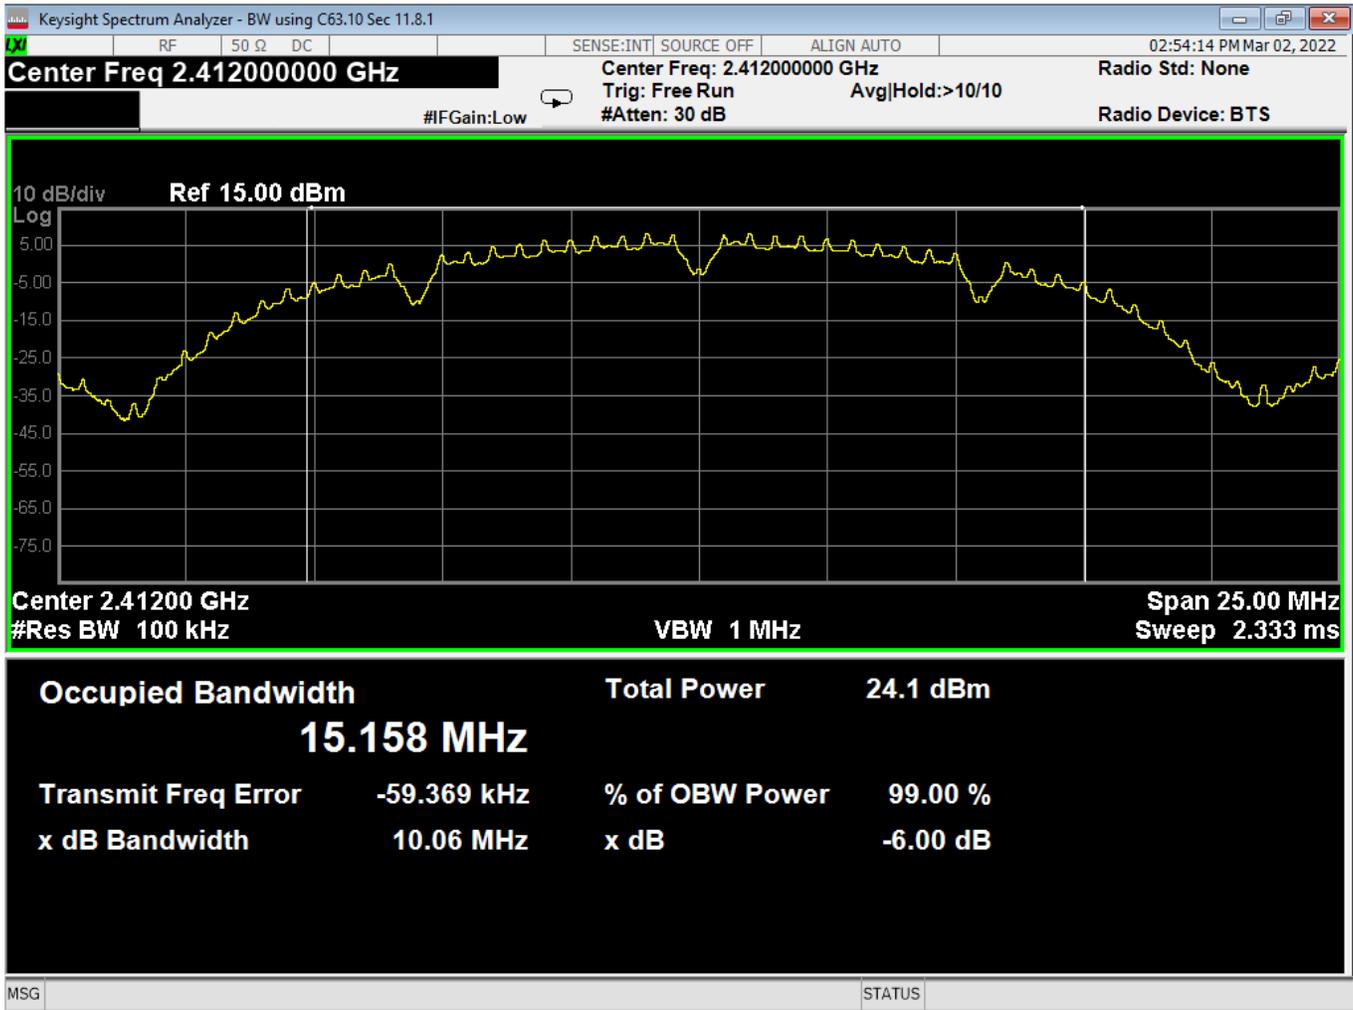

04 OBW-6dB, Low, Wifi B, Low Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

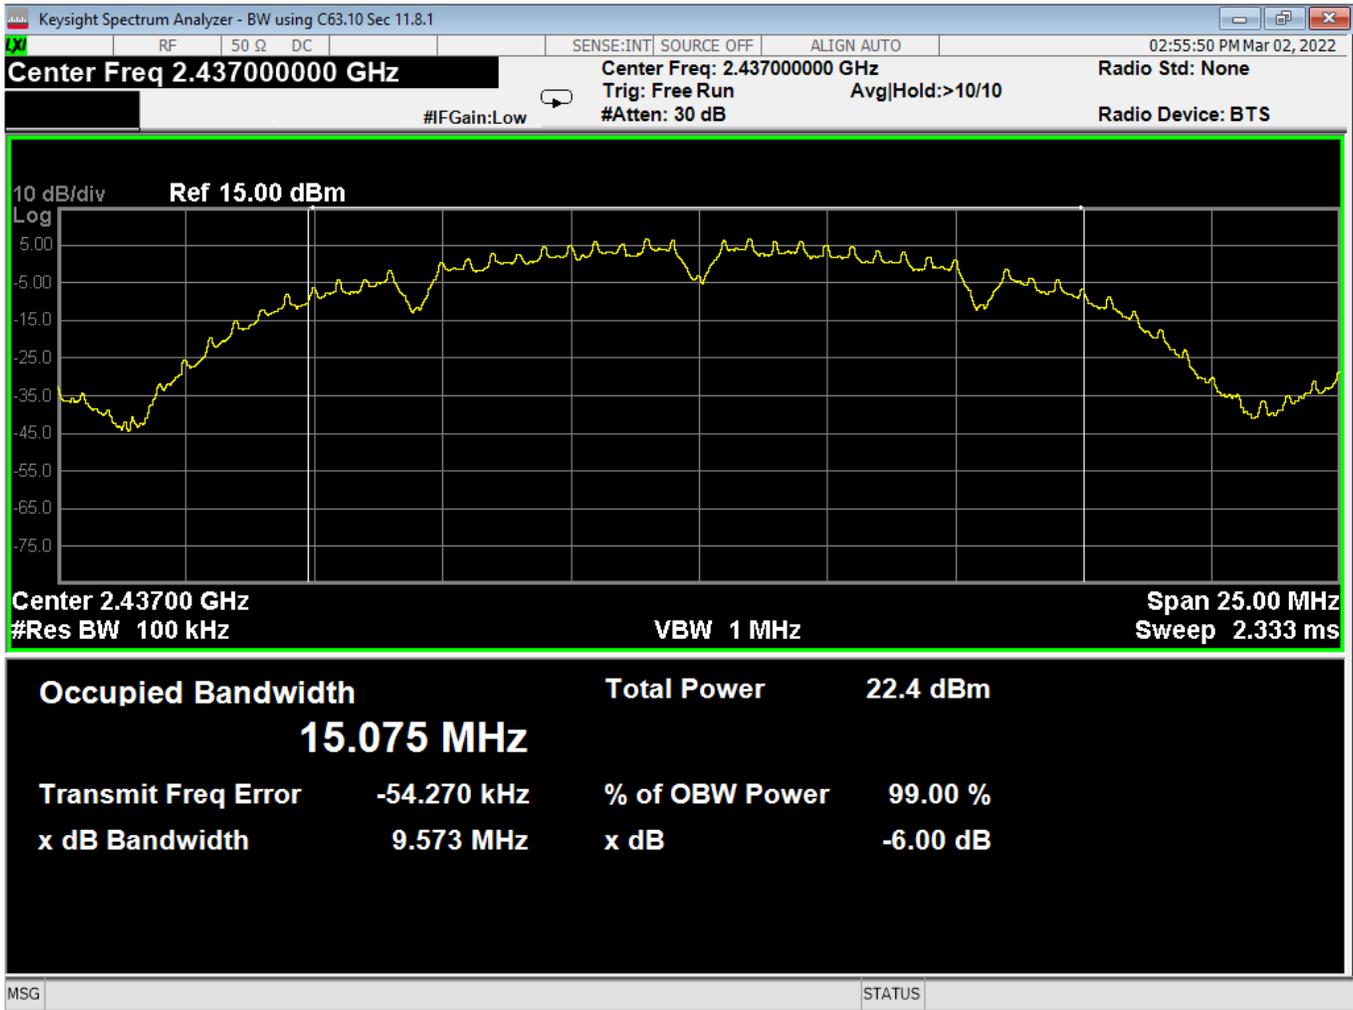

05 OBW-6dB, Mid, Wifi B, Low Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

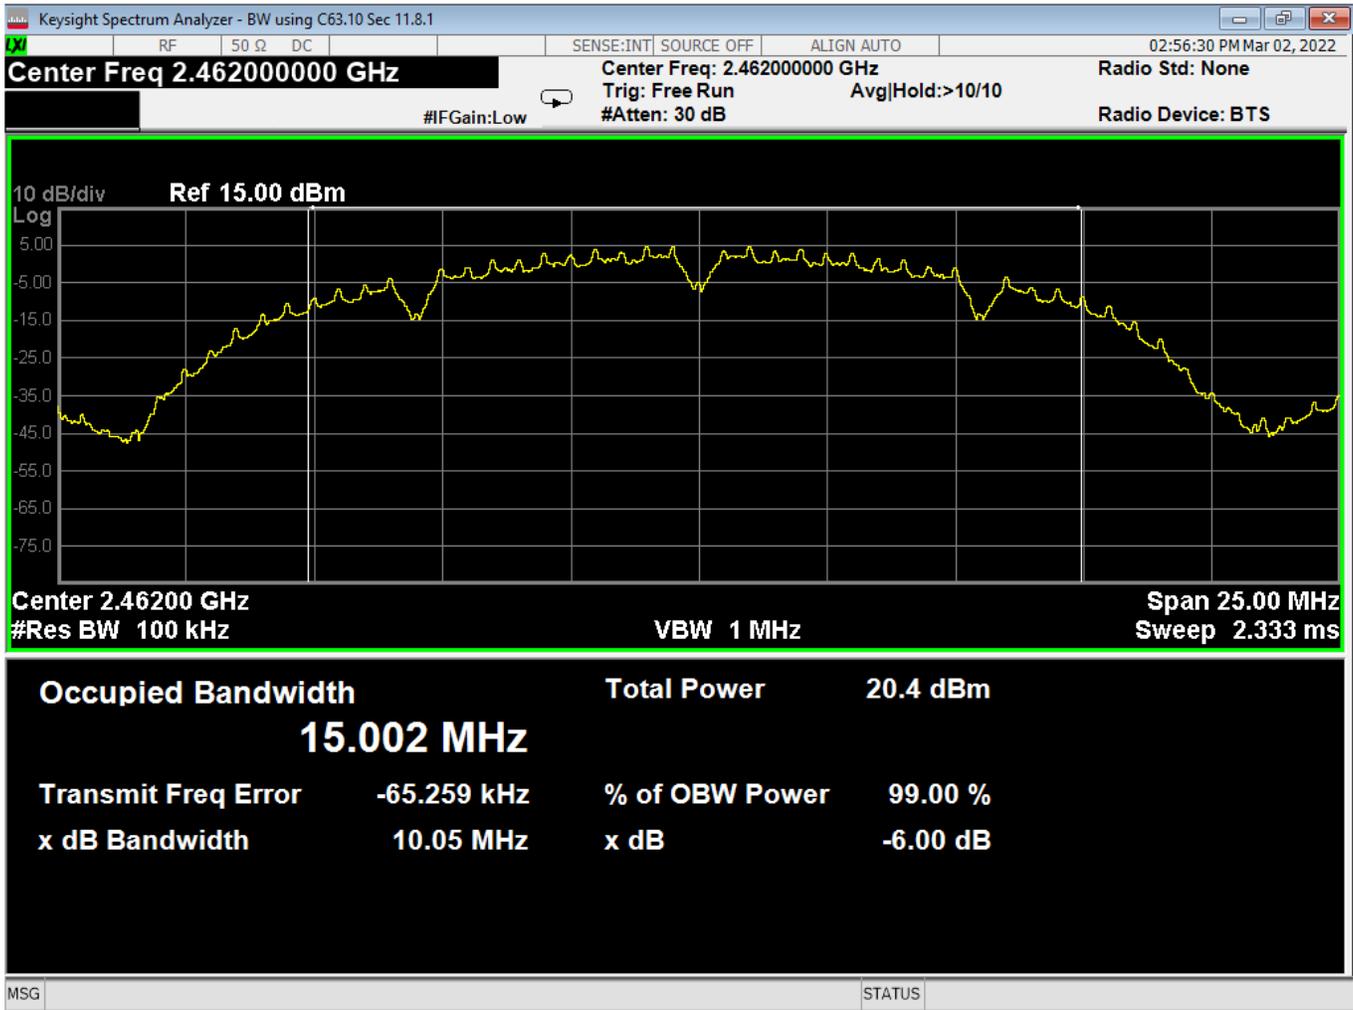

06 OBW-6dB, High, Wifi B, Low Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

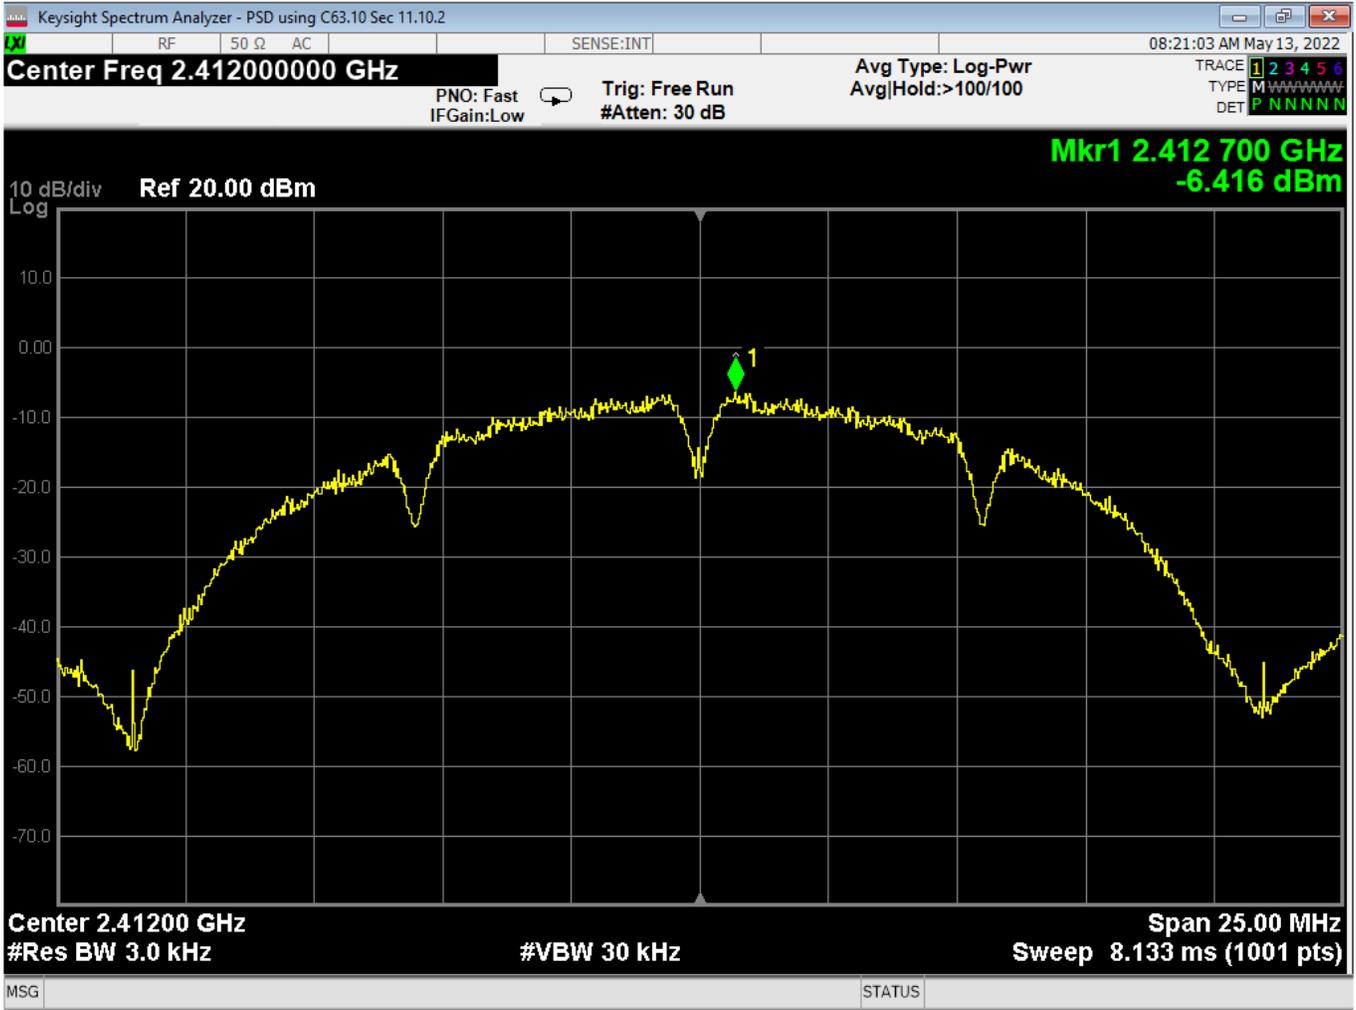

07 PSD, Low, Wifi B, Low Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

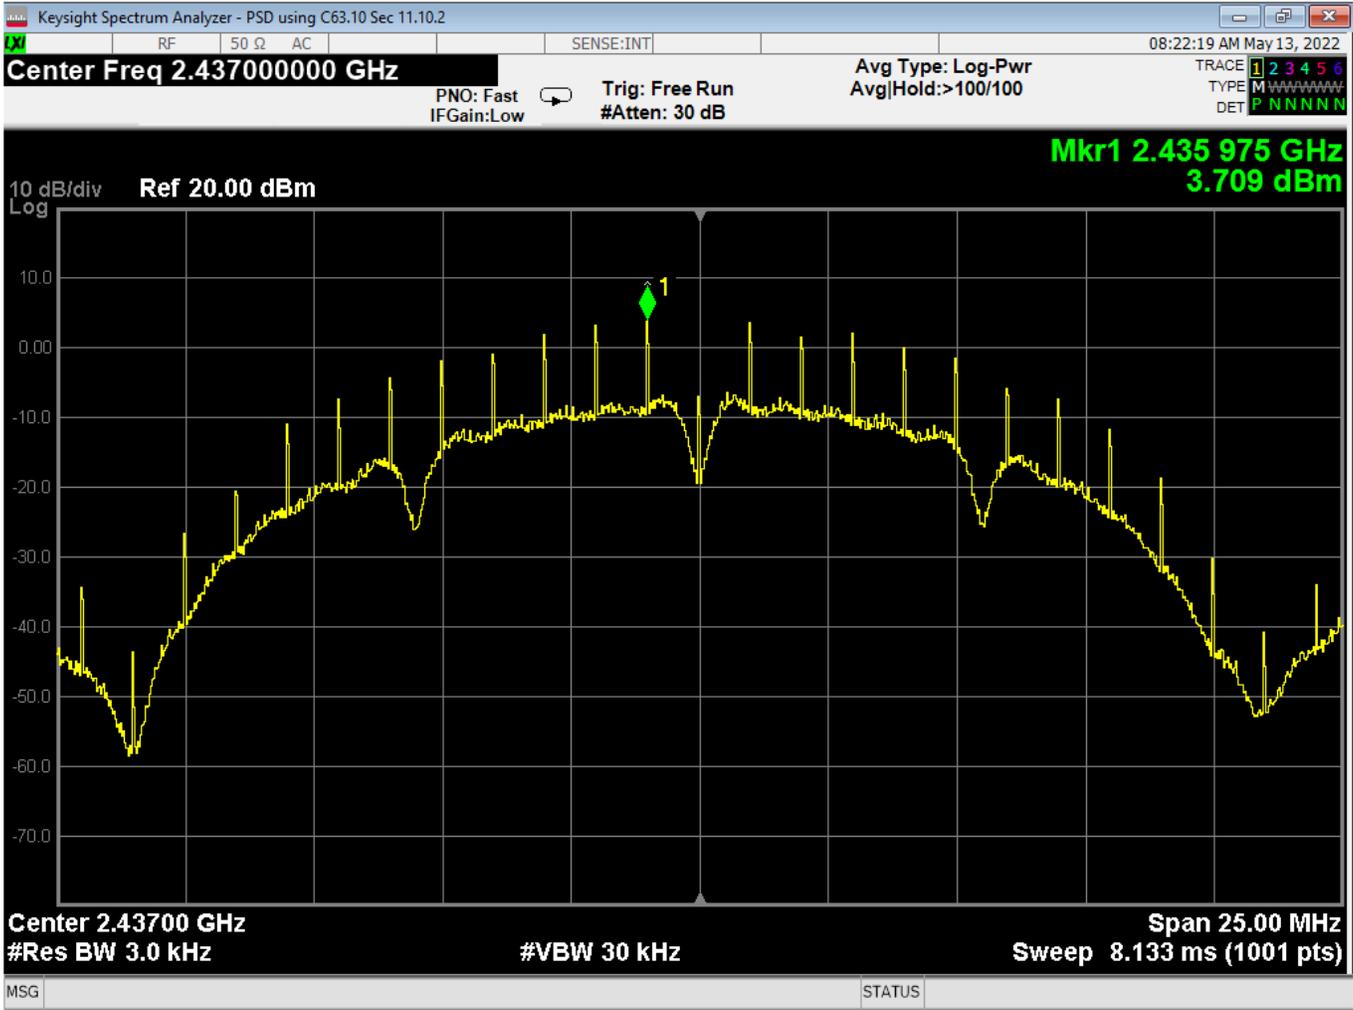

08 PSD, Mid, Wifi B, Low Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

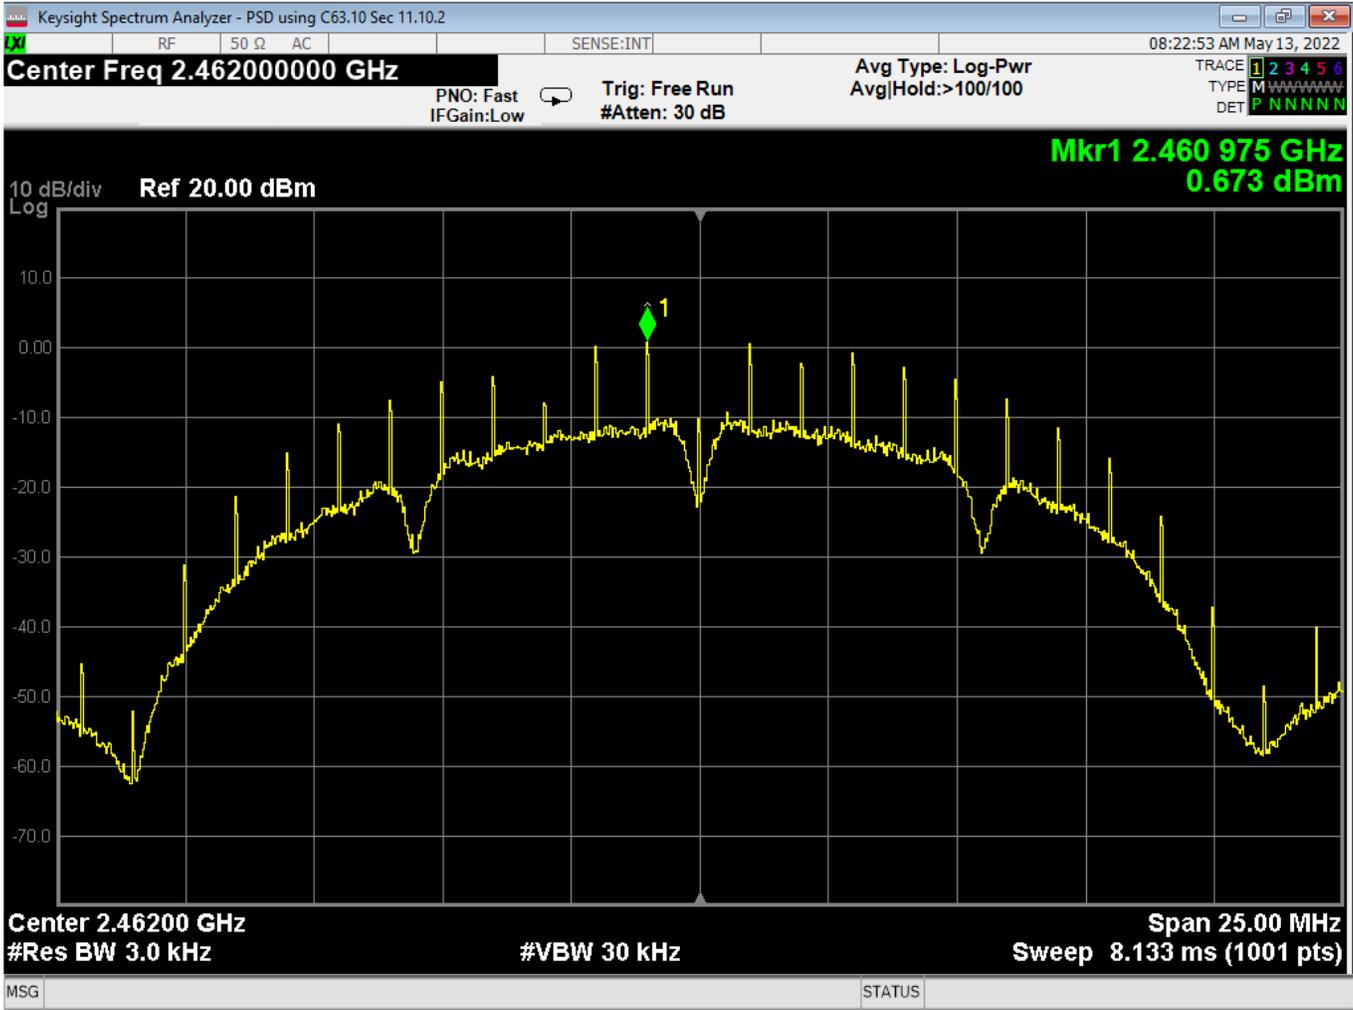

09 PSD, High, Wifi B, Low Data Rate



Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

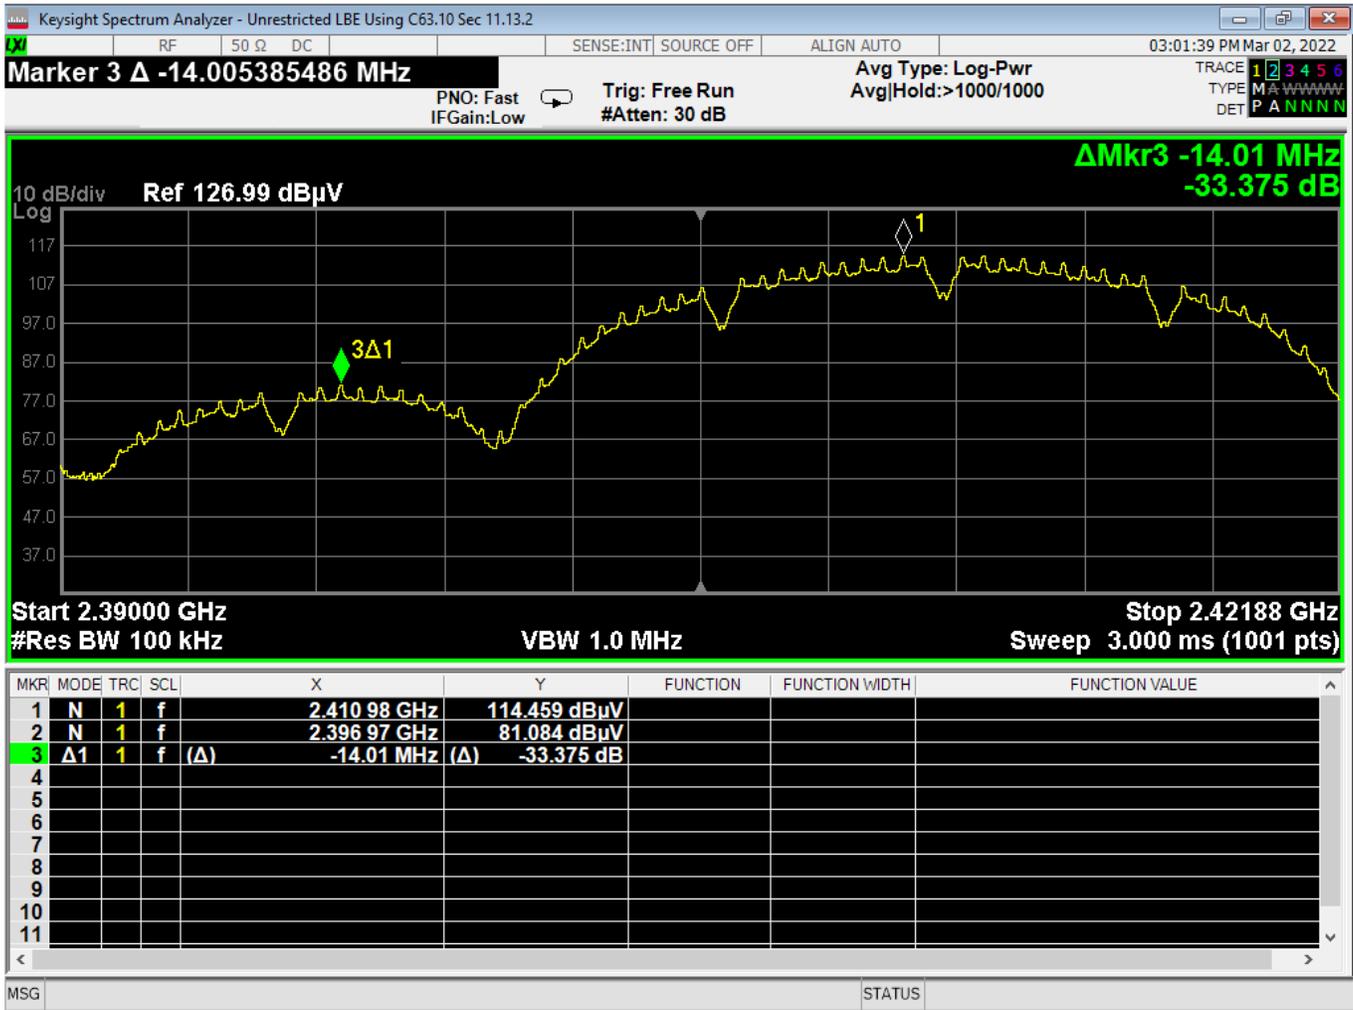

10 Lower Bandedge, Unrestricted, Wifi B, Low Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		



11 Higher Bandedge, Unrestricted, Wifi B, Low Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

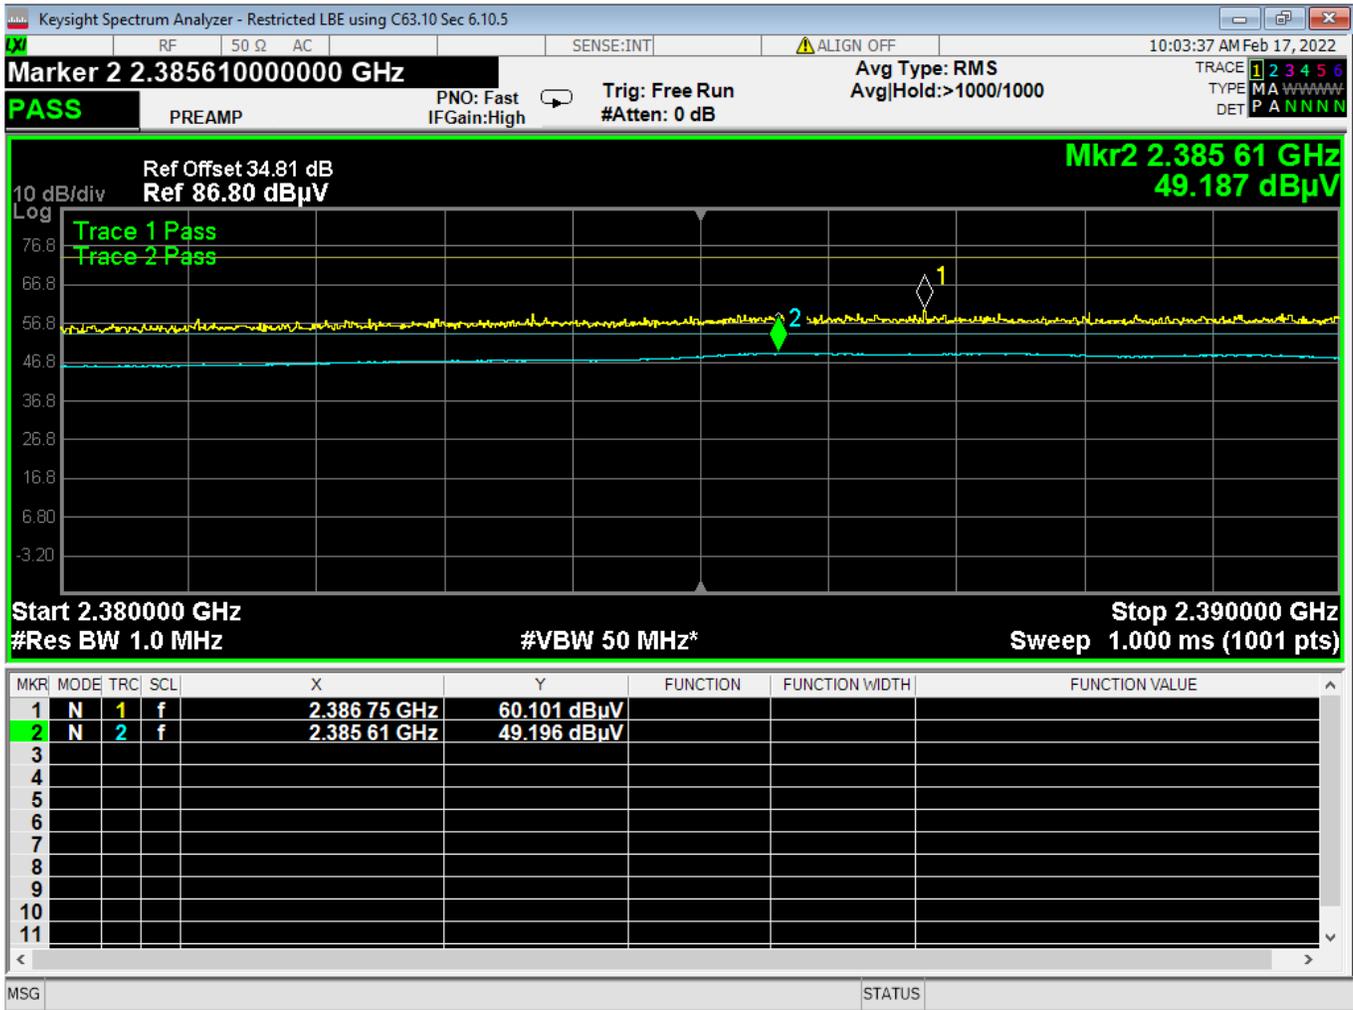

12 Lower Bandedge, Restricted, Wifi B, Low Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

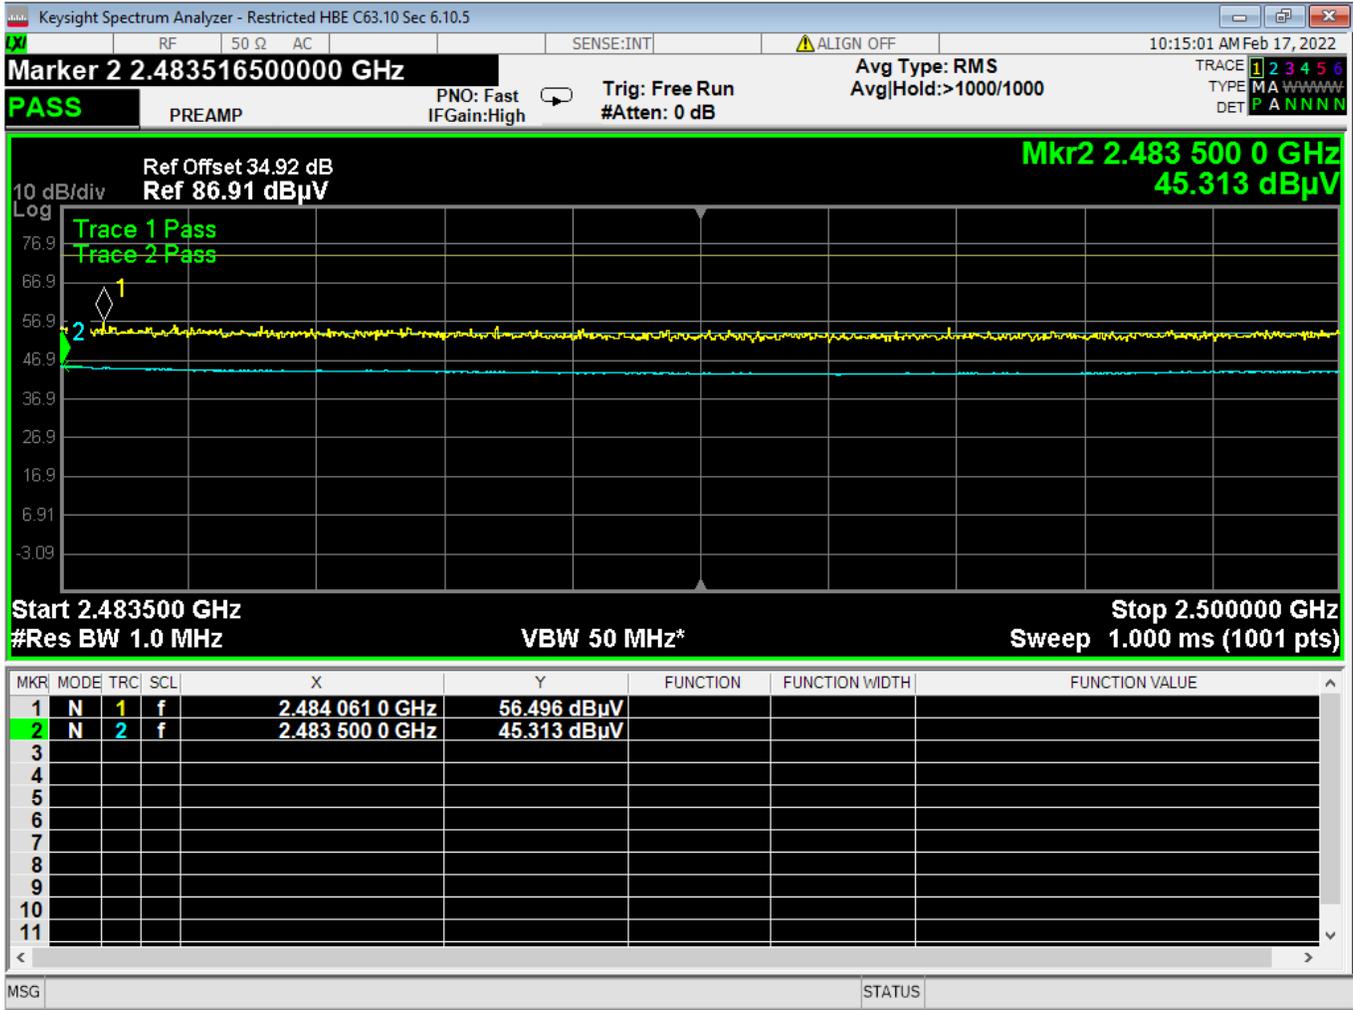

13 Higher Bandedge, Restricted, Wifi B, Low Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

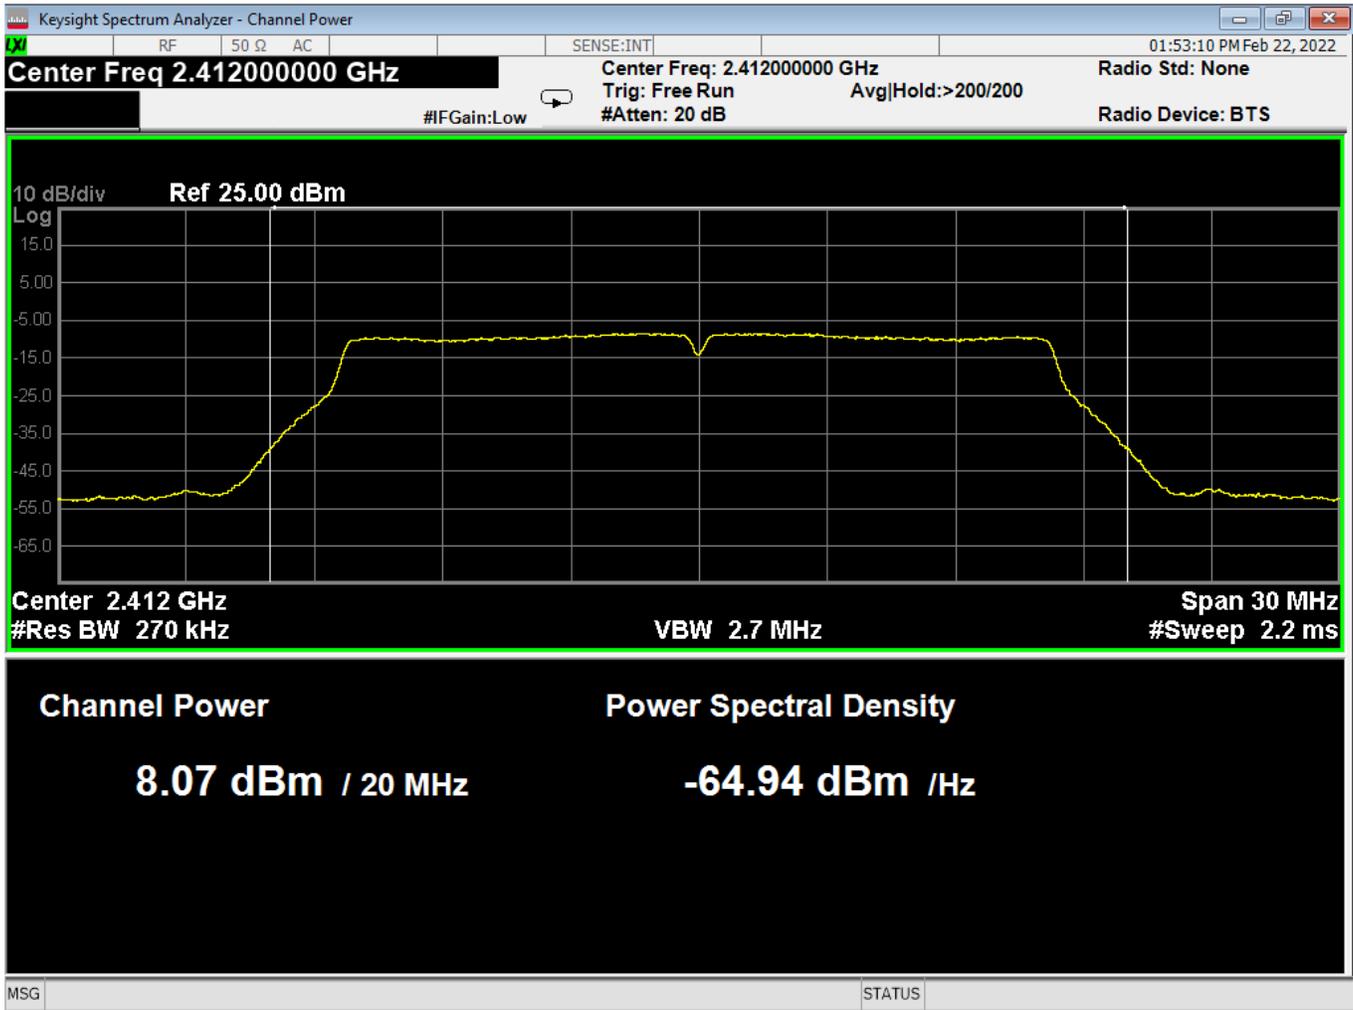

14 Average Power, Low, Wifi G, Low Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

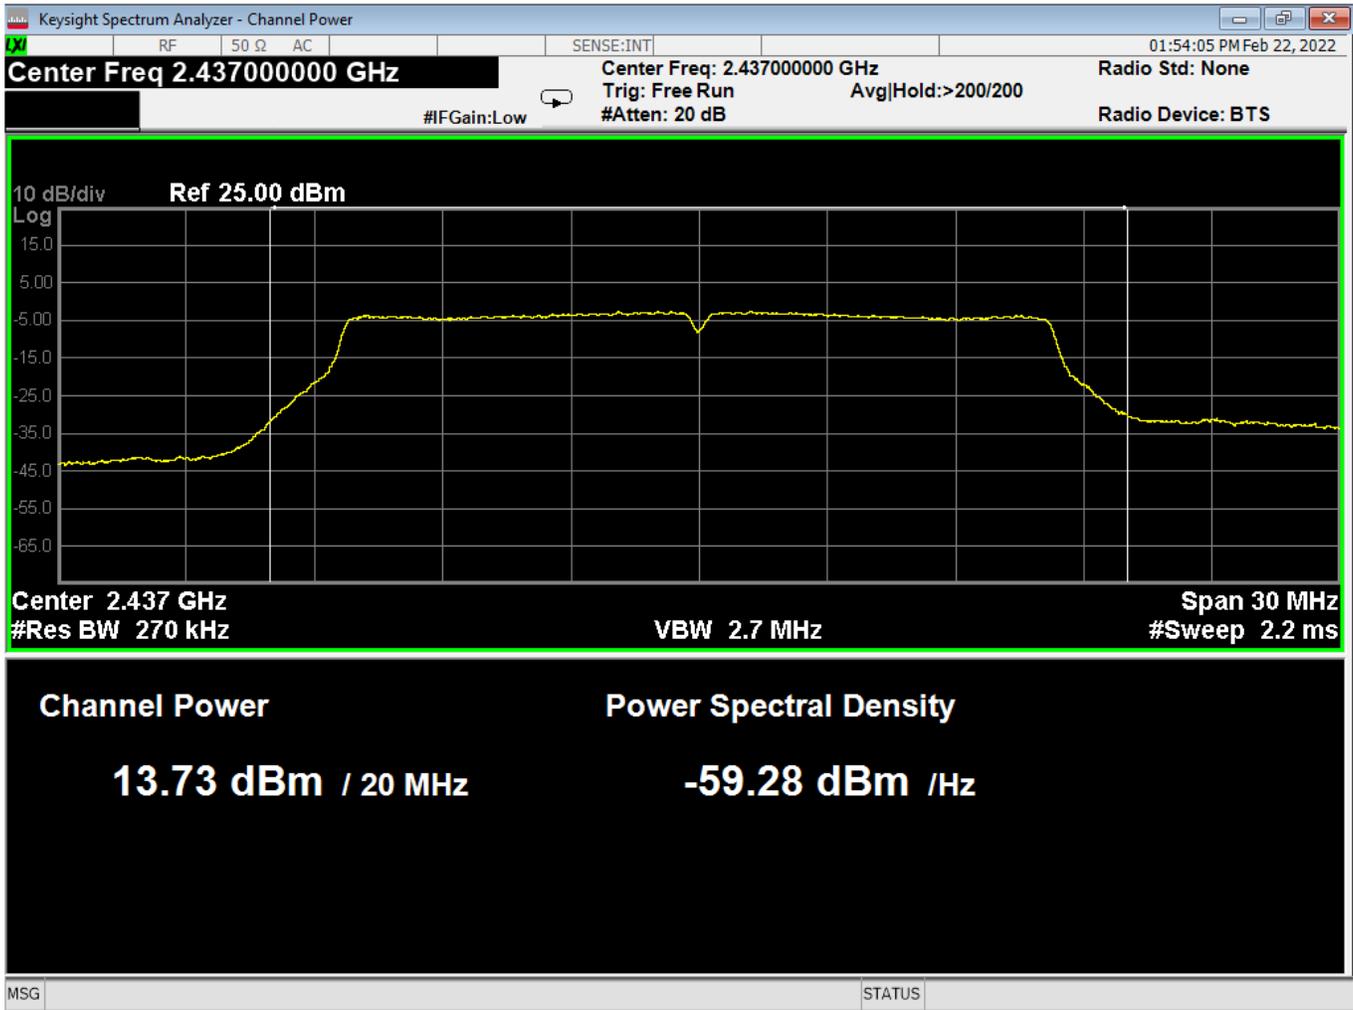

15 Average Power, Mid, Wifi G, Low Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

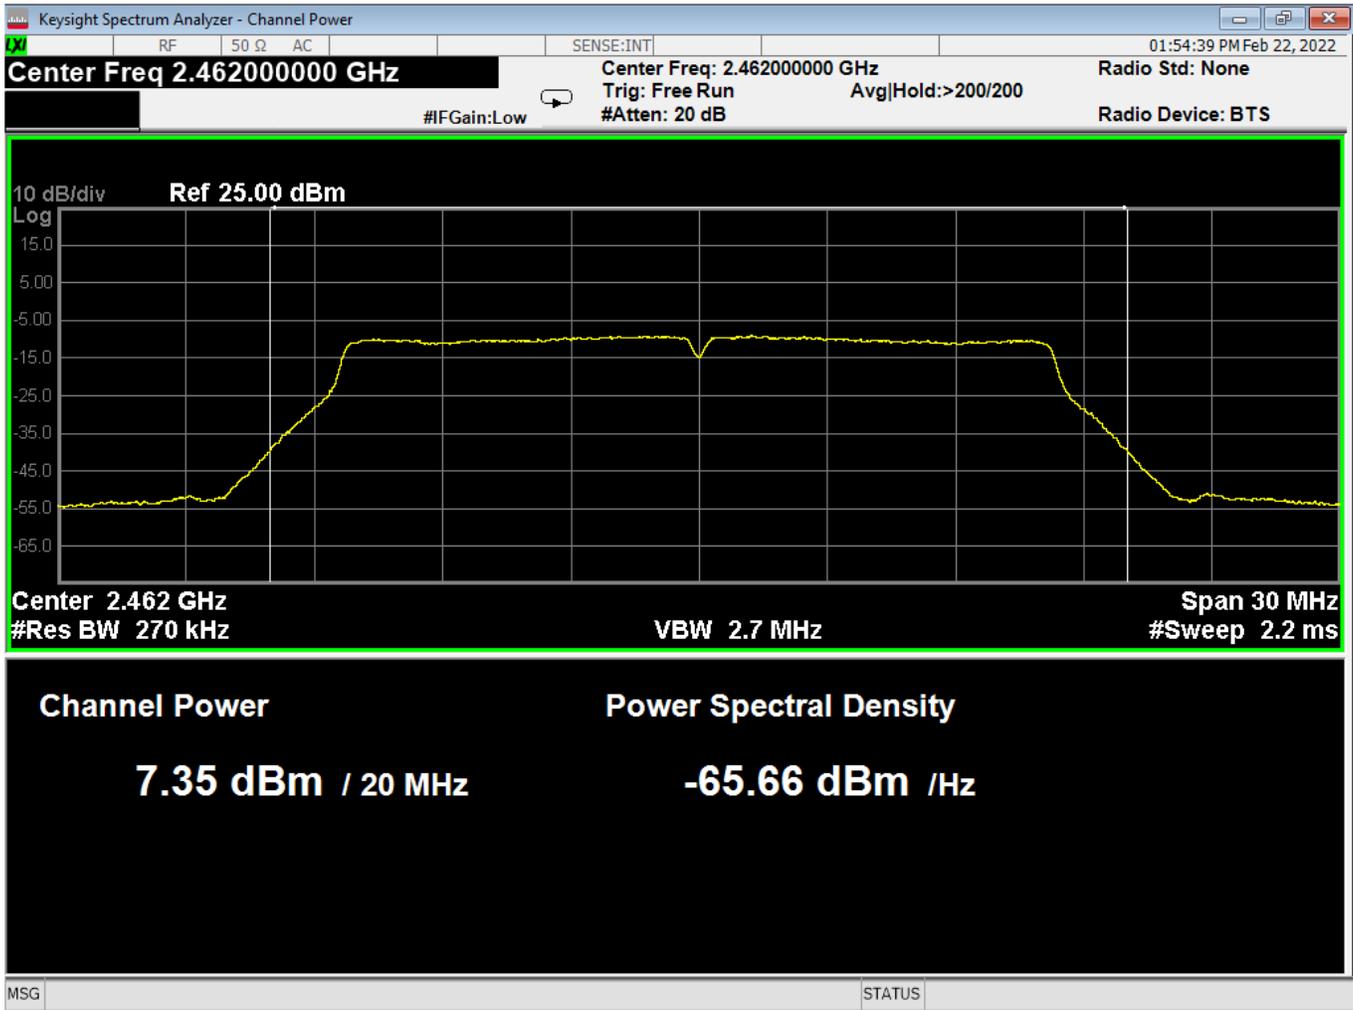

16 Average Power, High, Wifi G, Low Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

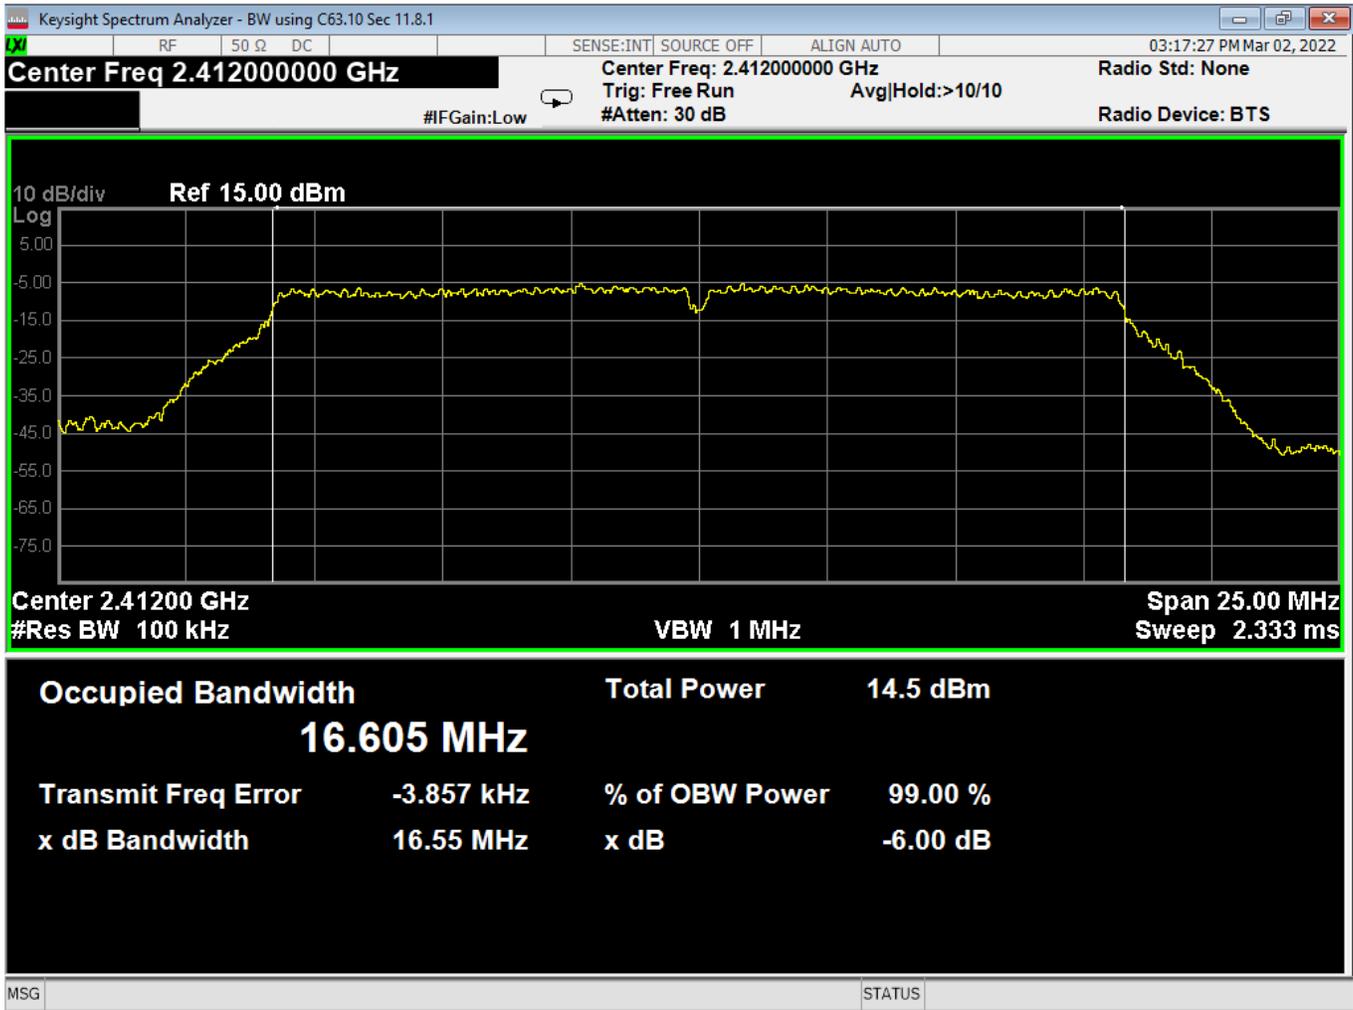

17 OBW-6dB, Low, Wifi G, Low Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

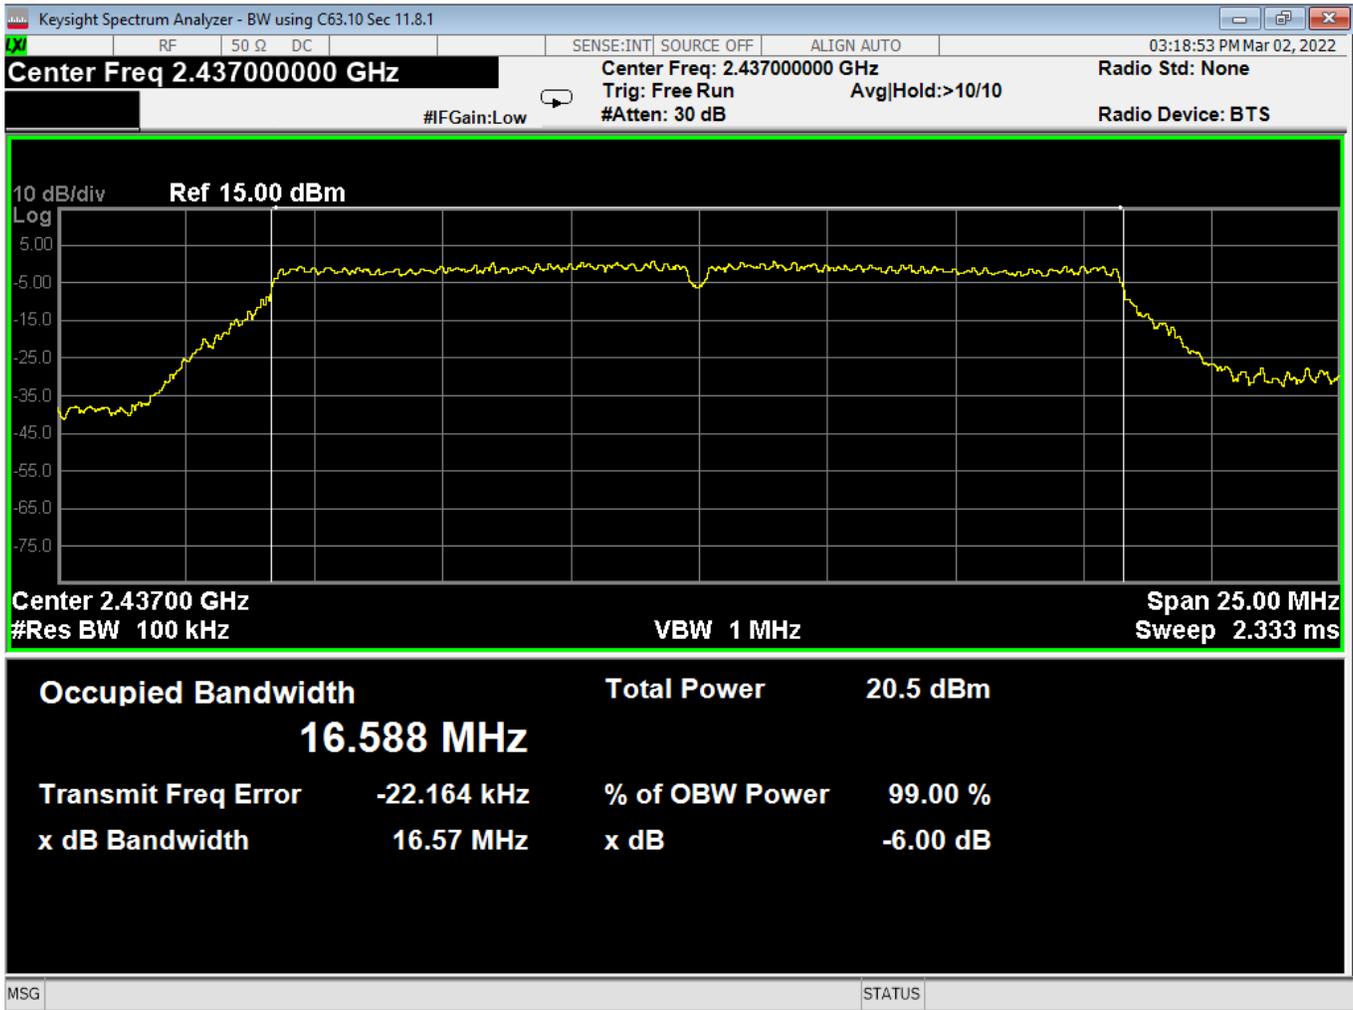

18 OBW-6dB, Mid, Wifi G, Low Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

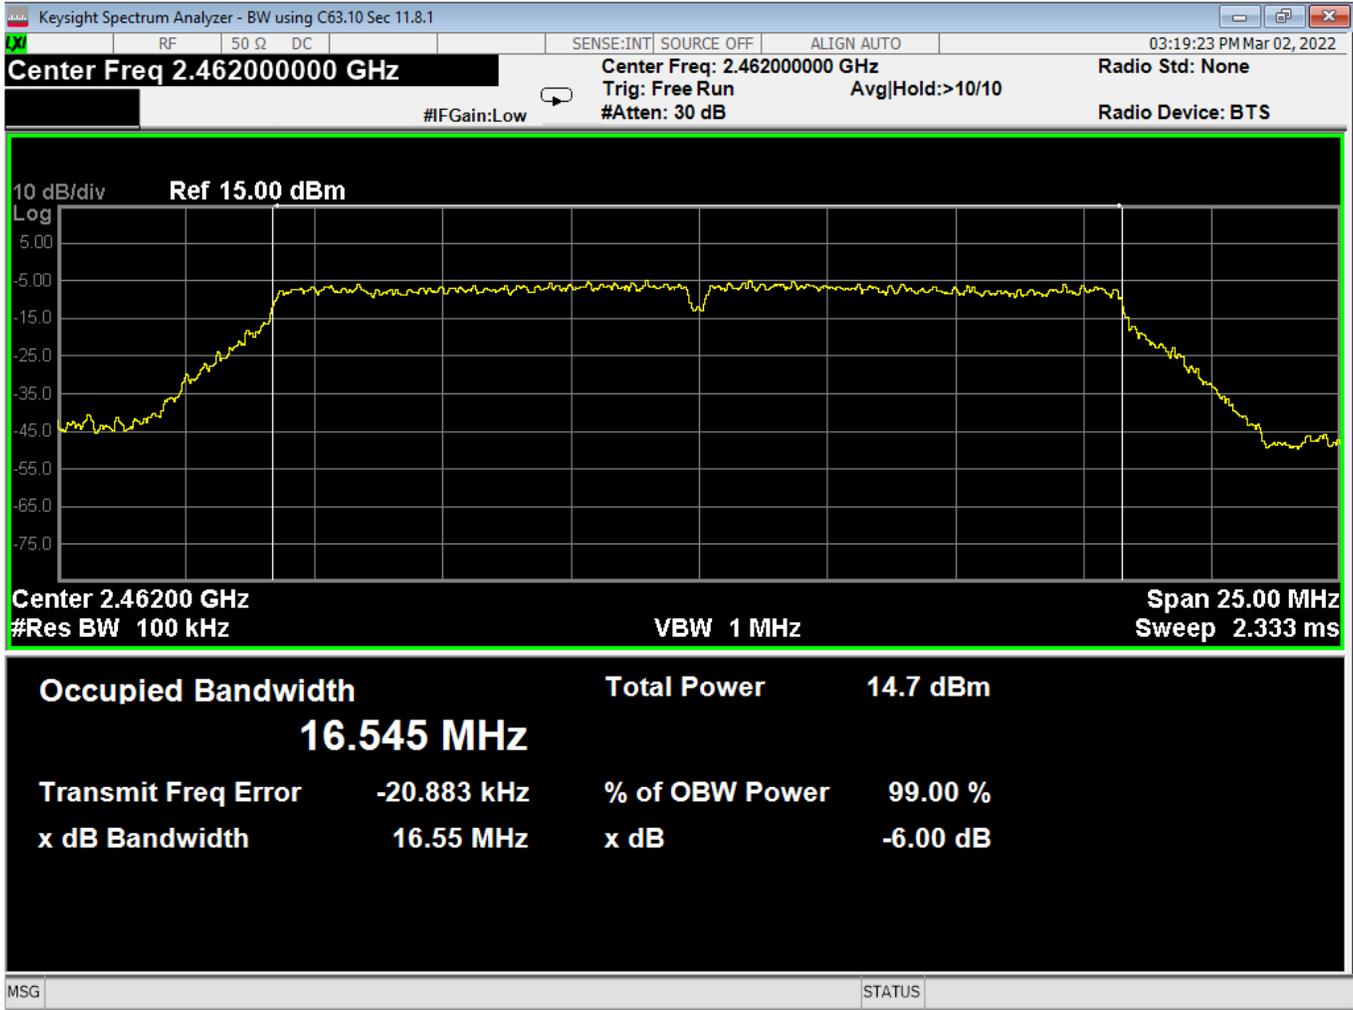

19 OBW-6dB, High, Wifi G, Low Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

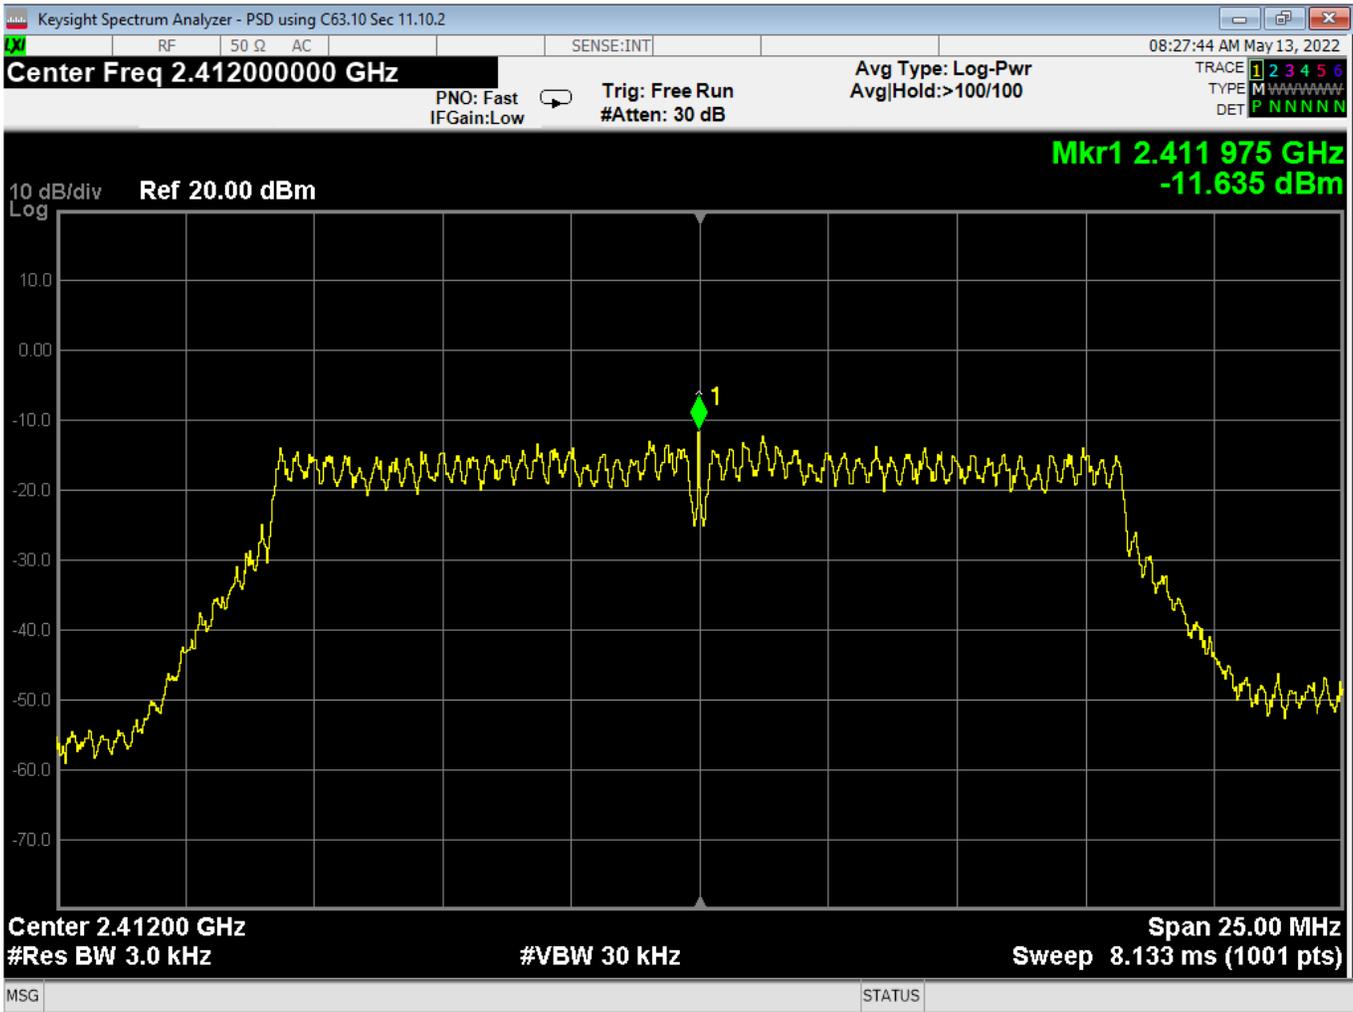

20 PSD, Low, Wifi G, Low Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

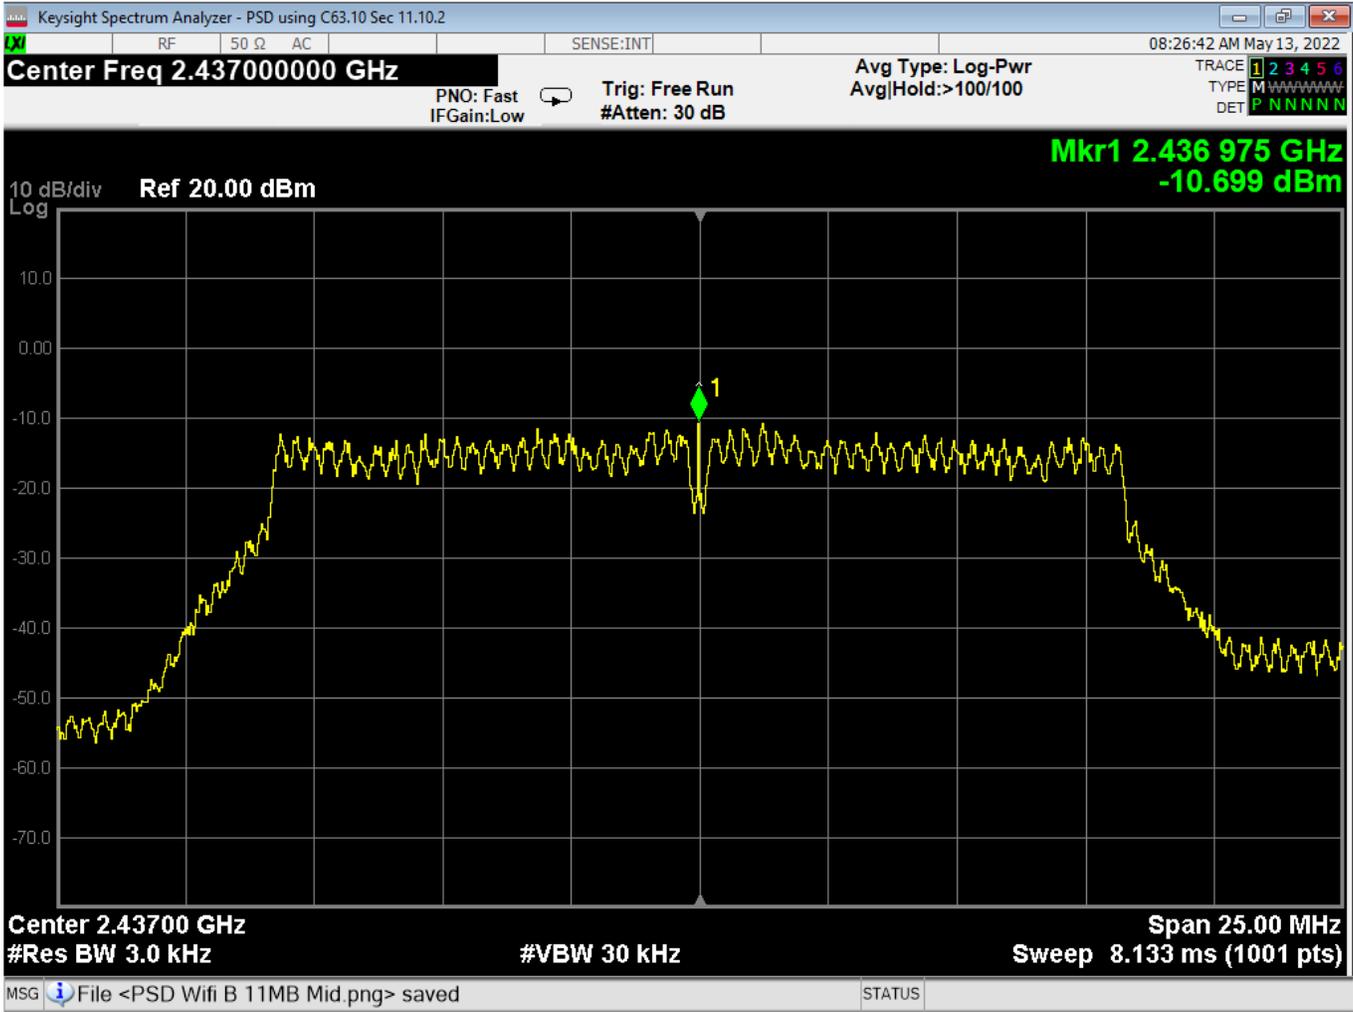

21 PSD, Mid, Wifi G, Low Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

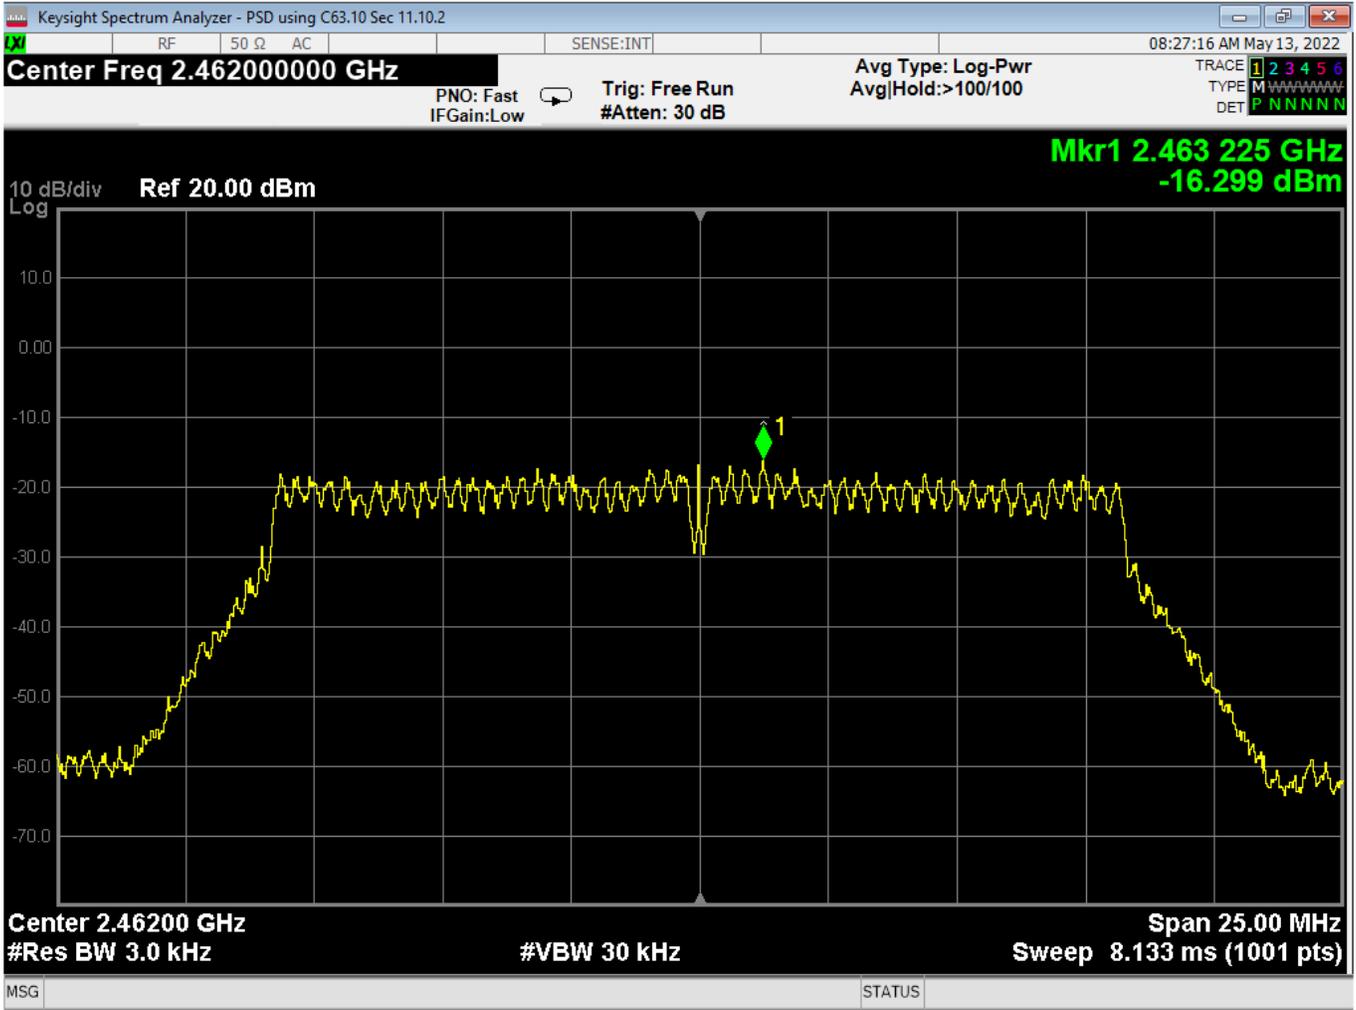

22 PSD, High, Wifi G, Low Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

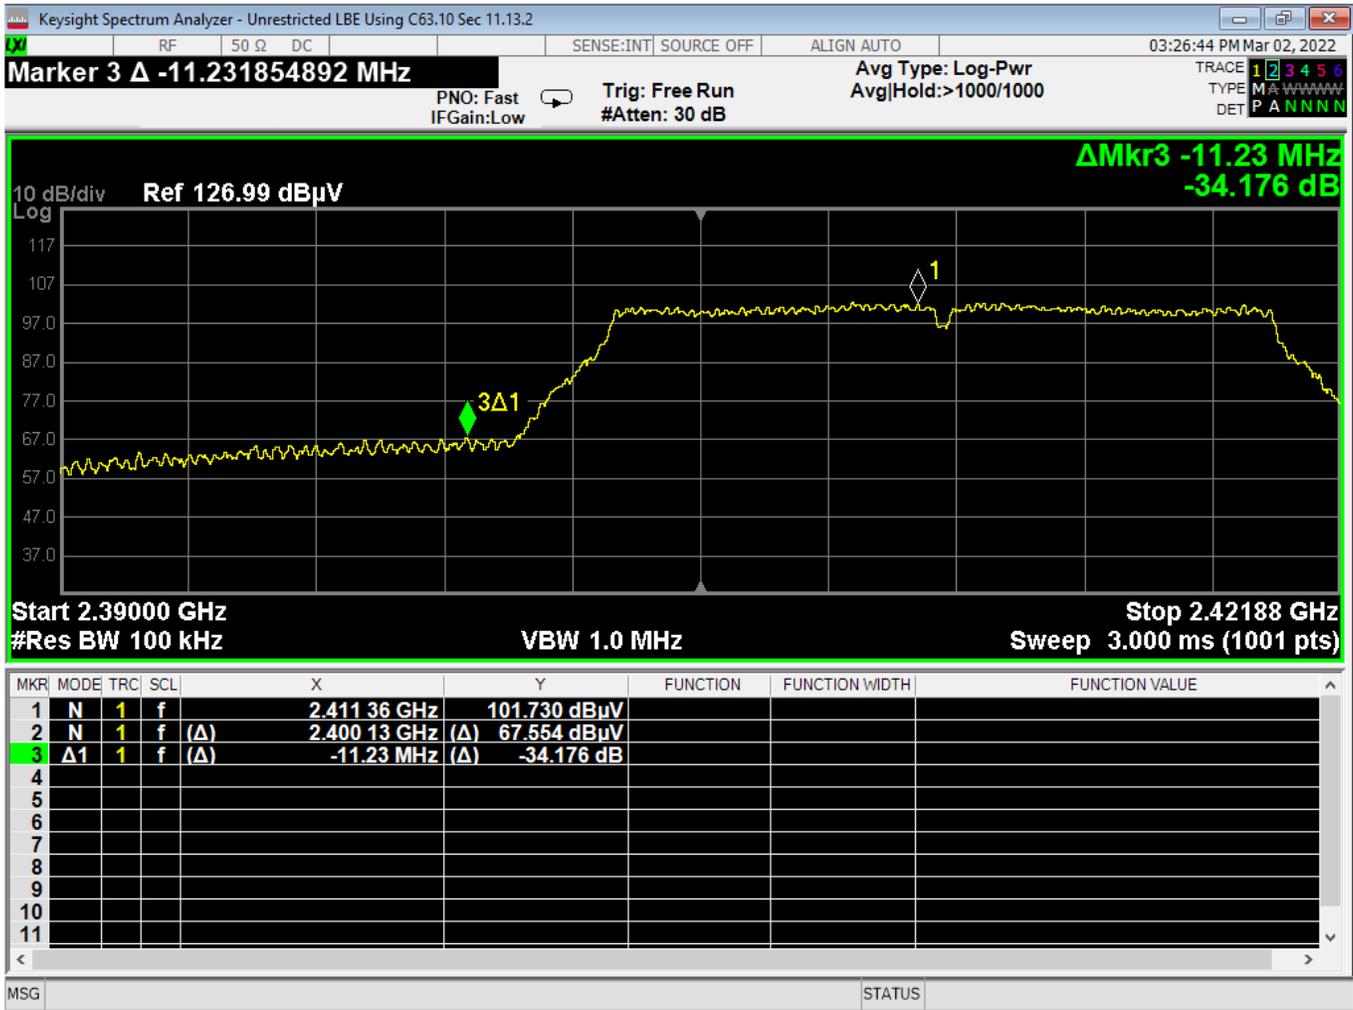

23 Lower Bandedge, Unrestricted, Wifi G, Low Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

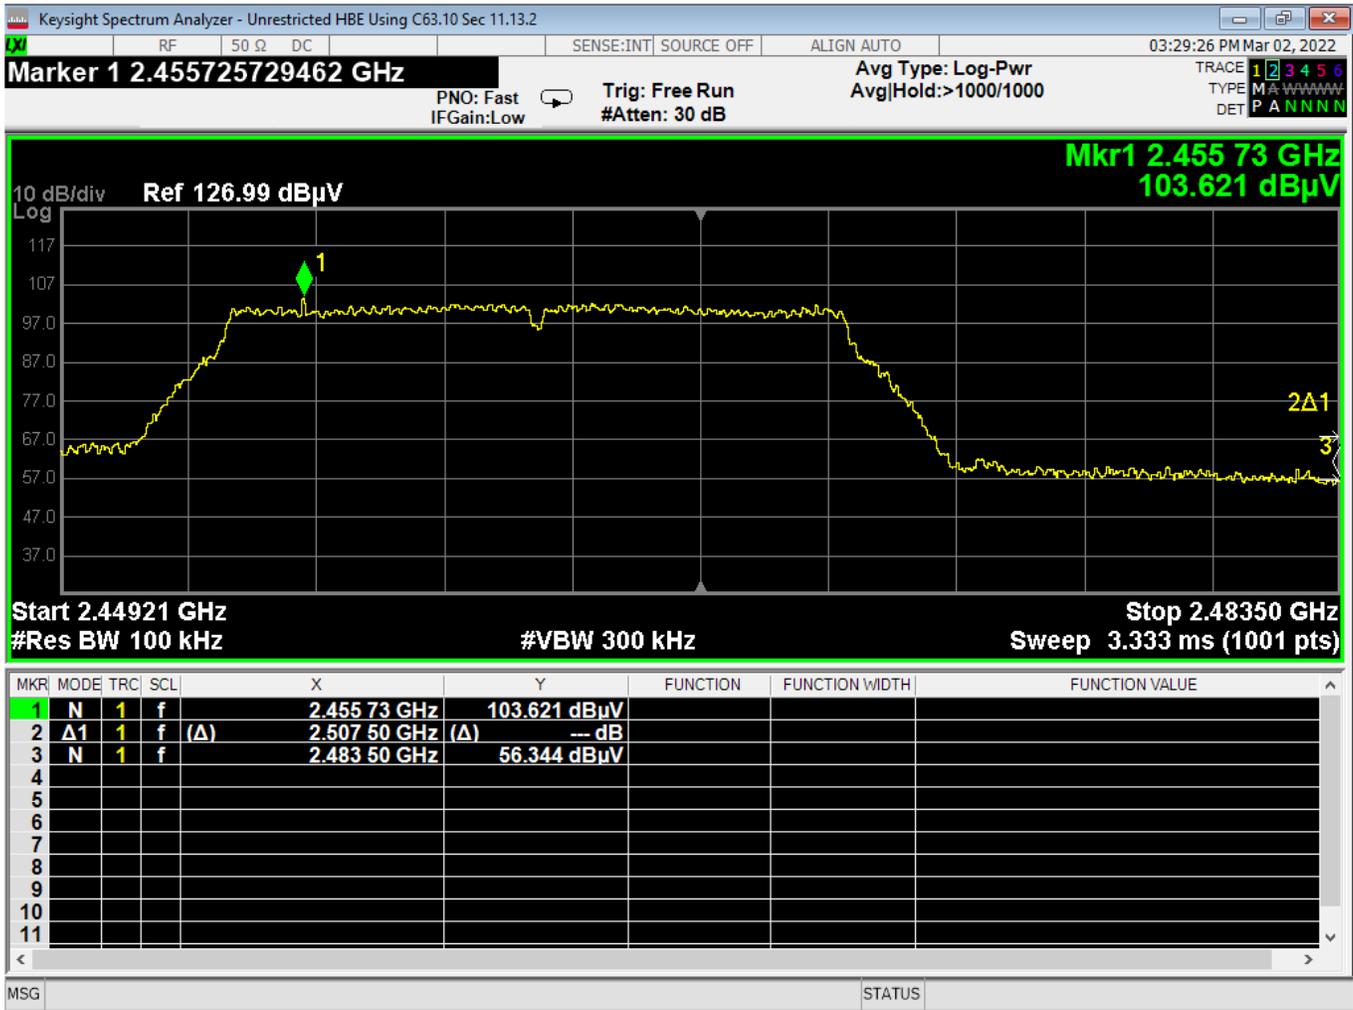

24 Higher Bandedge, Unrestricted, Wifi G, Low Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

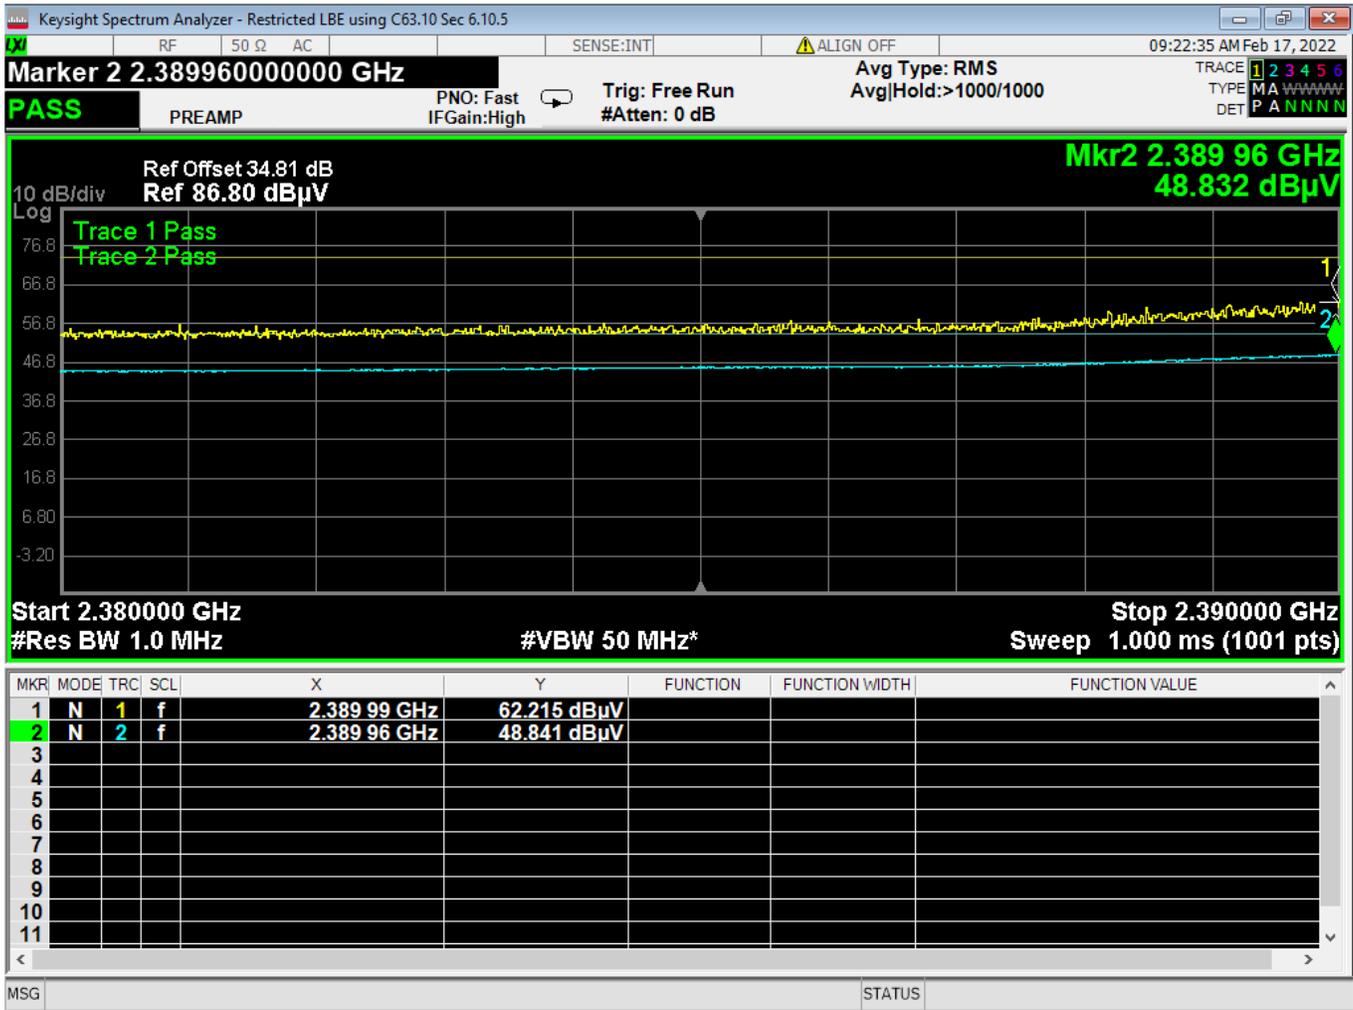

25 Lower Bandedge, Restricted, Wifi G, Low Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

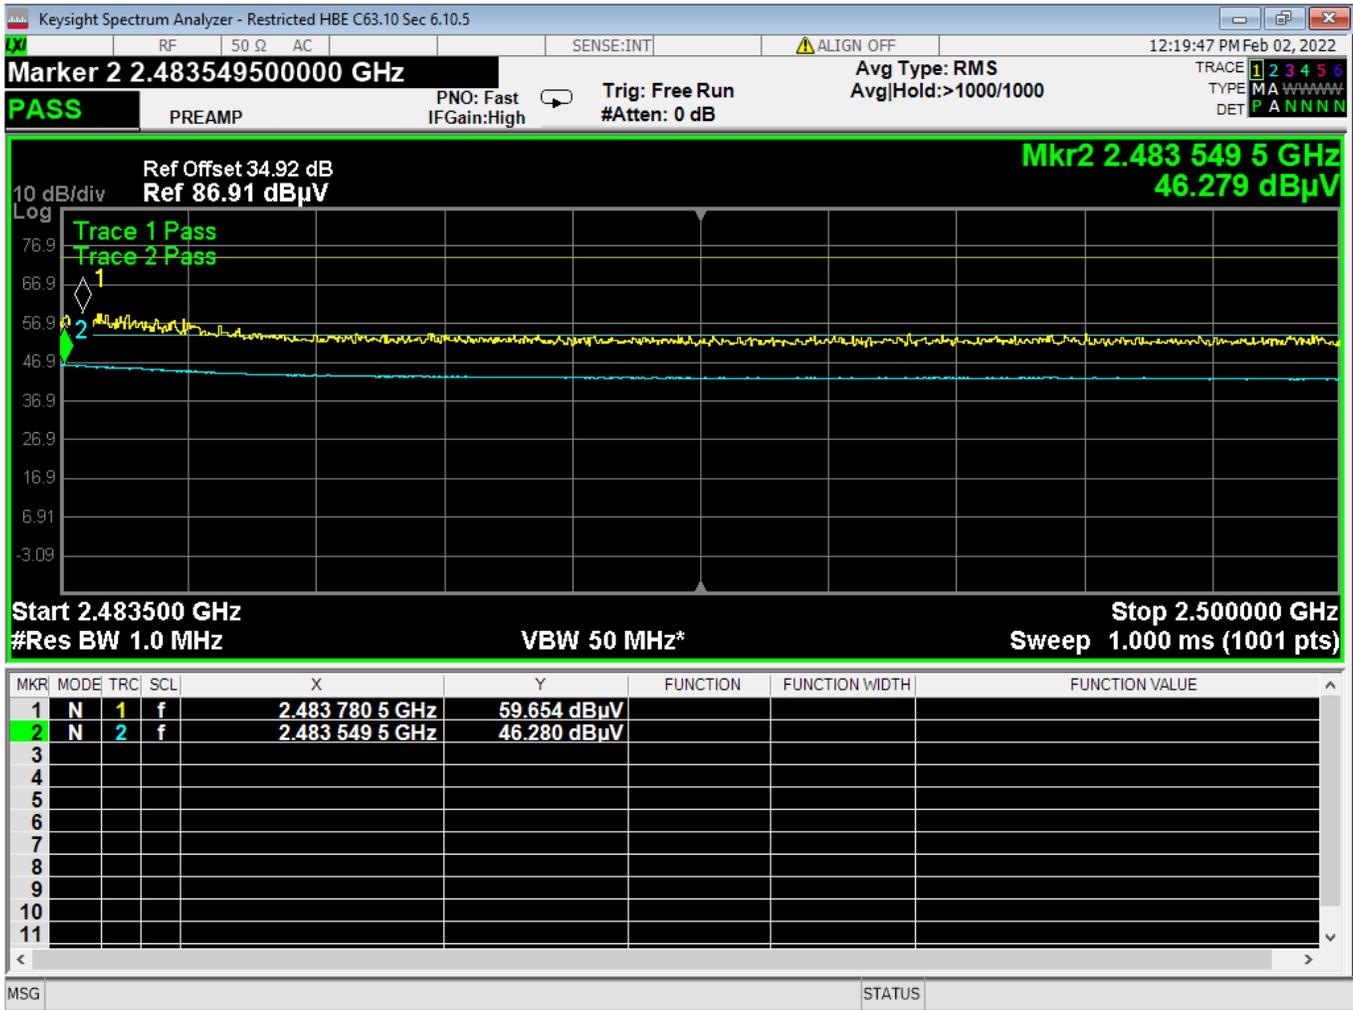

26 Higher Bandedge, Restricted, Wifi G, Low Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

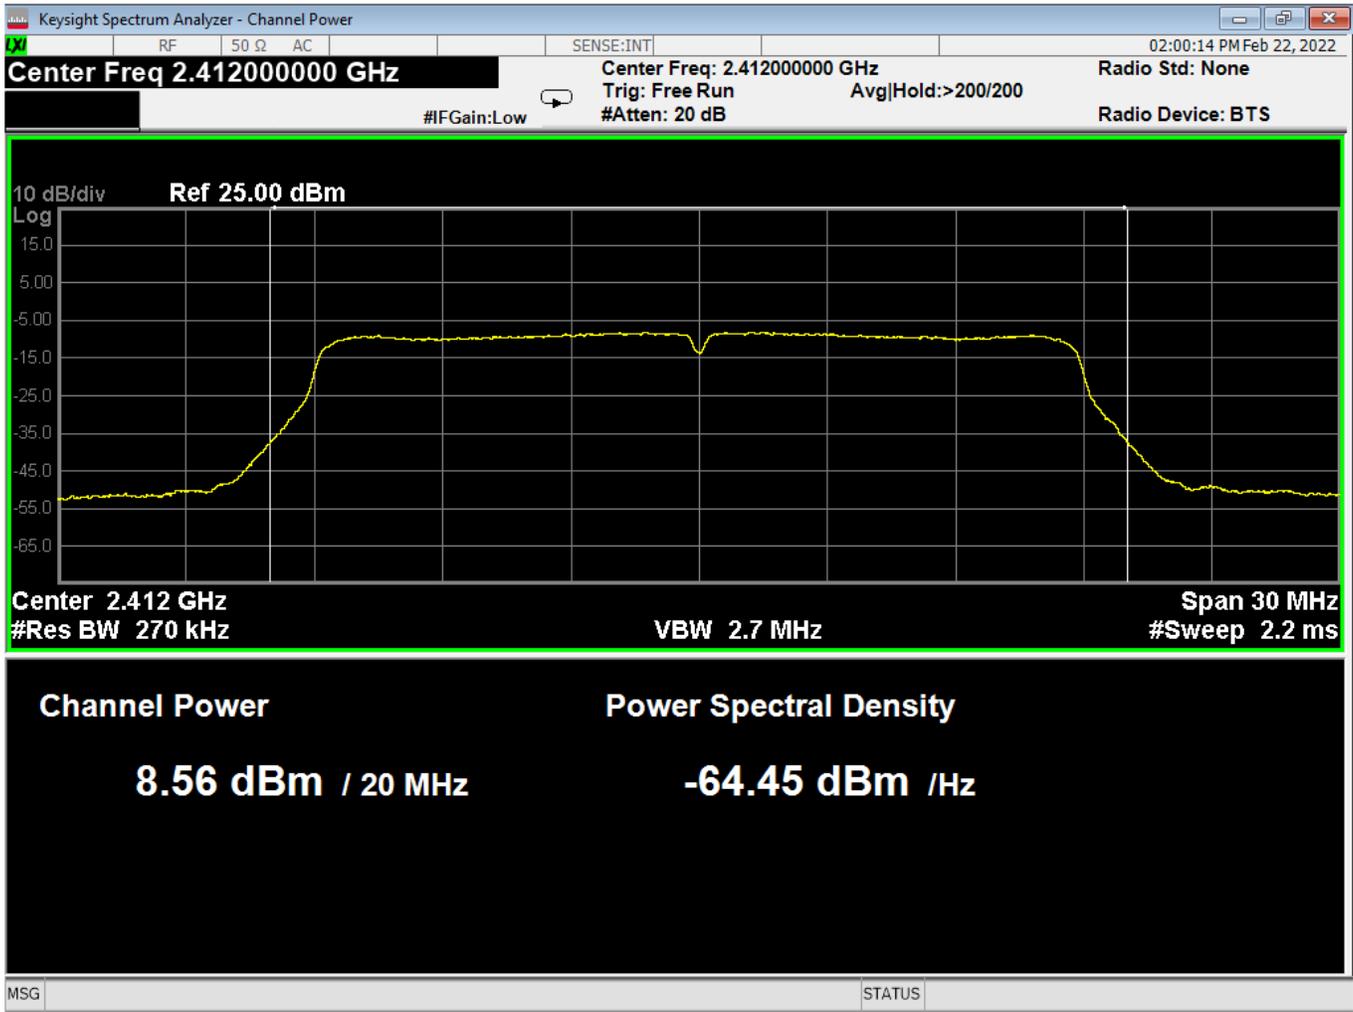

27 Average Power, Low, Wifi N, Low Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

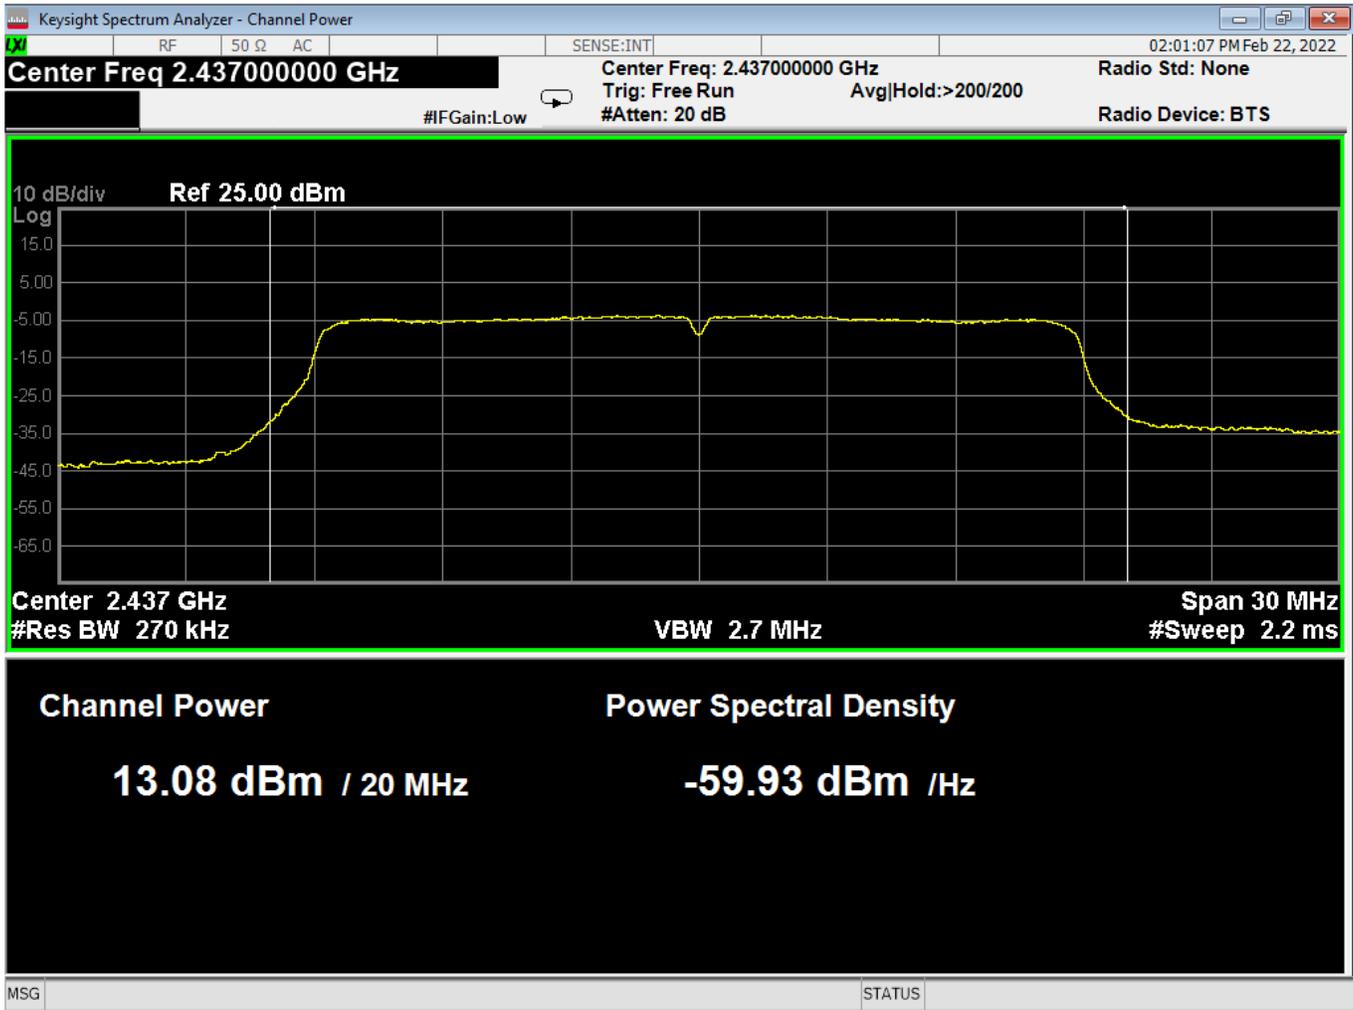

28 Average Power, Mid, Wifi N, Low Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

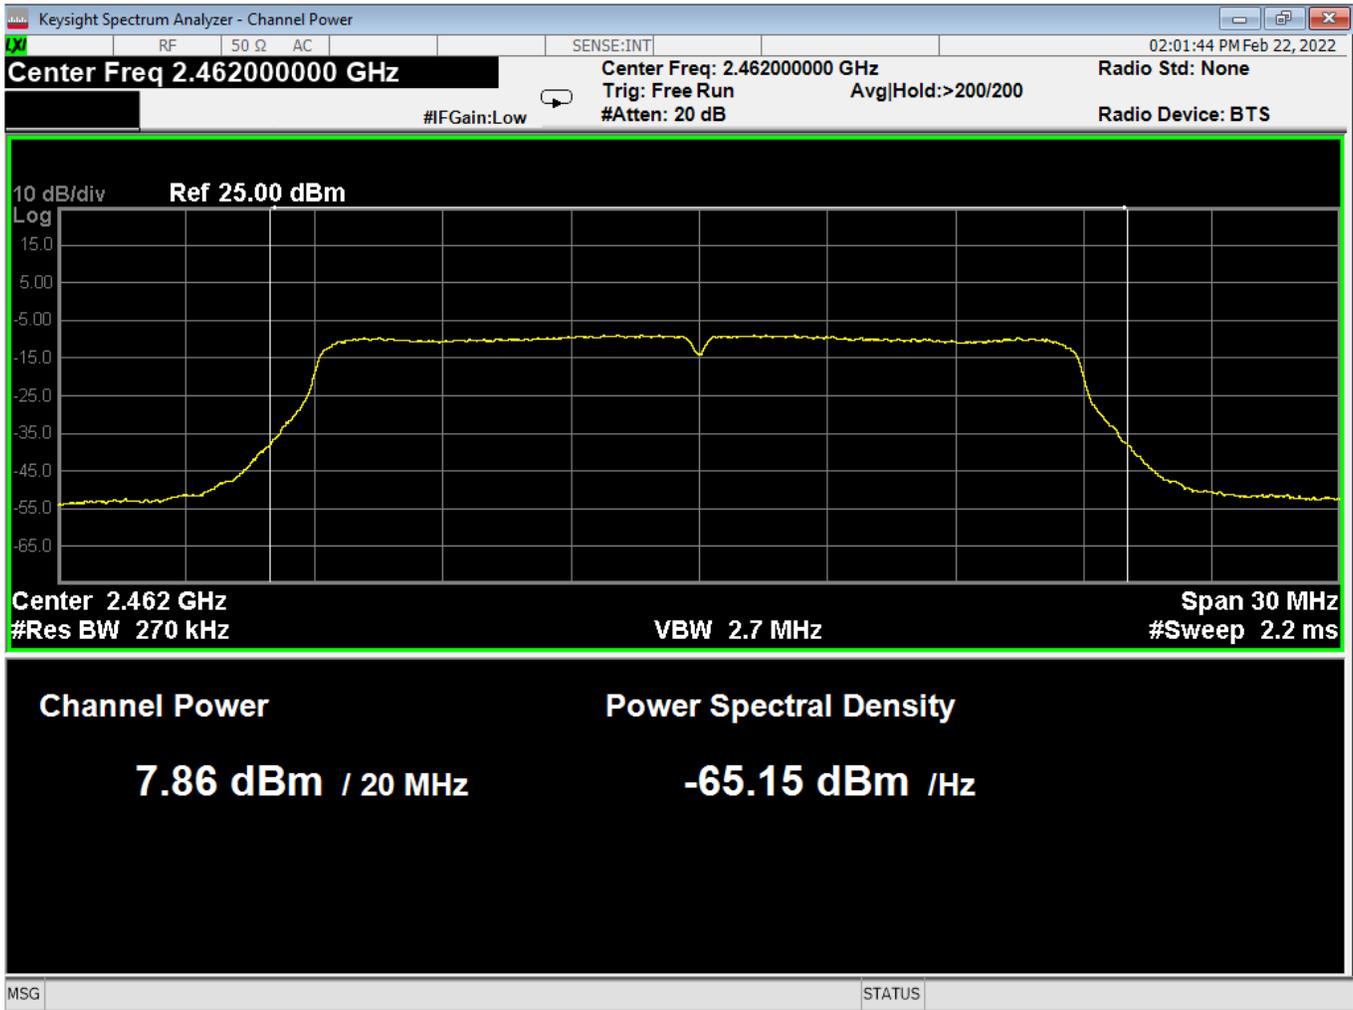

29 Average Power, High, Wifi N, Low Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

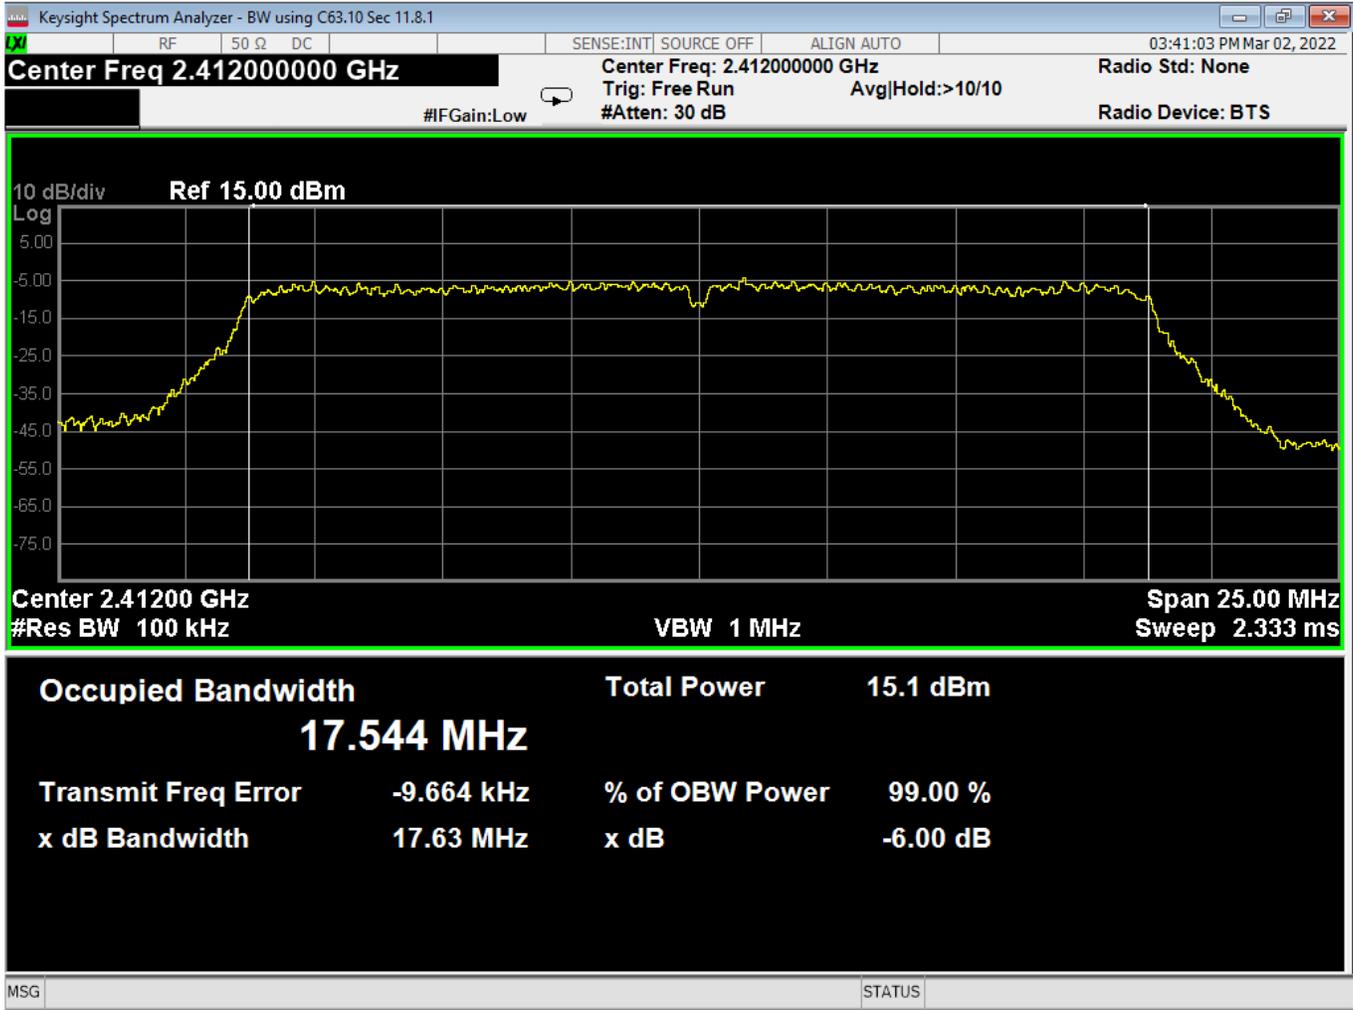

30 OBW-6dB, Low, Wifi N, Low Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

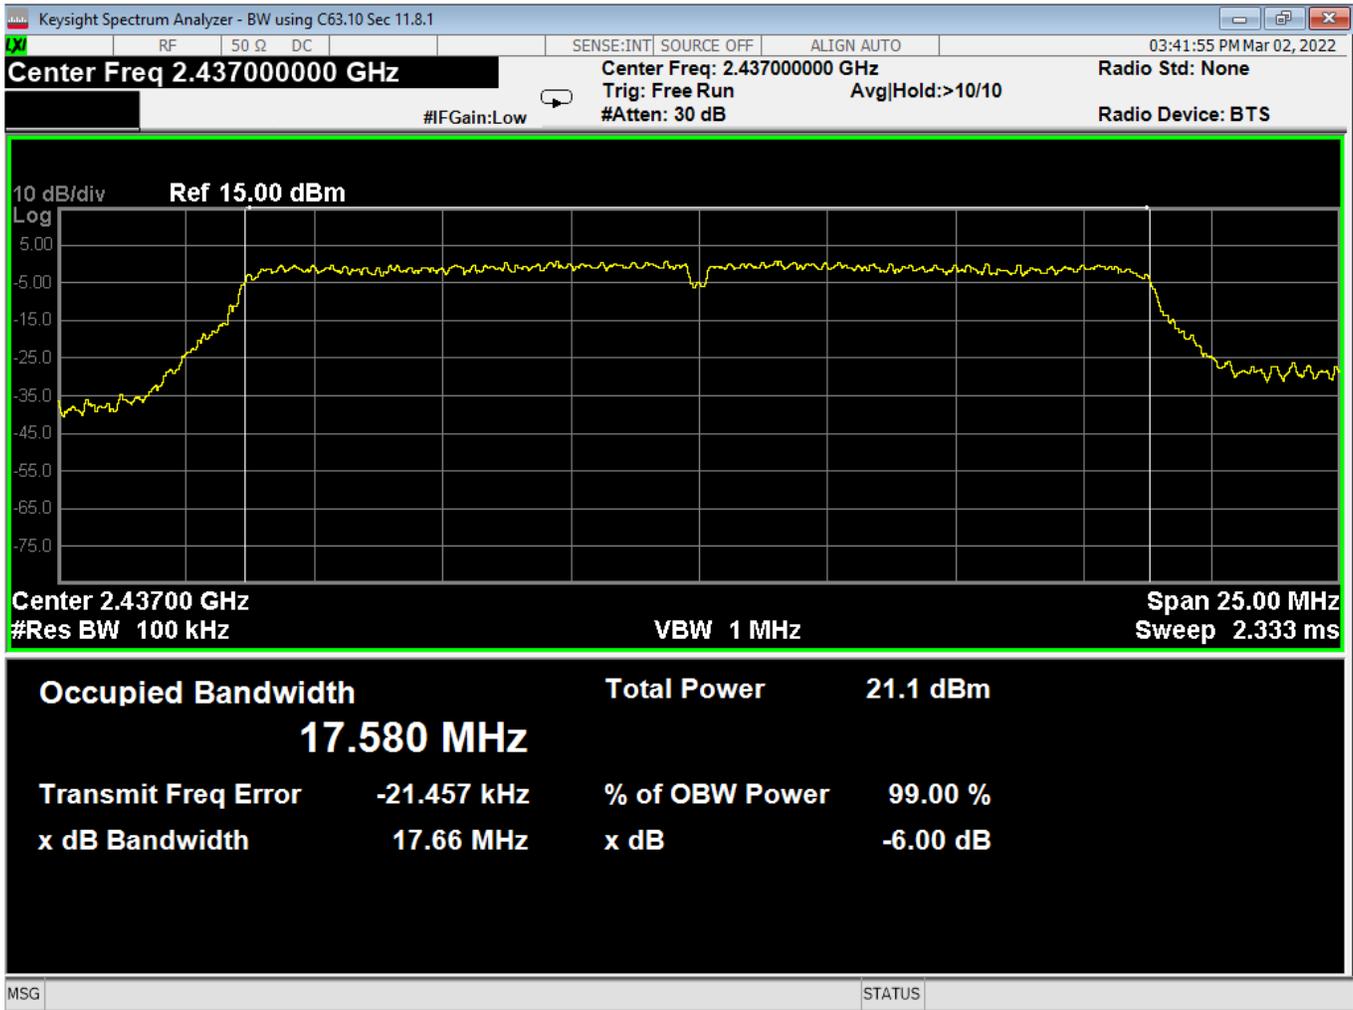

31 OBW-6dB, Mid, Wifi N, Low Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

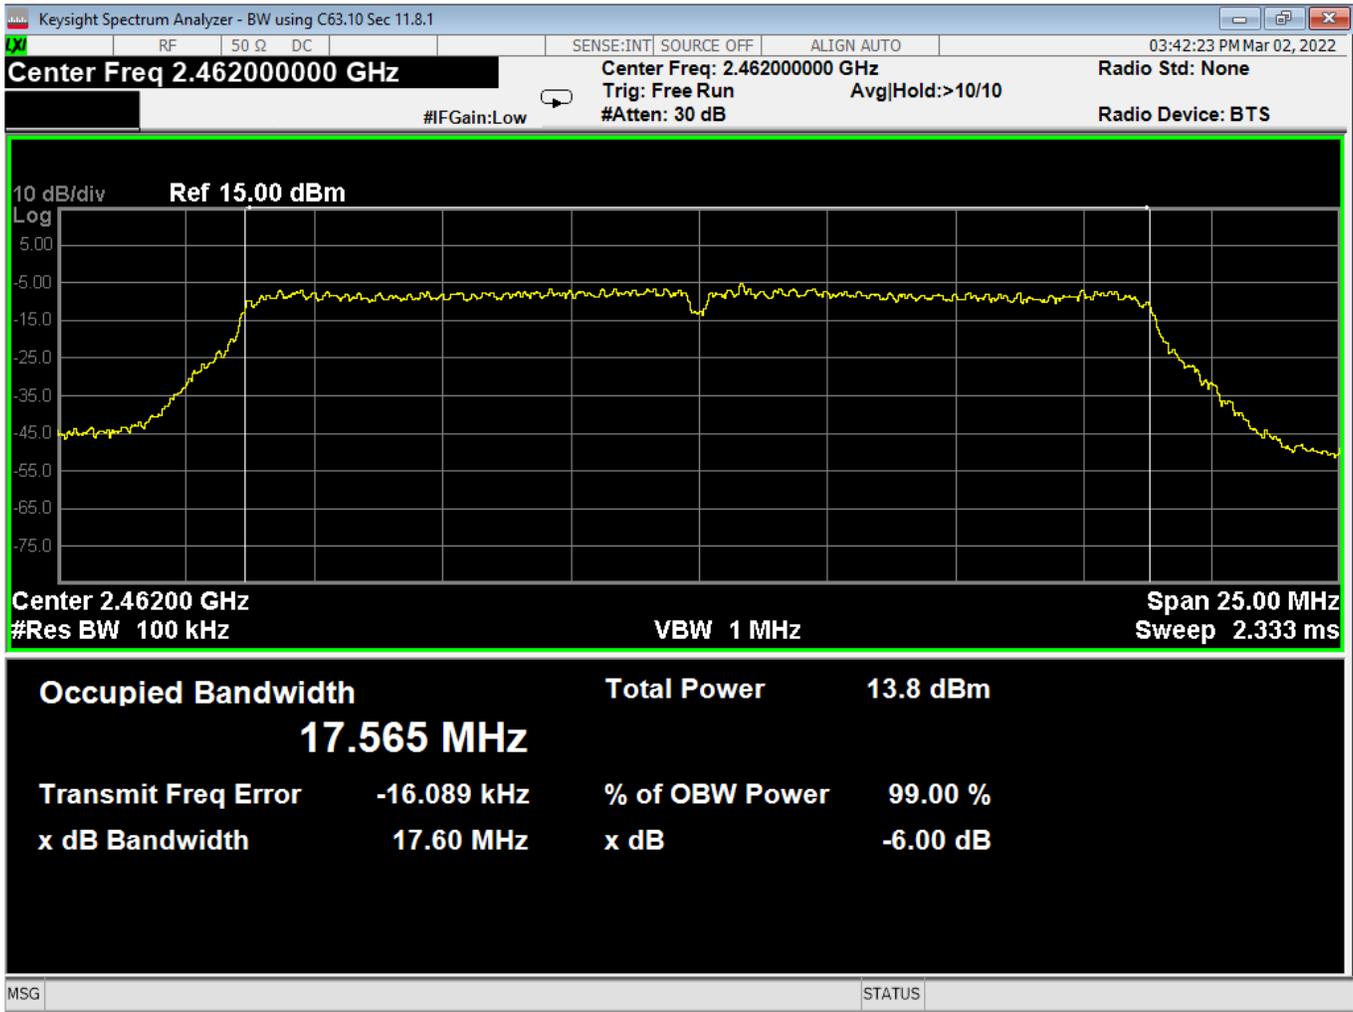

32 OBW-6dB, High, Wifi N, Low Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

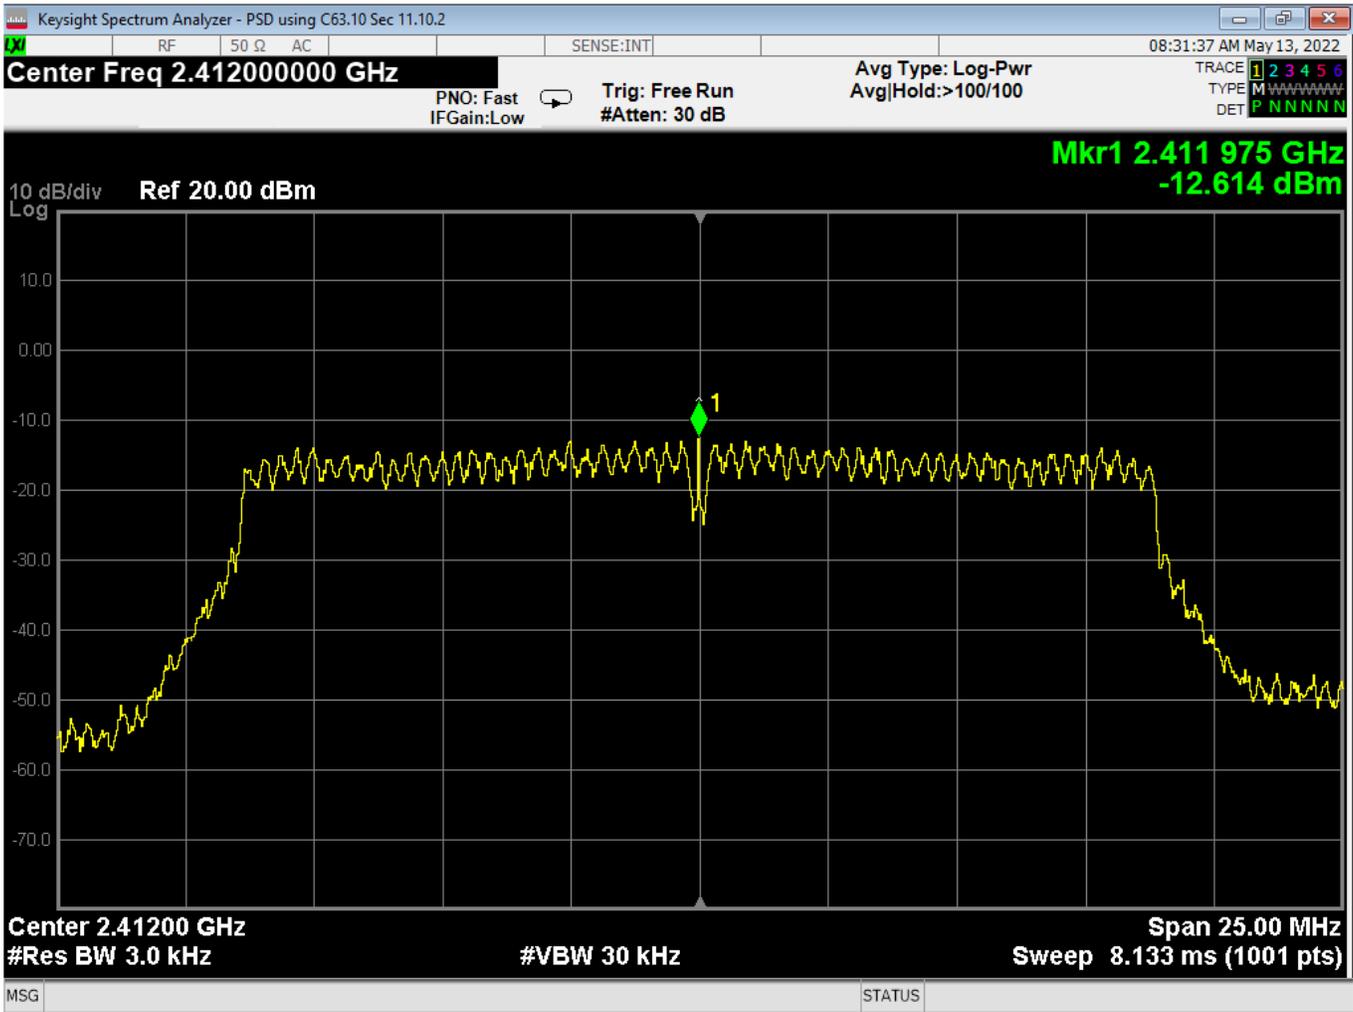

33 PSD, Low, Wifi N, Low Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

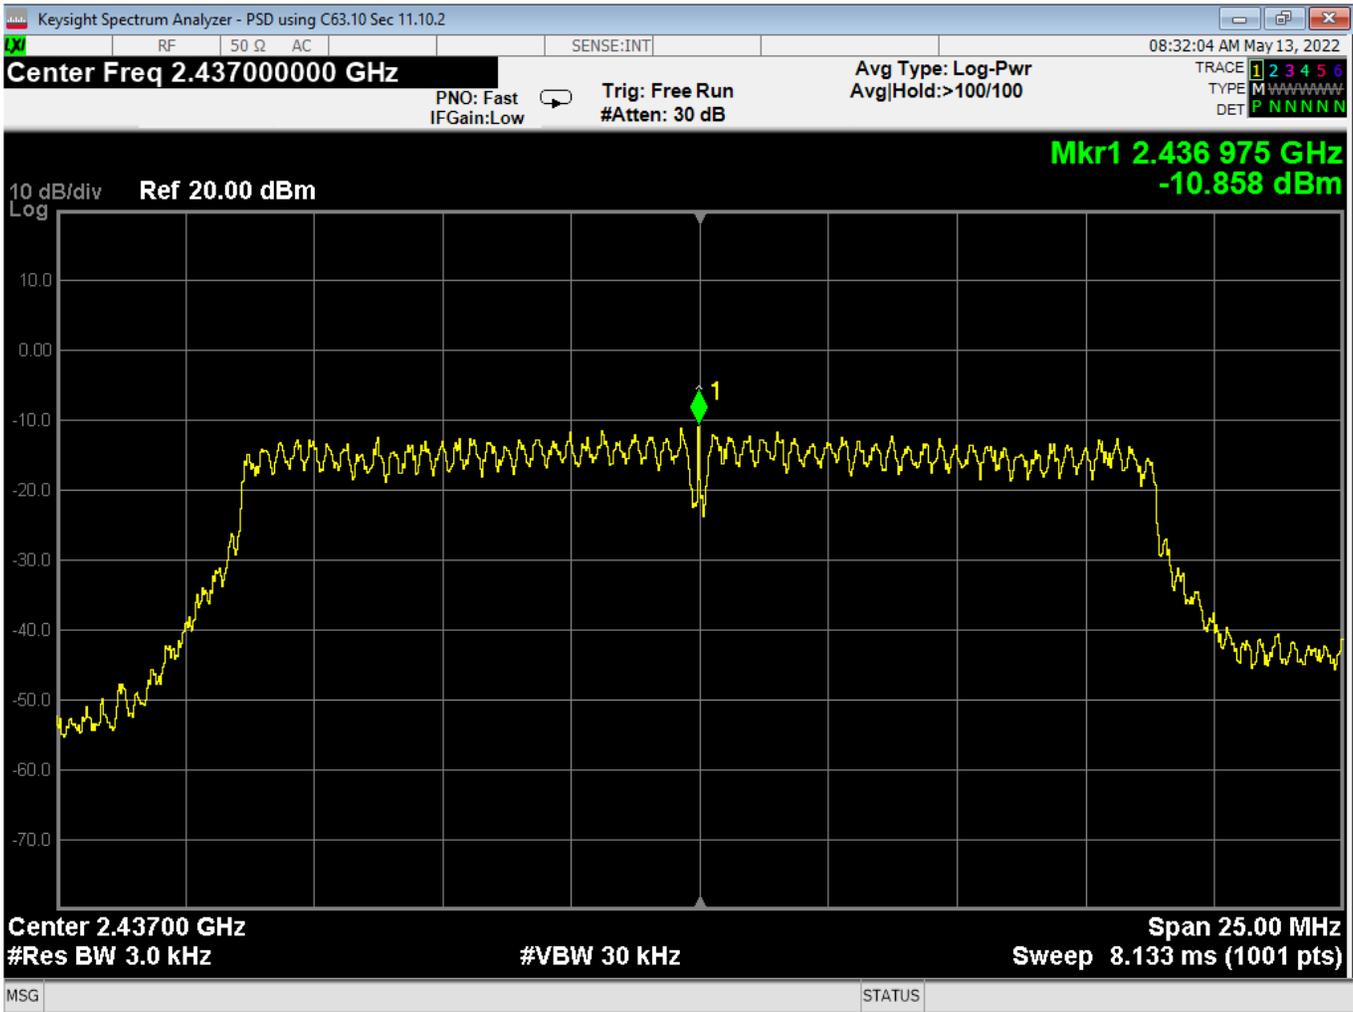

34 PSD, Mid, Wifi N, Low Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

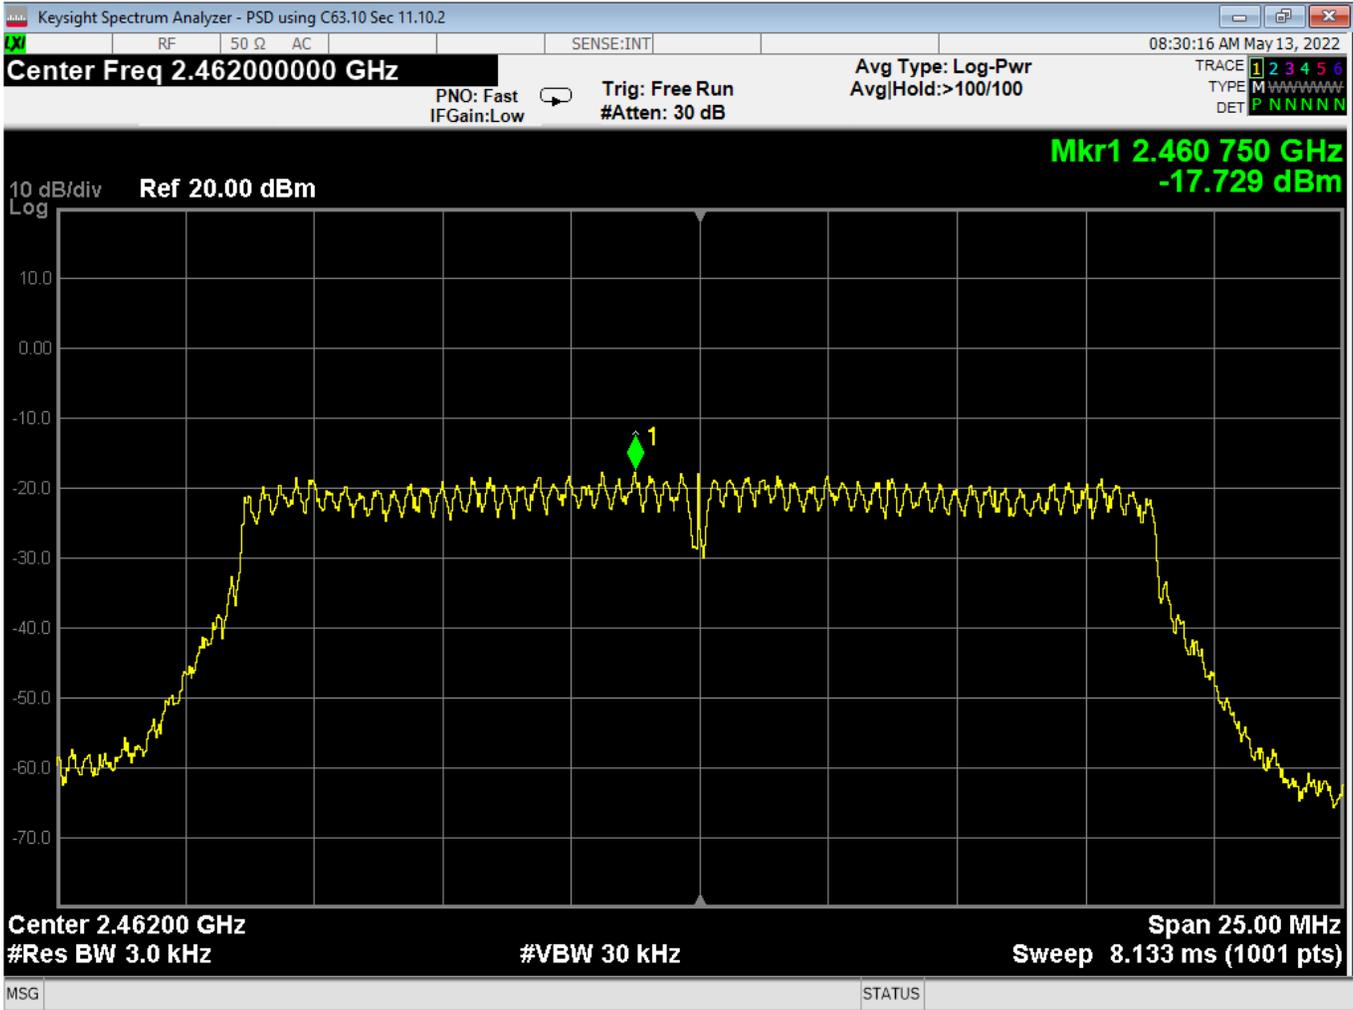

35 PSD, High, Wifi N, Low Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

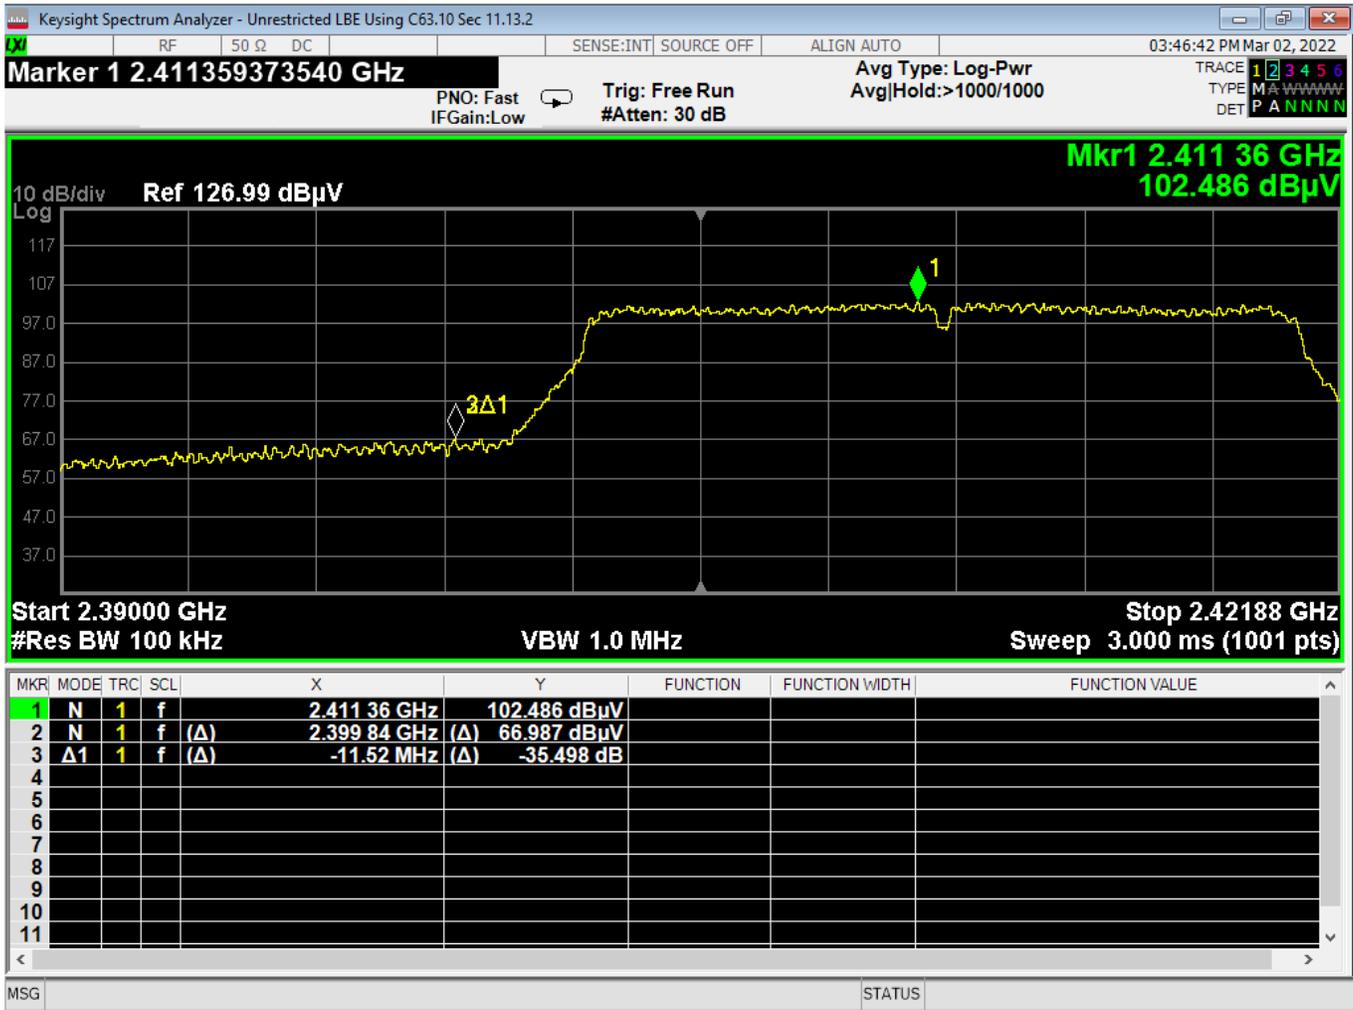

36 Lower Bandedge, Unrestricted, Wifi N, Low Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

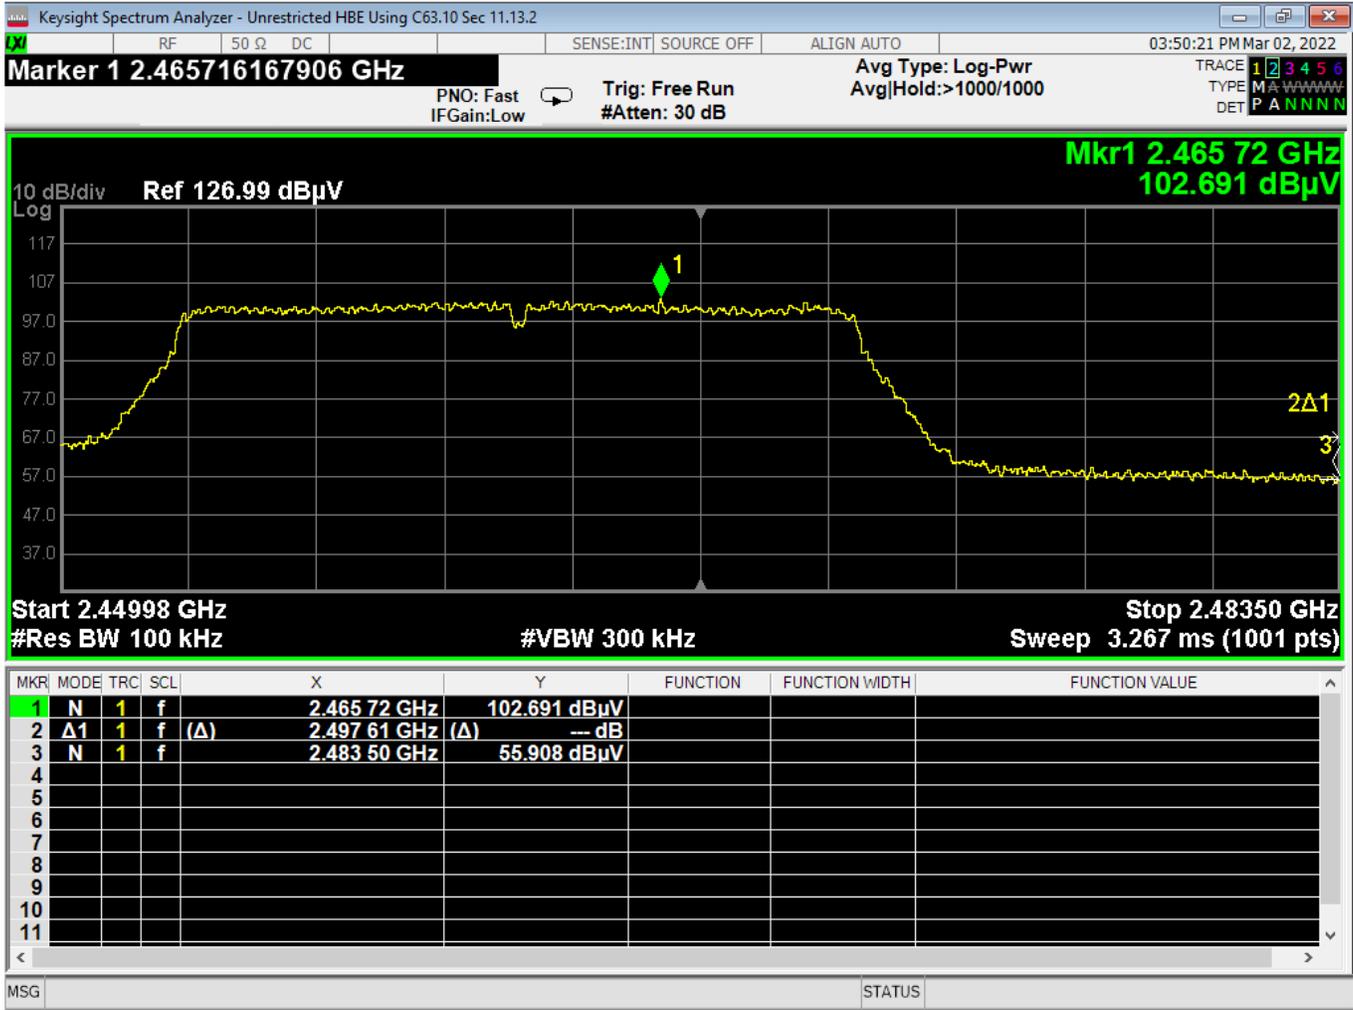

37 Higher Bandedge, Unrestricted, Wifi N, Low Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

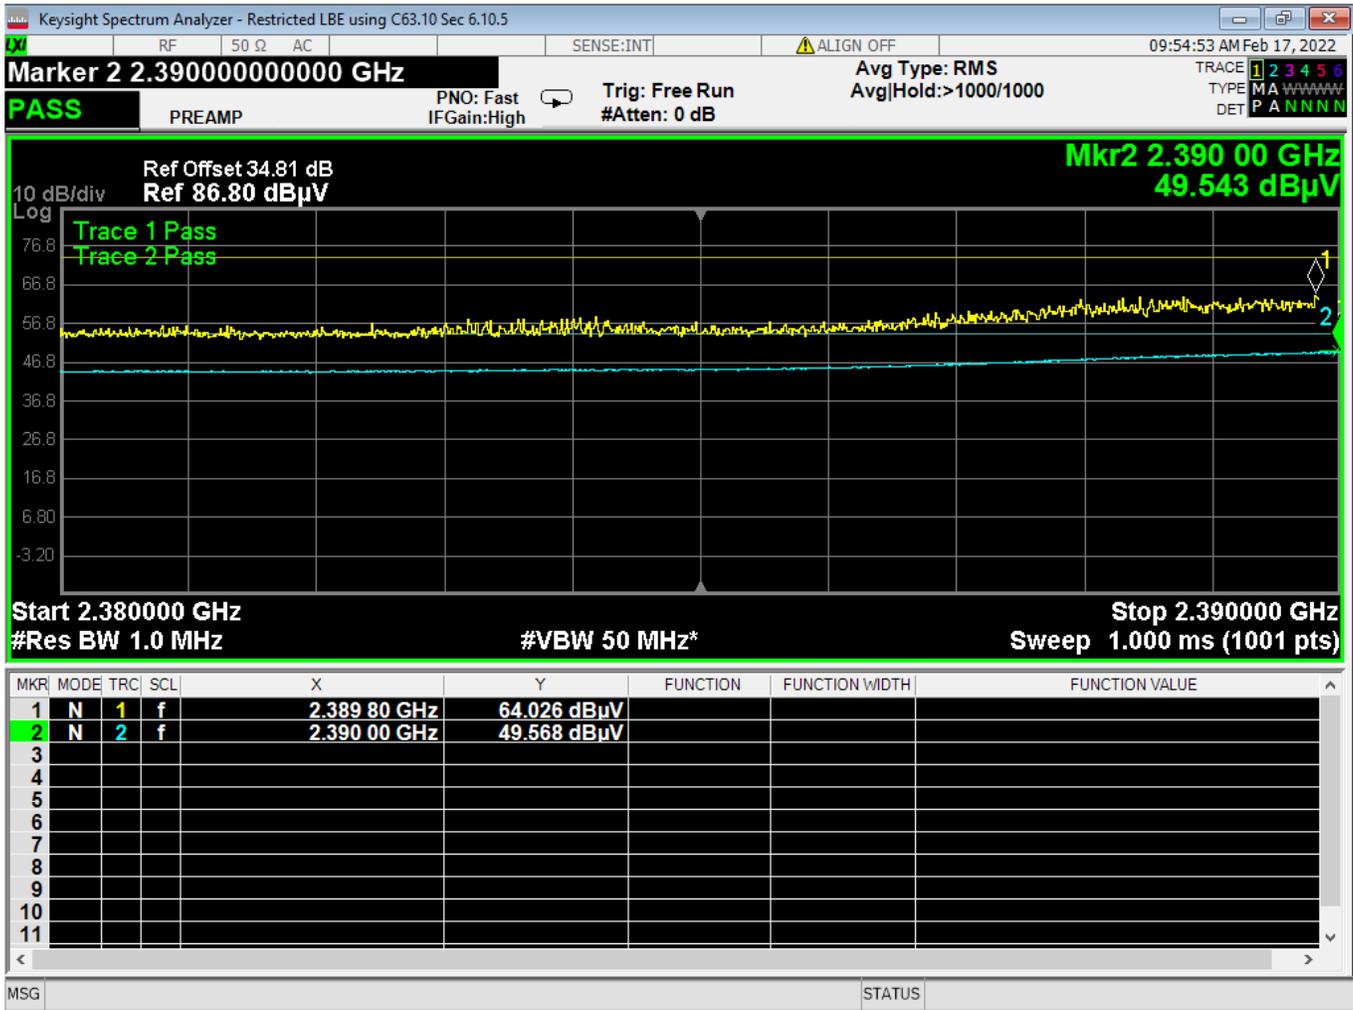

38 Lower Bandedge, Restricted, Wifi N, Low Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

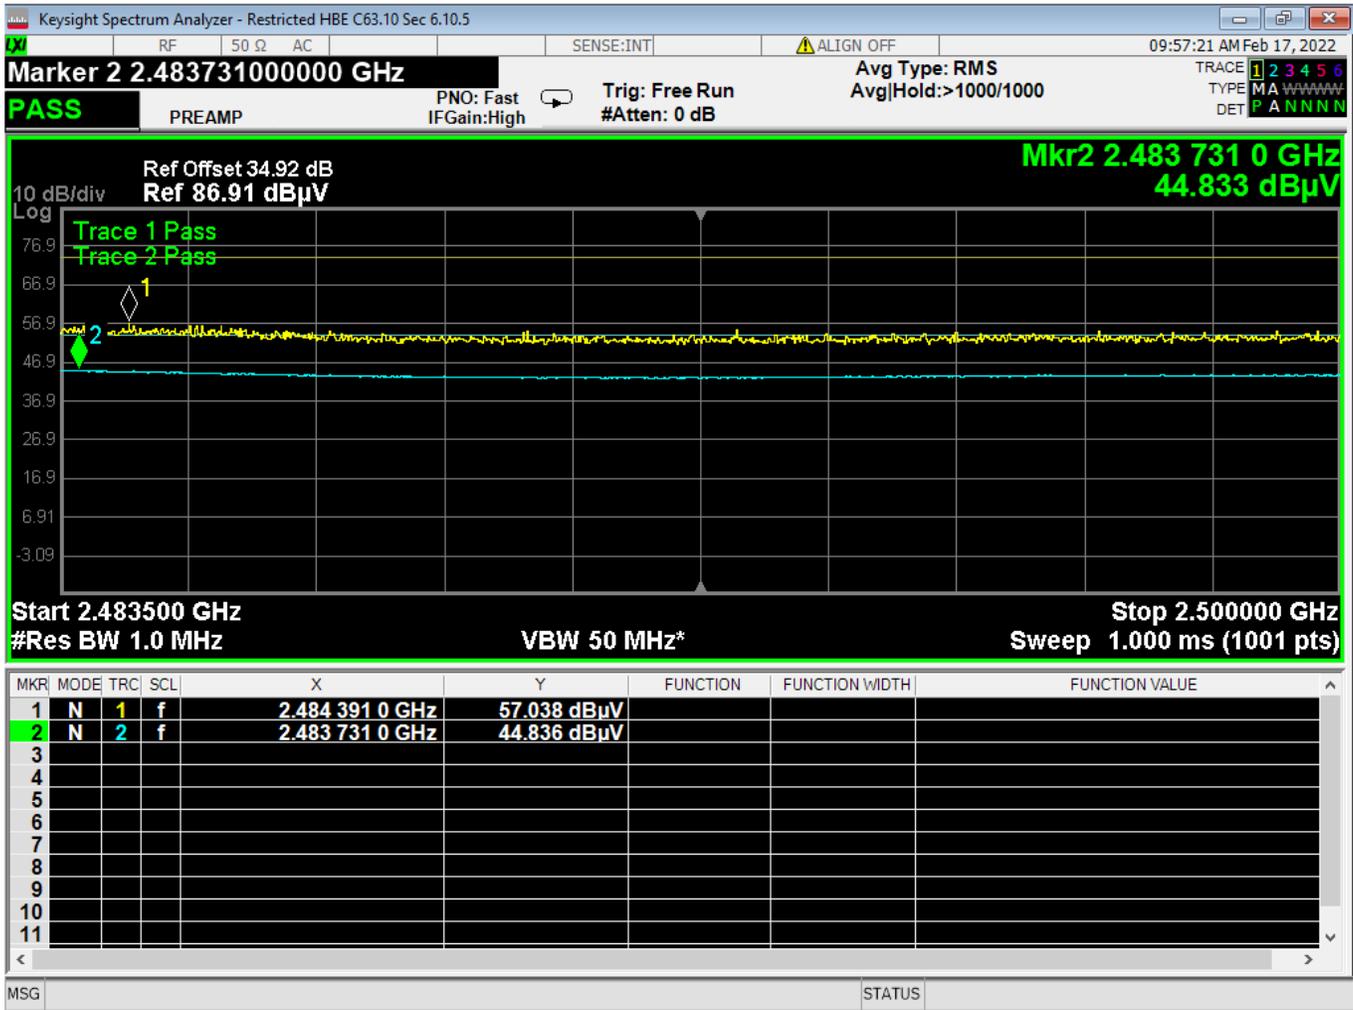

39 Higher Bandedge, Restricted, Wifi N, Low Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

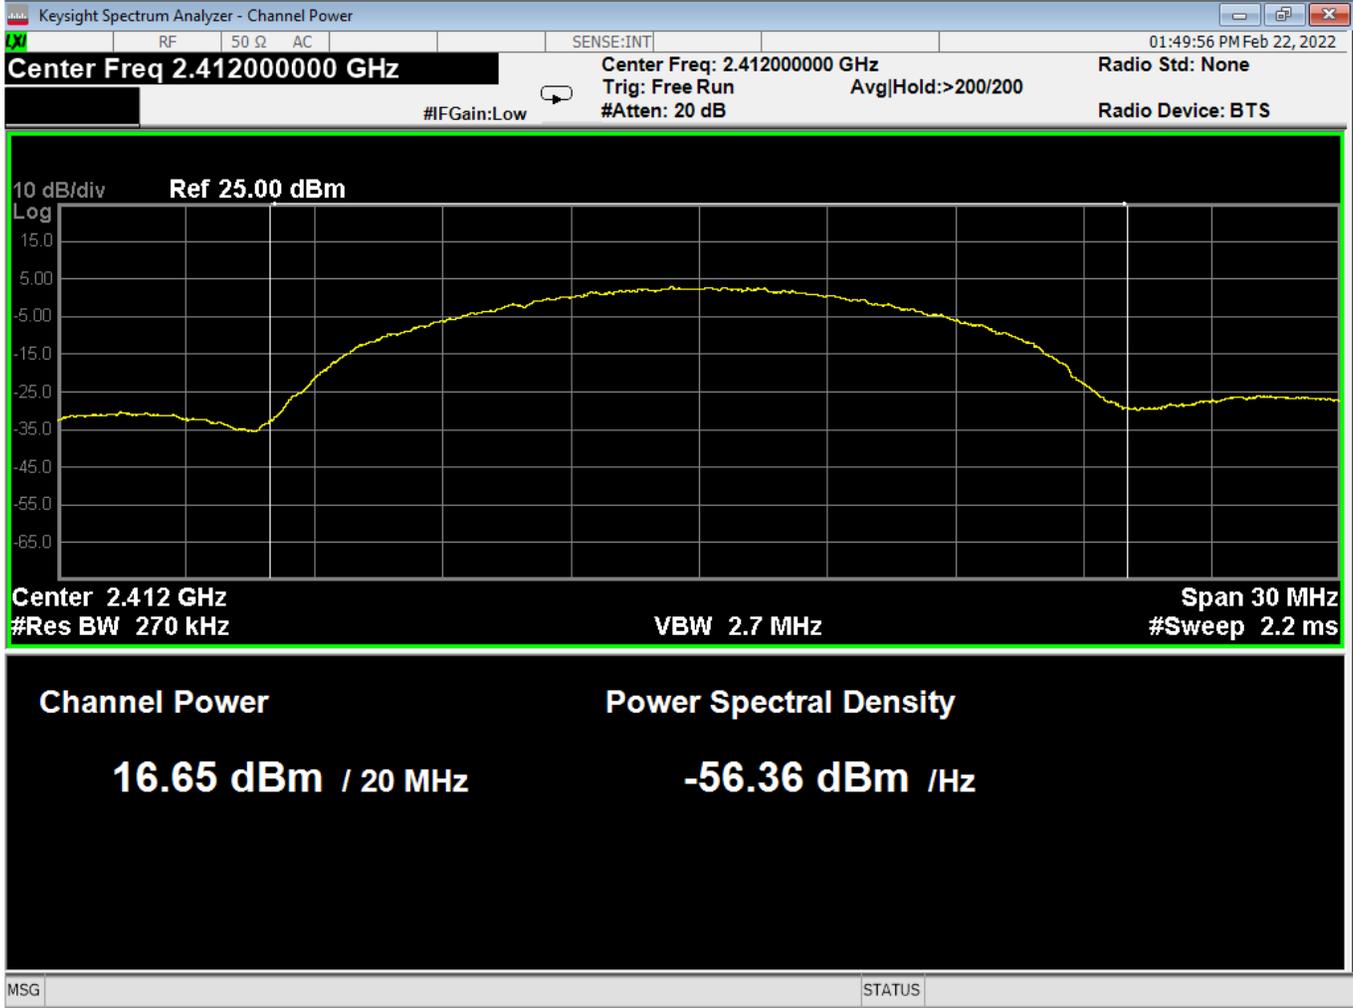

40 Average Power, Low, Wifi B, High Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

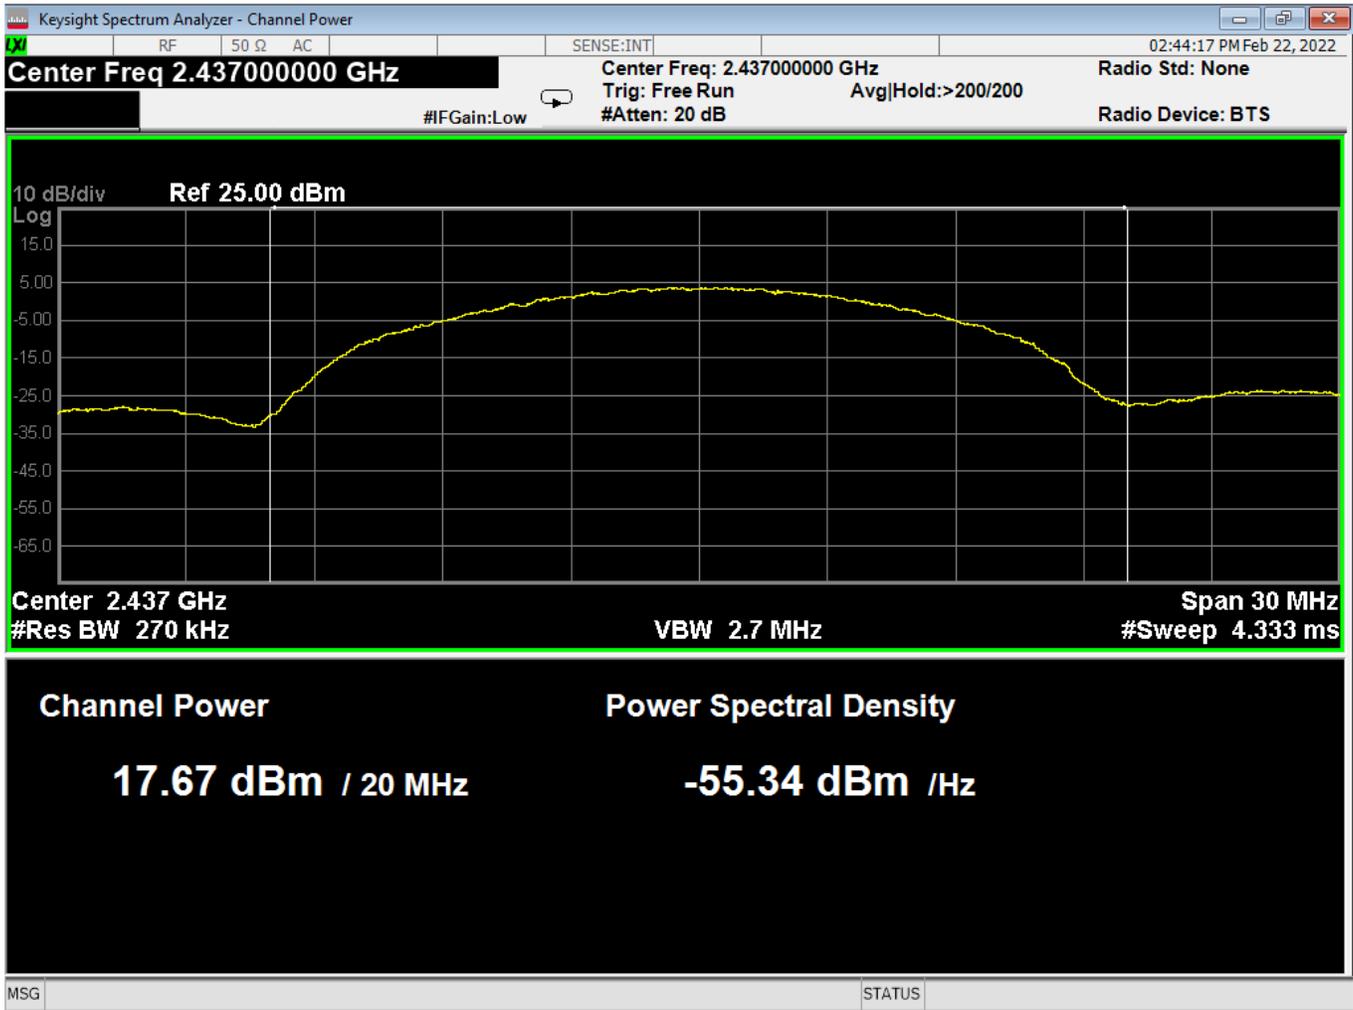

41 Average Power, Mid, Wifi B, High Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

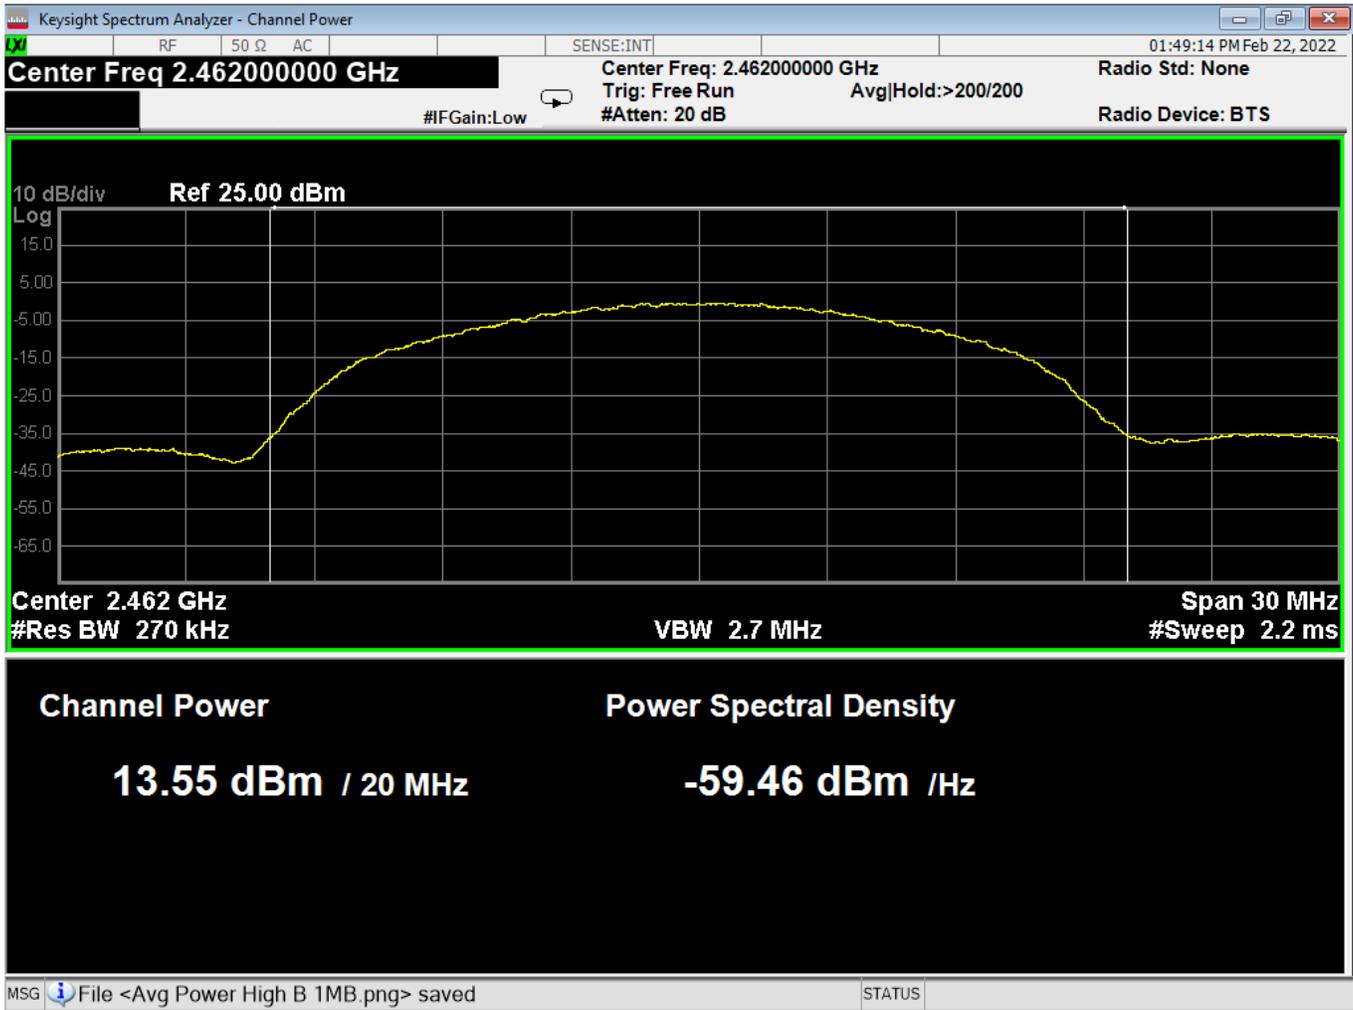

42 Average Power, High, Wifi B, High Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

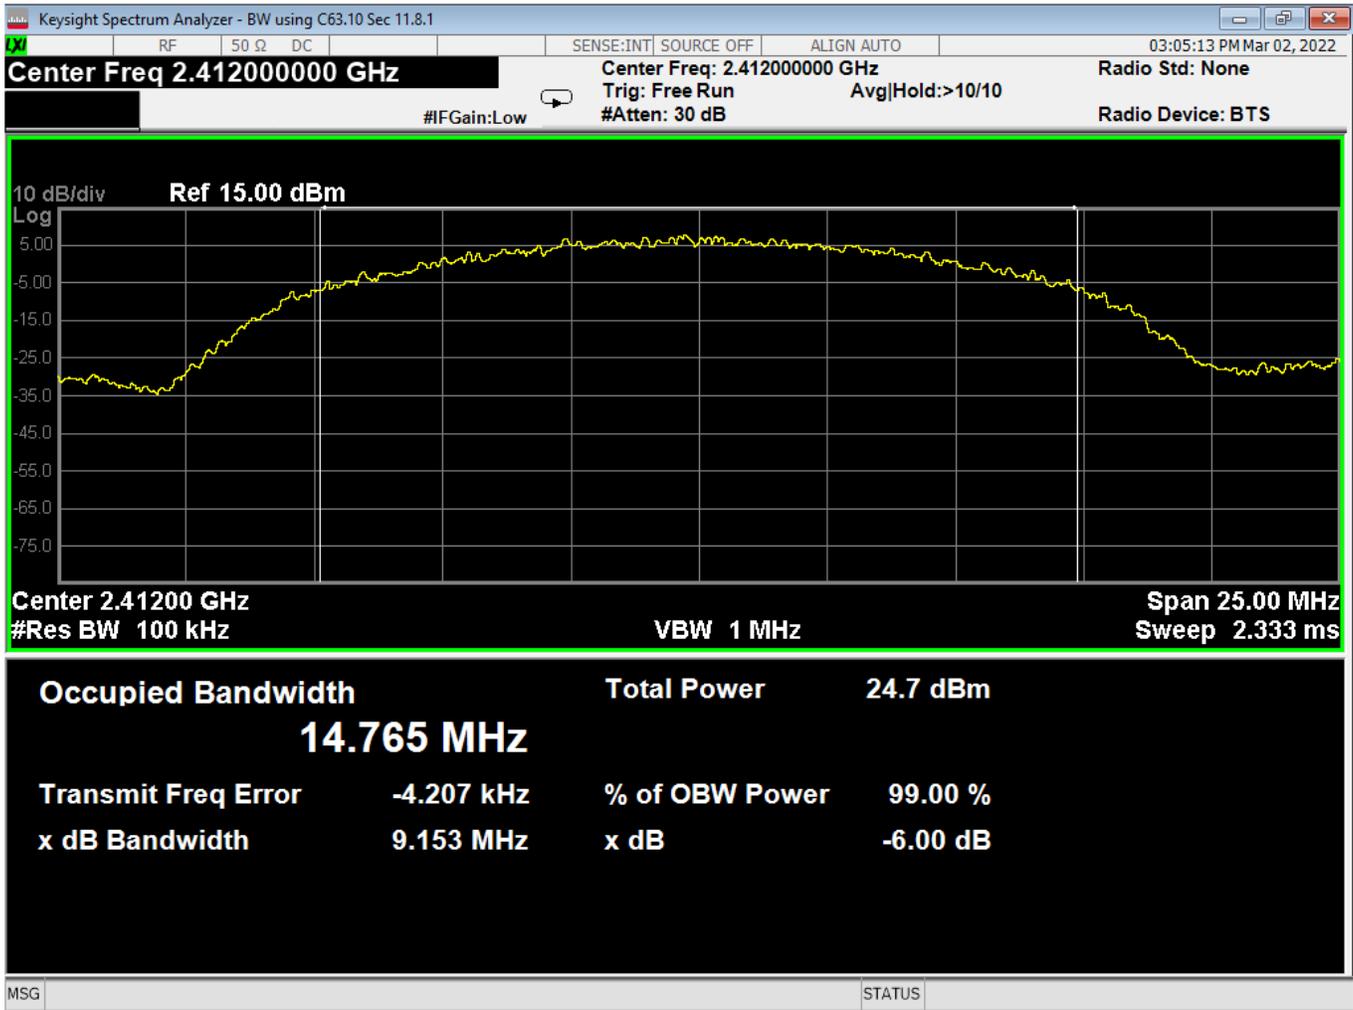

43 OBW-6dB, Low, Wifi B, High Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

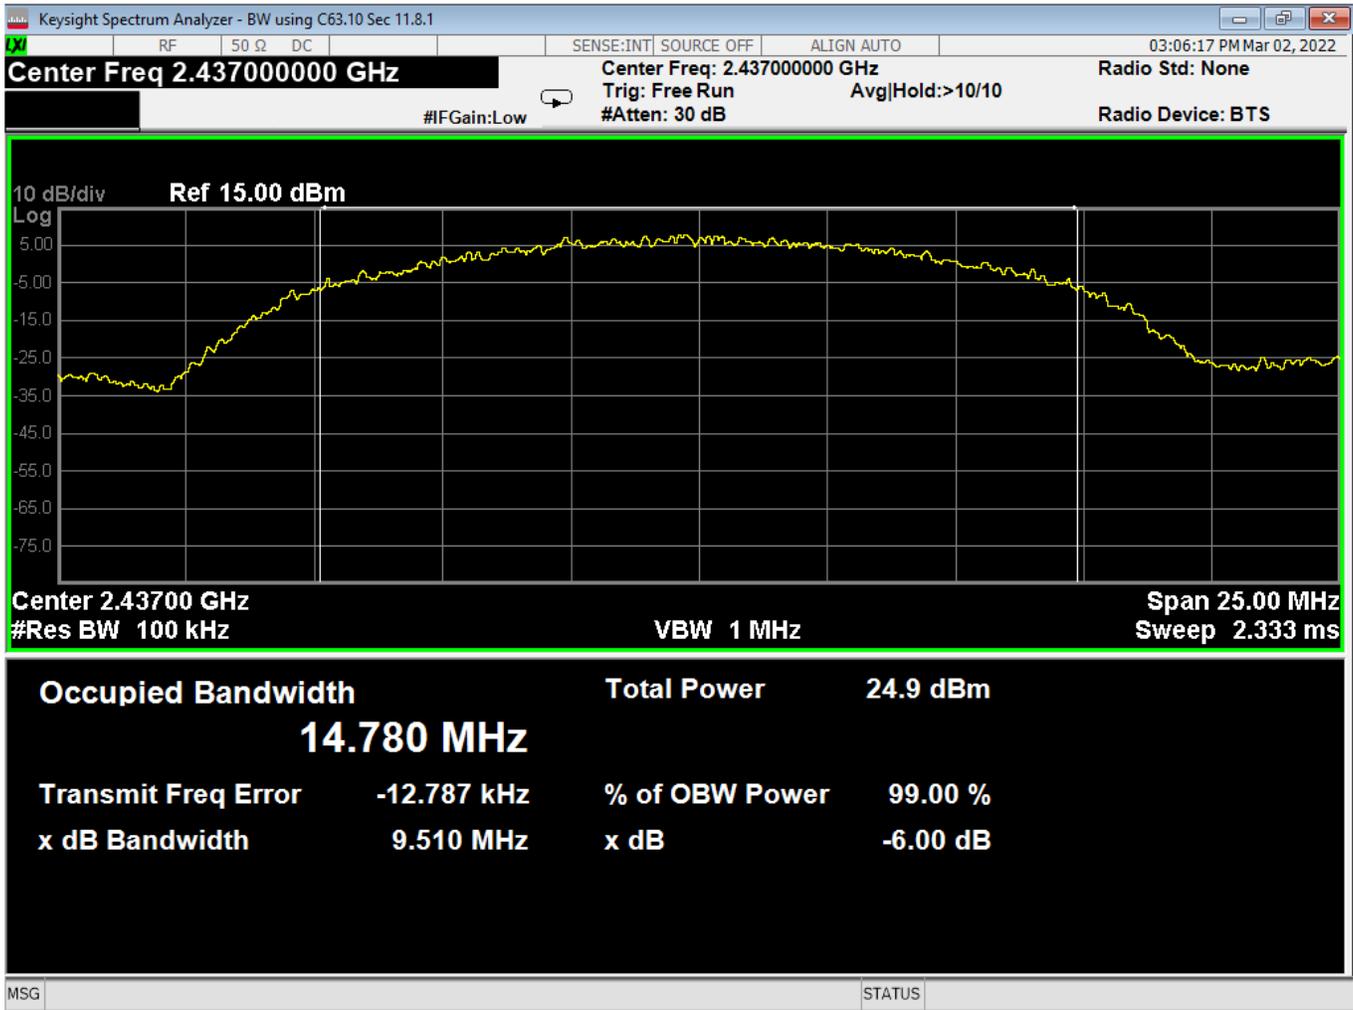

44 OBW-6dB, Mid, Wifi B, High Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

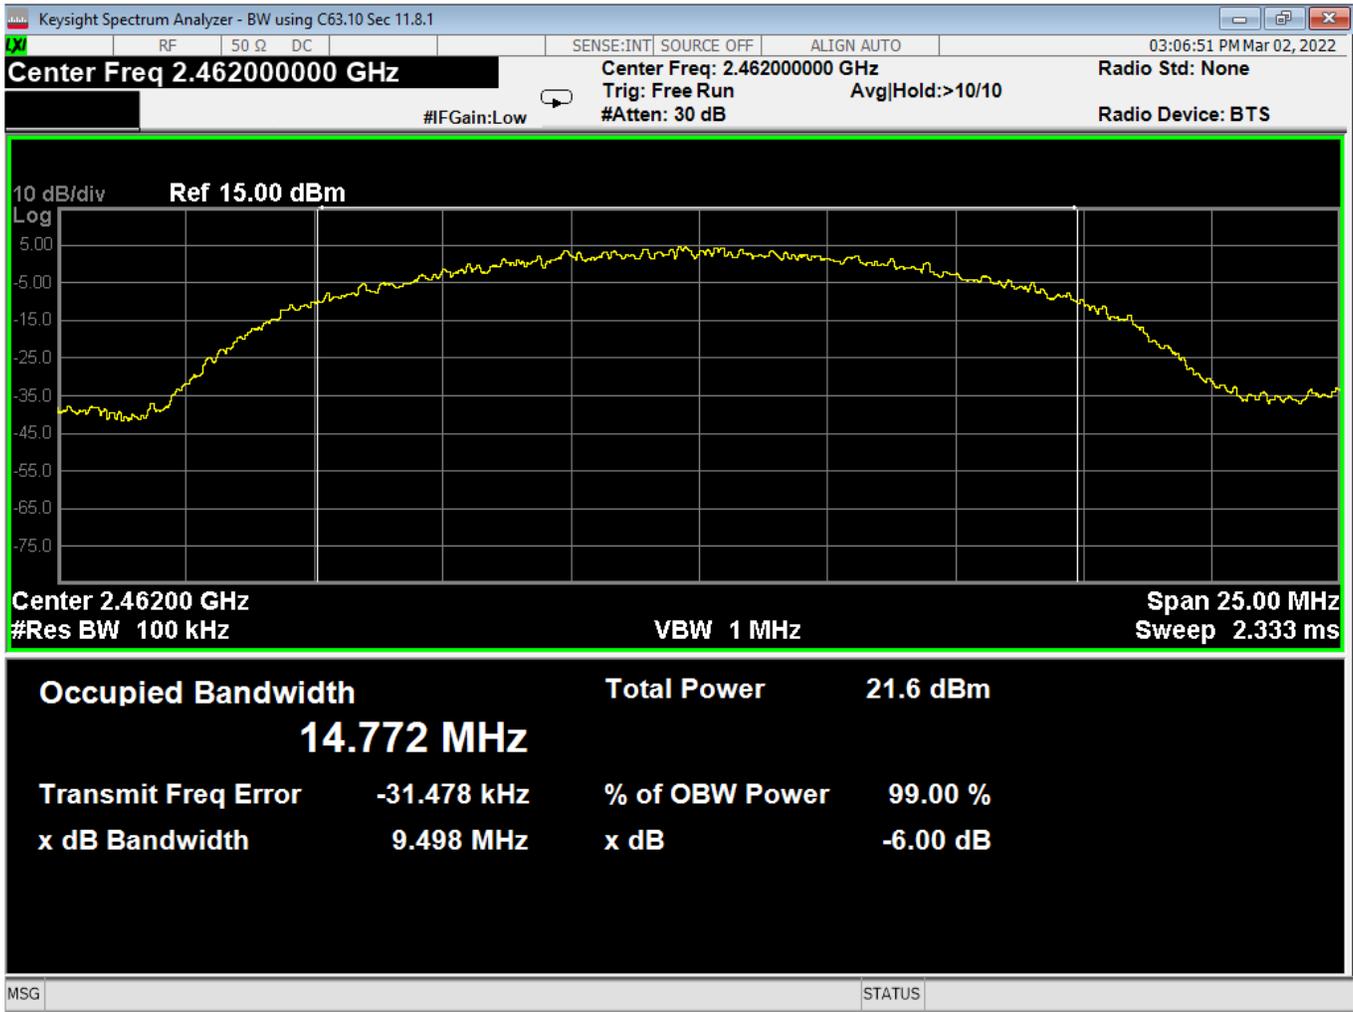

45 OBW-6dB, High, Wifi B, High Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

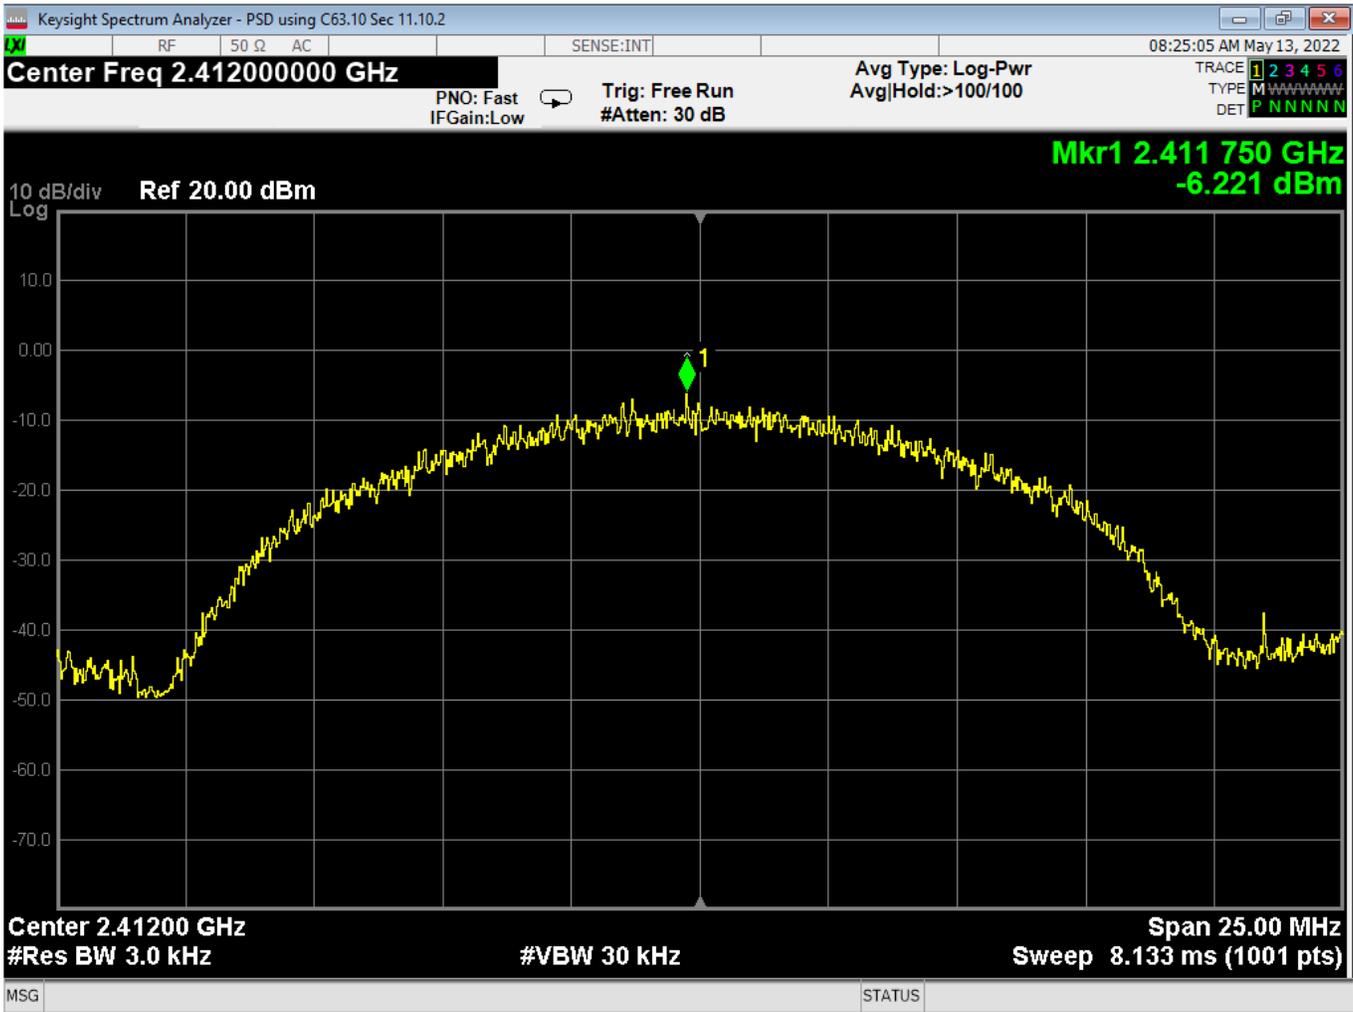

46 PSD, Low, Wifi B, High Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

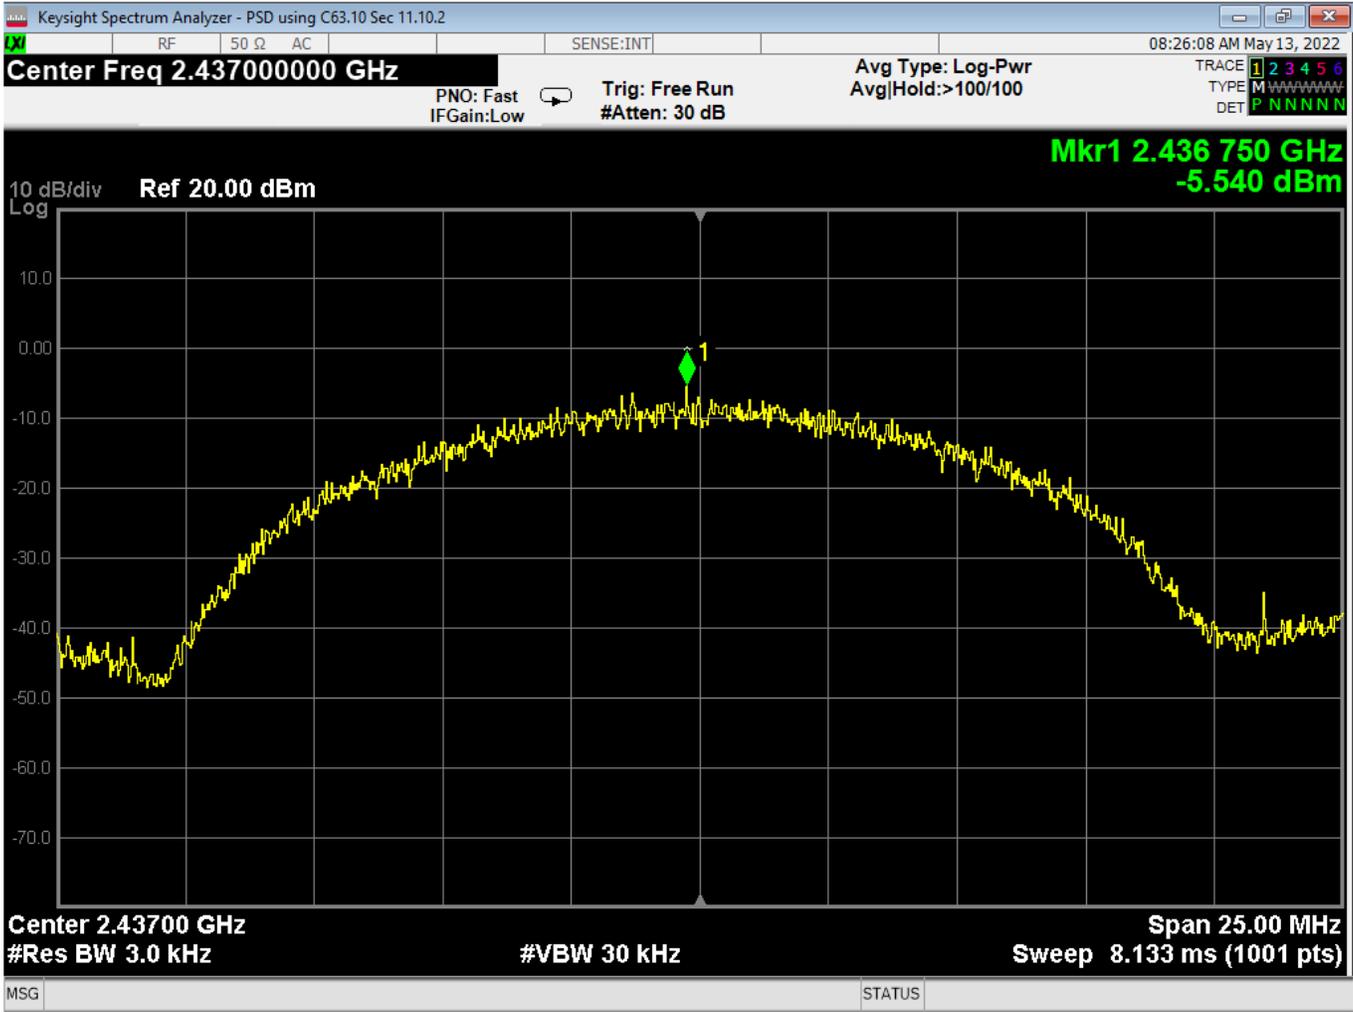

47 PSD, Mid, Wifi B, High Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

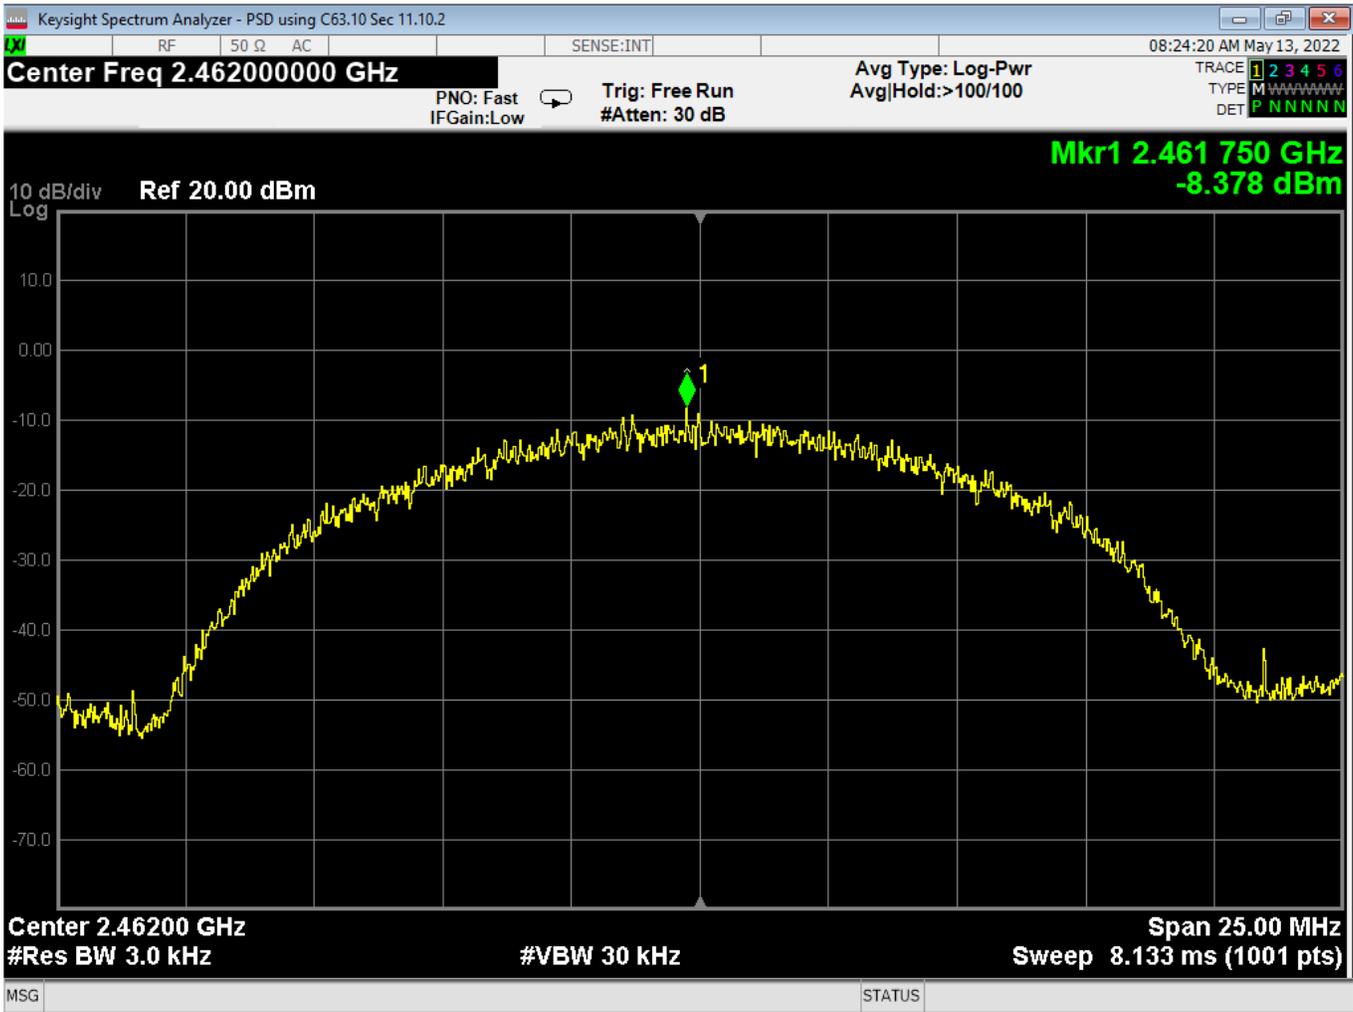

48 PSD, High, Wifi B, High Data Rate



Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

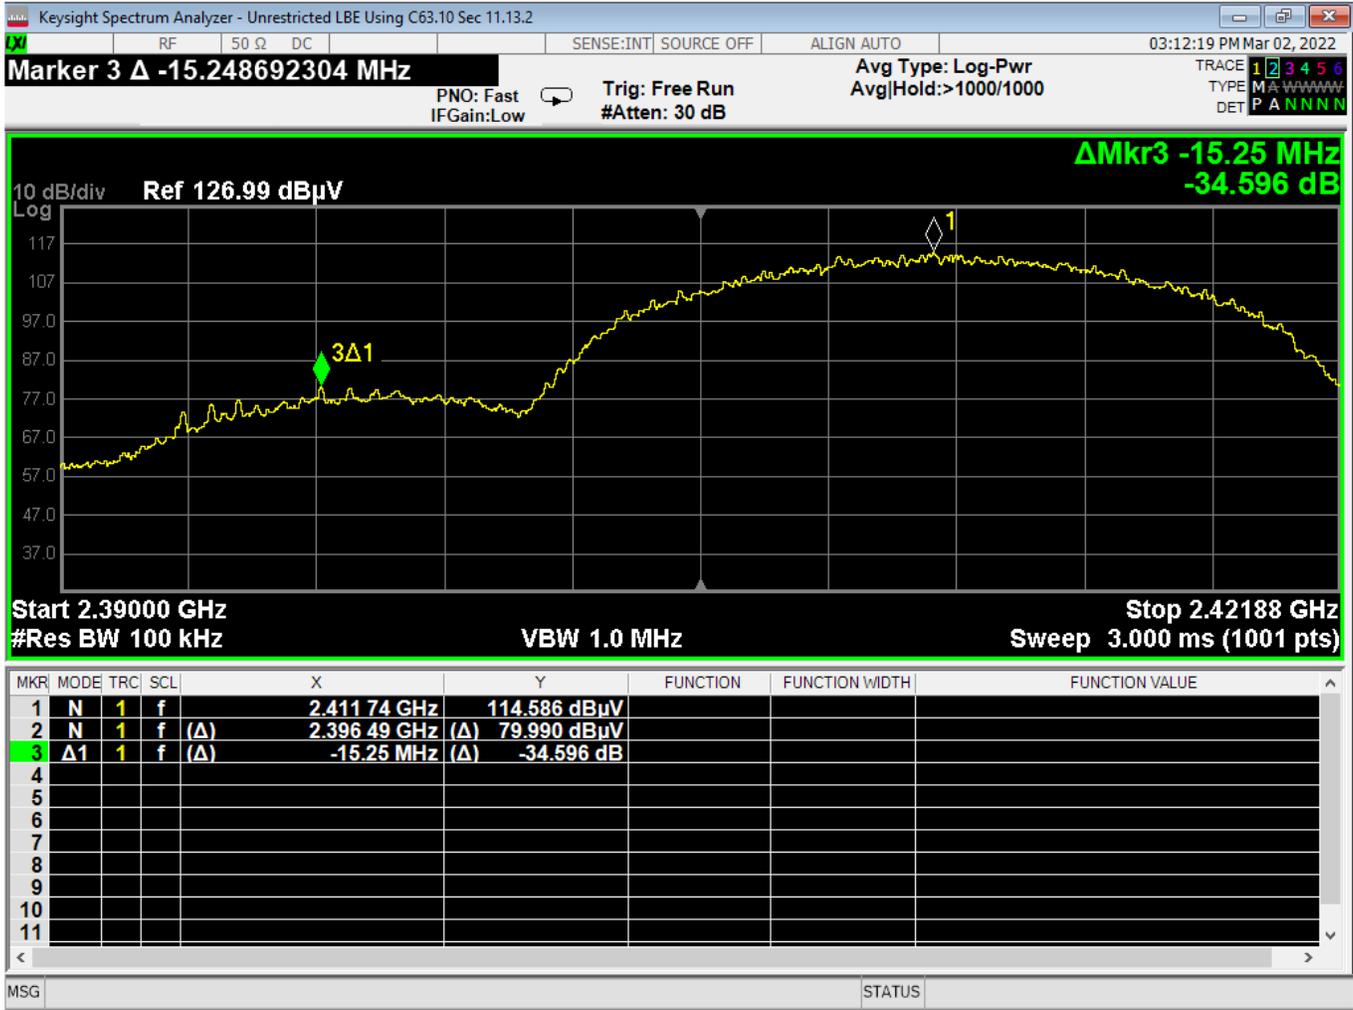

49 Lower Bandedge, Unrestricted, Wifi B, High Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		



50 Higher Bandedge, Unrestricted, Wifi B, High Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

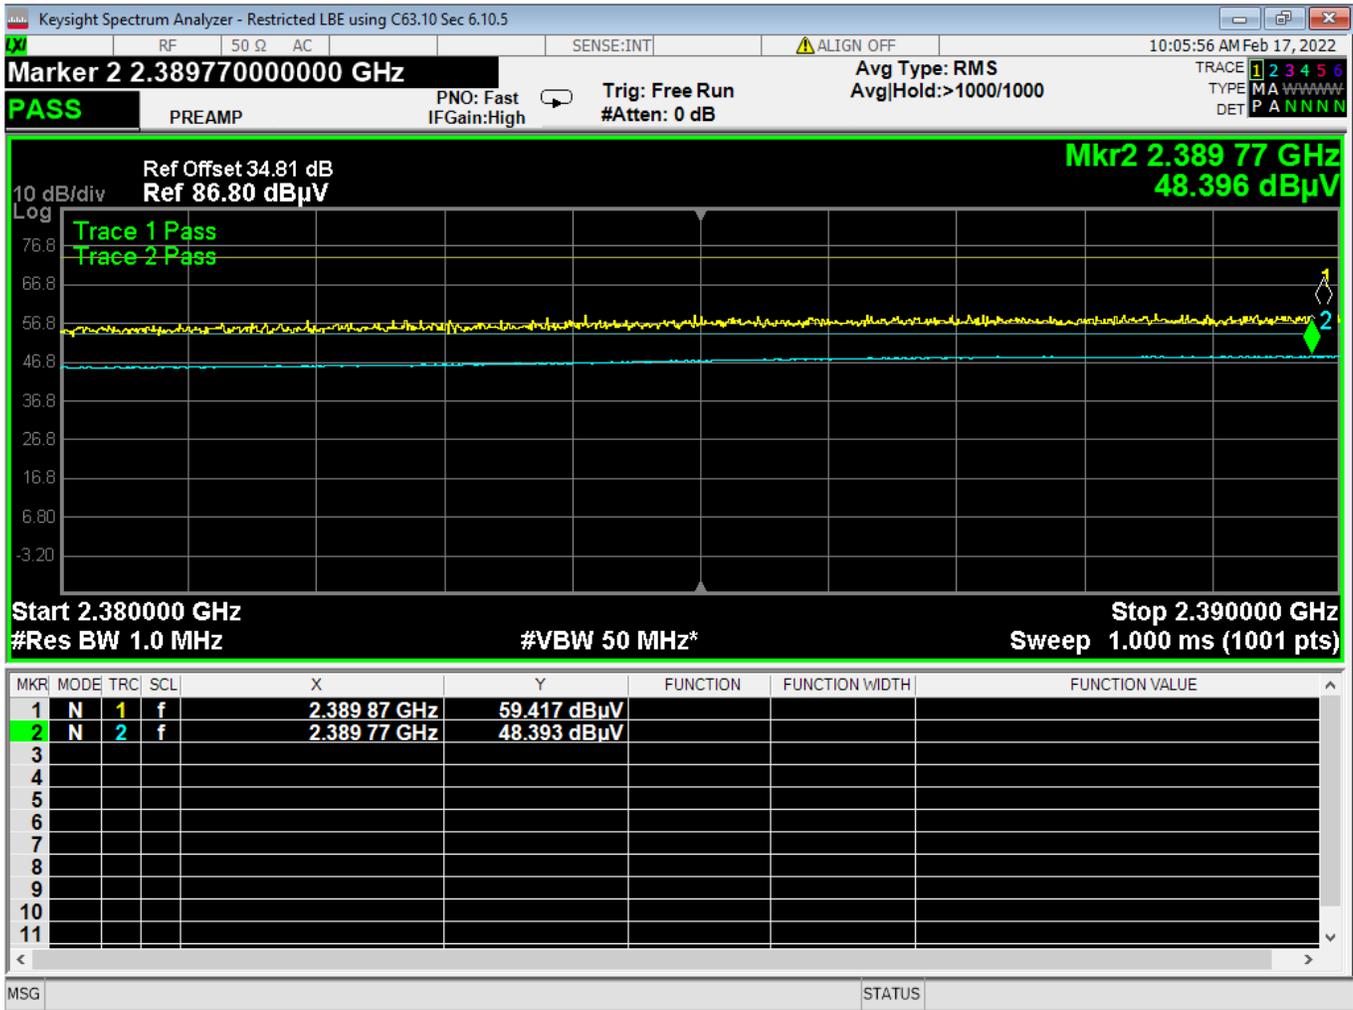

51 Lower Bandedge, Restricted, Wifi B, High Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

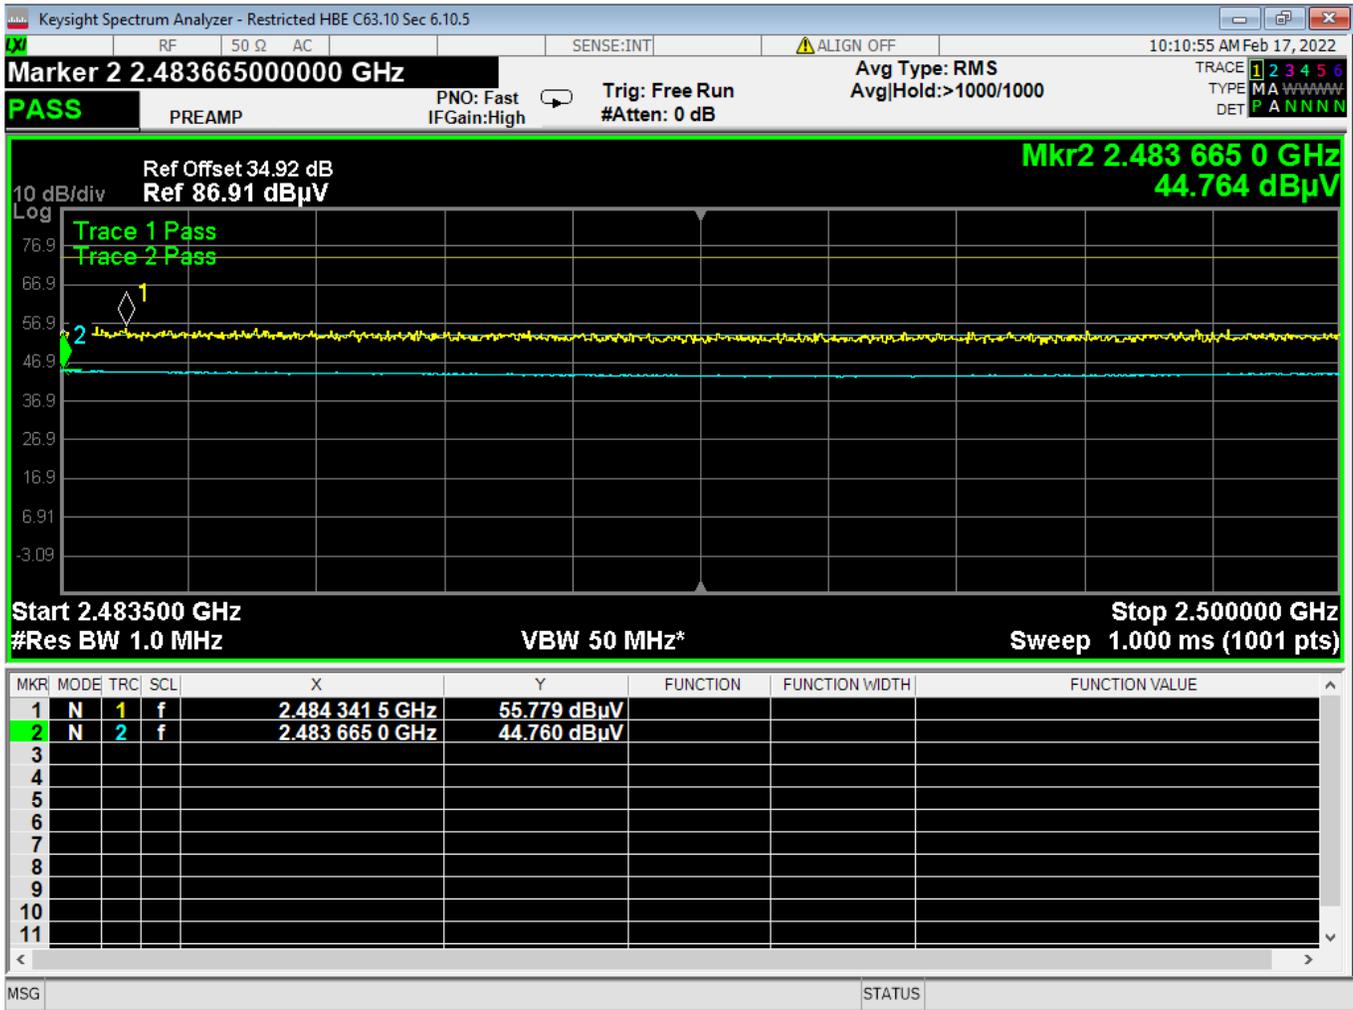

52 Higher Bandedge, Restricted, Wifi B, High Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

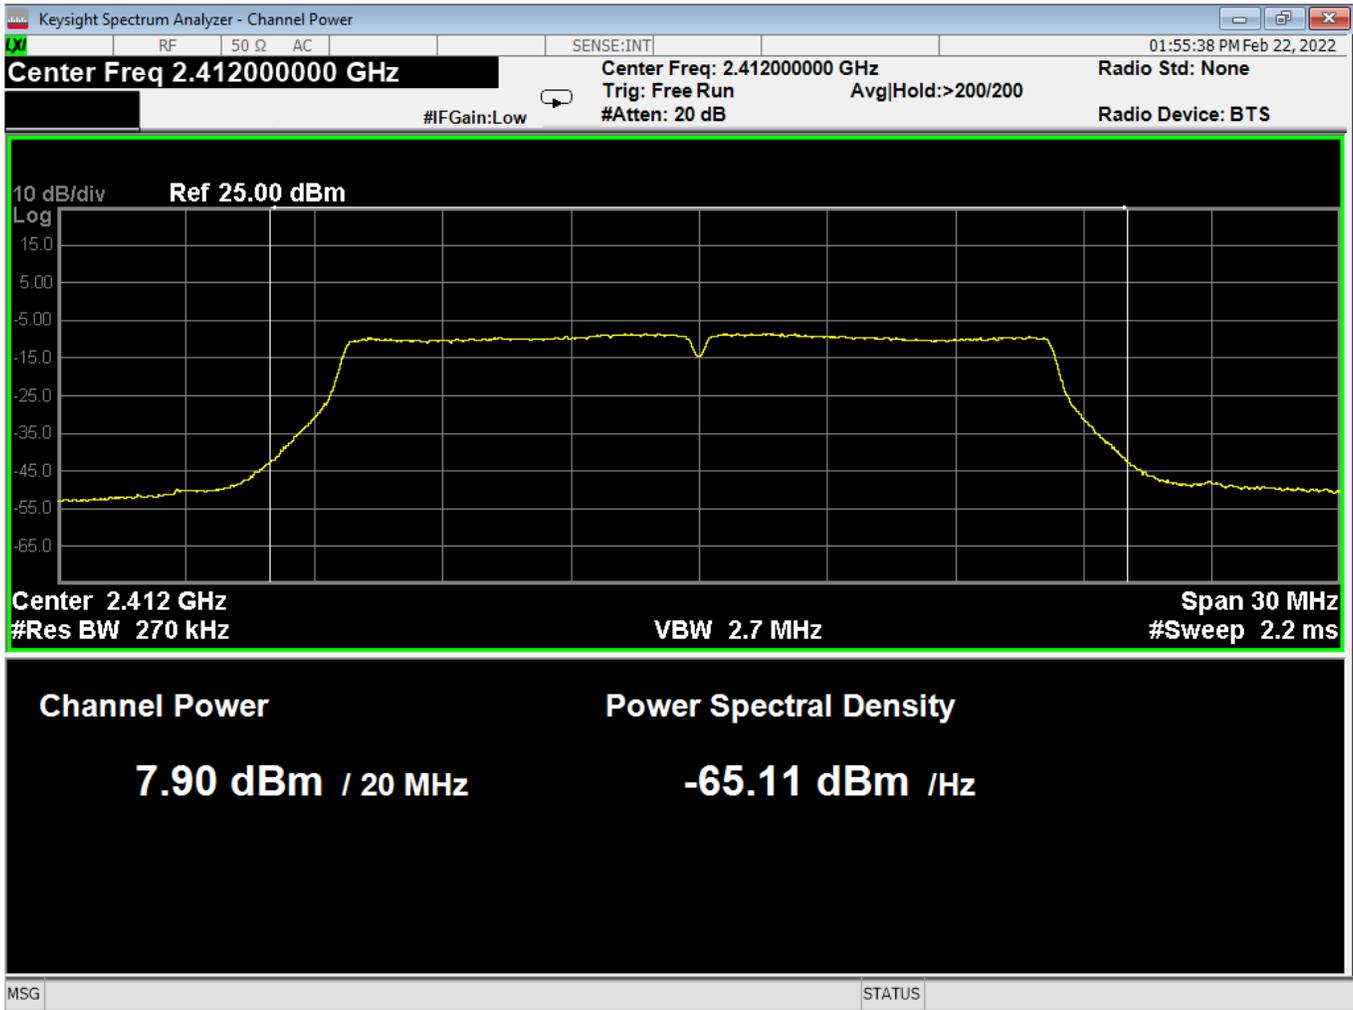

53 Average Power, Low, Wifi G, High Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

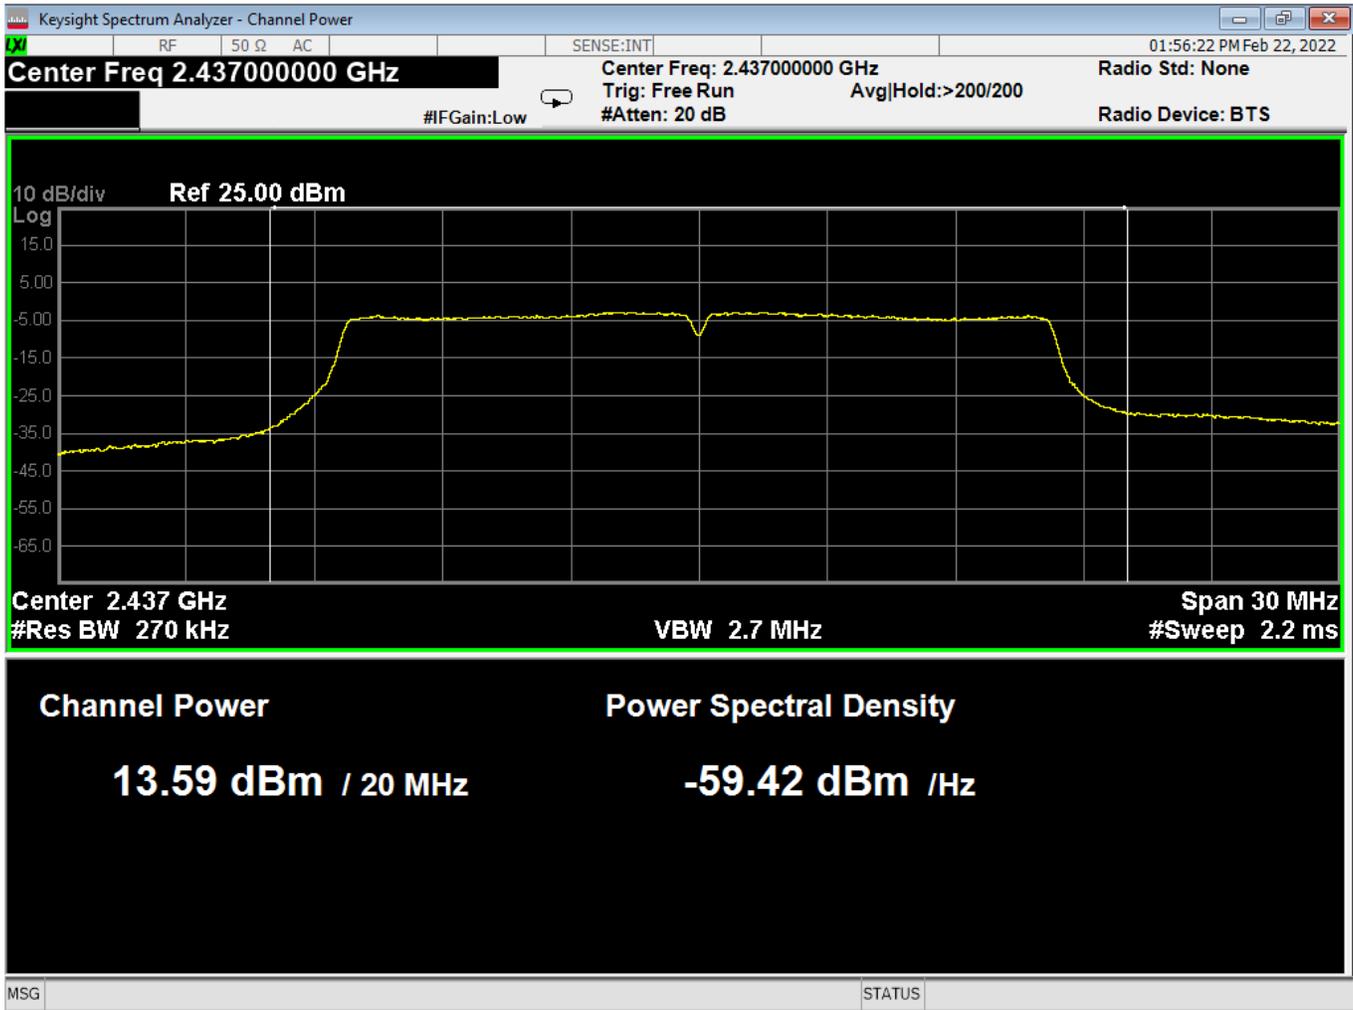

54 Average Power, Mid, Wifi G, High Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

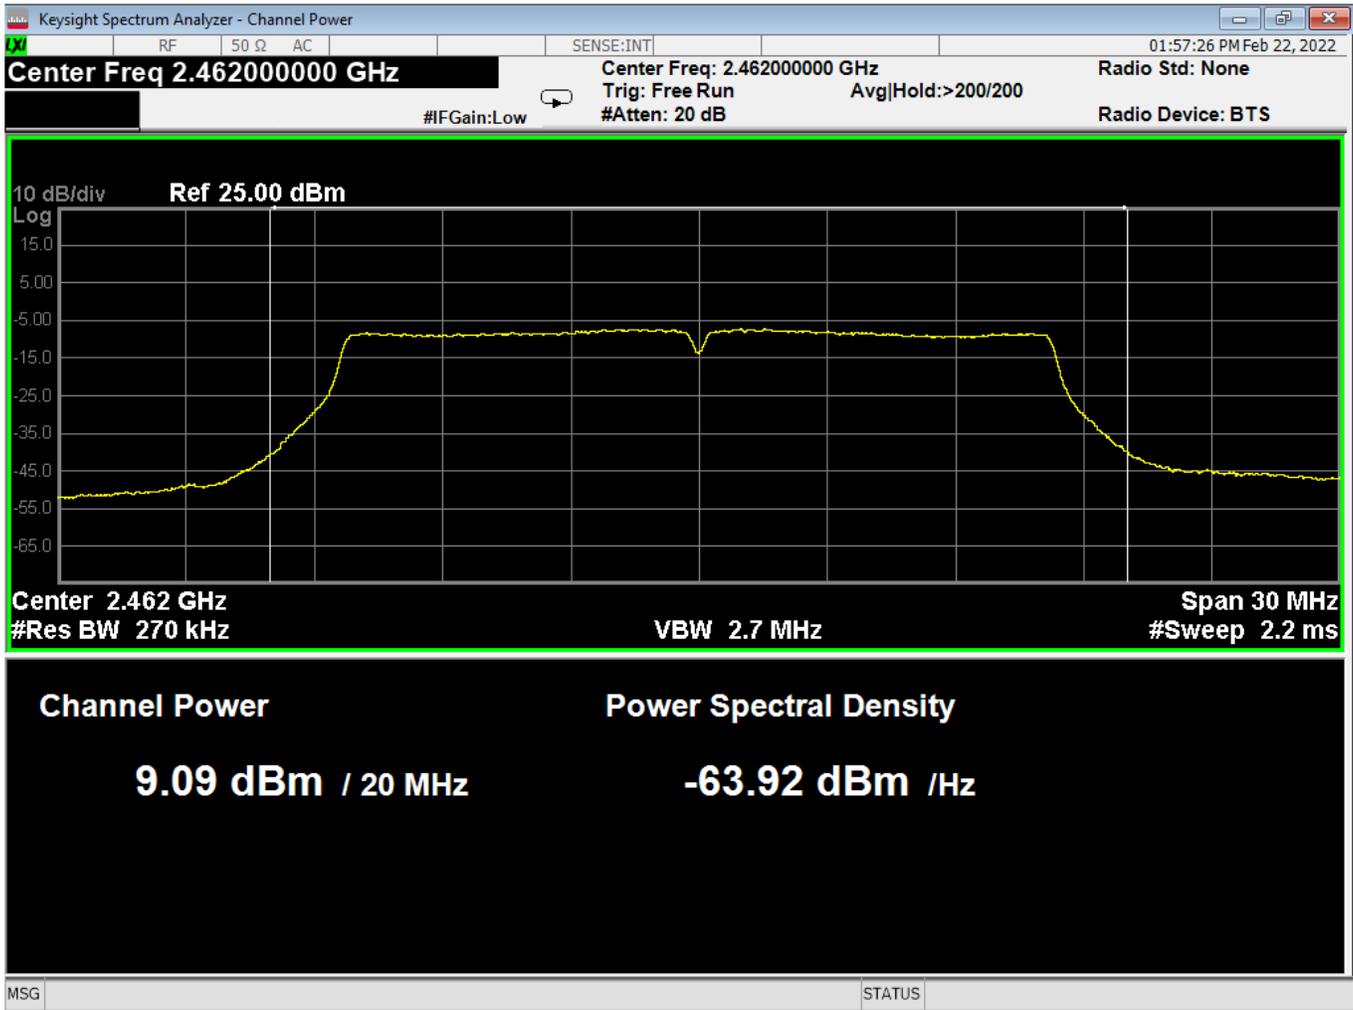

55 Average Power, High, Wifi G, High Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

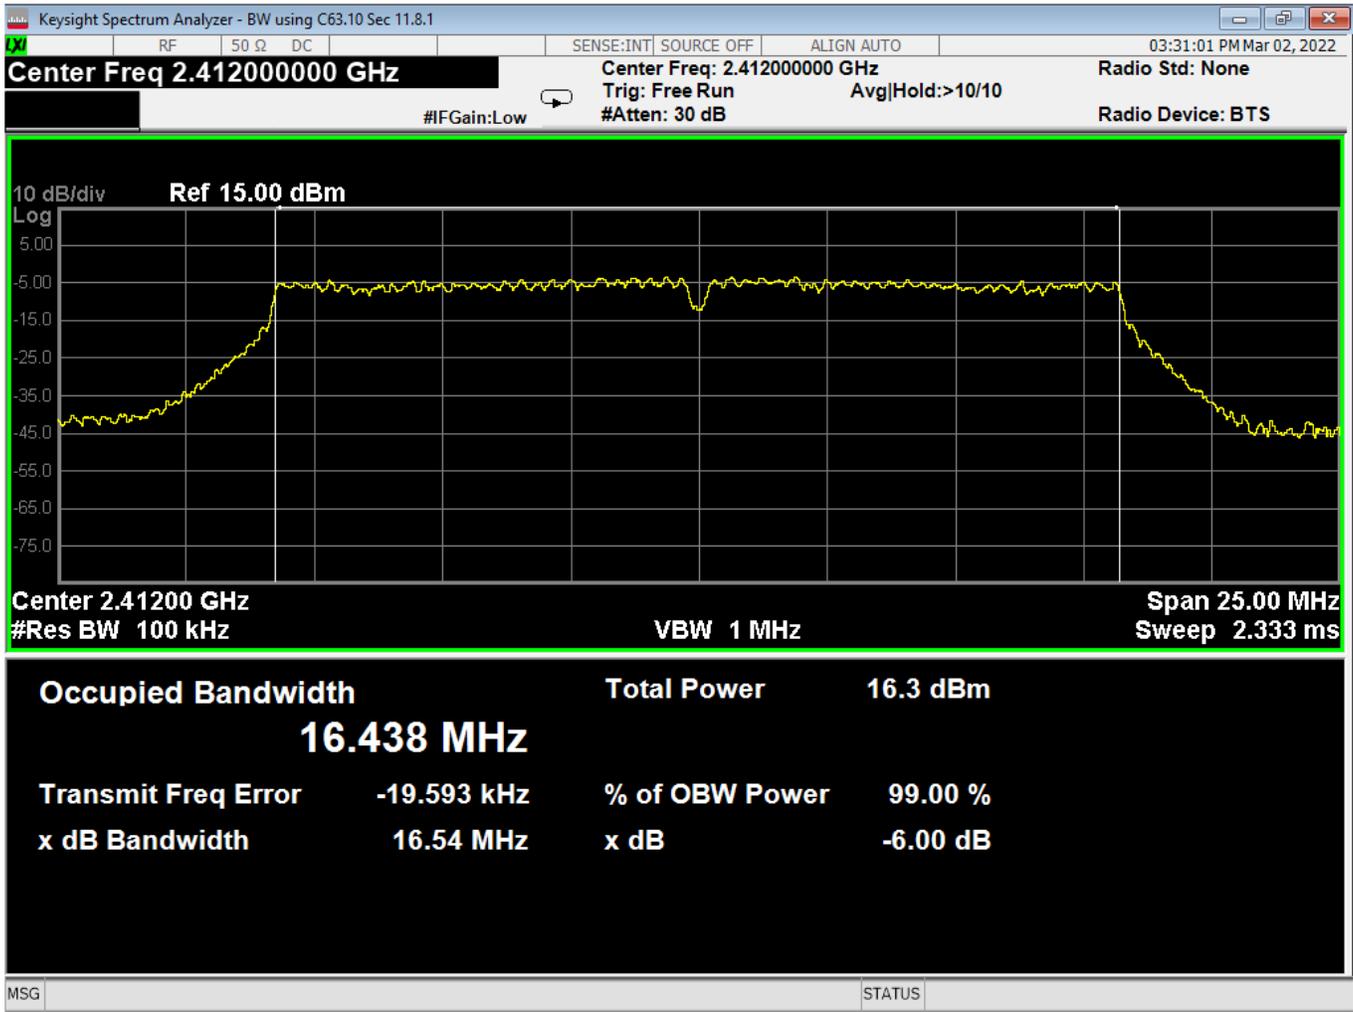

56 OBW-6dB, Low, Wifi G, High Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

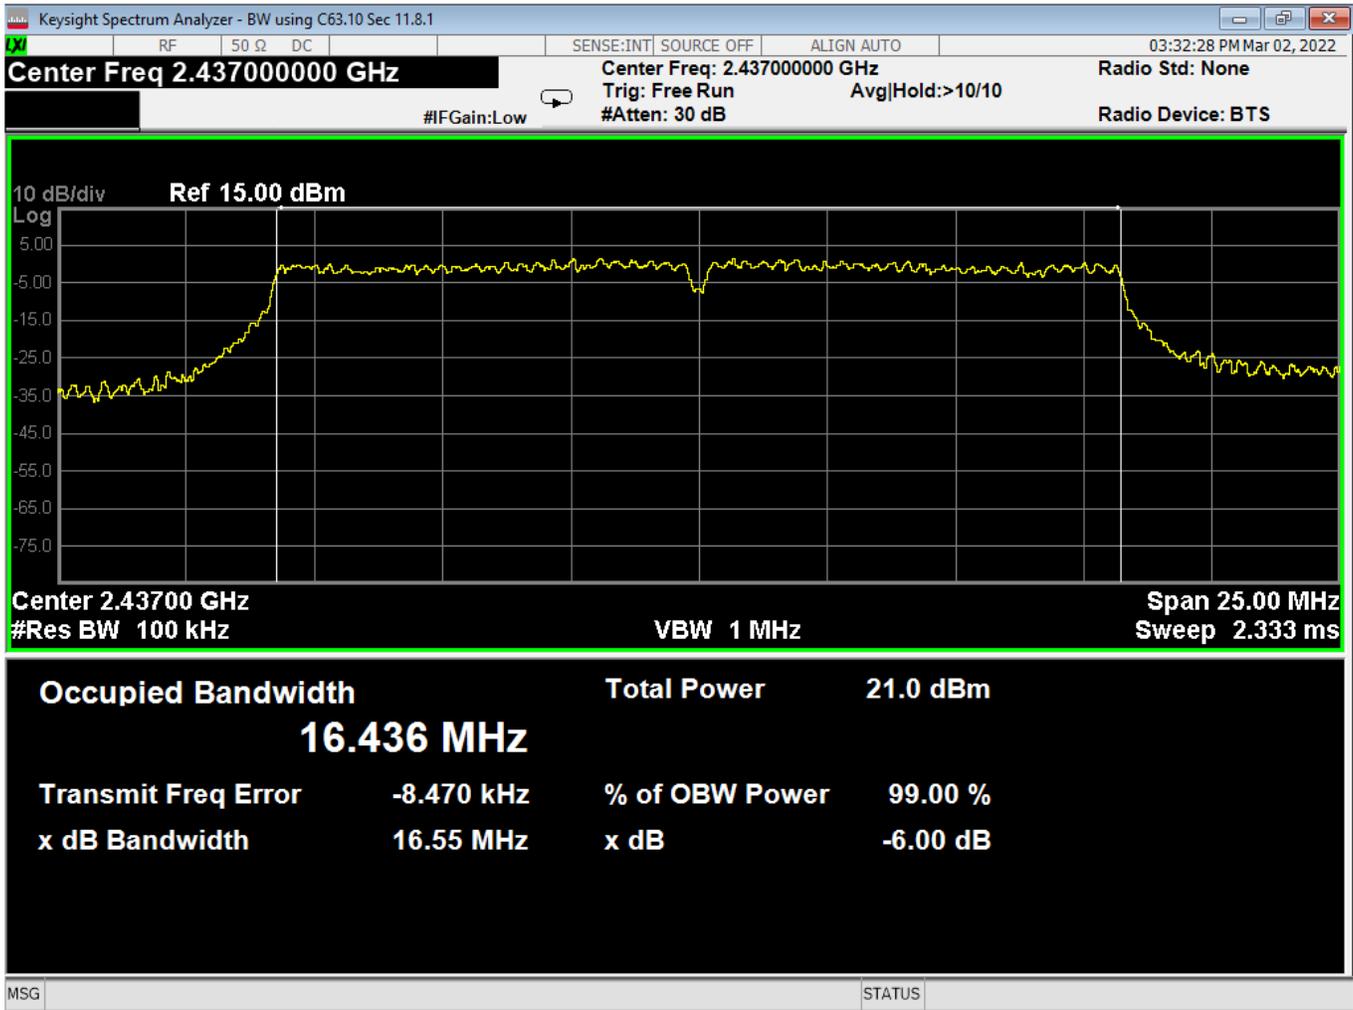

57 OBW-6dB, Mid, Wifi G, High Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

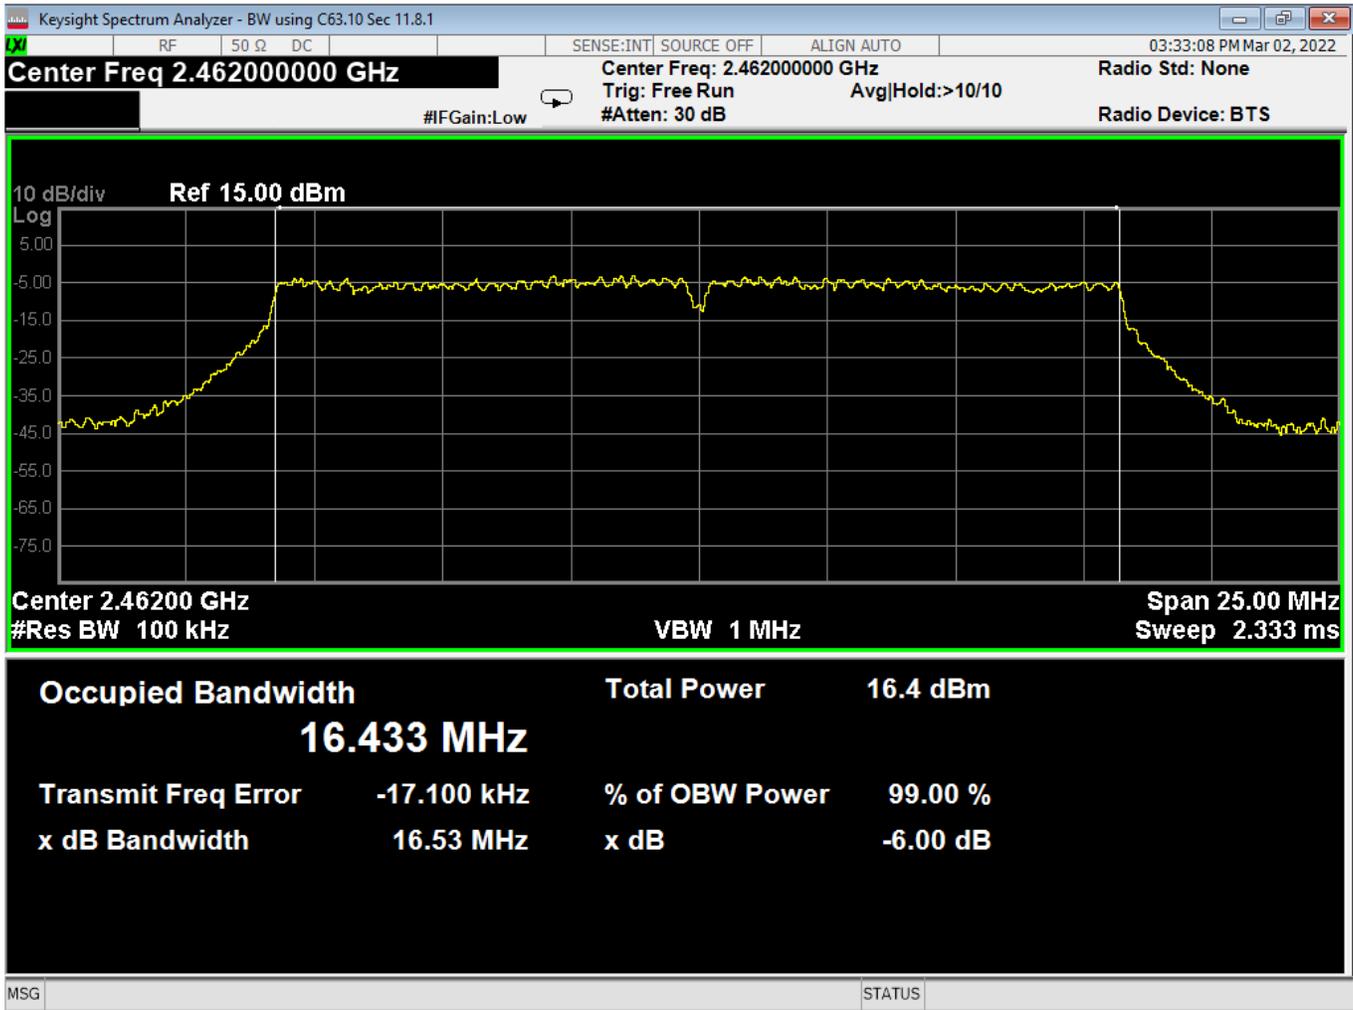

58 OBW-6dB, High, Wifi G, High Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

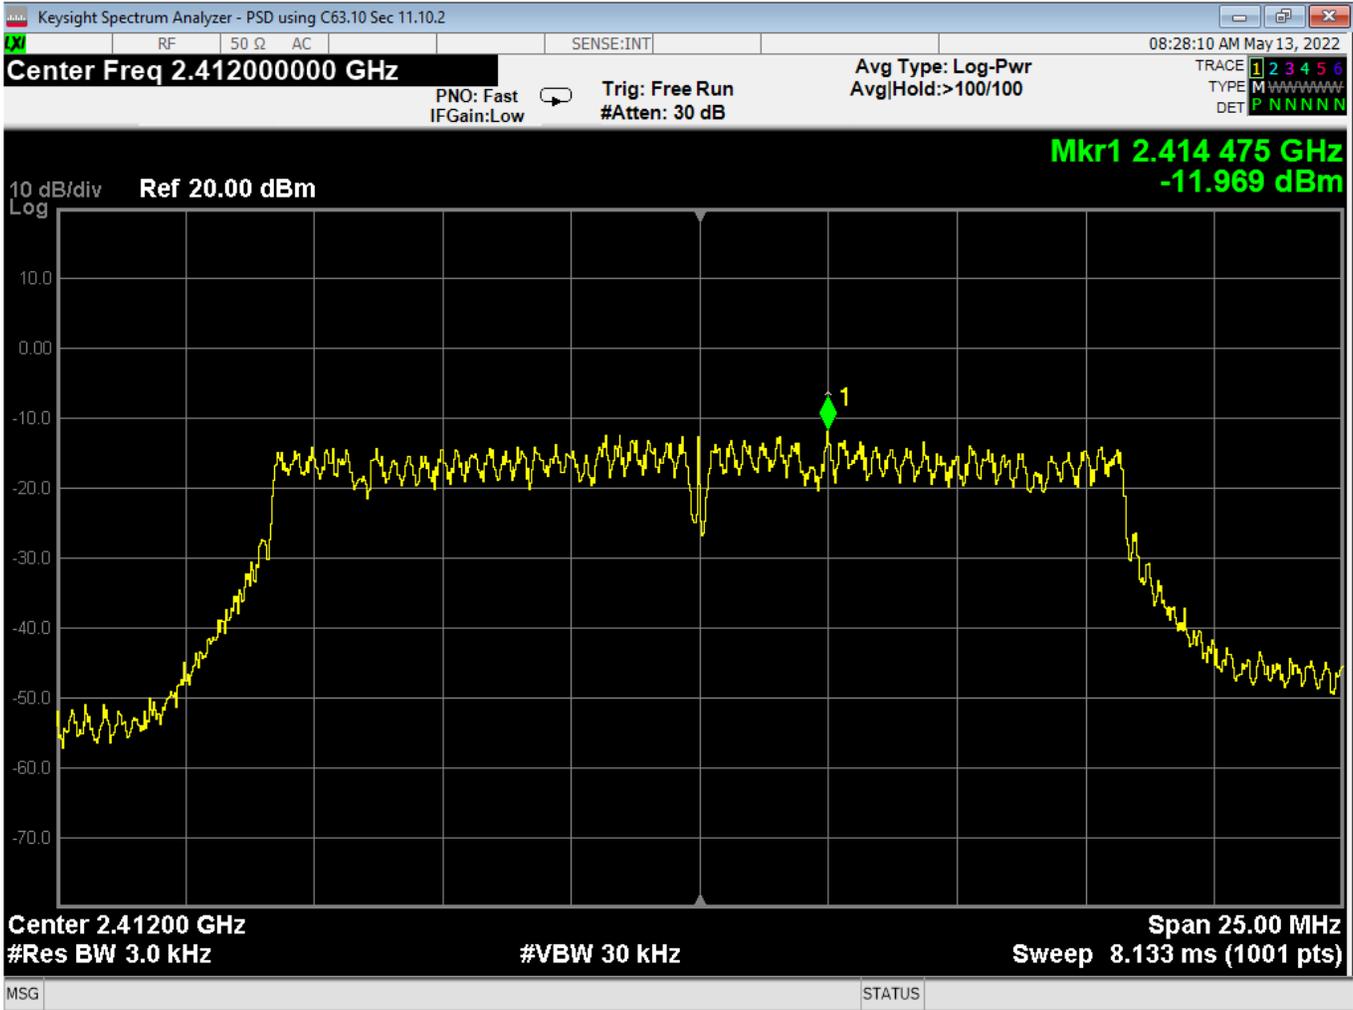

59 PSD, Low, Wifi G, High Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

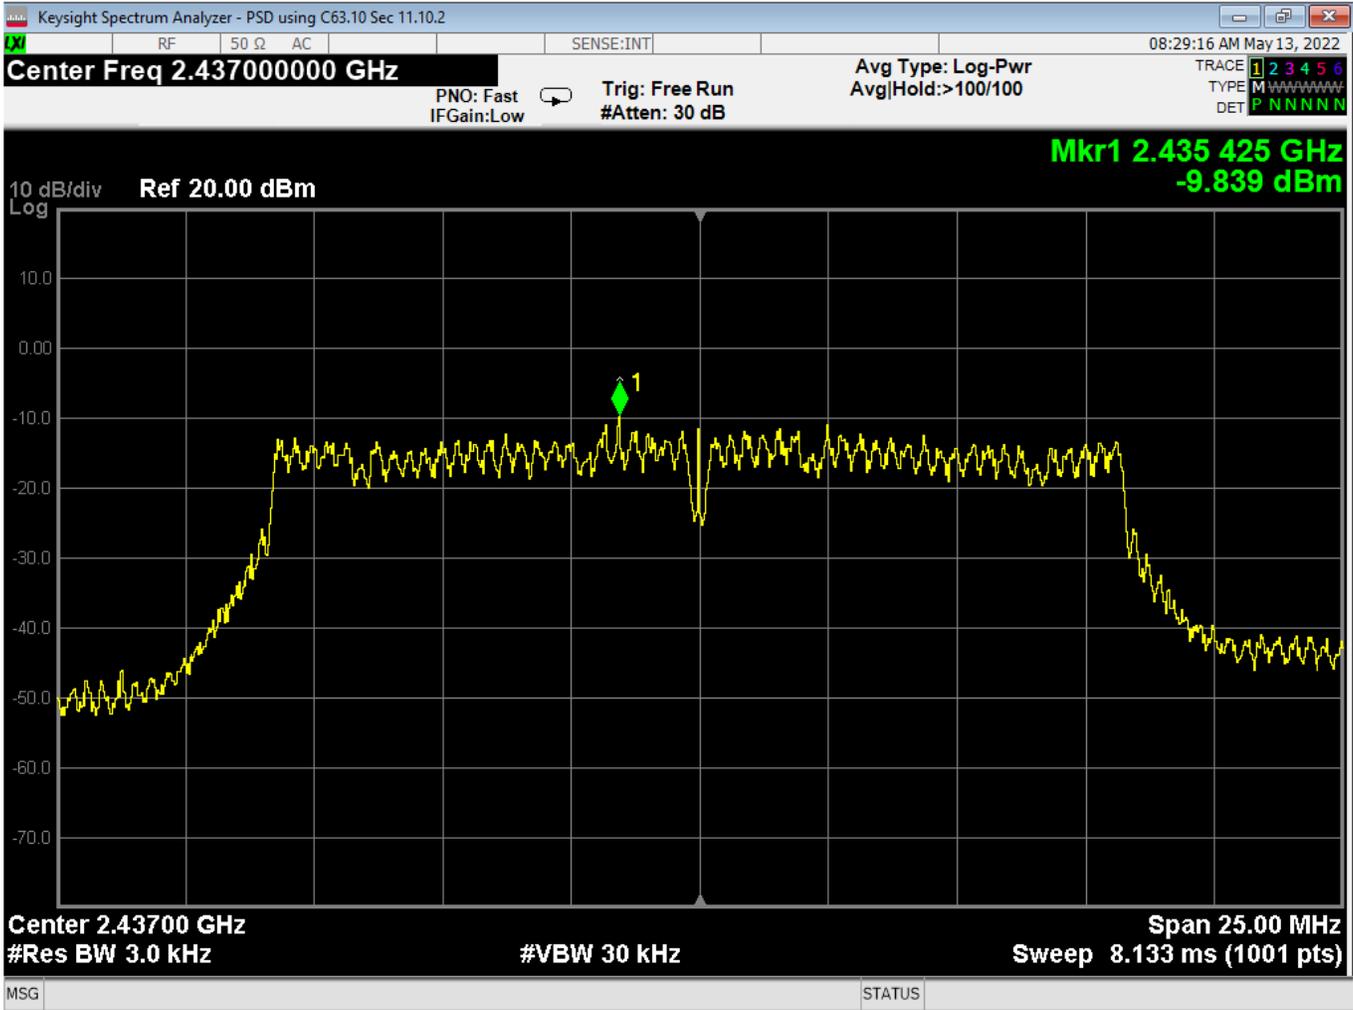

60 PSD, Mid, Wifi G, High Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

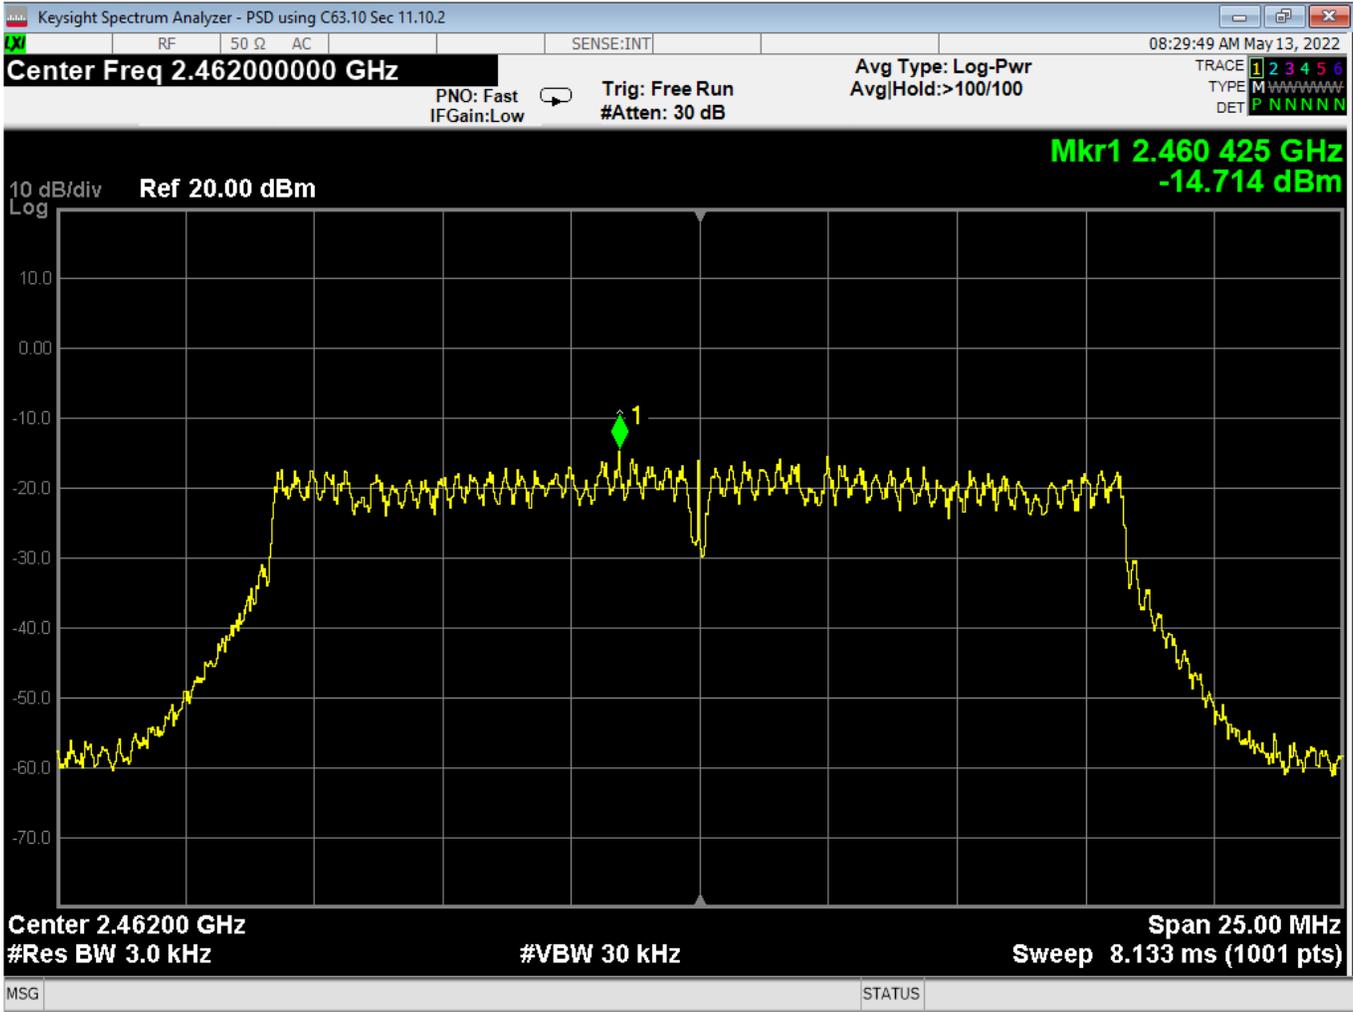

61 PSD, High, Wifi G, High Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

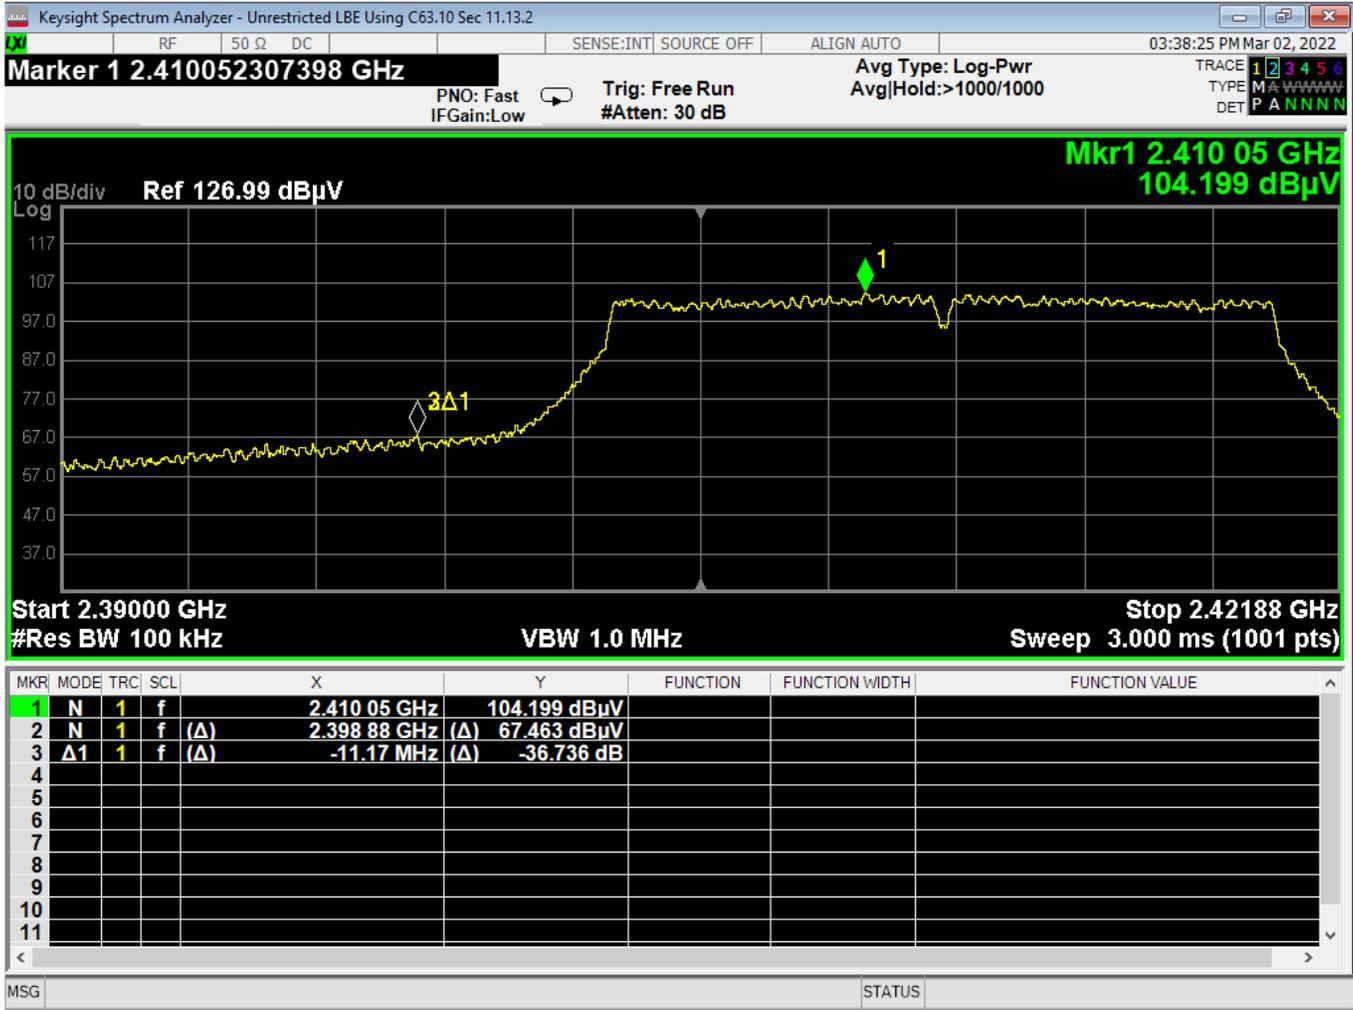

62 Lower Bandedge, Unrestricted, Wifi G, High Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

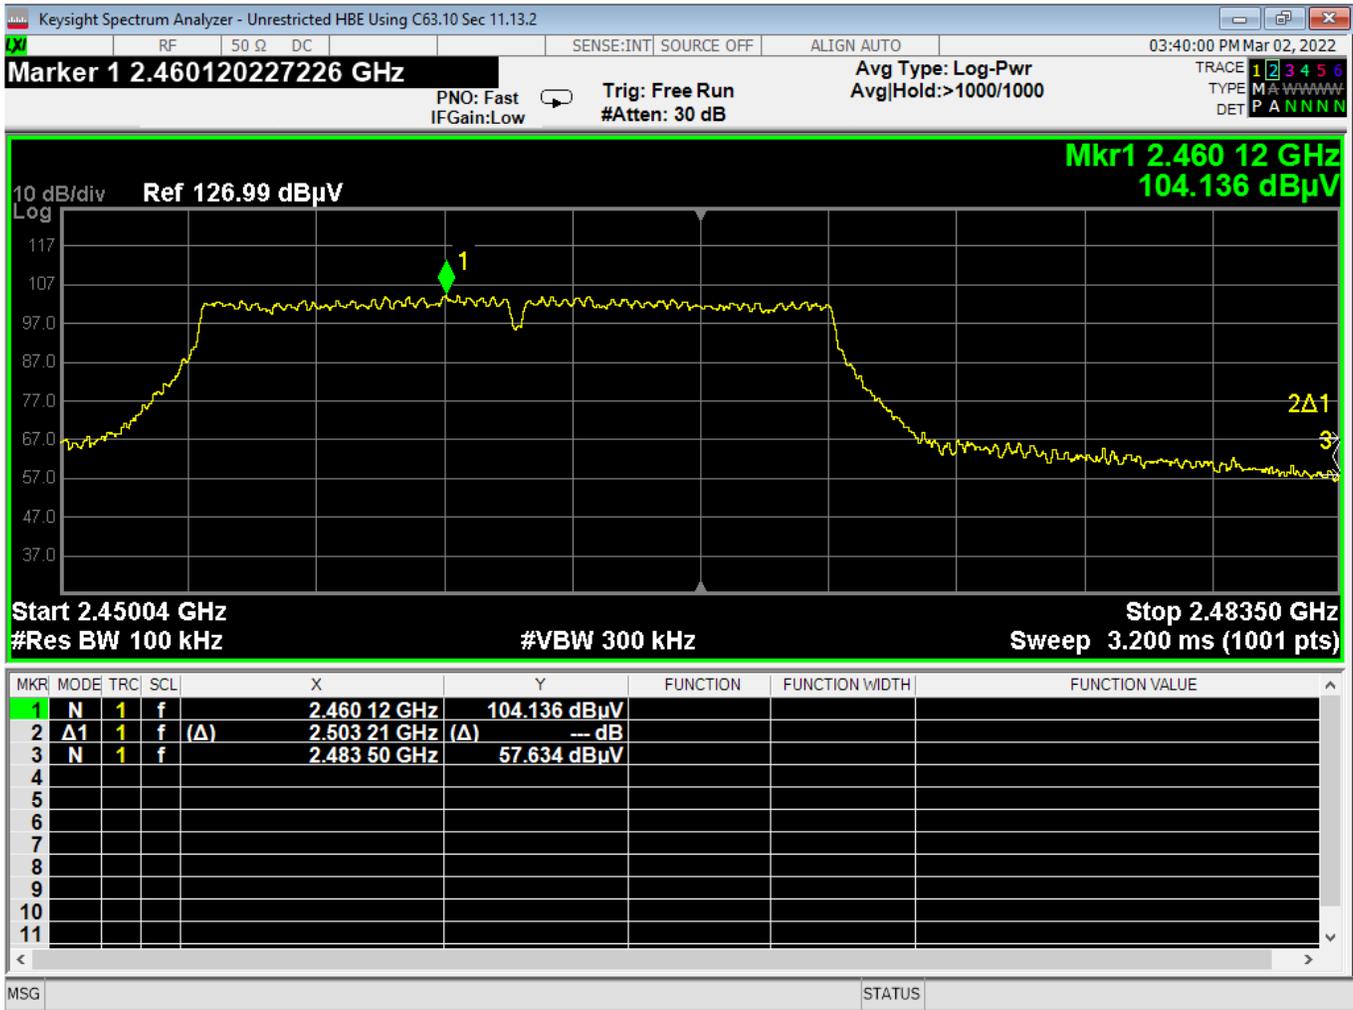

63 Higher Bandedge, Unrestricted, Wifi G, High Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

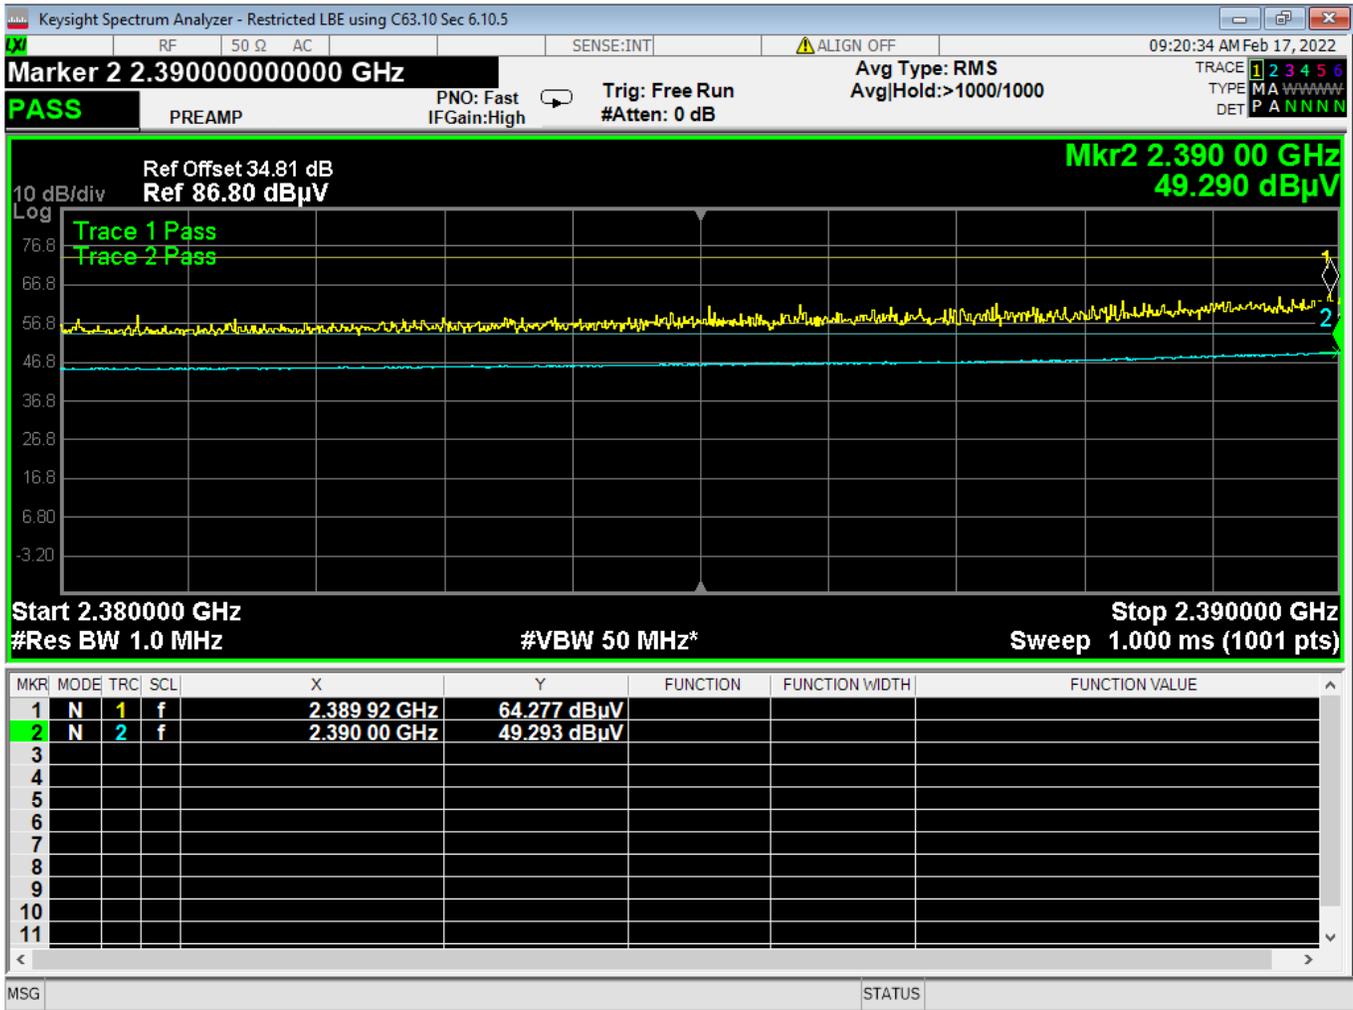

64 Lower Bandedge, Restricted, Wifi G, High Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

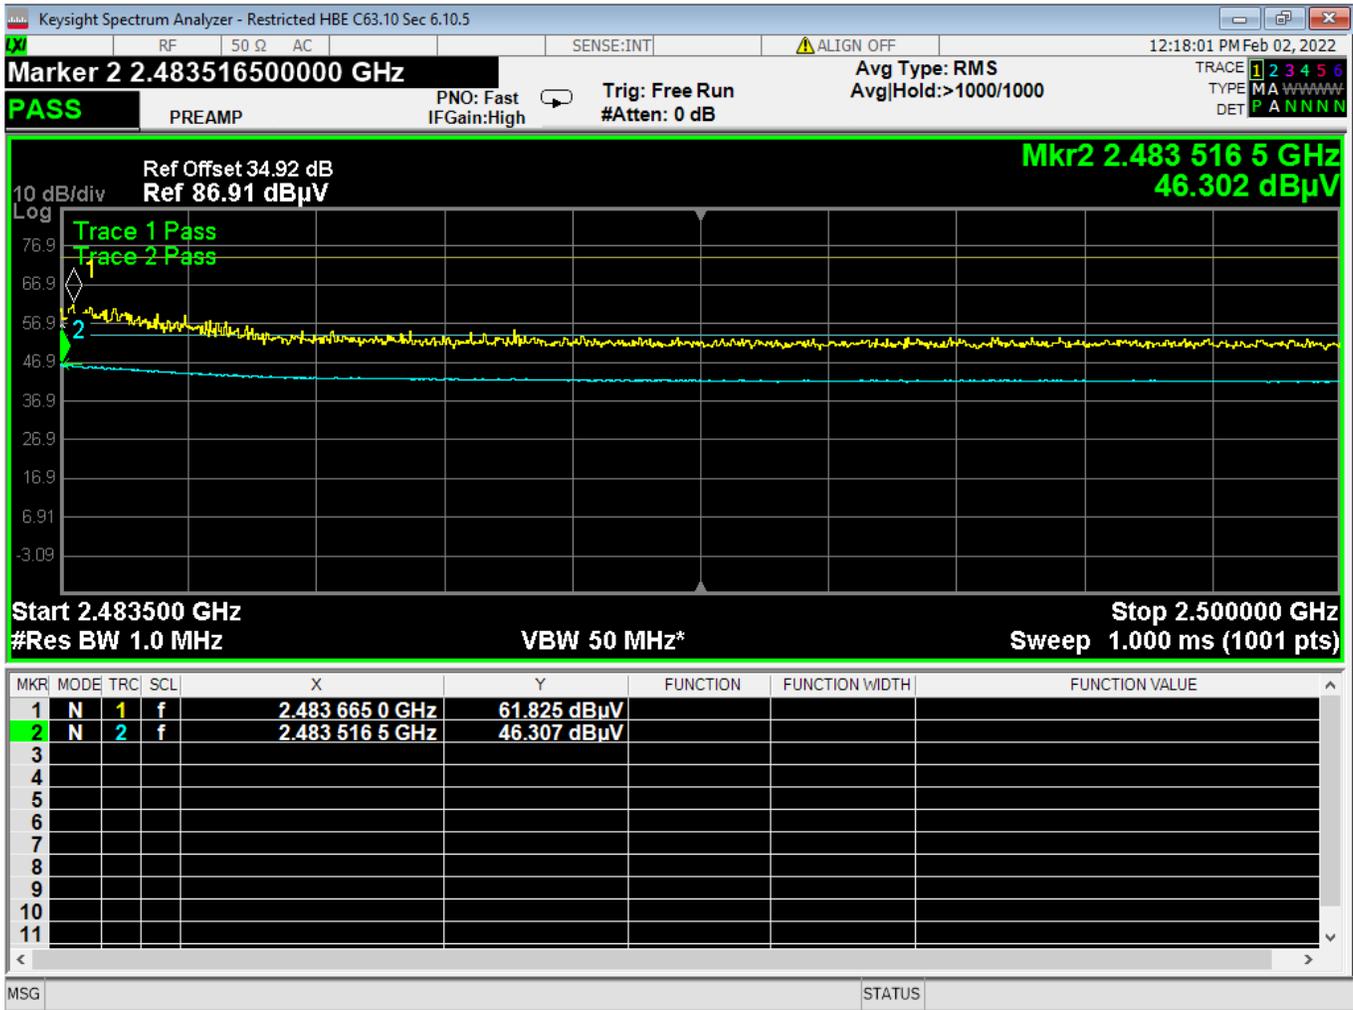

65 Higher Bandedge, Restricted, Wifi G, High Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

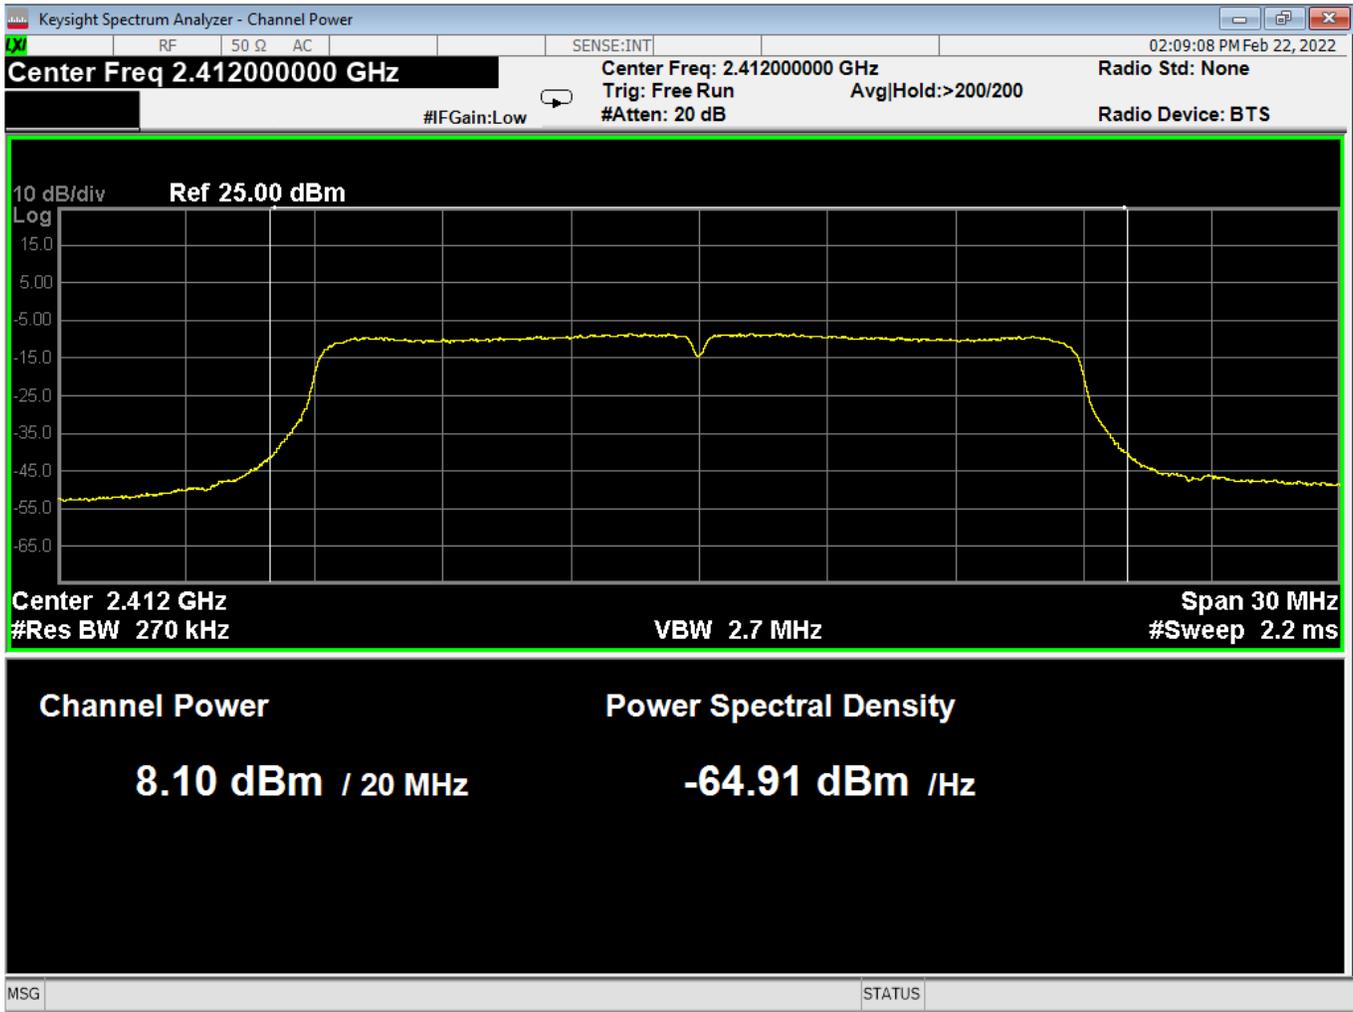

66 Average Power, Low, Wifi N, High Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

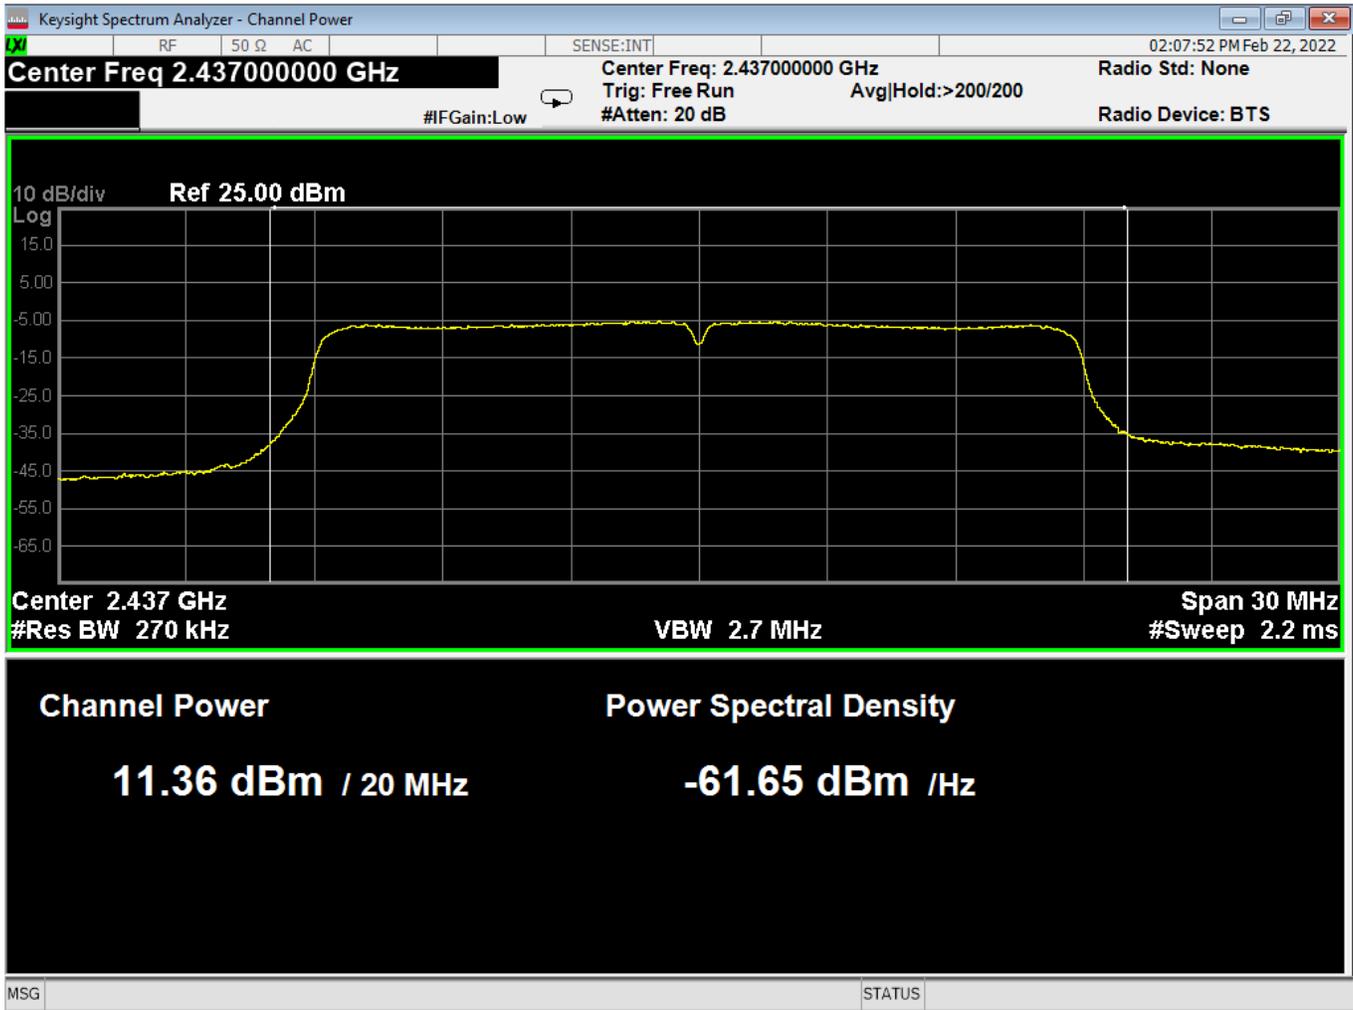

67 Average Power, Mid, Wifi N, High Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

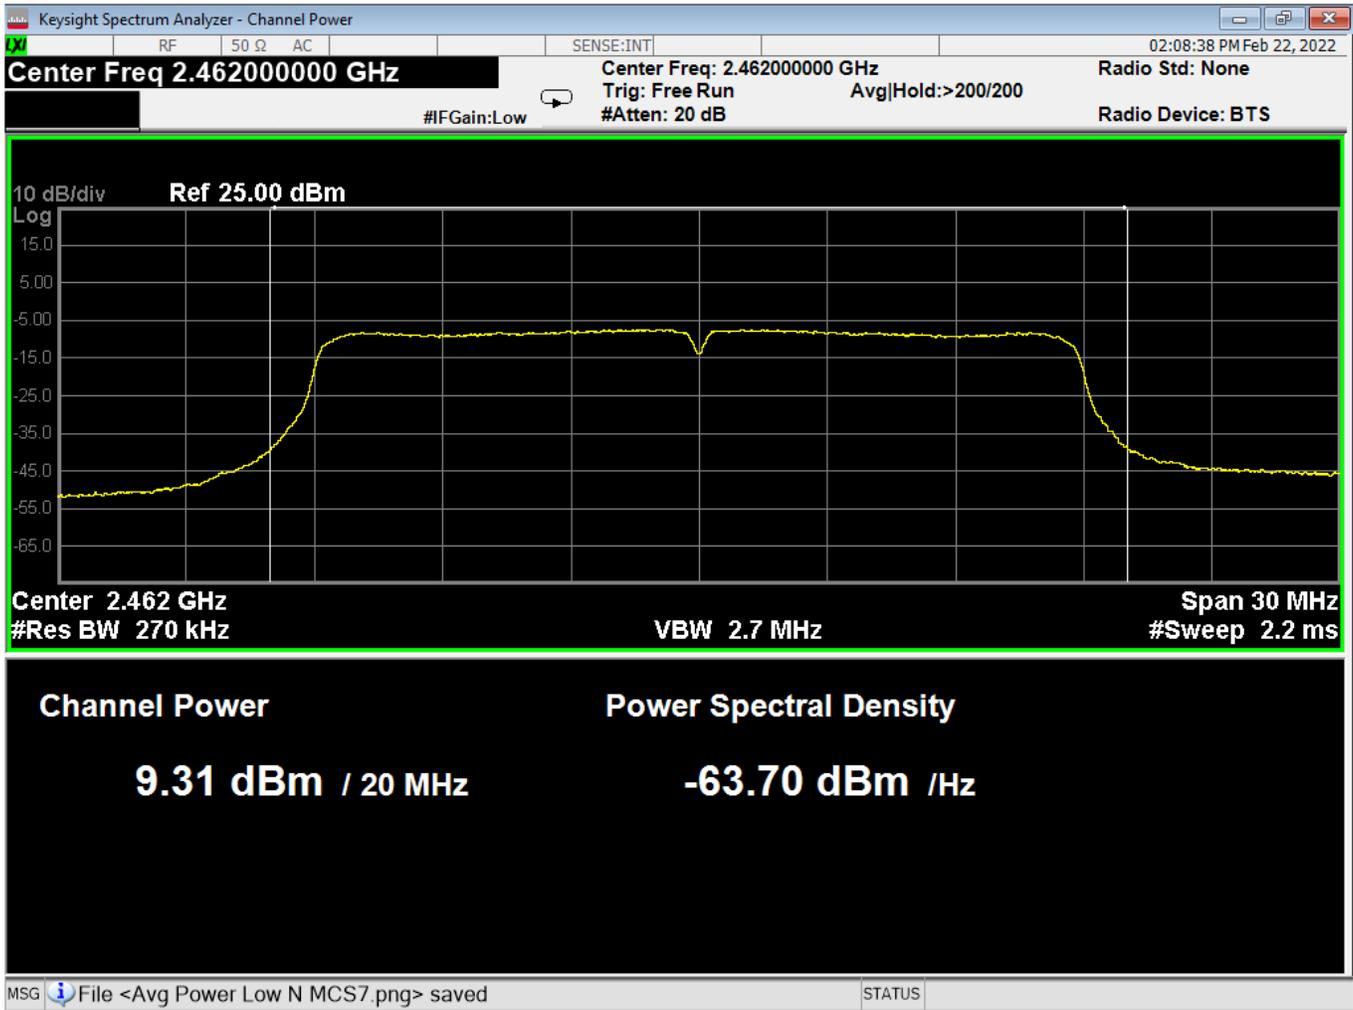

68 Average Power, High, Wifi N, High Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

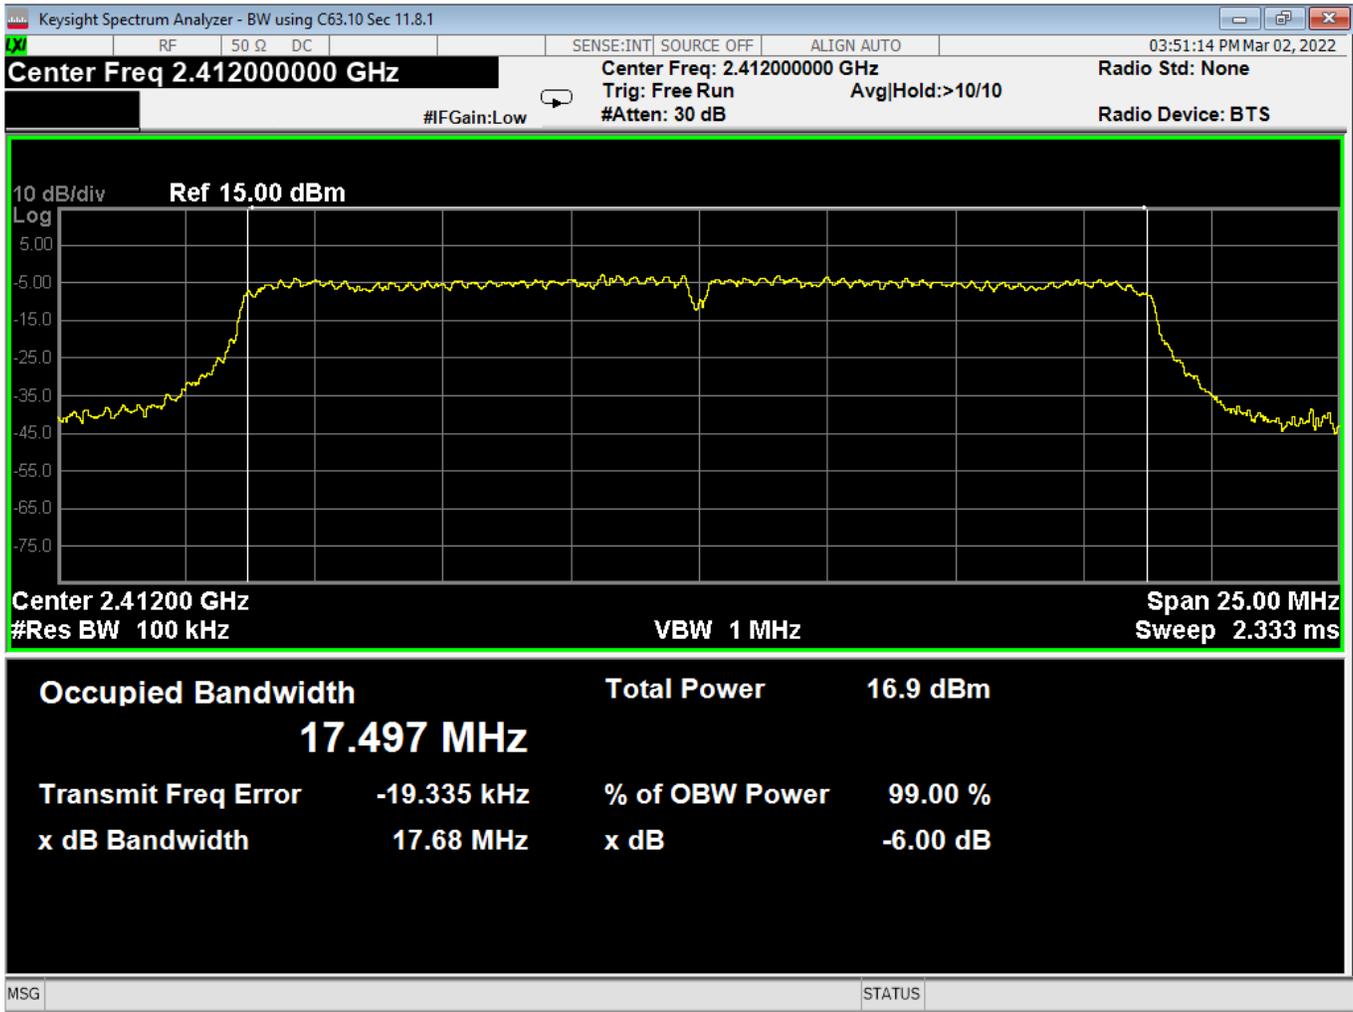

69 OBW-6dB, Low, Wifi N, High Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

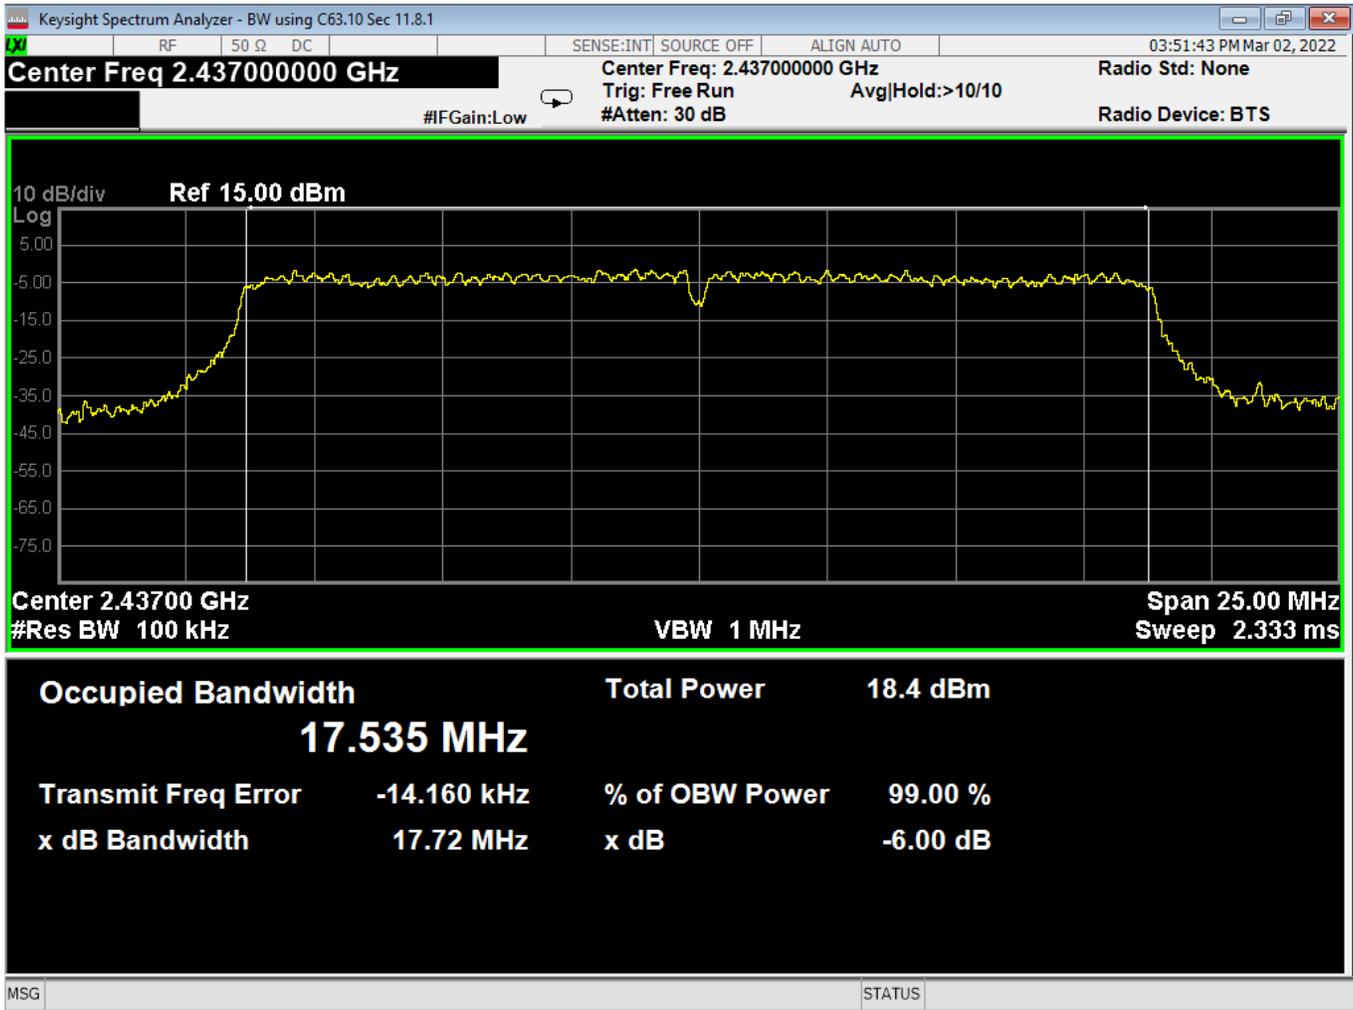

70 OBW-6dB, Mid, Wifi N, High Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

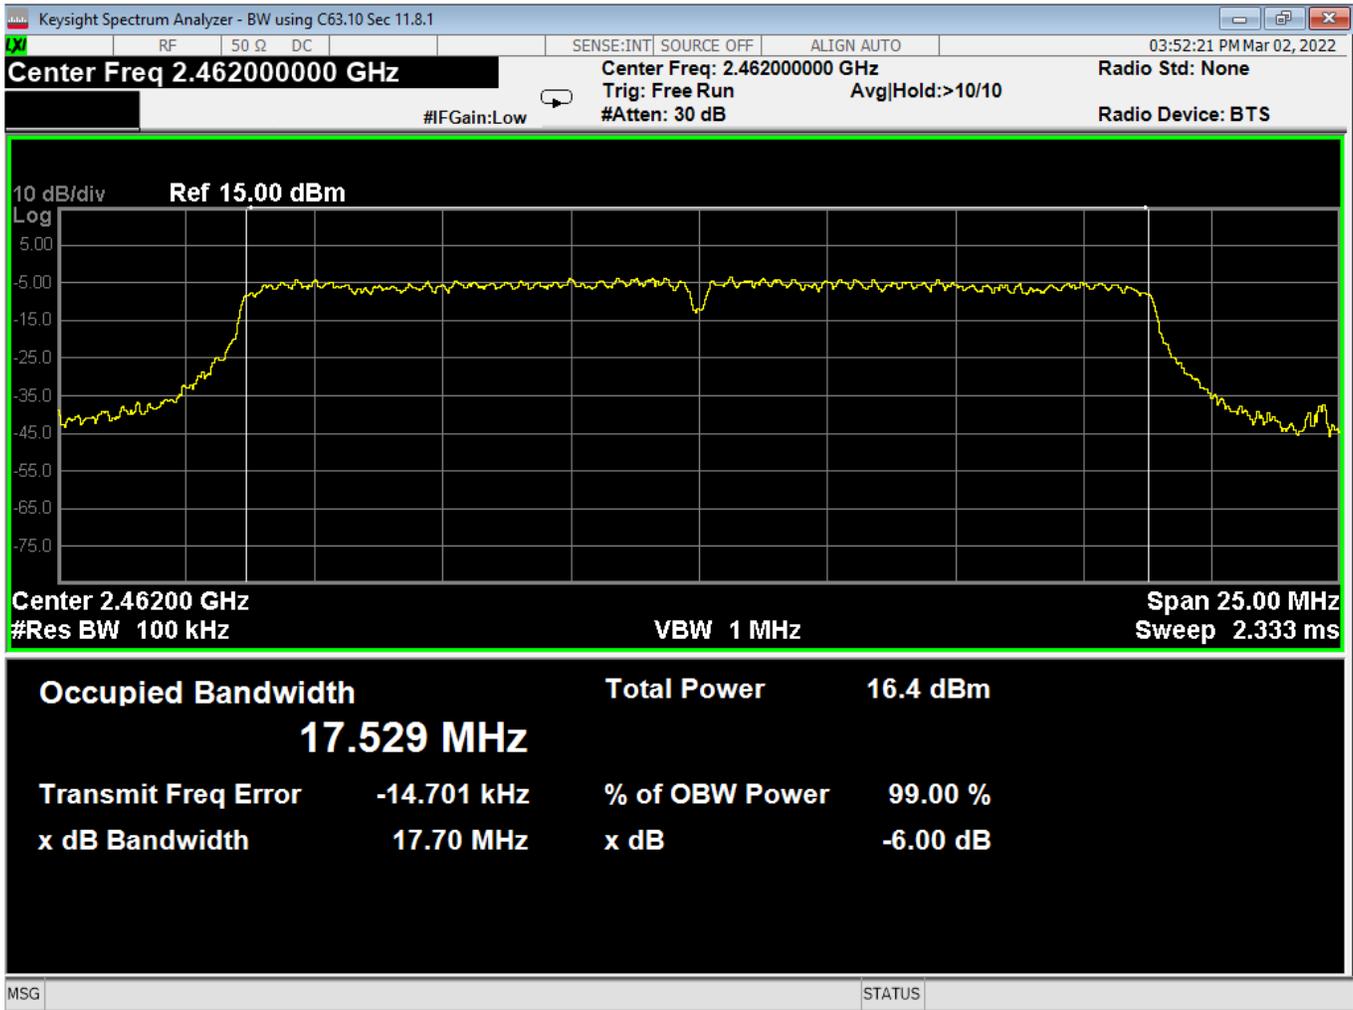

71 OBW-6dB, High, Wifi N, High Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

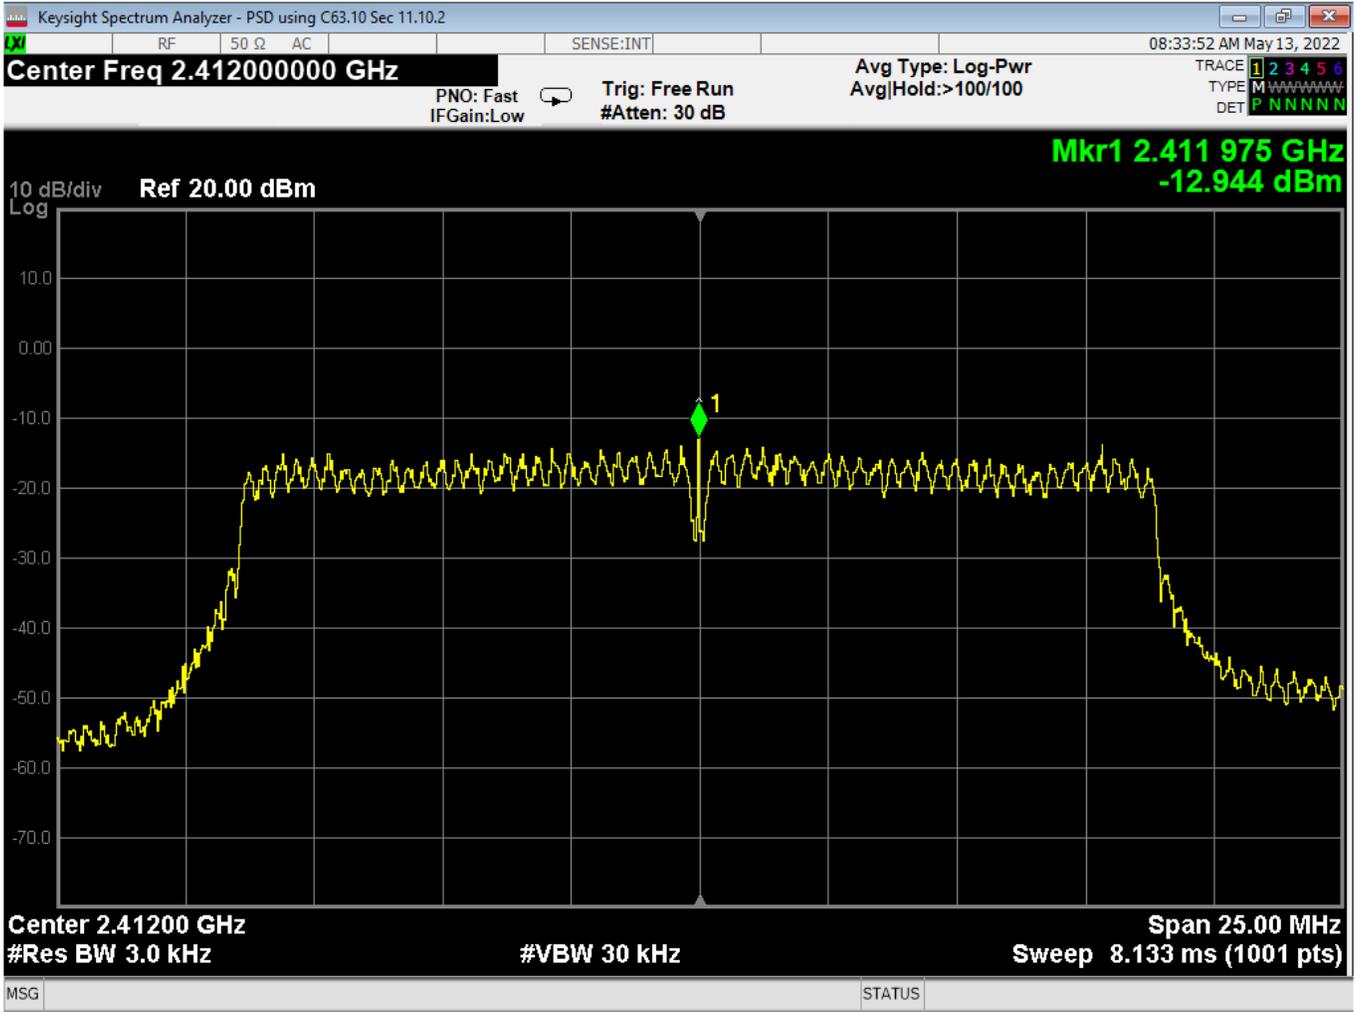

72 PSD, Low, Wifi N, High Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

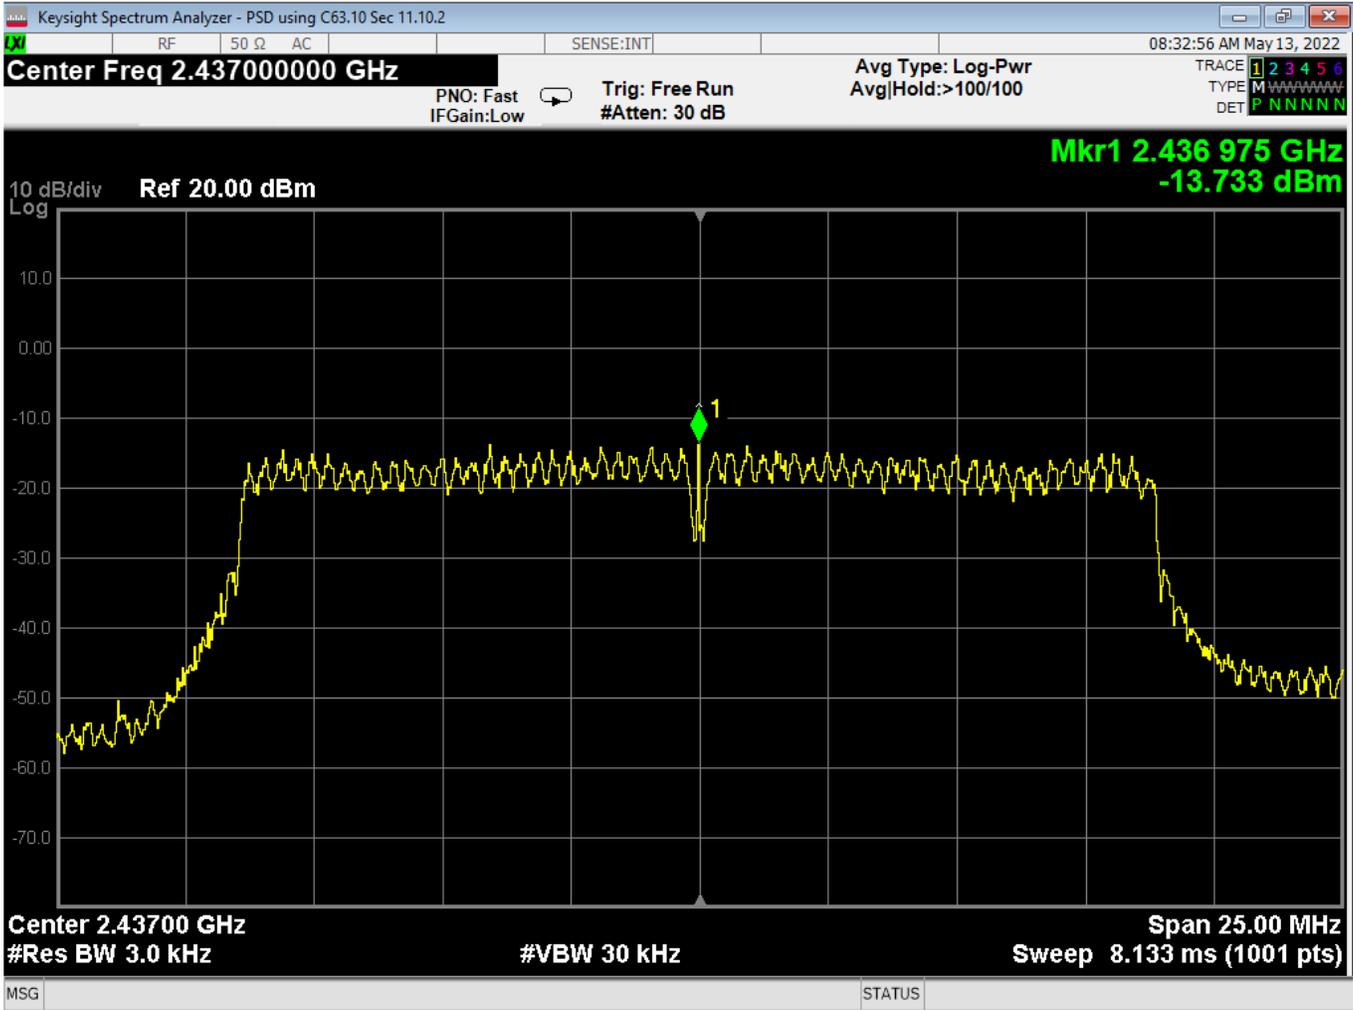

73 PSD, Mid, Wifi N, High Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

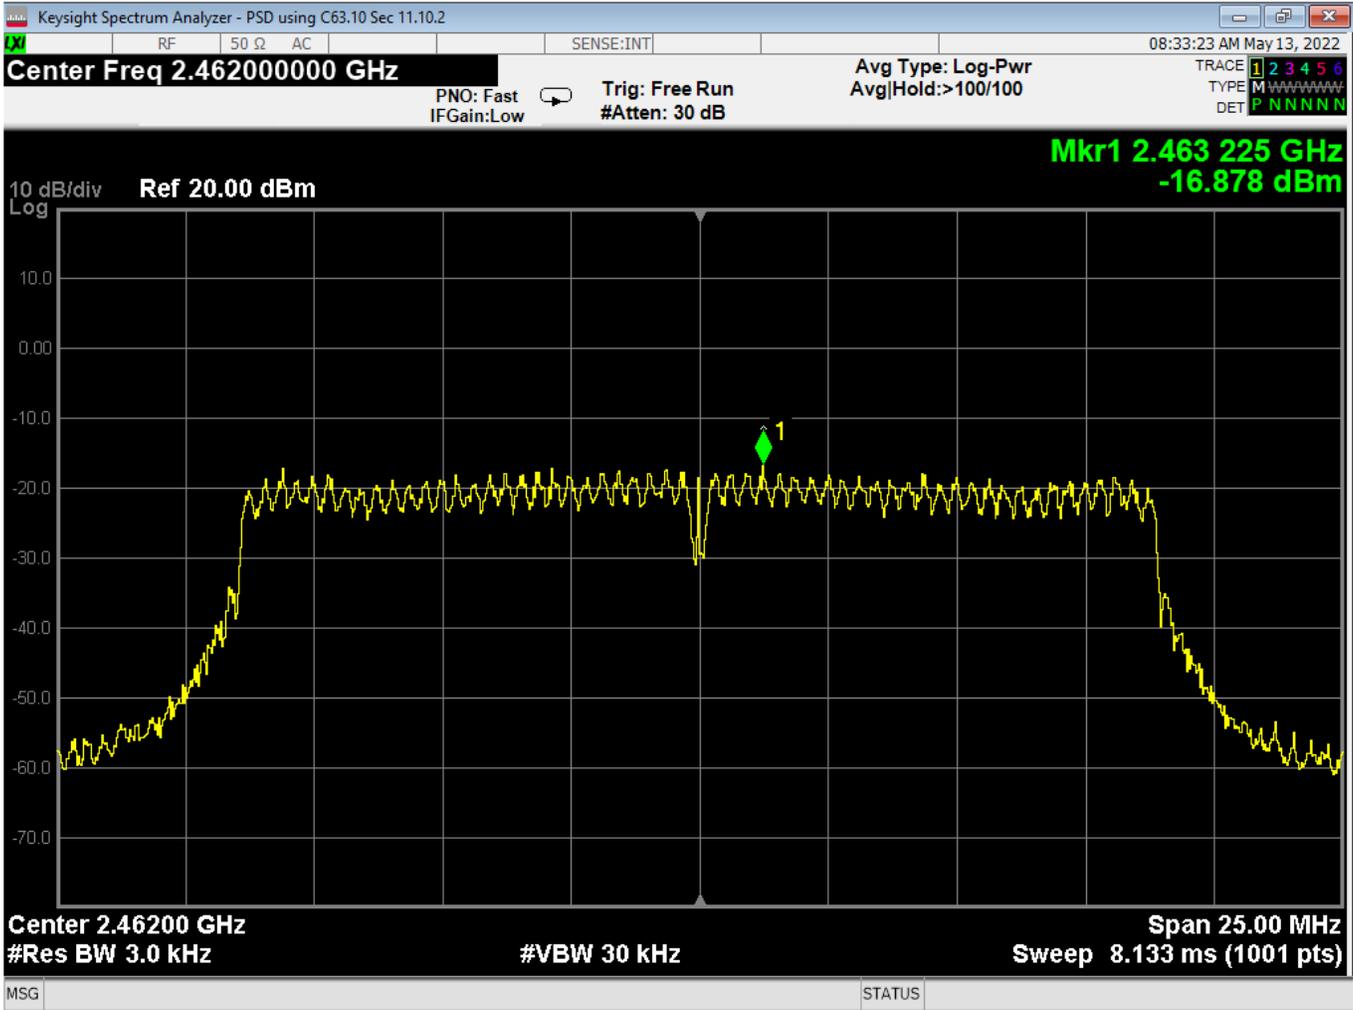

74 PSD, High, Wifi N, High Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

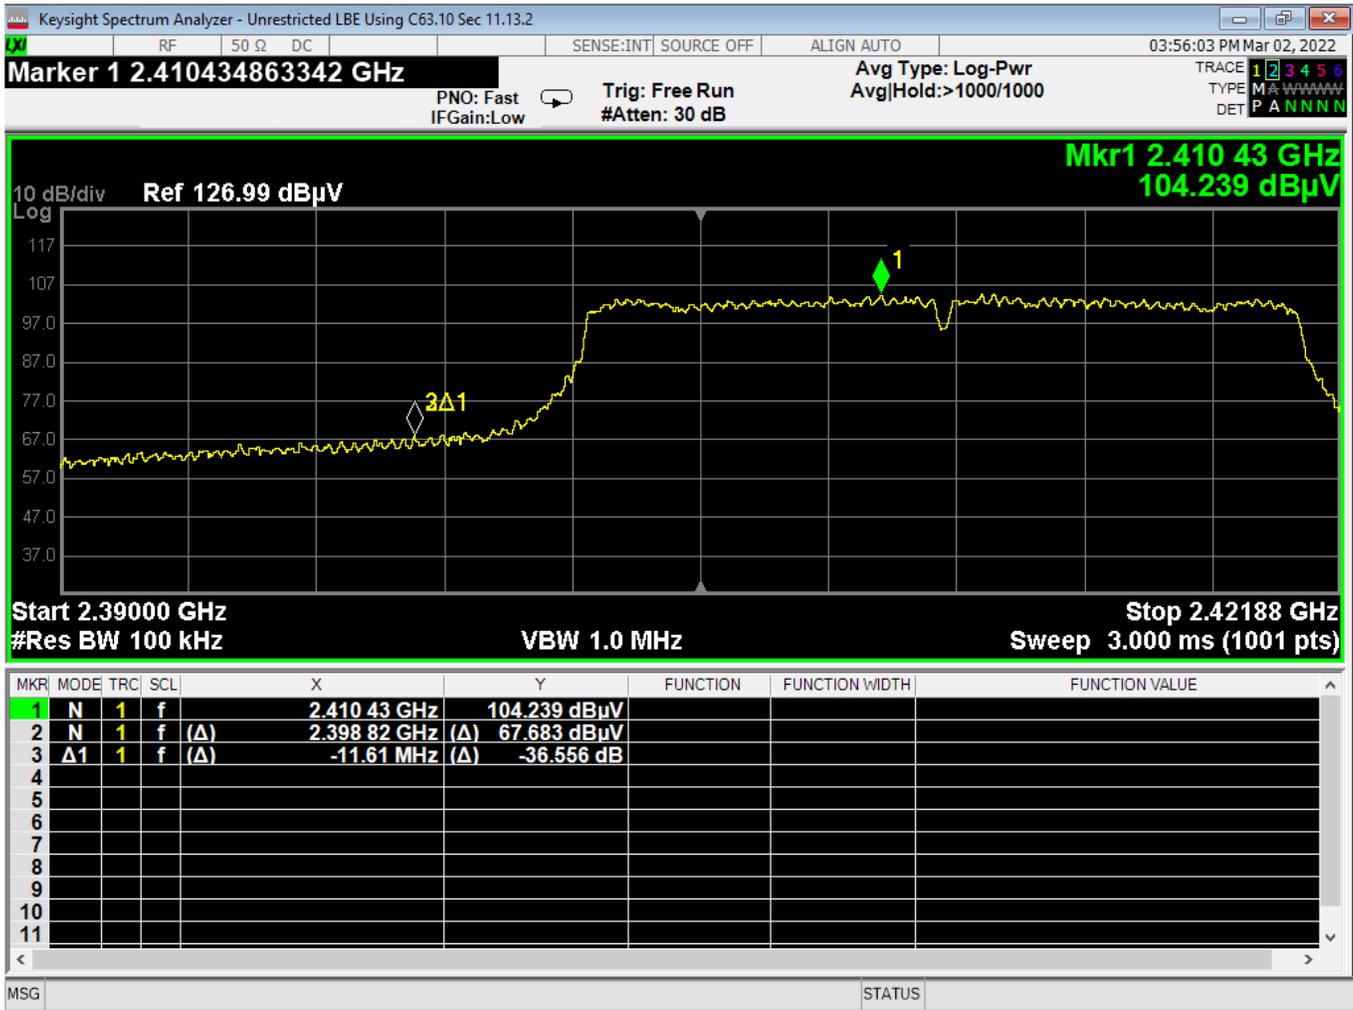

75 Lower Bandedge, Unrestricted, Wifi N, High Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

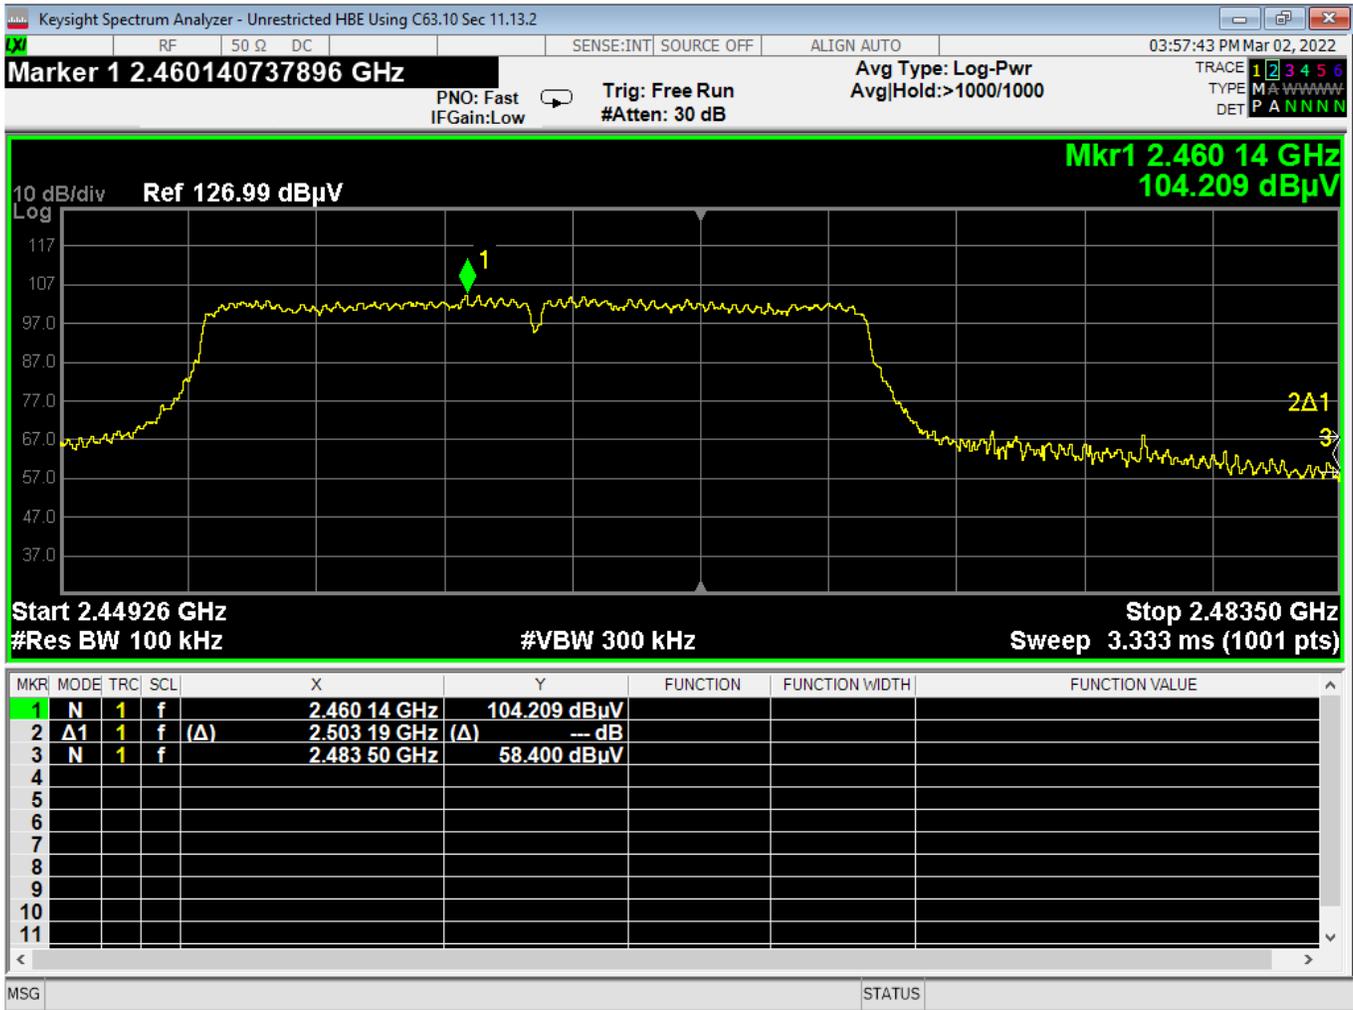

76 Higher Bandedge, Unrestricted, Wifi N, High Data Rate




Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

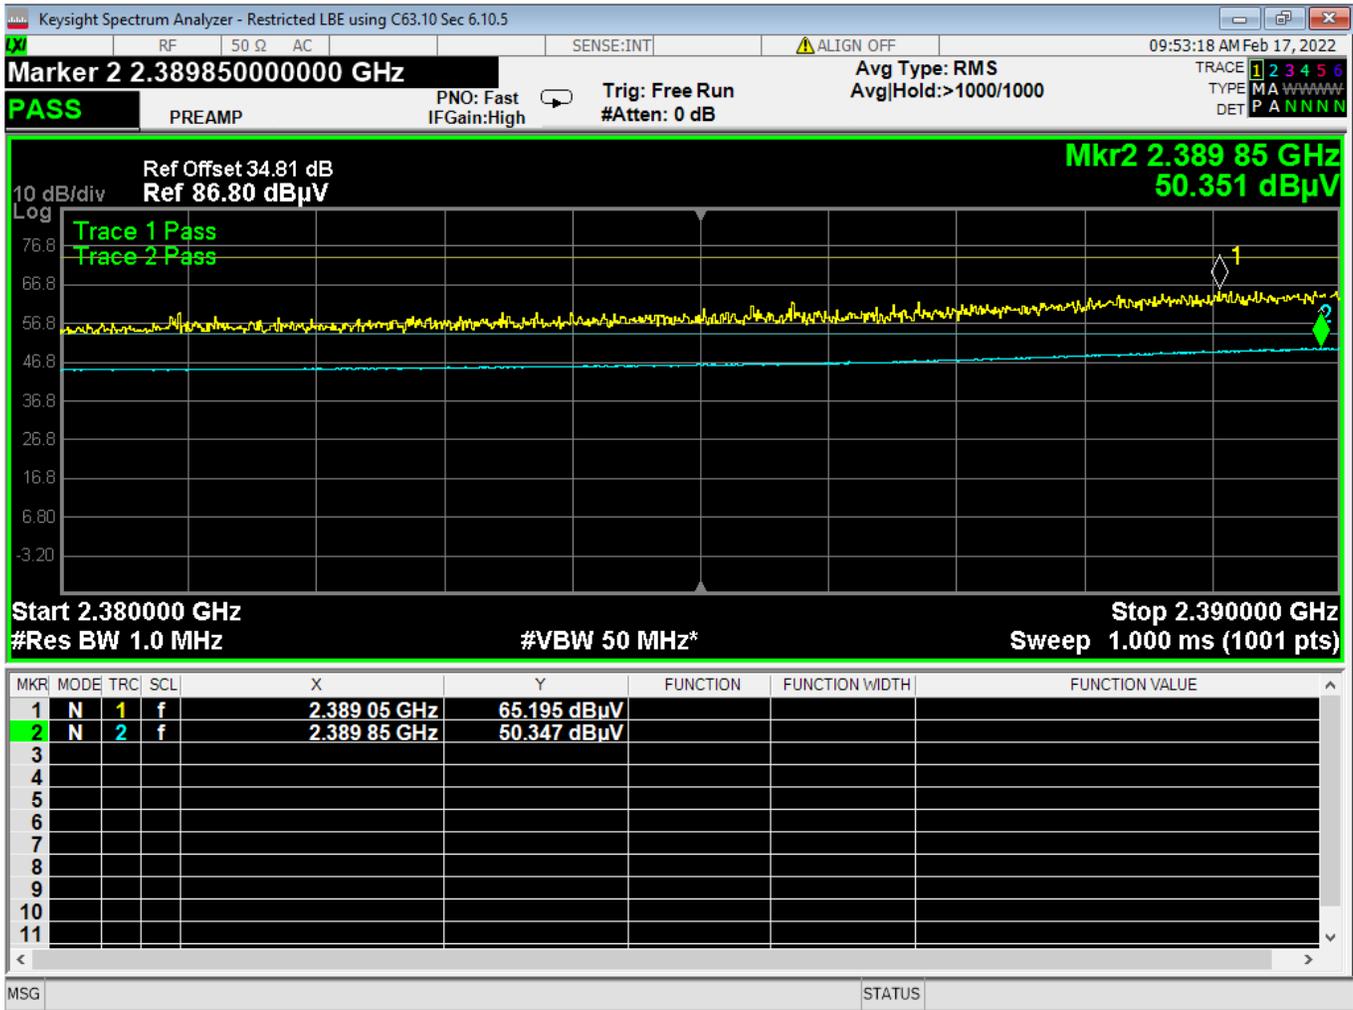

77 Lower Bandedge, Restricted, Wifi N, High Data Rate



Report Number:	R20211005-21-E9A	Rev	A
Prepared for:	Garmin International, Inc.		

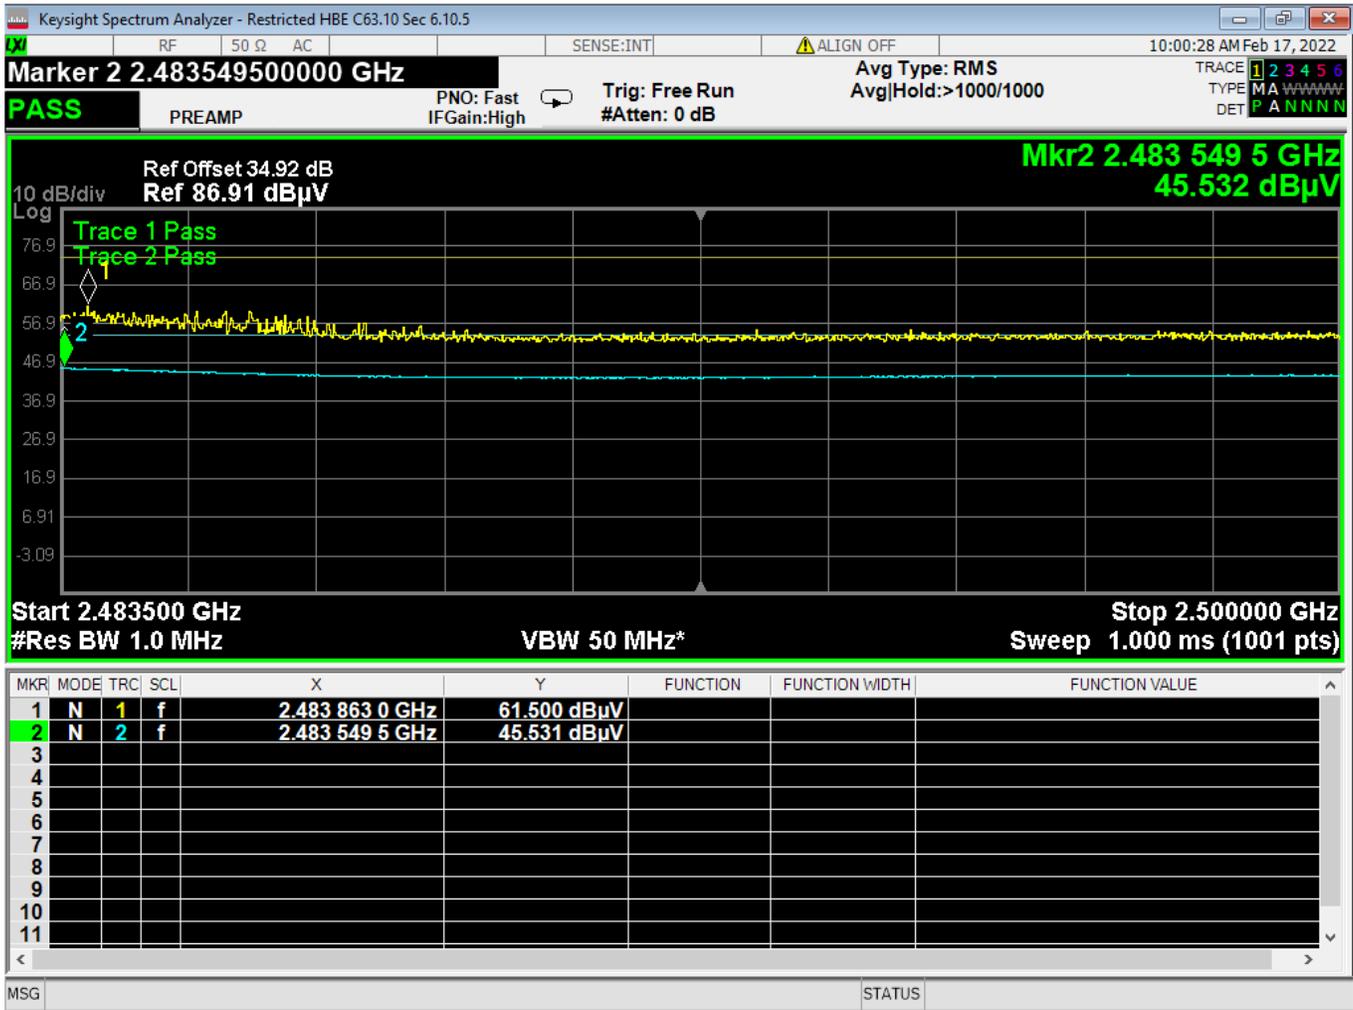

78 Higher Bandedge, Restricted, Wifi N, High Data Rate



Report Number:

R20211005-21-E9A

Rev

A

Prepared for:

Garmin International, Inc.

REPORT END