

FCC PART 15C TEST REPORT FOR CERTIFICATION
On Behalf of

DEI Sales Inc. dba Definitive Technology

Home theater with wireless subwoofer

Model Number: SoloCinemaStudio

FCC ID: IPUSOLOCINSTUDIO

Prepared for : DEI Sales Inc. dba Definitive Technology
One Viper Way, Vista, California 92081, United States

Prepared By : EST Technology Co., Ltd.
Santun(guantai Road), Houjie Town, DongGuan City,
GuangDong, China.

Tel: 86-769-83081888-808


Report Number: ESTE-R1308028
Date of Test : August 1~ 15, 2013
Date of Report : August 16, 2013

TABLE OF CONTENTS

Description	Page
TEST REPORT VERIFICATION.....	3
1. GENERAL INFORMATION	5
1.1. Description of Device (EUT)	5
2. SUMMARY OF TEST	6
2.1. Summary of test result.....	6
2.2. Test Facilities	7
2.3. Assistant equipment used for test.....	8
2.4. Block Diagram	8
2.5. Test mode	9
2.6. Channel List for Bluetooth.....	9
2.7. Test Equipment.....	10
3. MAXIMUM PEAK OUTPUT POWER	11
3.1. Limit	11
3.2. Test Procedure	11
3.3. Test Result.....	11
3.4. Test Data	12
4. 20 DB BANDWIDTH.....	20
4.1. Limit	20
4.2. Test Procedure	20
4.3. Test Result.....	20
4.4. Test Data	21
5. CARRIER FREQUENCY SEPARATION	29
5.1. Limit	29
5.2. Test Procedure	29
5.3. Test Result.....	29
5.4. Test Data	30
6. NUMBER OF HOPPING CHANNEL	38
6.1. Limit	38
6.2. Test Procedure	38
6.3. Test Result.....	38
6.4. Test Data	39
7. DWELL TIME	43
7.1. Limit	43
7.2. Test Result.....	43
7.3. Test Data	44
8. RADIATED EMISSIONS.....	56
8.1. Limit	56
8.2. Block Diagram of Test setup.....	57
8.3. Test Procedure	57
8.4. Test Result.....	57
8.5. Test Data	58

9.	BAND EDGE COMPLIANCE	130
9.1.	Limit	130
9.2.	Block Diagram of Test setup	130
9.3.	Test Procedure	130
9.4.	Test Result	130
9.5.	Test Data	131
10.	POWER LINE CONDUCTED EMISSIONS	163
10.1.	Limit	163
10.2.	Test Procedure	163
11.	ANTENNA REQUIREMENTS	168
11.1.	Limit	168
11.2.	Result	168
12.	TEST SETUP PHOTO	169
13.	PHOTOS OF EUT	171

Test Report Verification

Applicant:	DEI Sales Inc. dba Definitive Technology		
Address:	One Viper Way, Vista, California 92081, United States		
Manufacturer	DEI Sales Inc. dba Definitive Technology		
Address:	One Viper Way, Vista, California 92081, United States		
E.U.T:	Home theater with wireless subwoofer		
Model Number:	SoloCinemaStudio		
Power Supply:	DC 24V From Adapter Input AC 100-240V~50/60Hz		
Test Voltage:	DC 24V From Adapter Input AC 120V/60Hz Adapter 1: EA11001F ; Adapter 2:EA11001B		
Trade Name:	Definitive Technology	Serial No.:	-----
Date of Receipt:	August 1, 2013	Date of Test:	August 1~ 15, 2013
Test Specification:	FCC Rules and Regulations Part 15 Subpart C:2012 ANSI C63.4:2009		
Test Result:	The device described above is tested by EST Technology Co., Ltd.. The measurement results were contained in this test report and EST Technology Co., Ltd. was assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT to be technically compliance with the ETSI EN FCC Rules and Regulations Part 15 Subpart C requirements. This report applies to above tested sample only and shall not be reproduced in part without written approval of EST Technology Co., Ltd. Date: August 16, 2013		
Prepared by:	Tested by:	Approved by:	
 	 	 	
Ada / Assistant	Tony.Tang/ Engineer	IcemanHu / Manager	
Other Aspects:	None.		
<i>Abbreviations: OK/P=passed fail/F=failed n.a/N=not applicable E.U.T=equipment under tested</i>			
<i>This test report is based on a single evaluation of one sample of above mentioned products ,It is not permitted to be duplicated in extracts without written approval of EST Technology Co., Ltd.</i>			

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

Product Name	: Home theater with wireless subwoofer
Model Number	: SoloCinemaStudio
FCC ID	: IPUSOLOCINSTUDIO
Operation frequency	: 2402MHz~2480MHz
Number of channel	: 79
Antenna	: Internal antenna, 0 dBi gain
Modulation	: FHSS (GFSK, $\pi/4$ -DQPSK, 8-DPSK)
Sample Type	: Prototype production

2. SUMMARY OF TEST

2.1. Summary of test result

Description of Test Item	Standard	Results
Maximum Peak Output Power	FCC Part 15: 15.247(b)(1) DA 00-705	PASS
20dB Bandwidth	FCC Part 15: 15.215 DA 00-705	PASS
Carrier Frequency Separation	FCC Part 15: 15.247(a)(1) DA 00-705	PASS
Number Of Hopping Channel	FCC Part 15: 15.247(a)(1)(iii) DA 00-705	PASS
Dwell Time	FCC Part 15: 15.247(a)(1)(iii) DA 00-705	PASS
Radiated Emission	FCC Part 15: 15.209 FCC Part 15: 15.247(d) ANSI C63.4: 2003 DA 00-705	PASS
Band Edge Compliance	FCC Part 15: 15.247(d) DA 00-705	PASS
Power Line Conducted Emissions	FCC Part 15: 15.207 ANSI C63.4: 2003 DA 00-705	PASS
Antenna requirement	FCC Part 15: 15.203	PASS

2.2. Test Facilities

EMC Lab : Certificated by CNAL, CHINA
 Registration No.: L5288
 Date of registration: October 28, 2011

 Certificated by FCC, USA
 Registration No.: 989591
 Date of registration: December 07, 2010

 Certificated by Industry Canada
 Registration No.: 46405-9405
 Date of registration: December 16, 2010

 Certificated by VCCI, Japan
 Registration No.: R-3663 & C-4103
 Date of registration: July 25, 2011

 Certificated by TUV Rheinland, Germany
 Registration No.: UA 50195514 0001
 Date of registration: January 07, 2011

 Certificated by TUV/PS, Shenzhen
 Registration No.: SCN1017
 Date of registration: January 27, 2011

 Certificated by Intertek ETL SEMKO
 Registration No.: 2011-RTL-L1-18
 Date of registration: April 28, 2011

 Certificated by Siemic, Inc.
 Registration No.: SLCN021
 Date of registration: November 8, 2011

 Certificated by Nemko, Hong Kong
 Registration No.: 175193
 Date of registration: May 4, 2011

Name of Firm : EST Technology Co., Ltd.

Site Location : San Tun Management Zone, Houjie Town, Dongguan,
Guangdong, China

2.3. Assistant equipment used for test

2.3.1. Adapter 1


M/N	:	EA11001F	
Input	:	AC 100-240V~50/60Hz	2500mA Max
Output	:	DC 24V/5000mA	

2.3.2. Adapter 2

M/N	:	EA11001B	
Input	:	AC 100-240V~50/60Hz	2500mA Max
Output	:	DC 24V/4200mA	

2.4. Block Diagram

For radiated emissions test: EUT was placed on a turn table, which is 0.8 meter high above ground. EUT was be set into BT test mode by software before test.



(EUT: Home theater with wireless subwoofer)

2.5. Test mode

The test software was used to control EUT work in Continuous TX mode, and select test channel, wireless mode

Mode	Channel	Frequency
GFSK	Low	2402MHz
	Middle	2441MHz
	High	2480MHz
8-DPSK	Low	2402MHz
	Middle	2441MHz
	High	2480MHz

2.6. Channel List for Bluetooth

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2402	2	2403	3	2404	4	2405
5	2406	6	2407	7	2408	8	2409
9	2410	10	2411	11	2412	12	2413
13	2414	14	2415	15	2416	16	2417
17	2418	18	2419	19	2420	20	2421
21	2422	22	2423	23	2424	24	2425
25	2426	26	2427	27	2428	28	2429
29	2430	30	2431	31	2432	32	2433
33	2434	34	2435	35	2436	36	2437
37	2438	38	2439	39	2440	40	2441
41	2442	42	2443	43	2444	44	2445
45	2446	46	2447	47	2448	48	2449
49	2450	50	2451	51	2452	52	2453
53	2454	54	2455	55	2456	56	2457
57	2458	58	2459	59	2460	60	2461
61	2462	62	2463	63	2464	64	2465
65	2466	66	2467	67	2468	68	2469
69	2470	70	2471	71	2472	72	2473
73	2474	74	2475	75	2476	76	2477
77	2478	78	2479	79	2480	-	-

2.7. Test Equipment

2.7.1. For conducted emission test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESHS30	832354	May,30,13	1 Year
Artificial Mains Networ	Rohde & Schwarz	ENV216	101260	May,30,13	1 Year
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	101100	July.25,13	1 Year

2.7.2. For radiated emission test(30-1000MHz)

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESVS10	100004	May,30,13	1 Year
Spectrum Analyzer	Agilent	E4411B	MY50140697	May,30,13	1 Year
Bilog Antenna	Teseq	CBL 6111D	25872	Nov,08,12	1.5 Year
Signal Amplifier	Agilent	310N	187037	July.25,13	1 Year

2.7.3. For radiated emission test(above 1GHz)

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Temperature controller	Terchy	MHQ	120	May.08,13	1 Year
Spectrum Analyzer	Agilent	E4408B	MY44211139	May.08,13	1 Year
Vector Signal Generator	R&S	SMBV100A	1407.6004K02	May.08,13	1 Year
Double Ridged Horn Antenna	R&S	HF907	100276	Jan.16.13	2 Year
Double Ridged Horn Antenna	R&S	HF907	100268	Jan.16.13	2 Year
Log-periodic Dipole Antenna	R&S	HL223	100435	Jan.16.13	2 Year
Biconical Antenna	R&S	HK116	100431	Jan.16.13	2 Year
Trilog Broadband Antenna	Schwarzbeck	VULB 9163	9163-462	Jan.16.13	2 Year
Pre-amplifier	AH	PAM-0118	10008	May.08,13	1 Year
Pre-amplifier	R&S	SCU-01	10049	May.08,13	1 Year
High Pass filter	Micro	HPM50111	324455	May.08,13	1 Year
RF Cable	Hubersuhner	W10.02	534096	May.08,13	1 Year
RF Cable	Hubersuhner	W10.02	534123	May.08,13	1 Year
RF Cable	Hubersuhner	RG 214/U	513423	May.08,13	1 Year
RF Cable	Hubersuhner	RG 214/U	523455	May.08,13	1 Year

3. MAXIMUM PEAK OUTPUT POWER

3.1. Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts, the e.i.r.p shall not exceed 4W

3.2. Test Procedure


The transmitter output (antenna port) was connected to the spectrum analyzer

3.3. Test Result


EUT: Home theater with wireless subwoofer					
M/N: SoloCinemaStudio					
Test date: 2013-08-14		Test site: RF site		Tested by: Tony Tang	
Mode	Freq (MHz)	Result (dBm)	Limit		Margin (dB)
			dBm	W	
Adapter 1					
GFSK	2402	2.672	30.00	1	27.328
	2441	3.080	30.00	1	26.920
	2480	2.827	30.00	1	27.173
8-DPSK	2402	1.159	21.00	0.125	19.841
	2441	1.544	21.00	0.125	19.456
	2480	1.149	21.00	0.125	19.851
Adapter 2					
GFSK	2402	4.068	30.00	1	25.932
	2441	4.062	30.00	1	25.938
	2480	3.817	30.00	1	26.183
8-DPSK	2402	1.217	21.00	0.125	19.783
	2441	1.350	21.00	0.125	19.650
	2480	1.843	21.00	0.125	19.157
Conclusion: PASS					

3.4. Test Data


Adapter 1
GFSK 2402 MHz

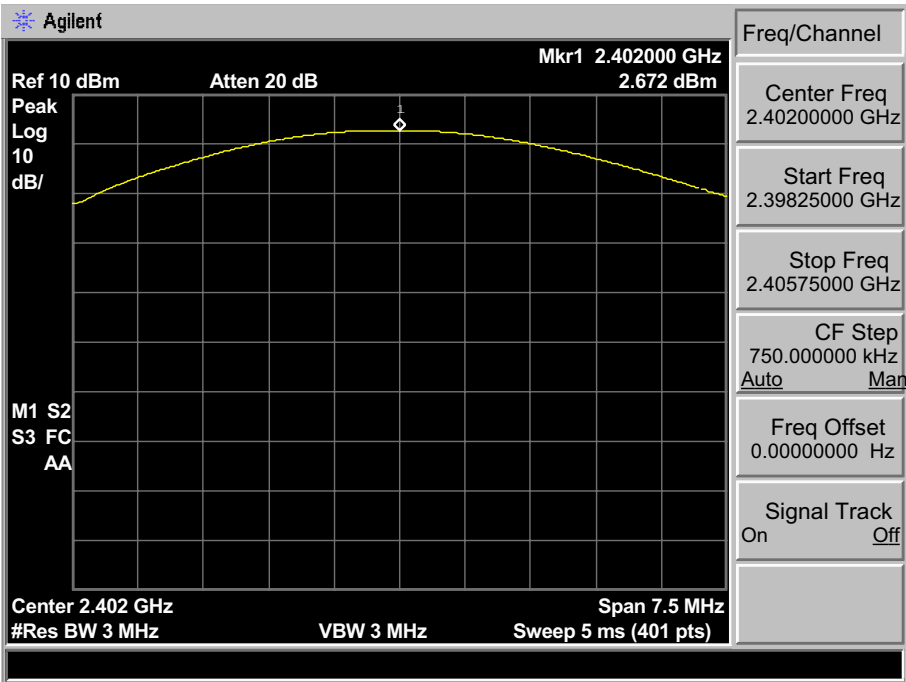


GFSK 2441 MHz

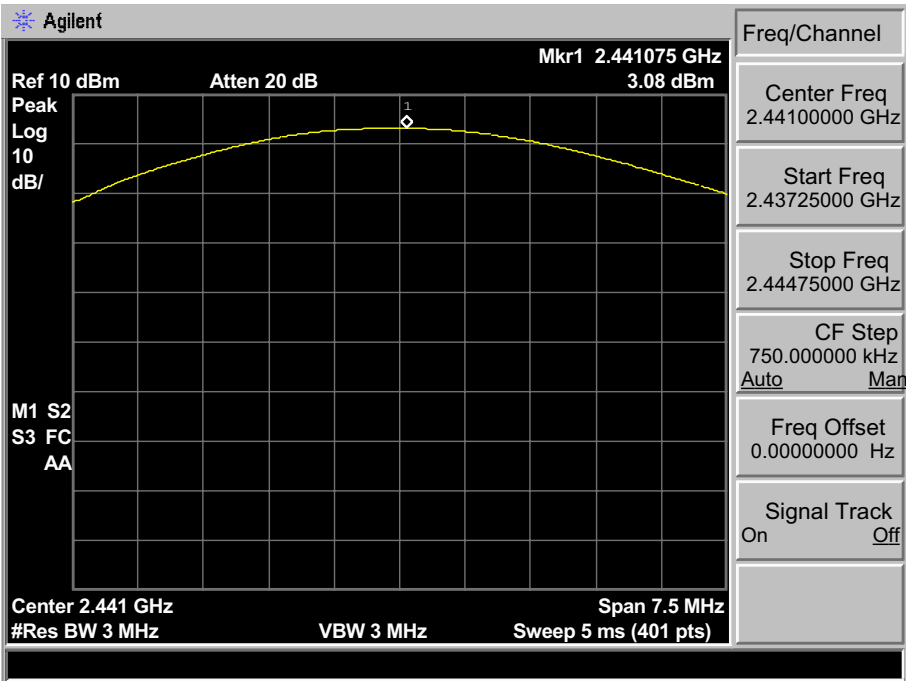


GFSK 2480 MHz

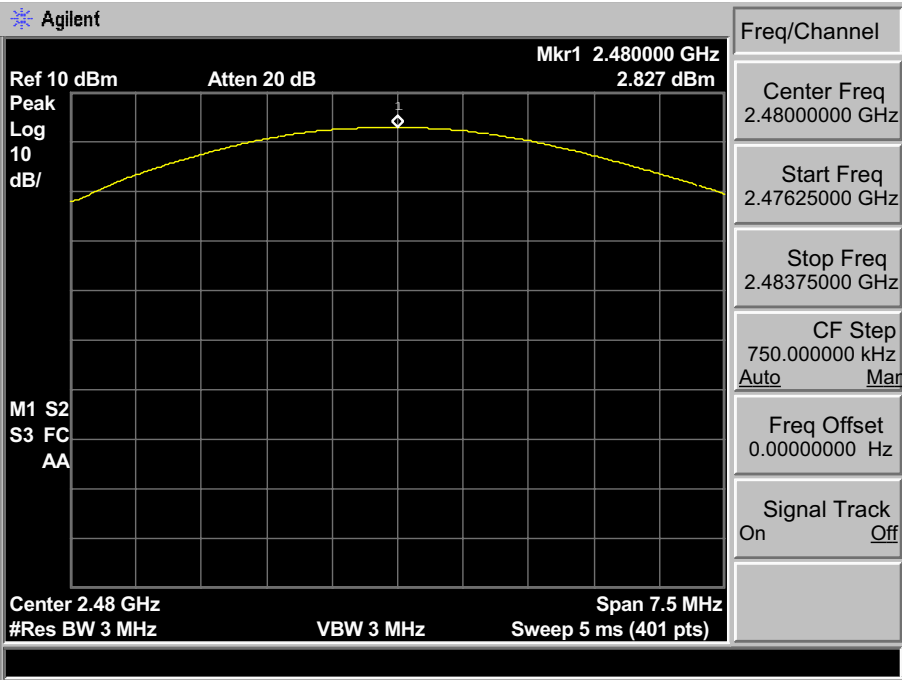


Adapter 1
8-DPSK 2402 MHz

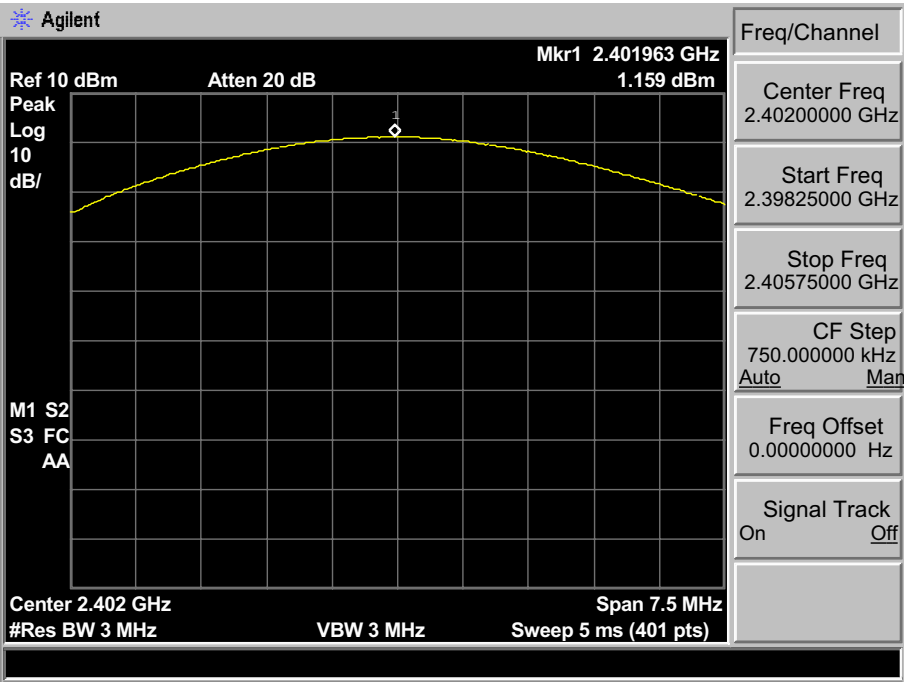


8-DPSK 2441 MHz

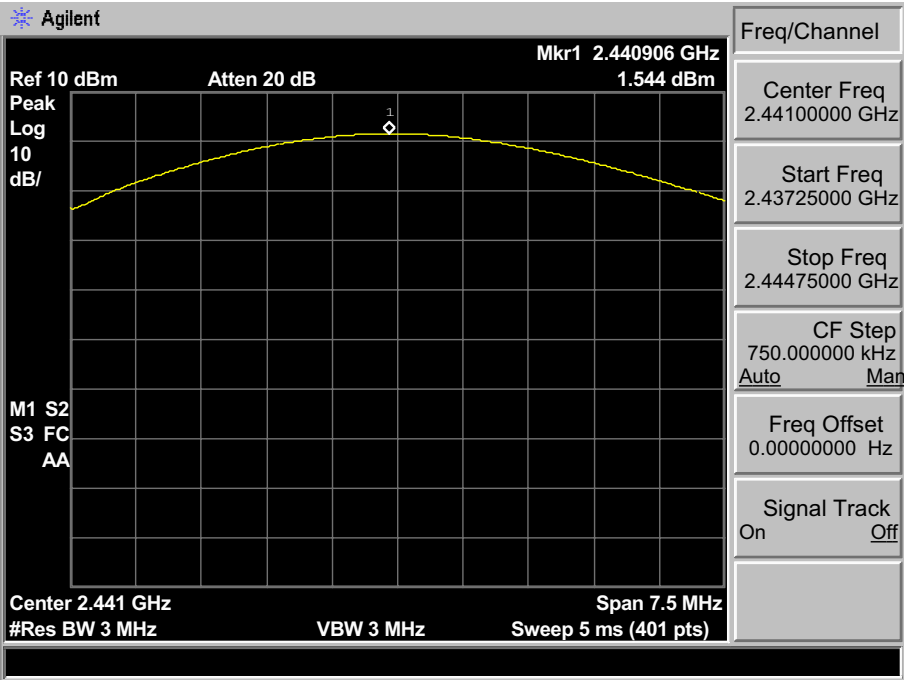


8-DPSK 2480 MHz

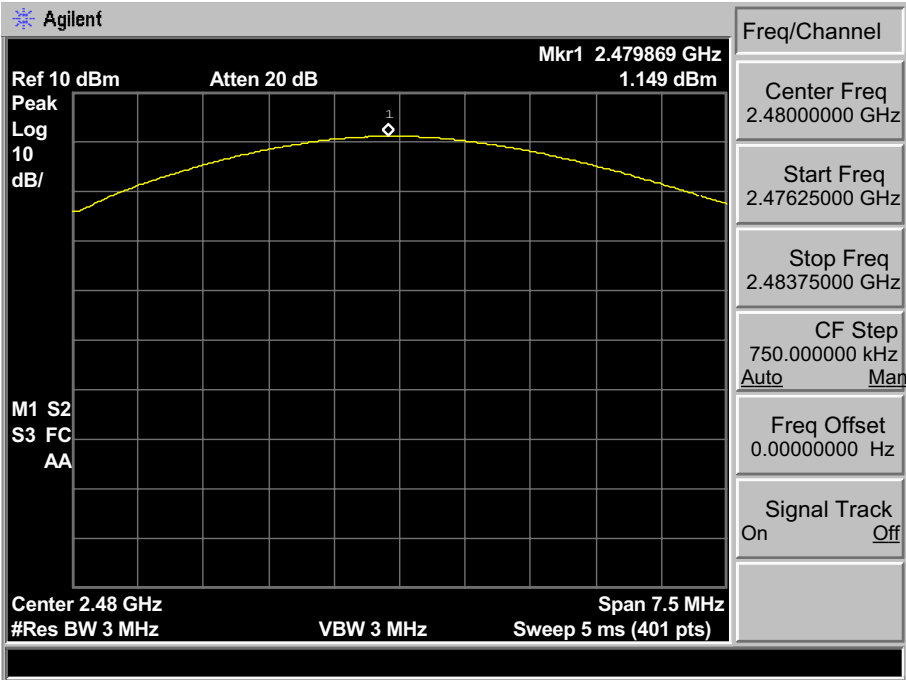


Adapter 2
GFSK 2402 MHz

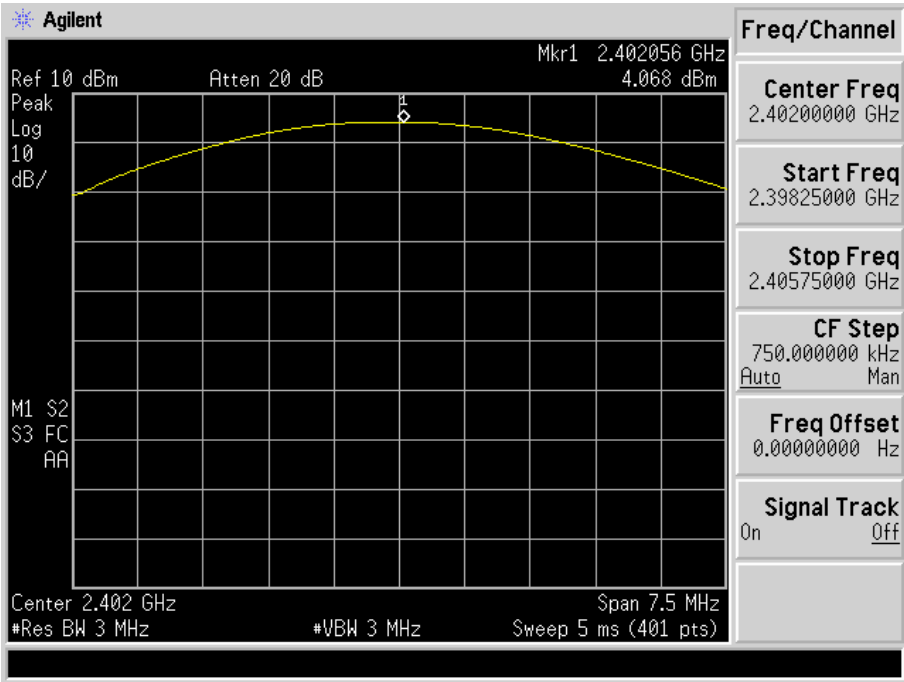


GFSK 2441 MHz

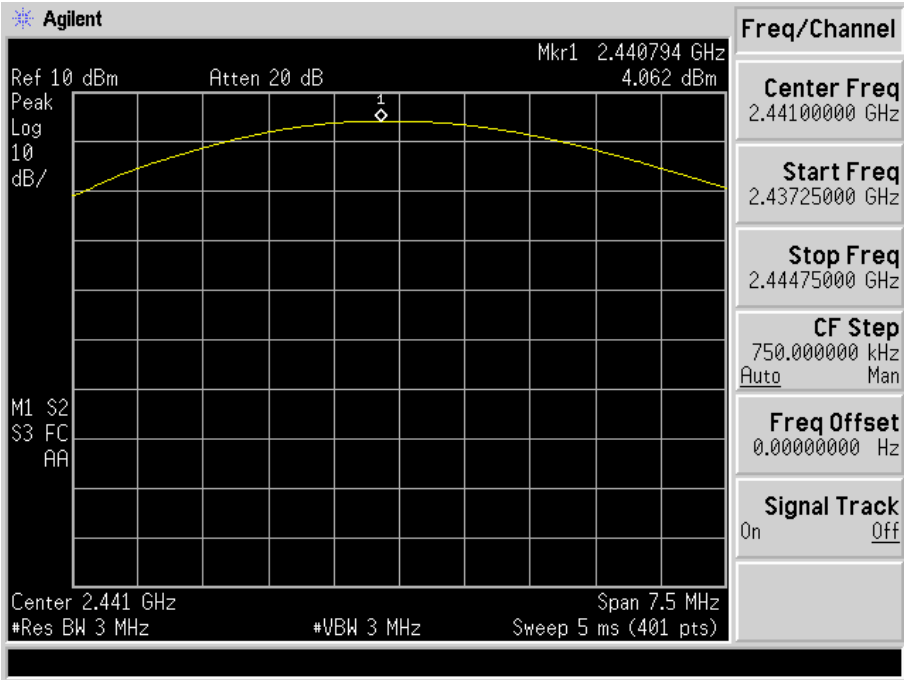


GFSK 2480 MHz

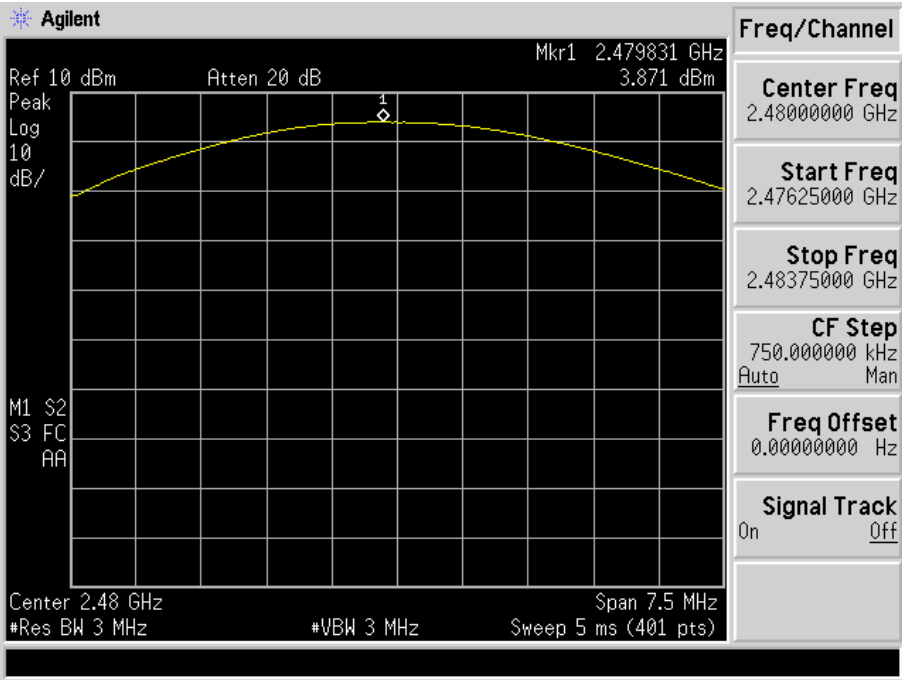


Adapter 2
8-DPSK 2402 MHz

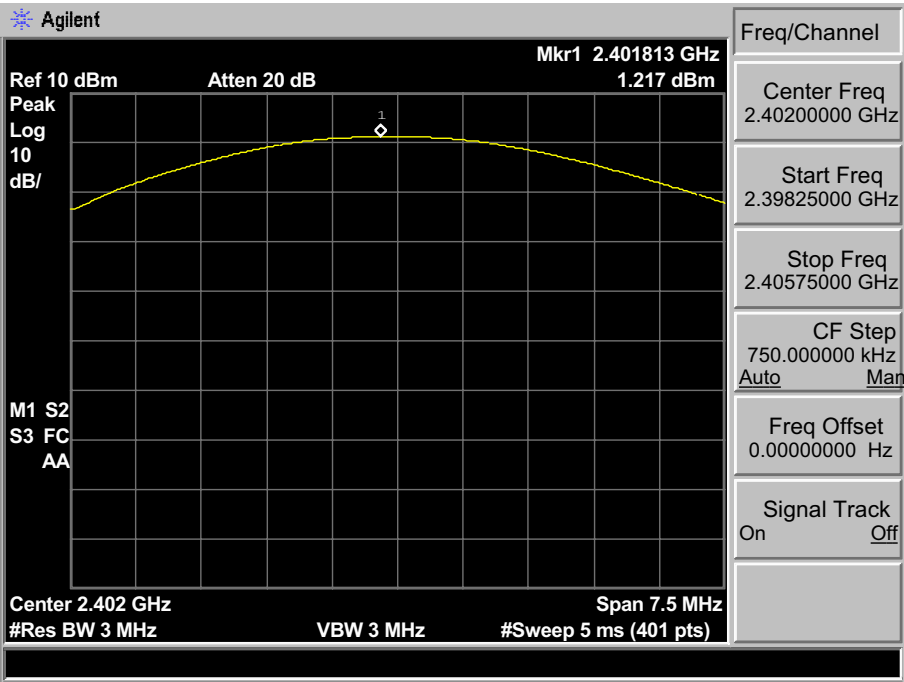

8-DPSK 2441 MHz

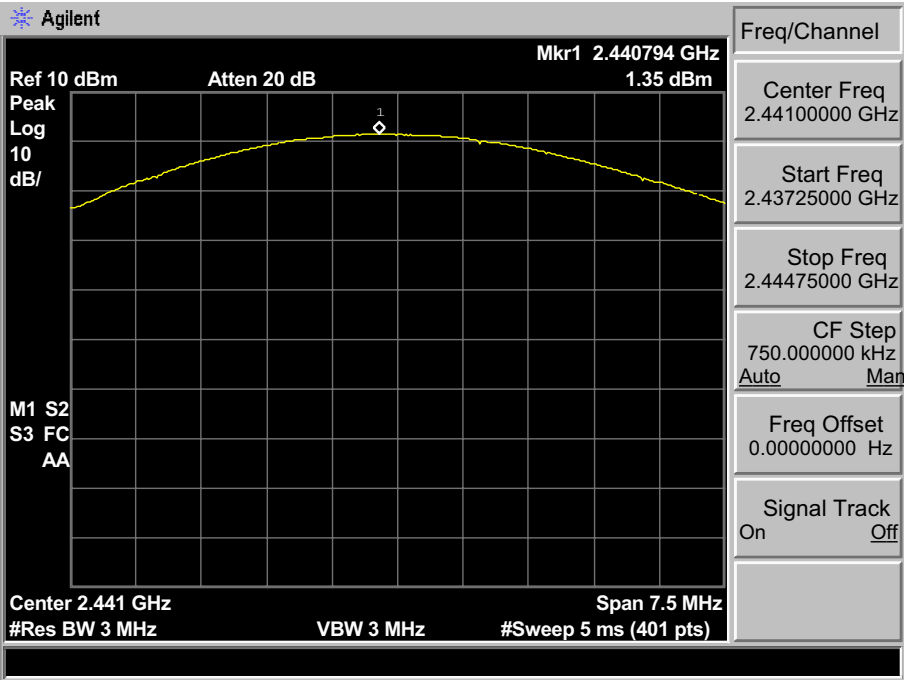

8-DPSK 2480 MHz

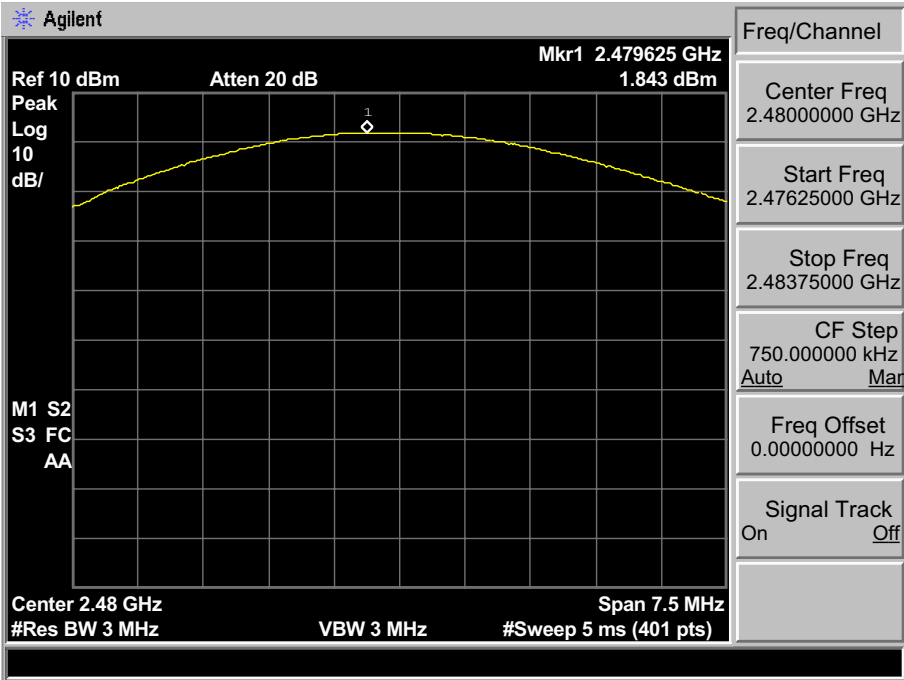

4. 20 DB BANDWIDTH

4.1. Limit

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

4.2. Test Procedure

The transmitter output was coupled to a spectrum analyzer via a antenna. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30kHz RBW and 300kHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.


4.3. Test Result

EUT: Home theater with wireless subwoofer				
M/N: SoloCinemaStudio				
Test date: 2013-08-14		Test site: RF site		Tested by: Tony Tang
Mode	Freq (MHz)	20dB Bandwidth (MHz)	Limit (kHz)	Conclusion
Adapter 1				
GFSK	2402	0.851	/	PASS
	2441	0.854	/	PASS
	2480	0.852	/	PASS
8-DPSK	2402	1.212	/	PASS
	2441	1.210	/	PASS
	2480	1.213	/	PASS
Adapter 2				
GFSK	2402	0.854	/	PASS
	2441	0.856	/	PASS
	2480	0.856	/	PASS
8-DPSK	2402	1.211	/	PASS
	2441	1.216	/	PASS
	2480	1.215	/	PASS


4.4. Test Data

Adapter 1


GFSK 2402MHz

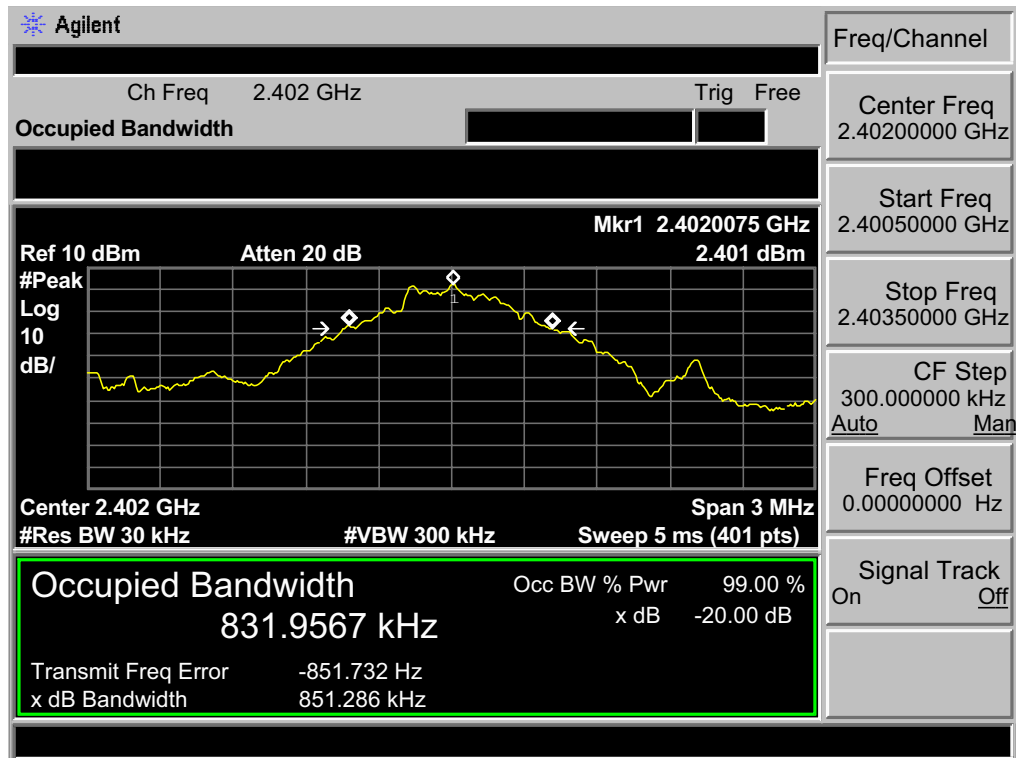


GFSK 2441MHz

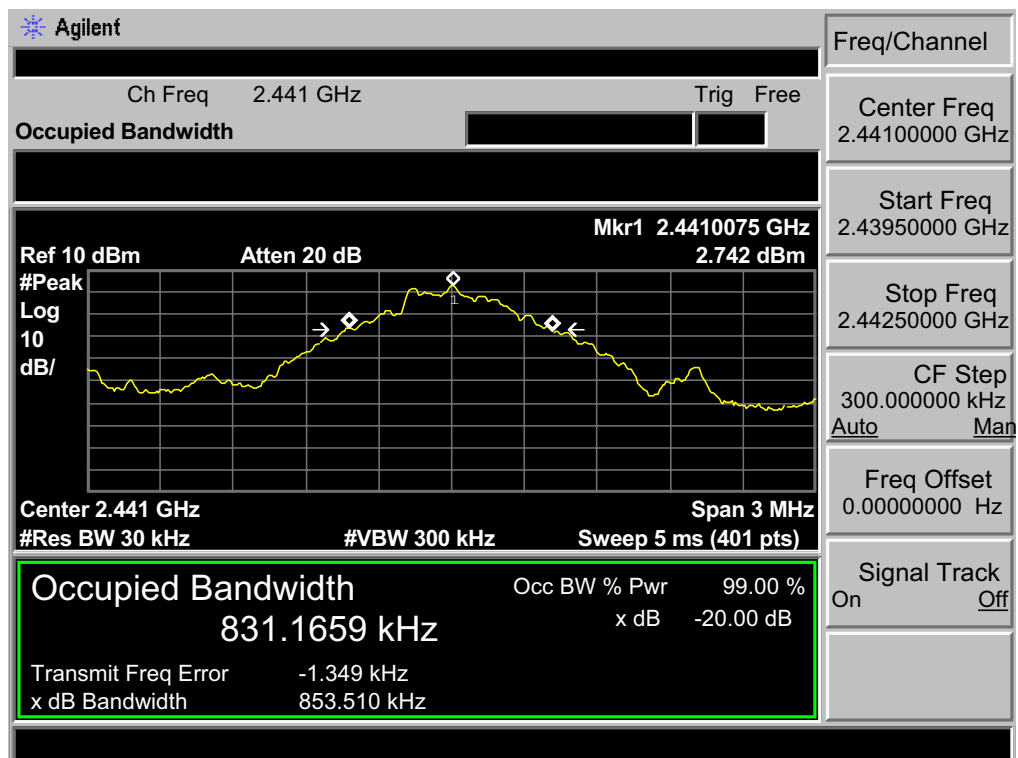


GFSK 2480MHz

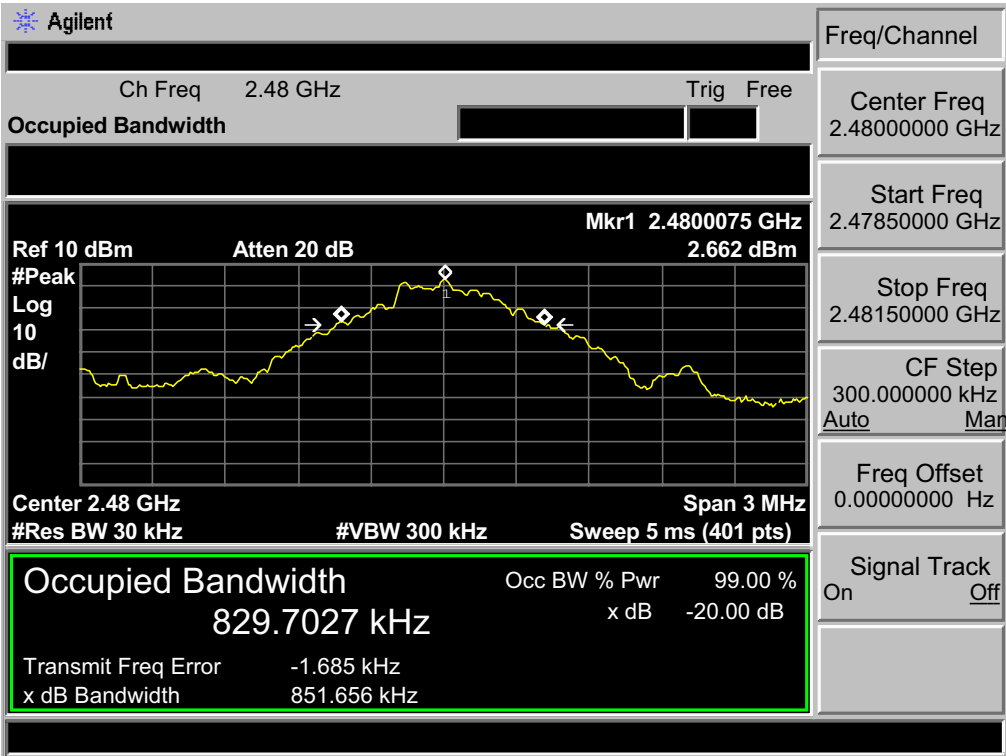


8-DPSK 2402MHz

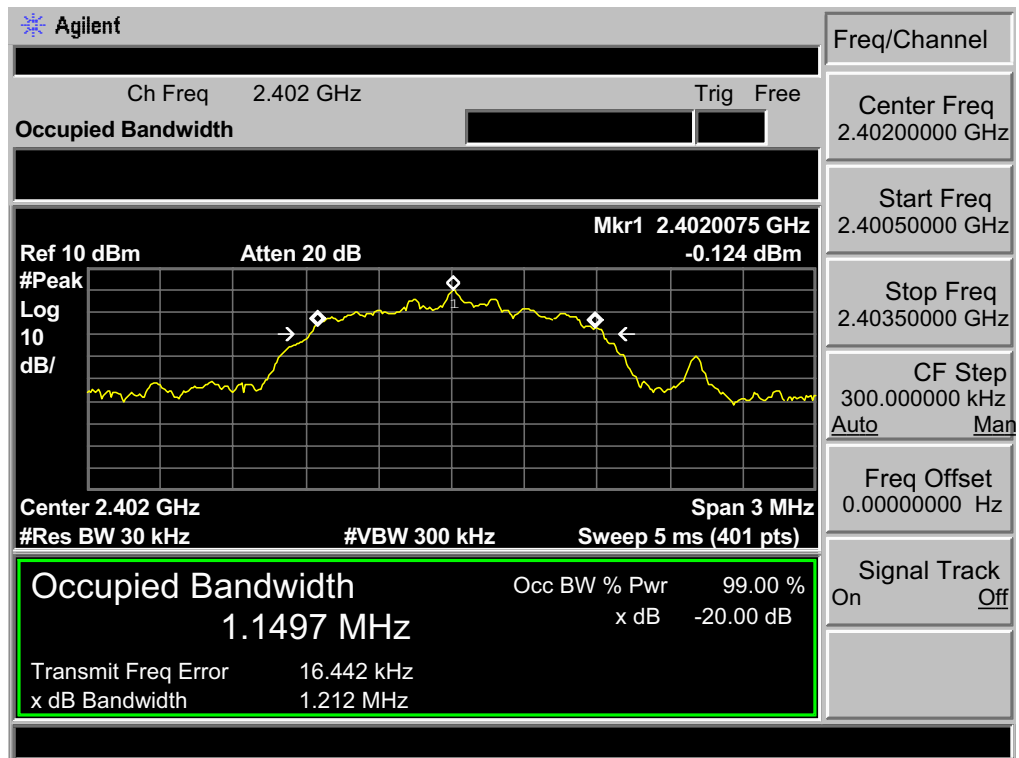

8-DPSK 2441MHz

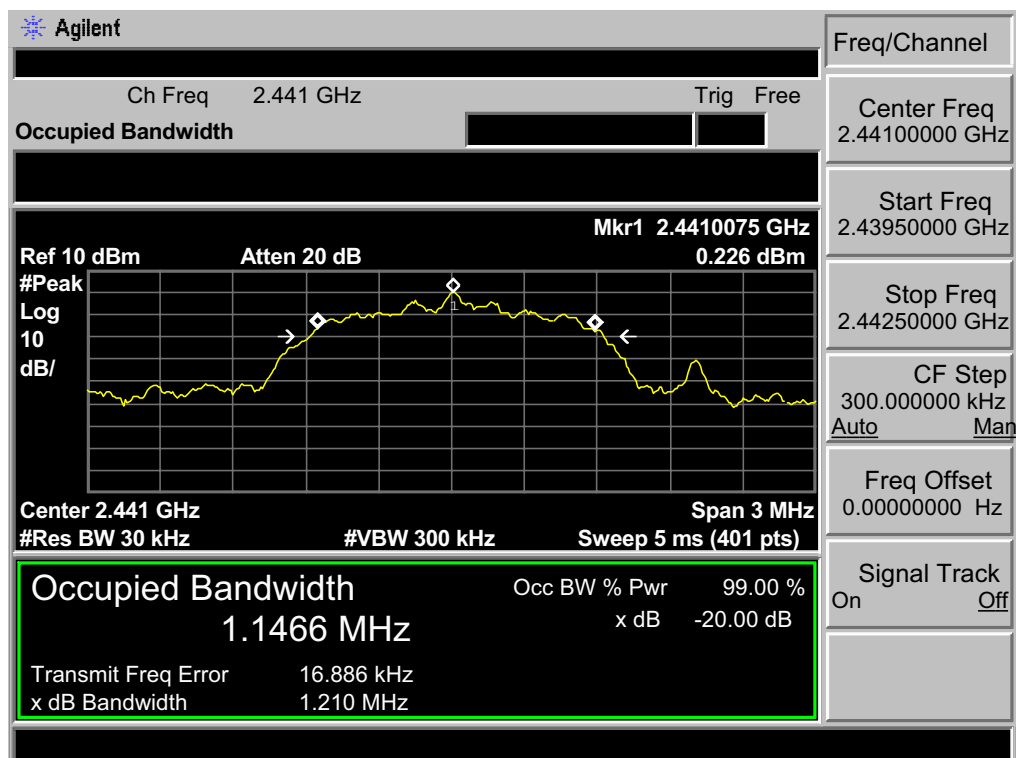


8-DPSK 2480MHz

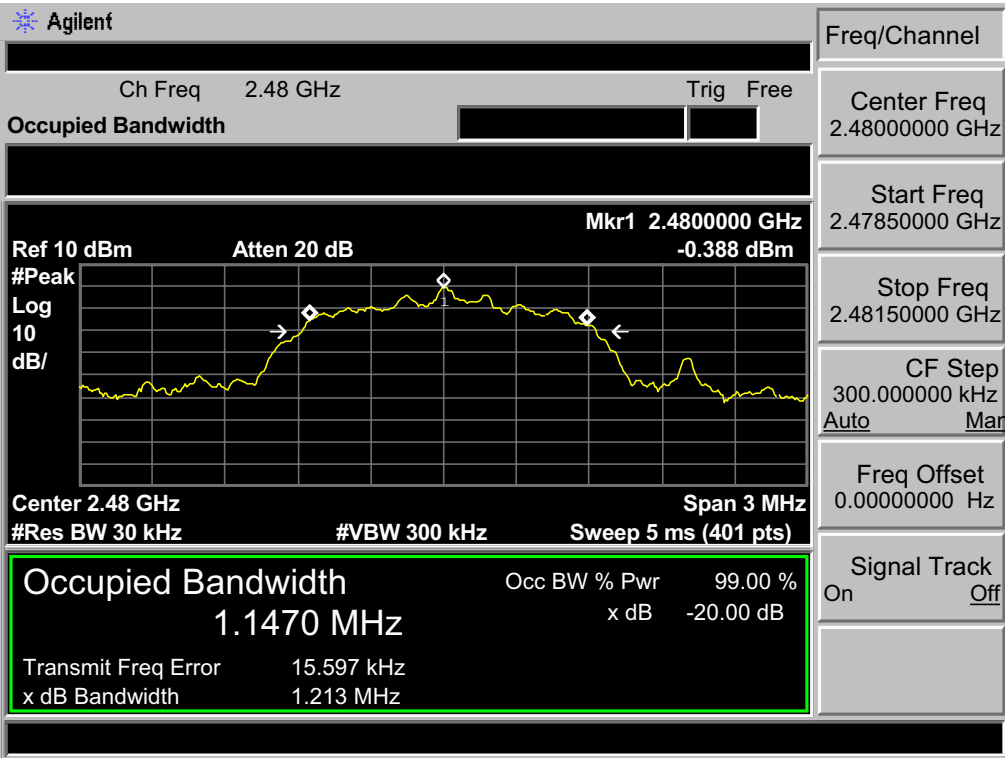


Adapter 2


GFSK 2402MHz

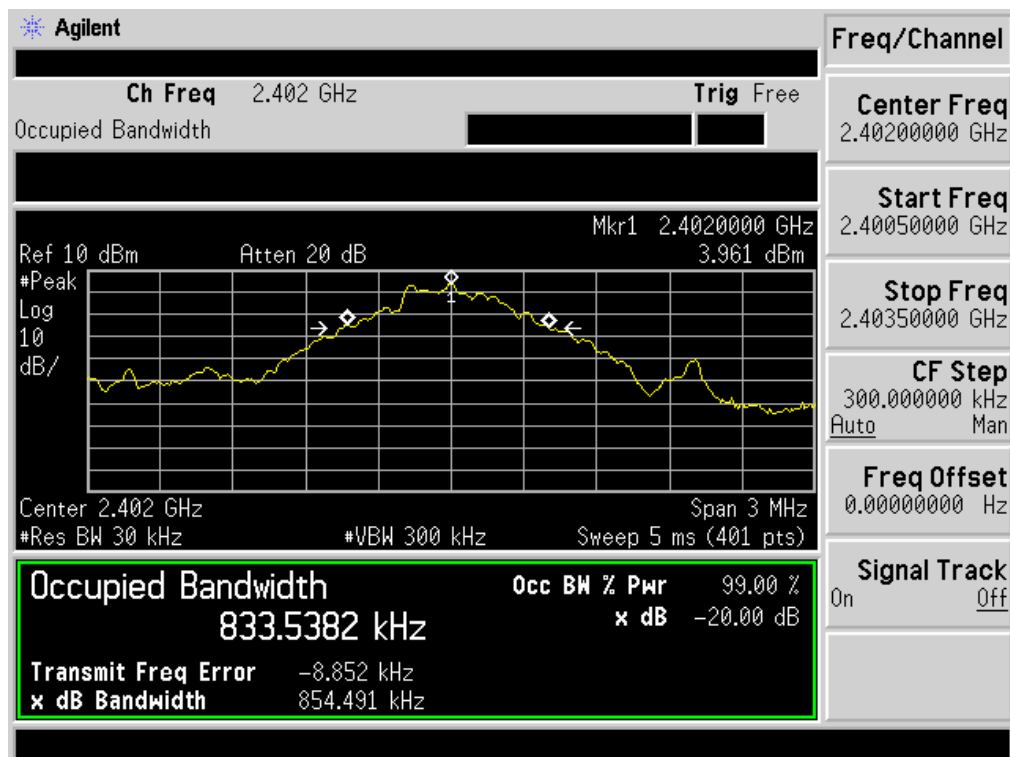


GFSK 2441MHz

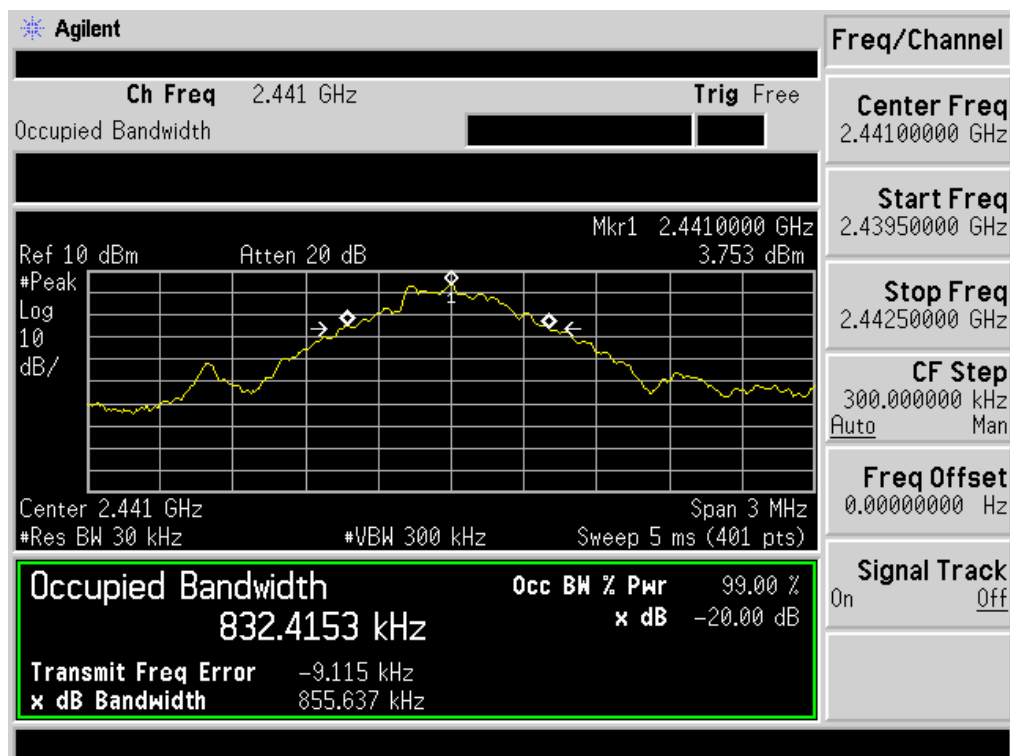


GFSK 2480MHz

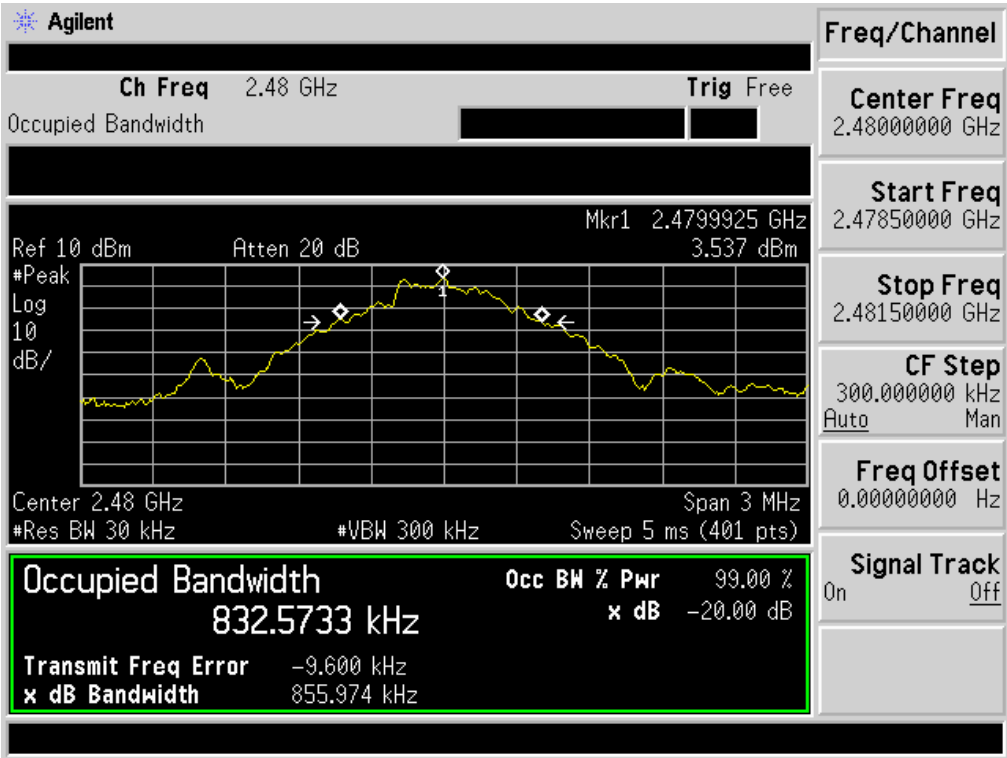


8-DPSK 2402MHz

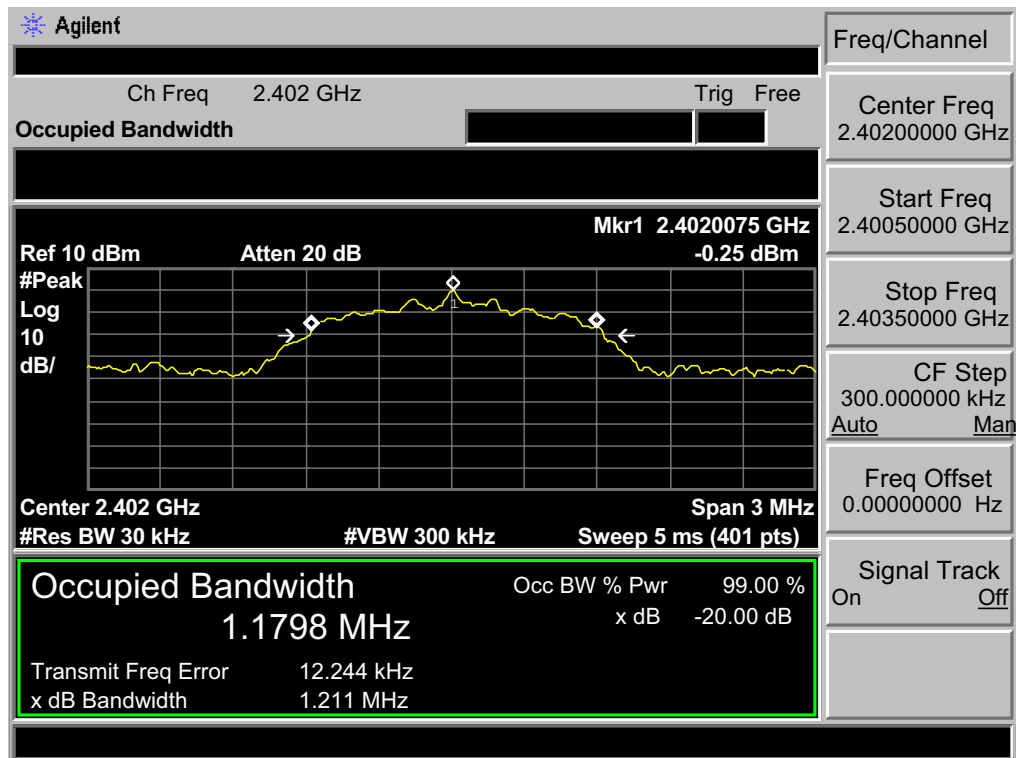

8-DPSK 2441MHz

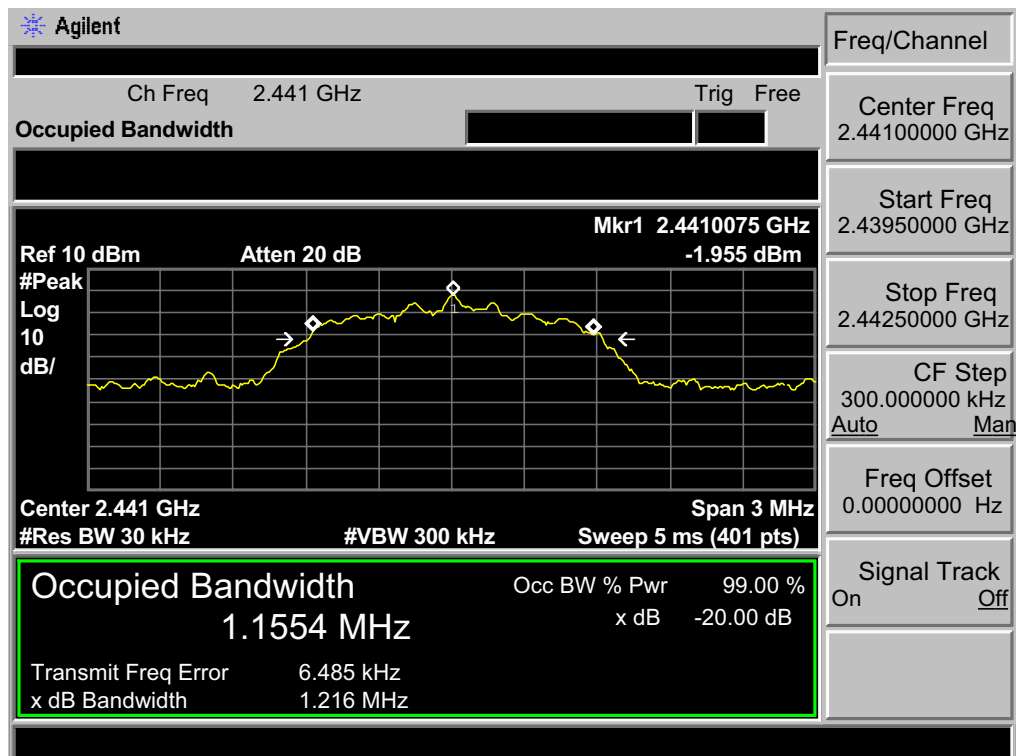

8-DPSK 2480MHz

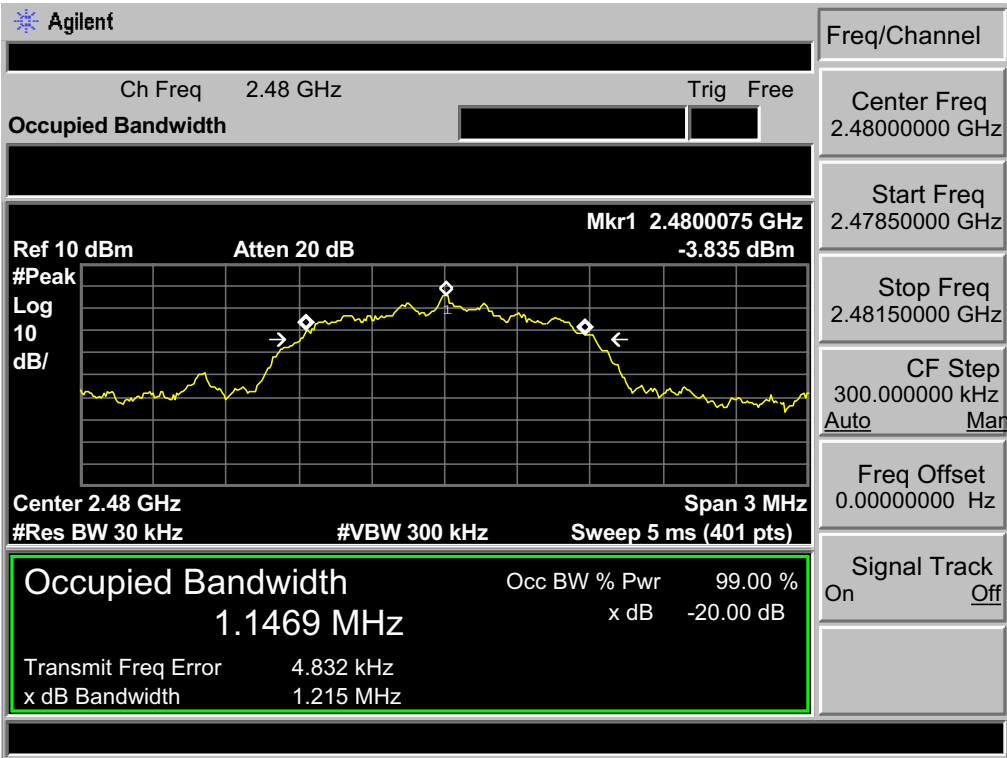

5. CARRIER FREQUENCY SEPARATION

5.1. Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW


5.2. Test Procedure

The transmitter output was coupled to a spectrum analyzer via a antenna. The carrier frequency was measured by spectrum analyzer with 100kHz RBW and 100kHz VBW.


5.3. Test Result

EUT: Home theater with wireless subwoofer				
M/N: SoloCinemaStudio				
Test date: 2013-08-14			Test site: RF site	Tested by: Tony Tang
Mode	Channel	Channel separation (MHz)	Limit	Conclusion
Adapter 1				
GFSK	Low CH	1.000	0.851 MHz	PASS
	Mid CH	1.006	0.854 MHz	PASS
	High CH	1.000	0.852 MHz	PASS
8-DPSK	Low CH	1.000	> 2/3 of the 20dB Bandwidth or 25[kHz](whichever is greater)	PASS
	Mid CH	1.000		PASS
	High CH	1.000		PASS
Adapter 2				
GFSK	Low CH	1.025	0.854 MHz	PASS
	Mid CH	1.000	0.856 MHz	PASS
	High CH	1.000	0.856 MHz	PASS
8-DPSK	Low CH	1.000	> 2/3 of the 20dB Bandwidth or 25[kHz](whichever is greater)	PASS
	Mid CH	1.000		PASS
	High CH	1.000		PASS


5.4. Test Data

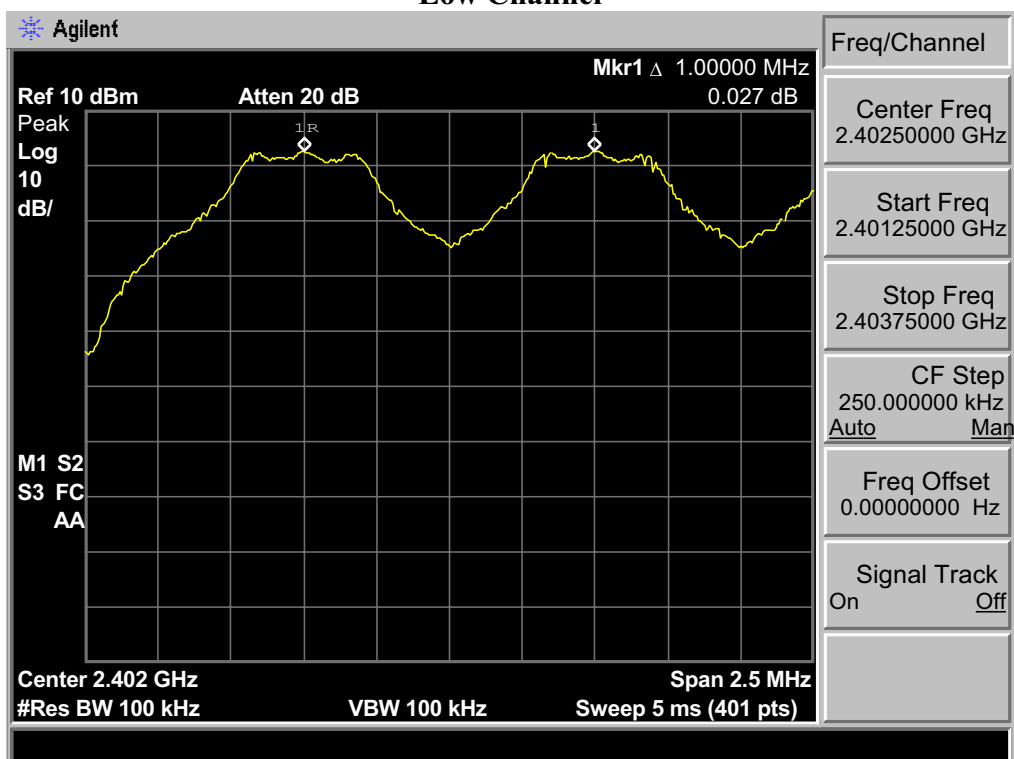Adapter 1
GFSK
Low Channel


Mid Channel

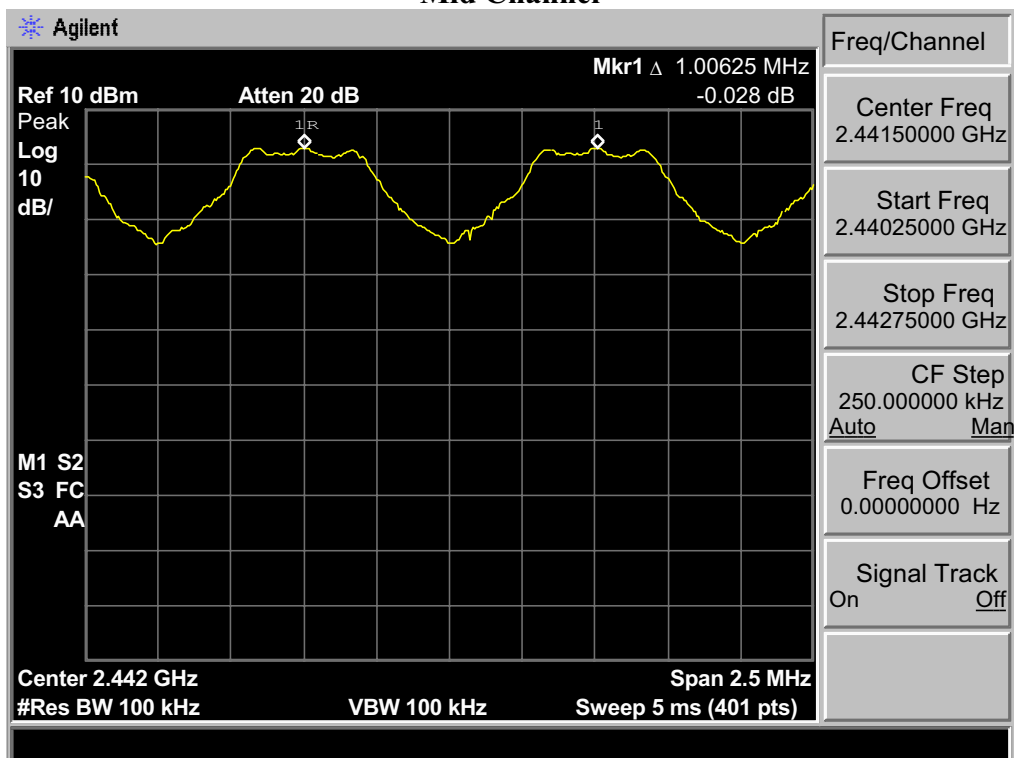


High Channel

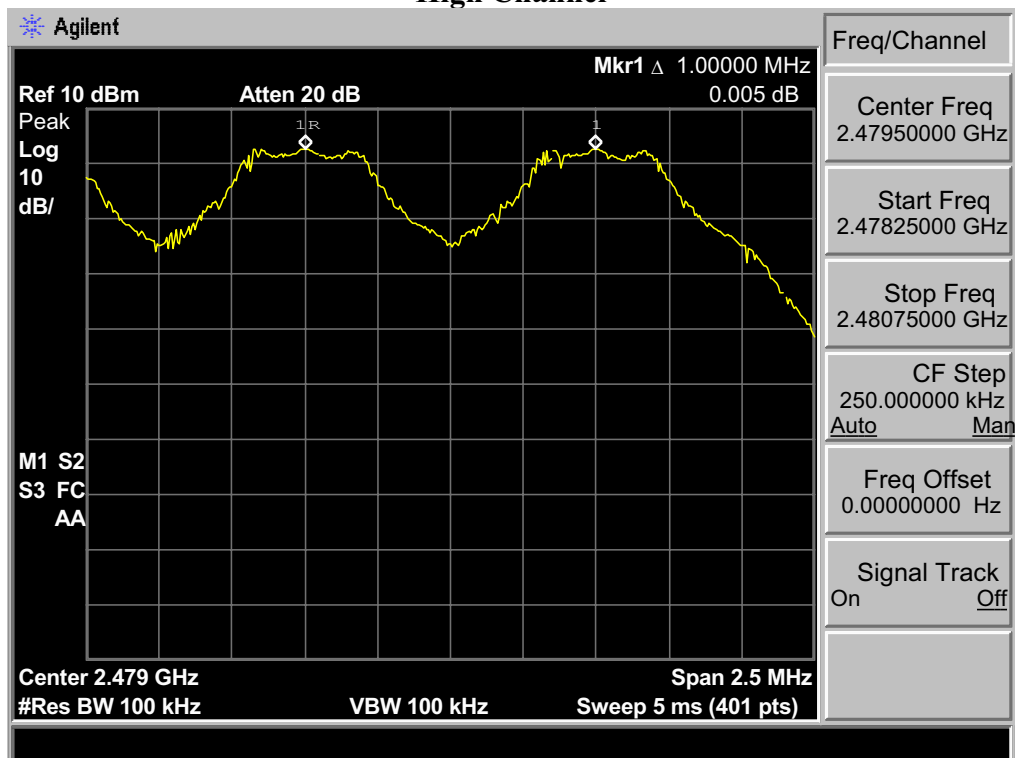


8-DPSK Low Channel

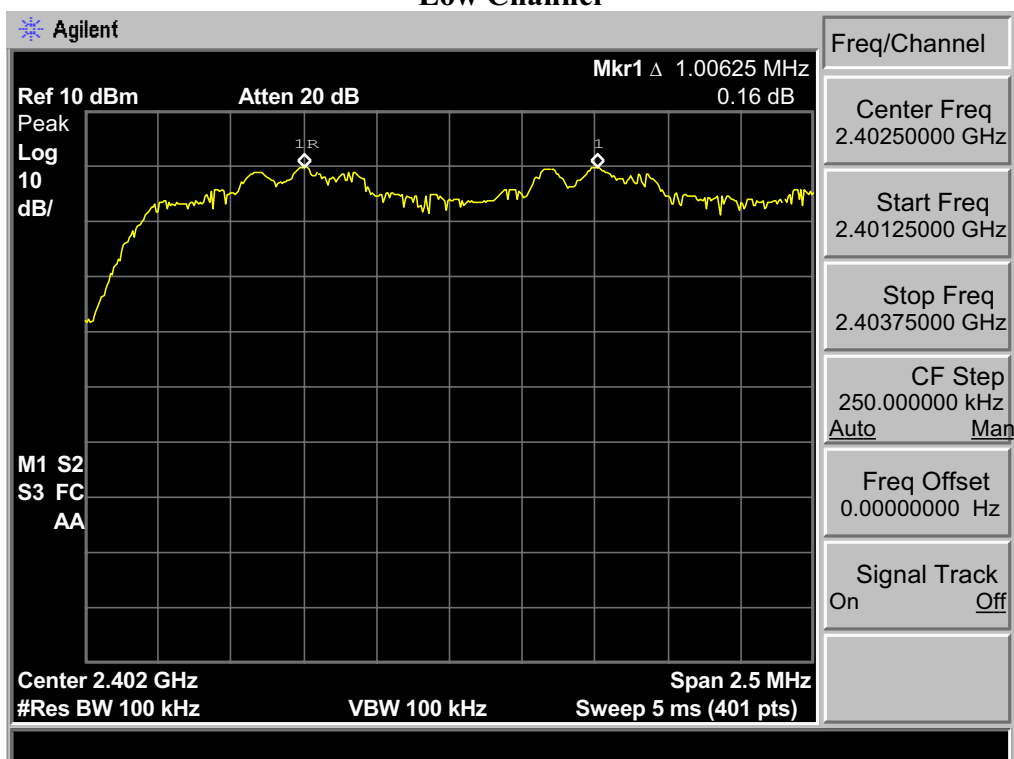


Mid Channel

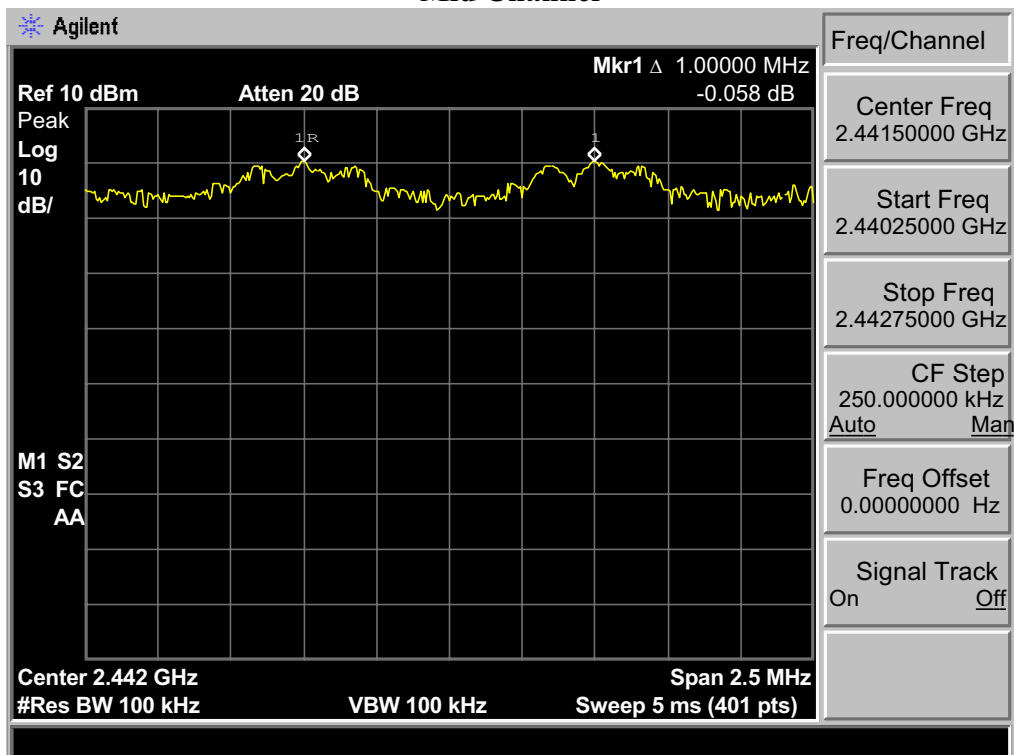


High Channel

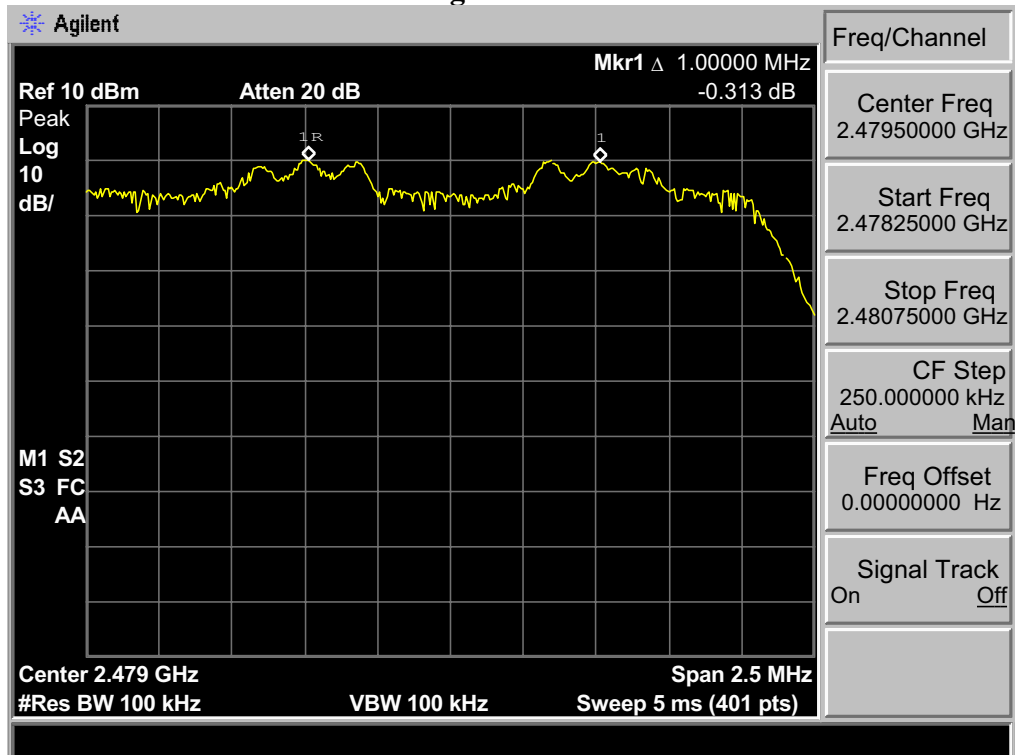


Adapter 2
GFSK
Low Channel

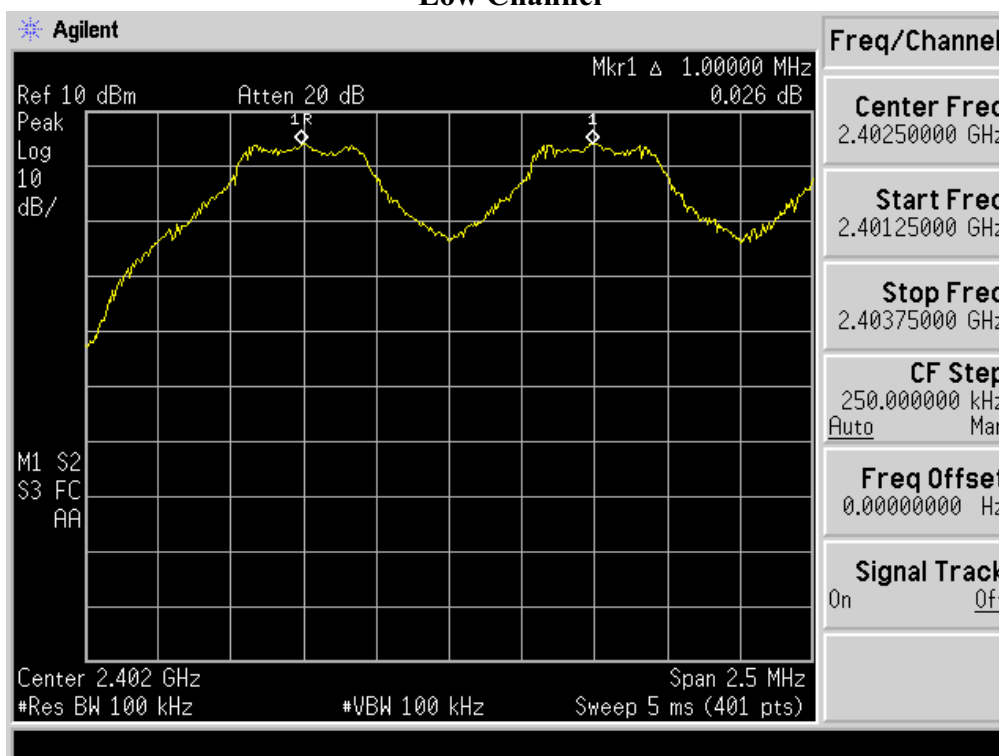


Mid Channel

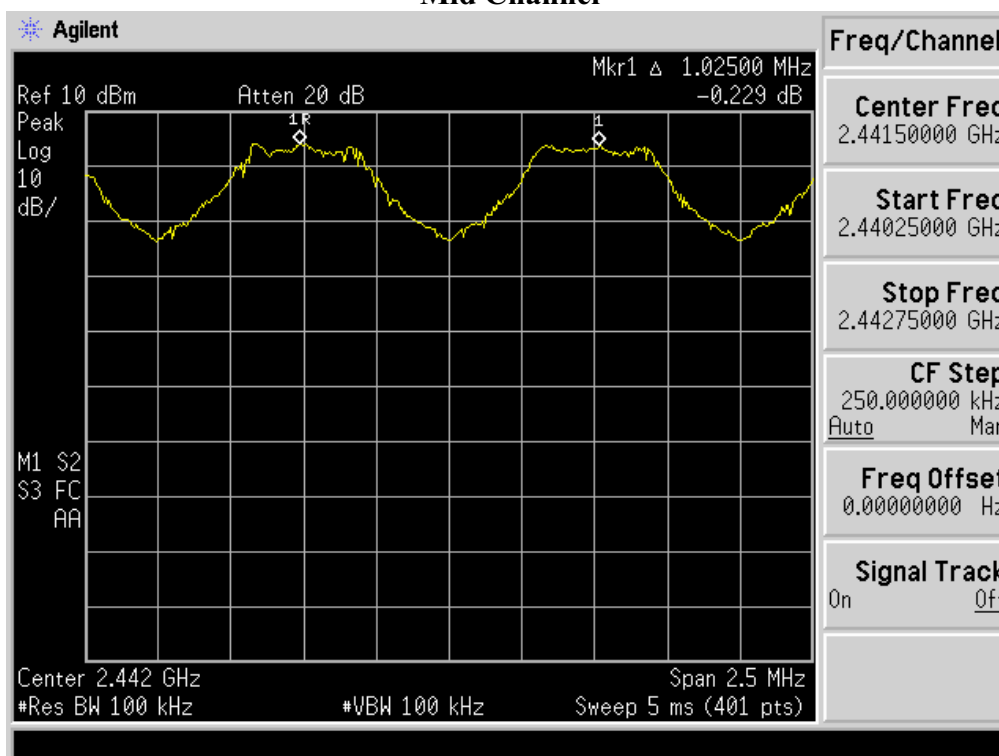


High Channel

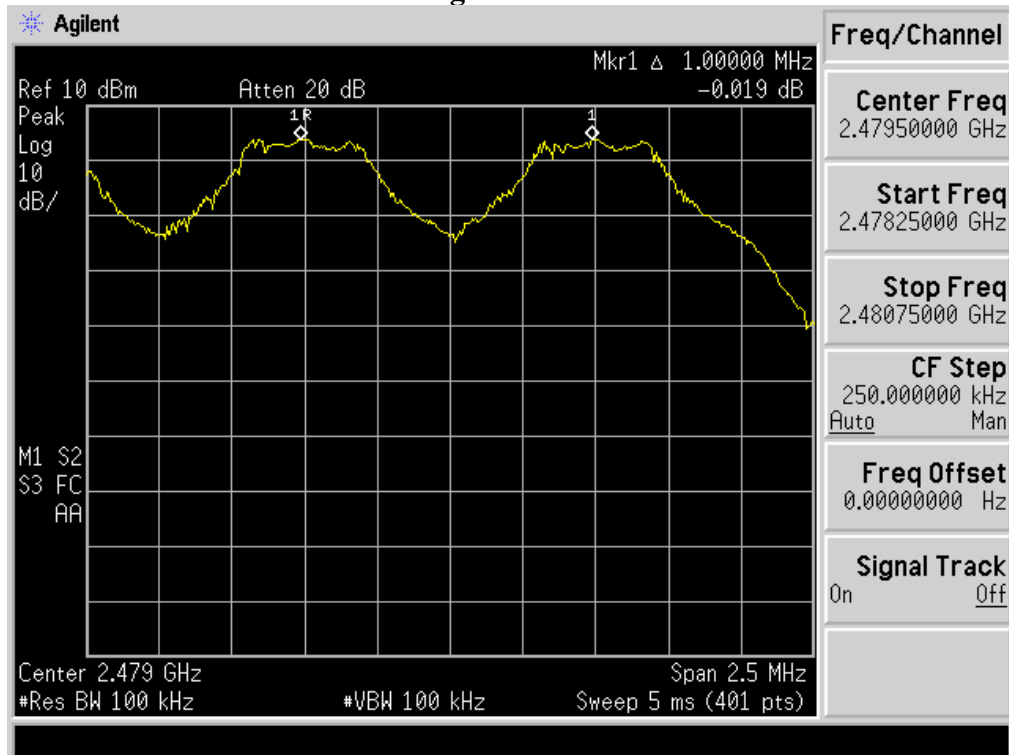


8-DPSK Low Channel

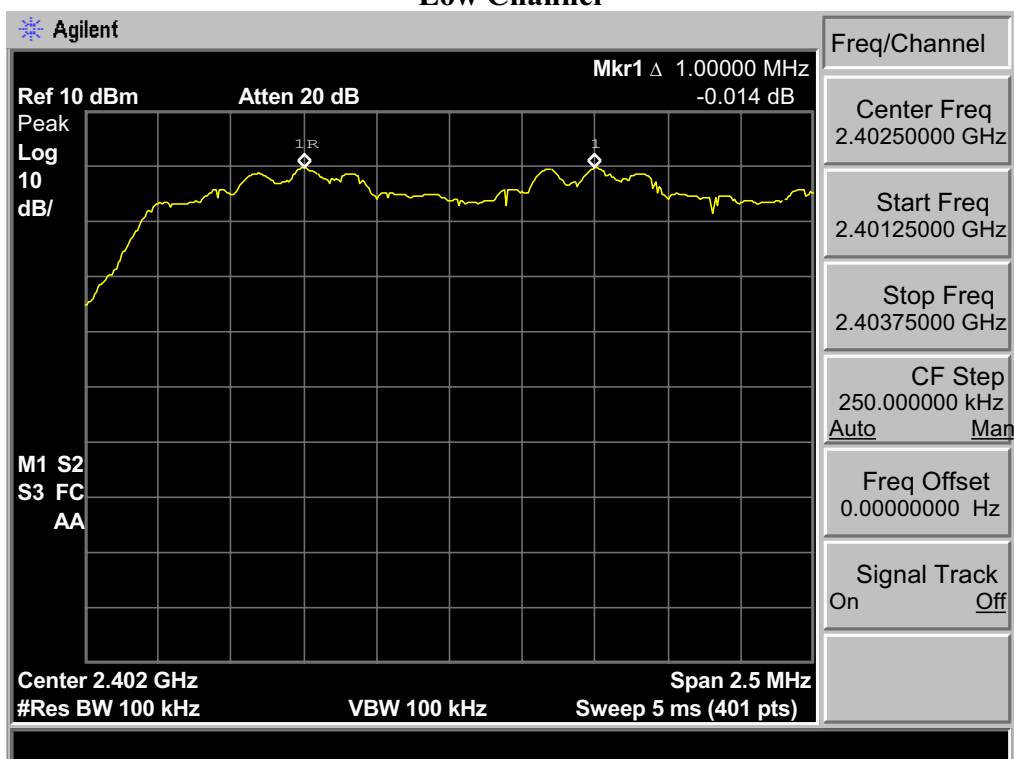

Mid Channel

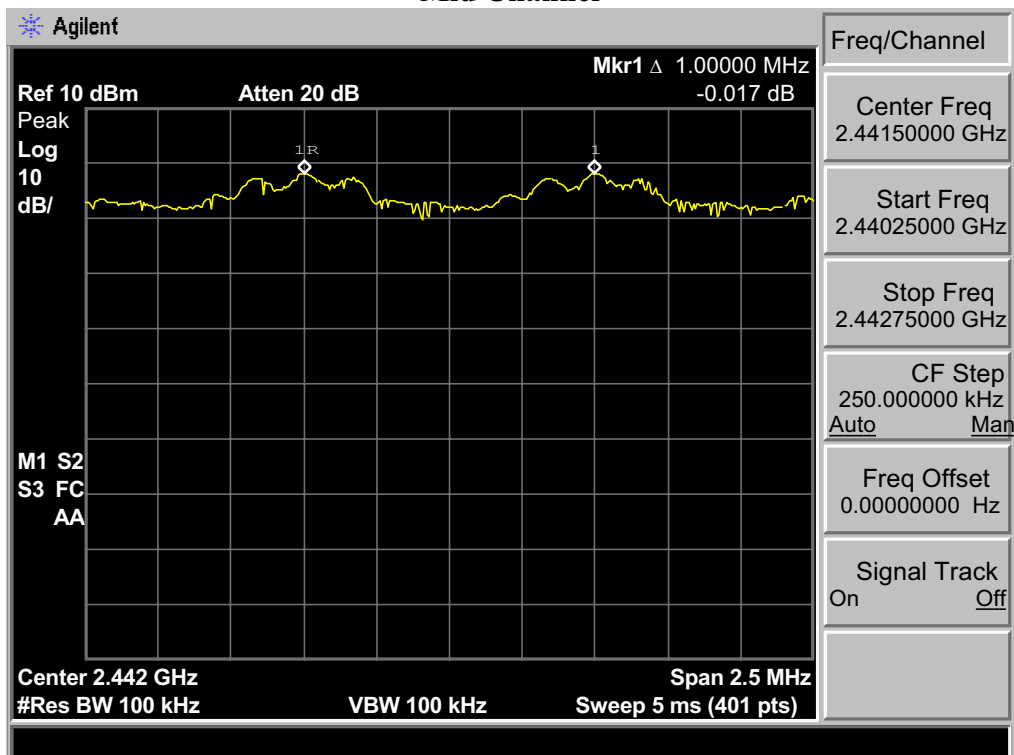

High Channel

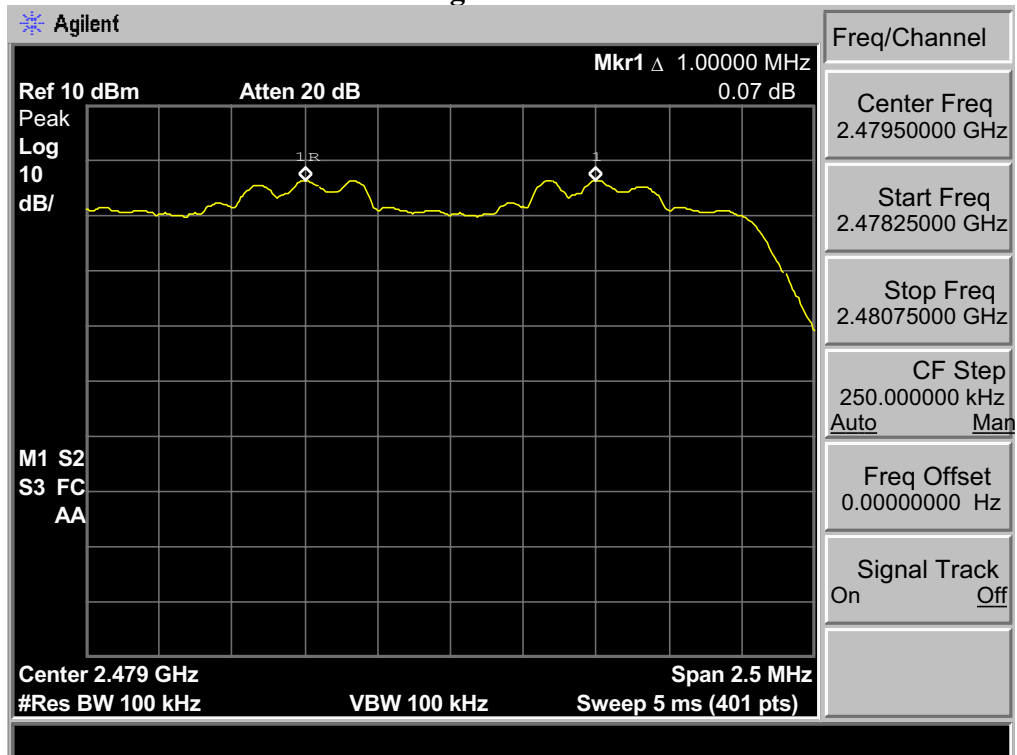

6. NUMBER OF HOPPING CHANNEL

6.1. Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels




6.2. Test Procedure

The transmitter output was coupled to a spectrum analyzer via a antenna. The number of hopping channel was measured by spectrum analyzer with 300kHz RBW and 300kHz VBW.




6.3. Test Result

EUT: Home theater with wireless subwoofer			
M/N: SoloCinemaStudio			
Test date: 2013-08-14		Test site: RF site	Tested by: Tony.Tang
Mode	Number of hopping channel	Limit	Conclusion
Adapter 1			
GFSK	79	>15	PASS
8-DPSK	79	>15	PASS
Adapter 2			
GFSK	79	>15	PASS
8-DPSK	79	>15	PASS




6.4. Test Data

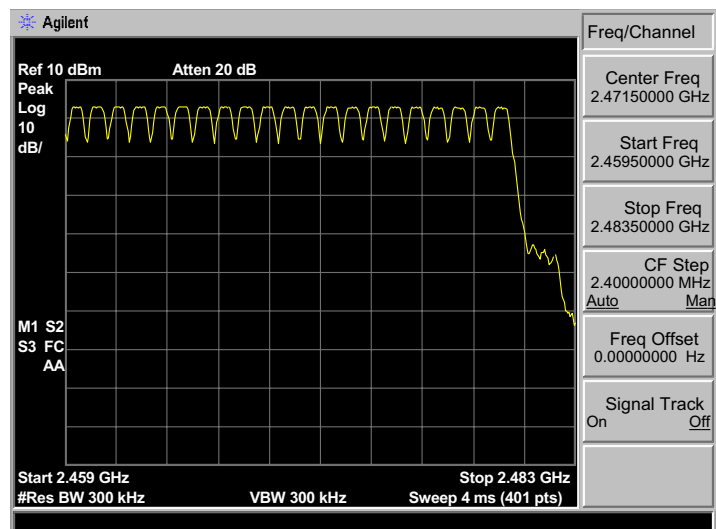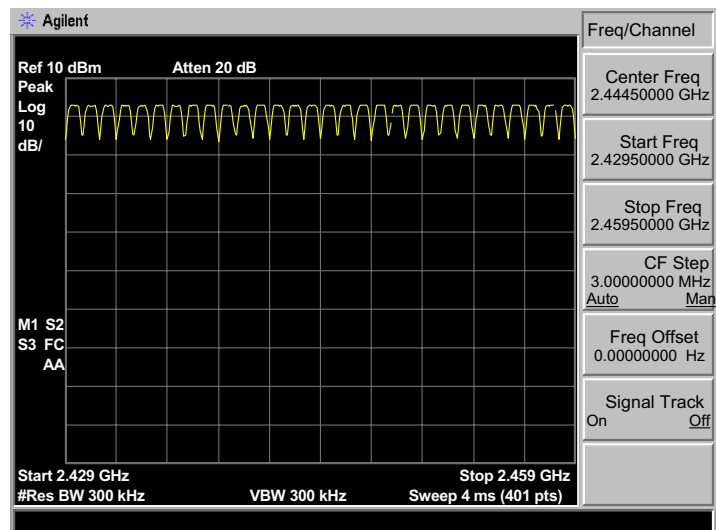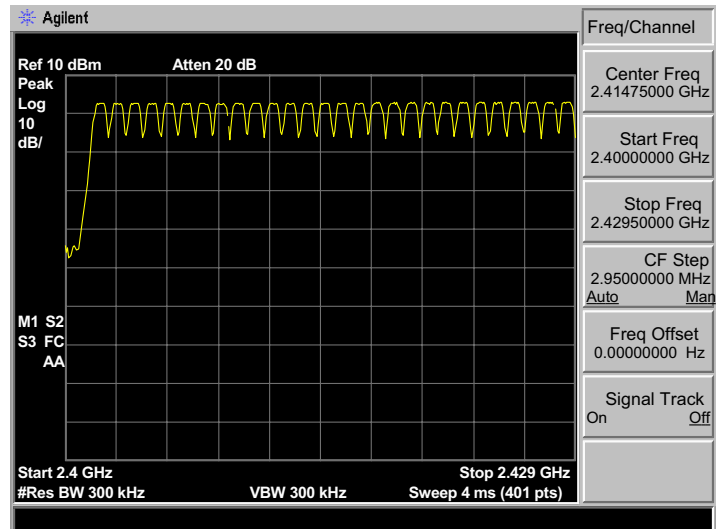Adapter 1
GFSK




8-DPSK

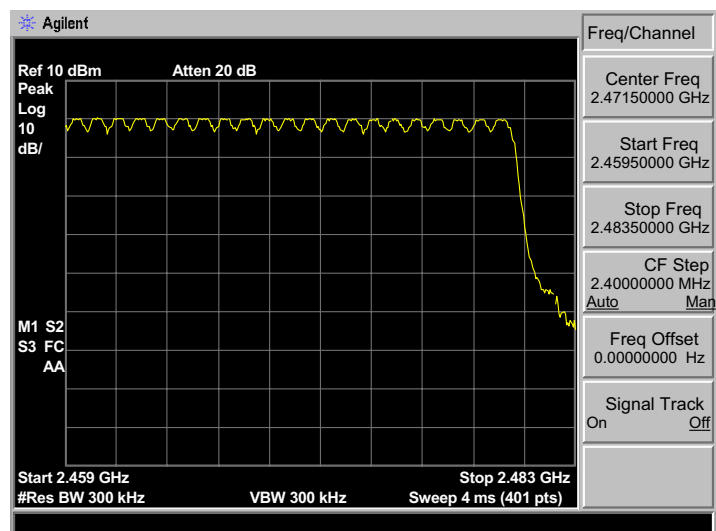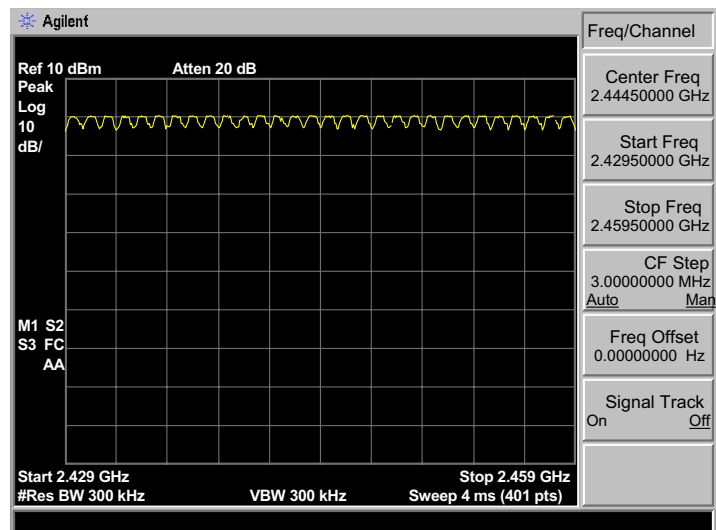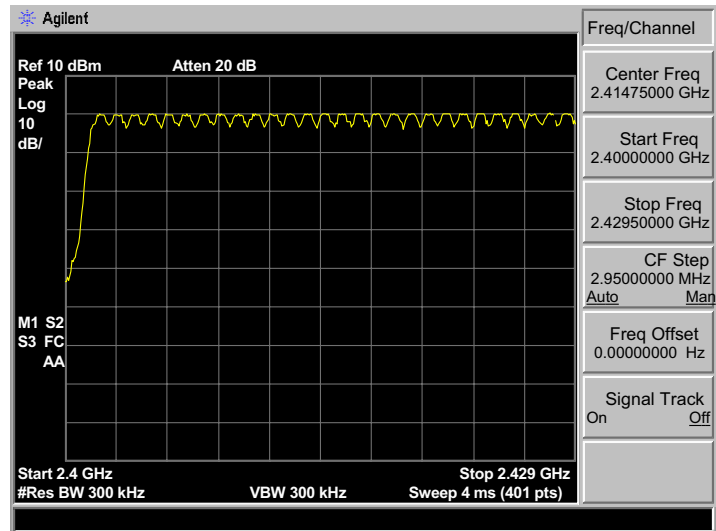

Adapter 2 GFSK

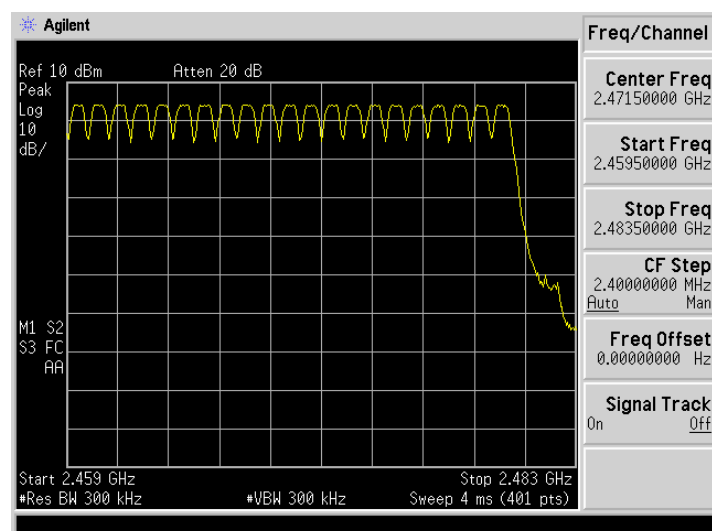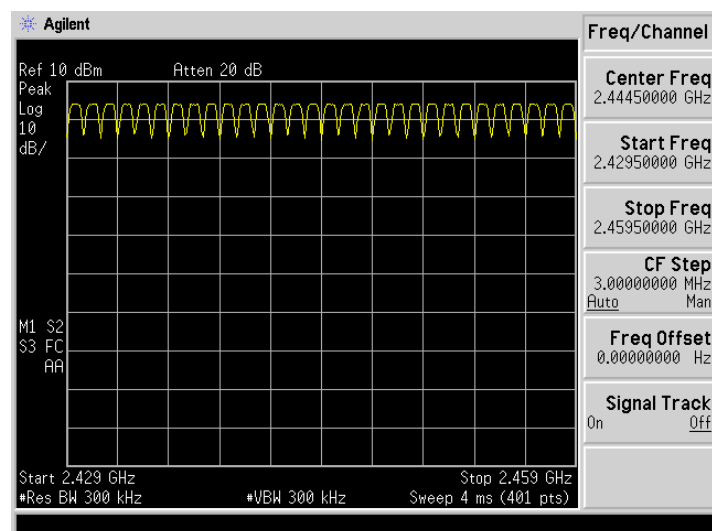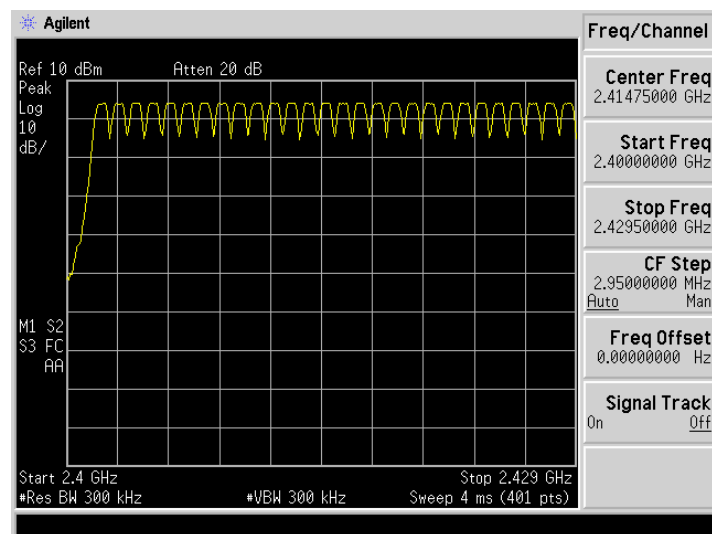

8-DPSK

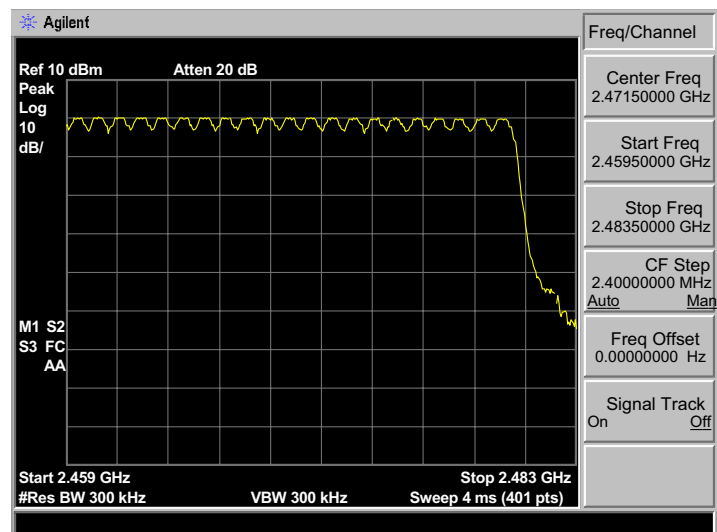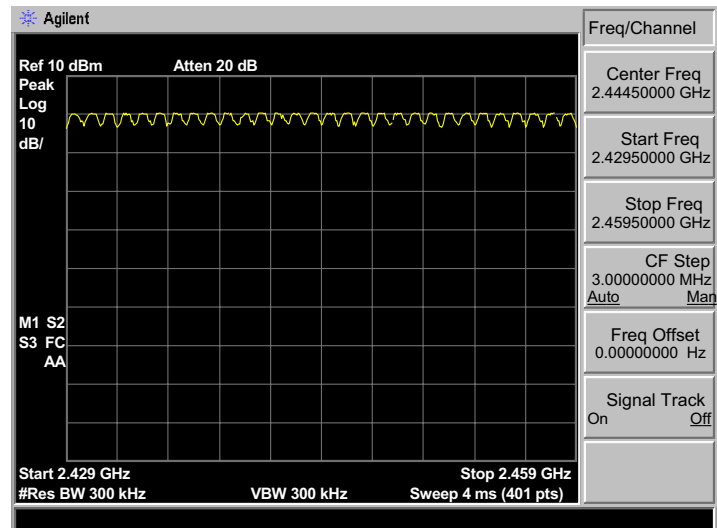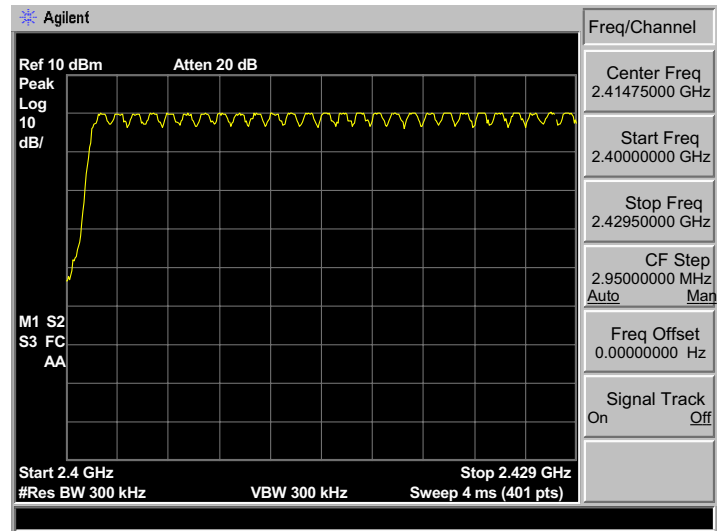

7. DWELL TIME

7.1. Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.



7.2. Test Result

EUT: Home theater with wireless subwoofer			
M/N: SoloCinemaStudio			
Test date: 2013-08-14		Test site: RF site	Tested by: Tony Tang
Mode	Dwell time	Limit	Conclusion
Adapter 1			
GFSK DH1	180.12	<400ms	PASS
GFSK DH3	290.72	<400ms	PASS
GFSK DH5	328.77	<400ms	PASS
8-DPSK DH1	161.16	<400ms	PASS
8-DPSK DH3	287.56	<400ms	PASS
8-DPSK DH5	333.06	<400ms	PASS
Adapter 2			
GFSK DH1	180.12	<400ms	PASS
GFSK DH3	282.82	<400ms	PASS
GFSK DH5	330.92	<400ms	PASS
8-DPSK DH1	202.24	<400ms	PASS
8-DPSK DH3	295.46	<400ms	PASS
8-DPSK DH5	330.92	<400ms	PASS



7.3. Test Data

Adapter 1



GFSK DH1 : $50\text{hop}/5\text{s} * 0.4 * 79 * 0.57\text{ms} = 180.12$

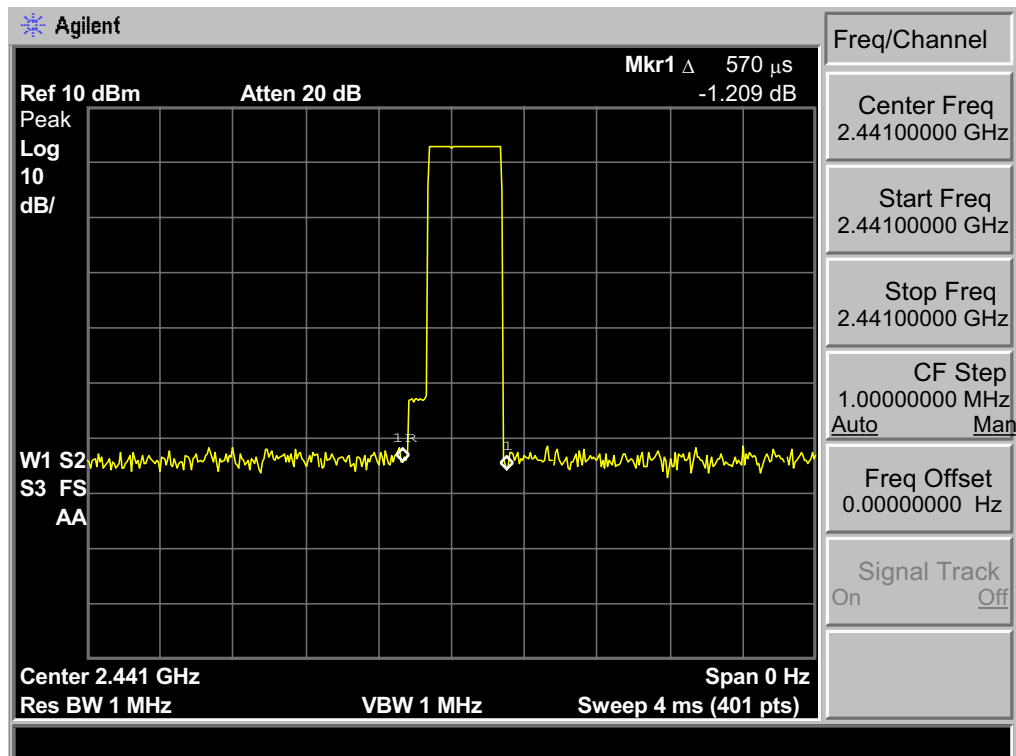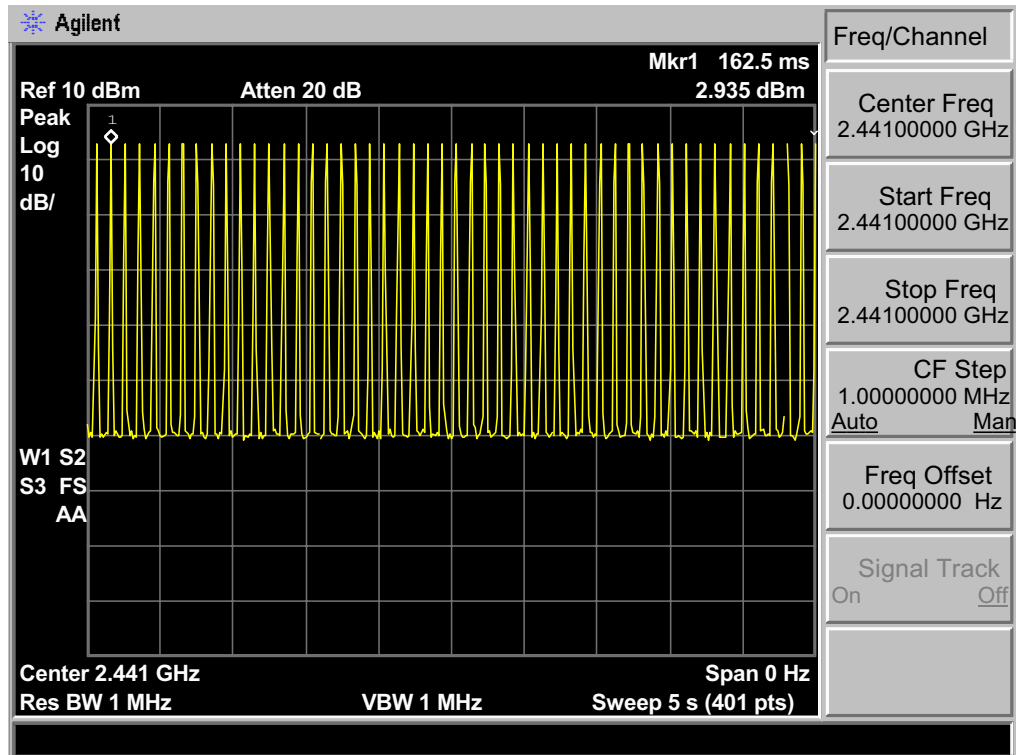



GFSK DH3 : 25hop/5s * 0.4 * 79 * 1.84ms= 290.72

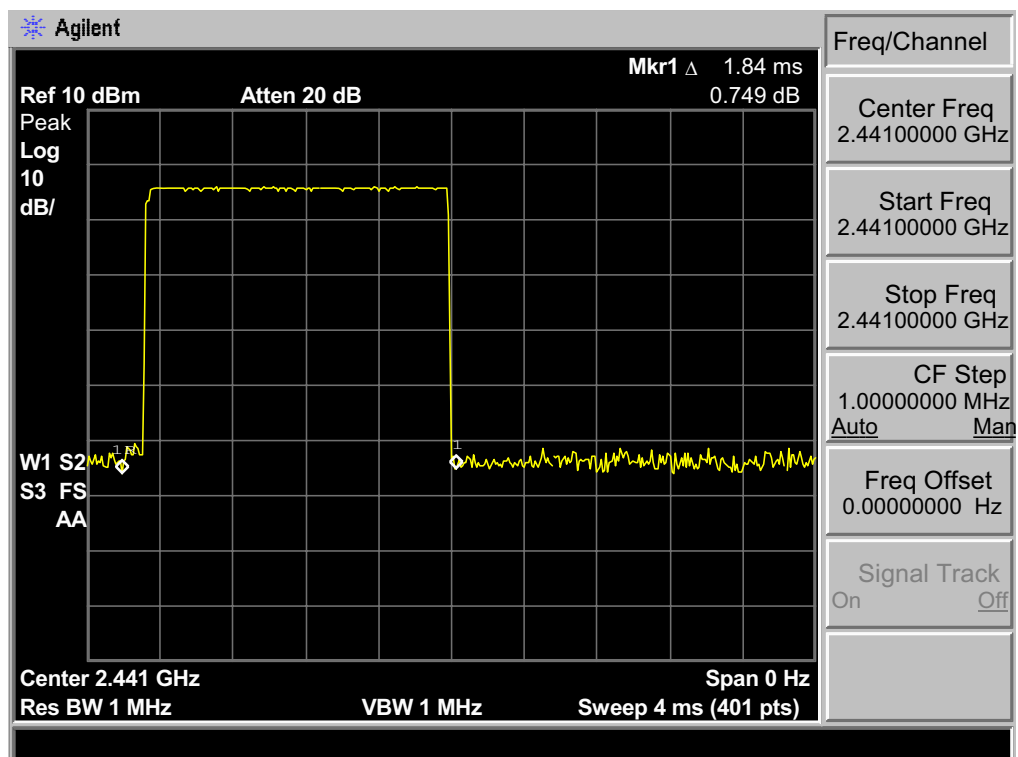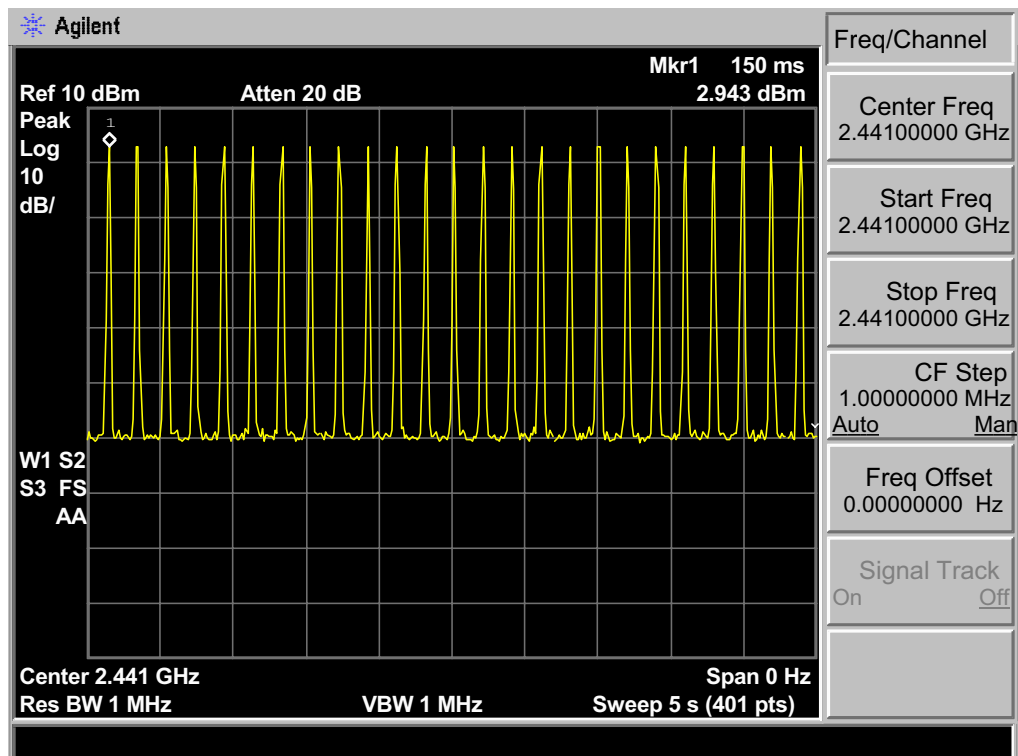



GSFK DH5 : 17hop/5s * 0.4 * 79 * 3.06ms = 328.77

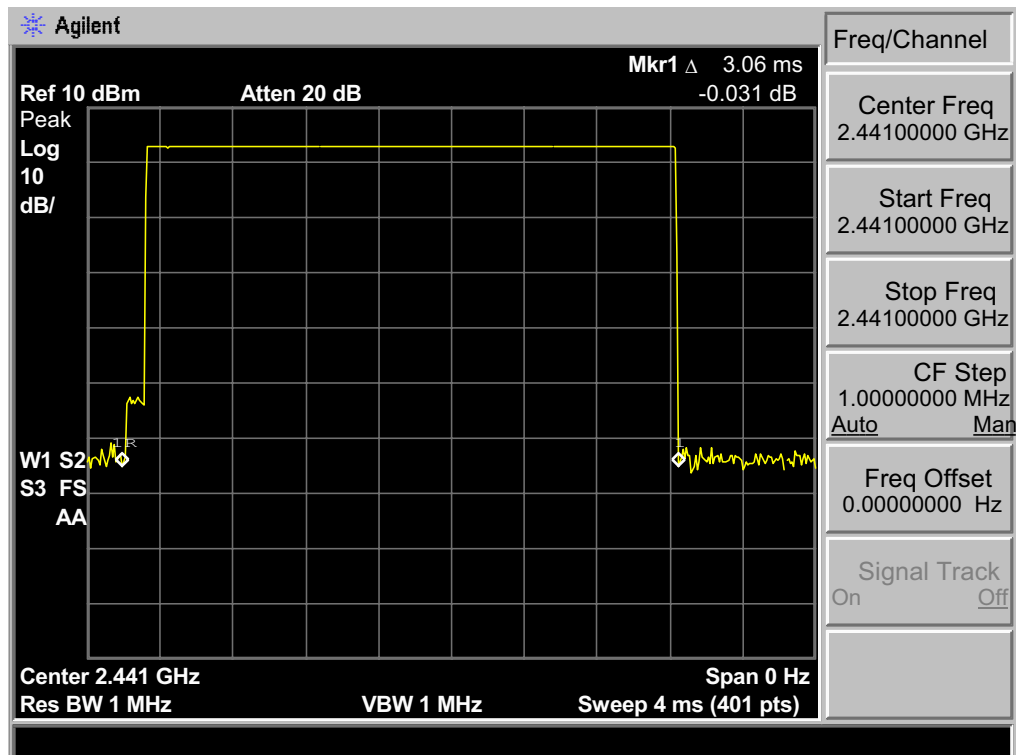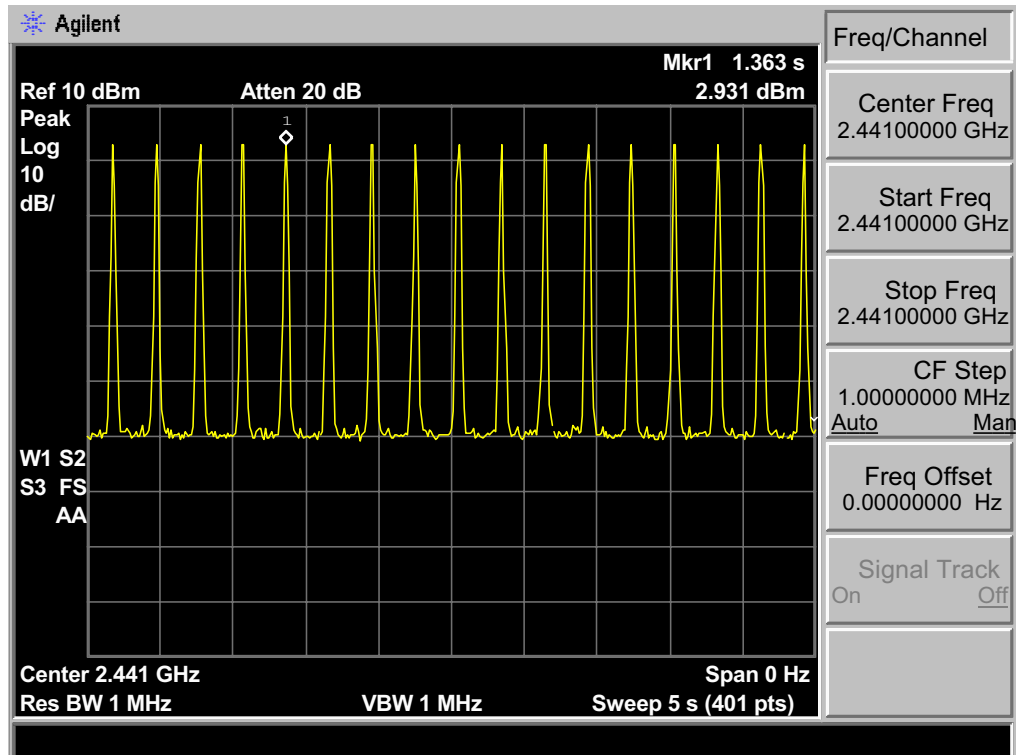



8-DPSK DH1 : $50\text{hop}/5\text{s} * 0.4 * 79 * 0.51\text{ms} = 161.16$

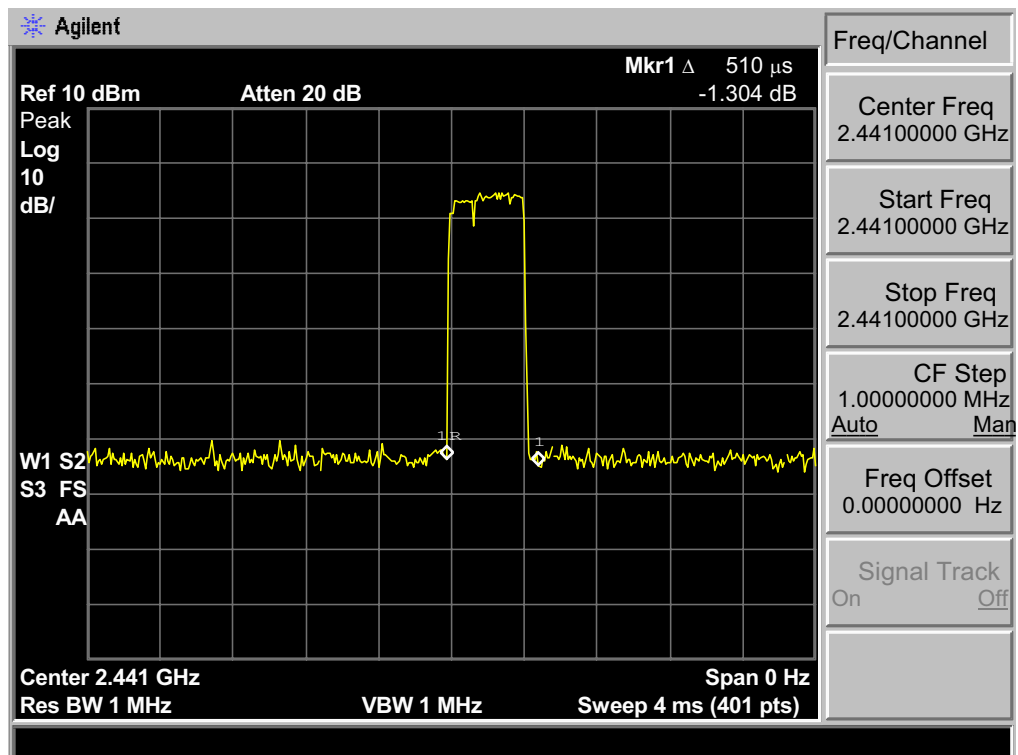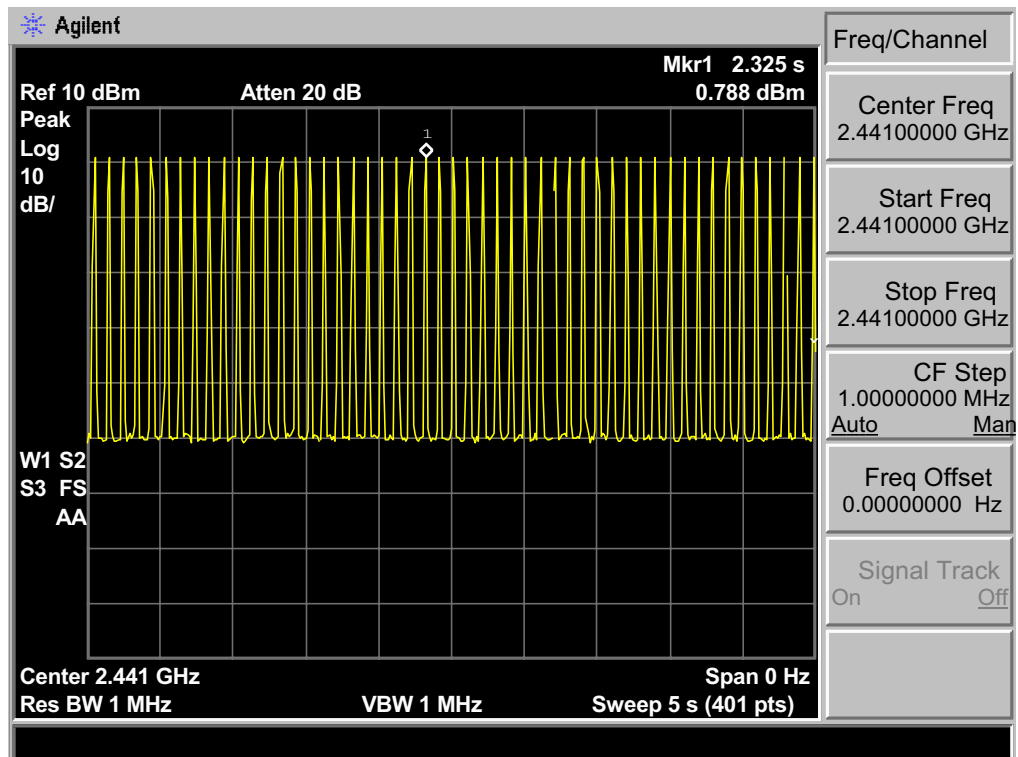

8-DPSK DH3 : $25\text{hop}/5\text{s} * 0.4 * 79 * 1.82\text{ms} = 287.56$

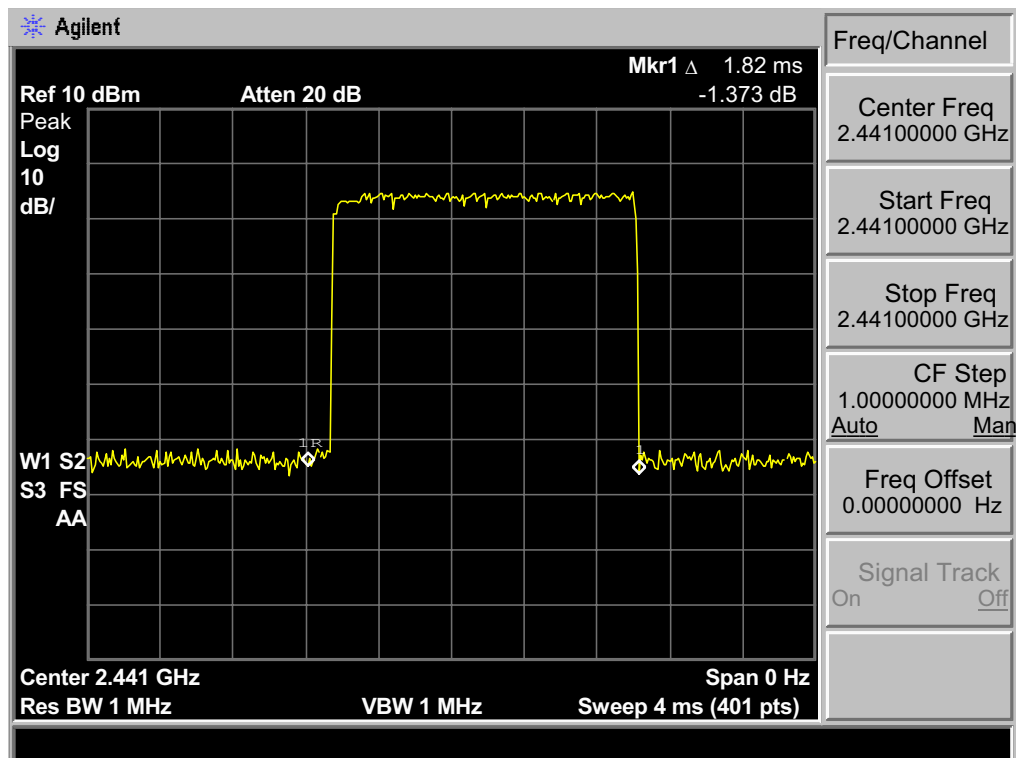
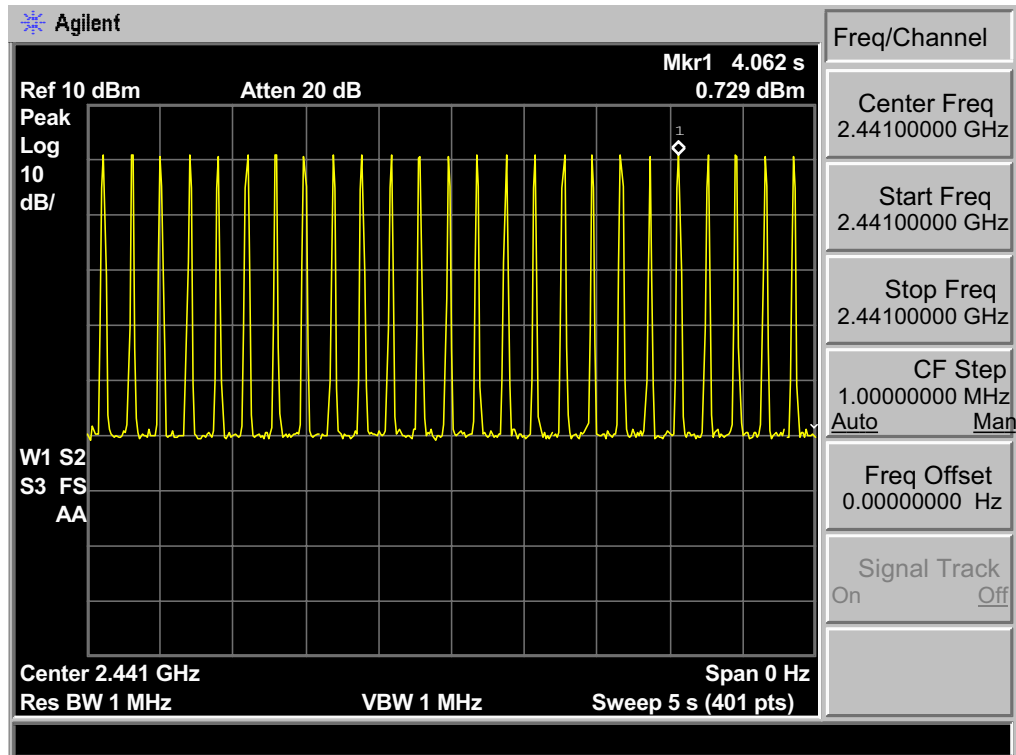


8-DPSK DH5 : $17\text{hop}/5\text{s} * 0.4 * 79 * 3.10\text{ms} = 333.06$

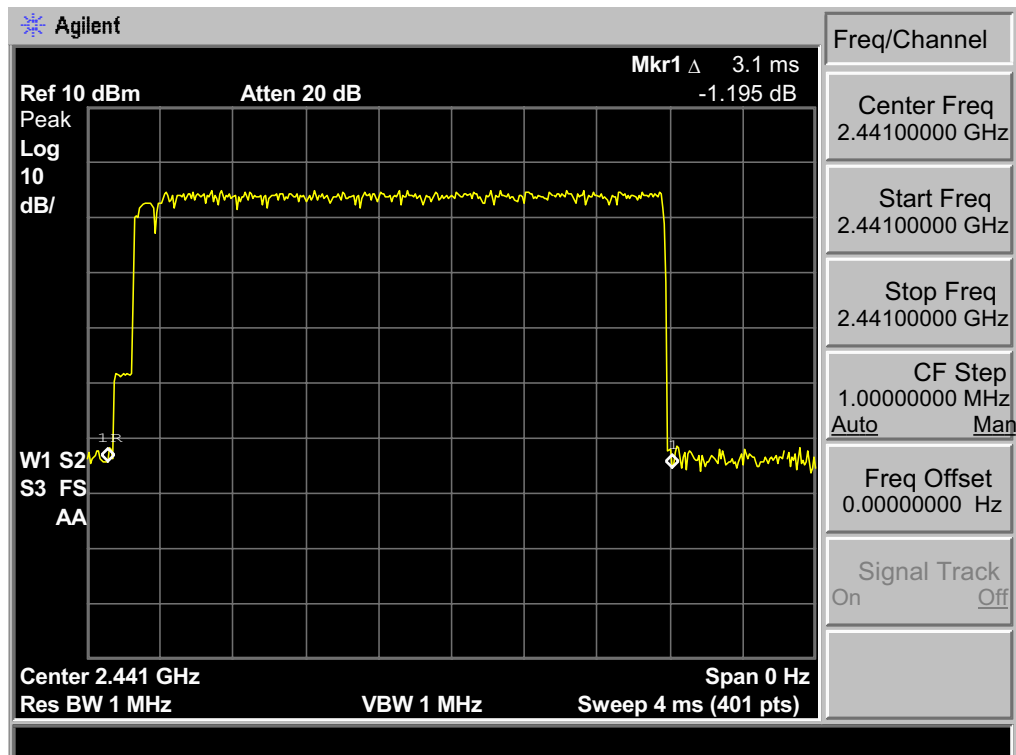
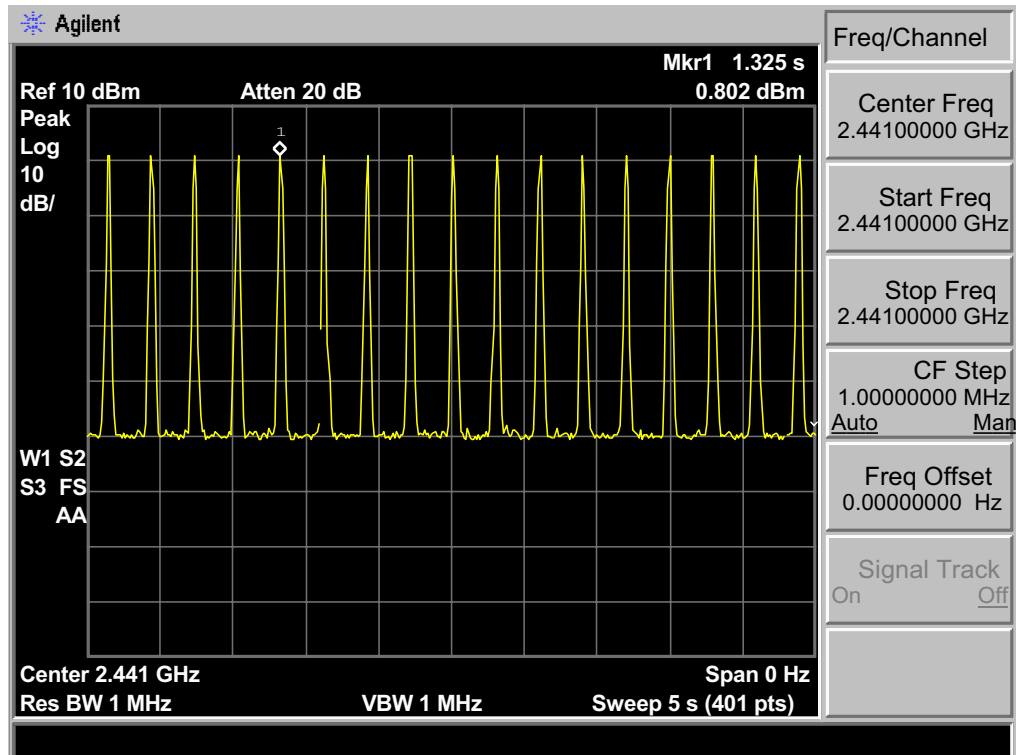


Adapter 2



GFSK DH1 : $50\text{hop}/5\text{s} * 0.4 * 79 * 0.57\text{ms} = 180.12$

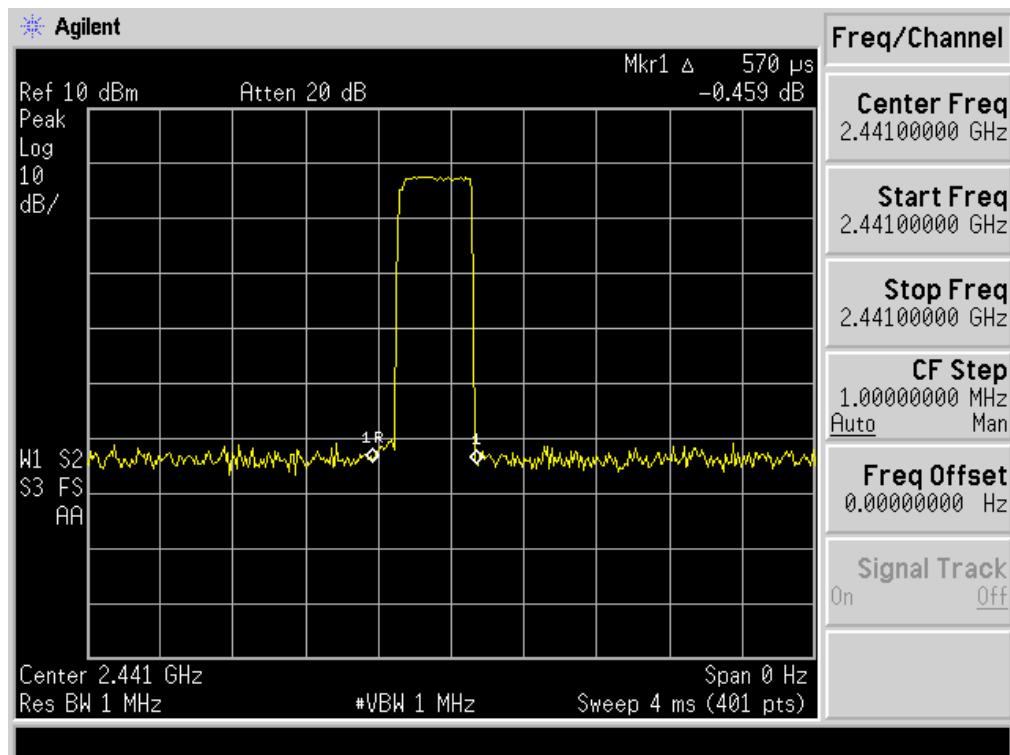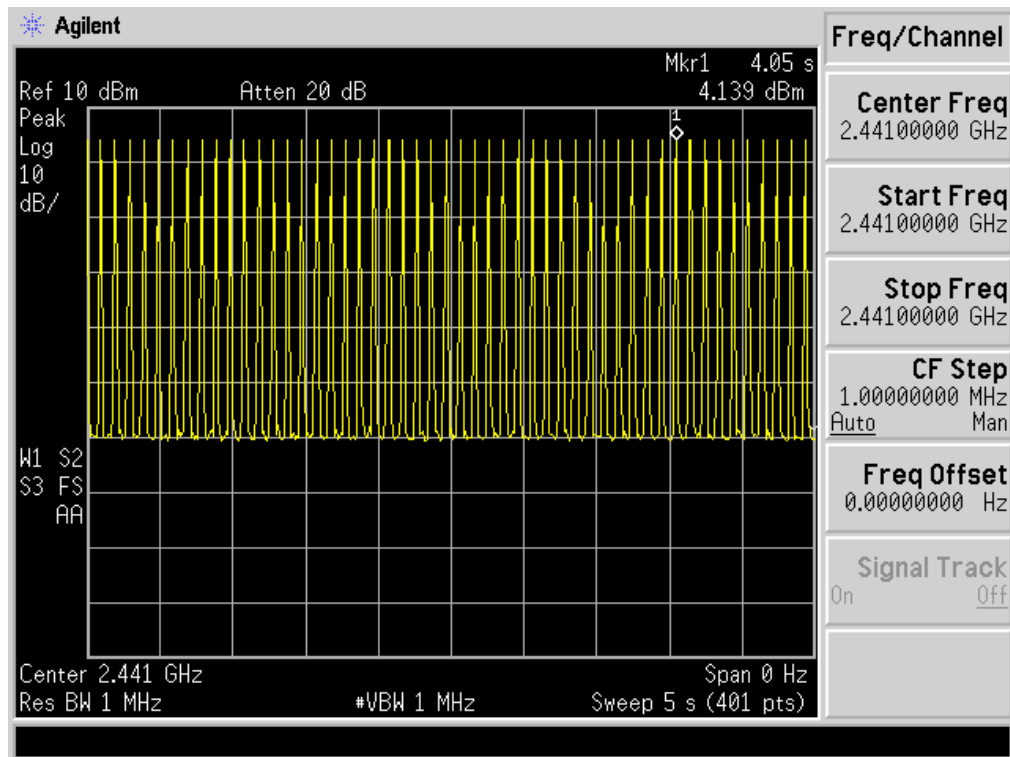



GFSK DH3 : $25\text{hop}/5\text{s} * 0.4 * 79 * 1.79\text{ms} = 282.82$

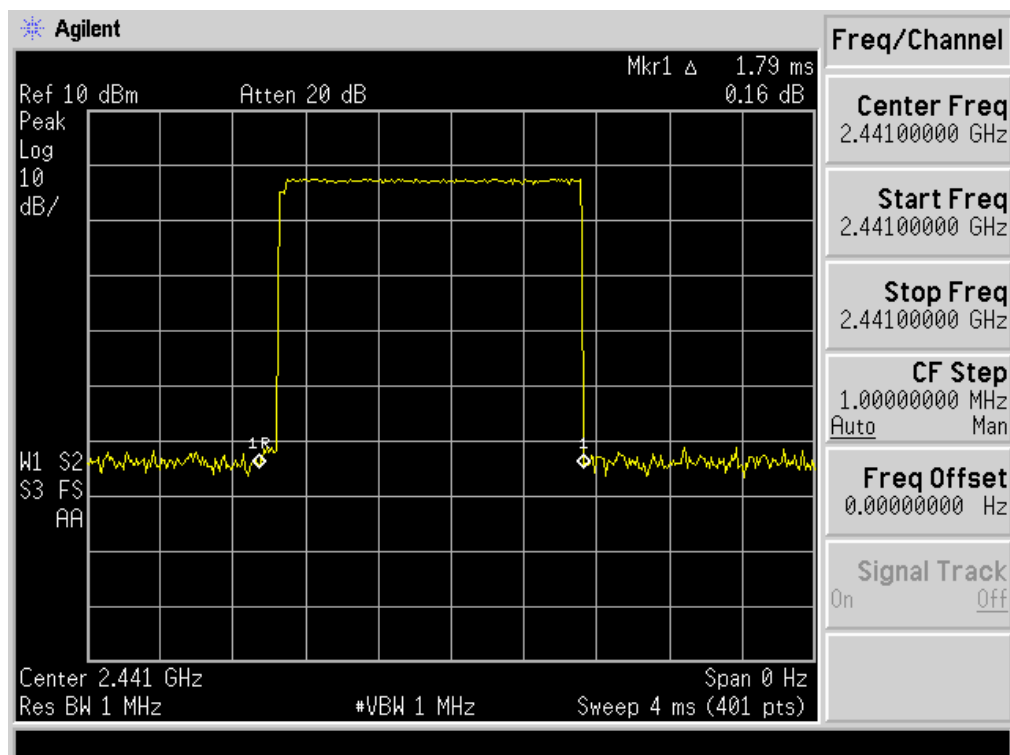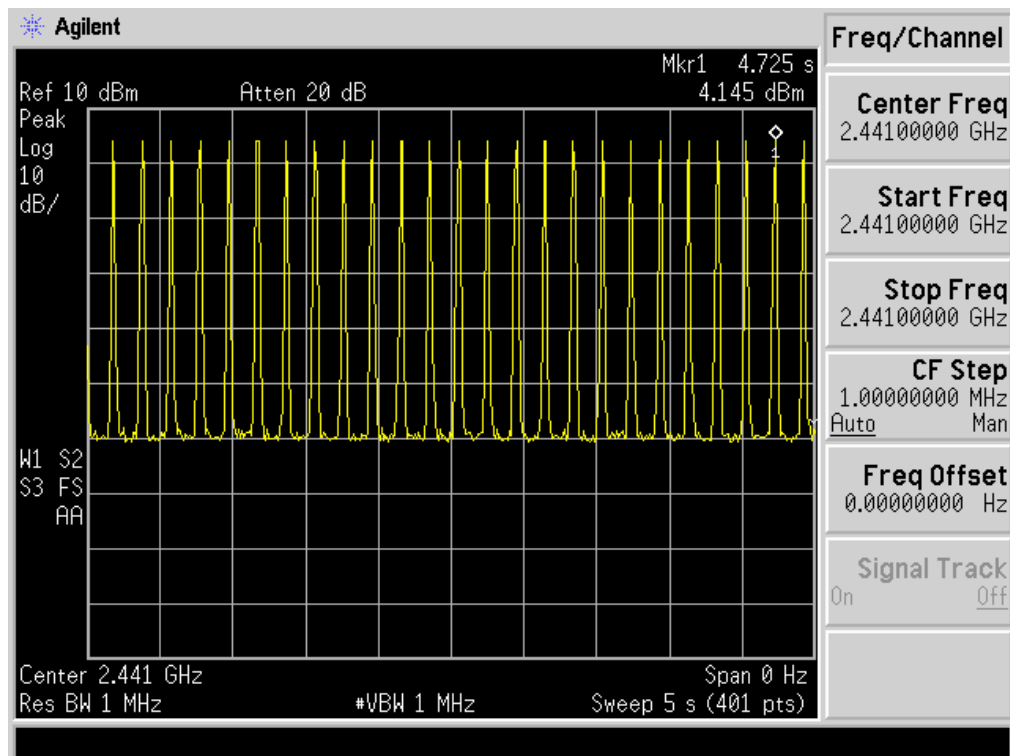



GSFK DH5 : 17hop/5s * 0.4 * 79 * 3.08ms = 330.92

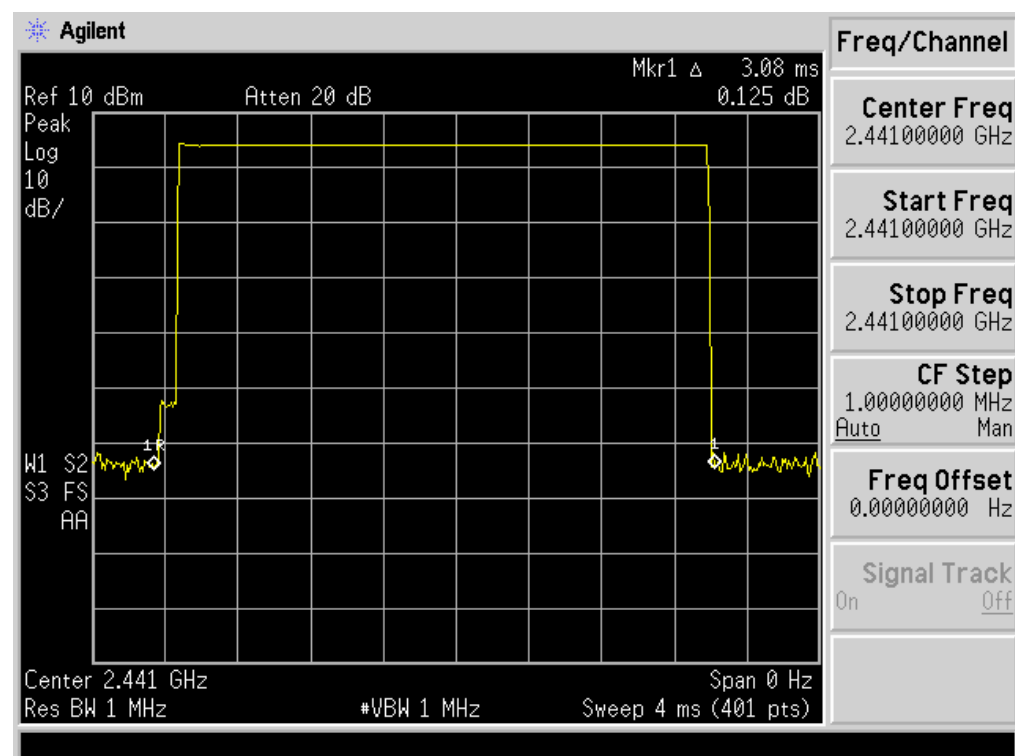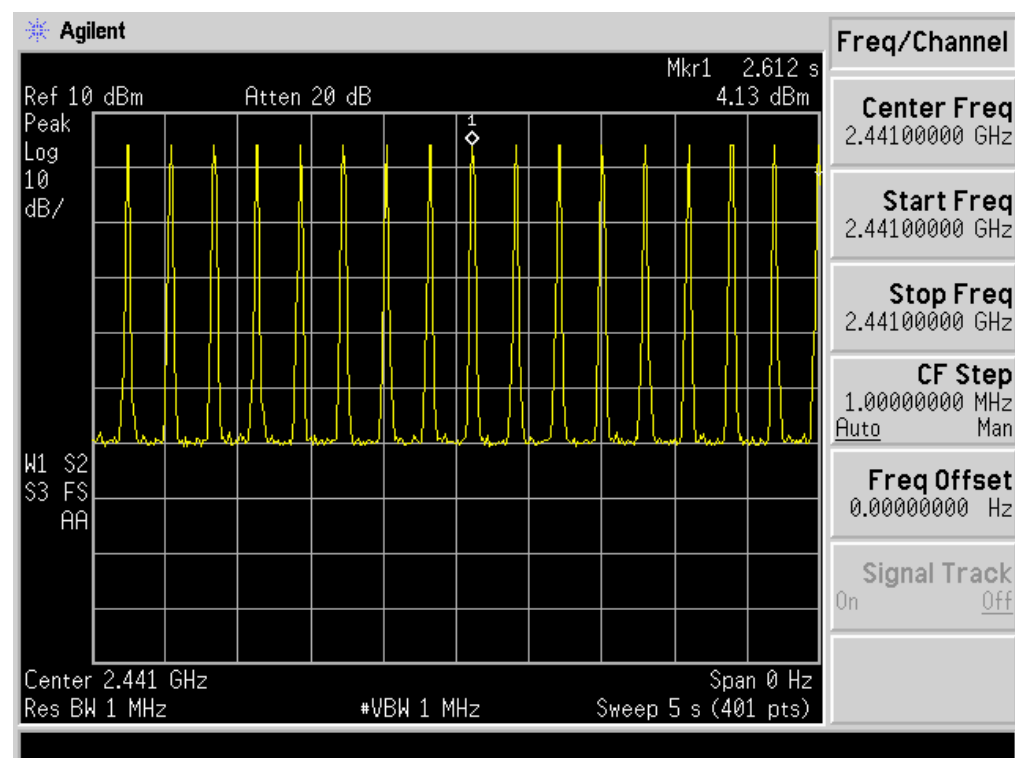



8-DPSK DH1 : $50\text{hop}/5\text{s} * 0.4 * 79 * 0.61\text{ms} = 202.24$

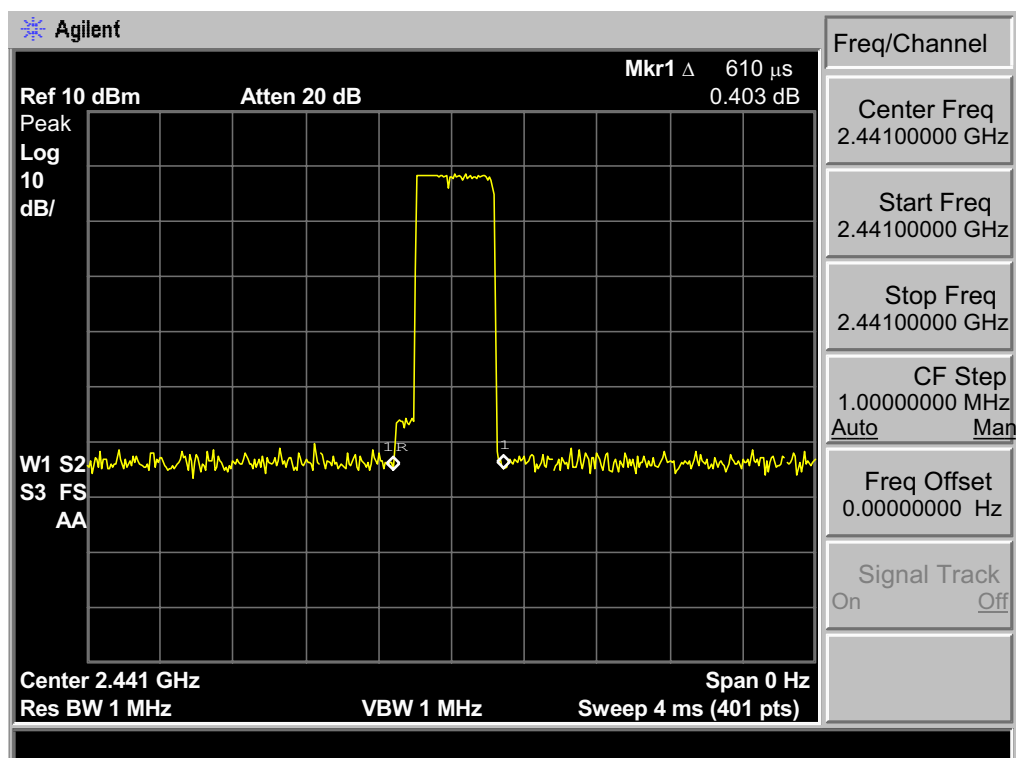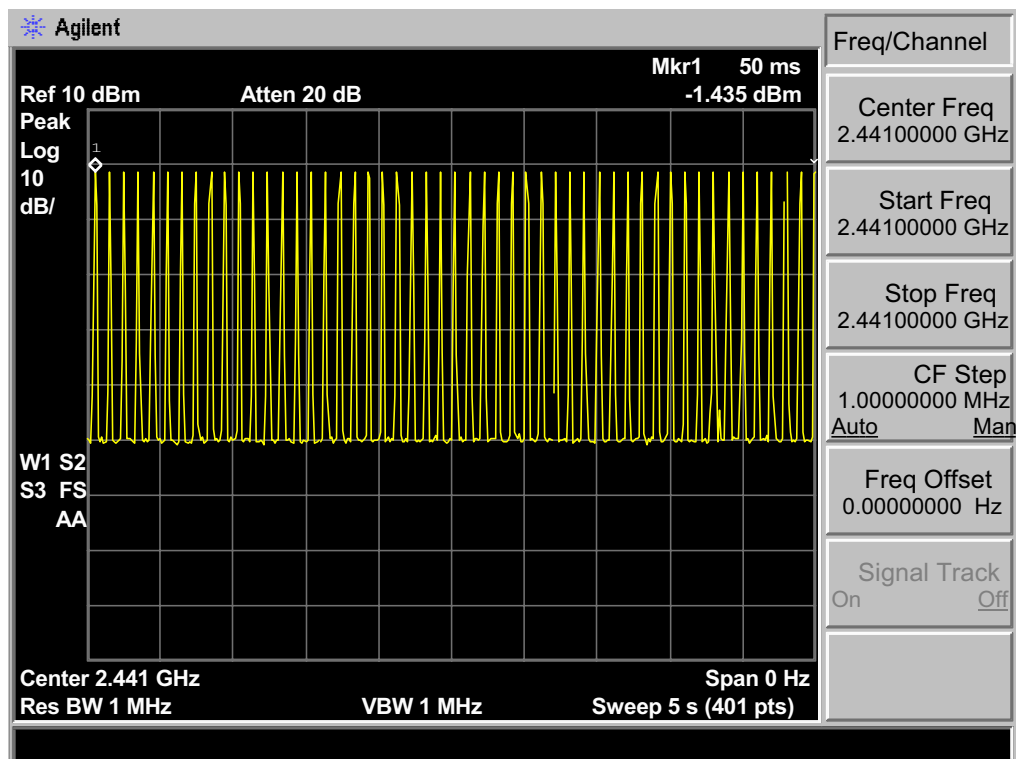

8-DPSK DH3 : $25\text{hop}/5\text{s} * 0.4 * 79 * 1.87\text{ms} = 295.46$

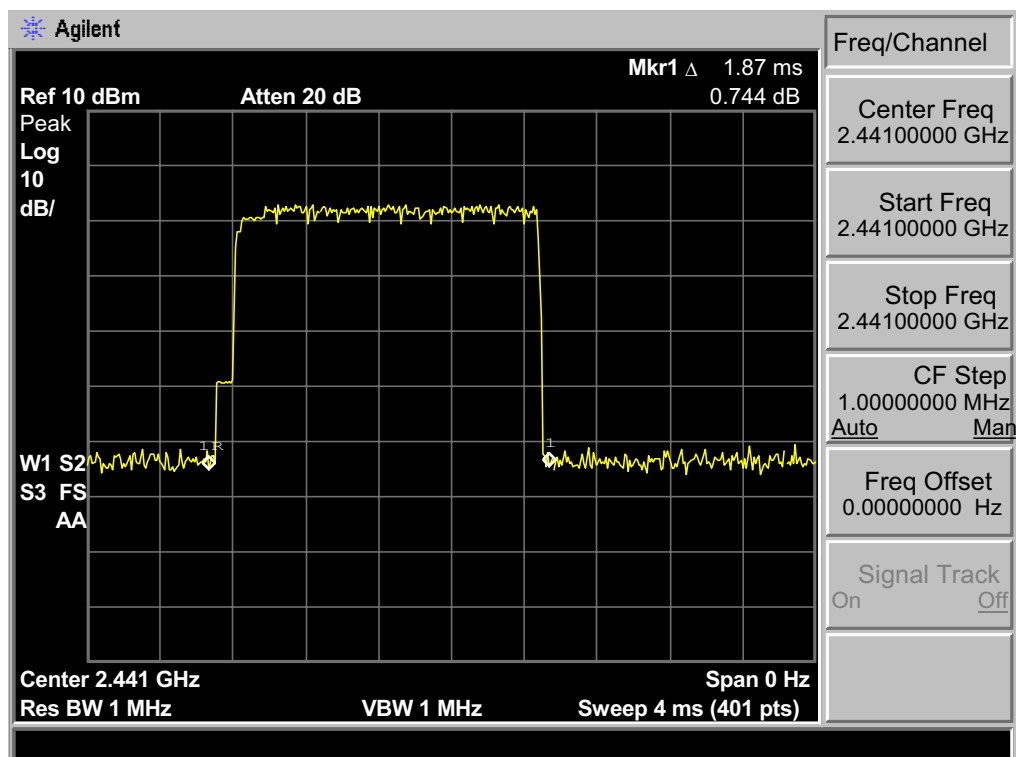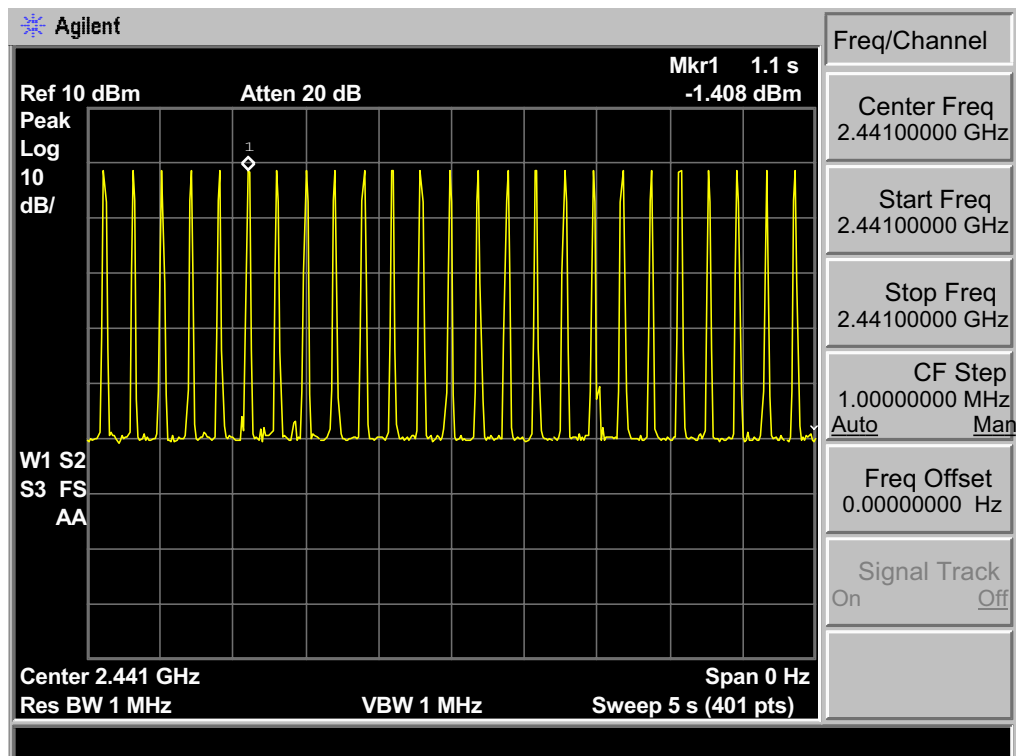

8-DPSK DH5 : $17\text{hop}/5\text{s} * 0.4 * 79 * 3.08\text{ms} = 330.92$

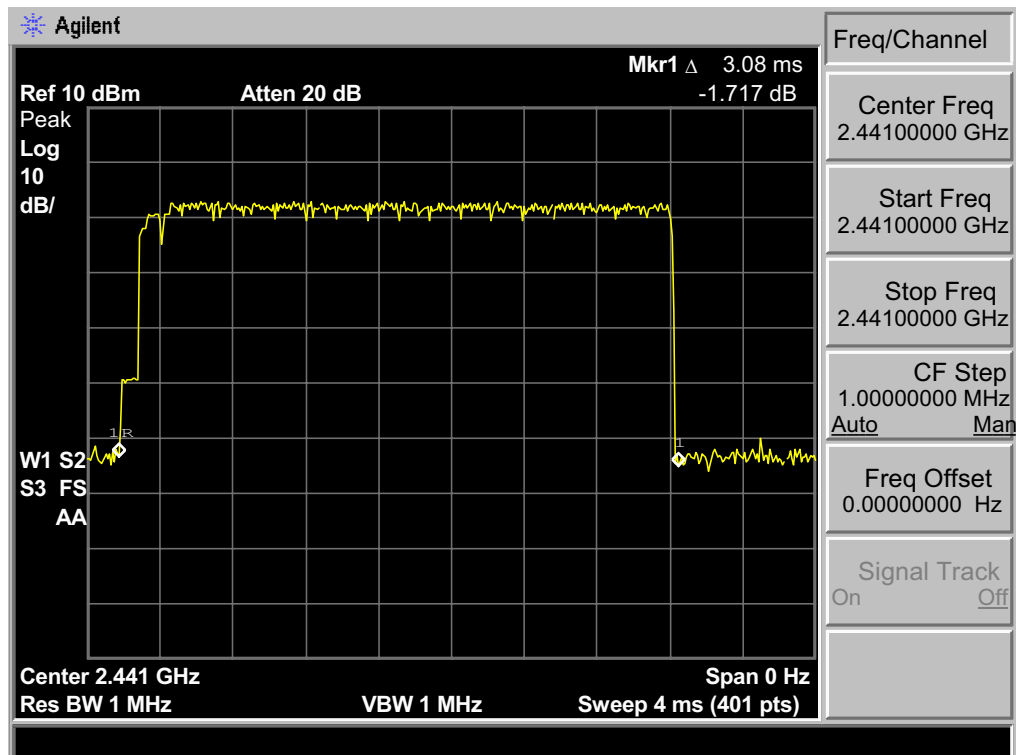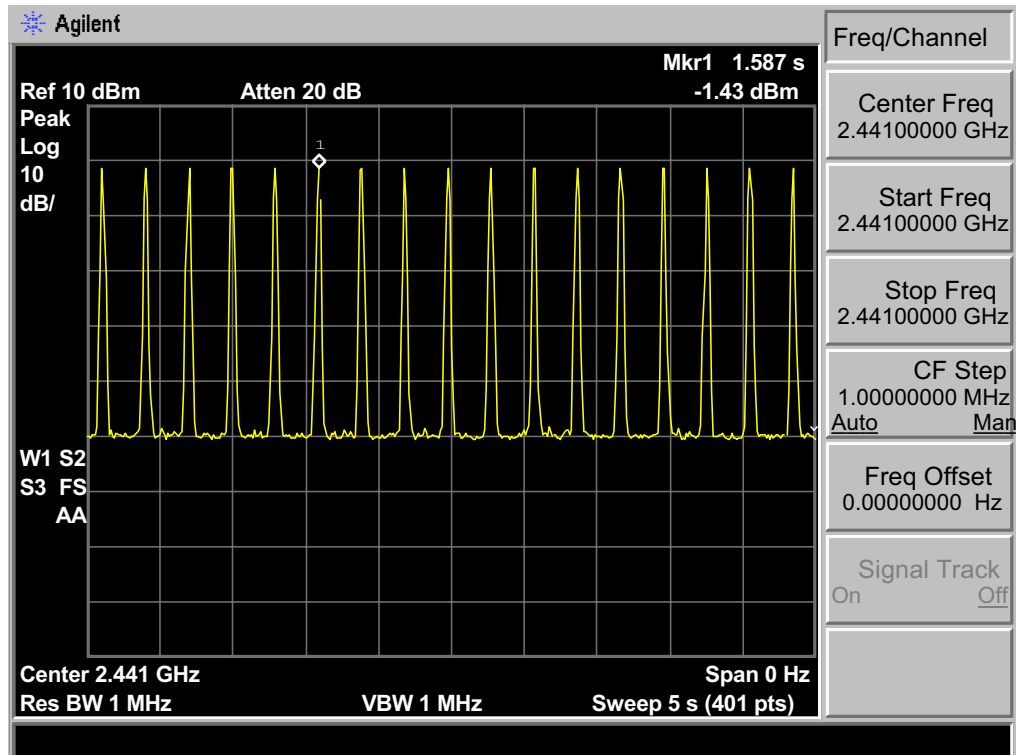

8. RADIATED EMISSIONS

8.1. Limit

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.


15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

15.209 Limit

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		μV/m	dB(μV)/m
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	

8.2. Block Diagram of Test setup

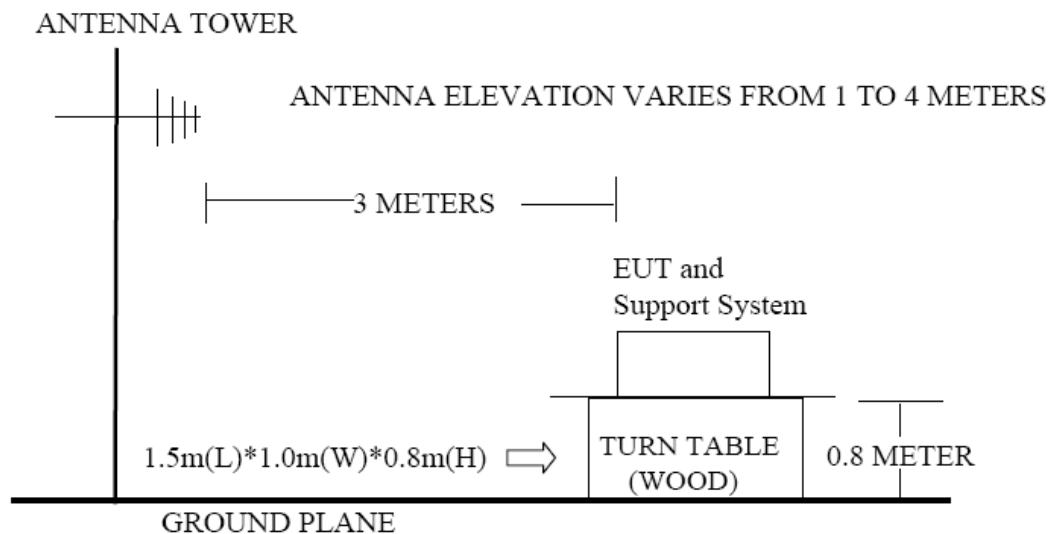

8.3. Test Procedure

EUT was placed on a turn table, which is 0.8 meter high above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. Power on the EUT and let it working in test mode, then test it. EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Both horizontal and vertical polarization of the antenna are set on test.

The bandwidth of the EMI test receiver (R&S ESVS10) is set at 120kHz for frequency range from 30MHz to 1000 MHz.

The bandwidth of the Spectrum's VBW is set at 1MHz and RBW is set at 1MHz for peak emissions measurement above 1GHz and 1MHz RBW, 10Hz VBW for average emissions measure above 1GHz

The frequency range from 30MHz to 10th harmonic (25GHz) are checked.

8.4. Test Result


30MHz—25GHz Radiated emission Test result		
EUT: Home theater with wireless subwoofer		
M/N: SoloCinemaStudio		
Power: DC 24V From Adapter Input AC 120V/60Hz		
Test date: 2013-07-12~13	Test site: 3m Chamber	Tested by: Tony Tang
Test mode: Tx Mode		
Pass		

Note: 1、 For emissions above 1GHz, if peak level comply with average limit, then the average level is deemed to comply with average limit.

2、 The frequency 2402MHz 、2441MHz and 2480MHz is fundamental frequency which no limit, the limit on plots is automatically generated by the software, it's not fundamental limit, we can't remove it.


8.5. Test Data

30 MHz – 1000 MHz

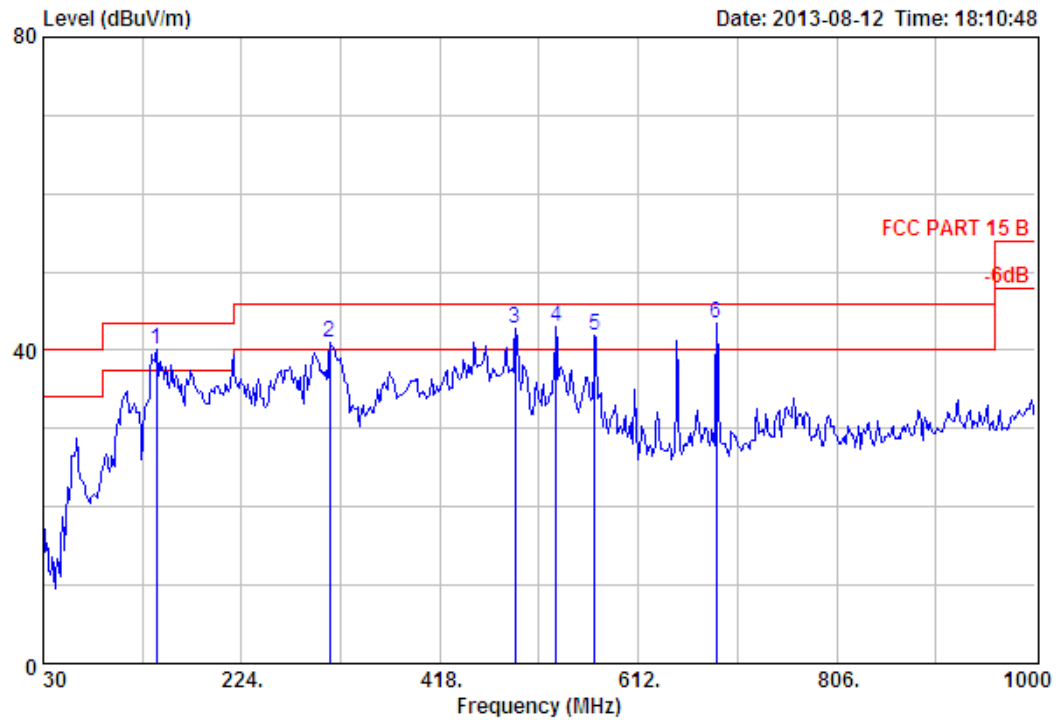


Site no.	: 3m Chamber	Data no. :	382
Dis. / Ant.	: 3m 27137	Ant. pol. :	HORIZONTAL
Limit	: FCC PART 15 B		
Env. / Ins.	: Temp:25.6';Humi:56%;Press:101.52kPa		
Engineer	: Tony		
EUT	: Home theater with wireless subwoofer		
Power	: DC 24V From Adapter Input AC 120V/60Hz		
M/N	: SoloCinemaStudio		
Test Mode	: GFSK TX 2402MHz		
	Adapter 1		

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission		Margin (dB)	Remark
					Level (dBuV/m)	Limits (dBuV/m)		
1	140.58	11.40	3.66	54.06	40.03	43.50	3.47	Peak
2	310.33	13.20	5.32	51.66	40.93	46.00	5.07	Peak
3	491.72	17.82	6.69	47.46	42.85	46.00	3.15	Peak
4	531.49	18.45	6.92	46.78	43.07	46.00	2.93	Peak
5	569.32	19.61	7.15	44.36	41.85	46.00	4.15	Peak
6	688.63	20.35	7.98	44.51	43.47	46.00	2.53	Peak

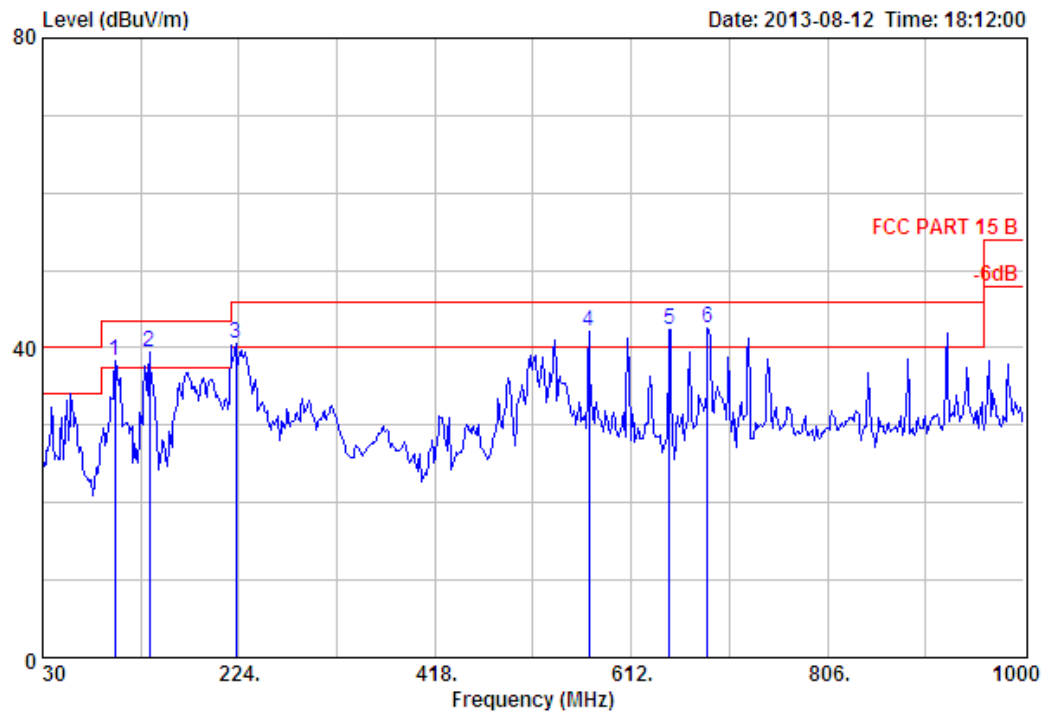


Site no. : 3m Chamber Data no. : 383
 Dis. / Ant. : 3m 27137 Ant. pol. : VERTICAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : GFSK TX 2402MHz
 Adapter 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Reamark (dB)
1	101.78	9.65	3.07	54.52	38.24	43.50	5.26	Peak
2	135.73	11.38	3.60	53.48	39.38	43.50	4.12	Peak
3	221.09	9.26	4.45	55.64	40.50	46.00	5.50	Peak
4	570.29	19.60	7.15	44.70	42.18	46.00	3.82	Peak
5	649.83	20.10	7.62	43.83	42.38	46.00	3.62	Peak
6	687.66	20.35	7.97	43.69	42.65	46.00	3.35	Peak

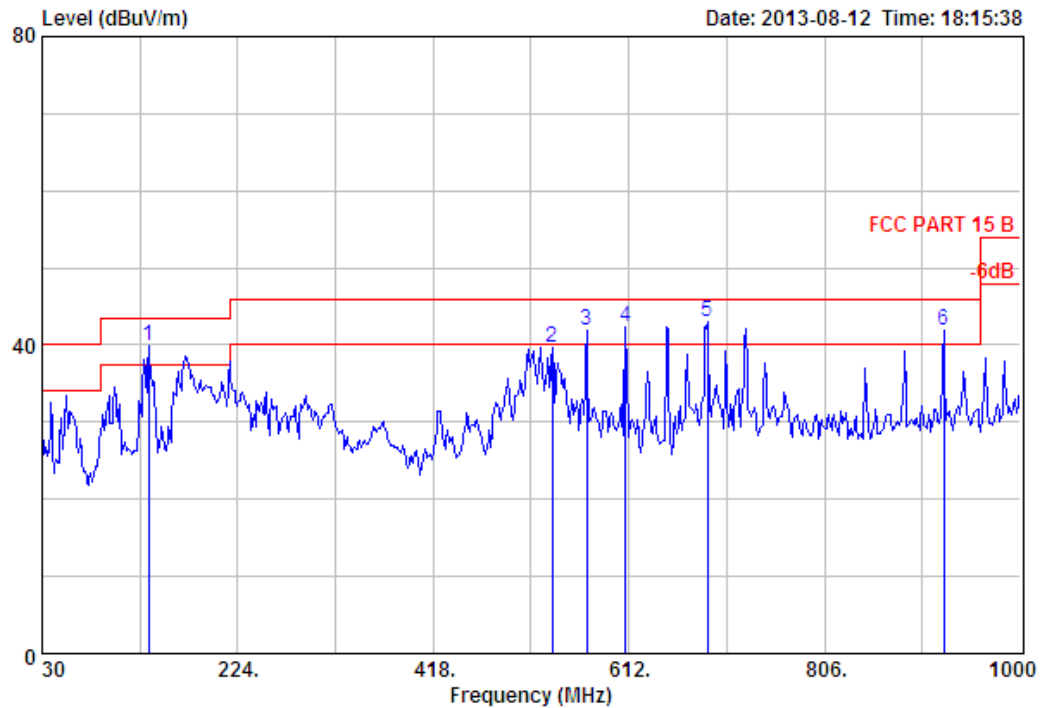


Site no. : 3m Chamber Data no. : 384
 Dis. / Ant. : 3m 27137 Ant. pol. : VERTICAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : GFSK TX 2441MHz
 Adapter 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Reamark (dB)
1	135.73	11.38	3.60	53.99	39.89	43.50	3.61	Peak
2	536.34	19.01	6.94	42.68	39.56	46.00	6.44	Peak
3	570.29	19.60	7.15	44.44	41.92	46.00	4.08	Peak
4	609.09	19.85	7.44	44.59	42.33	46.00	3.67	Peak
5	689.60	20.36	7.99	44.13	43.12	46.00	2.88	Peak
6	924.34	24.13	9.40	36.90	41.86	46.00	4.14	Peak

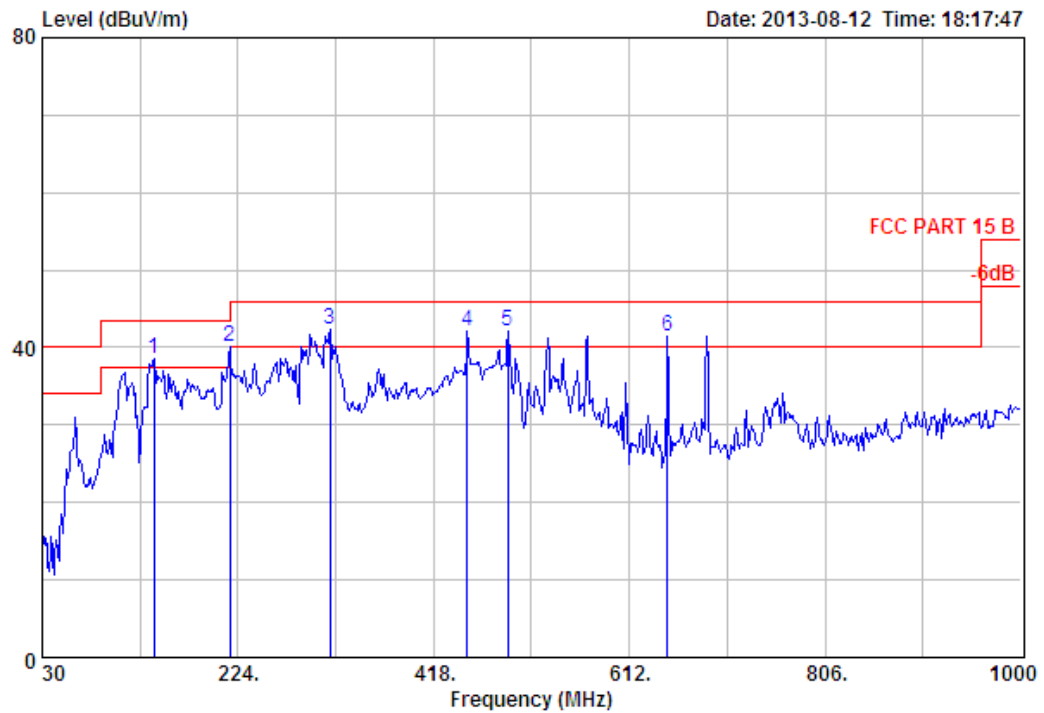


Site no. : 3m Chamber Data no. : 385
 Dis. / Ant. : 3m 27137 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : GFSK TX 2441MHz
 Adapter 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark (dB)
1	140.58	11.40	3.66	52.66	38.63	43.50	4.87	Peak
2	216.24	8.80	4.40	55.85	40.09	46.00	5.91	Peak
3	315.18	13.39	5.33	52.81	42.32	46.00	3.68	Peak
4	450.98	16.51	6.38	48.57	42.15	46.00	3.85	Peak
5	491.72	17.82	6.69	46.62	42.01	46.00	3.99	Peak
6	649.83	20.10	7.62	42.86	41.41	46.00	4.59	Peak

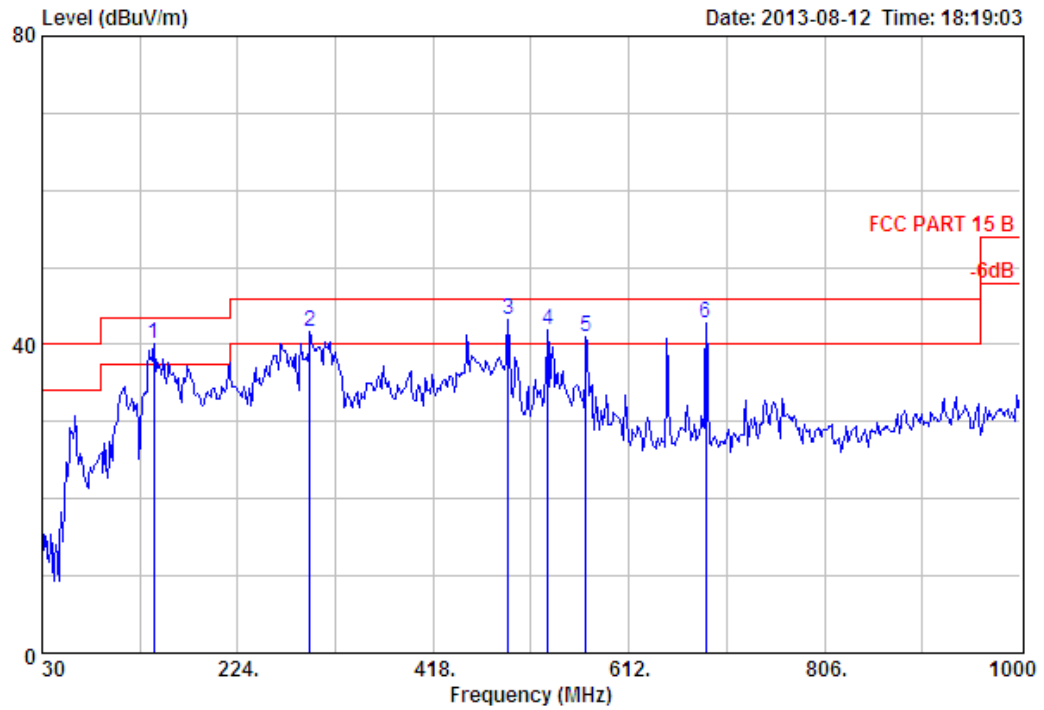


Site no. : 3m Chamber Data no. : 386
 Dis. / Ant. : 3m 27137 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : GFSK TX 2480MHz
 Adapter 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Reamark (dB)
1	140.58	11.40	3.66	54.09	40.06	43.50	3.44	Peak
2	295.78	12.98	5.21	52.61	41.57	46.00	4.43	Peak
3	492.69	17.83	6.69	47.80	43.18	46.00	2.82	Peak
4	531.49	18.45	6.92	45.51	41.80	46.00	4.20	Peak
5	569.32	19.61	7.15	43.58	41.07	46.00	4.93	Peak
6	688.63	20.35	7.98	43.88	42.84	46.00	3.16	Peak

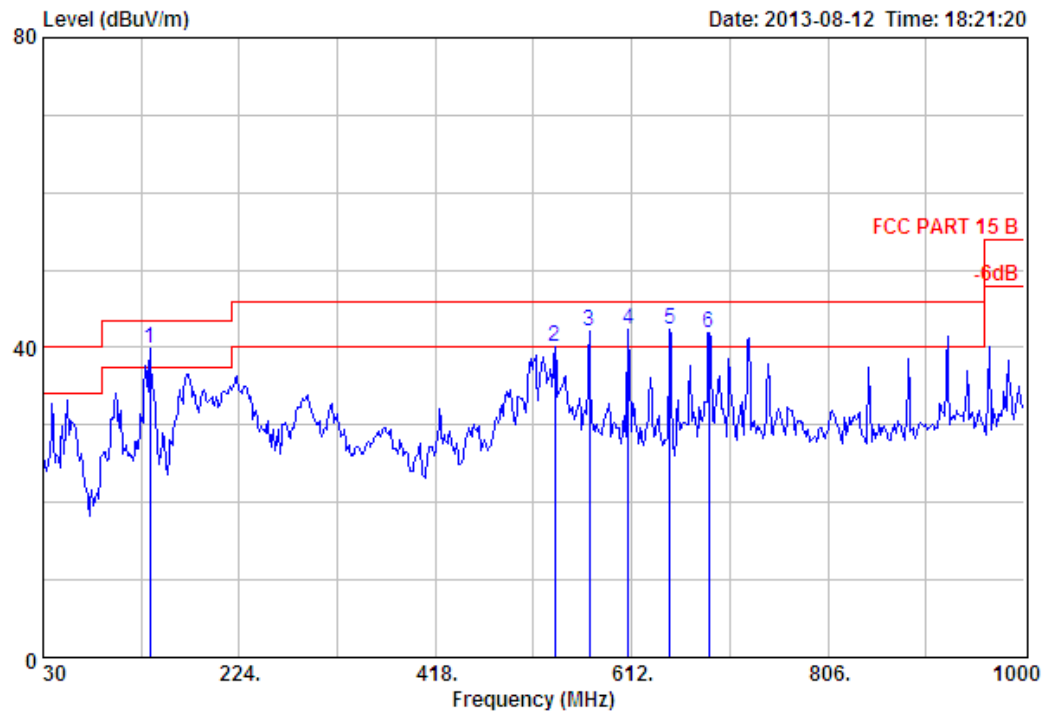


Site no. : 3m Chamber Data no. : 387
 Dis. / Ant. : 3m 27137 Ant. pol. : VERTICAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : GFSK TX 2480MHz
 Adapter 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark (dB)
1	135.73	11.38	3.60	53.88	39.78	43.50	3.72	Peak
2	536.34	19.01	6.94	43.27	40.15	46.00	5.85	Peak
3	570.29	19.60	7.15	44.70	42.18	46.00	3.82	Peak
4	609.09	19.85	7.44	44.63	42.37	46.00	3.63	Peak
5	649.83	20.10	7.62	43.78	42.33	46.00	3.67	Peak
6	688.63	20.35	7.98	42.99	41.95	46.00	4.05	Peak

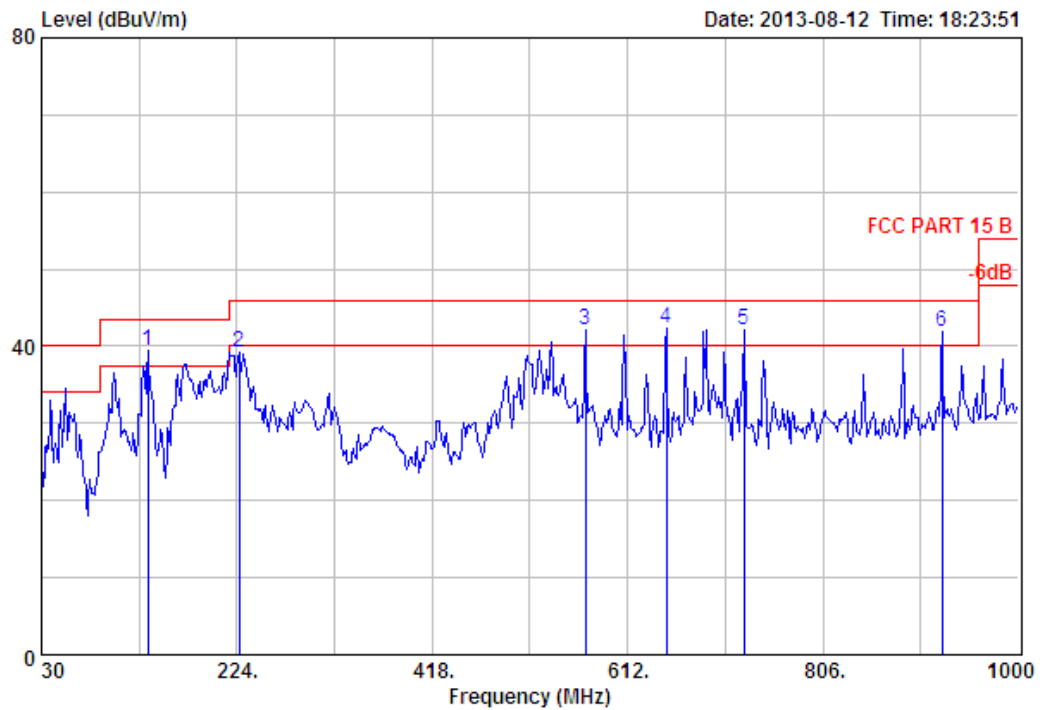


Site no. : 3m Chamber Data no. : 388
 Dis. / Ant. : 3m 27137 Ant. pol. : VERTICAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : 8-DPSK TX 2402MHz
 Adapter 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Reamark (dB)
1	135.73	11.38	3.60	53.43	39.33	43.50	4.17	Peak
2	225.94	9.47	4.51	54.05	39.22	46.00	6.78	Peak
3	570.29	19.60	7.15	44.63	42.11	46.00	3.89	Peak
4	650.80	20.10	7.62	43.82	42.39	46.00	3.61	Peak
5	727.43	21.97	7.82	41.90	42.11	46.00	3.89	Peak
6	924.34	24.13	9.40	36.96	41.92	46.00	4.08	Peak

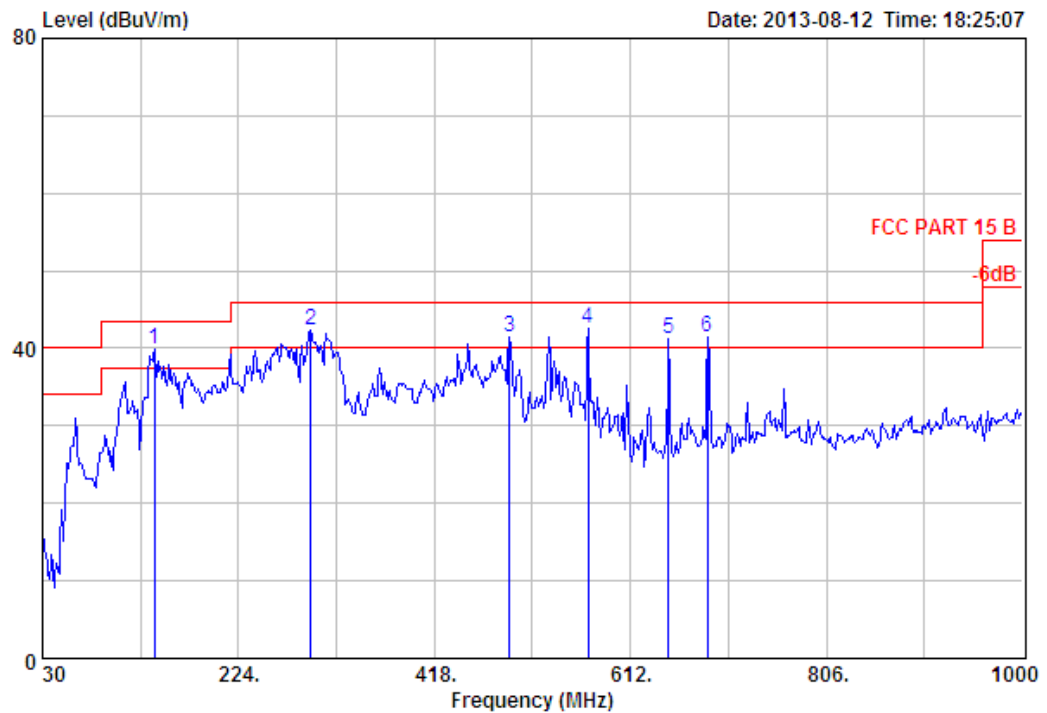


Site no. : 3m Chamber Data no. : 389
 Dis. / Ant. : 3m 27137 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : 8-DPSK TX 2402MHz
 Adapter 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
								(dB)
1	140.58	11.40	3.66	53.91	39.88	43.50	3.62	Peak
2	295.78	12.98	5.21	53.45	42.41	46.00	3.59	Peak
3	492.69	17.83	6.69	46.15	41.53	46.00	4.47	Peak
4	570.29	19.60	7.15	45.05	42.53	46.00	3.47	Peak
5	649.83	20.10	7.62	42.58	41.13	46.00	4.87	Peak
6	688.63	20.35	7.98	42.41	41.37	46.00	4.63	Peak

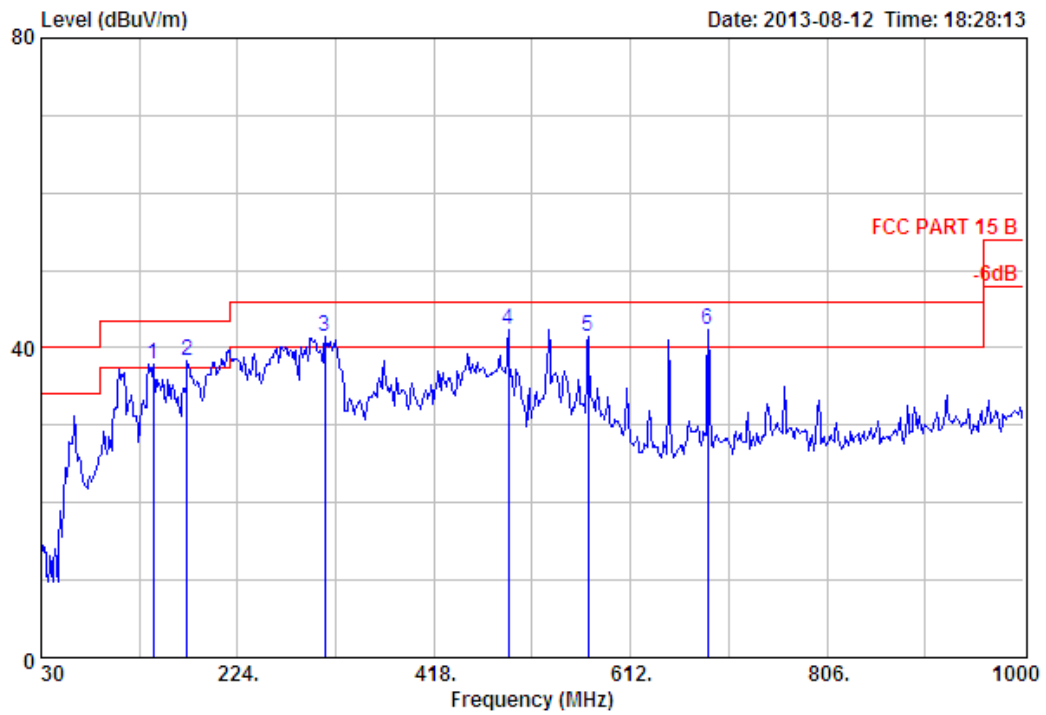


Site no. : 3m Chamber Data no. : 390
 Dis. / Ant. : 3m 27137 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : 8-DPSK TX 2441MHz
 Adapter 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Reamark (dB)
1	140.58	11.40	3.66	51.96	37.93	43.50	5.57	Peak
2	174.53	8.99	4.08	54.40	38.29	43.50	5.21	Peak
3	310.33	13.20	5.32	52.09	41.36	46.00	4.64	Peak
4	491.72	17.82	6.69	46.89	42.28	46.00	3.72	Peak
5	570.29	19.60	7.15	43.88	41.36	46.00	4.64	Peak
6	688.63	20.35	7.98	43.47	42.43	46.00	3.57	Peak

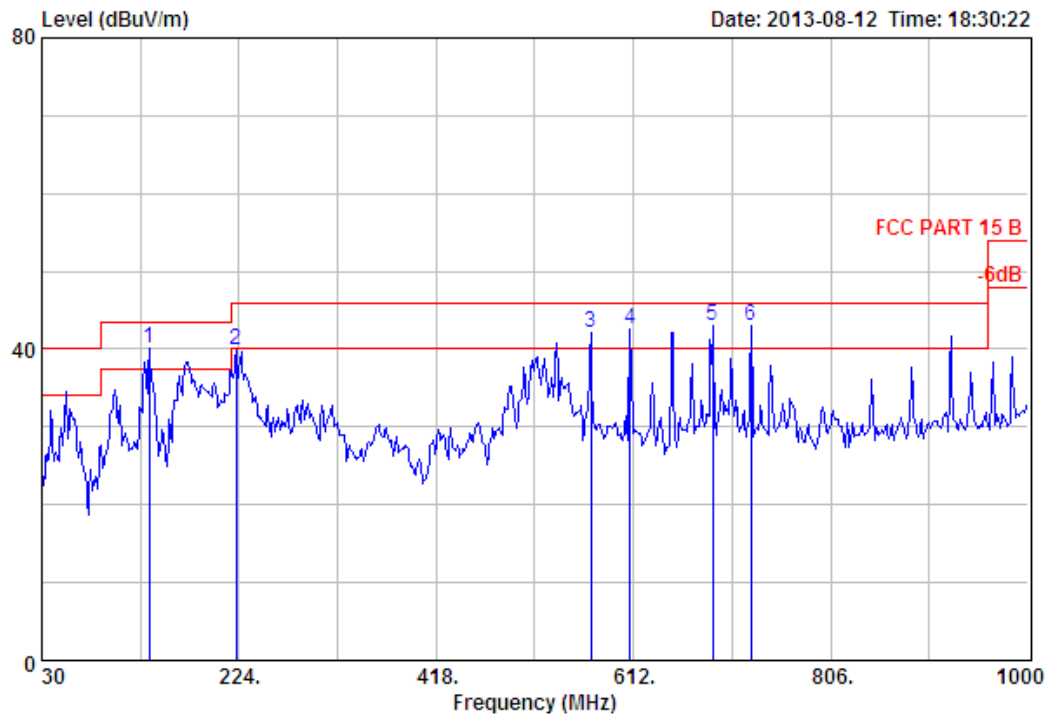


Site no. : 3m Chamber Data no. : 391
 Dis. / Ant. : 3m 27137 Ant. pol. : VERTICAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : 8-DPSK TX 2441MHz
 Adapter 1

	Freq.	Ant.	Cable		Emission			
	(MHz)	Factor	Loss	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	(dB)
1	135.73	11.38	3.60	54.23	40.13	43.50	3.37	Peak
2	221.09	9.26	4.45	55.03	39.89	46.00	6.11	Peak
3	570.29	19.60	7.15	44.61	42.09	46.00	3.91	Peak
4	609.09	19.85	7.44	44.84	42.58	46.00	3.42	Peak
5	689.60	20.36	7.99	43.93	42.92	46.00	3.08	Peak
6	727.43	21.97	7.82	42.78	42.99	46.00	3.01	Peak

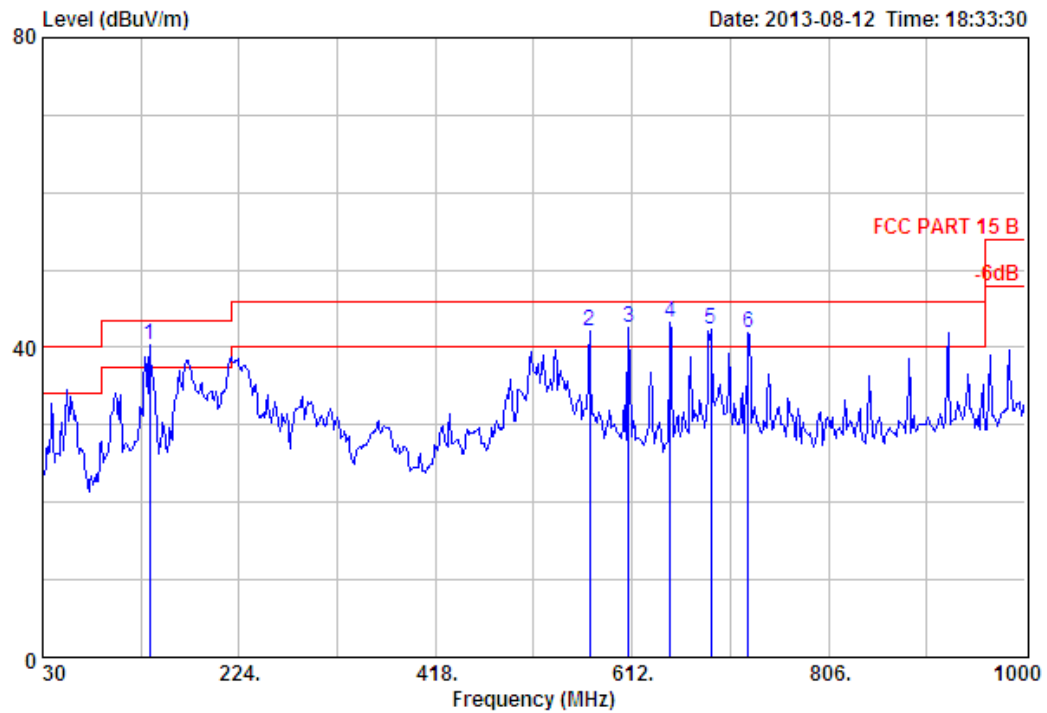


Site no. : 3m Chamber Data no. : 392
 Dis. / Ant. : 3m 27137 Ant. pol. : VERTICAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : 8-DPSK TX 2480MHz
 Adapter 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission		Margin	Remark
					Level (dBuV/m)	Limits (dBuV/m)		
1	135.73	11.38	3.60	54.42	40.32	43.50	3.18	Peak
2	570.29	19.60	7.15	44.56	42.04	46.00	3.96	Peak
3	609.09	19.85	7.44	44.92	42.66	46.00	3.34	Peak
4	649.83	20.10	7.62	44.58	43.13	46.00	2.87	Peak
5	689.60	20.36	7.99	43.29	42.28	46.00	3.72	Peak
6	726.46	21.91	7.82	41.63	41.84	46.00	4.16	Peak

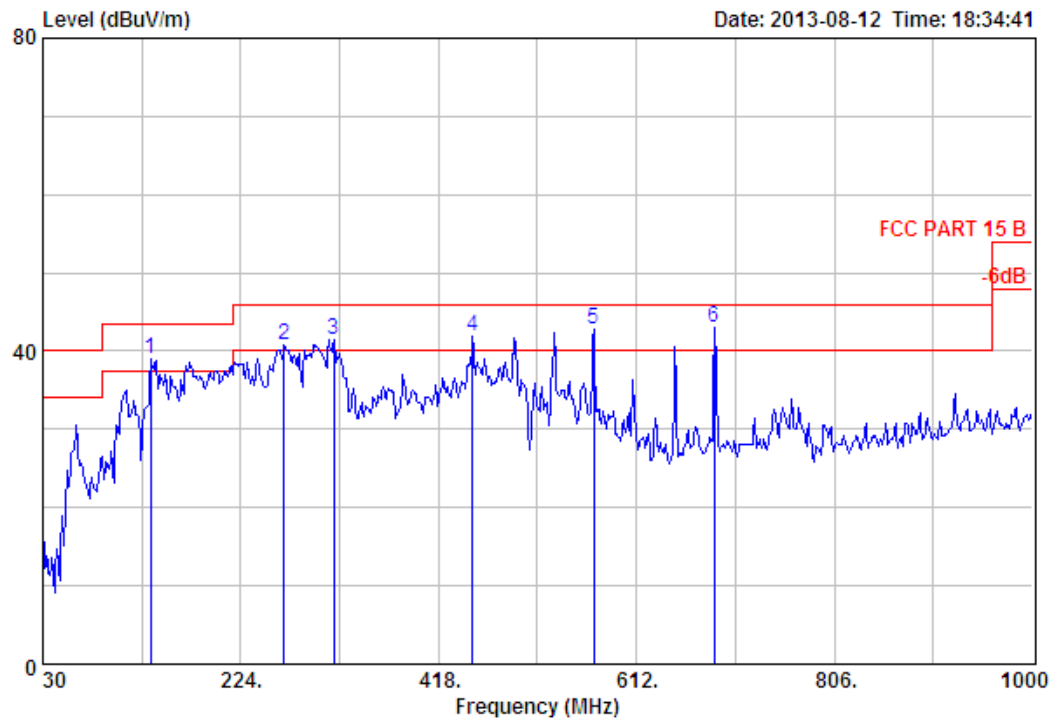


Site no. : 3m Chamber Data no. : 393
 Dis. / Ant. : 3m 27137 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : 8-DPSK TX 2480MHz
 Adapter 1

	Freq.	Ant.	Cable		Emission			
	(MHz)	Factor	Loss	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	(dB)
1	135.73	11.38	3.60	53.05	38.95	43.50	4.55	Peak
2	266.68	12.79	5.00	52.02	40.70	46.00	5.30	Peak
3	315.18	13.39	5.33	52.00	41.51	46.00	4.49	Peak
4	450.98	16.51	6.38	48.31	41.89	46.00	4.11	Peak
5	570.29	19.60	7.15	45.27	42.75	46.00	3.25	Peak
6	688.63	20.35	7.98	44.14	43.10	46.00	2.90	Peak

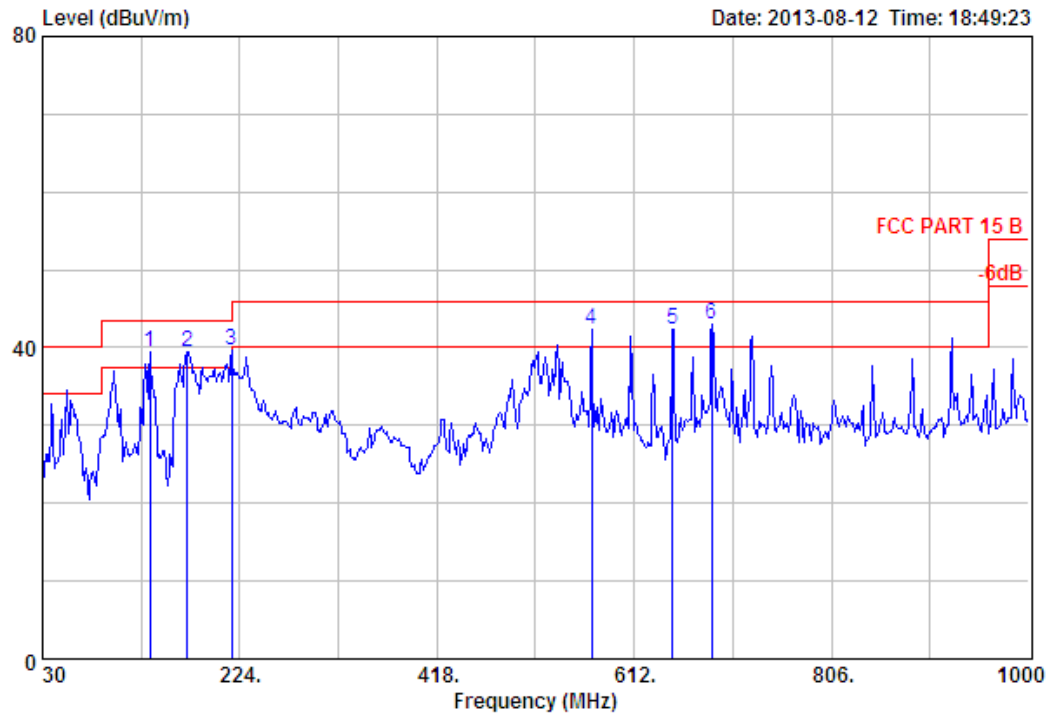


Site no. : 3m Chamber Data no. : 400
 Dis. / Ant. : 3m 27137 Ant. pol. : VERTICAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : GFSK TX 2402MHz
 Adapter 2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Reamark (dB)
1	135.73	11.38	3.60	53.55	39.45	43.50	4.05	Peak
2	172.59	9.07	4.05	55.53	39.46	43.50	4.04	Peak
3	216.24	8.80	4.40	55.41	39.65	46.00	6.35	Peak
4	570.29	19.60	7.15	44.82	42.30	46.00	3.70	Peak
5	649.83	20.10	7.62	43.83	42.38	46.00	3.62	Peak
6	688.63	20.35	7.98	43.99	42.95	46.00	3.05	Peak

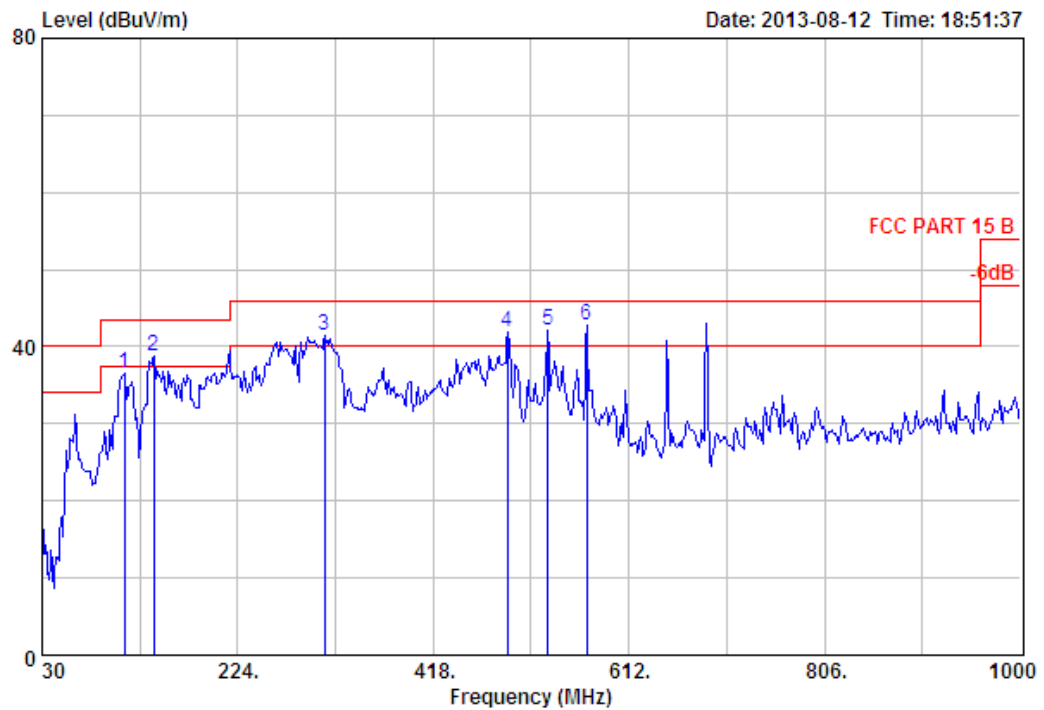


Site no. : 3m Chamber Data no. : 401
 Dis. / Ant. : 3m 27137 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : GFSK TX 2402MHz
 Adapter 2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Reamark (dB)
1	111.48	10.60	3.22	51.65	36.51	43.50	6.99	Peak
2	140.58	11.40	3.66	52.77	38.74	43.50	4.76	Peak
3	310.33	13.20	5.32	52.08	41.35	46.00	4.65	Peak
4	491.72	17.82	6.69	46.56	41.95	46.00	4.05	Peak
5	531.49	18.45	6.92	45.92	42.21	46.00	3.79	Peak
6	570.29	19.60	7.15	45.33	42.81	46.00	3.19	Peak

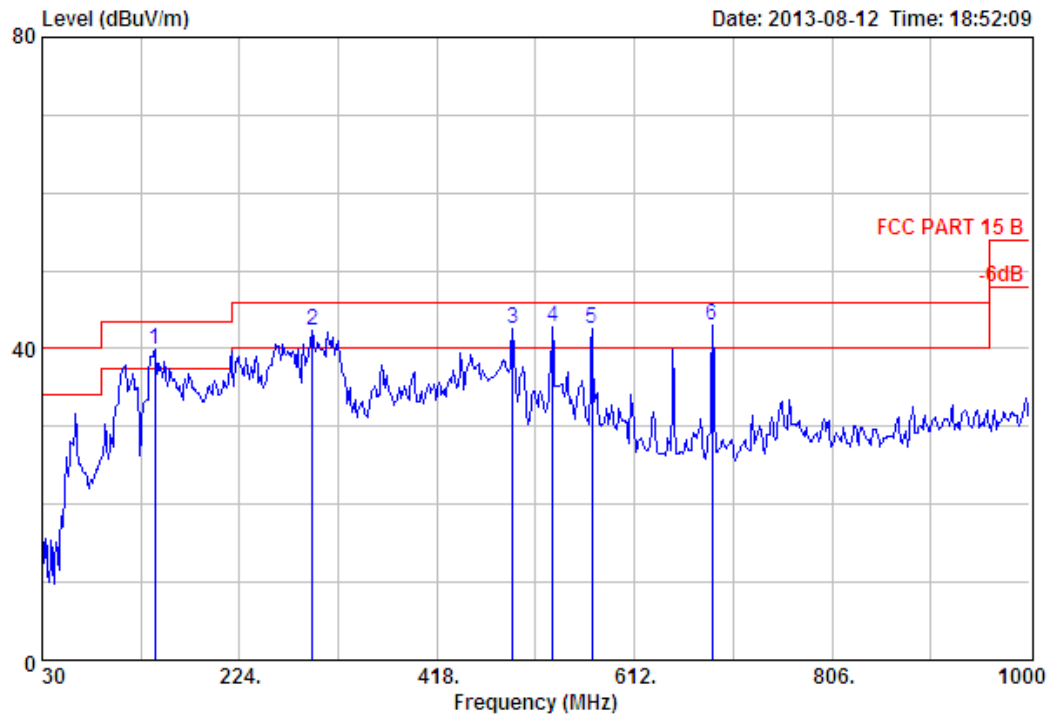


Site no. : 3m Chamber Data no. : 402
 Dis. / Ant. : 3m 27137 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : GFSK TX 2441MHz
 Adapter 2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Reamark (dB)
1	140.58	11.40	3.66	53.97	39.94	43.50	3.56	Peak
2	295.78	12.98	5.21	53.39	42.35	46.00	3.65	Peak
3	492.69	17.83	6.69	47.10	42.48	46.00	3.52	Peak
4	531.49	18.45	6.92	46.59	42.88	46.00	3.12	Peak
5	570.29	19.60	7.15	44.98	42.46	46.00	3.54	Peak
6	688.63	20.35	7.98	44.10	43.06	46.00	2.94	Peak

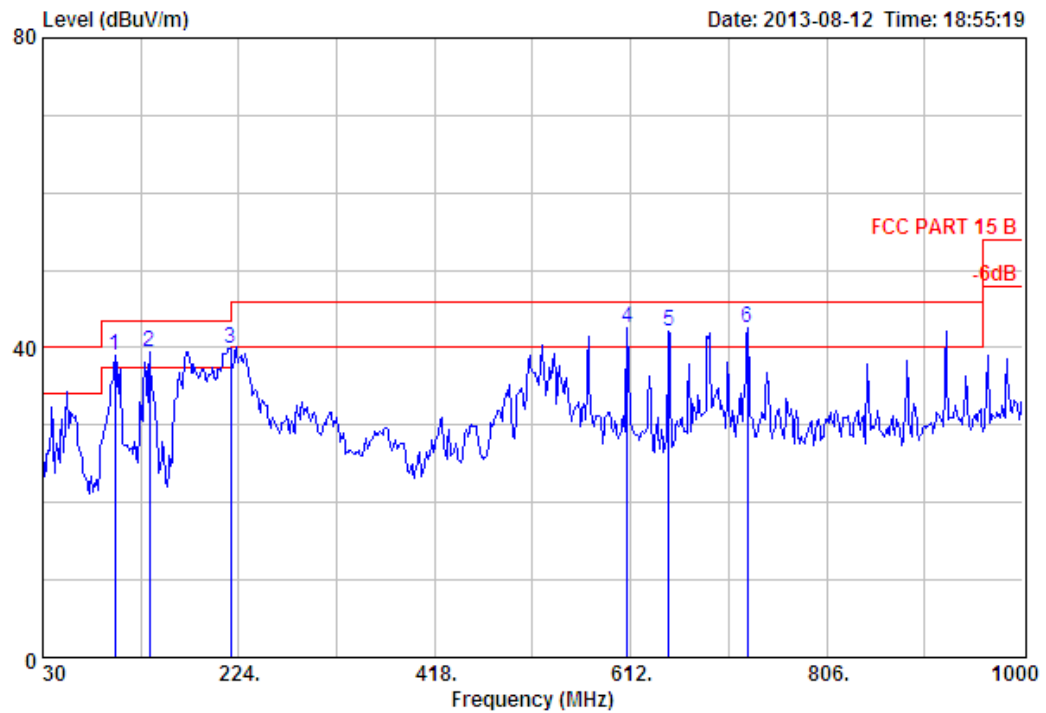


Site no. : 3m Chamber Data no. : 403
 Dis. / Ant. : 3m 27137 Ant. pol. : VERTICAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : GFSK TX 2441MHz
 Adapter 2

	Freq.	Ant.	Cable		Emission			
	(MHz)	Factor	Loss	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	(dB)
1	101.78	9.65	3.07	55.37	39.09	43.50	4.41	Peak
2	135.73	11.38	3.60	53.54	39.44	43.50	4.06	Peak
3	216.24	8.80	4.40	55.68	39.92	46.00	6.08	Peak
4	609.09	19.85	7.44	44.80	42.54	46.00	3.46	Peak
5	649.83	20.10	7.62	43.63	42.18	46.00	3.82	Peak
6	727.43	21.97	7.82	42.33	42.54	46.00	3.46	Peak

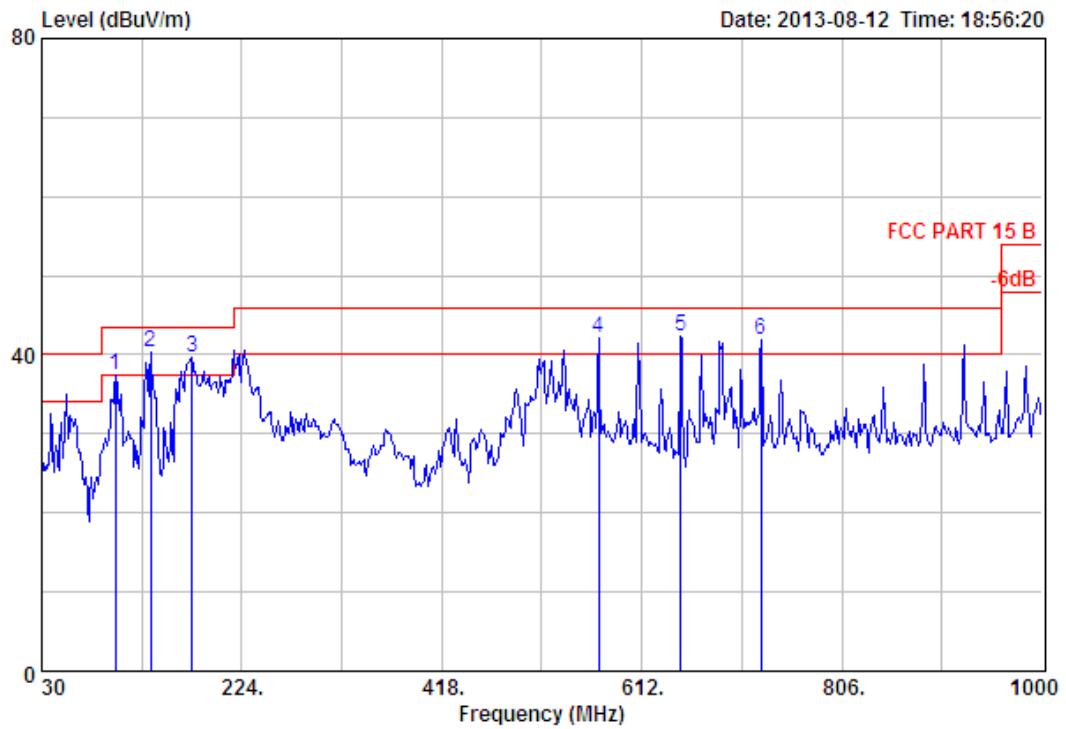


Site no. : 3m Chamber Data no. : 404
 Dis. / Ant. : 3m 27137 Ant. pol. : VERTICAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : GFSK TX 2480MHz
 Adapter 2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Reamark (dB)
1	101.78	9.65	3.07	53.78	37.50	43.50	6.00	Peak
2	135.73	11.38	3.60	54.49	40.39	43.50	3.11	Peak
3	175.50	8.98	4.10	55.68	39.58	43.50	3.92	Peak
4	570.29	19.60	7.15	44.65	42.13	46.00	3.87	Peak
5	649.83	20.10	7.62	43.88	42.43	46.00	3.57	Peak
6	727.43	21.97	7.82	41.65	41.86	46.00	4.14	Peak

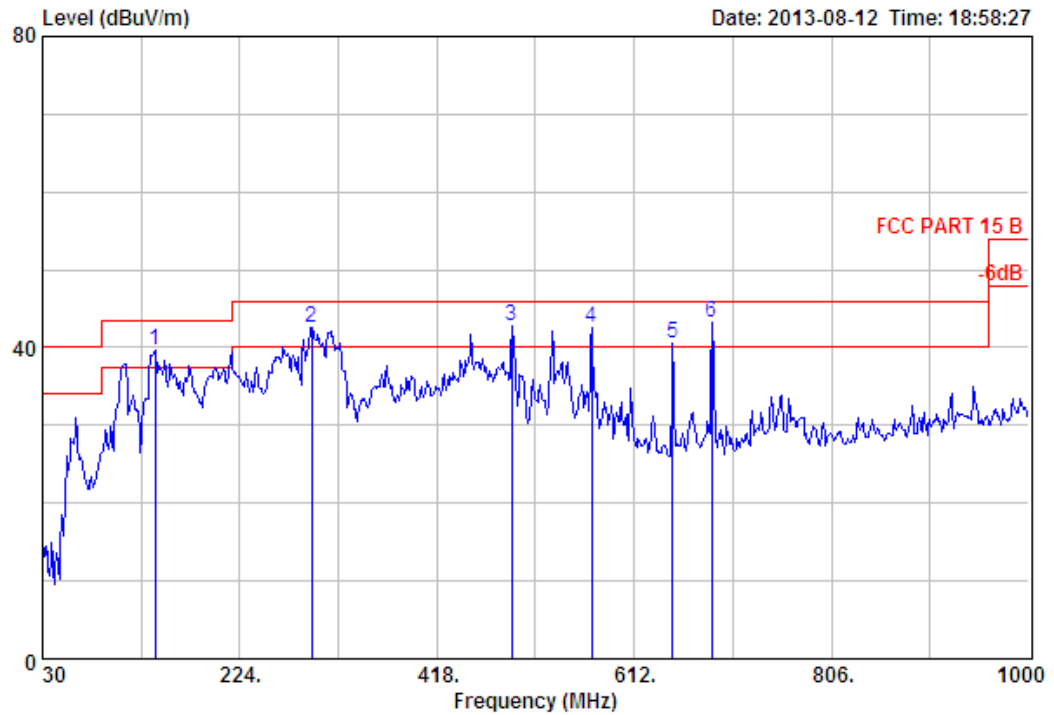


Site no. : 3m Chamber Data no. : 405
 Dis. / Ant. : 3m 27137 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : GFSK TX 2480MHz
 Adapter 2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Reamark (dB)
1	140.58	11.40	3.66	53.75	39.72	43.50	3.78	Peak
2	294.81	12.97	5.21	53.56	42.52	46.00	3.48	Peak
3	491.72	17.82	6.69	47.35	42.74	46.00	3.26	Peak
4	570.29	19.60	7.15	45.09	42.57	46.00	3.43	Peak
5	649.83	20.10	7.62	41.95	40.50	46.00	5.50	Peak
6	688.63	20.35	7.98	44.31	43.27	46.00	2.73	Peak

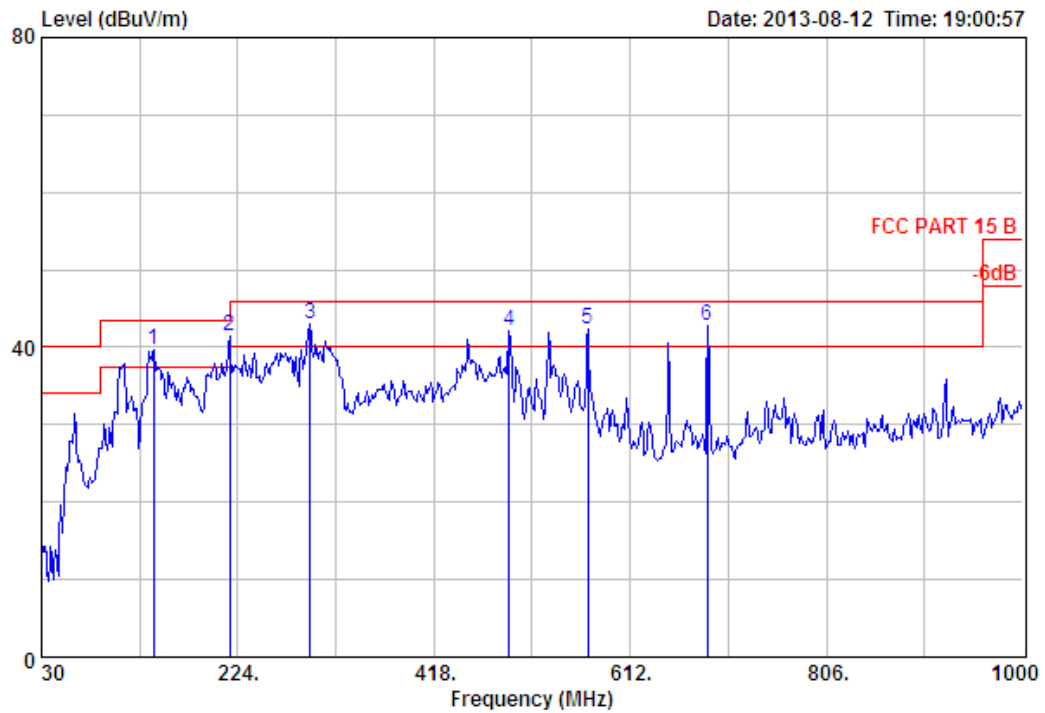


Site no. : 3m Chamber Data no. : 406
 Dis. / Ant. : 3m 27137 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : 8-DPSK TX 2402MHz
 Adapter 2

	Freq.	Ant.	Cable	Emission				
	(MHz)	Factor	Loss	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	(dB)
1	140.58	11.40	3.66	53.79	39.76	43.50	3.74	Peak
2	216.24	8.80	4.40	57.14	41.38	46.00	4.62	Peak
3	295.78	12.98	5.21	54.05	43.01	46.00	2.99	Peak
4	492.69	17.83	6.69	46.84	42.22	46.00	3.78	Peak
5	570.29	19.60	7.15	44.82	42.30	46.00	3.70	Peak
6	688.63	20.35	7.98	43.77	42.73	46.00	3.27	Peak

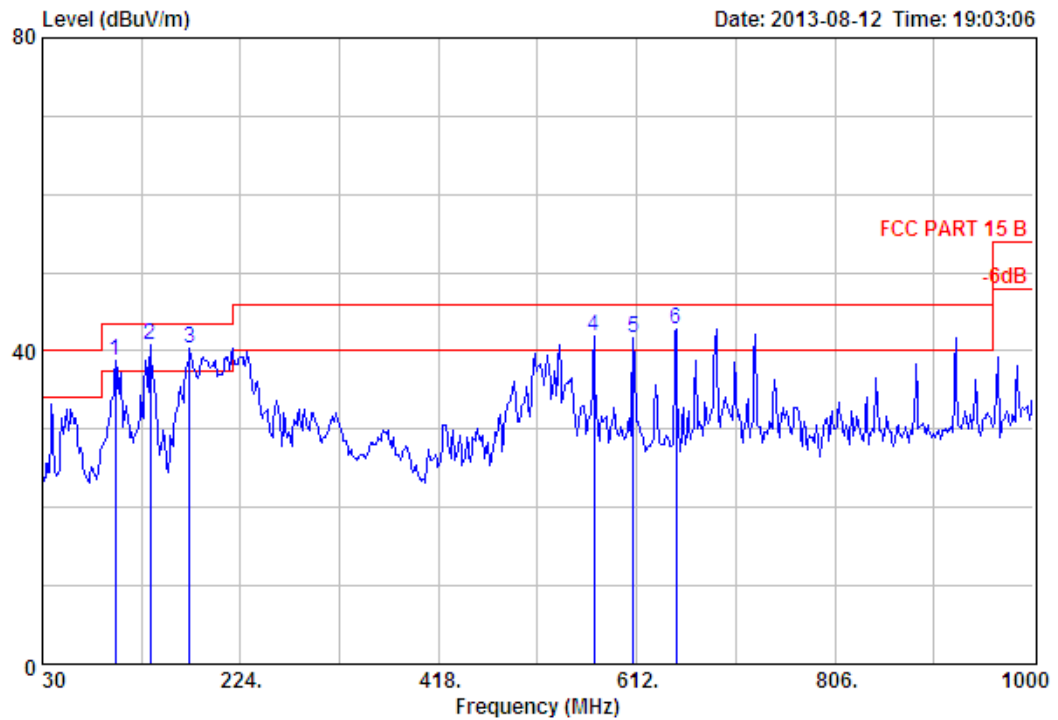


Site no. : 3m Chamber Data no. : 407
 Dis. / Ant. : 3m 27137 Ant. pol. : VERTICAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : 8-DPSK TX 2402MHz
 Adapter 2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Reamark (dB)
1	101.78	9.65	3.07	55.10	38.82	43.50	4.68	Peak
2	135.73	11.38	3.60	54.83	40.73	43.50	2.77	Peak
3	174.53	8.99	4.08	56.36	40.25	43.50	3.25	Peak
4	570.29	19.60	7.15	44.34	41.82	46.00	4.18	Peak
5	609.09	19.85	7.44	43.84	41.58	46.00	4.42	Peak
6	650.80	20.10	7.62	44.16	42.73	46.00	3.27	Peak

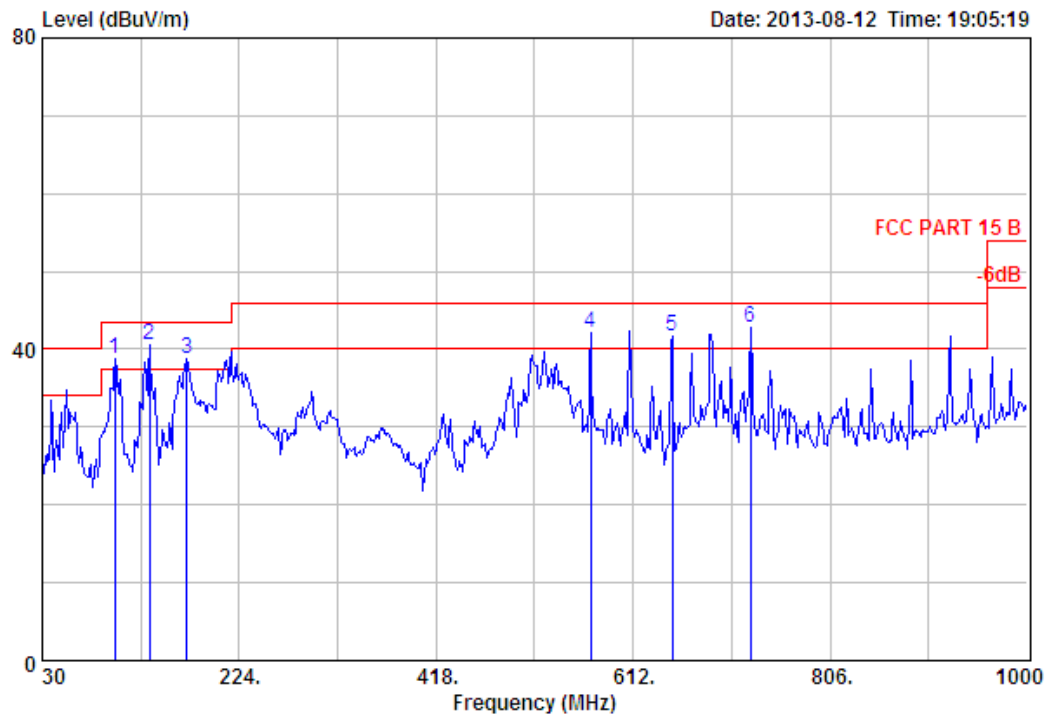


Site no. : 3m Chamber Data no. : 408
 Dis. / Ant. : 3m 27137 Ant. pol. : VERTICAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : 8-DPSK TX 2441MHz
 Adapter 2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	101.78	9.65	3.07	54.99	38.71	43.50	4.79	Peak
2	135.73	11.38	3.60	54.56	40.46	43.50	3.04	Peak
3	172.59	9.07	4.05	54.78	38.71	43.50	4.79	Peak
4	570.29	19.60	7.15	44.72	42.20	46.00	3.80	Peak
5	650.80	20.10	7.62	43.09	41.66	46.00	4.34	Peak
6	727.43	21.97	7.82	42.56	42.77	46.00	3.23	Peak

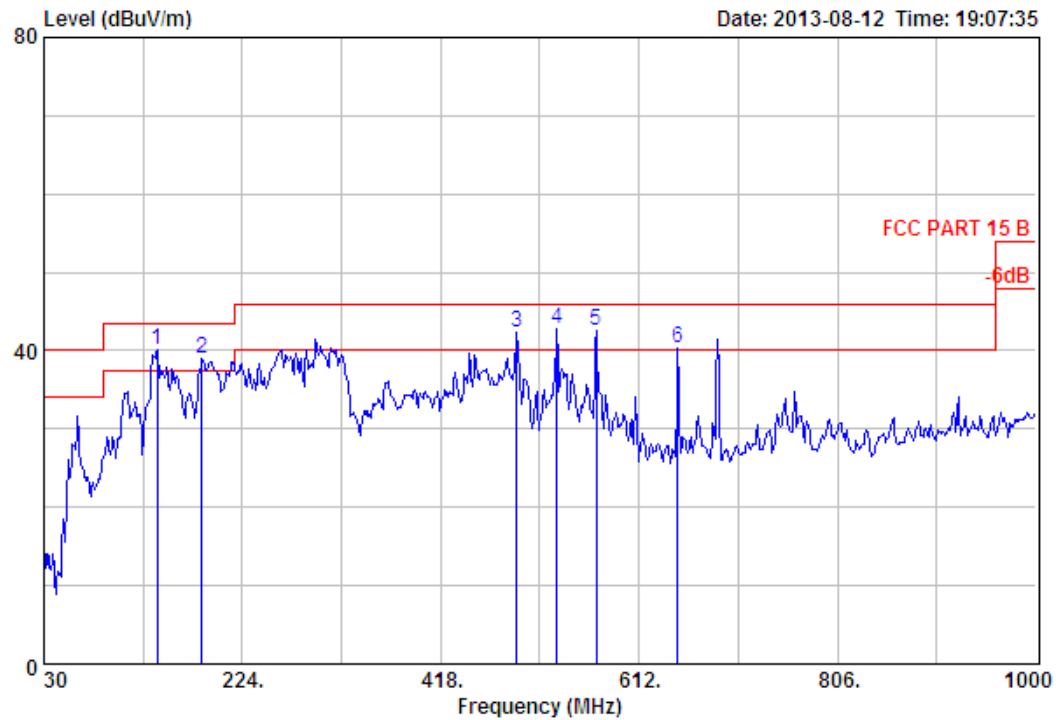


Site no. : 3m Chamber Data no. : 409
 Dis. / Ant. : 3m 27137 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : 8-DPSK TX 2441MHz
 Adapter 2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Reamark (dB)
1	140.58	11.40	3.66	54.20	40.17	43.50	3.33	Peak
2	184.23	8.57	4.18	55.41	38.90	43.50	4.60	Peak
3	492.69	17.83	6.69	46.95	42.33	46.00	3.67	Peak
4	531.49	18.45	6.92	46.49	42.78	46.00	3.22	Peak
5	570.29	19.60	7.15	44.98	42.46	46.00	3.54	Peak
6	649.83	20.10	7.62	41.82	40.37	46.00	5.63	Peak

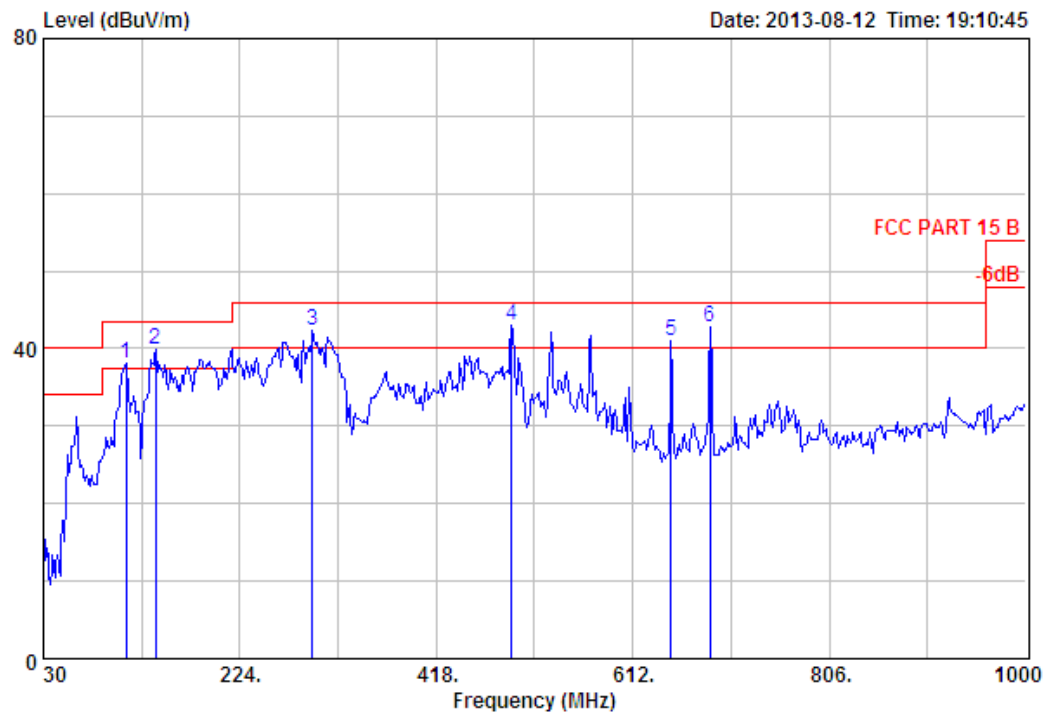

Site no. : 3m Chamber Data no. : 410
 Dis. / Ant. : 3m 27137 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : 8-DPSK TX 2480MHz
 Adapter 2


	Freq.	Ant.	Cable		Emission			
	(MHz)	Factor	Loss	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	(dB)
1	111.48	10.60	3.22	53.17	38.03	43.50	5.47	Peak
2	140.58	11.40	3.66	53.91	39.88	43.50	3.62	Peak
3	295.78	12.98	5.21	53.39	42.35	46.00	3.65	Peak
4	492.69	17.83	6.69	47.55	42.93	46.00	3.07	Peak
5	649.83	20.10	7.62	42.45	41.00	46.00	5.00	Peak
6	688.63	20.35	7.98	43.89	42.85	46.00	3.15	Peak

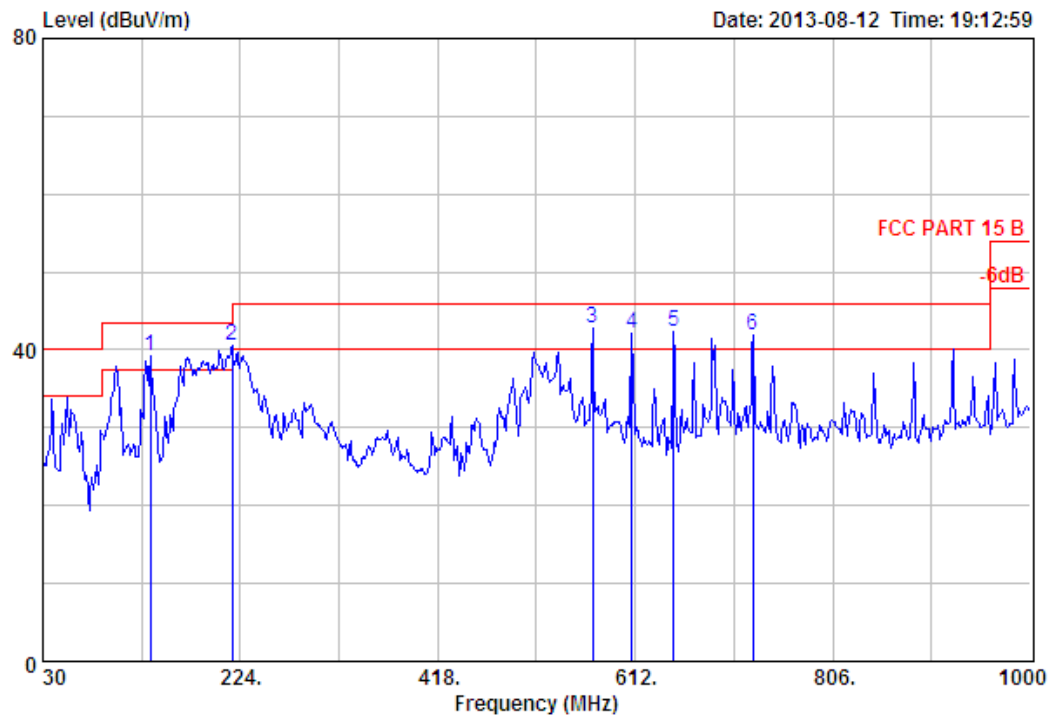

Site no. : 3m Chamber Data no. : 411
 Dis. / Ant. : 3m 27137 Ant. pol. : VERTICAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : 8-DPSK TX 2480MHz
 Adapter 2

	Freq.	Ant.	Cable		Emission			
	(MHz)	Factor	Loss	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	(dB)
1	135.73	11.38	3.60	53.31	39.21	43.50	4.29	Peak
2	216.24	8.80	4.40	56.32	40.56	46.00	5.44	Peak
3	570.29	19.60	7.15	45.25	42.73	46.00	3.27	Peak
4	609.09	19.85	7.44	44.46	42.20	46.00	3.80	Peak
5	649.83	20.10	7.62	43.75	42.30	46.00	3.70	Peak
6	727.43	21.97	7.82	41.63	41.84	46.00	4.16	Peak


1000 MHz – 18000MHz

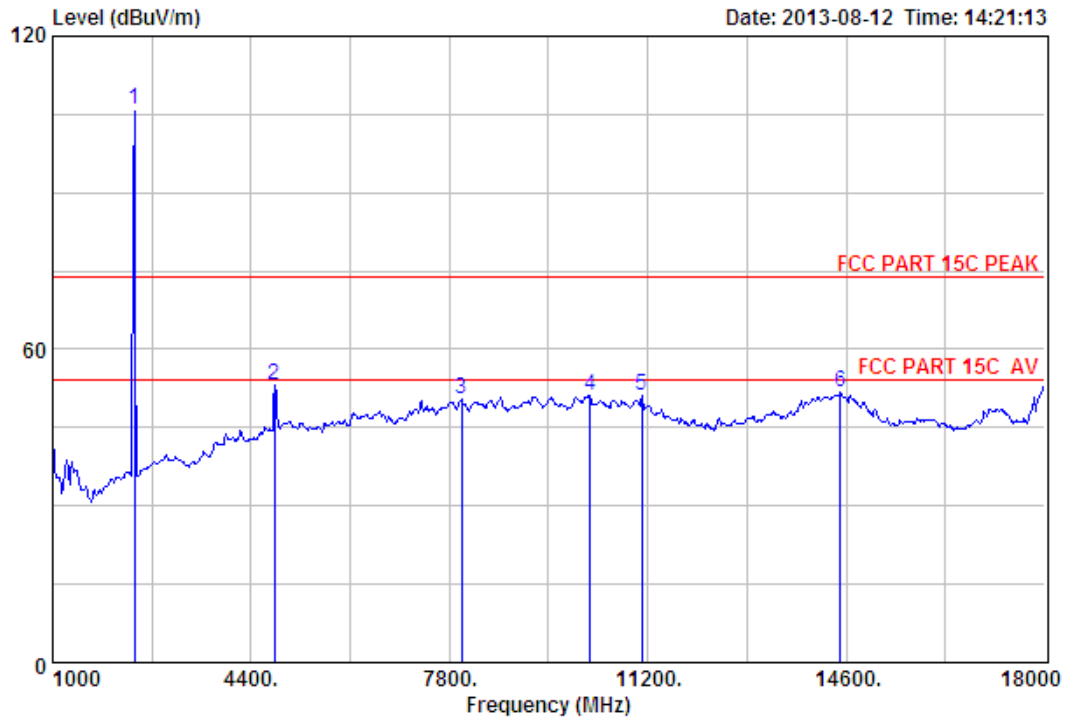

Site no. : 3m Chamber Data no. : 316
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : GFSK TX 2402MHz
 Adapter 1

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2402.00	27.61	6.62	34.18	105.96	106.01	74.00	-32.01	Peak
2	4804.00	31.25	11.77	31.81	41.87	53.08	74.00	20.92	Peak
3	8004.00	37.01	11.40	31.22	33.39	50.58	74.00	23.42	Peak
4	10214.00	38.48	11.47	32.17	33.25	51.03	74.00	22.97	Peak
5	11098.00	39.45	11.22	33.84	34.28	51.11	74.00	22.89	Peak
6	14498.00	41.88	10.93	33.08	32.00	51.73	74.00	22.27	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

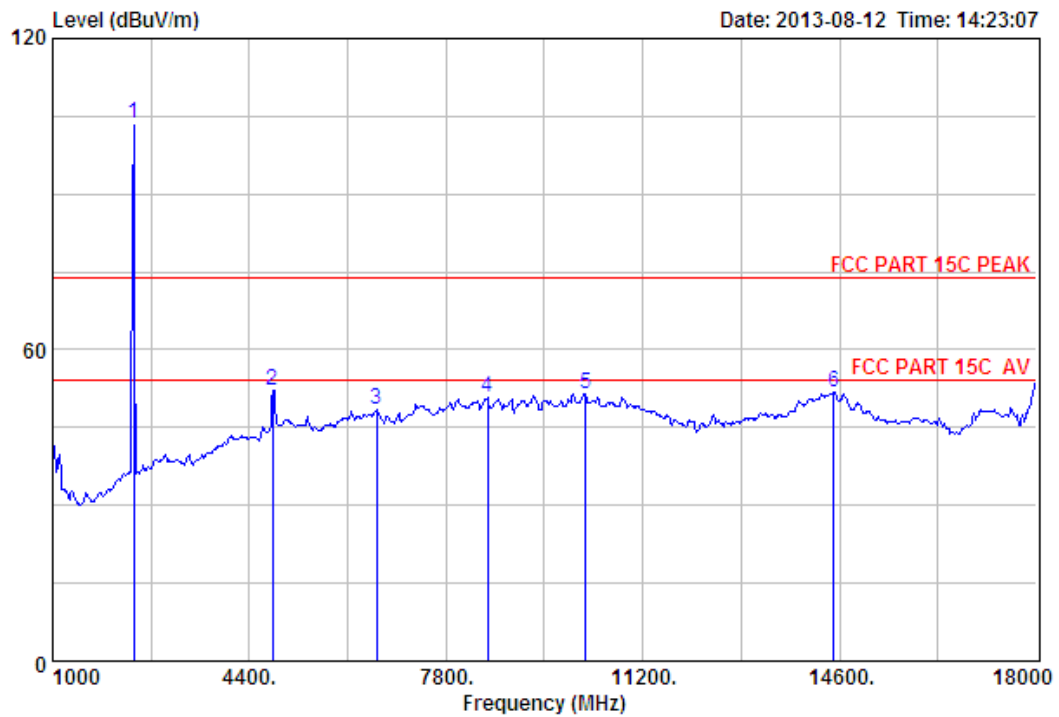

Site no. : 3m Chamber Data no. : 317
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : GFSK TX 2402MHz
 Adapter 1

	Freq. (MHz)	Ant.	Cable	Amp	Emission				Remark
		Factor (dB/m)	Loss (dB)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	
1	2402.00	27.61	6.62	34.18	103.46	103.51	74.00	-29.51	Peak
2	4804.00	31.25	11.77	31.81	41.09	52.30	74.00	21.70	Peak
3	6593.00	34.46	12.10	32.17	34.14	48.53	74.00	25.47	Peak
4	8514.00	36.96	11.45	31.91	34.20	50.70	74.00	23.30	Peak
5	10214.00	38.48	11.47	32.17	33.70	51.48	74.00	22.52	Peak
6	14498.00	41.88	10.93	33.08	32.23	51.96	74.00	22.04	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

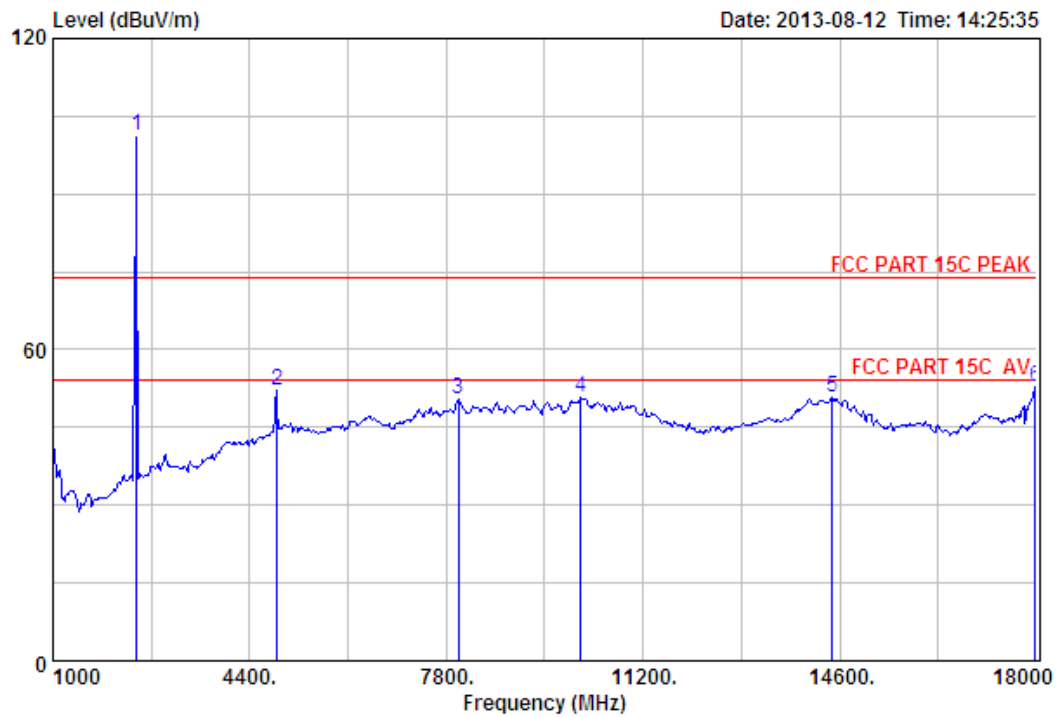

Site no. : 3m Chamber Data no. : 318
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : GFSK TX 2441MHz
 Adapter 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.00	27.60	6.67	34.12	101.21	101.36	74.00	-27.36	Peak
2	4882.00	31.37	12.07	31.90	40.52	52.06	74.00	21.94	Peak
3	8004.00	37.01	11.40	31.22	33.12	50.31	74.00	23.69	Peak
4	10129.00	38.33	11.52	32.01	32.81	50.65	74.00	23.35	Peak
5	14464.00	41.85	10.93	32.96	30.94	50.76	74.00	23.24	Peak
6	17983.00	46.28	11.36	28.32	23.62	52.94	74.00	21.06	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

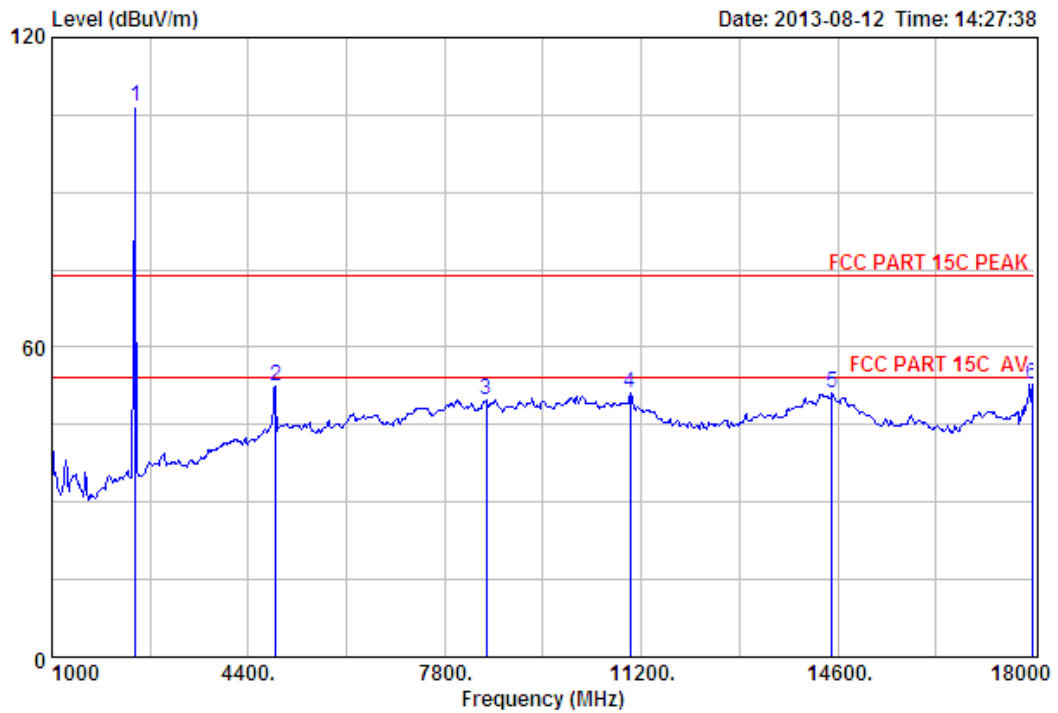

Site no. : 3m Chamber Data no. : 319
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : GFSK TX 2441MHz
 Adapter 1

	Ant.	Cable	Amp	Emission					
Freq.	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark	
(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		
1	2441.00	27.60	6.67	34.12	106.46	106.61	74.00	-32.61	Peak
2	4882.00	31.37	12.07	31.90	41.09	52.63	74.00	21.37	Peak
3	8514.00	36.96	11.45	31.91	33.27	49.77	74.00	24.23	Peak
4	11013.00	39.51	11.28	33.68	34.09	51.20	74.00	22.80	Peak
5	14498.00	41.88	10.93	33.08	31.46	51.19	74.00	22.81	Peak
6	17966.00	46.12	11.34	28.80	24.16	52.82	74.00	21.18	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

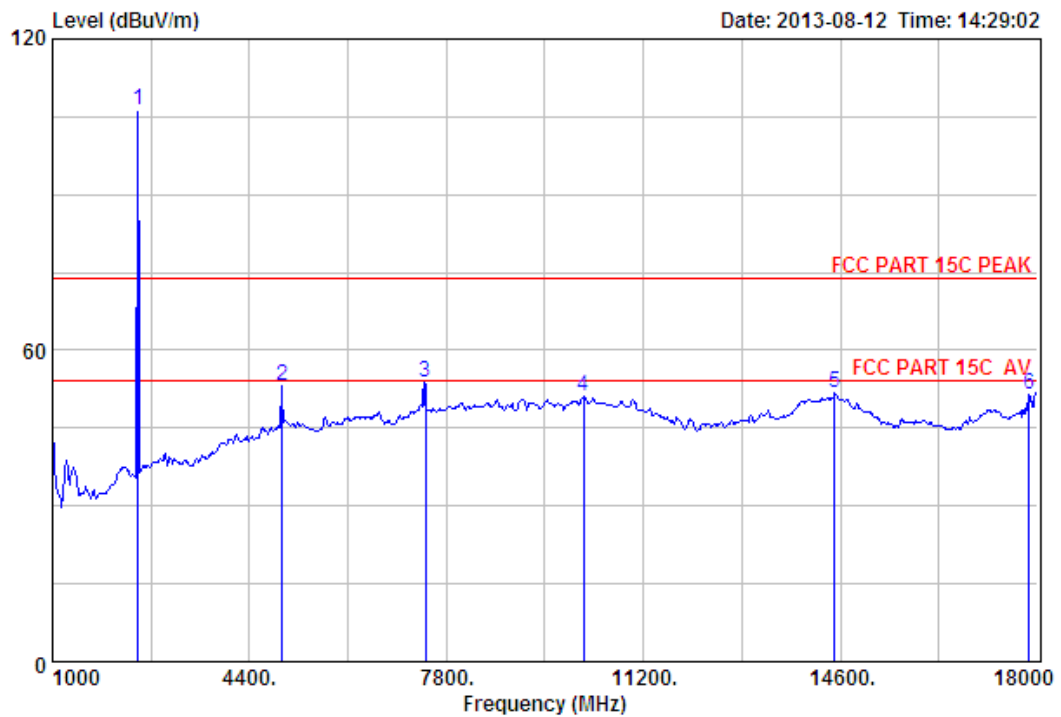

Site no. : 3m Chamber Data no. : 320
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : GFSK TX 2480MHz
 Adapter 1

		Ant.	Cable	Amp	Emission				
	Freq.	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2480.00	27.58	6.71	34.03	105.94	106.20	74.00	-32.20	Peak
2	4960.00	31.49	12.44	31.97	41.09	53.05	74.00	20.95	Peak
3	7440.00	36.54	11.61	31.93	37.67	53.89	74.00	20.11	Peak
4	10163.00	38.39	11.50	32.08	33.46	51.27	74.00	22.73	Peak
5	14498.00	41.88	10.93	33.08	31.96	51.69	74.00	22.31	Peak
6	17864.00	45.12	11.22	31.65	26.75	51.44	74.00	22.56	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

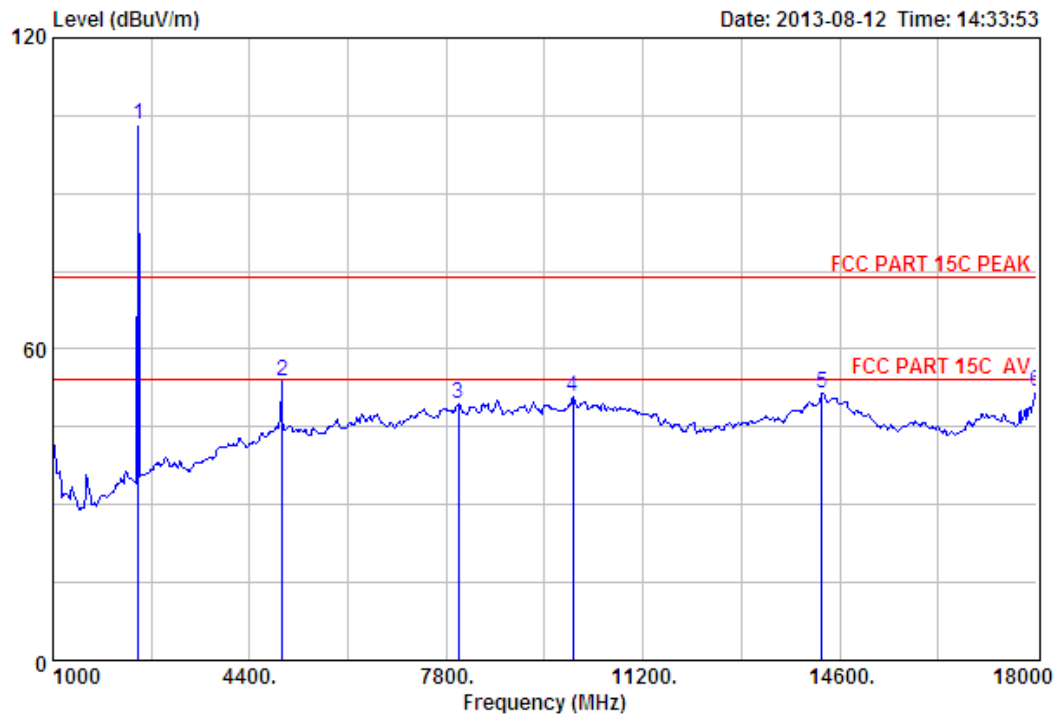

Site no. : 3m Chamber Data no. : 321
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : GFSK TX 2480MHz
 Adapter 1

		Ant.	Cable	Amp	Emission				
	Freq.	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2480.00	27.58	6.71	34.03	103.05	103.31	74.00	-29.31	Peak
2	4960.00	31.49	12.44	31.97	41.99	53.95	74.00	20.05	Peak
3	8004.00	37.01	11.40	31.22	32.28	49.47	74.00	24.53	Peak
4	9993.00	38.12	11.59	31.78	32.89	50.82	74.00	23.18	Peak
5	14294.00	41.71	10.92	33.08	32.00	51.55	74.00	22.45	Peak
6	18000.00	46.45	11.38	27.85	21.82	51.80	74.00	22.20	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

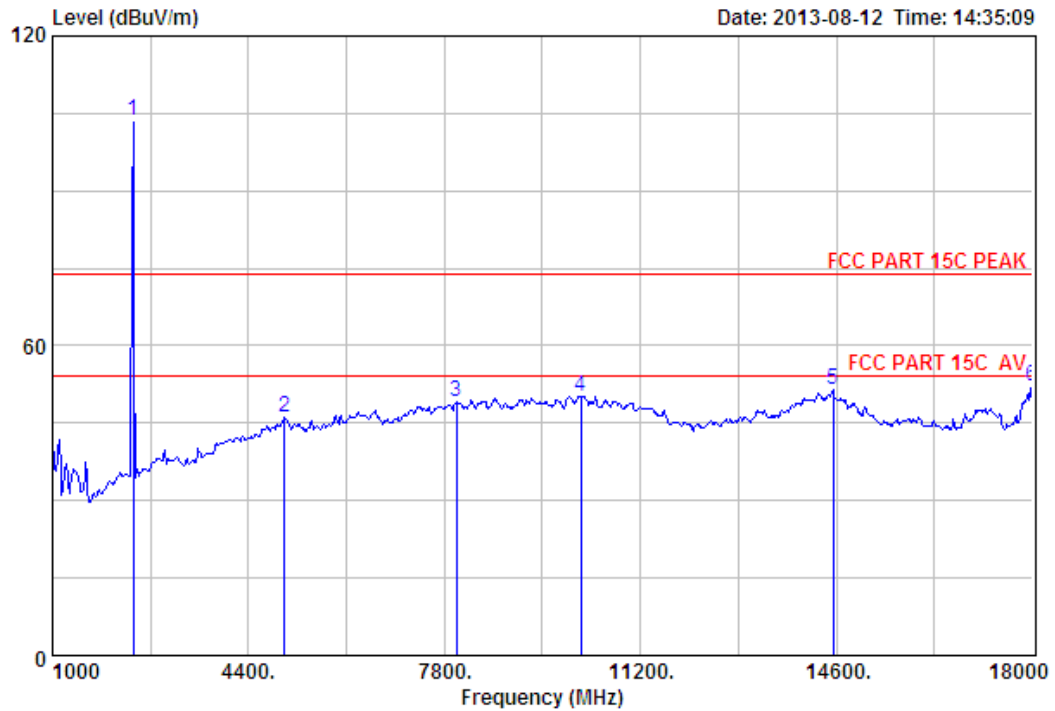

Site no. : 3m Chamber Data no. : 322
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6°;Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : 8-DPSK TX 2402MHz
 Adapter 1

	Ant.	Cable	Amp	Emission					
Freq.	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark	
(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		
1	2402.00	27.61	6.62	34.18	103.57	103.62	74.00	-29.62	Peak
2	5029.00	31.56	12.55	32.06	34.00	46.05	74.00	27.95	Peak
3	8004.00	37.01	11.40	31.22	32.05	49.24	74.00	24.76	Peak
4	10163.00	38.39	11.50	32.08	32.48	50.29	74.00	23.71	Peak
5	14549.00	41.77	10.92	33.26	32.07	51.50	74.00	22.50	Peak
6	18000.00	46.45	11.38	27.85	22.10	52.08	74.00	21.92	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

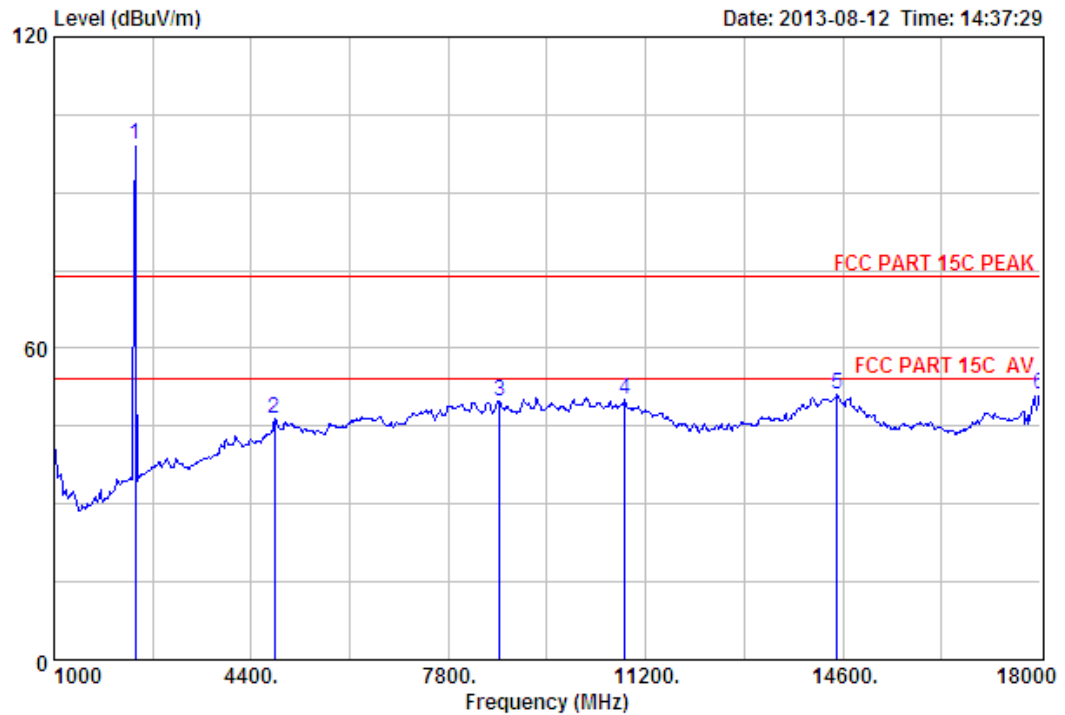

Site no. : 3m Chamber Data no. : 323
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : 8-DPSK TX 2402MHz
 Adapter 1

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission		Limits (dBuV/m)	Margin (dB)	Remark
					Level				
1	27.61	6.62	34.18	99.13	99.18		74.00	-25.18	Peak
2	31.25	11.77	31.81	35.17	46.38		74.00	27.62	Peak
3	37.32	11.45	32.43	33.63	49.97		74.00	24.03	Peak
4	39.35	11.30	33.36	32.78	50.07		74.00	23.93	Peak
5	41.88	10.93	33.08	31.39	51.12		74.00	22.88	Peak
6	46.45	11.38	27.85	21.21	51.19		74.00	22.81	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

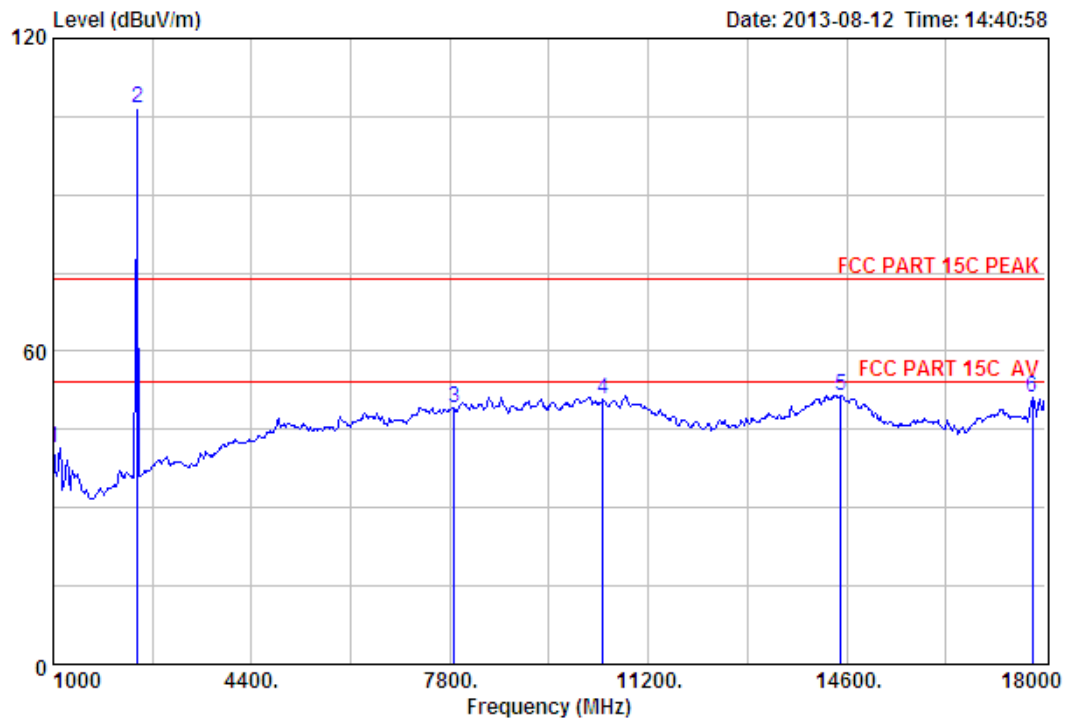

Site no. : 3m Chamber Data no. : 324
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : 8-DPSK TX 2441MHz
 Adapter 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1000.00	24.24	3.44	34.40	48.33	41.61	74.00	32.39	Peak
2	2441.00	27.60	6.67	34.12	106.38	106.53	74.00	-32.53	Peak
3	7868.00	36.74	11.46	31.35	32.29	49.14	74.00	24.86	Peak
4	10418.00	38.83	11.36	32.56	33.22	50.85	74.00	23.15	Peak
5	14498.00	41.88	10.93	33.08	31.80	51.53	74.00	22.47	Peak
6	17779.00	44.28	11.12	34.02	29.76	51.14	74.00	22.86	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

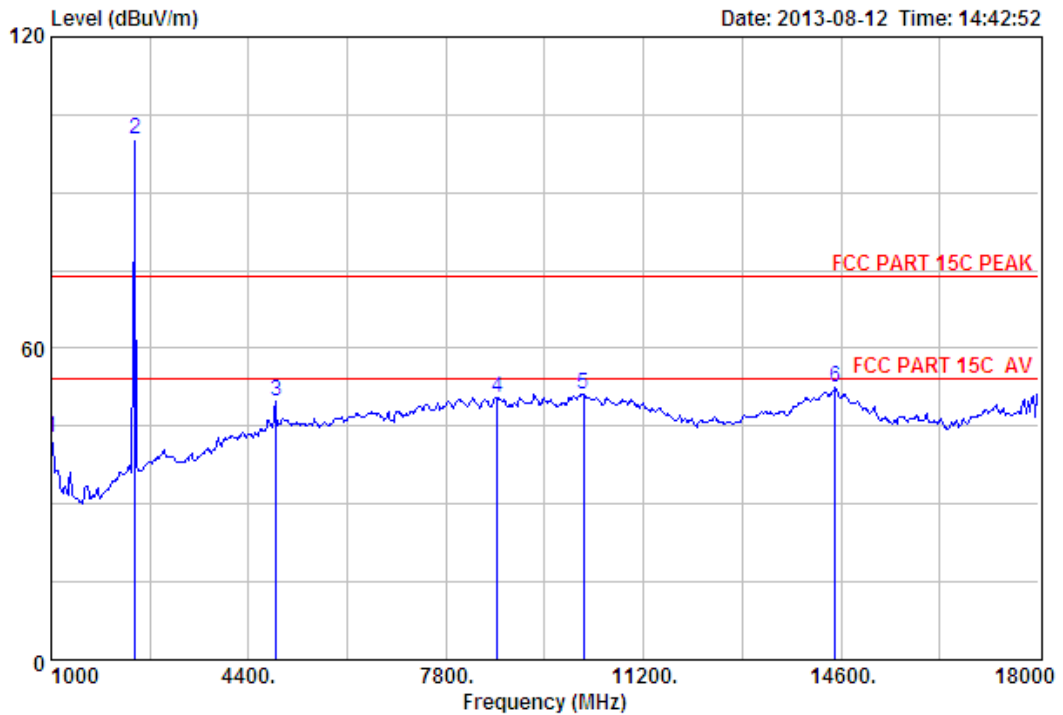

Site no. : 3m Chamber Data no. : 325
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : 8-DPSK TX 2441MHz
 Adapter 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1000.00	24.24	3.44	34.40	49.41	42.69	74.00	31.31	Peak
2	2441.00	27.60	6.67	34.12	100.27	100.42	74.00	-26.42	Peak
3	4882.00	31.37	12.07	31.90	38.31	49.85	74.00	24.15	Peak
4	8684.00	37.32	11.45	32.43	34.29	50.63	74.00	23.37	Peak
5	10163.00	38.39	11.50	32.08	33.37	51.18	74.00	22.82	Peak
6	14498.00	41.88	10.93	33.08	32.61	52.34	74.00	21.66	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

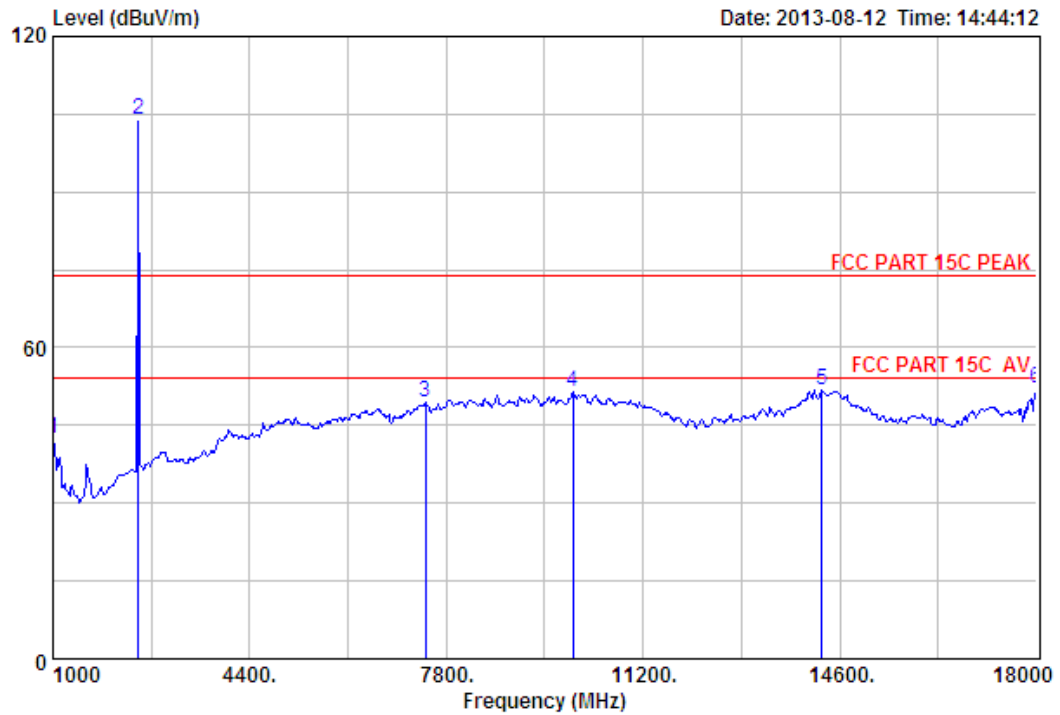

Site no. : 3m Chamber Data no. : 326
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : 8-DPSK TX 2480MHz
 Adapter 1

		Ant.	Cable	Amp	Emission				
Freq.	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark	
(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		
1	1000.00	24.24	3.44	34.40	49.26	42.54	74.00	31.46	Peak
2	2480.00	27.58	6.71	34.03	103.54	103.80	74.00	-29.80	Peak
3	7443.00	36.54	11.61	31.93	33.39	49.61	74.00	24.39	Peak
4	9993.00	38.12	11.59	31.78	33.41	51.34	74.00	22.66	Peak
5	14294.00	41.71	10.92	33.08	32.30	51.85	74.00	22.15	Peak
6	18000.00	46.45	11.38	27.85	22.09	52.07	74.00	21.93	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

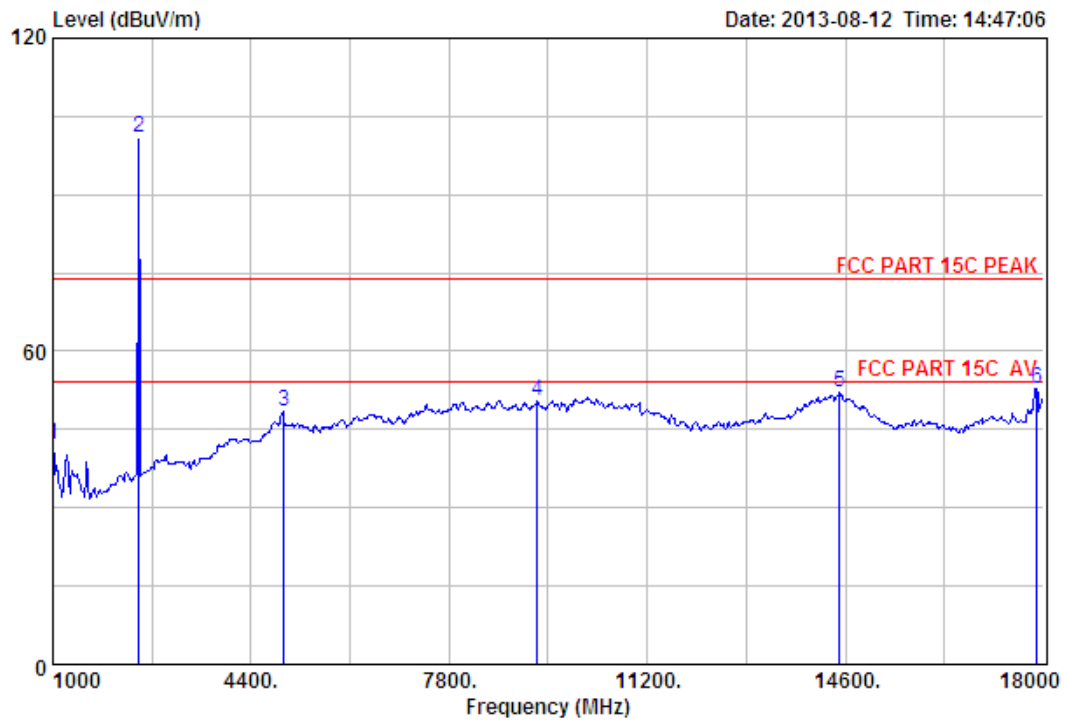

Site no. : 3m Chamber Data no. : 327
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : 8-DPSK TX 2480MHz
 Adapter 1

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	1000.00	24.24	3.44	34.40	48.84	42.12	74.00	31.88	Peak
2	2480.00	27.58	6.71	34.03	100.54	100.80	74.00	-26.80	Peak
3	4960.00	31.49	12.44	31.97	36.42	48.38	74.00	25.62	Peak
4	9313.00	37.94	11.62	32.15	33.22	50.63	74.00	23.37	Peak
5	14498.00	41.88	10.93	33.08	32.44	52.17	74.00	21.83	Peak
6	17881.00	45.28	11.24	31.17	27.31	52.66	74.00	21.34	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

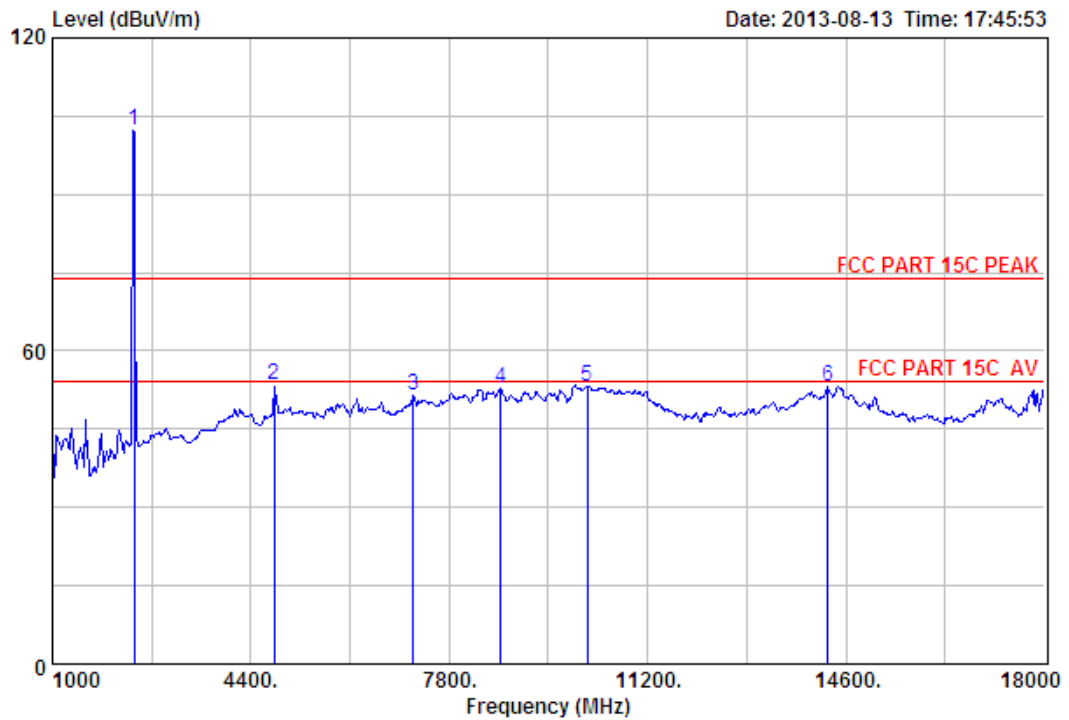

Site no. : 3m Chamber Data no. : 412
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : GFSK TX 2402MHz
 Adapter 2

	Ant.	Cable	Amp	Emission					
Freq.	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark	
(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		
1	27.61	6.62	34.18	102.37	102.42	74.00	-28.42	Peak	
2	31.25	11.77	31.81	42.35	53.56	74.00	20.44	Peak	
3	36.43	11.53	32.14	35.65	51.47	74.00	22.53	Peak	
4	37.32	11.45	32.43	36.55	52.89	74.00	21.11	Peak	
5	38.39	11.50	32.08	35.39	53.20	74.00	20.80	Peak	
6	41.71	10.92	33.08	33.75	53.30	74.00	20.70	Peak	


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

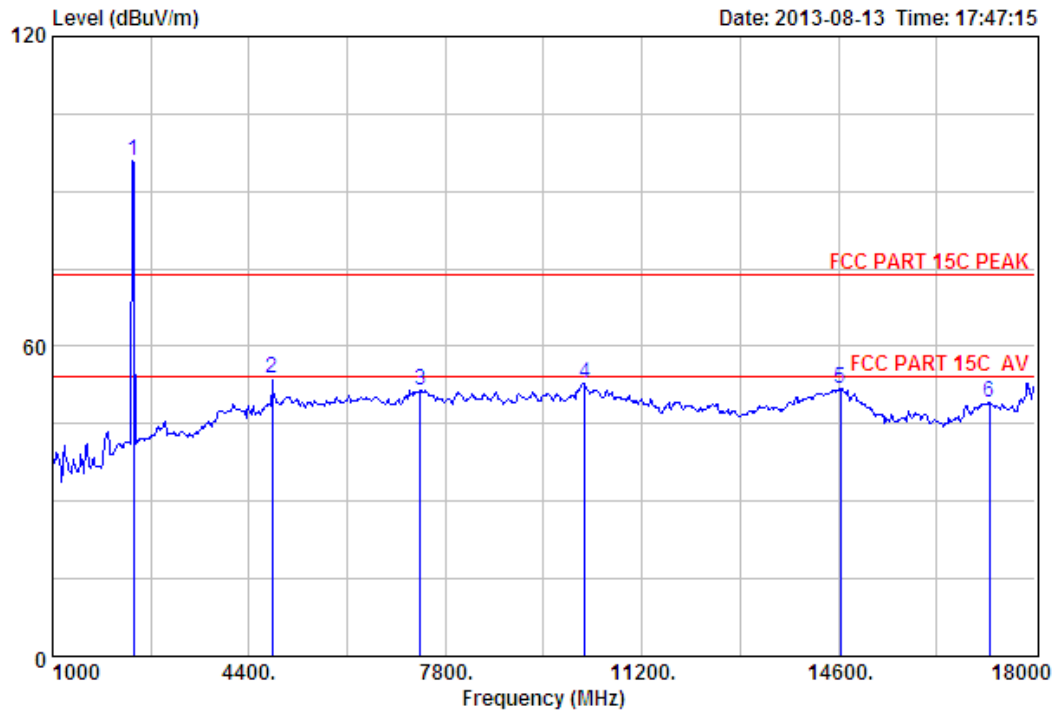

Site no. : 3m Chamber Data no. : 413
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : GFSK TX 2402MHz
 Adapter 2

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2402.00	27.61	6.62	34.18	95.80	95.85	74.00	-21.85	Peak
2	4804.00	31.25	11.77	31.81	42.60	53.81	74.00	20.19	Peak
3	7358.00	36.56	11.58	31.99	35.39	51.54	74.00	22.46	Peak
4	10214.00	38.48	11.47	32.17	34.92	52.70	74.00	21.30	Peak
5	14634.00	41.48	10.91	33.56	33.03	51.86	74.00	22.14	Peak
6	17218.00	40.58	10.91	33.55	31.13	49.07	74.00	24.93	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

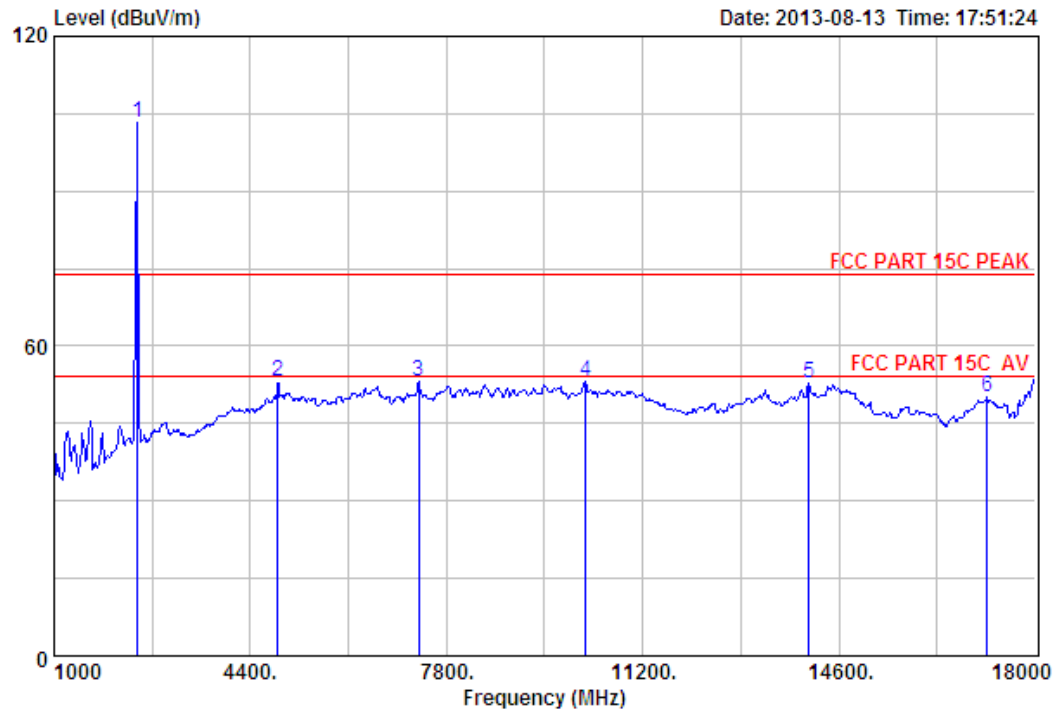

Site no. : 3m Chamber Data no. : 414
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : GFSK TX 2441MHz
 Adapter 2

		Ant.	Cable	Amp	Emission				
Freq.	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark	
(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		
1	2441.00	27.60	6.67	34.12	103.14	103.29	74.00	-29.29	Peak
2	4882.00	31.37	12.07	31.90	41.50	53.04	74.00	20.96	Peak
3	7324.00	36.55	11.57	31.99	37.18	53.31	74.00	20.69	Peak
4	10214.00	38.48	11.47	32.17	35.24	53.02	74.00	20.98	Peak
5	14073.00	41.52	10.90	33.75	34.18	52.85	74.00	21.15	Peak
6	17167.00	40.39	10.93	33.24	32.08	50.16	74.00	23.84	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

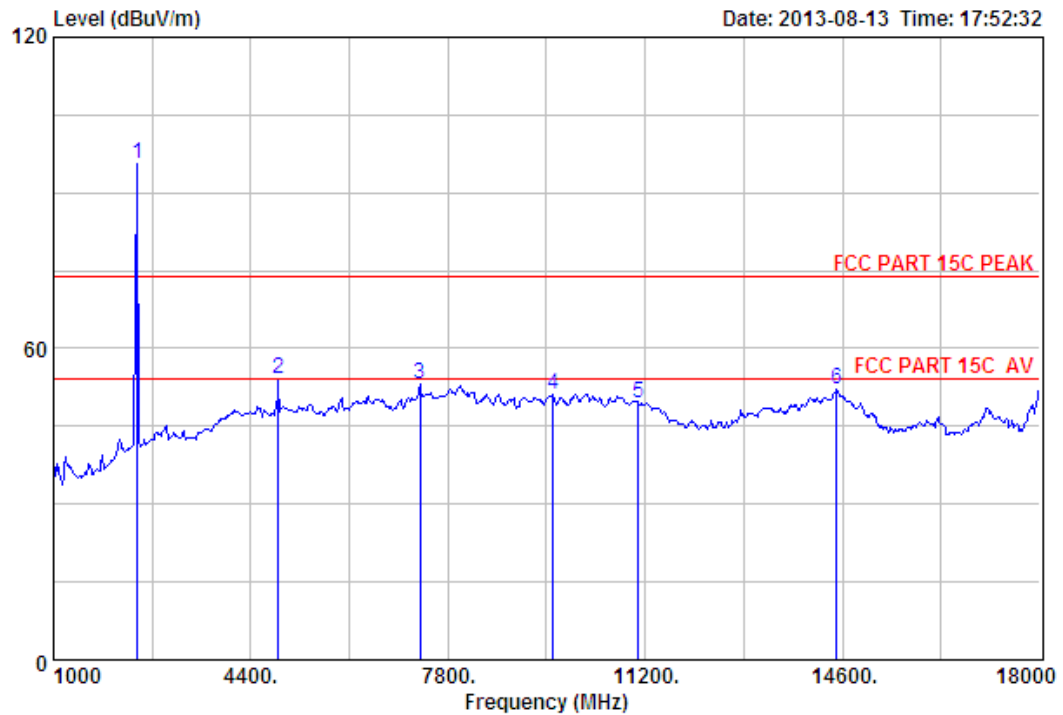

Site no. : 3m Chamber Data no. : 415
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : GFSK TX 2441MHz
 Adapter 2

	Freq. (MHz)	Ant.	Cable	Amp	Emission				Remark
		Factor (dB/m)	Loss (dB)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	
1	2441.00	27.60	6.67	34.12	95.52	95.67	74.00	-21.67	Peak
2	4882.00	31.37	12.07	31.90	42.45	53.99	74.00	20.01	Peak
3	7324.00	36.55	11.57	31.99	36.91	53.04	74.00	20.96	Peak
4	9619.00	37.93	11.68	31.92	33.47	51.16	74.00	22.84	Peak
5	11081.00	39.46	11.23	33.81	32.66	49.54	74.00	24.46	Peak
6	14498.00	41.88	10.93	33.08	32.25	51.98	74.00	22.02	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official
 limit are not reported.

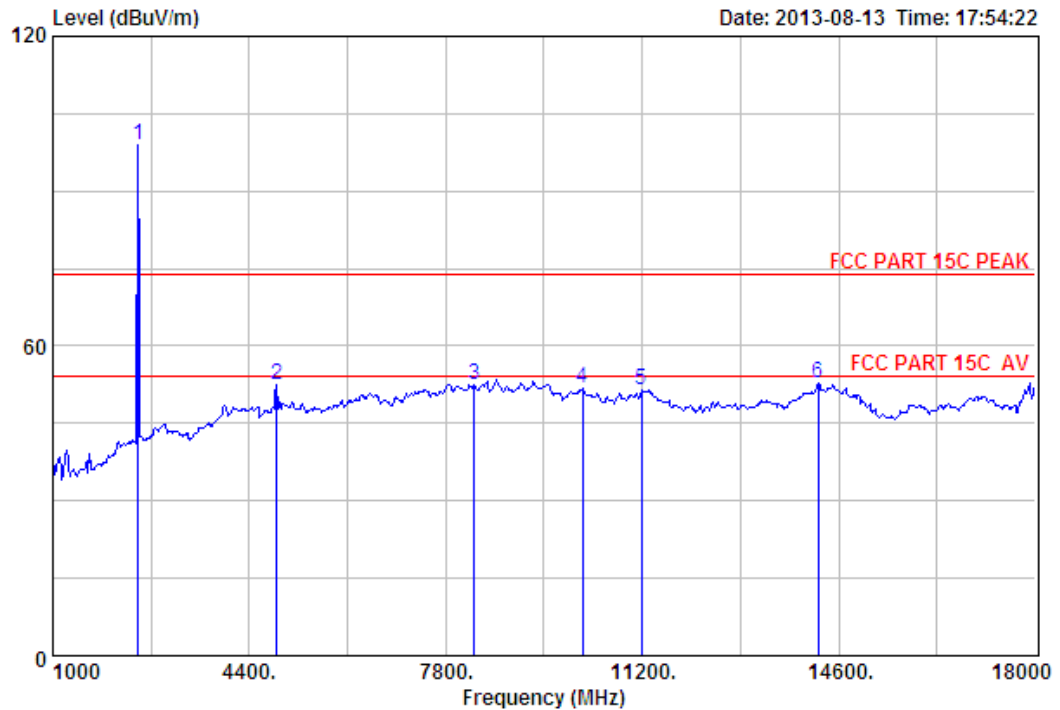

Site no. : 3m Chamber Data no. : 416
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : GFSK TX 2480MHz
 Adapter 2

		Ant.	Cable	Amp	Emission				
	Freq.	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2480.00	27.58	6.71	34.03	98.76	99.02	74.00	-25.02	Peak
2	4882.00	31.37	12.07	31.90	40.95	52.49	74.00	21.51	Peak
3	8293.00	36.67	11.43	31.57	36.00	52.53	74.00	21.47	Peak
4	10163.00	38.39	11.50	32.08	34.10	51.91	74.00	22.09	Peak
5	11183.00	39.40	11.15	34.00	35.06	51.61	74.00	22.39	Peak
6	14243.00	41.67	10.91	33.24	33.33	52.67	74.00	21.33	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

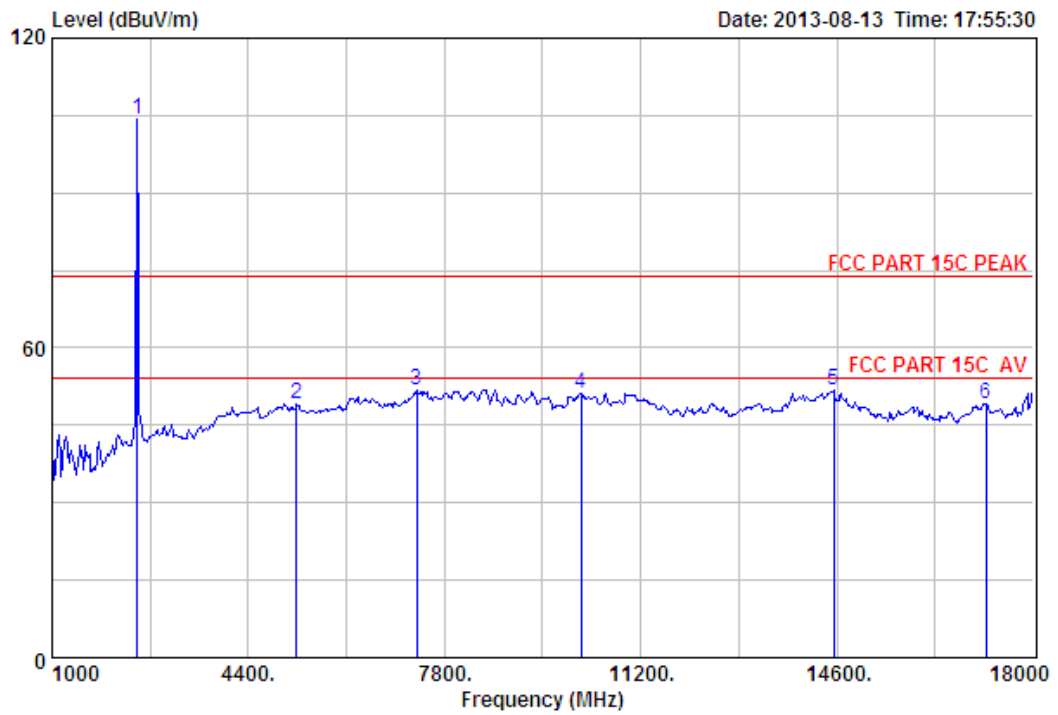

Site no. : 3m Chamber Data no. : 417
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : GFSK TX 2480MHz
 Adapter 2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	27.58	6.71	34.03	104.16	104.42	74.00	-30.42	Peak
2	5233.00	31.68	12.31	32.18	37.28	49.09	74.00	24.91	Peak
3	7324.00	36.55	11.57	31.99	35.59	51.72	74.00	22.28	Peak
4	10163.00	38.39	11.50	32.08	33.49	51.30	74.00	22.70	Peak
5	14549.00	41.77	10.92	33.26	32.30	51.73	74.00	22.27	Peak
6	17184.00	40.45	10.92	33.34	31.11	49.14	74.00	24.86	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

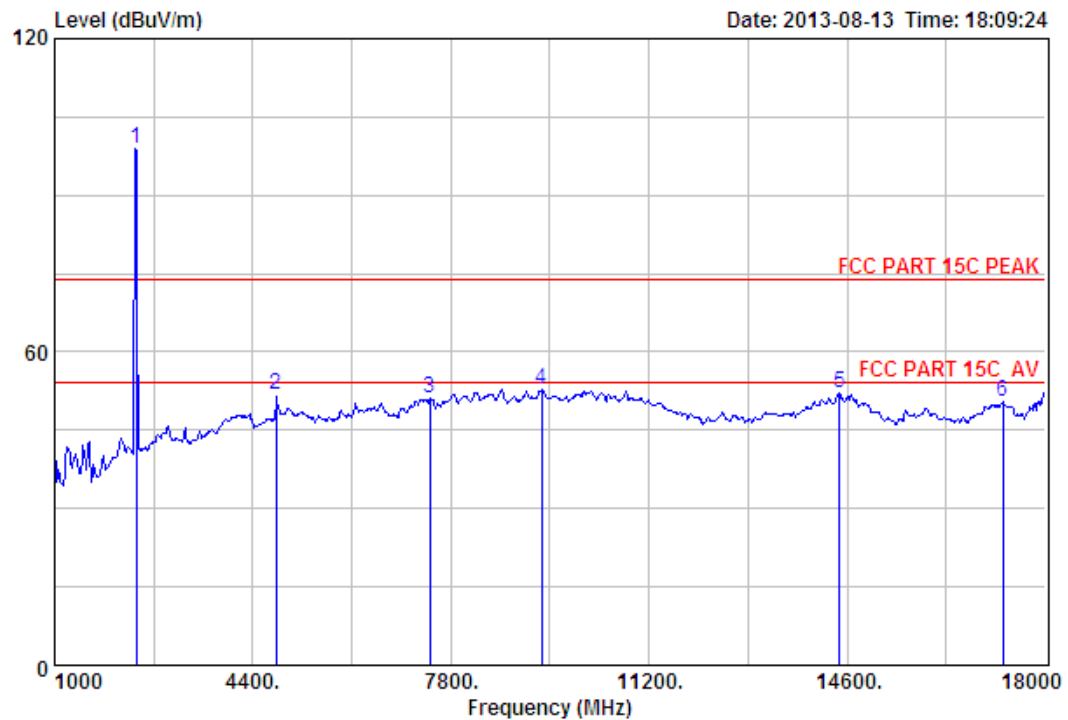

Site no. : 3m Chamber Data no. : 424
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6°;Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : 8-DPSK TX 2402MHz
 Adapter 2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Emission		Limits (dBuV/m)	Margin (dB)	Remark
					Reading (dBuV)	Level (dBuV/m)			
1	2402.00	27.61	6.62	34.18	98.97	99.02	74.00	-25.02	Peak
2	4804.00	31.25	11.77	31.81	40.45	51.66	74.00	22.34	Peak
3	7443.00	36.54	11.61	31.93	34.80	51.02	74.00	22.98	Peak
4	9364.00	38.02	11.64	32.06	35.06	52.66	74.00	21.34	Peak
5	14464.00	41.85	10.93	32.96	32.47	52.29	74.00	21.71	Peak
6	17269.00	40.78	10.89	33.87	32.51	50.31	74.00	23.69	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

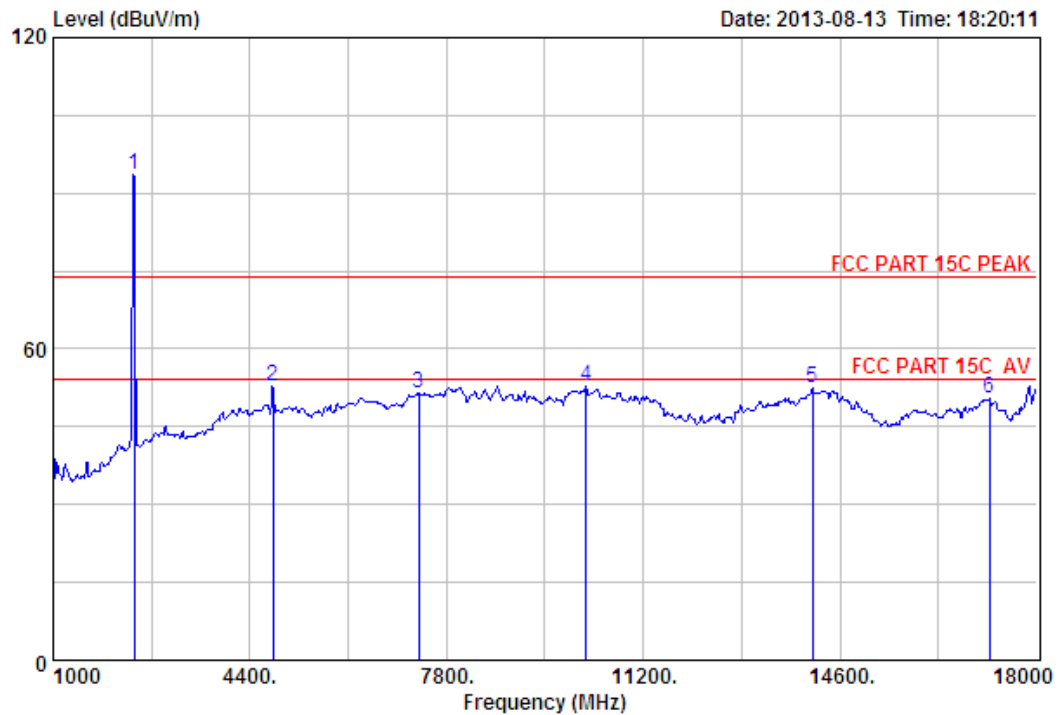

Site no. : 3m Chamber Data no. : 425
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : 8-DPSK TX 2402MHz
 Adapter 2

	Ant.	Cable	Amp	Emission					
Freq.	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark	
(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		
1	2402.00	27.61	6.62	34.18	93.57	93.62	74.00	-19.62	Peak
2	4804.00	31.25	11.77	31.81	41.59	52.80	74.00	21.20	Peak
3	7324.00	36.55	11.57	31.99	35.31	51.44	74.00	22.56	Peak
4	10214.00	38.48	11.47	32.17	35.19	52.97	74.00	21.03	Peak
5	14124.00	41.57	10.91	33.59	33.45	52.34	74.00	21.66	Peak
6	17184.00	40.45	10.92	33.34	32.35	50.38	74.00	23.62	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

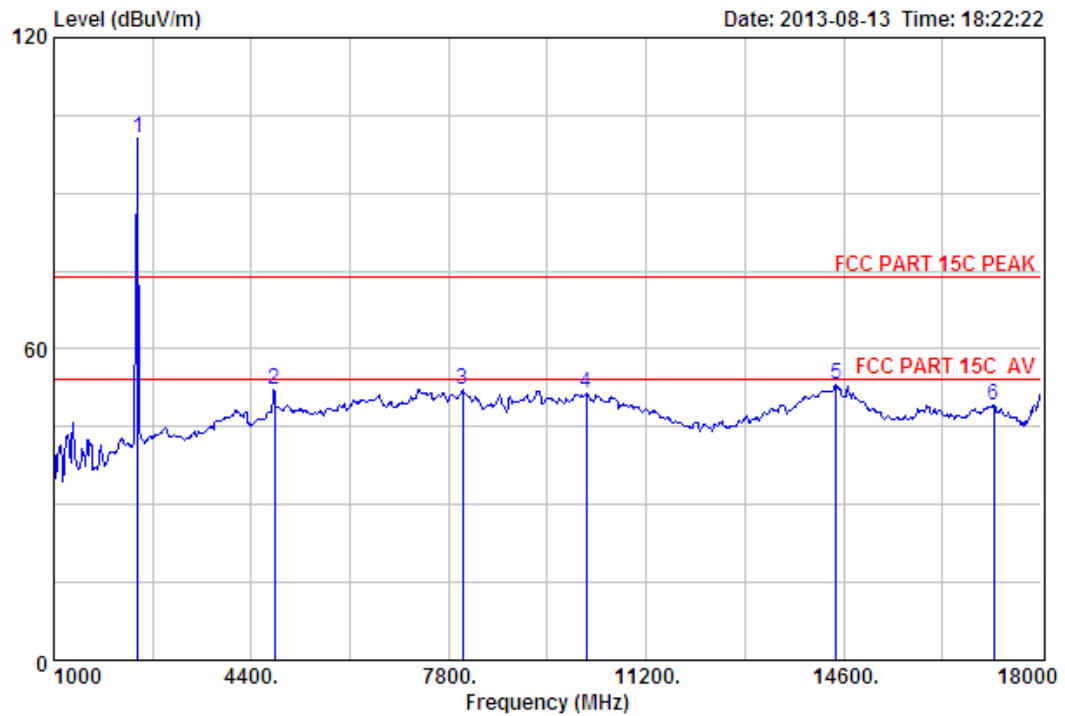

Site no. : 3m Chamber Data no. : 426
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : 8-DPSK TX 2441MHz
 Adapter 2

		Ant.	Cable	Amp	Emission				
	Freq.	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2441.00	27.60	6.67	34.12	100.60	100.75	74.00	-26.75	Peak
2	4804.00	31.25	11.77	31.81	41.07	52.28	74.00	21.72	Peak
3	8038.00	36.95	11.40	31.28	34.93	52.00	74.00	22.00	Peak
4	10163.00	38.39	11.50	32.08	33.57	51.38	74.00	22.62	Peak
5	14464.00	41.85	10.93	32.96	33.33	53.15	74.00	20.85	Peak
6	17184.00	40.45	10.92	33.34	31.09	49.12	74.00	24.88	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

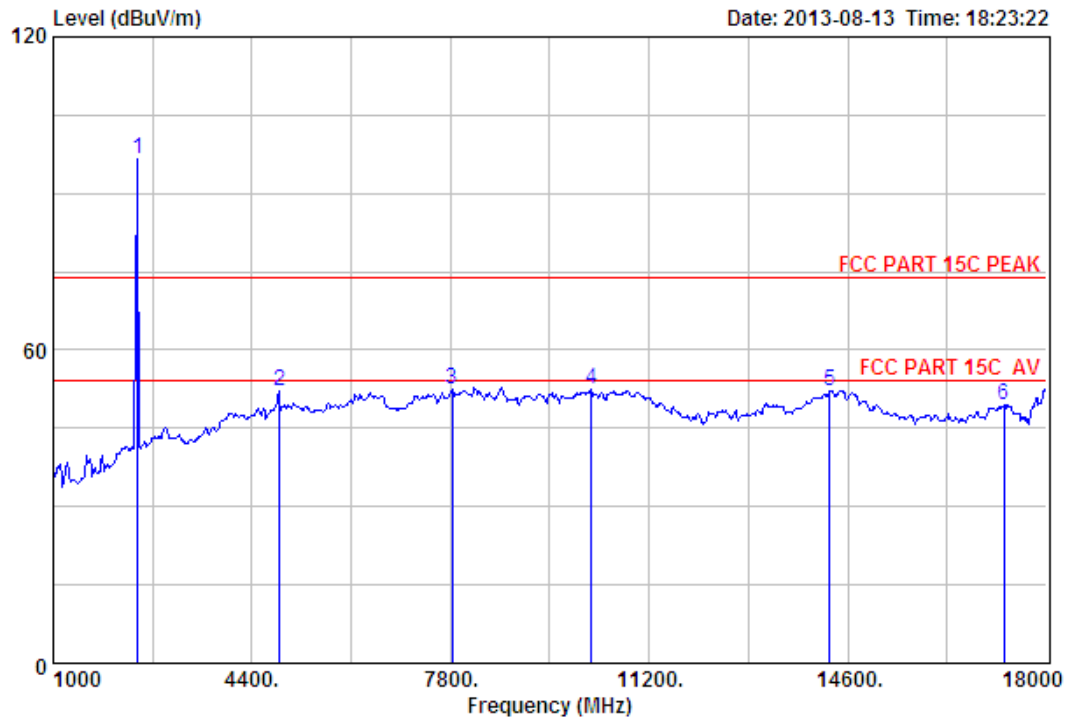

Site no. : 3m Chamber Data no. : 427
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : 8-DPSK TX 2441MHz
 Adapter 2

	Ant.	Cable	Amp	Emission					
Freq.	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark	
(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		
1	27.60	6.67	34.12	96.58	96.73	74.00	-22.73	Peak	
2	31.37	12.07	31.90	40.54	52.08	74.00	21.92	Peak	
3	36.68	11.47	31.40	35.58	52.33	74.00	21.67	Peak	
4	38.48	11.47	32.17	34.76	52.54	74.00	21.46	Peak	
5	41.71	10.92	33.08	32.54	52.09	74.00	21.91	Peak	
6	40.78	10.89	33.87	31.73	49.53	74.00	24.47	Peak	


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

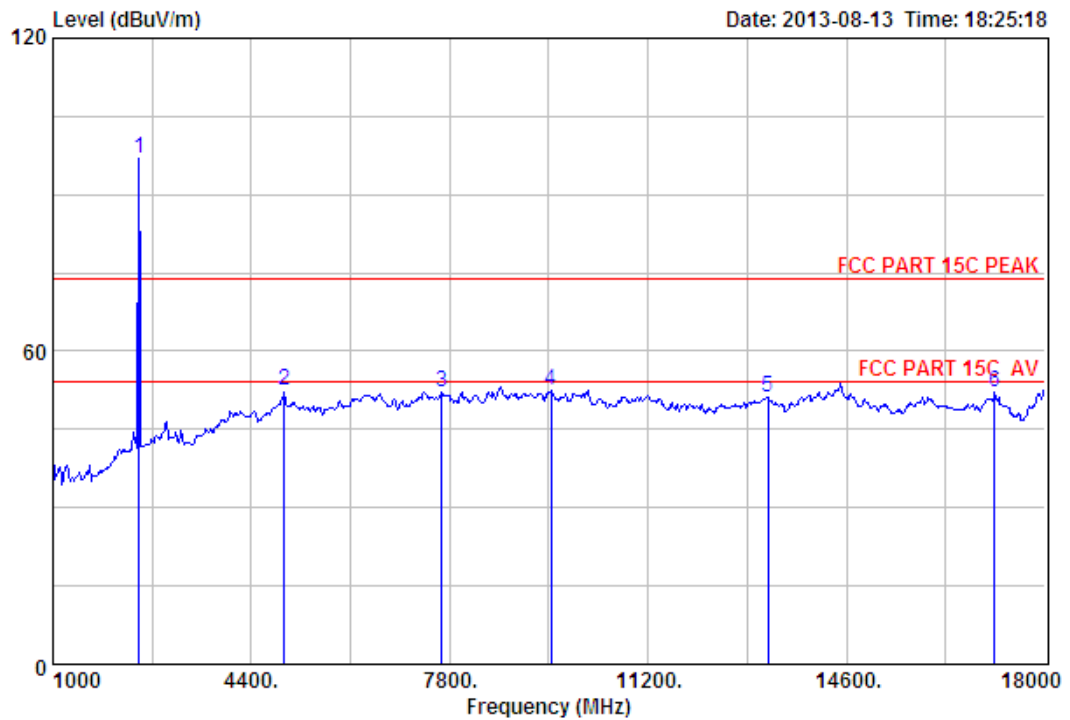

Site no. : 3m Chamber Data no. : 428
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : 8-DPSK TX 2480MHz
 Adapter 2

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2480.00	27.58	6.71	34.03	96.81	97.07	74.00	-23.07	Peak
2	4960.00	31.49	12.44	31.97	40.38	52.34	74.00	21.66	Peak
3	7664.00	36.45	11.55	31.61	35.85	52.24	74.00	21.76	Peak
4	9534.00	37.97	11.70	31.92	34.69	52.44	74.00	21.56	Peak
5	13257.00	39.50	11.47	34.75	34.95	51.17	74.00	22.83	Peak
6	17133.00	40.26	10.94	33.03	33.97	52.14	74.00	21.86	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

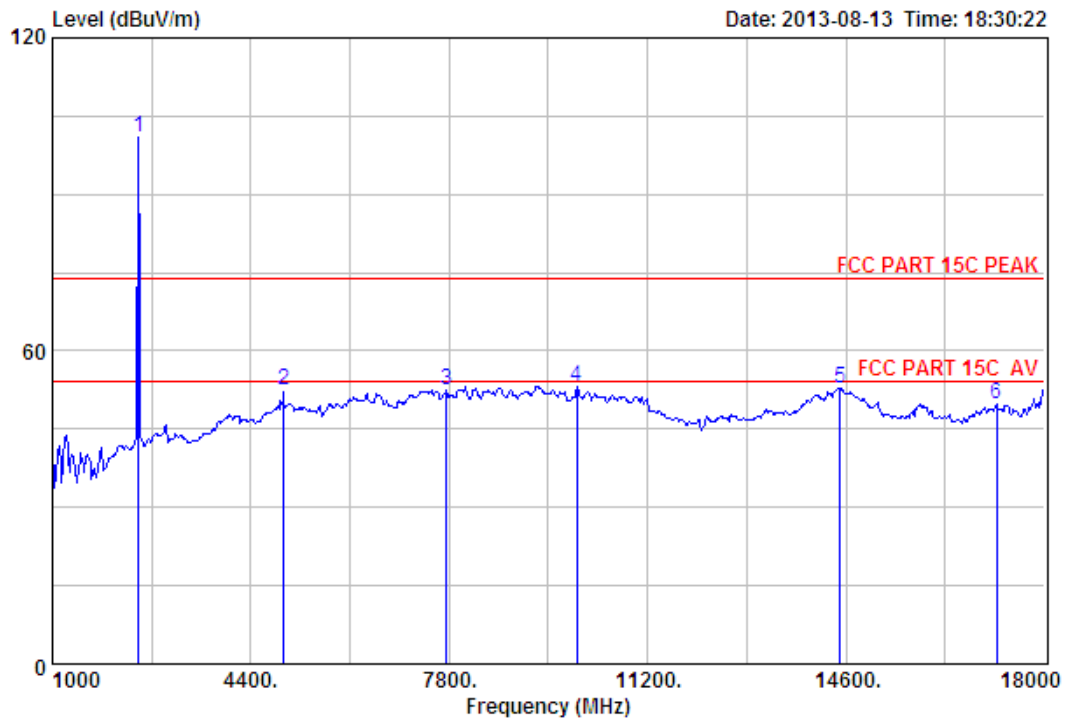


Site no. : 3m Chamber Data no. : 429
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : 8-DPSK TX 2480MHz
 Adapter 2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	27.58	6.71	34.03	100.62	100.88	74.00	-26.88	Peak
2	4960.00	31.49	12.44	31.97	40.57	52.53	74.00	21.47	Peak
3	7749.00	36.55	11.51	31.49	36.06	52.63	74.00	21.37	Peak
4	9993.00	38.12	11.59	31.78	35.18	53.11	74.00	20.89	Peak
5	14498.00	41.88	10.93	33.08	33.06	52.79	74.00	21.21	Peak
6	17184.00	40.45	10.92	33.34	31.91	49.94	74.00	24.06	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.


18000MHz – 250000MHz

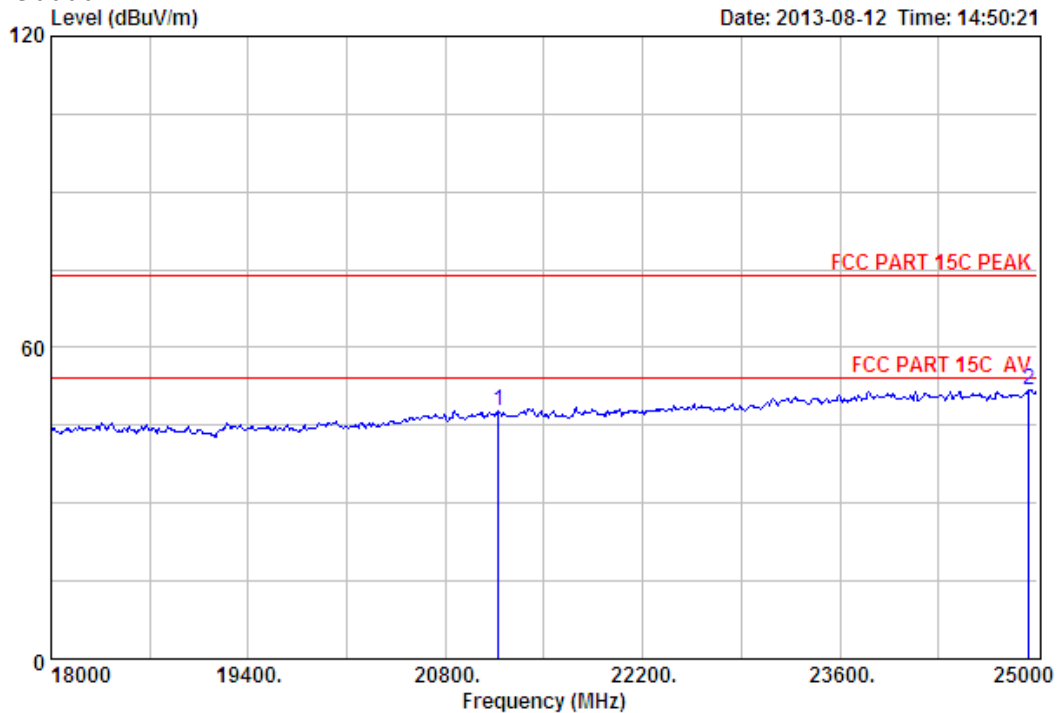

Site no. : 3m Chamber Data no. : 328
 Dis. / Ant. : 3m ANT ABOVE 18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : GFSK TX 2402MHz
 Adapter 1

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	21178.00	46.20	20.21	35.64	16.94	47.71	74.00	26.29	Peak
2	24944.00	46.07	22.56	34.27	17.46	51.82	74.00	22.18	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

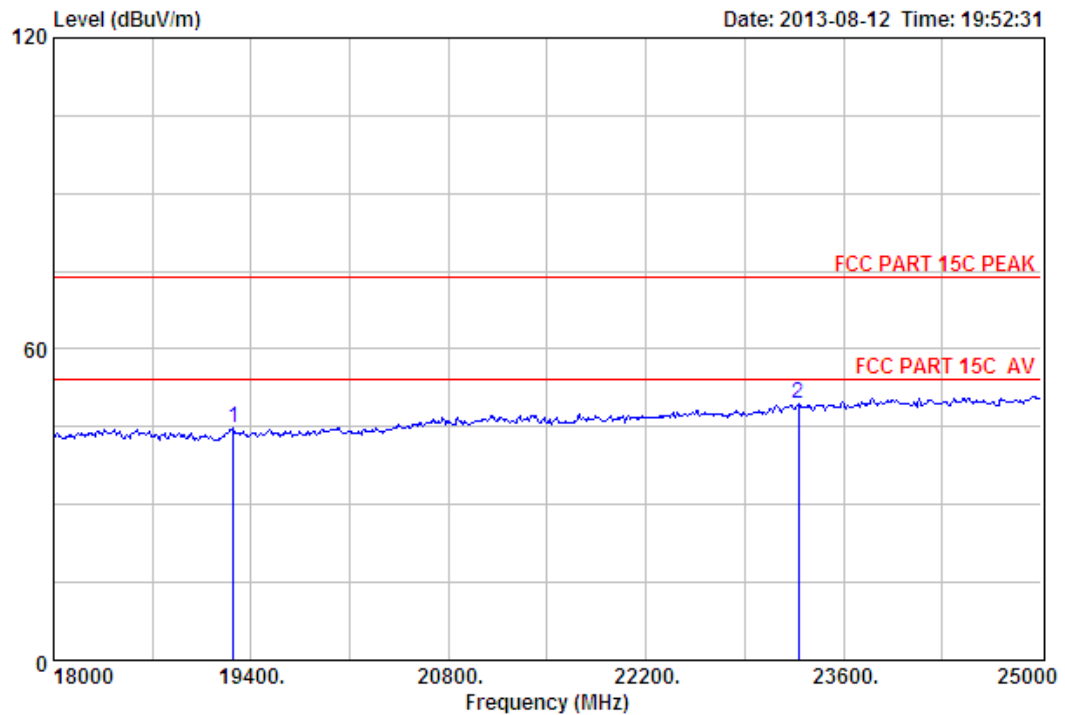

Site no. : 3m Chamber Data no. : 329
 Dis. / Ant. : 3m ANT ABOVE 18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : GFSK TX 2402MHz
 Adapter 1

		Ant.	Cable	Amp	Emission				
Freq.	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark	
(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		
1 19274.00	45.68	18.86	36.08	16.29	44.75	74.00	29.25	Peak	
2 23278.00	45.66	21.39	33.56	15.97	49.46	74.00	24.54	Peak	


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

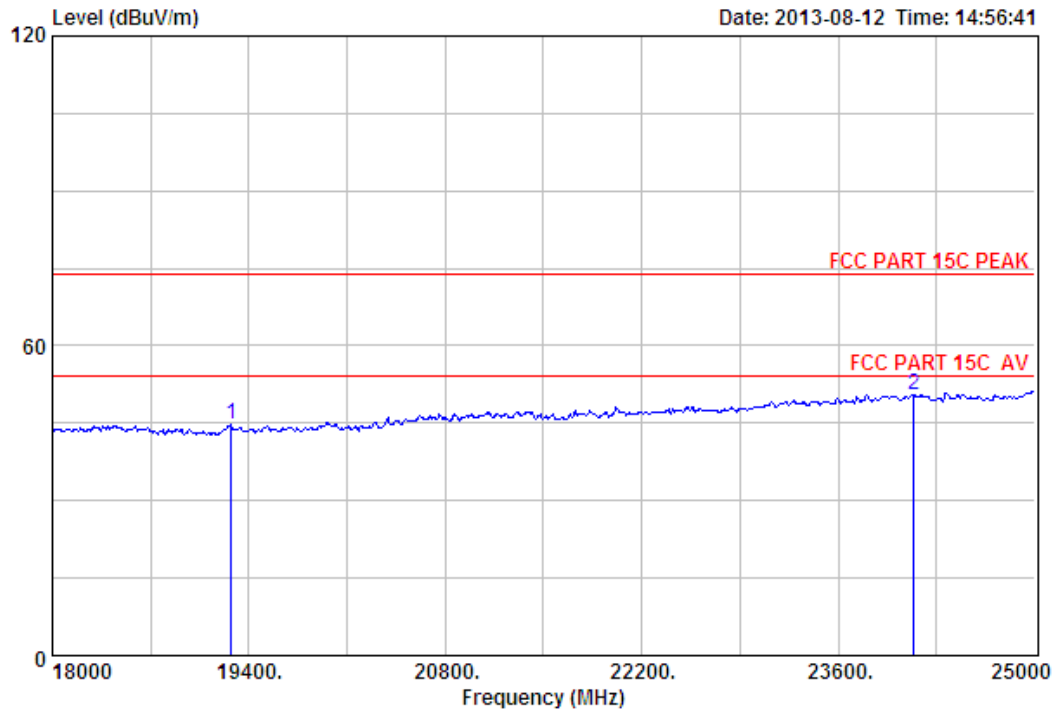

Site no. : 3m Chamber Data no. : 330
 Dis. / Ant. : 3m ANT ABOVE 18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : GFSK TX 2441MHz
 Adapter 1

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission		Limits (dBuV/m)	Margin (dB)	Remark
					Level				
1	19274.00	45.68	18.86	36.08	16.29	44.75	74.00	29.25	Peak
2	24139.00	45.63	22.12	33.03	15.82	50.54	74.00	23.46	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

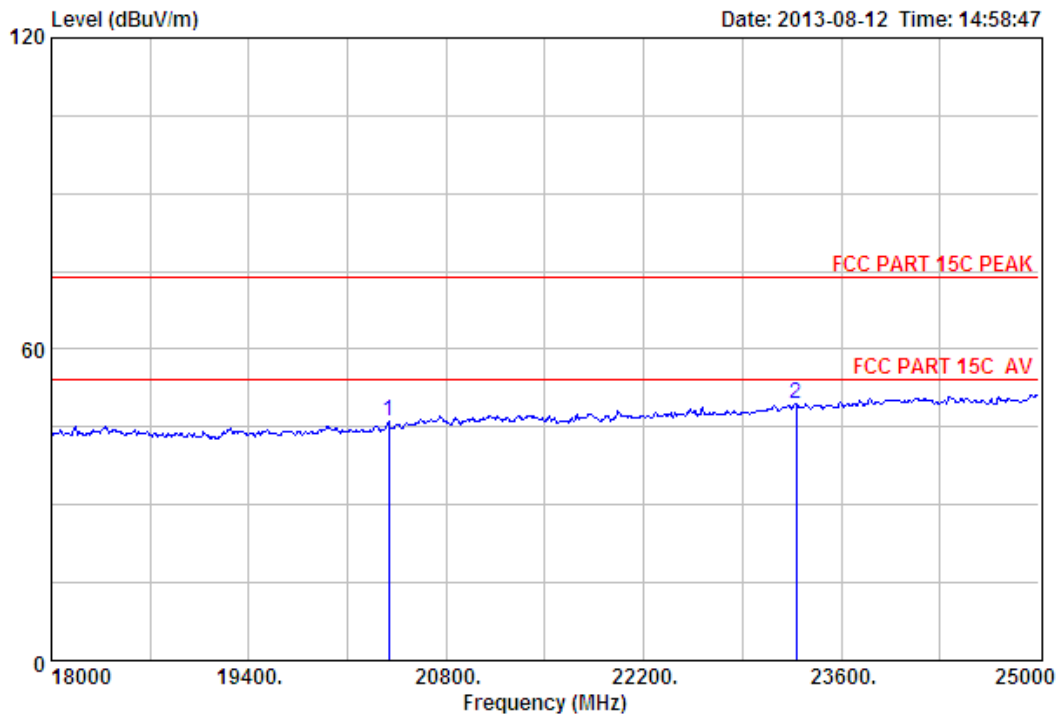

Site no. : 3m Chamber Data no. : 331
 Dis. / Ant. : 3m ANT ABVOE 18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : GFSK TX 2441MHz
 Adapter 1

		Ant.	Cable	Amp	Emission				
Freq.	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark	
(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		
1 20394.00	46.02	19.86	36.34	16.70	46.24	74.00	27.76	Peak	
2 23278.00	45.66	21.39	33.56	15.97	49.46	74.00	24.54	Peak	


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

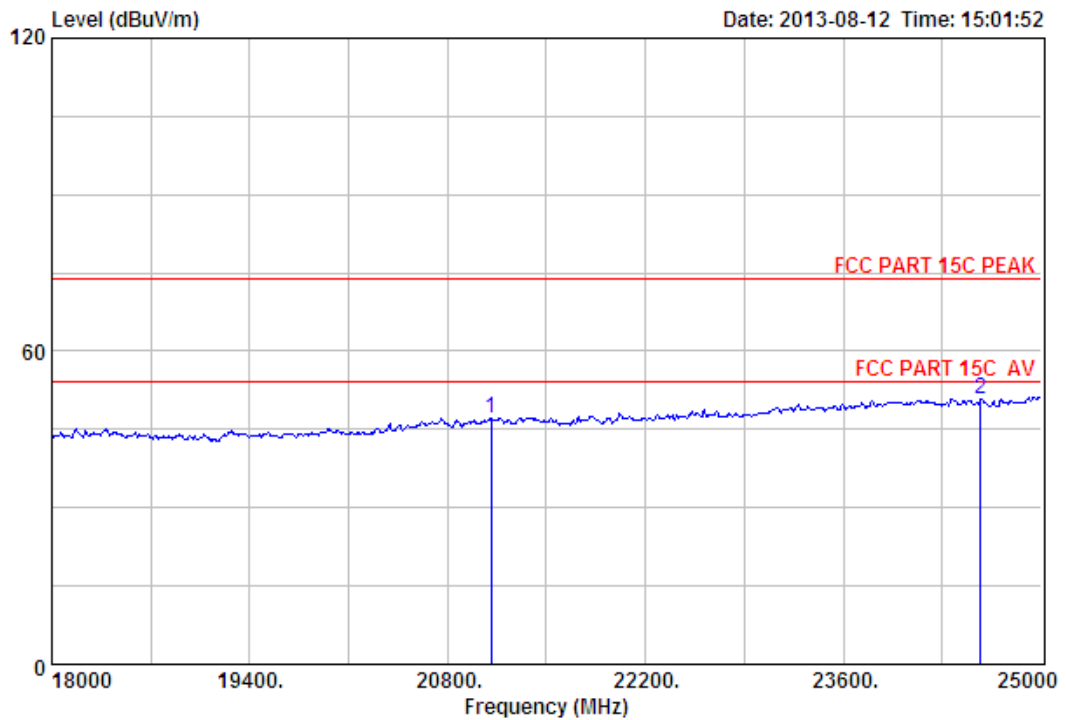

Site no. : 3m Chamber Data no. : 332
 Dis. / Ant. : 3m ANT ABVOE 18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : GFSK TX 2480MHz
 Adapter 1

		Ant.	Cable	Amp	Emission				
	Freq.	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	21108.00	46.23	20.18	35.71	16.58	47.28	74.00	26.72	Peak
2	24573.00	45.77	22.36	33.69	16.47	50.91	74.00	23.09	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

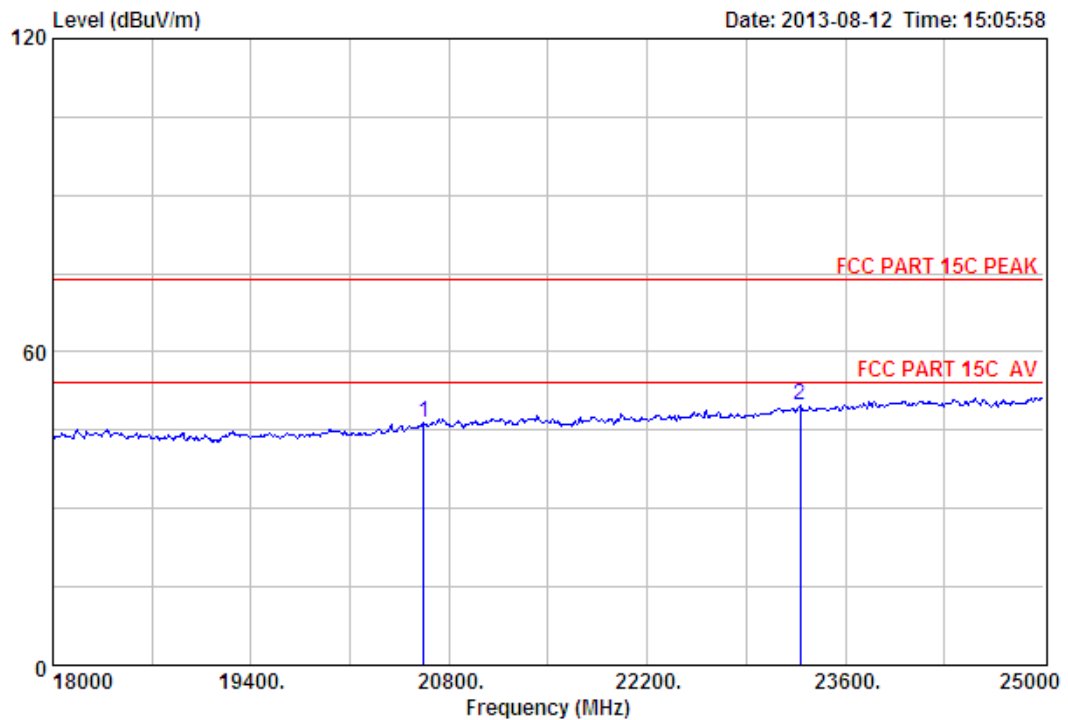

Site no. : 3m Chamber Data no. : 333
 Dis. / Ant. : 3m ANT ABOVE 18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : GFSK TX 2480MHz
 Adapter 1

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	20618.00	46.07	19.96	36.14	16.43	46.32	74.00	27.68	Peak
2	23278.00	45.66	21.39	33.56	16.30	49.79	74.00	24.21	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

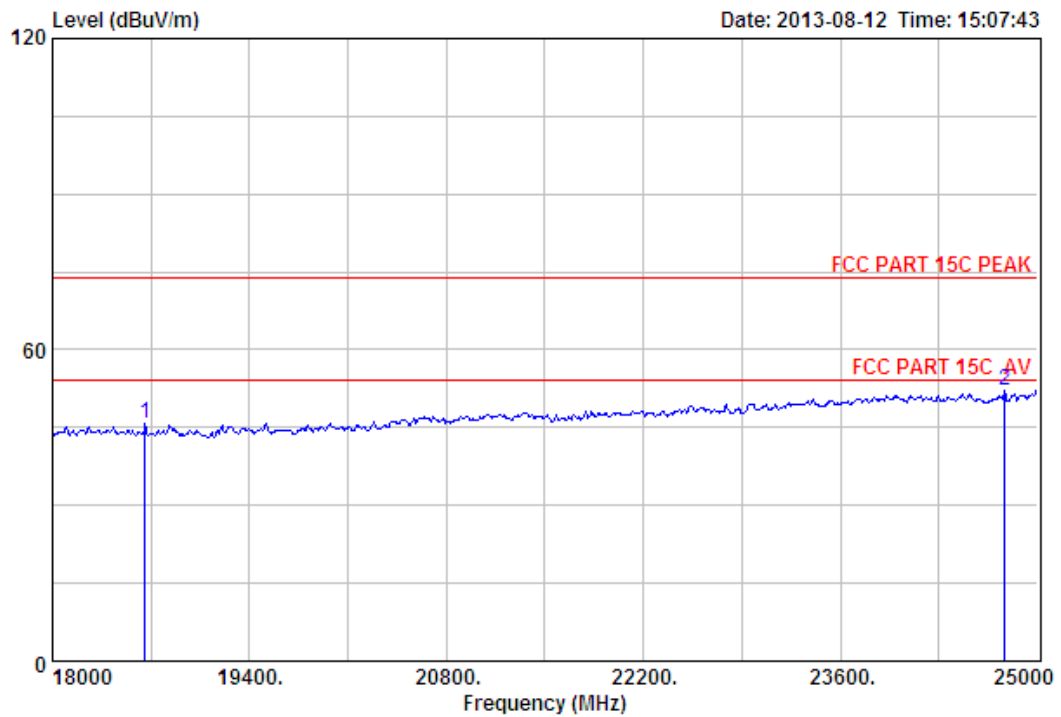

Site no. : 3m Chamber Data no. : 334
 Dis. / Ant. : 3m ANT ABVOE 18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : 8-DPSK TX 2402MHz
 Adapter 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Emission				Remark
					Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	
1	18658.00	45.06	18.12	35.55	18.11	45.74	74.00	28.26	Peak
2	24769.00	45.93	22.46	34.00	17.62	52.01	74.00	21.99	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

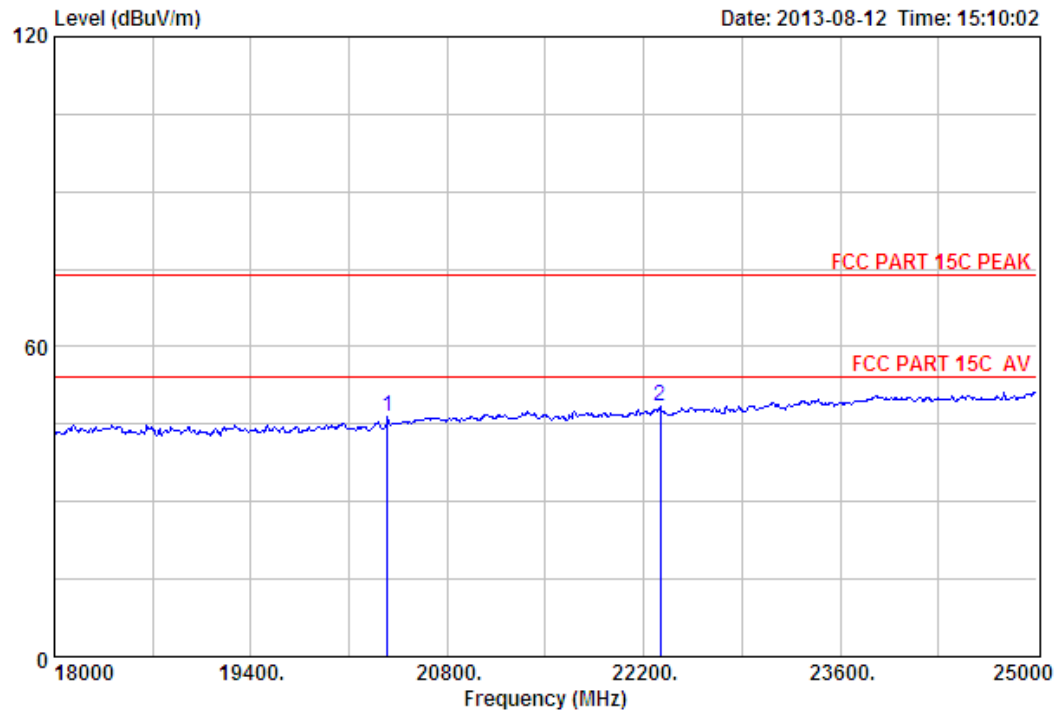

Site no. : 3m Chamber Data no. : 335
 Dis. / Ant. : 3m ANT ABOVE 18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : 8-DPSK TX 2402MHz
 Adapter 1

Freq. (MHz)	Ant. Cable Amp			Emission		Limits (dBuV/m)	Margin (dB)	Remark
	Factor (dB/m)	Loss (dB)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)			
1 20373.00	46.03	19.85	36.36	16.93	46.45	74.00	27.55	Peak
2 22319.00	45.76	20.75	34.56	16.63	48.58	74.00	25.42	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

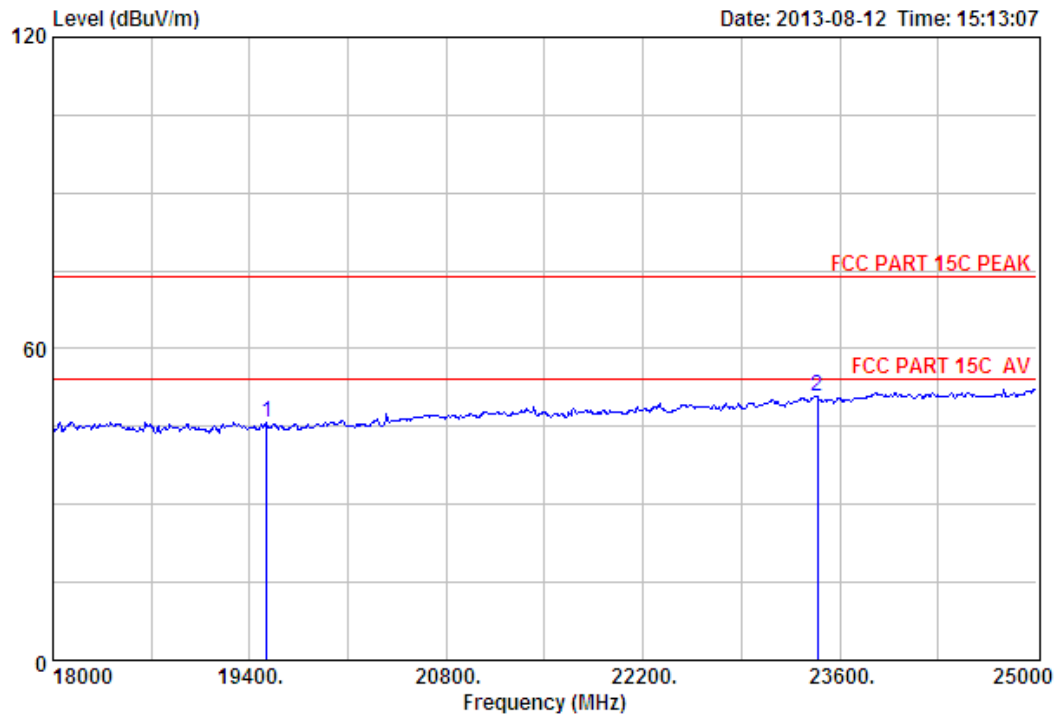

Site no. : 3m Chamber Data no. : 336
 Dis. / Ant. : 3m ANT ABOVE 18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : 8-DPSK TX 2441MHz
 Adapter 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Emission		Limits (dBuV/m)	Margin (dB)	Remark
					Reading (dBuV)	Level (dBuV/m)			
1	19519.00	45.91	19.14	36.30	16.97	45.72	74.00	28.28	Peak
2	23439.00	45.69	21.54	33.38	16.95	50.80	74.00	23.20	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

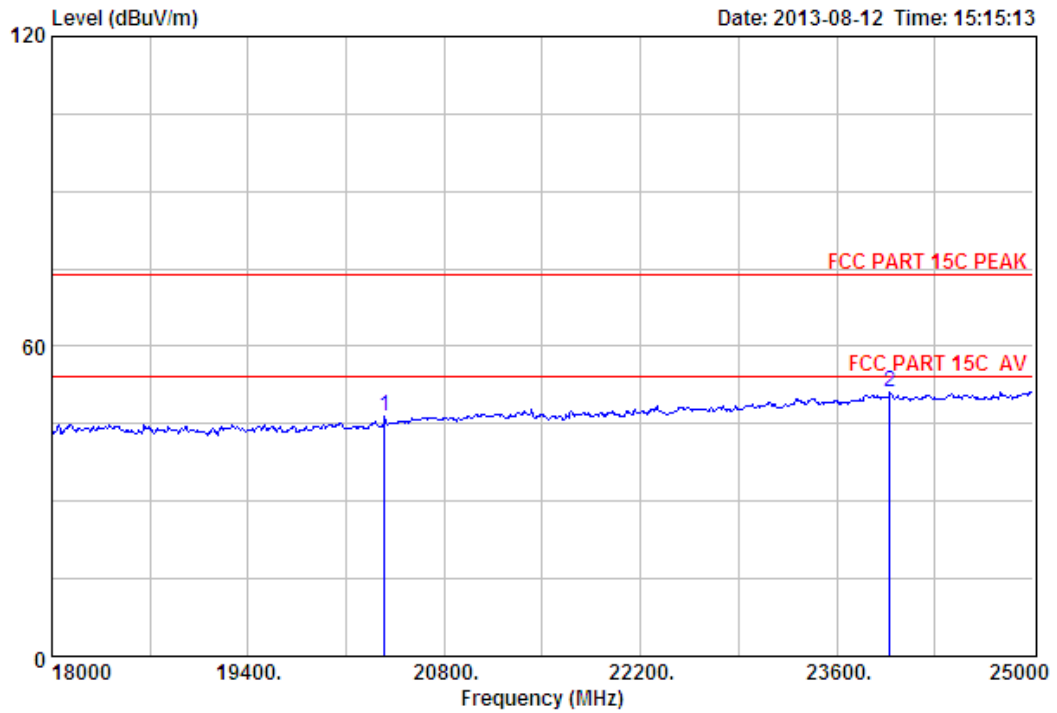

Site no. : 3m Chamber Data no. : 337
 Dis. / Ant. : 3m ANT ABOVE 18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : 8-DPSK TX 2441MHz
 Adapter 1

		Ant.	Cable	Amp		Emission			
Freq.		Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
(MHz)		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	20373.00	46.03	19.85	36.36	16.93	46.45	74.00	27.55	Peak
2	23978.00	45.60	22.03	32.83	16.19	50.99	74.00	23.01	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

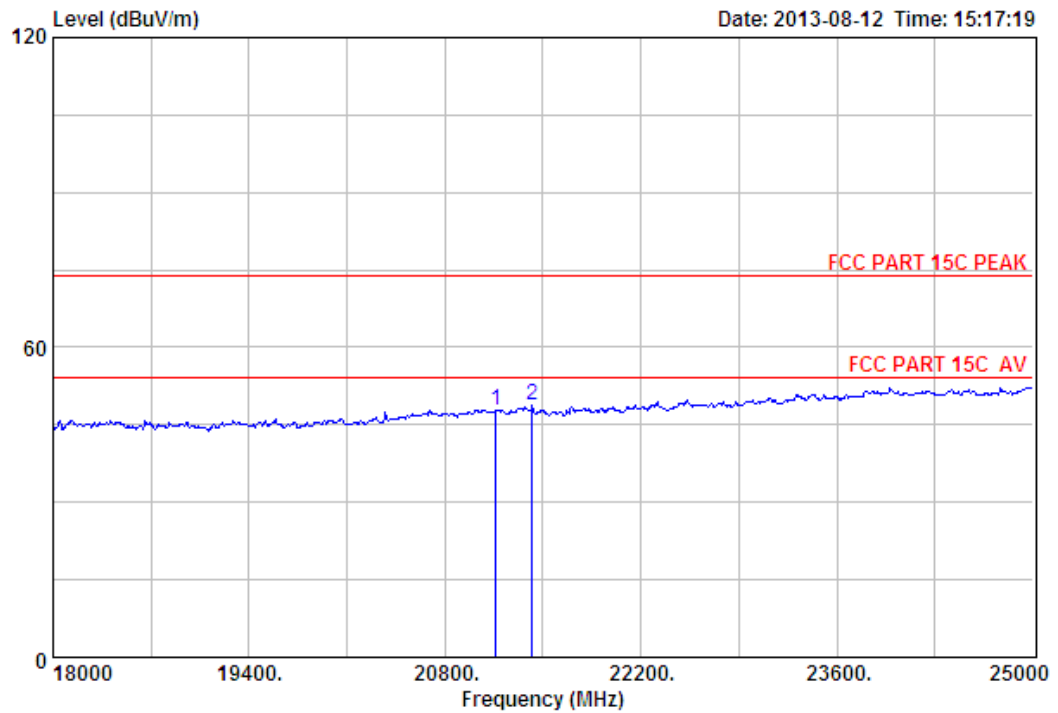

Site no. : 3m Chamber Data no. : 338
 Dis. / Ant. : 3m ANT ABVOE 18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : 8-DPSK TX 2480MHz
 Adapter 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Emission				
					Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	21164.00	46.20	20.20	35.64	17.19	47.95	74.00	26.05	Peak
2	21423.00	46.04	20.31	35.42	17.84	48.77	74.00	25.23	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

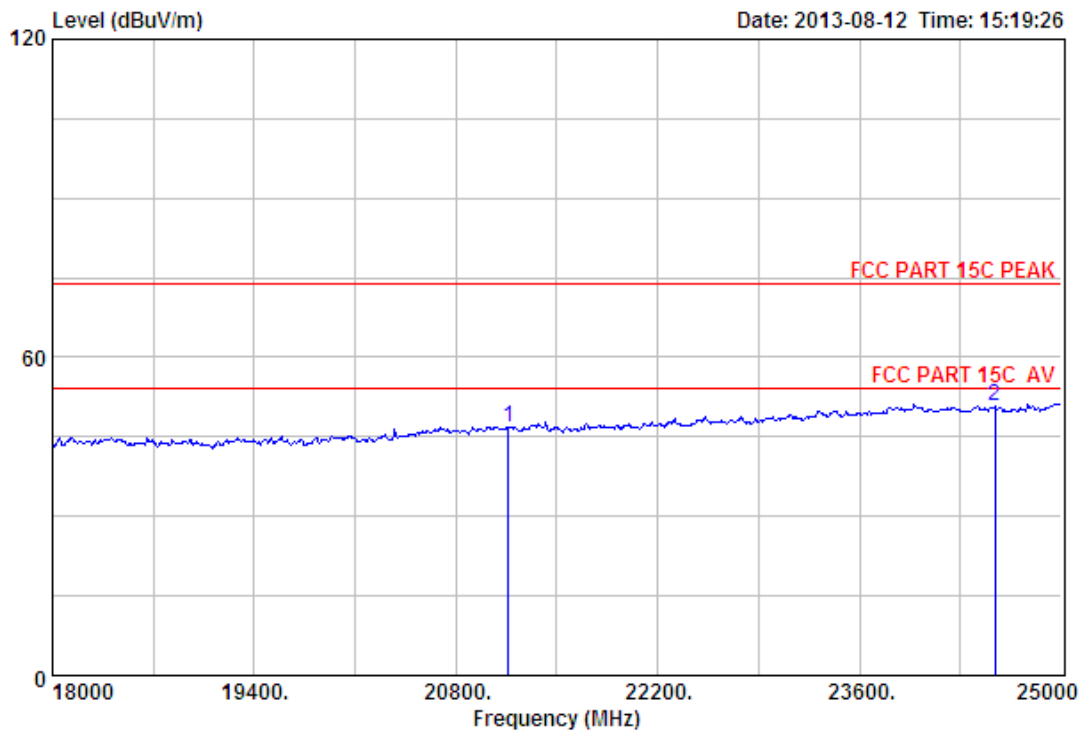

Site no. : 3m Chamber Data no. : 339
 Dis. / Ant. : 3m ANT ABOVE 18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : 8-DPSK TX 2480MHz
 Adapter 1

		Ant.	Cable	Amp	Emission				
	Freq.	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	21164.00	46.20	20.20	35.64	16.19	46.95	74.00	27.05	Peak
2	24538.00	45.73	22.34	33.65	16.29	50.71	74.00	23.29	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

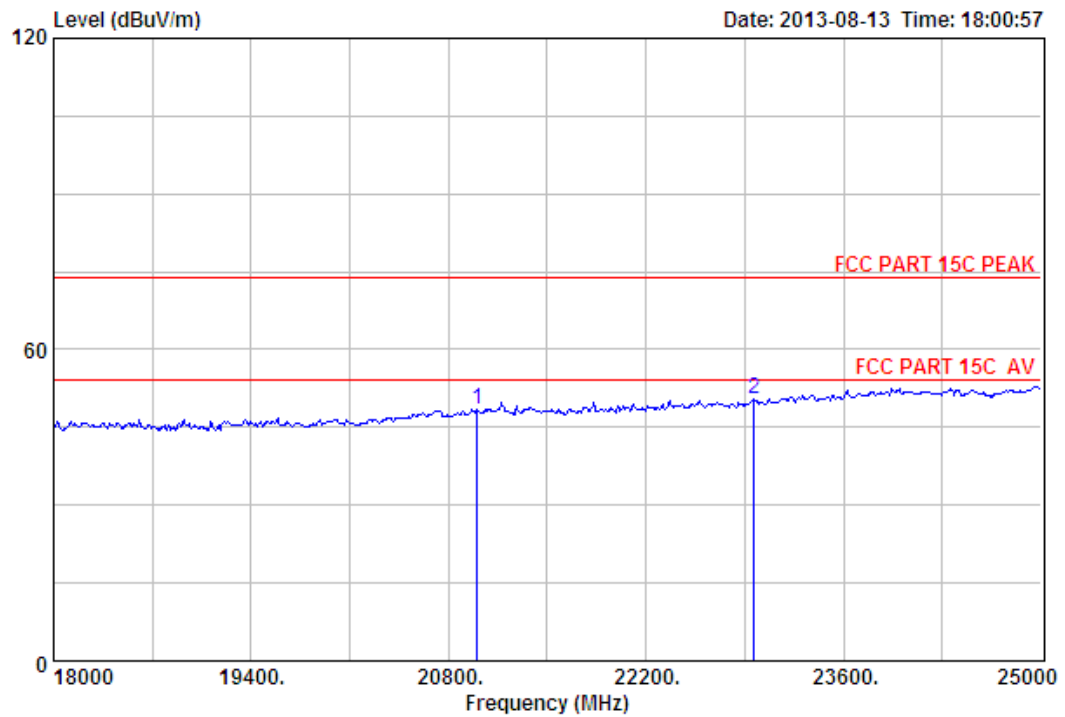

Site no. : 3m Chamber Data no. : 418
 Dis. / Ant. : 3m ANT ABOVE 18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : GFSK TX 2402MHz
 Adapter 2

		Ant.	Cable	Amp	Emission				
	Freq.	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	21003.00	46.30	20.13	35.80	17.88	48.51	74.00	25.49	Peak
2	22963.00	45.61	21.12	33.88	17.53	50.38	74.00	23.62	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

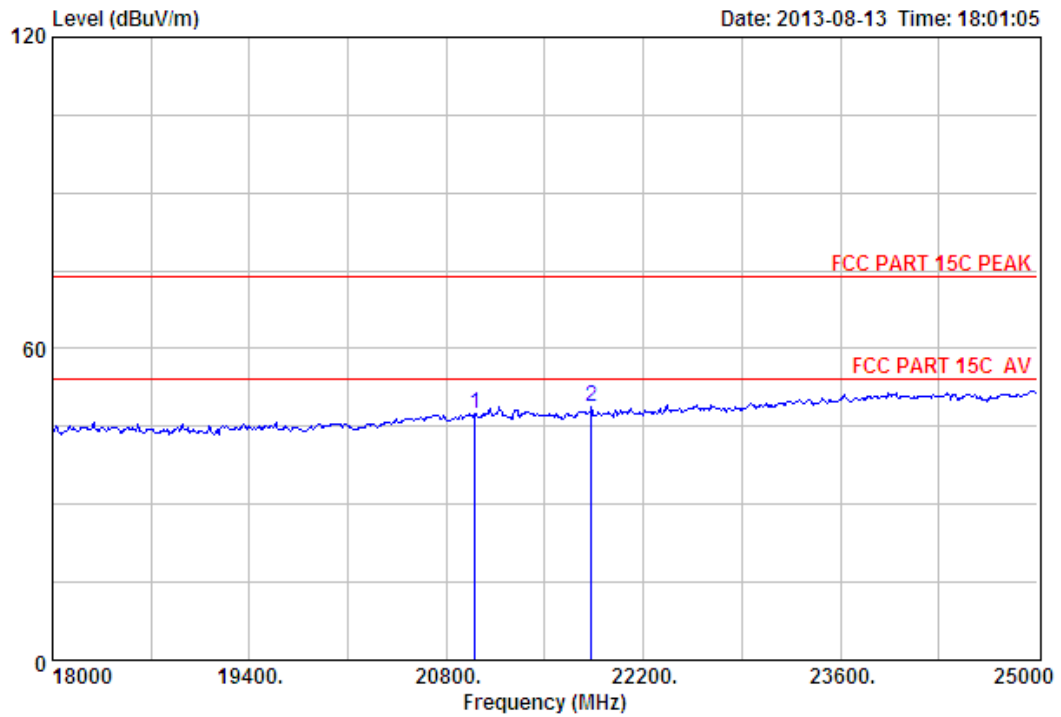

Site no. : 3m Chamber Data no. : 419
 Dis. / Ant. : 3m ANT ABVOE 18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : GFSK TX 2402MHz
 Adapter 2

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission		Limits (dBuV/m)	Margin (dB)	Remark
					Level				
1	21003.00	46.30	20.13	35.80	16.88	47.51	74.00	26.49	Peak
2	21829.00	45.80	20.49	35.06	17.55	48.78	74.00	25.22	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

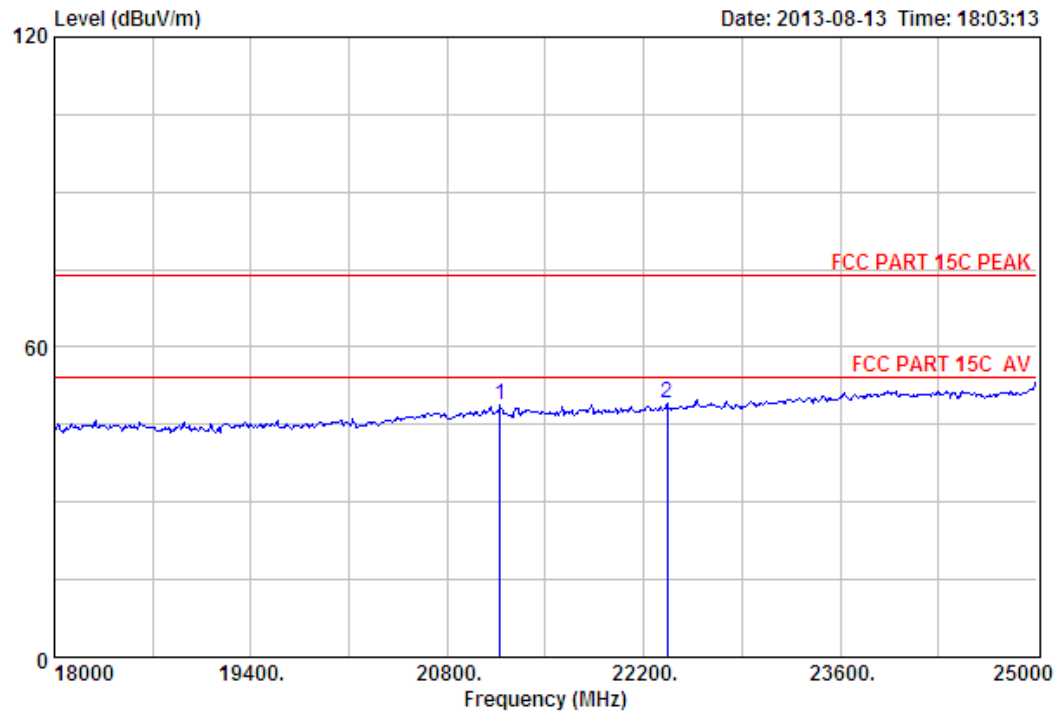

Site no. : 3m Chamber Data no. : 420
 Dis. / Ant. : 3m ANT ABOVE 18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : GFSK TX 2441MHz
 Adapter 2

		Ant.	Cable	Amp	Emission				
	Freq.	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	21178.00	46.20	20.21	35.64	18.03	48.80	74.00	25.20	Peak
2	22368.00	45.77	20.78	34.51	16.99	49.03	74.00	24.97	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

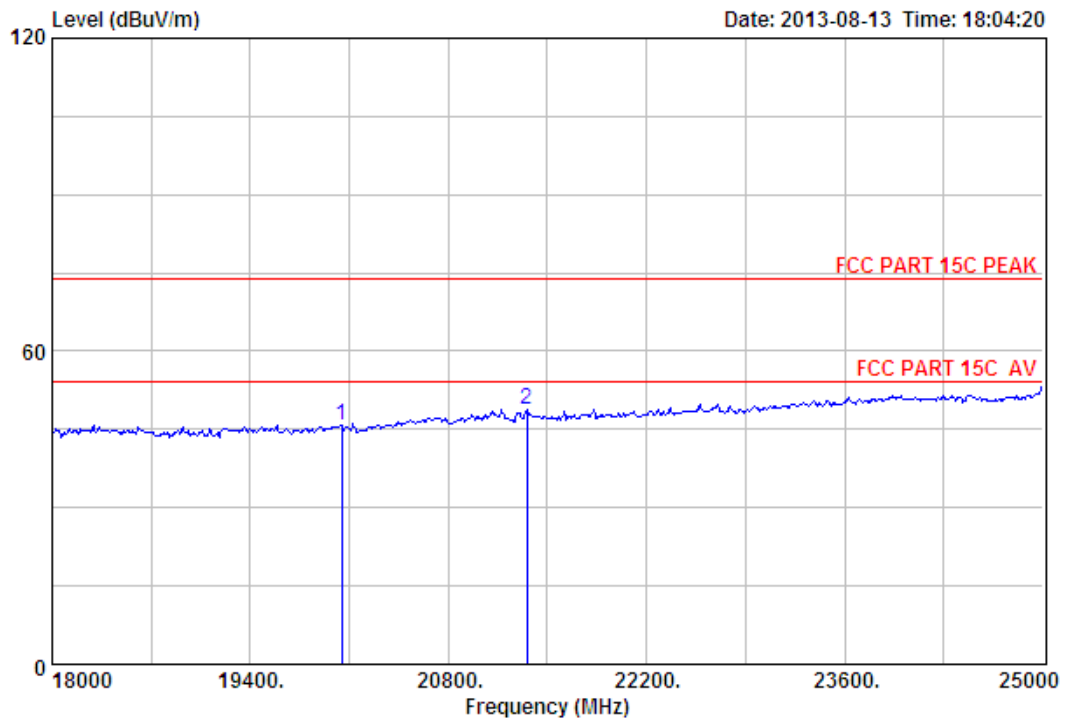

Site no. : 3m Chamber Data no. : 421
 Dis. / Ant. : 3m ANT ABOVE 18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : GFSK TX 2441MHz
 Adapter 2

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	20044.00	46.09	19.70	36.66	16.71	45.84	74.00	28.16	Peak
2	21353.00	46.09	20.28	35.49	17.93	48.81	74.00	25.19	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

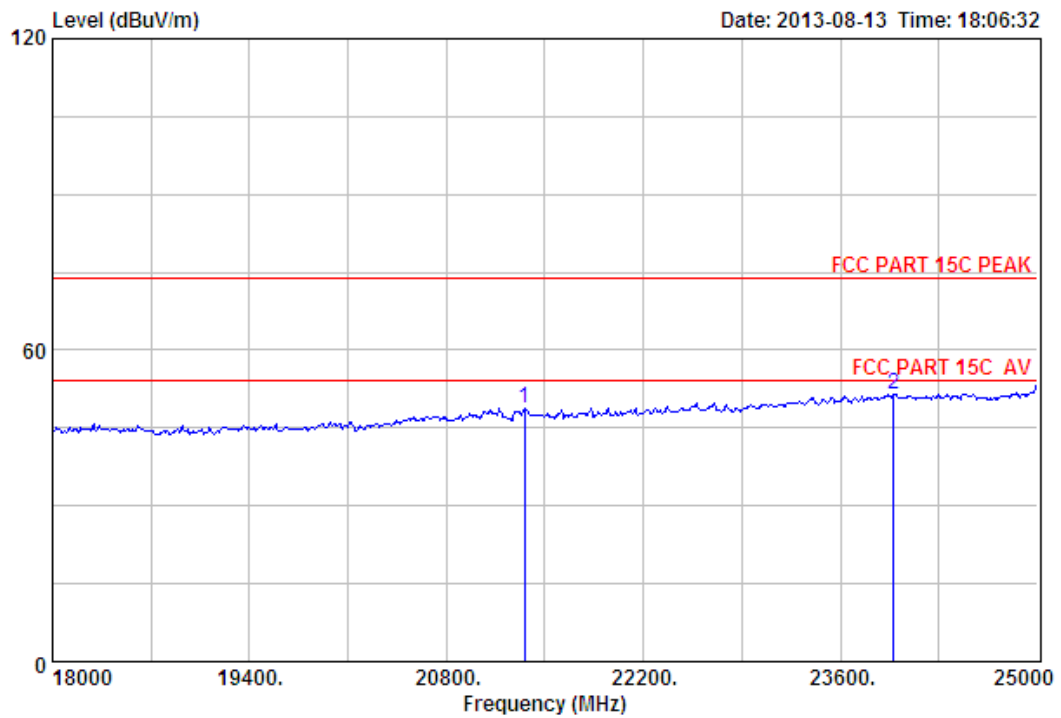

Site no. : 3m Chamber Data no. : 422
 Dis. / Ant. : 3m ANT ABOVE 18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : GFSK TX 2480MHz
 Adapter 2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission			Remark
						Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	
1	21353.00	46.09	20.28	35.49	17.93	48.81	74.00	25.19	Peak
2	23978.00	45.60	22.03	32.83	16.69	51.49	74.00	22.51	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

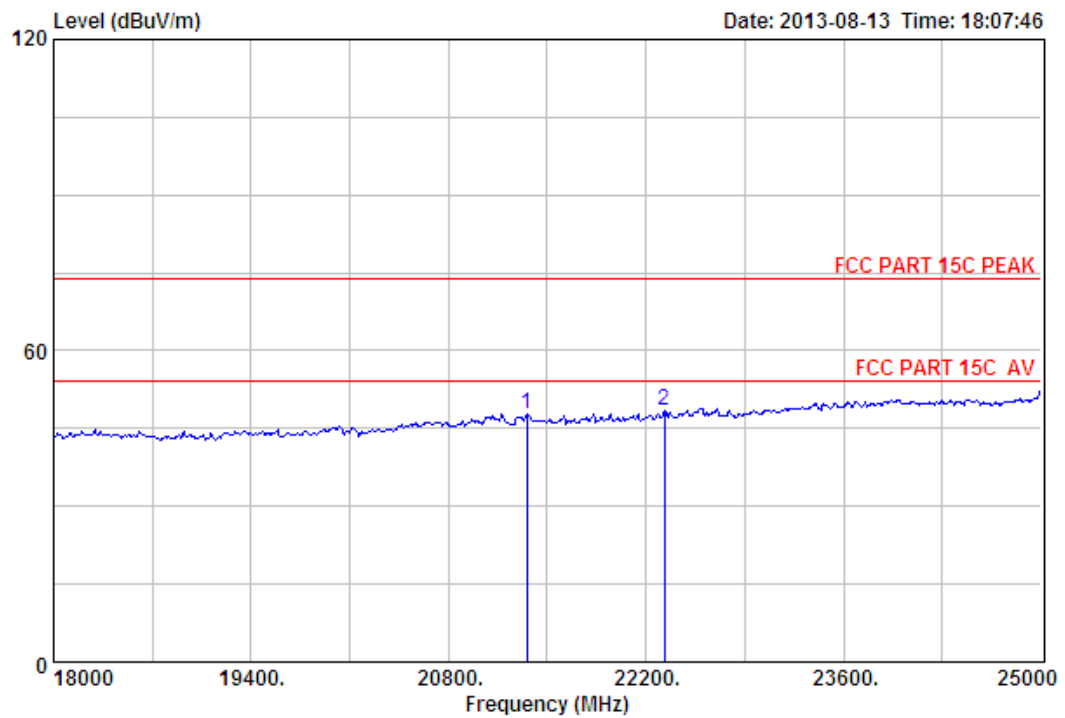

Site no. : 3m Chamber Data no. : 423
 Dis. / Ant. : 3m ANT ABVOE 18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : GFSK TX 2480MHz
 Adapter 2

Freq. (MHz)	Ant. Cable Amp			Emission		Limits (dBuV/m)	Margin (dB)	Remark
	Factor (dB/m)	Loss (dB)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)			
1 21353.00	46.09	20.28	35.49	16.93	47.81	74.00	26.19	Peak
2 22333.00	45.77	20.75	34.56	16.51	48.47	74.00	25.53	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

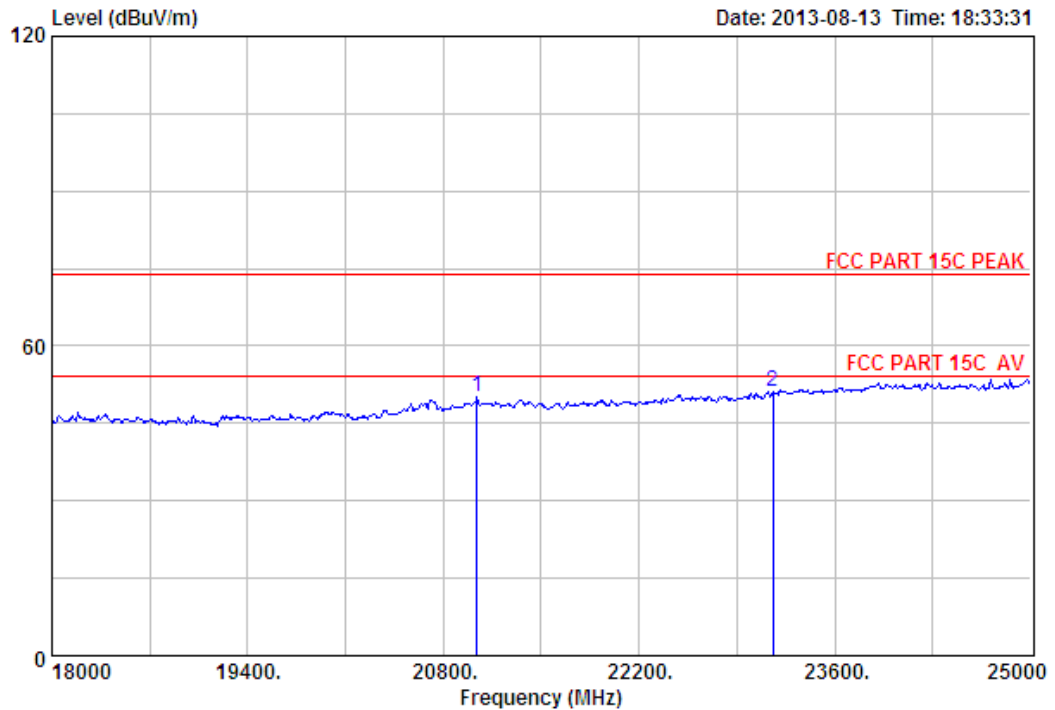

Site no. : 3m Chamber Data no. : 430
 Dis. / Ant. : 3m ANT ABVOE 18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : 8-DPSK TX 2402MHz
 Adapter 2

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	21038.00	46.27	20.15	35.76	19.43	50.09	74.00	23.91	Peak
2	23159.00	45.63	21.29	33.69	18.01	51.24	74.00	22.76	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

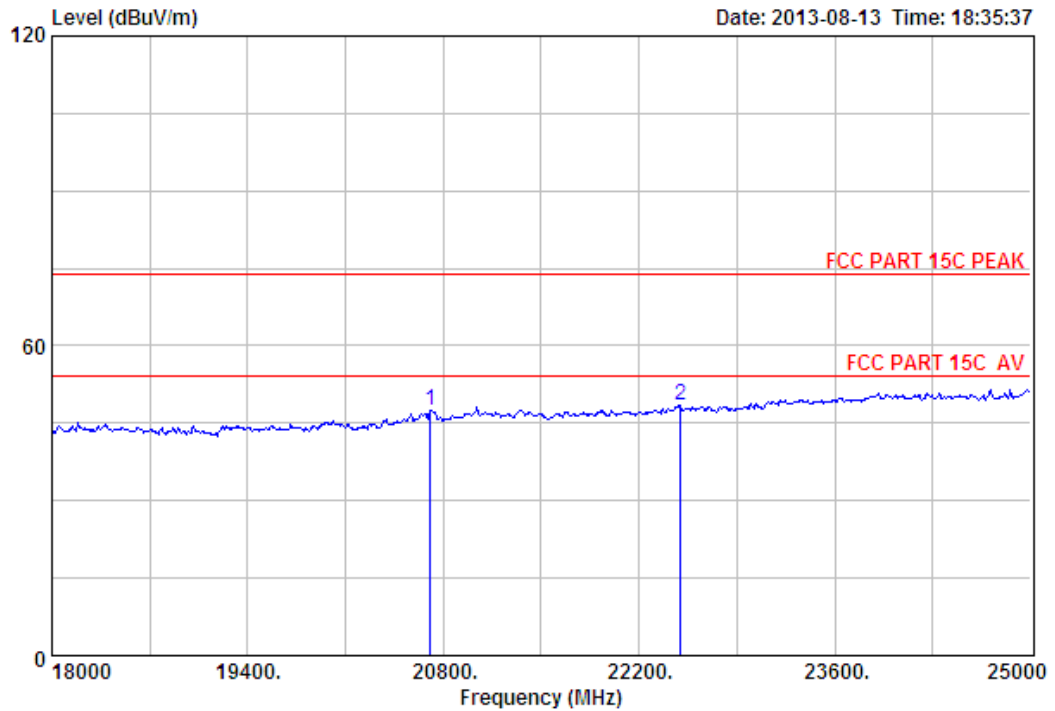

Site no. : 3m Chamber Data no. : 431
 Dis. / Ant. : 3m ANT ABOVE 18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : 8-DPSK TX 2402MHz
 Adapter 2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Emission				Remark
					Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	
1	20709.00	46.12	20.00	36.07	17.48	47.53	74.00	26.47	Peak
2	22494.00	45.80	20.85	34.38	16.13	48.40	74.00	25.60	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

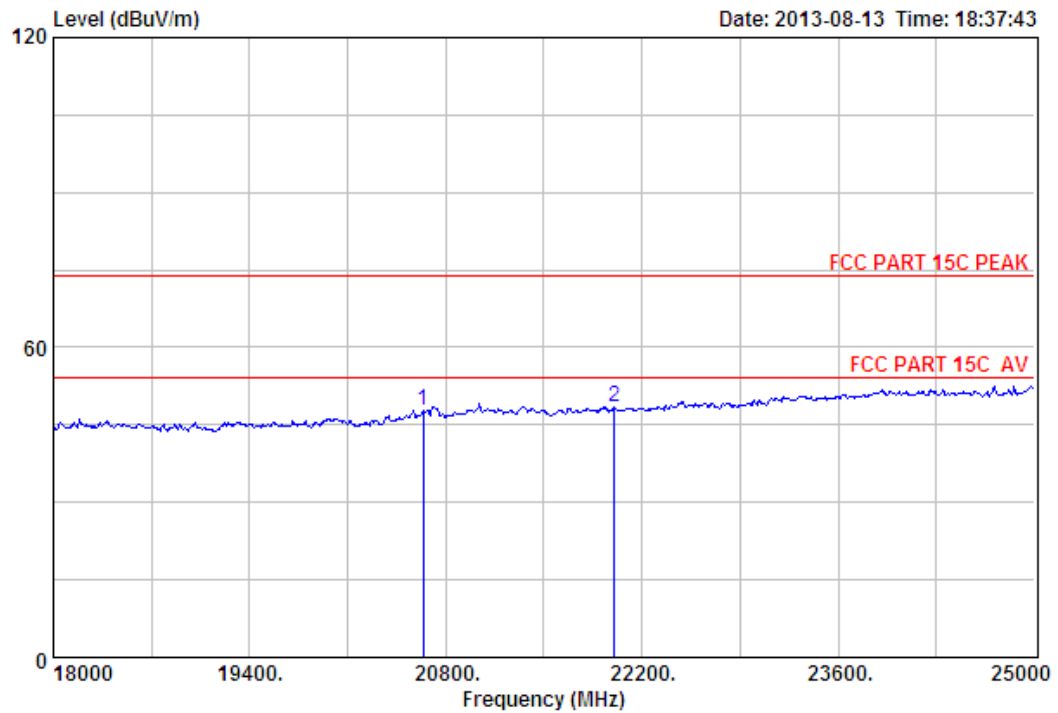

Site no. : 3m Chamber Data no. : 432
 Dis. / Ant. : 3m ANT ABOVE 18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : 8-DPSK TX 2441MHz
 Adapter 2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Emission				Remark
					Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	
1	20639.00	46.08	19.97	36.12	17.96	47.89	74.00	26.11	Peak
2	22004.00	45.70	20.57	34.90	17.05	48.42	74.00	25.58	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

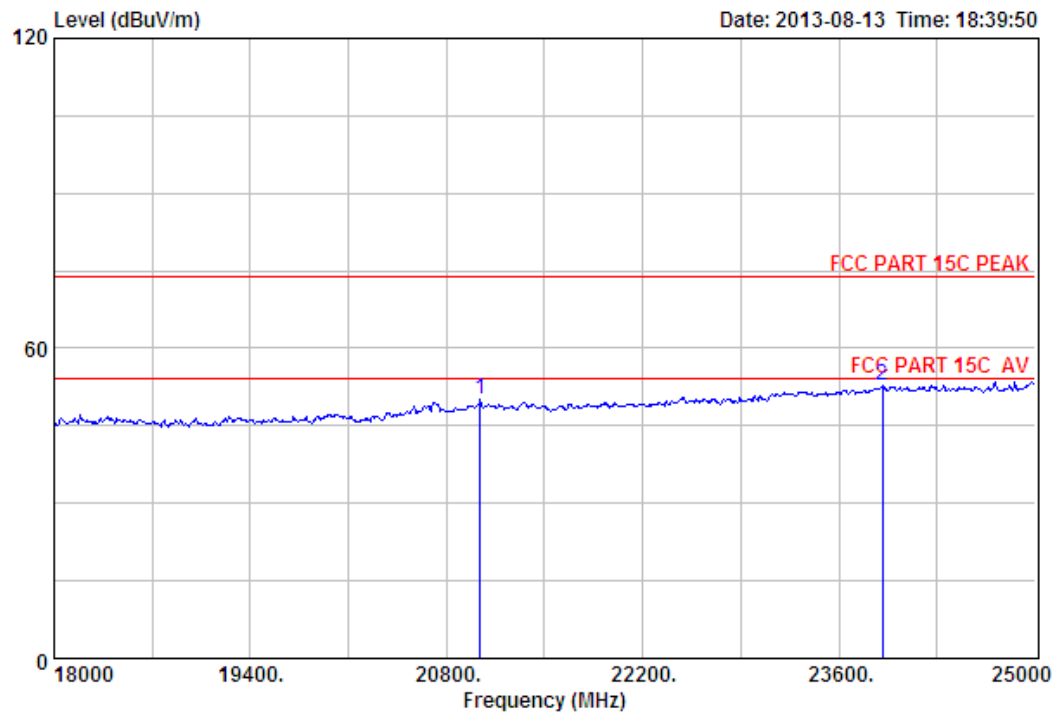

Site no. : 3m Chamber Data no. : 433
 Dis. / Ant. : 3m ANT ABVOE 18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : 8-DPSK TX 2441MHz
 Adapter 2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Emission				Remark
					Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	
1	21038.00	46.27	20.15	35.76	19.43	50.09	74.00	23.91	Peak
2	23908.00	45.62	21.96	32.90	18.08	52.76	74.00	21.24	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

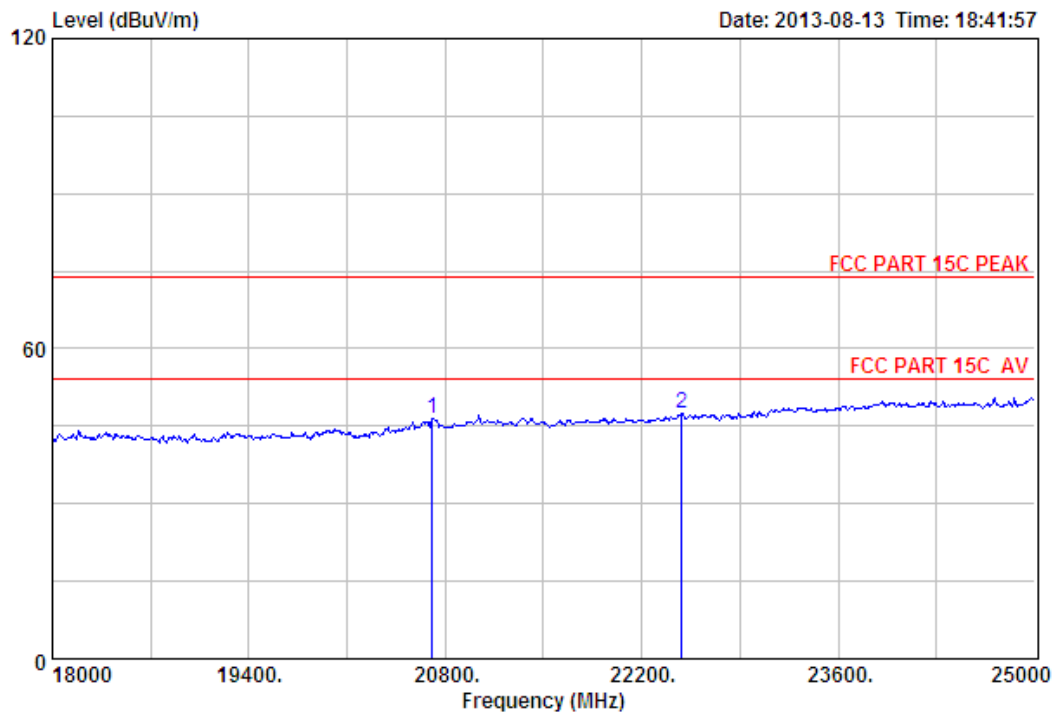

Site no. : 3m Chamber Data no. : 434
 Dis. / Ant. : 3m ANT ABVOE 18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : 8-DPSK TX 2480MHz
 Adapter 2

	Freq. (MHz)	Ant.	Cable	Amp	Emission				Remark
		Factor (dB/m)	Loss (dB)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	
1	20709.00	46.12	20.00	36.07	16.48	46.53	74.00	27.47	Peak
2	22487.00	45.80	20.85	34.40	15.08	47.33	74.00	26.67	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

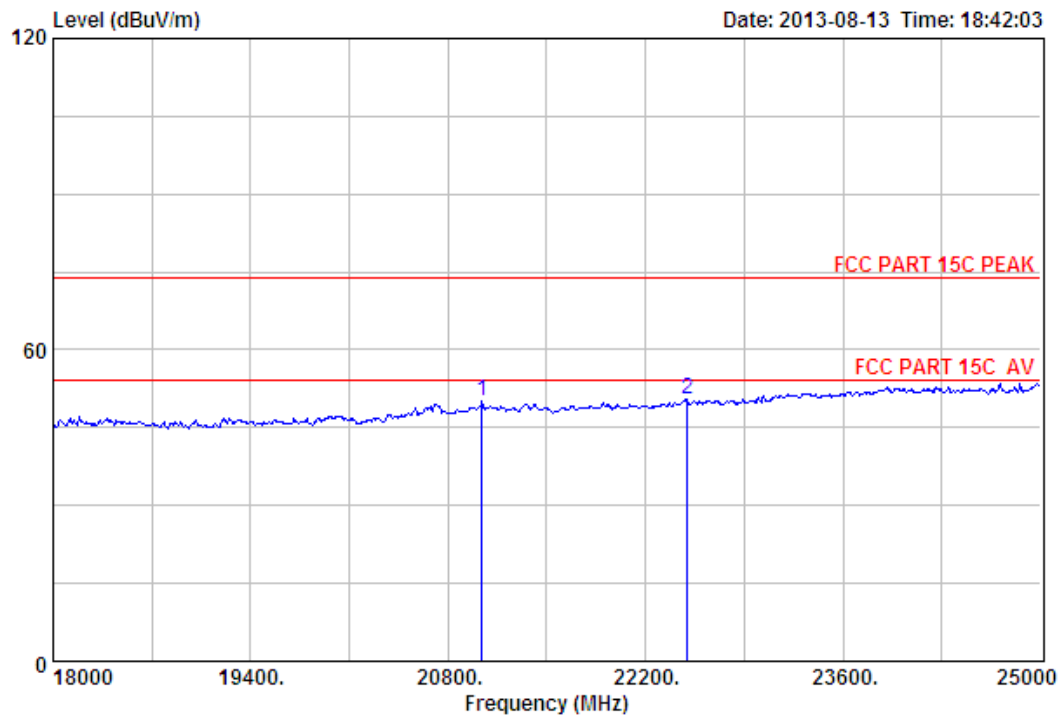

Site no. : 3m Chamber Data no. : 435
 Dis. / Ant. : 3m ANT ABOVE 18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : 8-DPSK TX 2480MHz
 Adapter 2

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	21038.00	46.27	20.15	35.76	19.43	50.09	74.00	23.91	Peak
2	22494.00	45.80	20.85	34.38	18.13	50.40	74.00	23.60	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

9. BAND EDGE COMPLIANCE

9.1. Limit

All the lower and upper band-edges emissions appearing within 2310MHz to 2390MHz and 2483.5MHz to 2500MHz restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation frequency band 2400MHz to 2483.5MHz shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

9.2. Block Diagram of Test setup

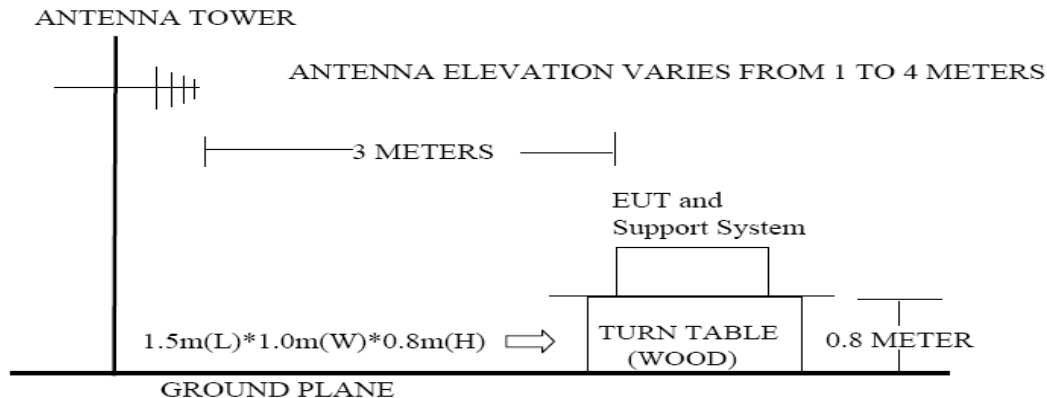

9.3. Test Procedure

EUT was placed on a turn table, which is 0.8 meter high above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. Power on the EUT and let it working in test mode, then test it. EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Both horizontal and vertical polarization of the antenna are set on test.

Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of emissions

- (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
- (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO


9.4. Test Result

EUT: Home theater with wireless subwoofer
M/N: SoloCinemaStudio
Power: DC 24V From Adapter Input AC 120V/60Hz
Test date: 2013-08-12 Test site: 3m Chamber Tested by: Tony Tang
Test mode: Tx Mode (Hopping On & No Hopping)
Pass

Note: 1、 For emissions above 1GHz, if peak level comply with average limit, then the average level is deemed to comply with average limit.

- 2、 The frequency 2402MHz 、 2441MHz and 2480MHz is fundamental frequency which no limit, the limit on plots is automatically generated by the software, it's not fundamental limit, we can't remove it.


9.5. Test Data

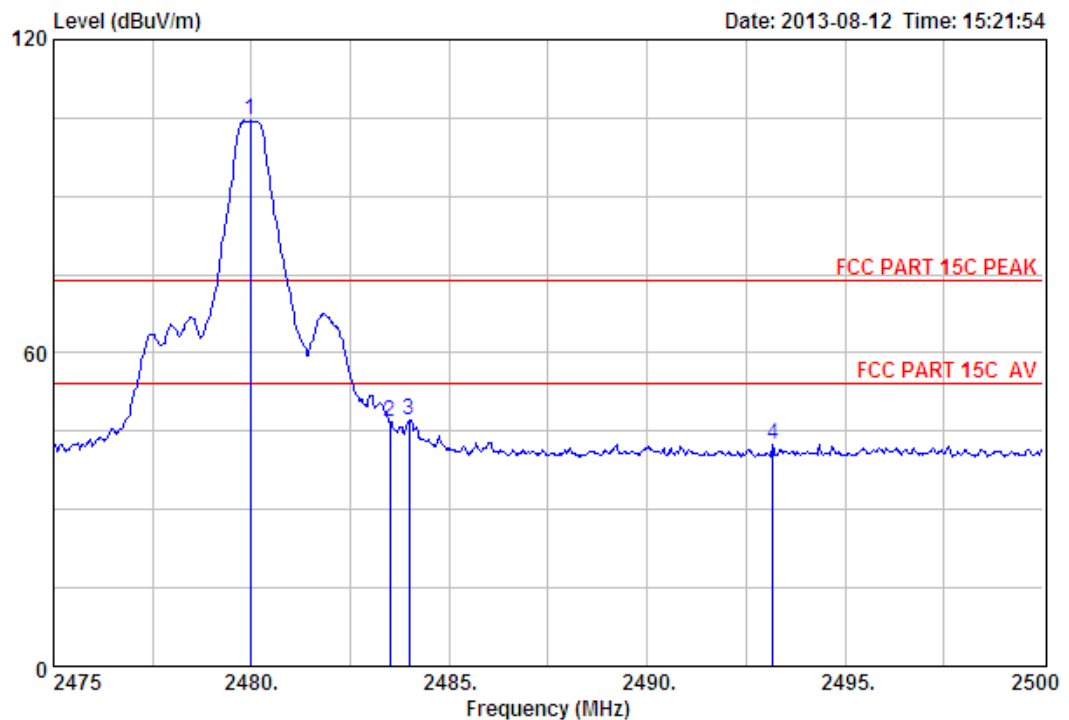

Site no. : 3m Chamber Data no. : 340
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : GFSK TX 2480MHz(No Hopping)
 Adapter 1

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2479.98	27.58	6.71	34.03	104.26	104.52	74.00	-30.52	Peak
2	2483.50	27.58	6.71	34.03	46.57	46.83	74.00	27.17	Peak
3	2483.98	27.58	6.71	34.03	46.84	47.10	74.00	26.90	Peak
4	2493.18	27.58	6.73	34.03	42.25	42.53	74.00	31.47	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

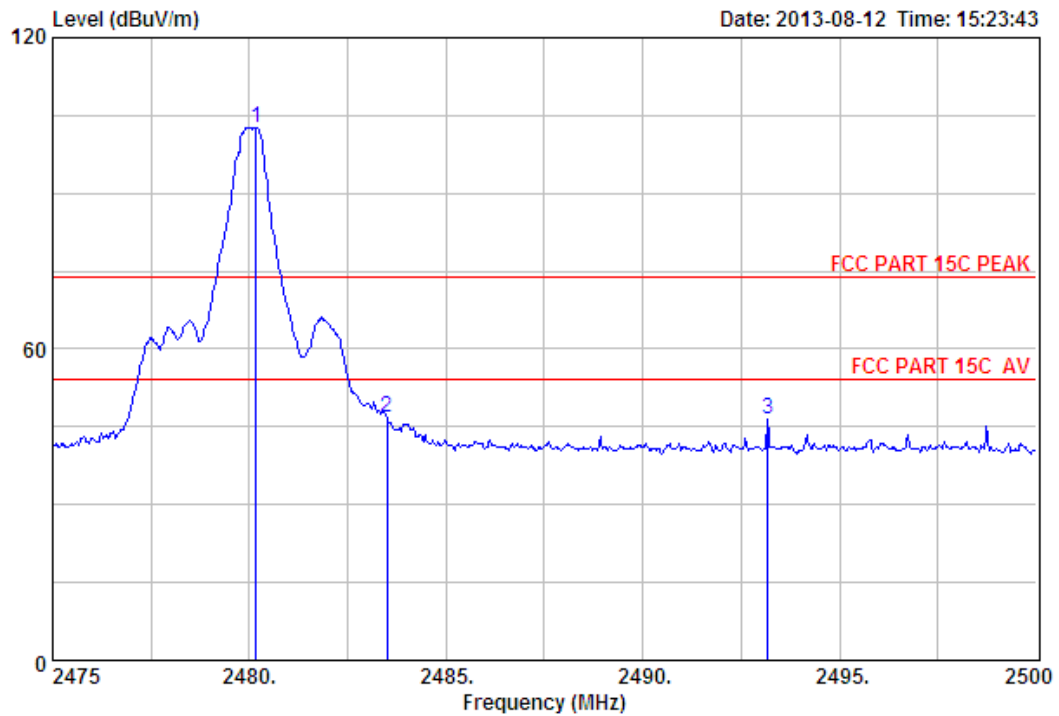

Site no. : 3m Chamber Data no. : 341
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : GFSK TX 2480MHz (No Hopping)
 Adapter 1

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission		Limits (dBuV/m)	Margin (dB)	Remark
					Level				
1	2480.18	27.58	6.71	34.03	102.52	102.78	74.00	-28.78	Peak
2	2483.50	27.58	6.71	34.03	46.39	46.65	74.00	27.35	Peak
3	2493.18	27.58	6.73	34.03	46.18	46.46	74.00	27.54	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

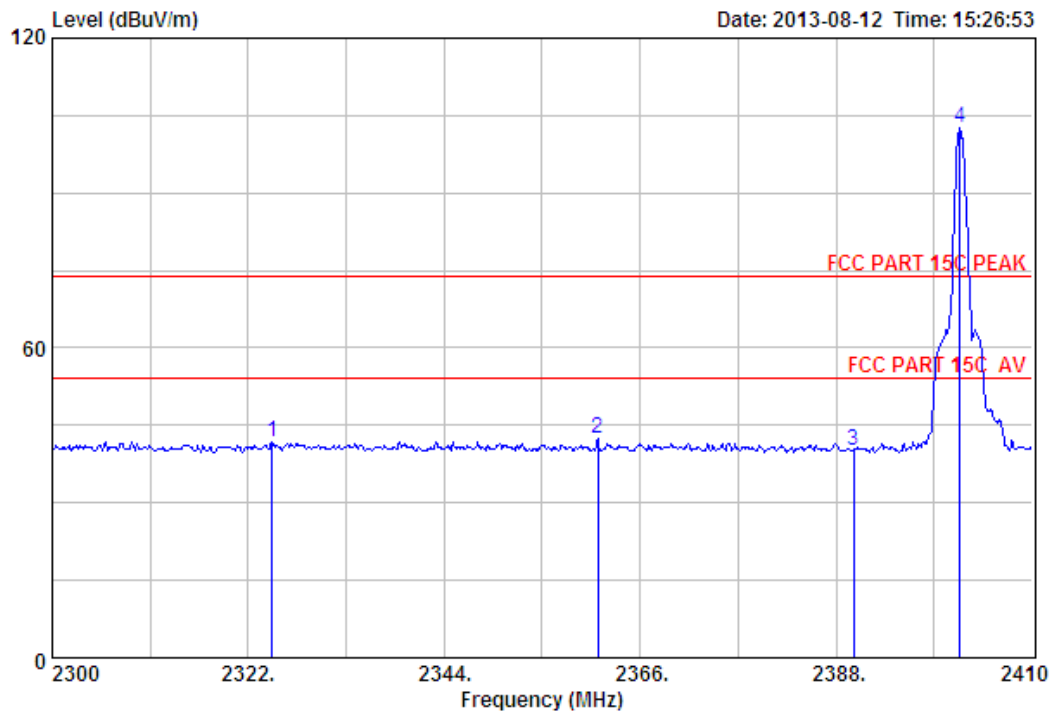

Site no. : 3m Chamber Data no. : 342
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : GFSK TX 2402MHz(No Hopping)
 Adapter 1

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2324.64	27.73	6.54	34.23	41.60	41.64	74.00	32.36	Peak
2	2361.27	27.67	6.58	34.20	42.37	42.42	74.00	31.58	Peak
3	2390.00	27.64	6.62	34.19	40.18	40.25	74.00	33.75	Peak
4	2401.86	27.61	6.62	34.18	102.60	102.65	74.00	-28.65	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

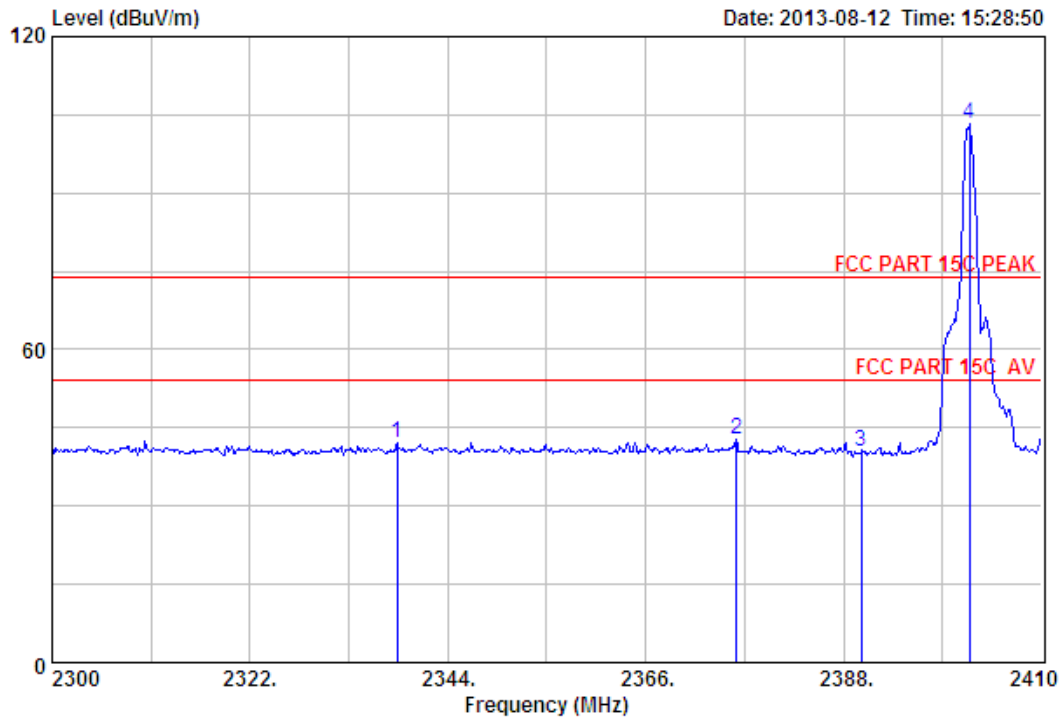

Site no. : 3m Chamber Data no. : 343
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : GFSK TX 2402MHz(No Hopping)
 Adapter 1

	Ant.	Cable	Amp	Emission					
Freq.	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark	
(MHz)	(dB/m)	(dB)	(dB)	(dBUV)	(dBUV/m)	(dBUV/m)	(dB)		
1	2338.39	27.73	6.56	34.23	42.00	42.06	74.00	31.94	Peak
2	2376.12	27.64	6.60	34.19	42.89	42.94	74.00	31.06	Peak
3	2390.00	27.64	6.62	34.19	40.38	40.45	74.00	33.55	Peak
4	2401.97	27.61	6.62	34.18	103.39	103.44	74.00	-29.44	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

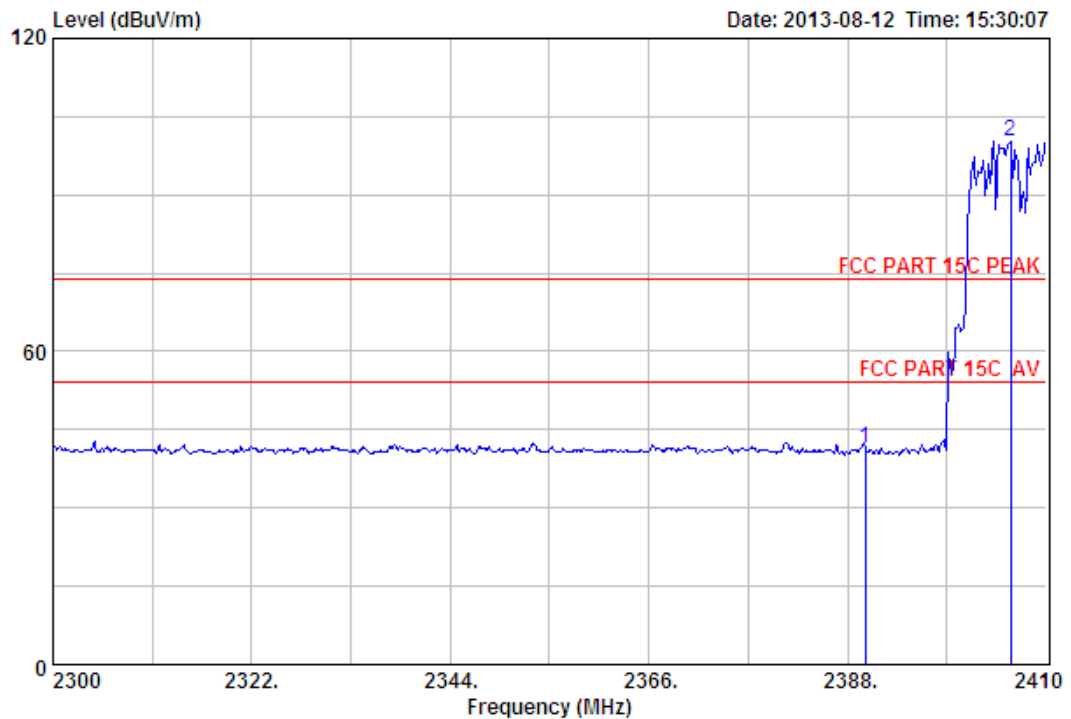

Site no. : 3m Chamber Data no. : 344
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : GFSK TX 2402MHz(Hopping On)
 Adapter 1

	Ant.	Cable	Amp	Emission					
Freq.	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark	
(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		
1	2390.00	27.64	6.62	34.19	41.47	41.54	74.00	32.46	Peak
2	2406.04	27.61	6.64	34.18	100.30	100.37	74.00	-26.37	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

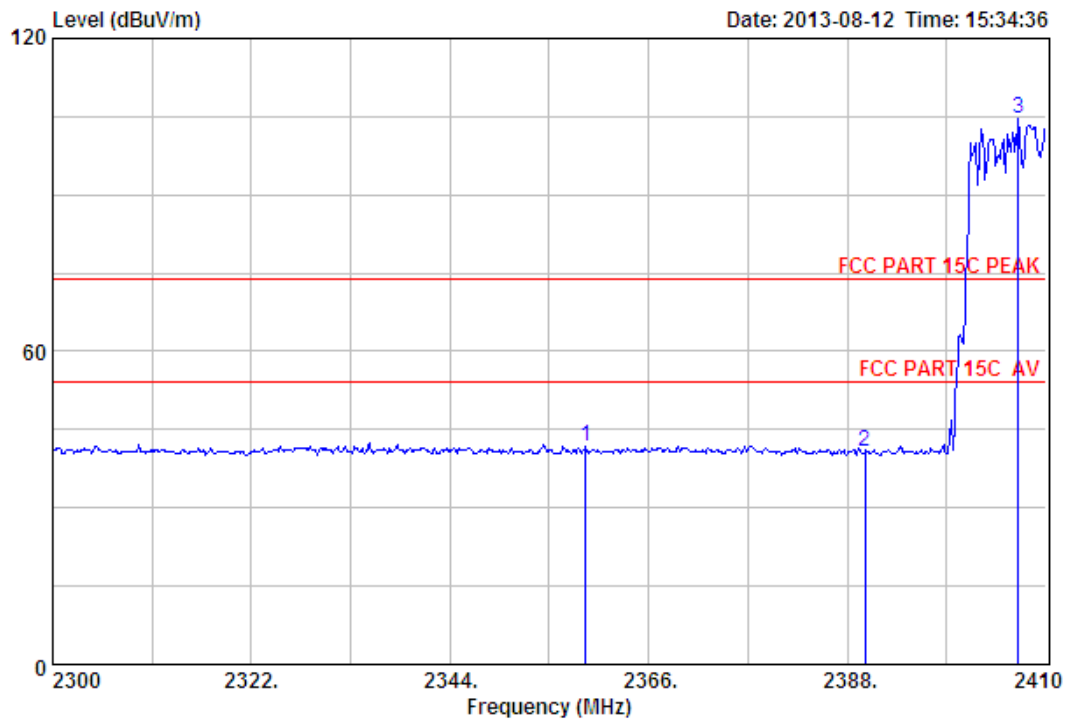

Site no. : 3m Chamber Data no. : 345
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : GFSK TX 2402MHz (Hopping On)
 Adapter 1

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2359.07	27.67	6.58	34.20	41.76	41.81	74.00	32.19	Peak
2	2390.00	27.64	6.62	34.19	40.74	40.81	74.00	33.19	Peak
3	2406.92	27.61	6.64	34.18	104.48	104.55	74.00	-30.55	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

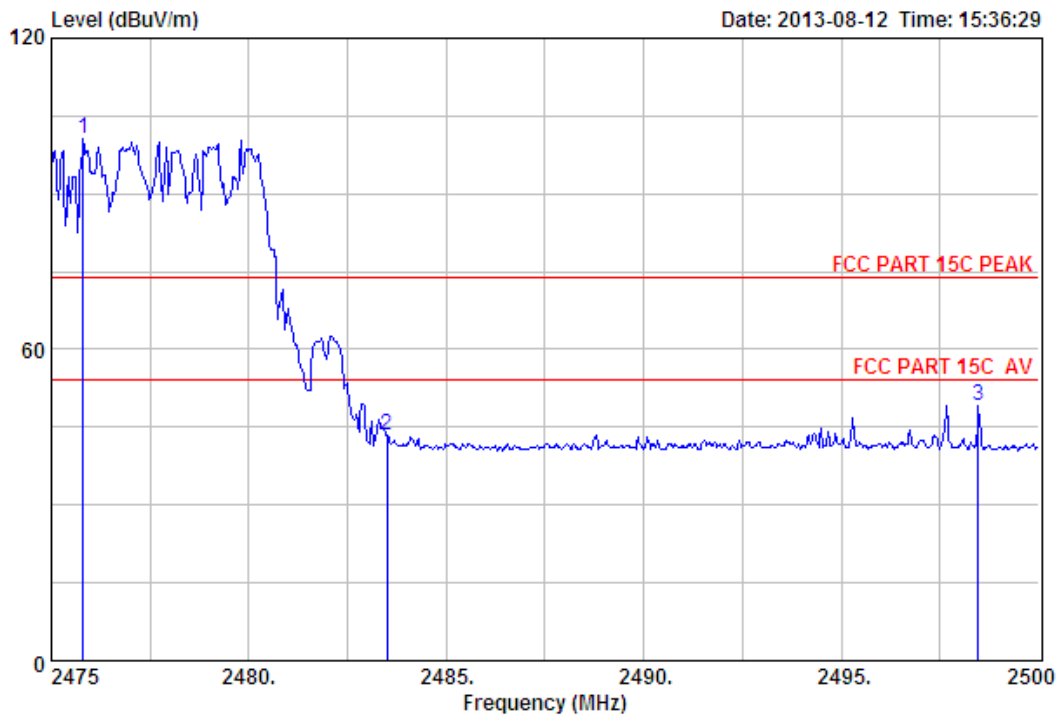

Site no. : 3m Chamber Data no. : 346
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : GFSK TX 2480MHz(Hopping On)
 Adapter 1

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2475.80	27.58	6.71	34.06	100.22	100.45	74.00	-26.45	Peak
2	2483.50	27.58	6.71	34.03	43.17	43.43	74.00	30.57	Peak
3	2498.48	27.57	6.73	34.00	48.75	49.05	74.00	24.95	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

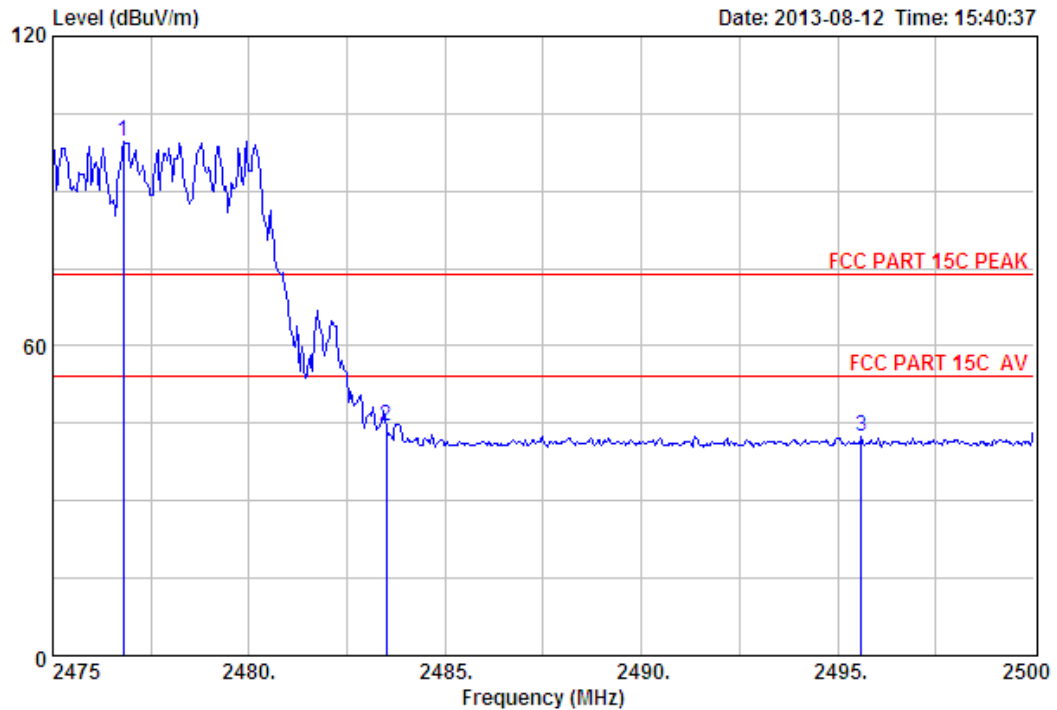

Site no. : 3m Chamber Data no. : 347
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : GFSK TX 2480MHz(Hopping On)
 Adapter 1

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2476.80	27.58	6.71	34.06	99.34	99.57	74.00	-25.57	Peak
2	2483.50	27.58	6.71	34.03	44.28	44.54	74.00	29.46	Peak
3	2495.60	27.57	6.73	34.00	42.06	42.36	74.00	31.64	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

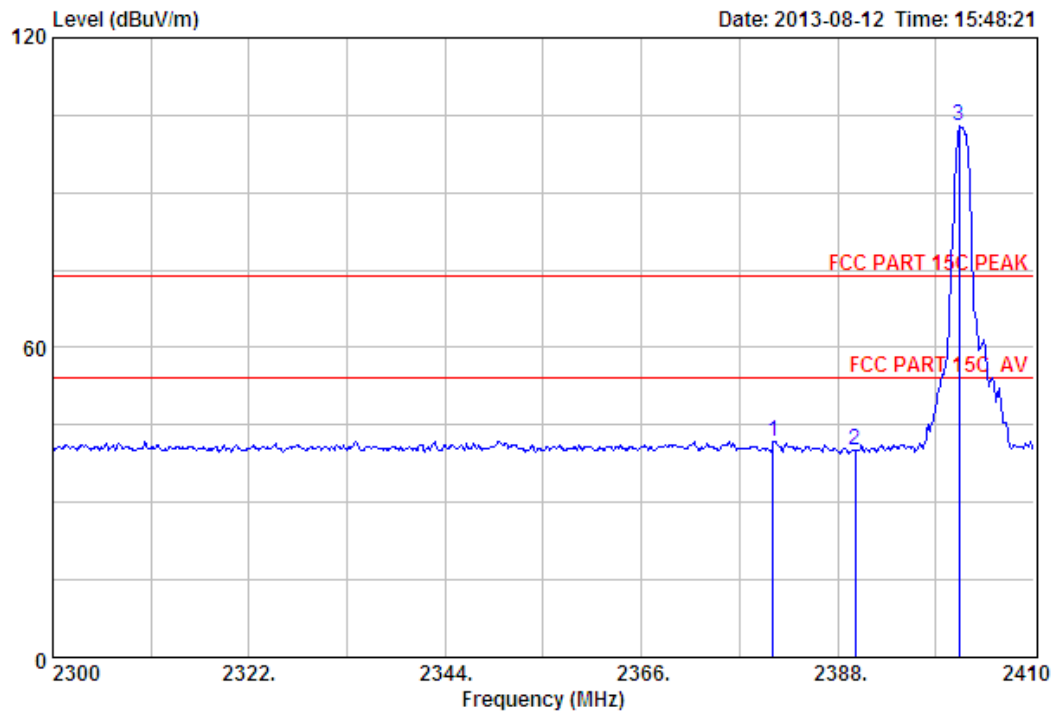

Site no. : 3m Chamber Data no. : 348
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : 8-DPSK TX 2402MHz(No Hopping)
 Adapter 1

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2380.74	27.64	6.60	34.19	41.89	41.94	74.00	32.06	Peak
2	2390.00	27.64	6.62	34.19	40.12	40.19	74.00	33.81	Peak
3	2401.64	27.61	6.62	34.18	102.77	102.82	74.00	-28.82	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

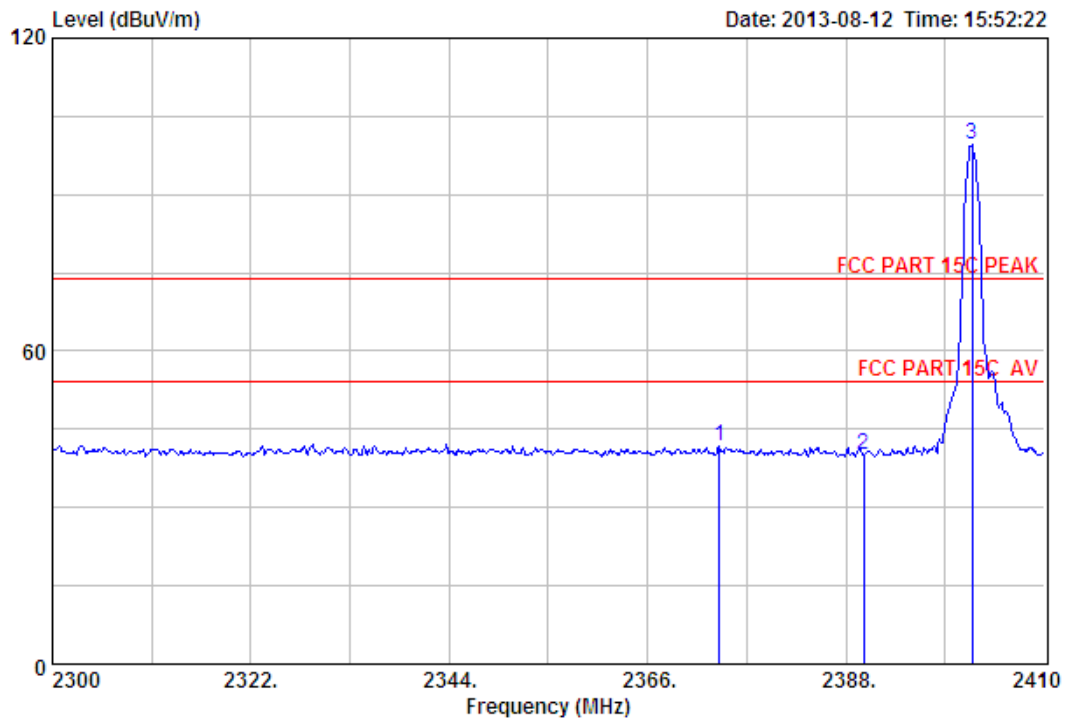

Site no. : 3m Chamber Data no. : 349
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : 8-DPSK TX 2402MHz(No Hopping)
 Adapter 1

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2373.92	27.64	6.60	34.19	41.57	41.62	74.00	32.38	Peak
2	2390.00	27.64	6.62	34.19	40.02	40.09	74.00	33.91	Peak
3	2401.97	27.61	6.62	34.18	99.46	99.51	74.00	-25.51	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

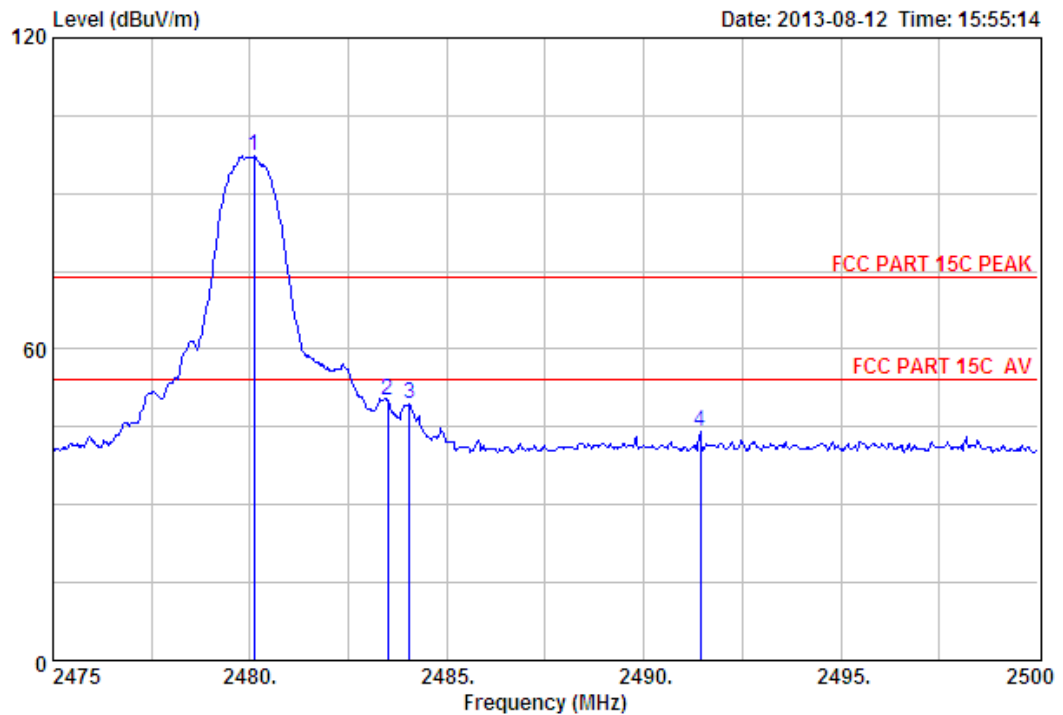

Site no. : 3m Chamber Data no. : 350
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : 8-DPSK TX 2480MHz (No Hopping)
 Adapter 1

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2480.10	27.58	6.71	34.03	96.95	97.21	74.00	-23.21	Peak
2	2483.50	27.58	6.71	34.03	49.81	50.07	74.00	23.93	Peak
3	2484.05	27.58	6.71	34.03	49.29	49.55	74.00	24.45	Peak
4	2491.43	27.58	6.73	34.03	43.87	44.15	74.00	29.85	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

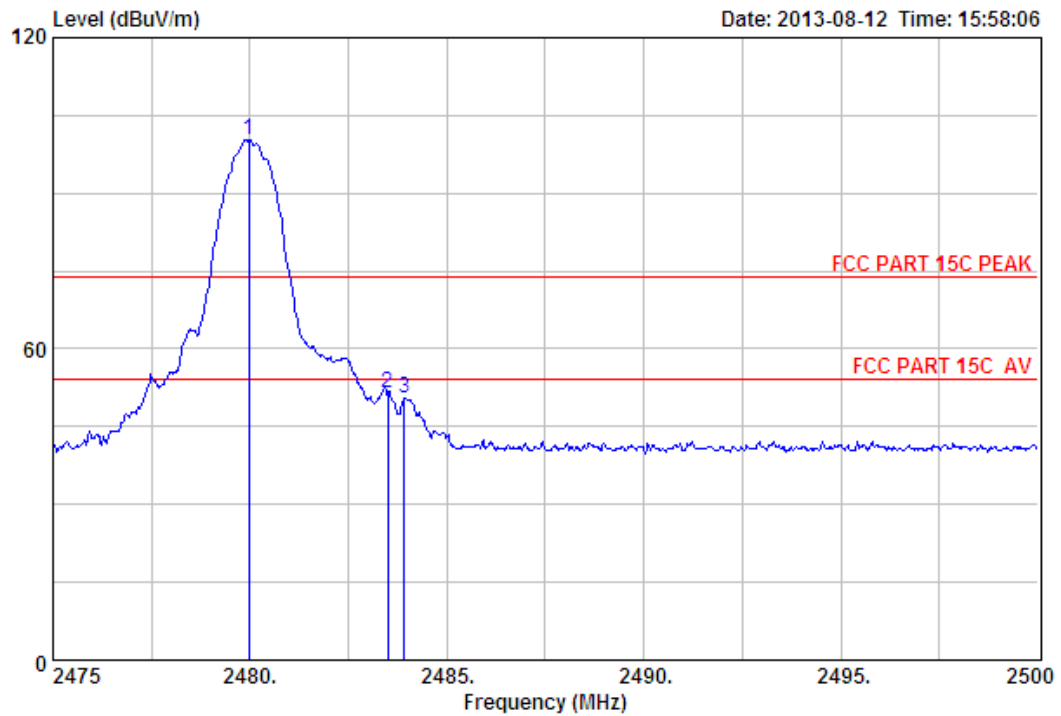

Site no. : 3m Chamber Data no. : 351
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : 8-DPSK TX 2480MHz(No Hopping)
 Adapter 1

		Ant.	Cable	Amp		Emission				
	Freq.	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark	
	(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		
1	2479.98	27.58	6.71	34.03	100.15	100.41	74.00	-26.41	Peak	
2	2483.50	27.58	6.71	34.03	51.16	51.42	74.00	22.58	Peak	
3	2483.93	27.58	6.71	34.03	50.13	50.39	74.00	23.61	Peak	


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

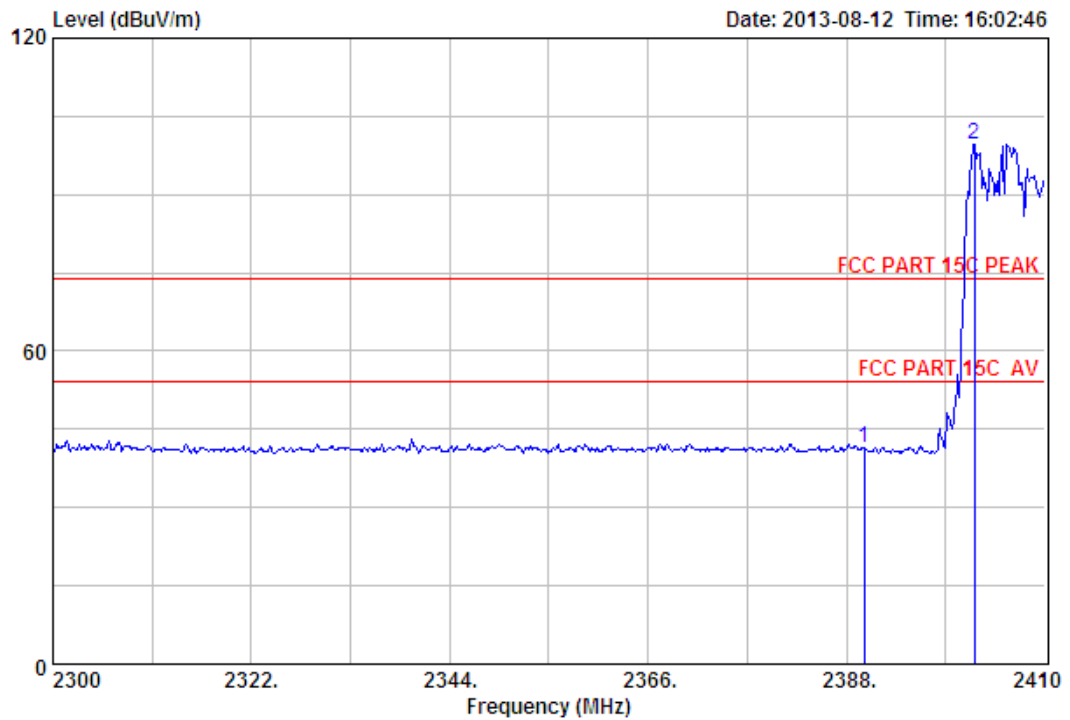

Site no. : 3m Chamber Data no. : 352
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : 8-DPSK TX 2402MHz (Hopping On)
 Adapter 1

		Ant.	Cable	Amp	Emission				
	Freq.	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2390.00	27.64	6.62	34.19	41.22	41.29	74.00	32.71	Peak
2	2402.19	27.61	6.62	34.18	99.46	99.51	74.00	-25.51	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

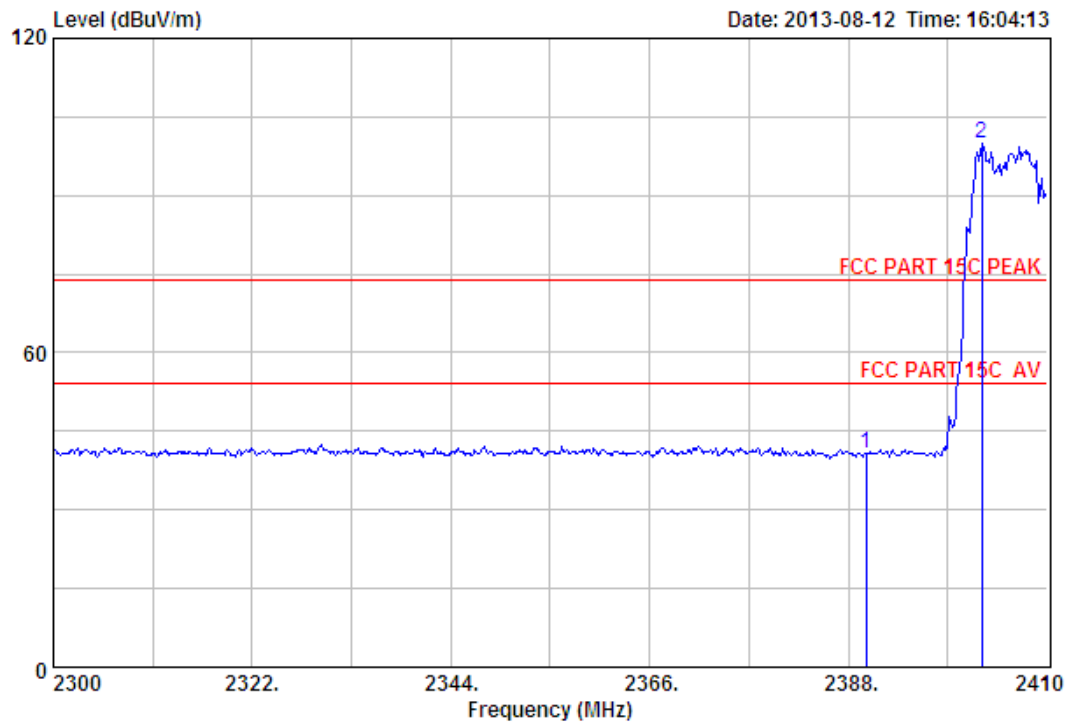

Site no. : 3m Chamber Data no. : 353
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : 8-DPSK TX 2402MHz (Hopping On)
 Adapter 1

	Ant.	Cable	Amp		Emission				
Freq.	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark	
(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		
1	2390.00	27.64	6.62	34.19	40.60	40.67	74.00	33.33	Peak
2	2402.74	27.61	6.64	34.18	99.87	99.94	74.00	-25.94	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

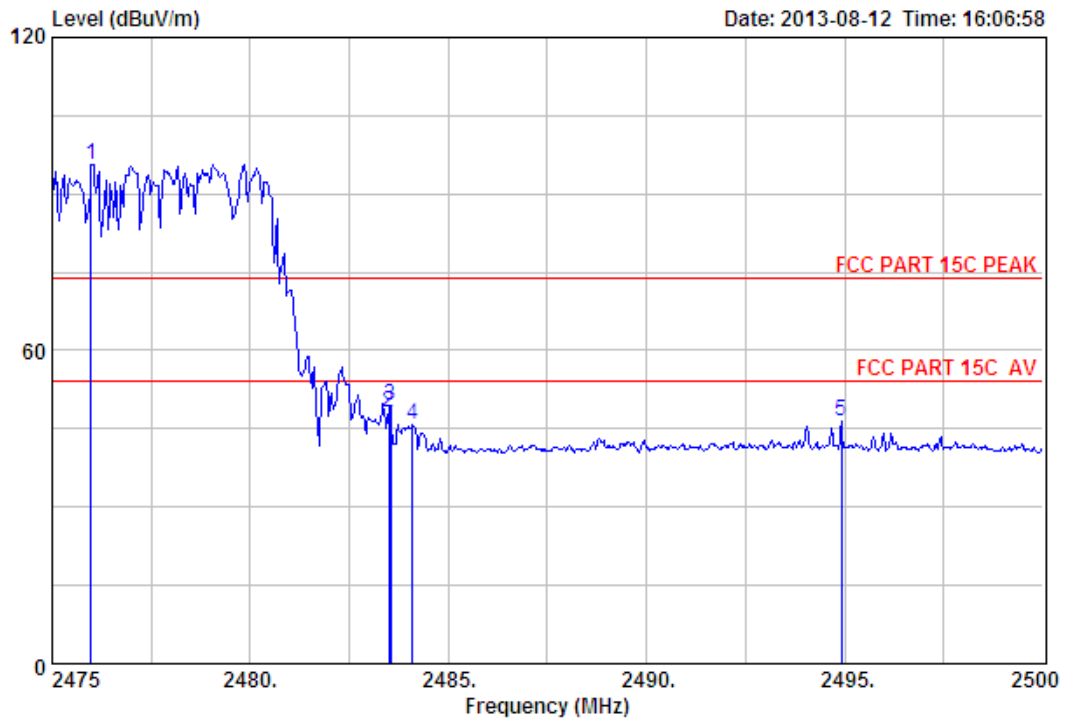

Site no. : 3m Chamber Data no. : 354
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : 8-DPSK TX 2480MHz(Hopping On)
 Adapter 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2475.98	27.58	6.71	34.06	95.53	95.76	74.00	-21.76	Peak
2	2483.50	27.58	6.71	34.03	47.97	48.23	74.00	25.77	Peak
3	2483.55	27.58	6.71	34.03	49.08	49.34	74.00	24.66	Peak
4	2484.10	27.58	6.71	34.03	45.65	45.91	74.00	28.09	Peak
5	2494.93	27.57	6.73	34.00	46.08	46.38	74.00	27.62	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

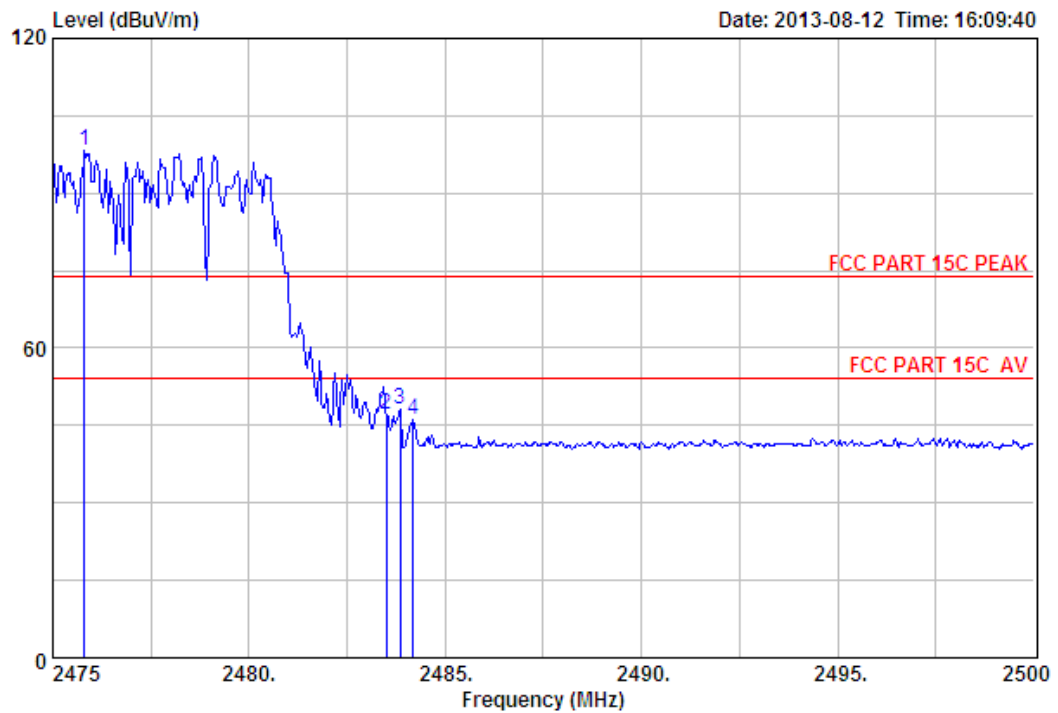

Site no. : 3m Chamber Data no. : 355
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : 8-DPSK TX 2480MHz (Hopping On)
 Adapter 1

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2475.80	27.58	6.71	34.06	98.11	98.34	74.00	-24.34	Peak
2	2483.50	27.58	6.71	34.03	46.94	47.20	74.00	26.80	Peak
3	2483.85	27.58	6.71	34.03	47.86	48.12	74.00	25.88	Peak
4	2484.18	27.58	6.71	34.03	45.78	46.04	74.00	27.96	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

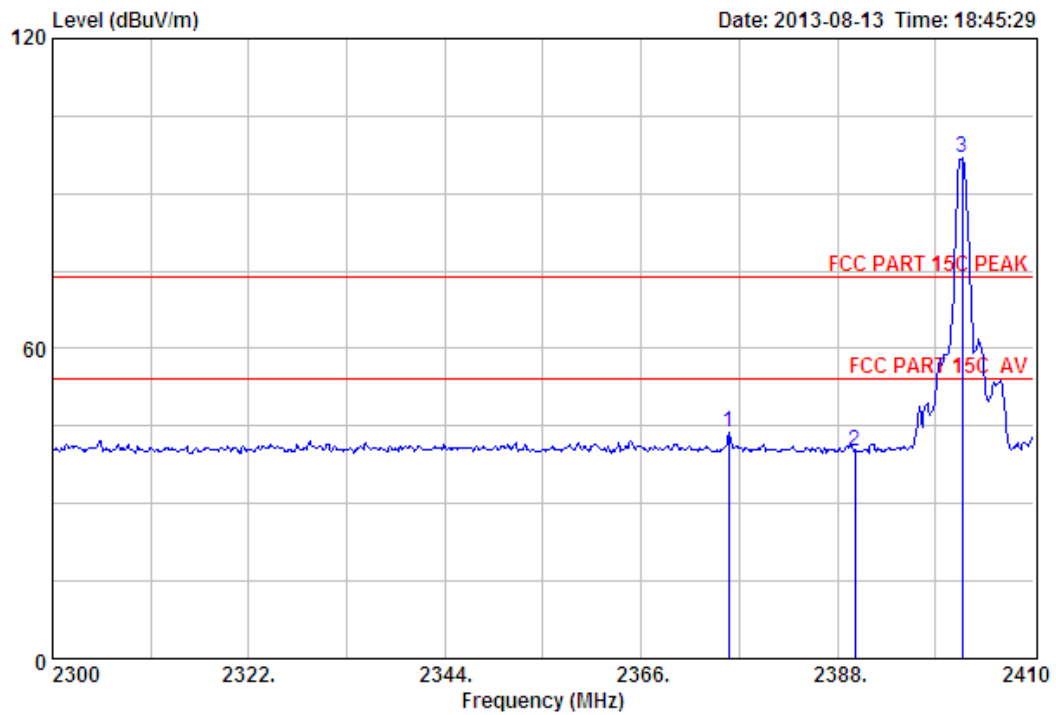

Site no. : 3m Chamber Data no. : 436
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : GFSK TX 2402MHz(No Hopping)
 Adapter 2

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2375.79	27.64	6.60	34.19	43.69	43.74	74.00	30.26	Peak
2	2390.00	27.64	6.62	34.19	40.09	40.16	74.00	33.84	Peak
3	2401.97	27.61	6.62	34.18	96.84	96.89	74.00	-22.89	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

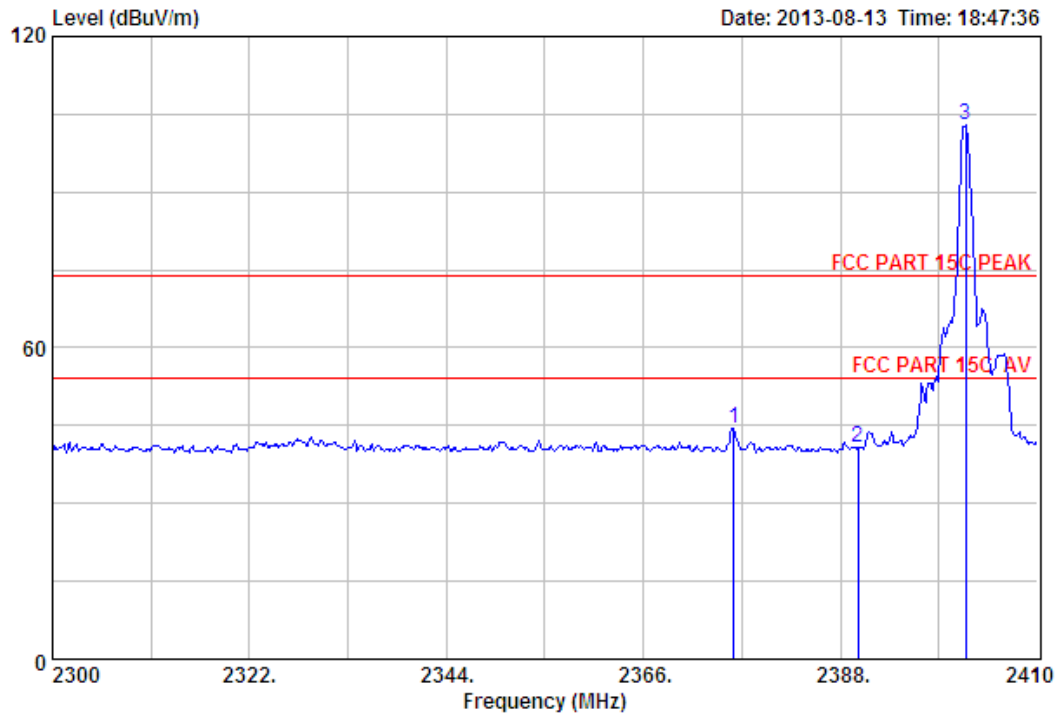

Site no. : 3m Chamber Data no. : 437
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : GFSK TX 2402MHz(No Hopping)
 Adapter 2

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission		Limits (dBuV/m)	Margin (dB)	Remark
					Level				
1	2376.12	27.64	6.60	34.19	44.34	44.39	74.00	29.61	Peak
2	2390.00	27.64	6.62	34.19	40.62	40.69	74.00	33.31	Peak
3	2401.97	27.61	6.62	34.18	102.84	102.89	74.00	-28.89	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

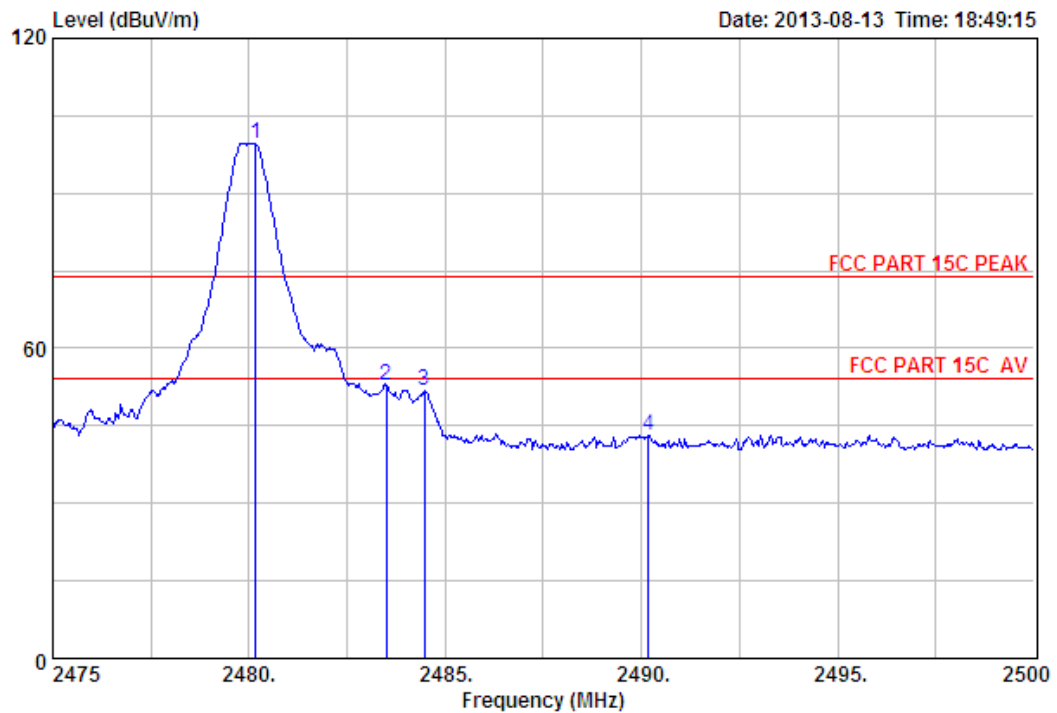

Site no. : 3m Chamber Data no. : 438
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6°;Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : GFSK TX 2480MHz(No Hopping)
 Adapter 2

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2480.18	27.58	6.71	34.03	99.51	99.77	74.00	-25.77	Peak
2	2483.50	27.58	6.71	34.03	52.67	52.93	74.00	21.07	Peak
3	2484.48	27.58	6.71	34.03	51.67	51.93	74.00	22.07	Peak
4	2490.18	27.58	6.73	34.03	42.86	43.14	74.00	30.86	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

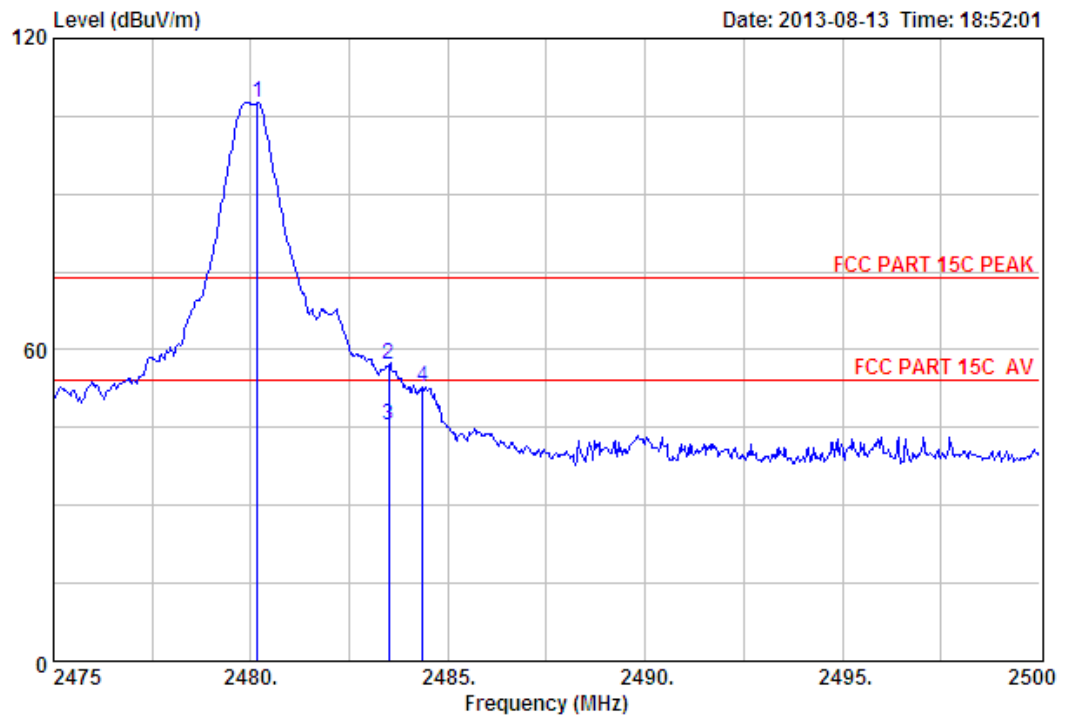

Site no. : 3m Chamber Data no. : 439
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : GFSK TX 2480MHz(No Hopping)
 Adapter 2

		Ant.	Cable	Amp	Emission				
Freq.	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark	
(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		
1	2480.18	27.58	6.71	34.03	107.48	107.74	74.00	-33.74	Peak
2	2483.50	27.58	6.71	34.03	56.77	57.03	74.00	16.97	Peak
3	2483.50	27.58	6.71	34.03	45.10	45.36	54.00	8.64	Average
4	2484.35	27.58	6.71	34.03	52.66	52.92	74.00	21.08	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

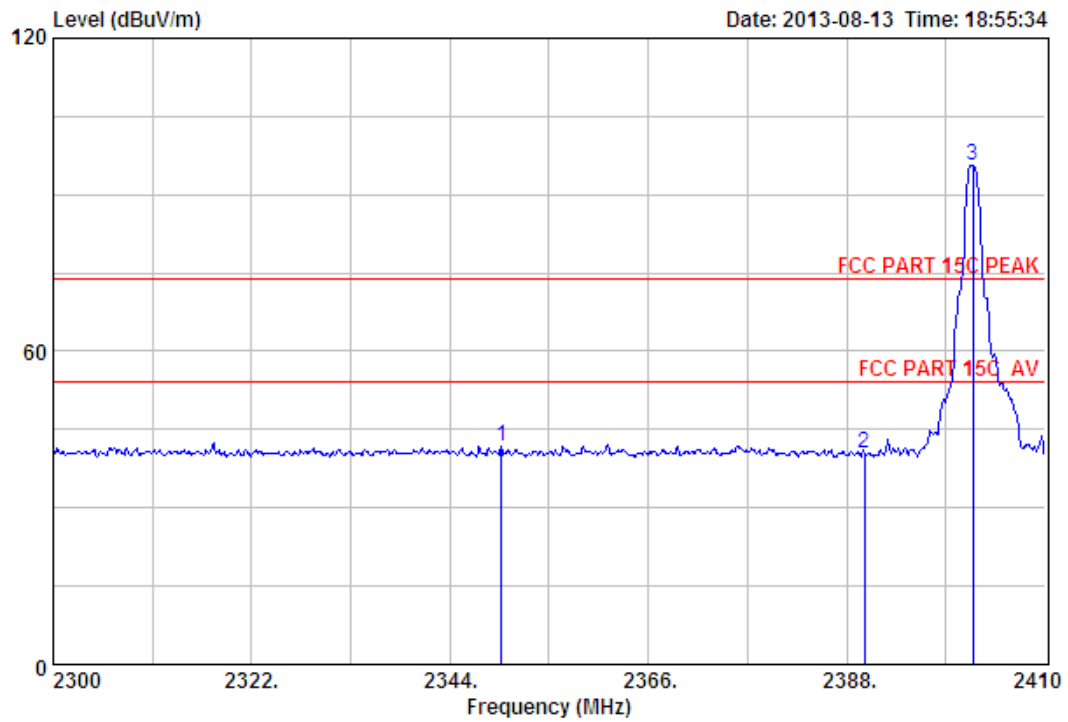

Site no. : 3m Chamber Data no. : 440
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : 8-DPSK TX 2402MHz (No Hopping)
 Adapter 2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Emission				
					Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2349.72	27.70	6.56	34.22	41.88	41.92	74.00	32.08	Peak
2	2390.00	27.64	6.62	34.19	40.53	40.60	74.00	33.40	Peak
3	2401.97	27.61	6.62	34.18	95.47	95.52	74.00	-21.52	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

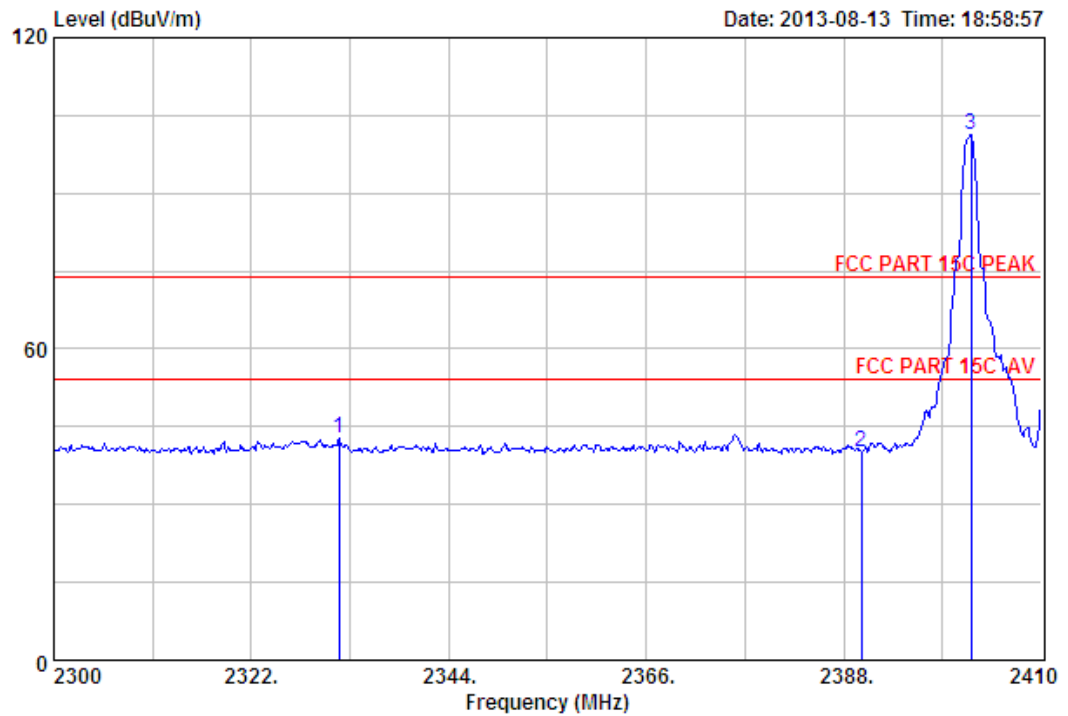

Site no. : 3m Chamber Data no. : 441
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6°;Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : 8-DPSK TX 2402MHz(No Hopping)
 Adapter 2

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission		Limits (dBuV/m)	Margin (dB)	Remark
					Level				
1	2331.79	27.73	6.54	34.23	42.75	42.79	74.00	31.21	Peak
2	2390.00	27.64	6.62	34.19	40.19	40.26	74.00	33.74	Peak
3	2402.19	27.61	6.62	34.18	101.22	101.27	74.00	-27.27	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

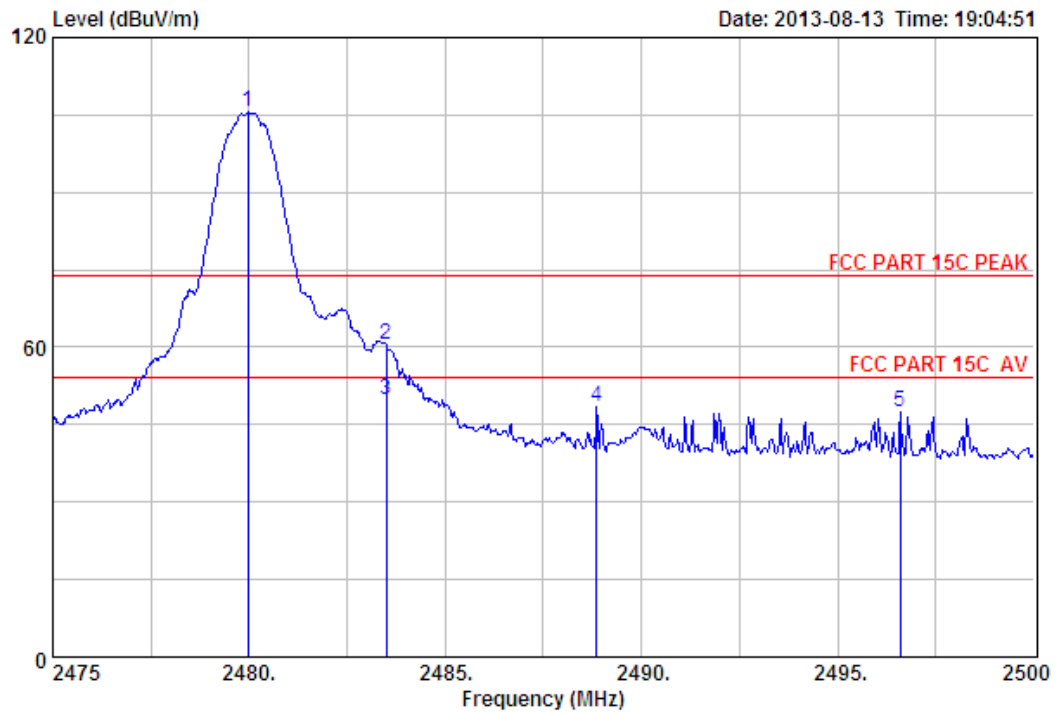

Site no. : 3m Chamber Data no. : 442
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : 8-DPSK TX 2480MHz (No Hopping)
 Adapter 2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2479.98	27.58	6.71	34.03	105.30	105.56	74.00	-31.56	Peak
2	2483.50	27.58	6.71	34.03	60.19	60.45	74.00	13.55	Peak
3	2483.50	27.58	6.71	34.03	49.61	49.87	54.00	4.13	Average
4	2488.85	27.58	6.73	34.03	48.15	48.43	74.00	25.57	Peak
5	2496.60	27.57	6.73	34.00	47.18	47.48	74.00	26.52	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

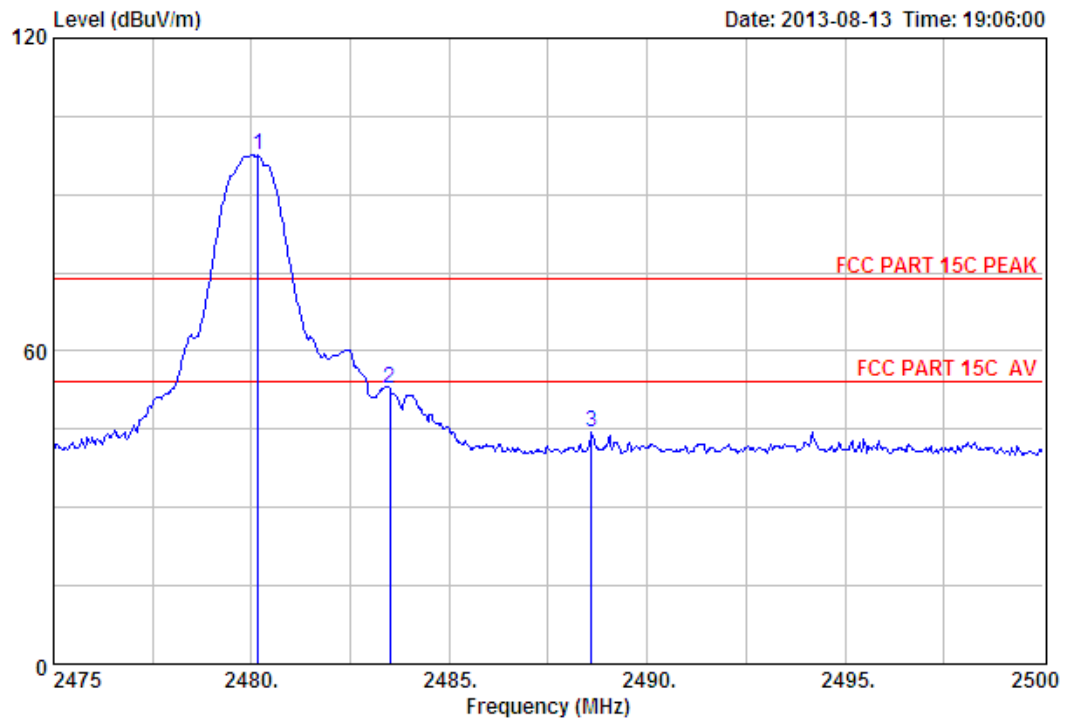

Site no. : 3m Chamber Data no. : 443
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : 8-DPSK TX 2480MHz (No Hopping)
 Adapter 2

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2480.18	27.58	6.71	34.03	97.30	97.56	74.00	-23.56	Peak
2	2483.50	27.58	6.71	34.03	52.49	52.75	74.00	21.25	Peak
3	2488.60	27.58	6.73	34.03	44.21	44.49	74.00	29.51	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

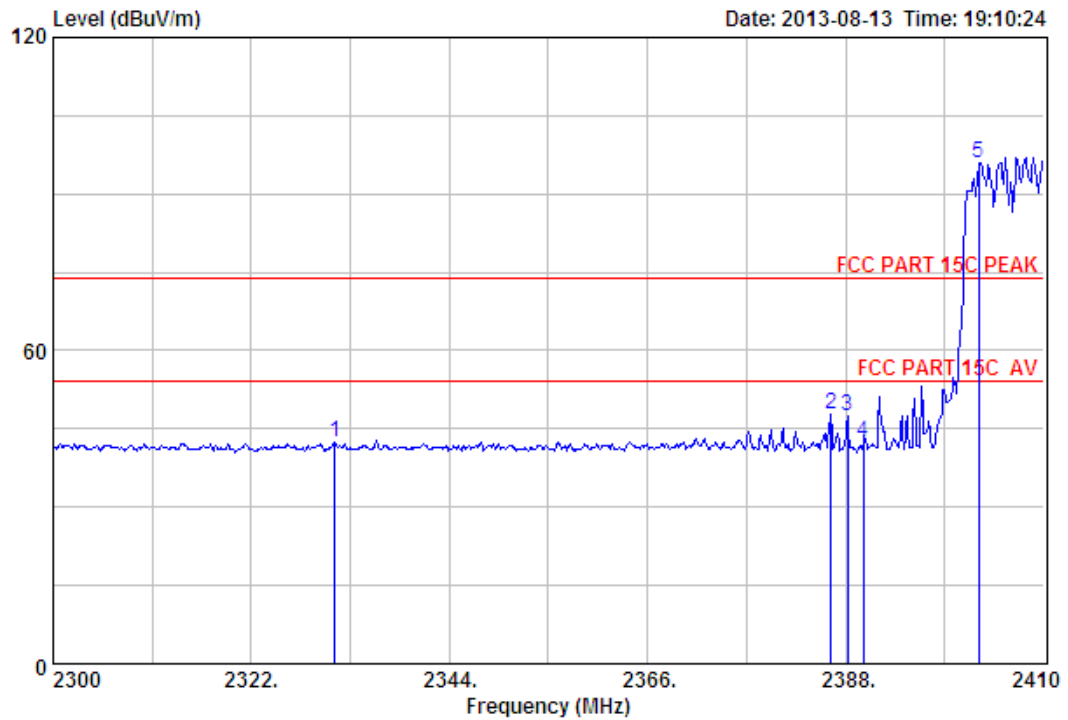

Site no. : 3m Chamber Data no. : 444
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : GFSK (Hopping On)
 Adapter 2

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2331.24	27.73	6.54	34.23	42.45	42.49	74.00	31.51	Peak
2	2386.35	27.64	6.62	34.19	47.66	47.73	74.00	26.27	Peak
3	2388.22	27.64	6.62	34.19	47.51	47.58	74.00	26.42	Peak
4	2390.00	27.64	6.62	34.19	42.25	42.32	74.00	31.68	Peak
5	2402.74	27.61	6.64	34.18	95.97	96.04	74.00	-22.04	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

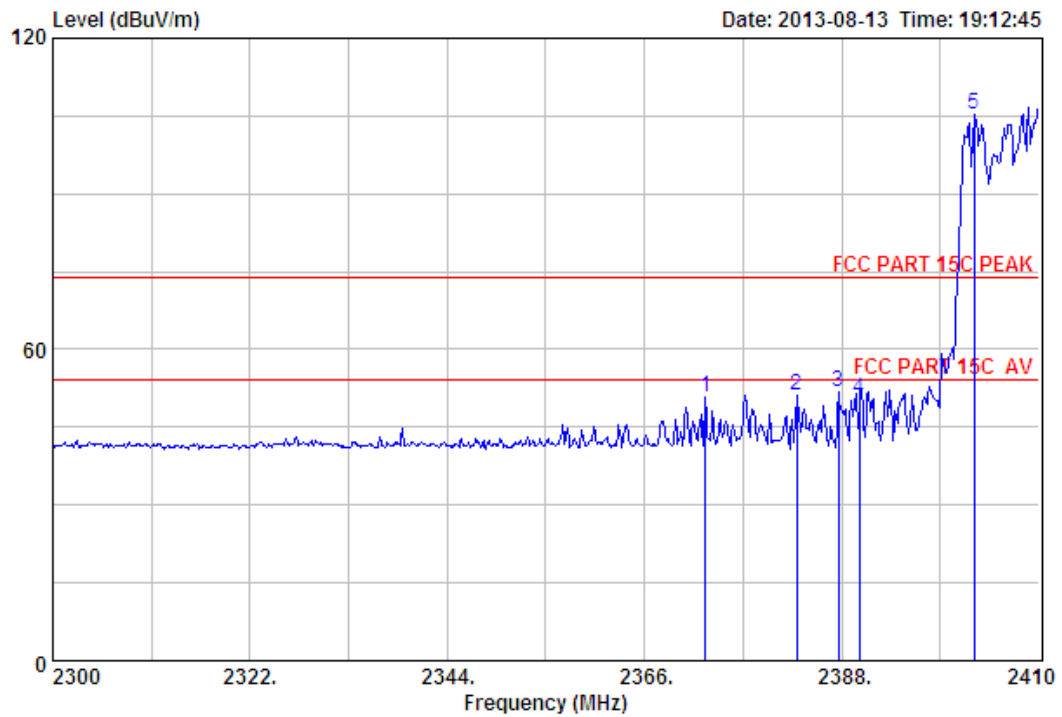

Site no. : 3m Chamber Data no. : 445
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : GFSK (Hopping On)
 Adapter 2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Emission		Limits (dBuV/m)	Margin (dB)	Remark
					Reading (dBuV)	Level (dBuV/m)			
1	2372.82	27.67	6.60	34.20	50.79	50.86	74.00	23.14	Peak
2	2382.94	27.64	6.60	34.19	51.23	51.28	74.00	22.72	Peak
3	2387.67	27.64	6.62	34.19	51.86	51.93	74.00	22.07	Peak
4	2390.00	27.64	6.62	34.19	50.44	50.51	74.00	23.49	Peak
5	2402.74	27.61	6.64	34.18	105.12	105.19	74.00	-31.19	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

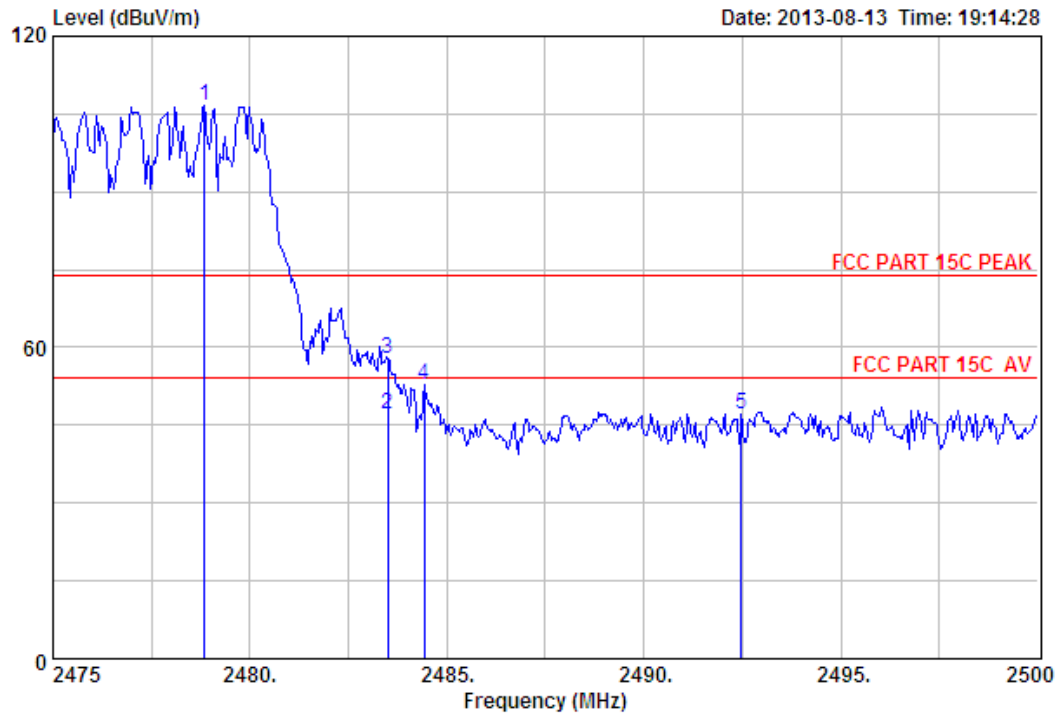

Site no. : 3m Chamber Data no. : 446
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : GFSK (Hopping On)
 Adapter 2

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2478.85	27.58	6.71	34.03	106.36	106.62	74.00	-32.62	Peak
2	2483.50	27.58	6.71	34.03	46.73	46.99	54.00	7.01	Average
3	2483.50	27.58	6.71	34.03	57.63	57.89	74.00	16.11	Peak
4	2484.43	27.58	6.71	34.03	52.40	52.66	74.00	21.34	Peak
5	2492.48	27.58	6.73	34.03	46.98	47.26	74.00	26.74	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

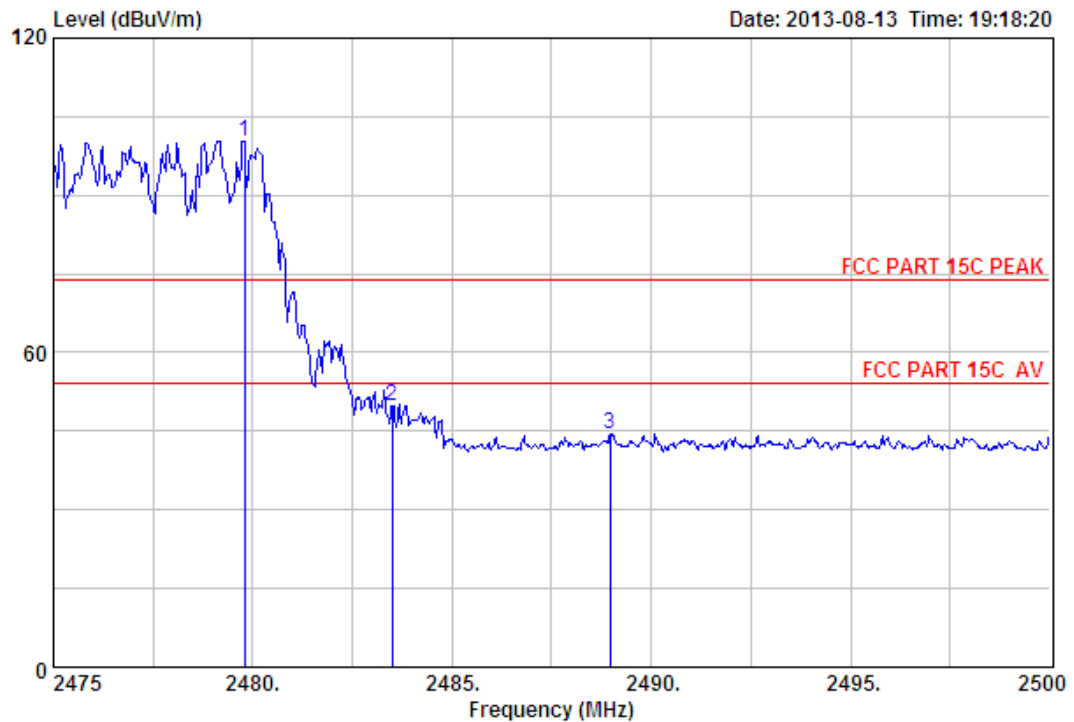

Site no. : 3m Chamber Data no. : 447
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : GFSK (Hopping On)
 Adapter 2

	Freq.	Ant.	Cable	Amp	Emission		Limits	Margin	Remark
	(MHz)	Factor	Loss	Factor	Reading	Level	(dBuV/m)	(dB)	
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)			
1	2479.80	27.58	6.71	34.03	100.11	100.37	74.00	-26.37	Peak
2	2483.50	27.58	6.71	34.03	49.51	49.77	74.00	24.23	Peak
3	2488.98	27.58	6.73	34.03	44.30	44.58	74.00	29.42	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

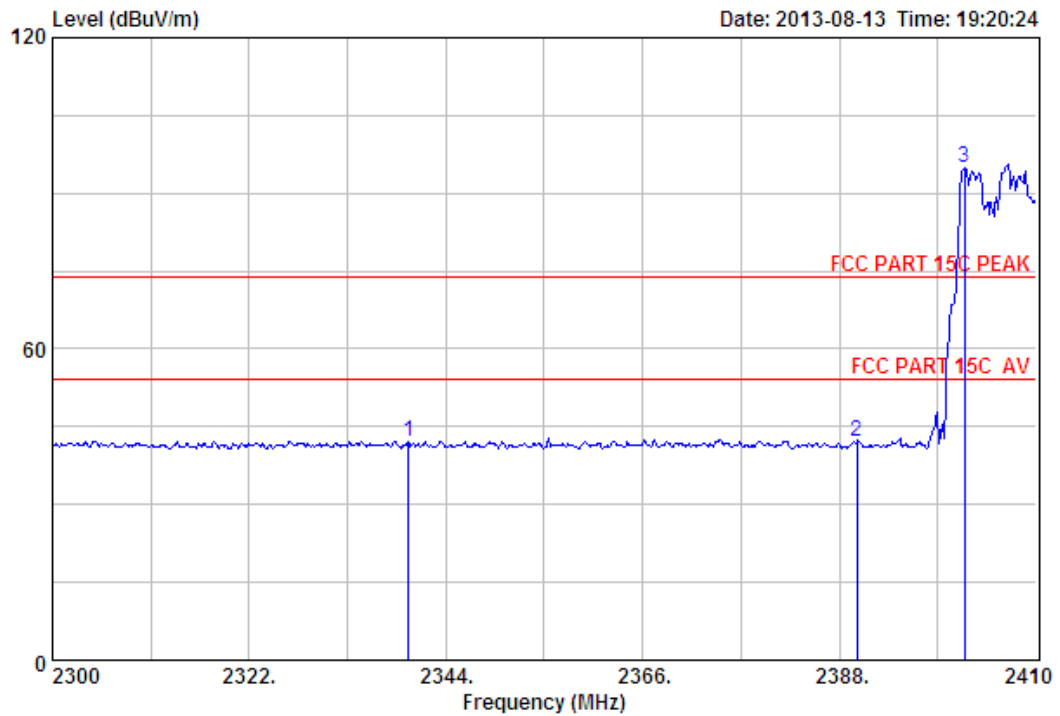

Site no. : 3m Chamber Data no. : 448
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : 8-DPSK (Hopping On)
 Adapter 2

		Ant.	Cable	Amp	Emission				
Freq.	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark	
(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		
1	2339.82	27.70	6.56	34.22	42.20	42.24	74.00	31.76	Peak
2	2390.00	27.64	6.62	34.19	42.01	42.08	74.00	31.92	Peak
3	2401.97	27.61	6.62	34.18	94.72	94.77	74.00	-20.77	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

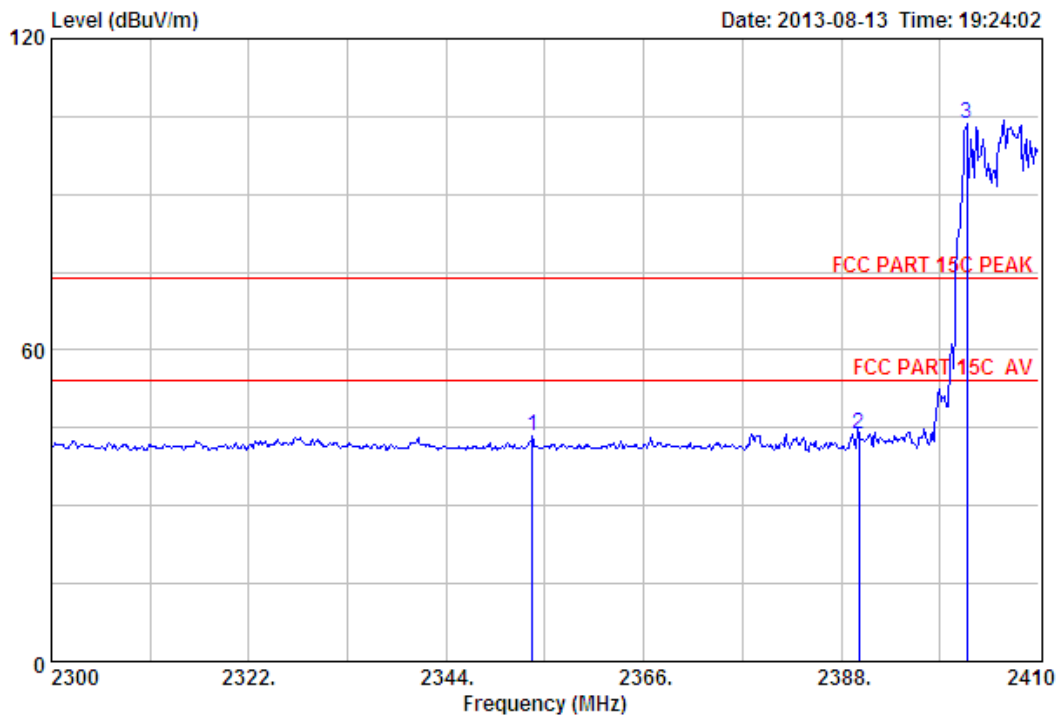

Site no. : 3m Chamber Data no. : 449
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : 8-DPSK (Hopping On)
 Adapter 2

		Ant.	Cable	Amp	Emission				
	Freq.	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2353.57	27.70	6.58	34.22	43.26	43.32	74.00	30.68	Peak
2	2390.00	27.64	6.62	34.19	43.82	43.89	74.00	30.11	Peak
3	2401.97	27.61	6.62	34.18	103.67	103.72	74.00	-29.72	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

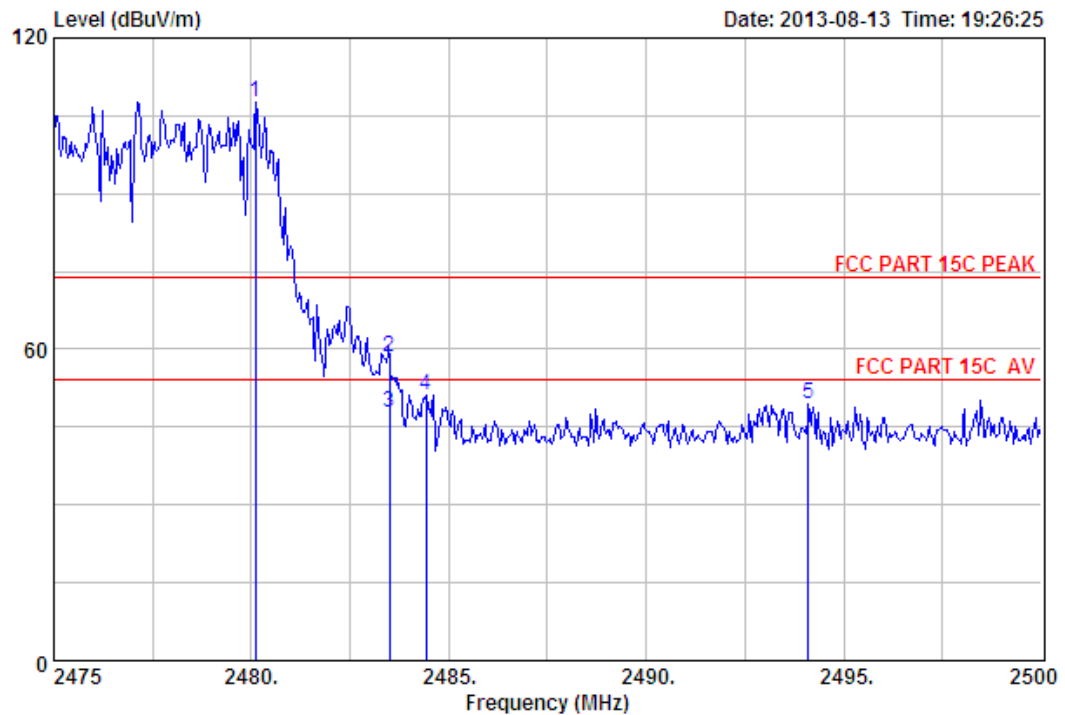

Site no. : 3m Chamber Data no. : 450
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : 8-DPSK (Hopping On)
 Adapter 2

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2480.10	27.58	6.71	34.03	107.39	107.65	74.00	-33.65	Peak
2	2483.50	27.58	6.71	34.03	58.20	58.46	74.00	15.54	Peak
3	2483.50	27.58	6.71	34.03	47.39	47.65	54.00	6.35	Average
4	2484.43	27.58	6.71	34.03	50.89	51.15	74.00	22.85	Peak
5	2494.10	27.58	6.73	34.03	49.25	49.53	74.00	24.47	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

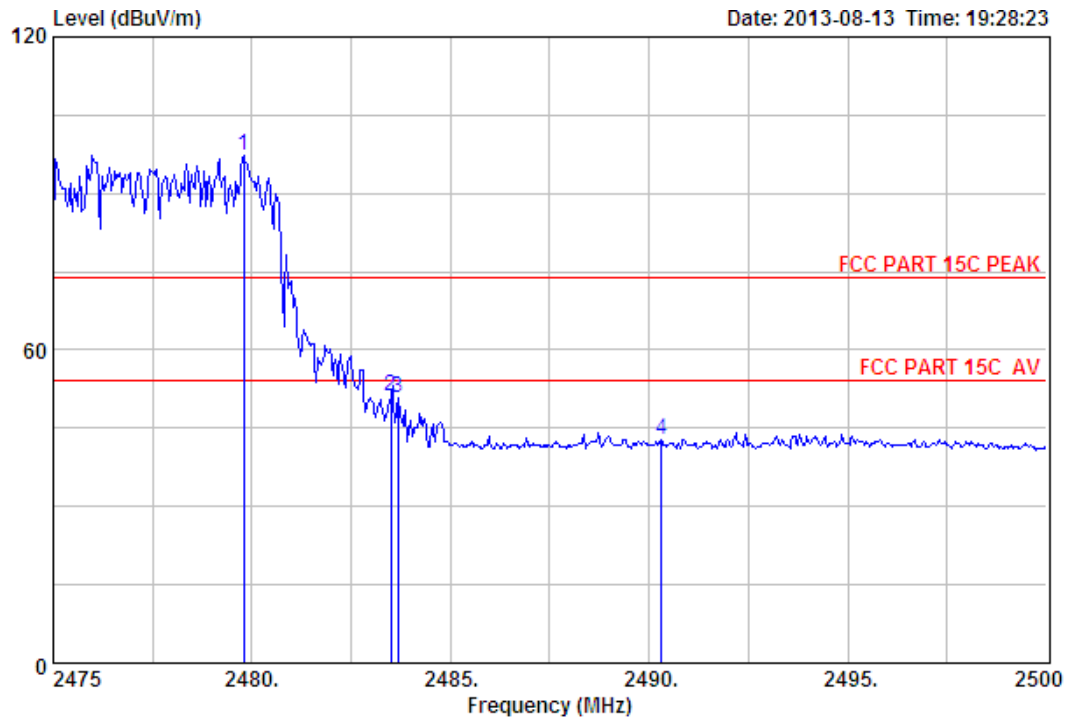

Site no. : 3m Chamber Data no. : 451
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : 8-DPSK (Hopping On)
 Adapter 2

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2479.80	27.58	6.71	34.03	97.07	97.33	74.00	-23.33	Peak
2	2483.50	27.58	6.71	34.03	50.90	51.16	74.00	22.84	Peak
3	2483.68	27.58	6.71	34.03	50.59	50.85	74.00	23.15	Peak
4	2490.30	27.58	6.73	34.03	42.67	42.95	74.00	31.05	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

10. POWER LINE CONDUCTED EMISSIONS

10.1. Limit

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μ V)	Average Level dB(μ V)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. * Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

10.2. Test Procedure

The EUT was placed on a non-metallic table, 80cm above the ground plane. The EUT was charged from PC's USB port which connected to the power mains through a line impedance stabilization network (L.I.S.N. 1#).. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.4: 2003 on Conducted Emission Test.


The bandwidth of test receiver (R & S ESHS30) is set at 10kHz.

The frequency range from 150kHz to 30MHz is checked.

10.3. Test Result


0.15MHz—30MHz Conducted emissison Test result		
EUT: Home theater with wireless subwoofer		
M/N: SoloCinemaStudio		
Power: DC 24V From Adapter Input AC 120V/60Hz		
Test date: 2013-08-13 Test site: 3m Chamber Tested by: Tony.Tang		
Test mode: Tx Mode		
Pass		

10.4. Test data

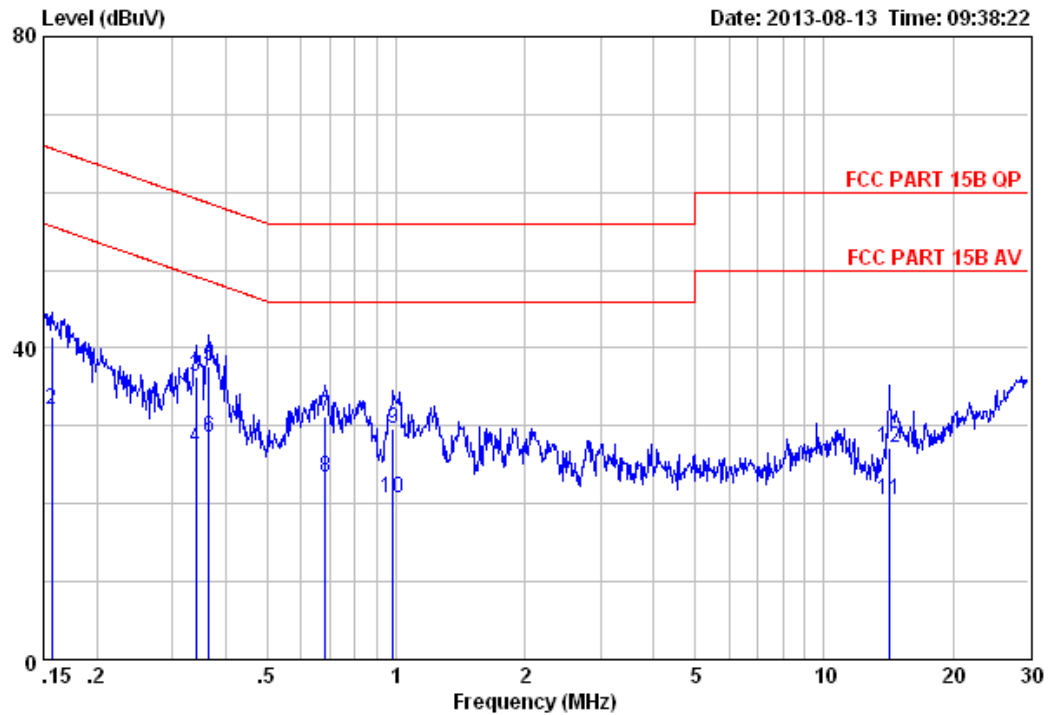


Site no. : EST Conduction Shielded RoomData no. : 329
 Limit : FCC PART 15B QP LINE Phase : NEUTRAL
 Env. / Ins. : Temp:24.3'C Humi:58% Press:101.50kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : TX
 Output : Adapter 1

	Freq. (MHz)	LISN Factor (dB/m)	Cable Loss (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	0.16	9.48	9.81	22.17	41.46	65.65	24.19	QP
2	0.16	9.48	9.81	12.83	32.12	55.65	23.53	Average
3	0.34	9.59	9.83	16.83	36.25	59.18	22.93	QP
4	0.34	9.59	9.83	7.83	27.25	49.18	21.93	Average
5	0.37	9.59	9.82	18.16	37.57	58.61	21.04	QP
6	0.37	9.59	9.82	9.05	28.46	48.61	20.15	Average
7	0.68	9.63	9.81	11.71	31.15	56.00	24.85	QP
8	0.68	9.63	9.81	4.01	23.45	46.00	22.55	Average
9	0.98	9.61	9.83	10.14	29.58	56.00	26.42	QP
10	0.98	9.61	9.83	1.23	20.67	46.00	25.33	Average
11	14.21	9.73	9.92	0.85	20.50	50.00	29.50	Average
12	14.21	9.73	9.92	7.54	27.19	60.00	32.81	QP

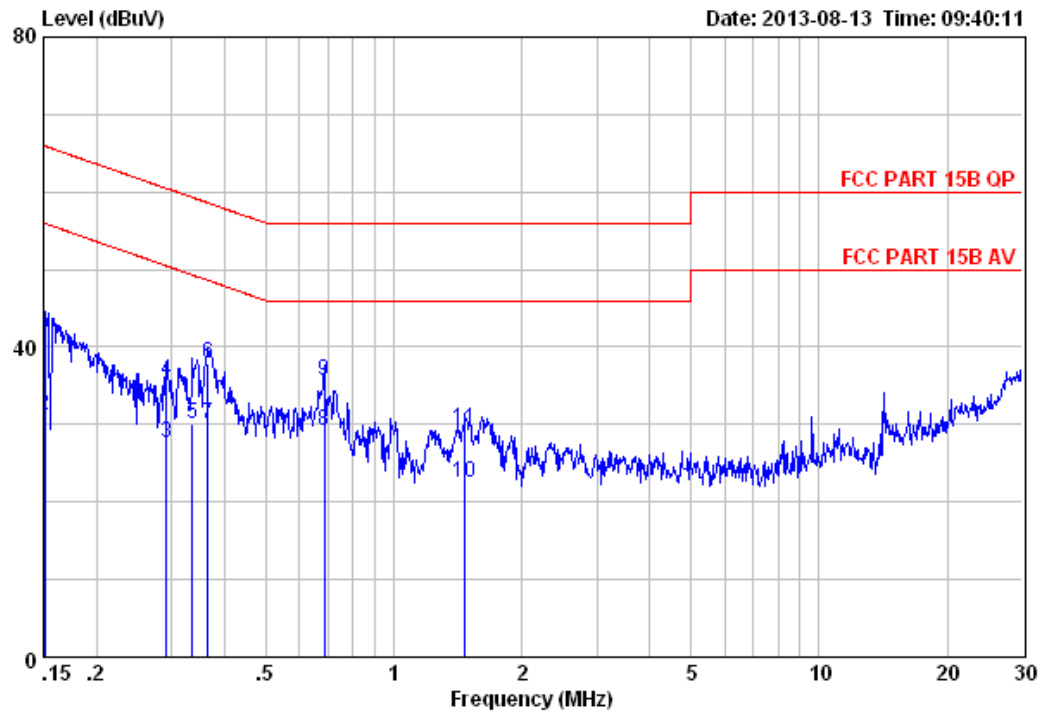


Site no. : EST Conduction Shielded RoomData no. : 331
 Limit : FCC PART 15B QP LINE Phase : LINE
 Env. / Ins. : Temp:24.3'C Humi:58% Press:101.50kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : TX
 Output : Adapter 1

		LISN	Cable		Emission			
	Freq.	Factor	Loss	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	0.15	0.00	9.81	32.67	42.48	65.96	23.48	QP
2	0.15	0.00	9.81	21.41	31.22	55.96	24.74	Average
3	0.29	0.00	9.83	17.77	27.60	50.46	22.86	Average
4	0.29	0.00	9.83	25.86	35.69	60.46	24.77	QP
5	0.34	0.00	9.83	20.32	30.15	49.31	19.16	Average
6	0.37	0.00	9.82	27.97	37.79	58.61	20.82	QP
7	0.37	0.00	9.82	20.30	30.12	48.61	18.49	Average
8	0.69	0.00	9.81	19.49	29.30	46.00	16.70	Average
9	0.69	0.00	9.81	25.89	35.70	56.00	20.30	QP
10	1.47	0.00	9.83	12.62	22.45	46.00	23.55	Average
11	1.47	0.00	9.83	19.59	29.42	56.00	26.58	QP

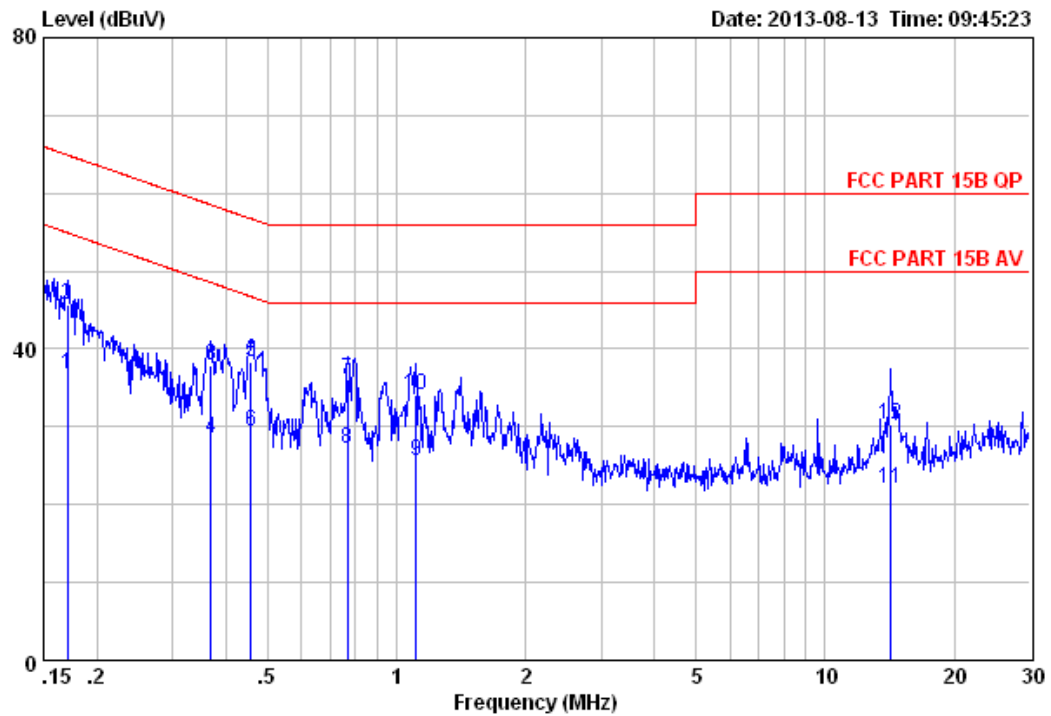

Site no. : EST Conduction Shielded RoomData no. : 333
 Limit : FCC PART 15B QP LINE Phase : LINE
 Env. / Ins. : Temp:24.3'C Humi:58% Press:101.50kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : TX
 Output : Adapter 2

		LISN	Cable		Emission			
	Freq.	Factor	Loss	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	0.17	9.61	9.81	17.33	36.75	54.94	18.19	Average
2	0.17	9.61	9.81	26.36	45.78	64.94	19.16	QP
3	0.37	9.61	9.82	18.50	37.93	58.52	20.59	QP
4	0.37	9.61	9.82	9.00	28.43	48.52	20.09	Average
5	0.46	9.61	9.81	18.83	38.25	56.76	18.51	QP
6	0.46	9.61	9.81	10.03	29.45	46.76	17.31	Average
7	0.77	9.60	9.81	16.61	36.02	56.00	19.98	QP
8	0.77	9.60	9.81	7.74	27.15	46.00	18.85	Average
9	1.11	9.64	9.82	6.24	25.70	46.00	20.30	Average
10	1.11	9.64	9.82	14.66	34.12	56.00	21.88	QP
11	14.21	9.67	9.92	2.41	22.00	50.00	28.00	Average
12	14.21	9.67	9.92	10.77	30.36	60.00	29.64	QP

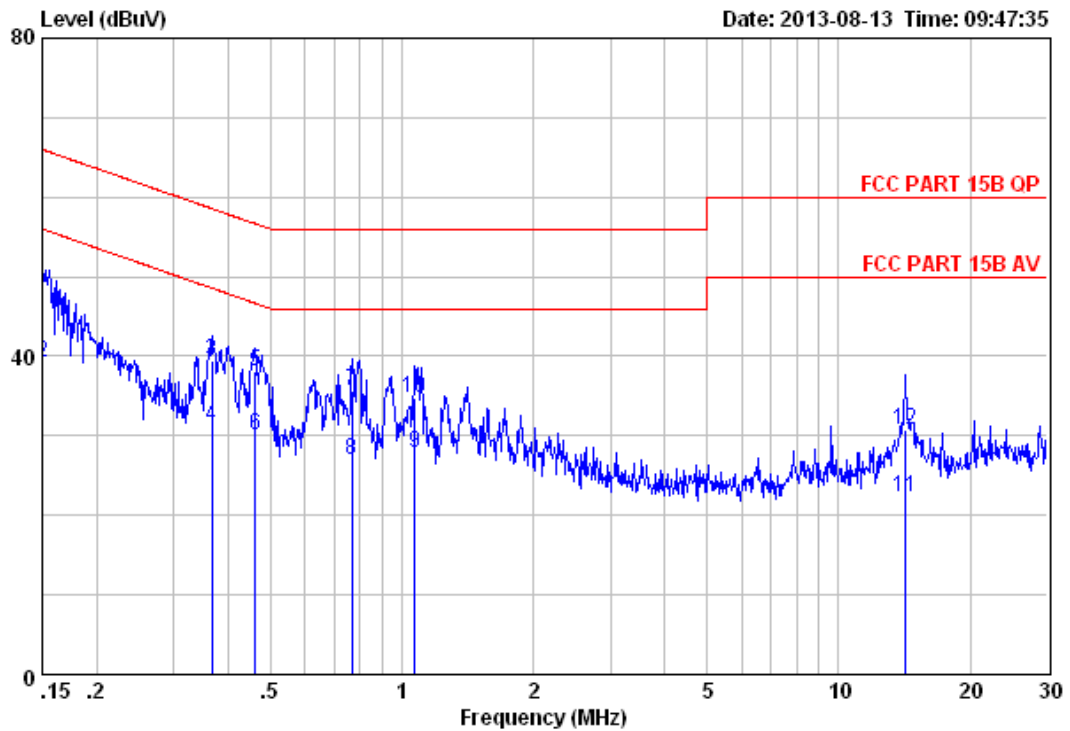

Site no. : EST Conduction Shielded RoomData no. : 335
 Limit : FCC PART 15B QP LINE Phase : NEUTRAL
 Env. / Ins. : Temp:24.3'C Humi:58% Press:101.50kPa
 Engineer : Tony
 EUT : Home theater with wireless subwoofer
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : SoloCinemaStudio
 Test Mode : On
 Output : Adapter 2

	Freq.	LISN	Cable	Emission				
	(MHz)	Factor	Loss	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	0.15	9.46	9.81	28.52	47.79	66.00	18.21	QP
2	0.15	9.46	9.81	19.96	39.23	56.00	16.77	Average
3	0.37	9.59	9.82	20.11	39.52	58.56	19.04	QP
4	0.37	9.59	9.82	11.69	31.10	48.56	17.46	Average
5	0.46	9.59	9.81	18.63	38.03	56.67	18.64	QP
6	0.46	9.59	9.81	10.72	30.12	46.67	16.55	Average
7	0.77	9.62	9.81	16.20	35.63	56.00	20.37	QP
8	0.77	9.62	9.81	7.57	27.00	46.00	19.00	Average
9	1.07	9.61	9.84	8.45	27.90	46.00	18.10	Average
10	1.07	9.61	9.84	15.27	34.72	56.00	21.28	QP
11	14.21	9.73	9.92	2.57	22.22	50.00	27.78	Average
12	14.21	9.73	9.92	11.03	30.68	60.00	29.32	QP

11.ANTENNA REQUIREMENTS

11.1.Limit


For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

11.2.Result


The antennas used for this product are integral Patch Antenna and that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is only 0dBi.

12. TEST SETUP PHOTO


Conducted Test

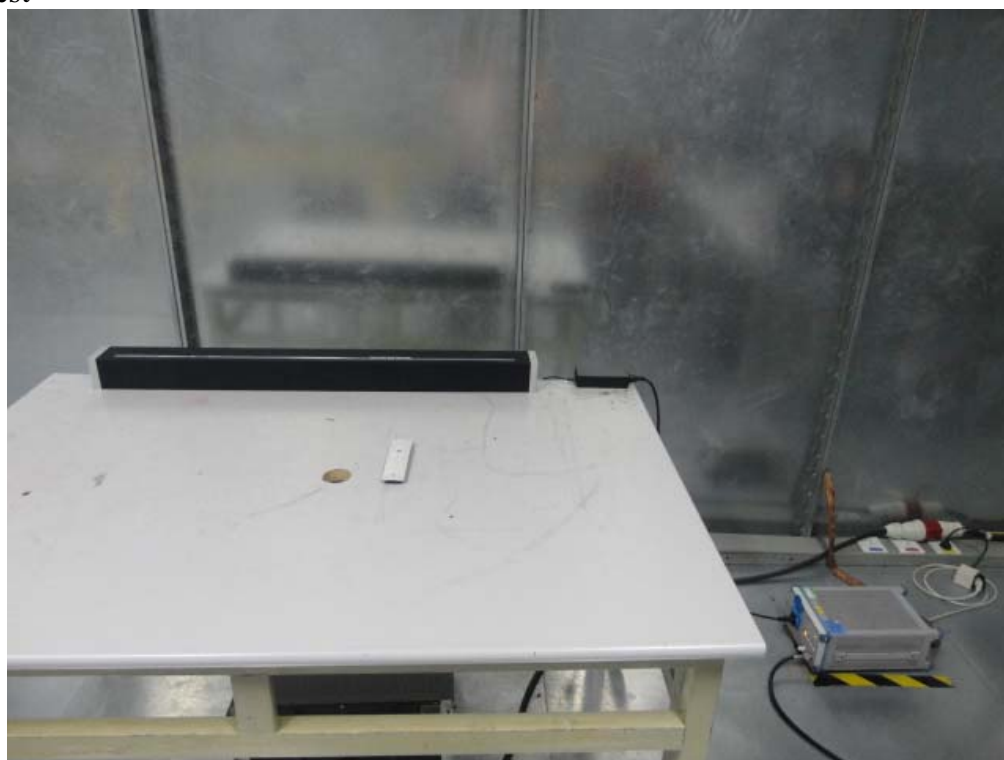

Radiated Test (30-1000 MHz)

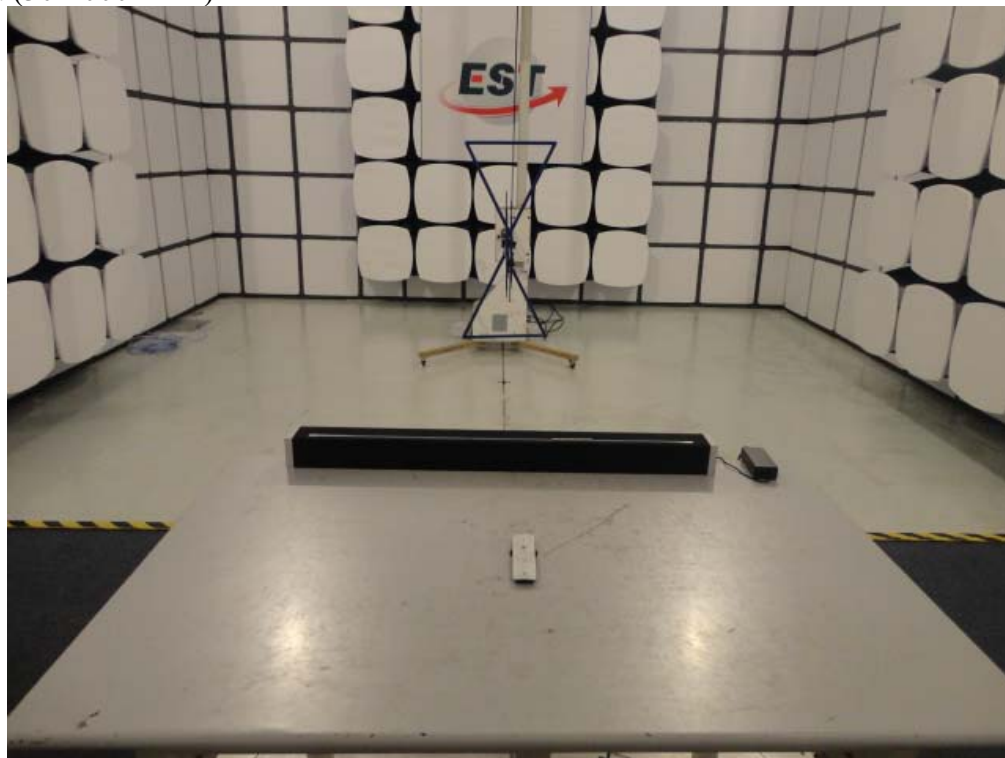

Radiated Test (1000-25000 MHz)

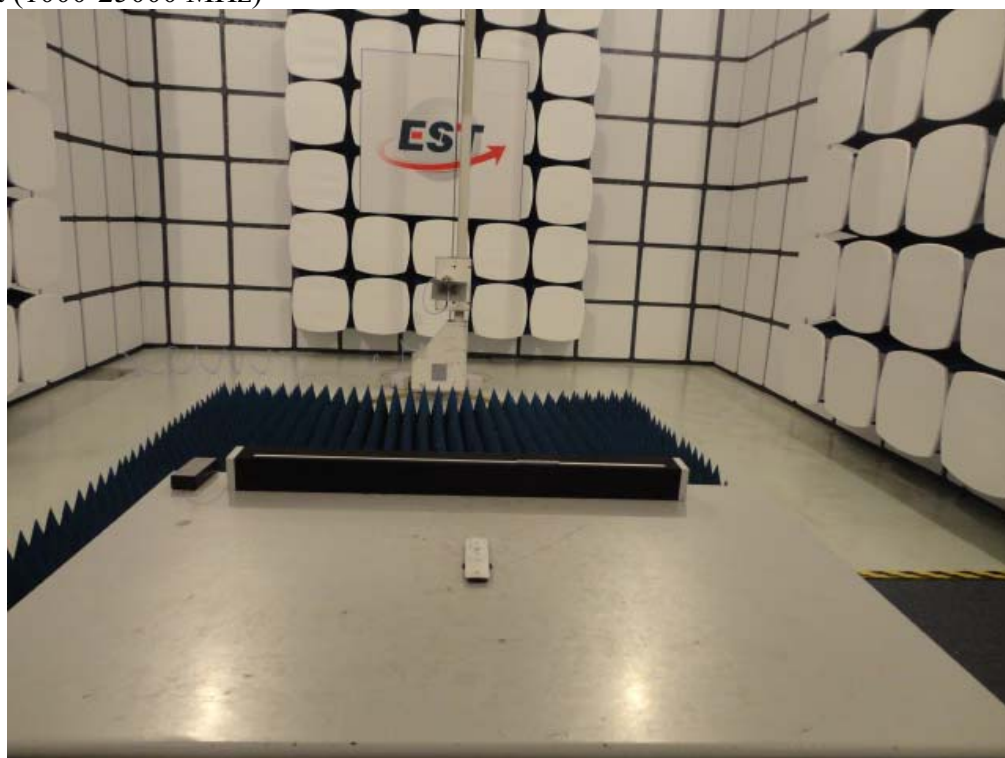


13. PHOTOS OF EUT



External Photos
M/N: SoloCinemaStudio




External Photos
M/N: SoloCinemaStudio

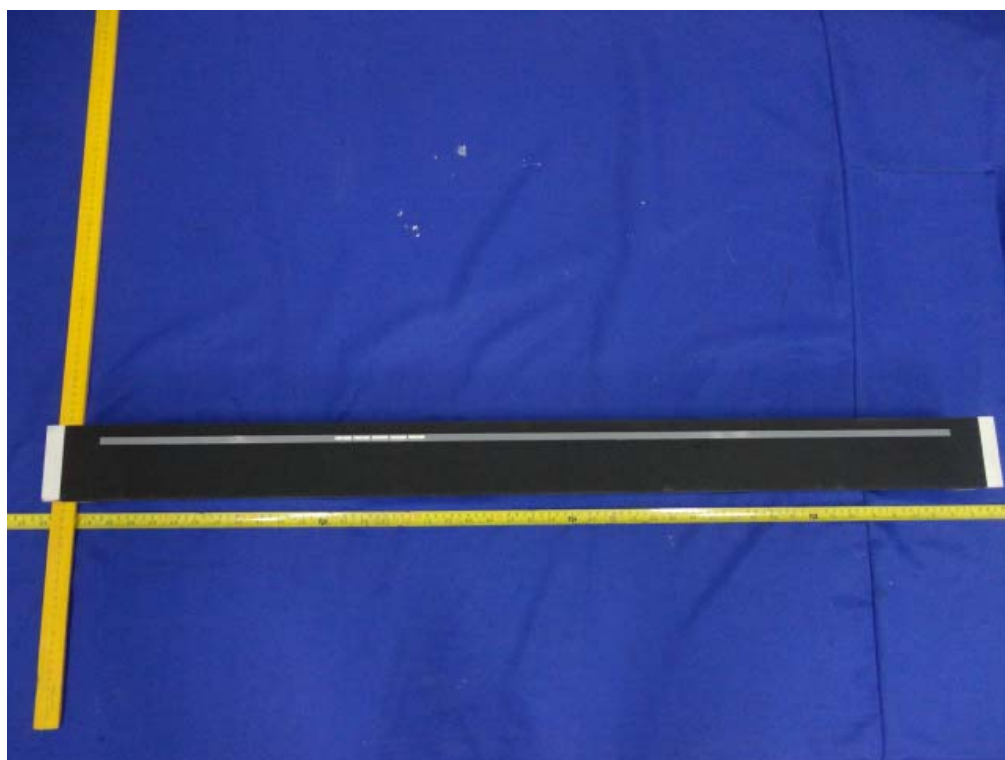



External Photos
M/N: SoloCinemaStudio

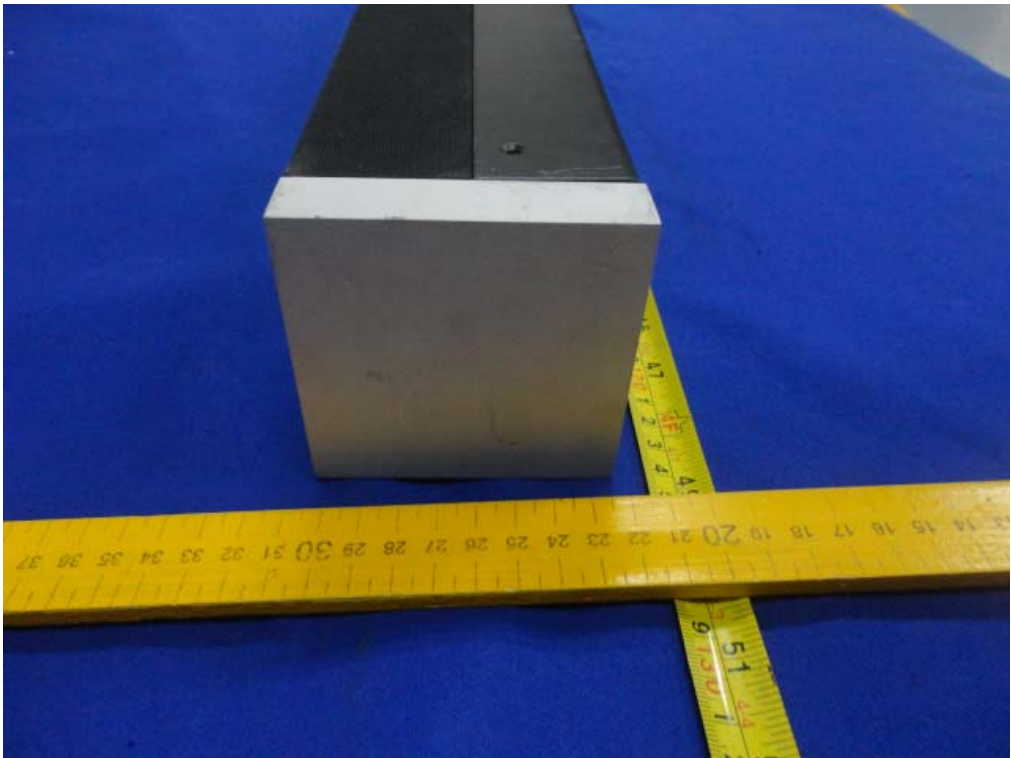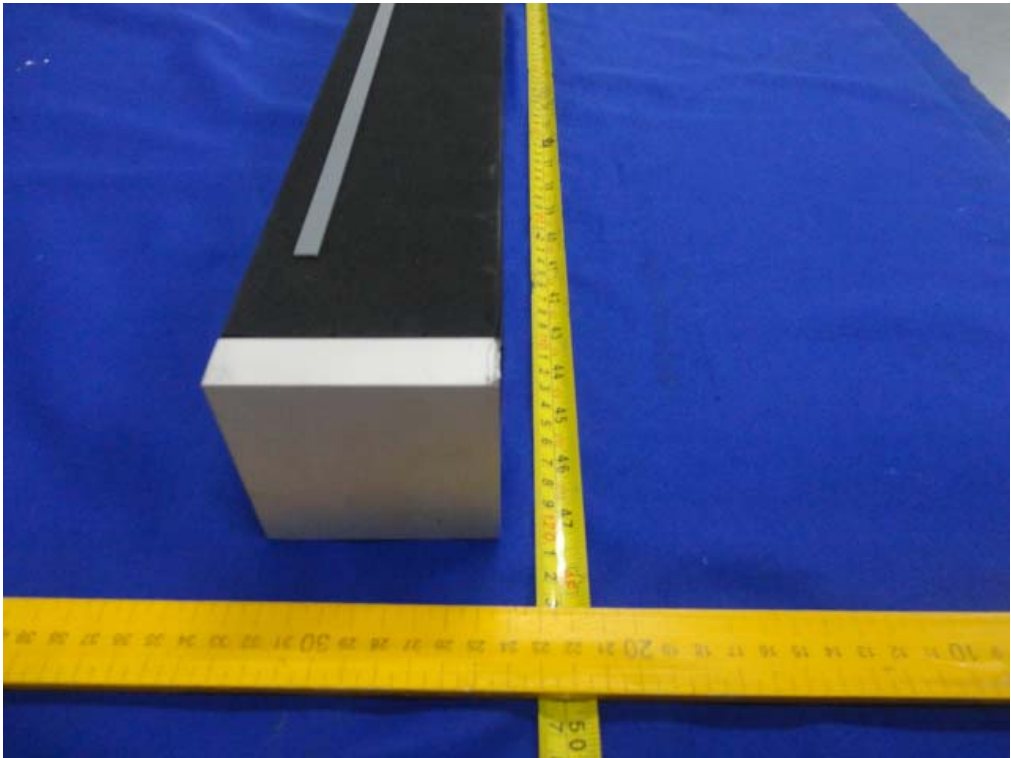

Internal Photos
M/N: SoloCinemaStudio


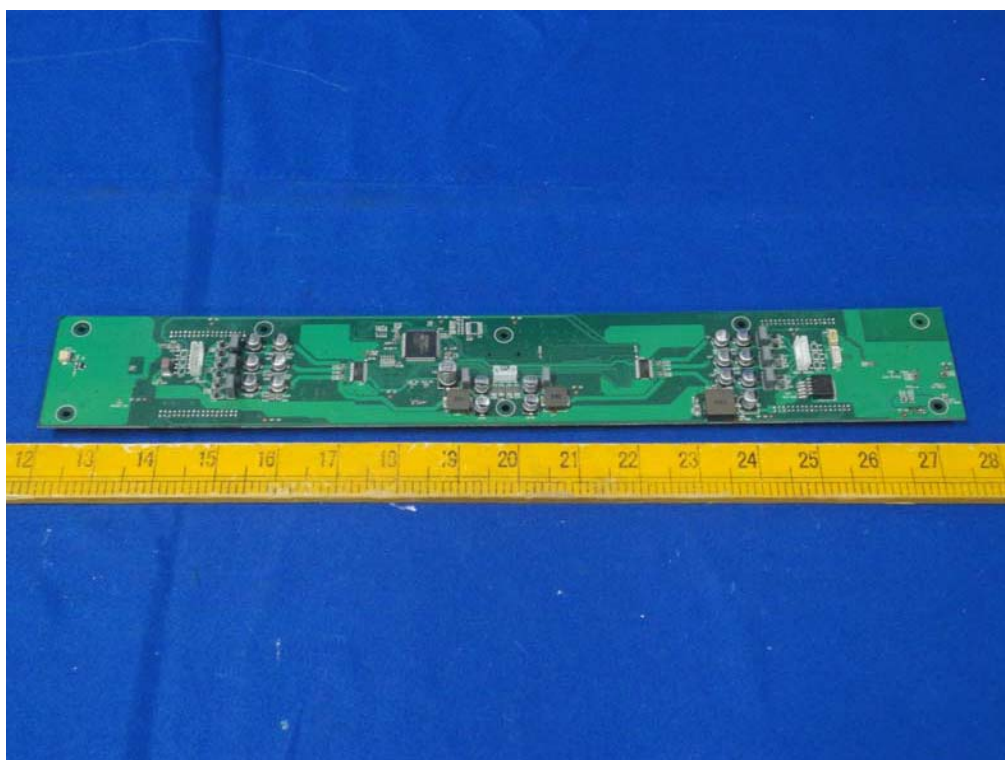


Internal Photos
M/N: SoloCinemaStudio

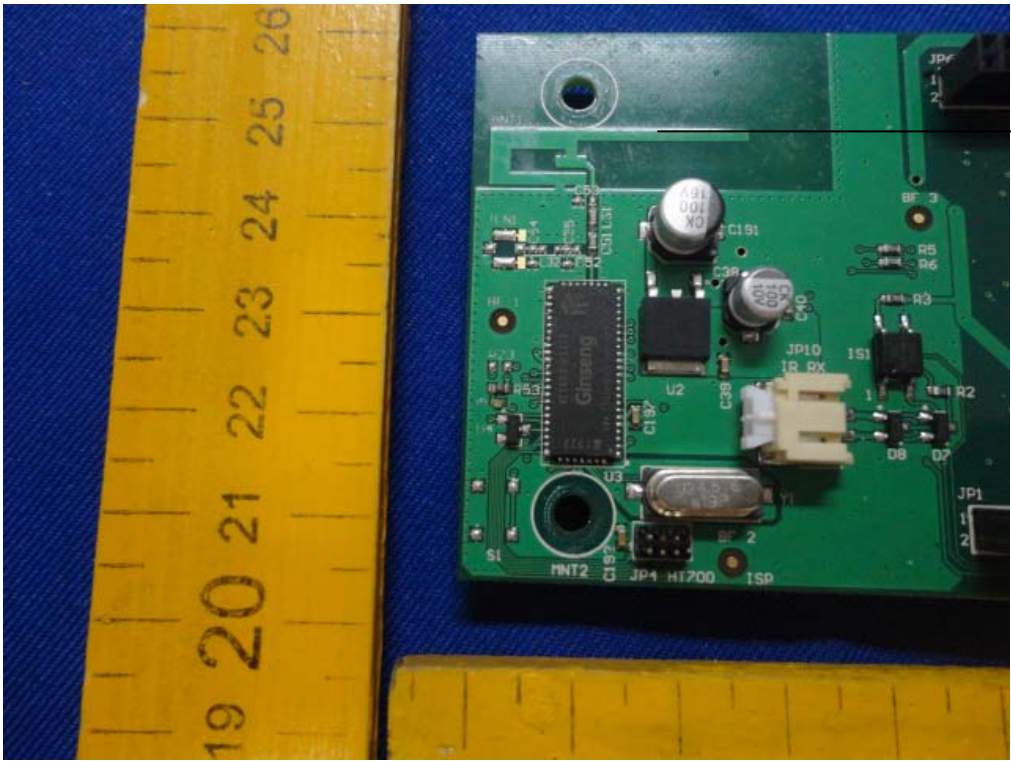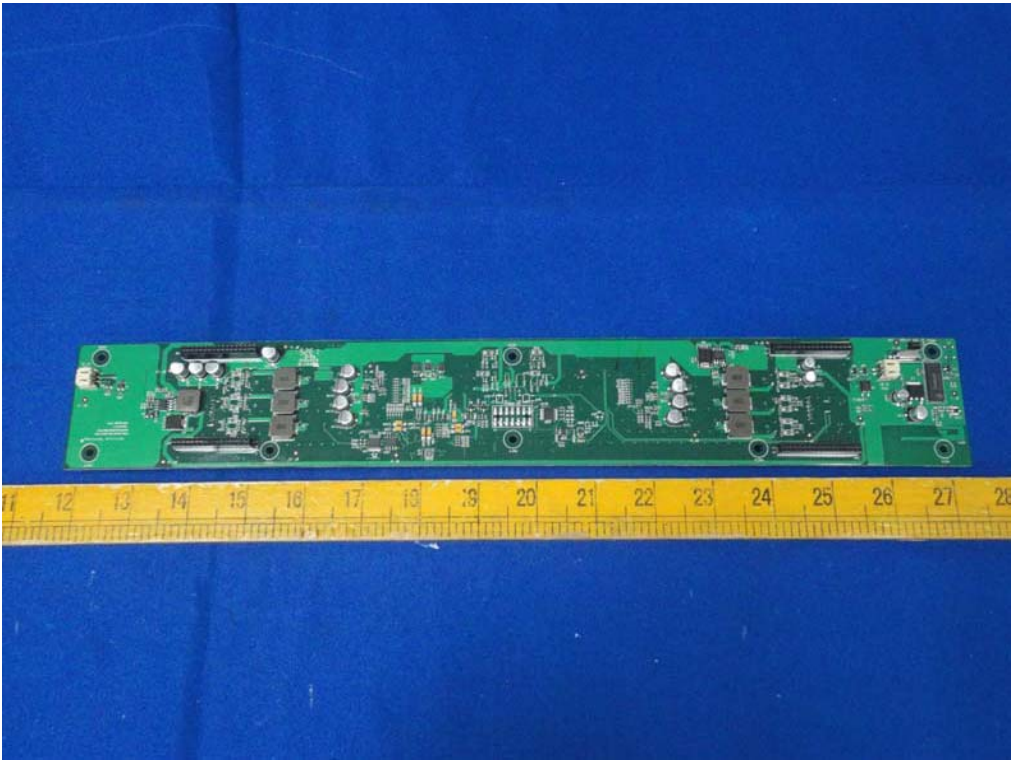


FHSS
Antenna


Internal Photos
M/N: SoloCinemaStudio

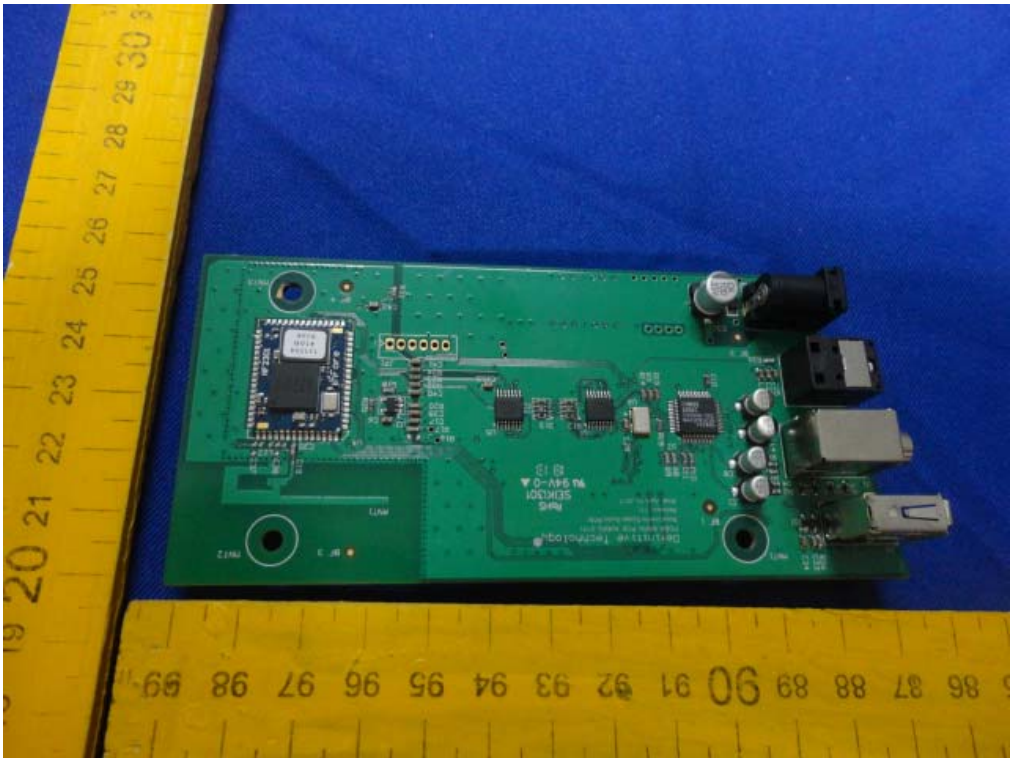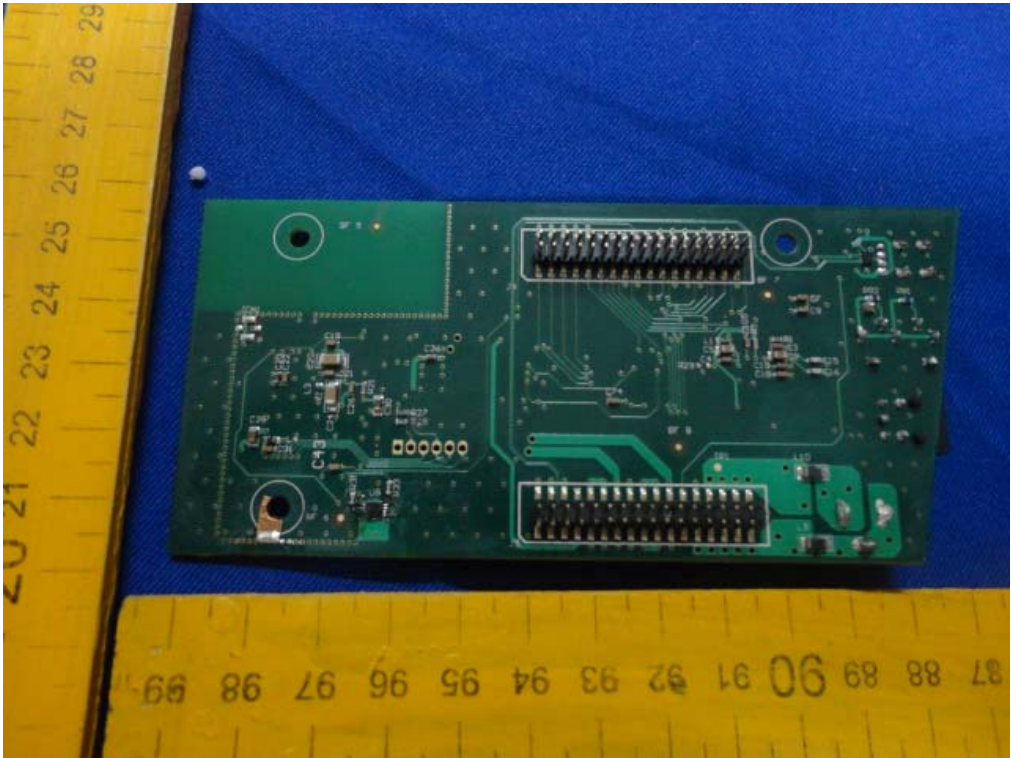


Internal Photos
M/N: SoloCinemaStudio

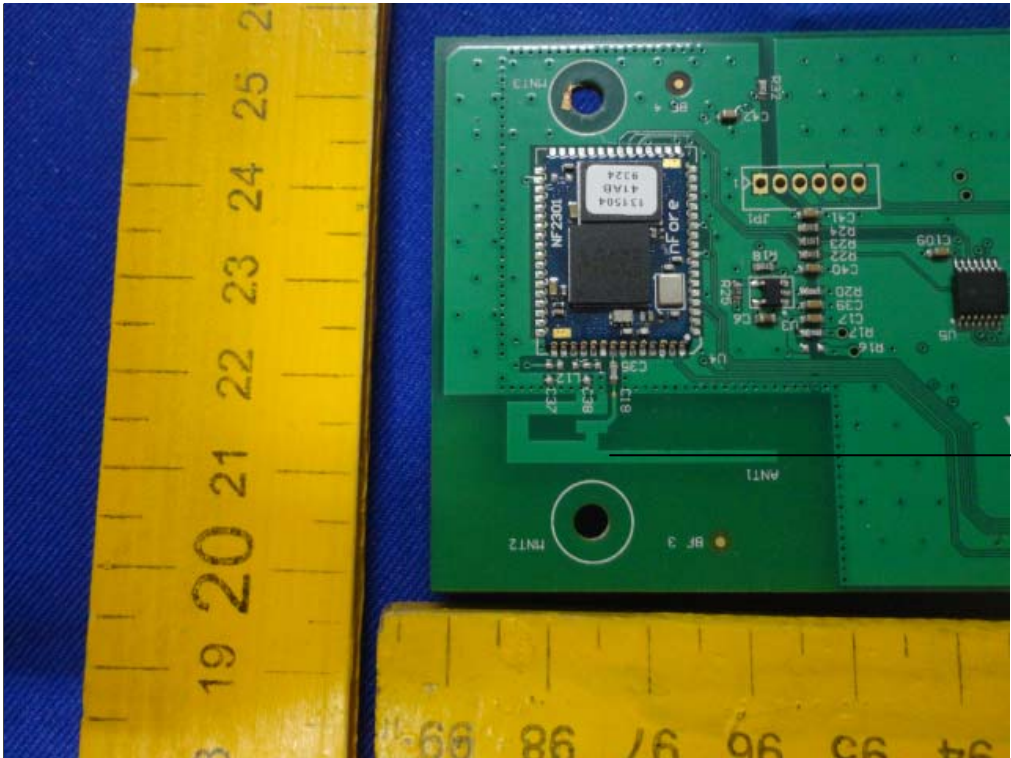


Internal Photos
M/N: SoloCinemaStudio

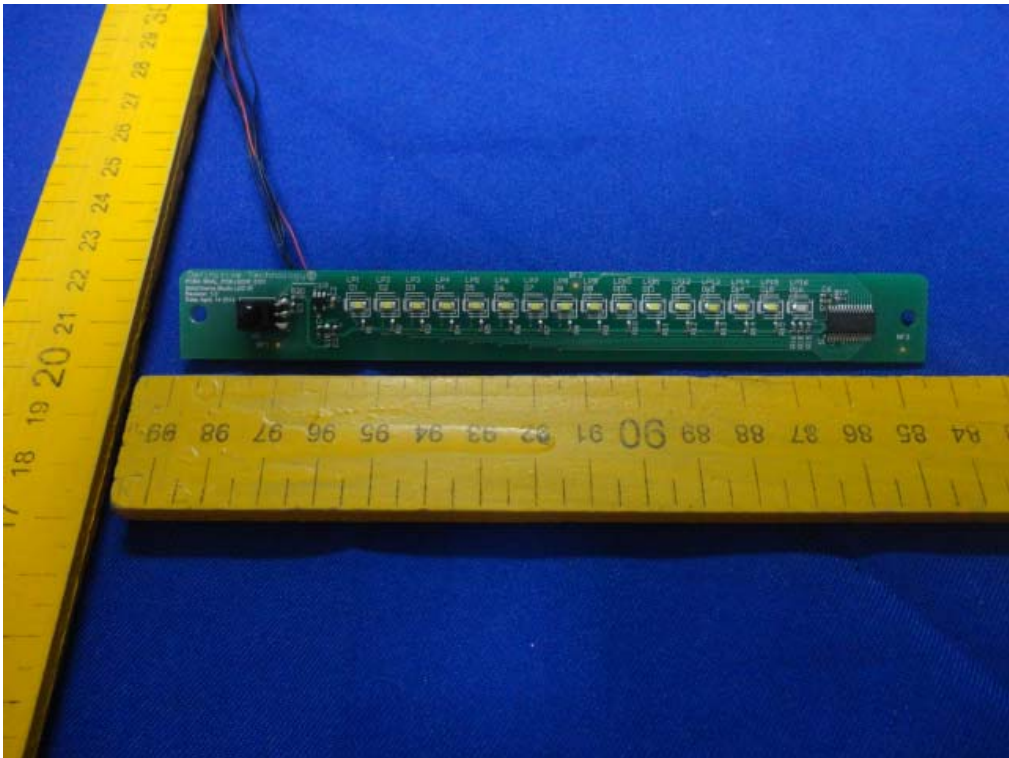

Internal Photos
M/N: SoloCinemaStudio

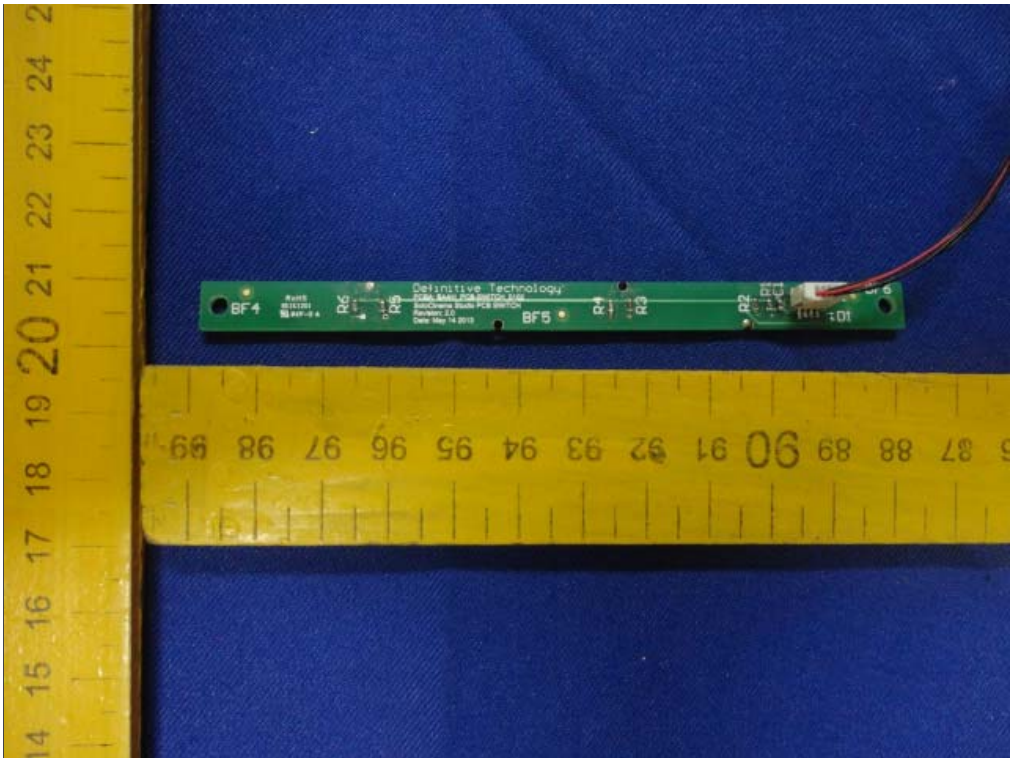

Internal Photos
M/N: SoloCinemaStudio

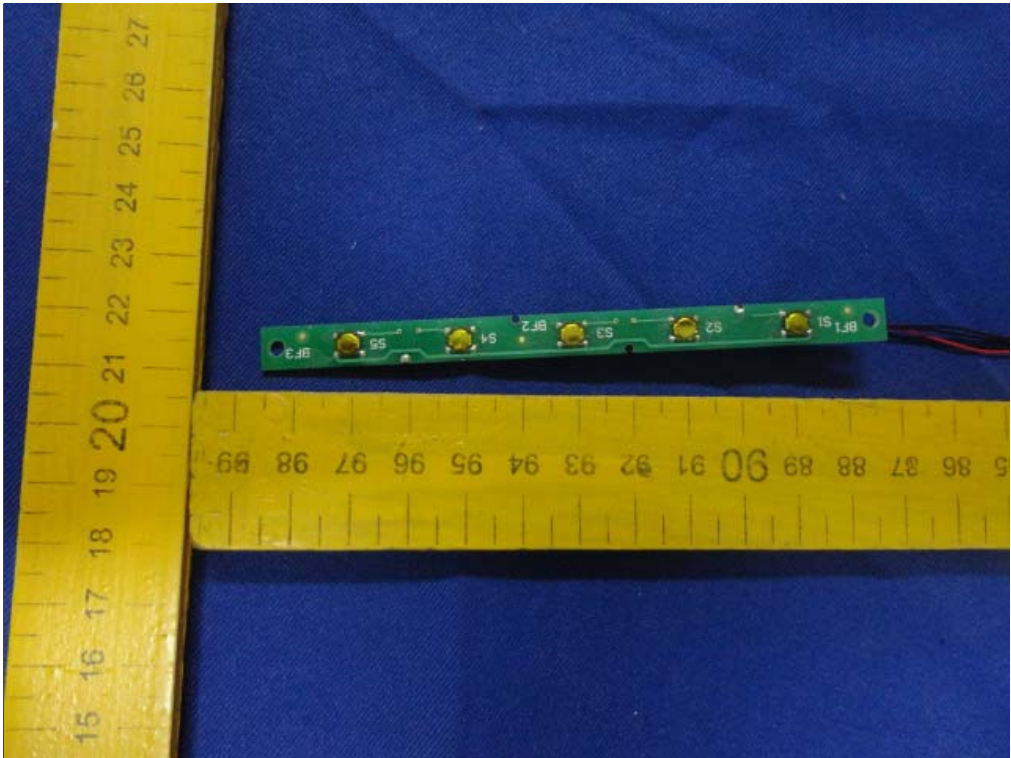

Adapter 1 Photos



Adapter 2 Photos



Remote Control Photos

