

FCC ID:IQX98C1770

EUT:17"COLOR MONITOR

SHAMROCK TECHNOLOGY CO., LTD.

USER'S MANUAL

FORNIT

03 1998

FEDERAL COMMUNICATIONS COMMISSION

NOTE

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Shielded interface cables must be used in order to comply with emission limits.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

1. CHECK LIST


Before installation, please check the contents of the shipping carton. The carton should contain the following items:

- Power cord
- User's manual
- Color monitor

If any of the above items are missing, contact your supplier as soon as possible.

2. MONITOR INSTALLATION

Rear View

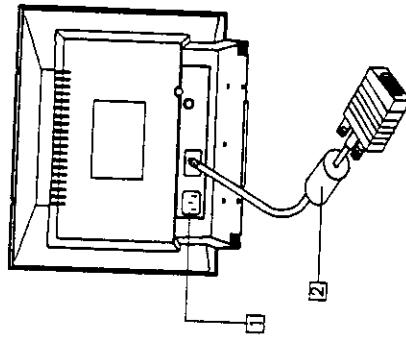


Turn off your computer before following installation.

1. AC socket

Connect one end of the supplied power cord to this socket and the other end to an AC power outlet.

2. Video cable with 15 pin male D-SUB connector connected to the PC video card.

3. CONTROLS AND ADJUSTMENTS

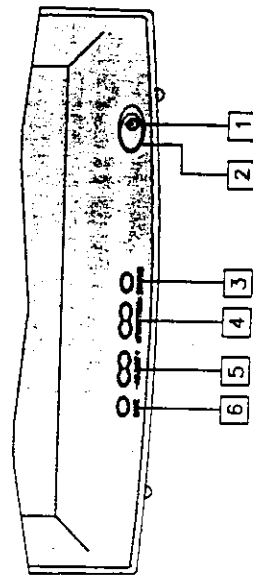

3.2 FUNCTIONS ADJUSTMENTS ON O.S.D. WINDOW

For each function control, use the adjust buttons "+" and "-" to adjust the monitor's parameter bars to your satisfaction according to the following table:

Adjust Switch		+	-
	Contrast	Contrast Increased	Contrast Reduced
	Brightness		
	Horizontal size		
	Horizontal position		
	Vertical size		
	Vertical center		
	Pincushion		
	Trapezoid		
	Parallelogram		
	Pin balance		
	Image rotation		
	Recall	Recalls the Factory preset Modes-see page 11	
	Color temperature	To select 9300°k / 6500°k or user	
	Color	Intensity increased	Intensity reduced
	Save	Manual	Auto
	CRT degaussing	Manual	Degaussing

CAUTION:

When the monitor is turned on continuously for a long period, the phosphors of the CRT face plate may "burn" leaving a permanent image on the screen. In order to preserve CRT life, be sure to turn off the monitor or decrease the displayed intensity when not in use.

6. SPECIFICATION

7. COMPATIBILITY AND FACTORY
PRESET DISPLAY MODES

7.1 COMPATIBILITY MODES

IBM - VGA (350, 400, 480 line modes) & 8514/A
VGA (350, 400, 480 line modes) 60/70/72/75/85 Hz
VESA standard (800 x 600) 56/60/72/75 Hz
VESA standard (1024 x 768) 60/70/75/85 Hz
VESA standard (1280 x 1024) 60 Hz

7.2 FACTORY PRESET DISPLAY MODES

Mode name	Resolution	Frequency (Fh / Fv)
Standard VGA	640 x 480	31.47 KHz / 59.9 Hz
VESA standard	640 x 400	37.86 KHz / 85.1 Hz
VESA standard	800 x 600	48.08 KHz / 72.2 Hz
VESA standard	1024 x 768	60.02 KHz / 75.0 Hz
VESA standard	1280 x 1024	63.98 KHz / 60.0 Hz
VESA standard	1024 x 768	68.68 KHz / 85.0 Hz

The following are general characteristics:

CRT	17" (15.7" viewable image), 0.28/0.26(option) mm dot pitch, 90 deflection, dark tint, F.S.T. double focus, ARASC coating
RESOLUTION	1280 X 1024 max. (depends on video card)
INPUT/VIDEO SYNC	Analog : 0.7 Vp-p, 75 ohm, RGB (+) Separate : TTL level (+) or (-) Composite : TTL level (+) or (-) Horizontal : 31.5-69KHz Vertical : 60-85Hz
VIDEO RESPONSE	110 MHz nominal
POWER	100 - 240VAC, 60/50 Hz, 2.5A (max.) Degaussing : line operated automatic & manual Consumption : 115W max
LOW RADIATION	MPR-II (standard), TCO'92 / TCO'95 (option)
PLUG & PLAY	VESA *DDC: 1/2B
OPERATING	Temperature : 0 to 40 degree C Humidity : 10 to 90% R. H. Altitude : 0 to 10,000 ft

Pin assignment of 15 pin, D-type male video connector
DB-15 pin out


1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
R	G	B	Gnd	DDC	R	G	B	NC	Gnd	Gnd	*SDA	H	V	*SCL
				Gnd	Gnd	Gnd	Gnd							

*DDC: Display Data Channel

SDA: Bi-directional Data

SCL: Data Clock

Dimensions and features of the Tilt-Swivel Base:



Height 3" (76.2mm) / 1" (25.4mm)
This specification subject to change without notice.

4. PLUG & PLAY

This monitor complies with VESA DDC (Display Data Channel) - DDC1/DDC2B - to support *Plug & Play* of Windows 95. The main function is to create a protocol that allows for communication between the monitor, video card and/or PC.

This function is effective only when used with a DDC compliant video card and/or PC. By means of the software driver of the DDC video card (or Windows 95 operating system) all information stored within the DDC device in the monitor (e.g. resolution, refresh rate, etc.) can be displayed for the user's reference. Based on the displayed information, the monitor user has the opportunity to select the DDC2B mode with different combinations of resolutions and refresh rates as required by the intended application.

5. POWER MANAGEMENT SYSTEM

This monitor meets the EPA Energy Star (15 Watts max. in power saving mode), VESA DPMS (Display Power Management Signaling) standard & NUTEK - TCO 1992 specifications. The monitor has a built-in power management system that automatically reduces power consumption when the PC is not in use. This power management system is effective only when used with VESA DPMS compliant PC or Video Card.

Table of Power Consumption in each Advanced Power Management (APM) state:

APM State	Signal Requirement	Monitor Action	Power Consumption	Power Indicator
Standby	H sync OFF	Switches to saving mode & screen darkens	15W max.	Orange
Suspend	V sync OFF		15W max.	Orange
Off	V sync OFF and H sync OFF		8W max.	Orange

Note: This monitor meets VESA DPMS "power management" standards. The monitor's power management system is initiated once it has received a proper signal from the PC side. If a proper connection between the PC side and the monitor has not been established during the initial setup, the power indicator will remain green and the power management feature will not be effective. Once a proper connection has been established, the power indicator will show green or amber according to VESA DPMS standards.

3.1 LOCATION AND FUNCTION OF CONTROLS

1. POWER AND POWER SAVING INDICATOR

When the power to the monitor is ON, the indicator is lit. In normal operation, the indicator is green. While in power saving mode, the indicator will turn to orange.

2. POWER SWITCH

Used to turn the power of the monitor ON and OFF.

3. STATUS BUTTON

Press button. The O.S.D. (On Screen Display) "window", as in figure A, will be displayed on the screen. The resolution of the mode which is currently in use now, the frequencies of the horizontal and vertical sync signals, the function symbols (including contrast, brightness, horizontal size and position, vertical size and position, side pin, trapezoid, parallelogram, pin balance, rotation, recall, color temperature, R.G.B. color, window save, manual degauss, the parameter bars (which indicate the adjusting scale) and the function description (simply select to adjust) will be shown in the O.S.D. window!

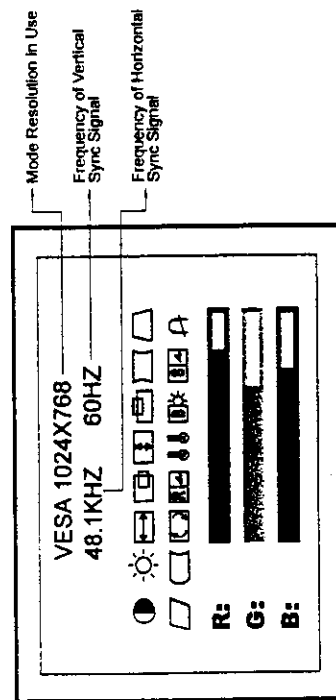


Figure A

Note: The O.S.D window will disappear automatically after 10(ten) seconds of nonuse or once the status button is pressed again.

4. FUNCTION BUTTON

Selects which function in the O.S.D. window to be adjusted.

5. ADJUST BUTTON

Used to decrease or increase the parameter bar of the selected function in the O.S.D window.

6. SAVE BUTTON

Used to save all function parameter settings, which have been adjusted. The O.S.D window will display "SAVE" after the "SAVE" function is completed.

Note: The function of "Save Button" is effective only when select "Manual" method to save all parameters of precise screen control. However, all screen adjustments can automatically be saved in memory by selecting the "Auto" method after the adjust buttons "+" or "-" is released and the O.S.D. window disappears.

* A total of 32 different modes can be stored in memory and automatically recalled. 6 of them are factory preset for popular graphic standards (see Compatibility and Factory Preset Display Modes on page 11). The remaining 26 modes are reserved for user setting.

INDEX

1. CHECK LIST.....	2
2. MONITOR INSTALLATION.....	2
3. CONTROLS AND ADJUSTMENTS.....	3
3.1 LOCATION AND FUNCTION OF CONTROLS.....	4
3.2 FUNCTIONS ADJUSTMENTS ON O.S.D. WINDOW.....	6
4. PLUG & PLAY.....	8
5. POWER MANAGEMENT SYSTEM.....	9
6. SPECIFICATION.....	10
7. COMPATIBILITY AND FACTORY PRESET DISPLAY MODES.....	11
7.1 COMPATIBILITY MODES.....	11
7.2 FACTORY PRESET DISPLAY MODES.....	11