



Antenna specification for approval

Customer name: 合悦丰

Model : WB801

Antenna type : WIFI antenna

Antenna frequency band: 2.4G

Material : FPC

Color : Black

Material Number: F1146A-1R11B-130-A Production date: 2022-09-21

Version: **A**

Admit that signature			
Confirmation Signature		Customer Approved	
Responsible		Responsible	
QC		Engineer	
Approve		Approve	
Date		Date	

Contents

Antenna specification for approval cover	1
Contents.....	2
Antenna performance SPEC overview	3
Match the circuit diagram, antenna images.....	3
VSWR 、 Efficiency.....	4
Structural drawings.....	5

This approval sheet supports for MID project. FPC antennas include in this project. This report is for the performance of WIFI antenna.

- Antenna shape size: Meet the requirement of MID project
- Antenna band: 2400MHz~2500MHz
- Antenna material: Antenna material meet the requirement of MID
- Adhesive performance: Adhesive performance meet the requirement of MID

Antenna performance SPEC overview


Description	2.4GHz~2.5GHz	Units
VSWR	≤2.0	
Average Antenna Gain	≥1.0	dB
Antenna Efficiency	≥40	%
Feed Impedance	50 ohms	
Operating Temperature	-40 to +85 deg C	
Polarization / Azimuth	Linear / Omni-directional	

● Mechanical Information

Mechanical Dimension	
Cable Length	130mm/Black
Description	WIFI antenna
Material	FPC
Coaxial Cable	50Ohm/O.D.1.13mm
Environmental	
Operation Temperature	-40 to +85 deg C
Storage Temperature	-40 to +85 deg C

2:Match the circuit diagram, antenna images


2.1 Match the circuit diagram

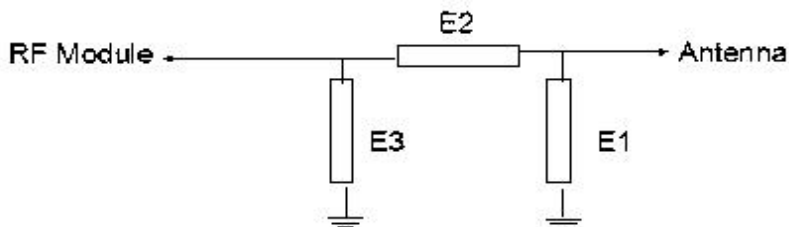

Our company did not modify the antenna matching


3: VSWR、Efficiency

3.1 VSWR

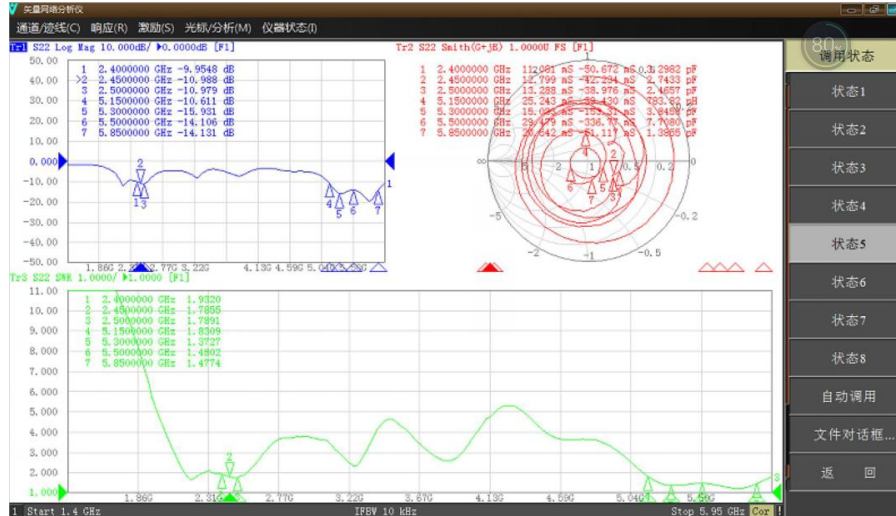

3.2 Efficiency

Passive Test For WIFI2.4											
Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)	Gain (dBd)	UHS (%)	DHS (%)	Max (dB)	Min (dB)	Attenut Hor	Attenut Ver	
2400	53.34	-2.73	1.35	-1.47	20.703	32.638	0.68	-7.37	48.04	48.09	
2410	48.04	-3.18	1.29	-1.66	18.519	29.518	0.49	-7.81	47.59	47.64	
2420	48.65	-3.13	1.18	-1.37	18.29	30.36	0.78	-7.82	47.92	48.01	
2430	48.24	-3.17	1.12	-1.17	17.768	30.467	0.98	-7.88	47.46	47.57	
2440	52.1	-2.83	1.5	-0.65	18.484	33.613	1.5	-7.37	47.72	47.88	
2450	50.66	-2.95	1.61	-0.54	17.868	32.791	1.61	-7.52	47.65	47.81	
2460	48.23	-3.17	1.53	-0.62	16.994	31.236	1.53	-7.69	47.84	47.97	
2470	49.44	-3.06	1.81	-0.34	17.343	32.099	1.81	-7.55	47.92	48.04	
2480	55.15	-2.58	2.38	0.23	19.234	35.915	2.38	-7.08	47.86	47.88	
2490	60.33	-2.19	2.71	0.56	21.417	38.914	2.71	-6.45	48.2	48.18	
2500	58.73	-2.31	2.66	0.51	20.971	37.758	2.66	-6.67	48.05	47.98	

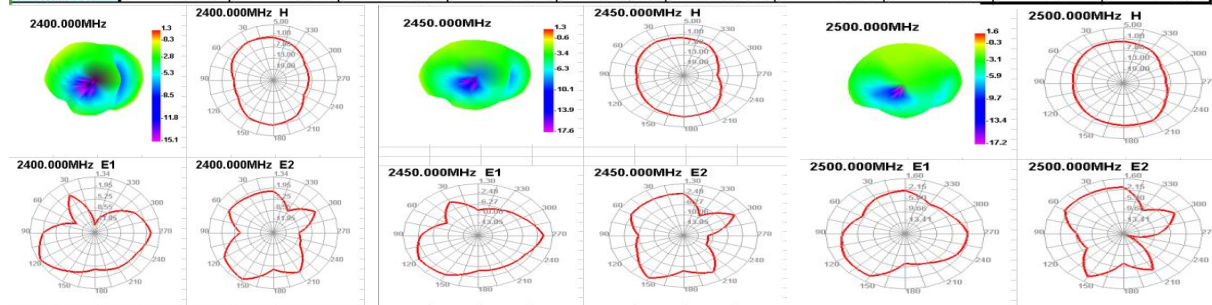

4:Structural drawings

