

FCC TEST REPORT

for

47 CFR Part 15 Subpart C

Equipment : **HANDHELD COMPUTER**
Trade Name : **CReTE**
Model No. : **DA04I / DA04M**
FCC ID : **IR5DA04IM**
Filing Type : **Certification**
Applicant : **CReTE SYSTEM INC.**
7F, No. 250, Sec. 3, Pei Shen Rd., Shen Keng
Hsiang, Taipei County, Taiwan

- The test result refers exclusively to the test presented test model / sample.
- Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.
- **Certificate or Test Report must not be used by the applicant to claim the product in this test report endorsement by NVLAP or any agency of U.S. government.**
- The data shown in this test report were carried out on Dec. 25, 2004 at **Sporton International Inc. LAB.**



Dr. Daniel Lee
EMC/SAR Manager

SPORTON International Inc.

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

SPORTON International Inc.

TEL : 886-2-2696-2468

FAX : 886-2-2696-2255



Table of Contents

History of this test report.....	ii
1. General Description of Equipment under Test.....	1
1.1. Applicant.....	1
1.2 Manufacturer	1
1.3 Basic Description of Equipment under Test.....	1
1.4 Feature of Equipment under Test.....	2
2 Test Configuration of Equipment under Test.....	3
2.1 Test Manner	3
2.2 Test Mode.....	3
2.3 Connection Diagram of Test System.....	4
2.4 Ancillary Equipment List.....	4
3. RF Utility.....	5
4. General Information of Test.....	6
4.1 Test Voltage	6
4.2 Standard for Methods of Measurement.....	6
4.3 Test in Compliance with	6
4.4 Frequency Range Investigated	6
4.5 Test Distance.....	6
5. Test Data and Test Result.....	7
5.1 List of Measurements and Examinations	7
5.2 6dB Bandwidth Measurement	9
5.3 Power Spectral Density Measurement.....	13
5.4 Band Edges Measurement.....	17
5.5 Hopping Channel Separation	24
5.6 Number of Hopping Frequency	28
5.7 Hopping Channel Bandwidth.....	30
5.8 Dwell Time of Each Frequency within a 30 Seconds Period.....	34
5.9 Peak Output Power Measurement	41
5.10 Conducted Emission Measurement	42
5.11 Radiated Emission Measurement	47
5.12 Antenna Requirements.....	60
6. List of Measuring Equipments Used	61
7. Uncertainty Evaluation.....	62
Appendix A. Photographs of EUT External	
Appendix B. Photographs of EUT Internal	
Appendix C. Photographs of Setup	



History of this test report

Original Report Issue Date: Dec. 28, 2004

No additional attachment.

Additional attachment were issued as following record:

Attachment No.	Issue Date	Description



1. General Description of Equipment under Test

1.1. Applicant

CReTE SYSTEM INC.

7F, No. 250, Sec. 3, Pei Shen Rd., Shen Keng Hsiang, Taipei County, Taiwan

1.2 Manufacturer

CReTE SYSTEM INC.

7F, No. 250, Sec. 3, Pei Shen Rd., Shen Keng Hsiang, Taipei County, Taiwan

1.3 Basic Description of Equipment under Test

Equipment : HANDHELD COMPUTER
Trade Name : CReTE
Model No. : DA04I / DA04M
FCC ID : IR5DA04IM
Power Supply Type : Switching
AC Power Cord : AC 120V, Non-shielded ,1.2meter,2pin

**1.4 Feature of Equipment under Test**

Product Feature & Specification			
1. Type of Modulation	802.11b:CCK(11Mbps),DQPSK(5.5Mbps) DQPSK(2Mbps),DBPSK(1Mbps) BT: GFSK		
2. Number of Channels	802.11b: 11 Channels BT: 79 Channels		
3. Frequency Band	2.4GHz~2.4835GHz		
4. Carrier Frequency of each channel	802.11b: $2412\text{MHz}+(n-1)*5\text{MHz}$, $n=1\sim11$ BT: $2402\text{MHz}+(n-1)*1\text{MHz}$, $n=1\sim79$		
5. Channel Spacing	802.11b: 5MHz BT: 1MHz		
6. Maximum Output Power to Antenna (Normal Condition)	802.11b: 16.1 dBm BT: 0.59 dBm		
7. Type of Antenna Connector	Hirose W-FL-R-SMT (10) connector		
8. Antenna Type	PIFA		
9. Antenna Gain	-0.44 dBi		
10. Function Type	Transmitter		Transceiver V
11. Duty Cycle	N/A		
12. Basic function of product	With Wireless LAN and BT for data networking applications		



2 Test Configuration of Equipment under Test


2.1 Test Manner

- a. The EUT has been associated with peripherals pursuant to ANSI C63.4-2003 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.
- b. For spurious emission below 1GHz, only one channel of each application was tested because it is not related to channel selection.
- c. The EUT is programmed to transmit signal continuously for all testings.
- d. Frequency range investigated: conduction 150 kHz to 30 MHz, radiation 30 MHz to 25000MHz.

2.2 Test Mode

Application	802.11b	BT
Radiated Emission	Mode 1: Tx_CH01_2412 MHz	Mode 4: Tx_CH00_2402 MHz
	Mode 2: Tx_CH06_2437 MHz	Mode 5: Tx_CH39_2441 MHz
	Mode 3: Tx_CH11_2462 MHz	Mode 6: Tx_CH78_2480 MHz
Conducted Emission	Mode 1: PCS1900 Idle + WLAN Mode	Mode 2: PCS1900 Idle + Bluetooth ON Mode

2.3 Connection Diagram of Test System

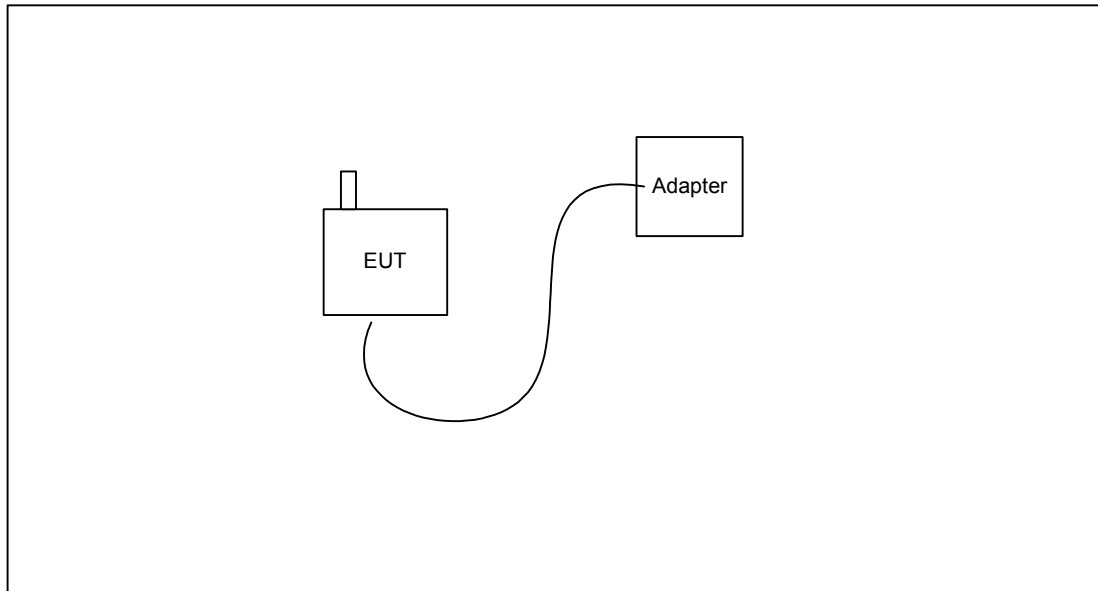

2.4 Ancillary Equipment List

NA



3. RF Utility

The programmed RF Utility is either installed in EUT or Notebook to provide channel selection, power level, data rate and the application type. RF Utility can send transmitting signal for all testings.



4. General Information of Test

Test Site Location : No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park,
Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.
TEL : 886-3-327-3456
FAX : 886-3-318-0055

Test Site No : CO01-HY, 03CH06-HY

4.1 Test Voltage

120V/ 60Hz

4.2 Standard for Methods of Measurement

ANSI C63.4-2003

4.3 Test in Compliance with

47 CFR Part 15 Subpart C

4.4 Frequency Range Investigated

- a. Conduction: from 150 kHz to 30 MHz
- b. Radiation: from 30 MHz to 25000 MHz

4.5 Test Distance

The test distance of radiated emission from antenna to EUT is 3 m.



5. Test Data and Test Result

5.1 List of Measurements and Examinations

The Emission Mode: Wireless LAN

FCC Rule	Description of Test	Result
15.207	Conducted Emission	Pass
15.247(a)(2)	6dB Bandwidth	Pass
15.247(b)	Maximum Peak Output Power	Pass
15.209(a)	Radiated Emission	Pass
15.247 (c)	100kHz Bandwidth of Frequency Band Edges	Pass
15.247(d)	Power Spectral Density	Pass
15.203 15.247(b)(4)	Antenna Requirement	Pass



The Emission Mode: Bluetooth

FCC Rule	Description of Test	Result
<u>15.247(a) (1)</u>	Hopping Channel Bandwidth	Pass
<u>15.247(a)(1)</u>	Hopping Channel Separation	Pass
<u>15.247(a)(1)(iii)</u>	Number of Hopping Frequency Used	Pass
<u>15.247(a)(1)(iii)</u>	Dwell Time of Each Frequency	Pass
<u>15.247(b) (1)</u>	Output Power	Pass
15.247(c)	100KHz Bandwidth of Frequency Band Edges	Pass
15.207	Conducted Emission	Pass
15.209	Radiated Emission	Pass
<u>15.203</u>	Antenna Requirement	Pass

5.2 6dB Bandwidth Measurement


5.2.1 Measuring Instruments :

As described in chapter 6 of this test report.

5.2.2 Test Procedure :

1. The transmitter output was connected to the spectrum analyzer directly.
2. Set RBW of spectrum analyzer to 100kHz and VBW to 100kHz.
3. The 6 dB bandwidth is defined as the frequency range where the power is higher than the peak power minus 6dB.

5.2.3 Test Setup Layout :

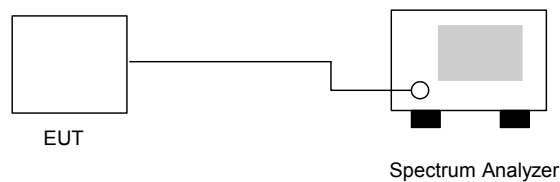

5.2.4 Test Result :


- Application Type : WLAN 802.11b
- Temperature : 24°C
- Relative Humidity : 47%
- Test Enginner : Jay

Channel	Frequency (MHz)	6dB Emission bandwidth (MHz)	Limits (MHz)	Plot Ref. No.
01	2412	10.04	0.5	Mode 1
06	2437	9.96	0.5	Mode 2
11	2462	10.32	0.5	Mode 3




5.2.5 6dB Bandwidth

Mode 1

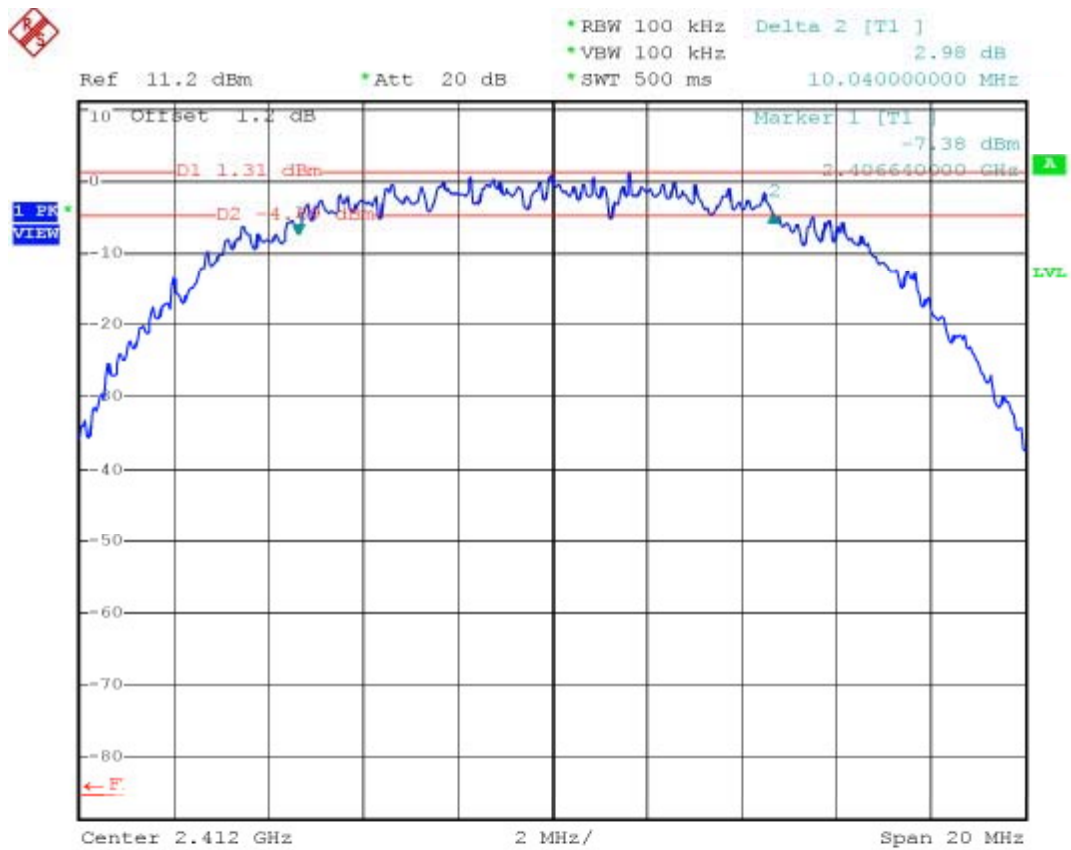




Mode 2

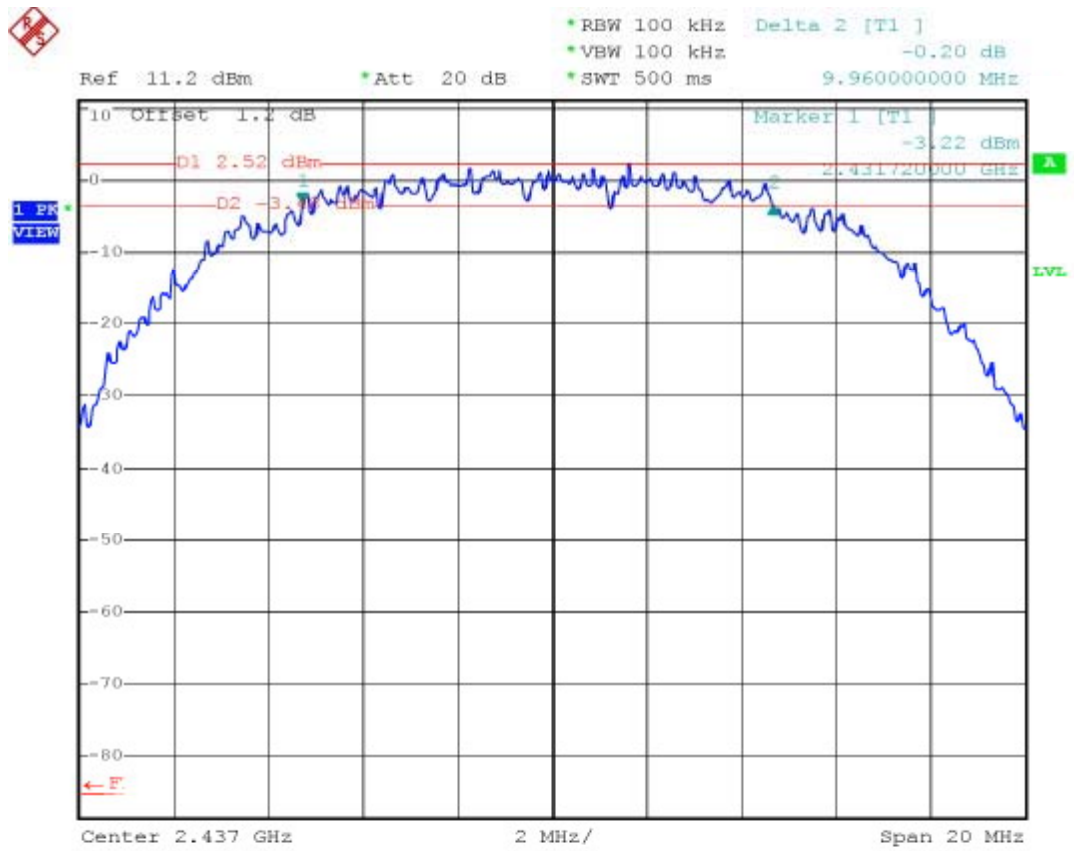



Mode 3

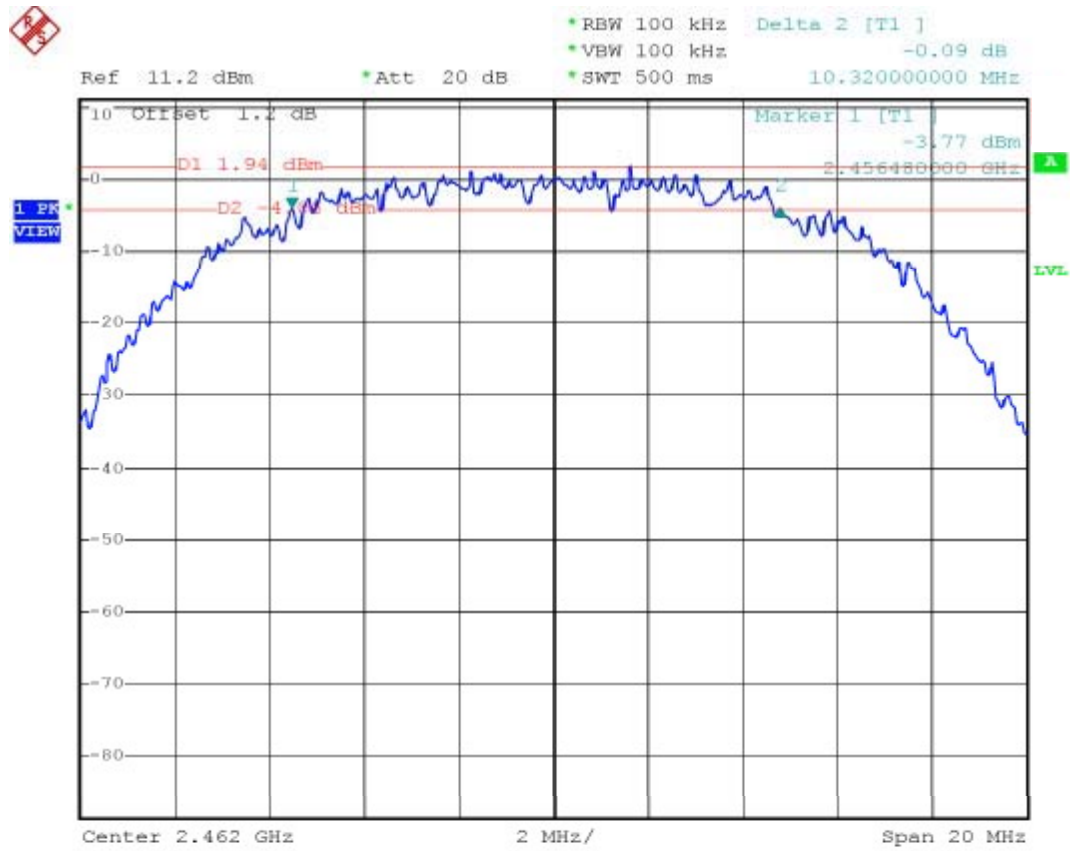

5.3 Power Spectral Density Measurement


5.3.1 Measuring Instruments :

As described in chapter 6 of this test report.

5.3.2 Test Procedure :

1. The transmitter output was connected to spectrum analyzer directly.
2. The spectrum analyzer's resolution bandwidth was set at 3kHz RBW and 30kHz VBW as that of the fundamental frequency. Set the sweep time=span/3kHz.
3. The power spectral density was measured and recorded.
4. The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.

5.3.3 Test Setup Layout :

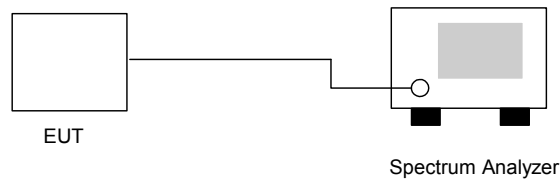

5.3.4 Test Result :


- Application Type : 802.11b
- Temperature : 24°C,
- Relative Humidity : 47%
- Test Enginner : Jay

Channel	Frequency (MHz)	Power Spectral Density (dBm)	Limits (dBm)	Plot Ref. No.
01	2412	-11.05	8	Mode 1
06	2437	-10.15	8	Mode 2
11	2462	-10.48	8	Mode 3




5.3.5 Power Spectral Density

Mode 1

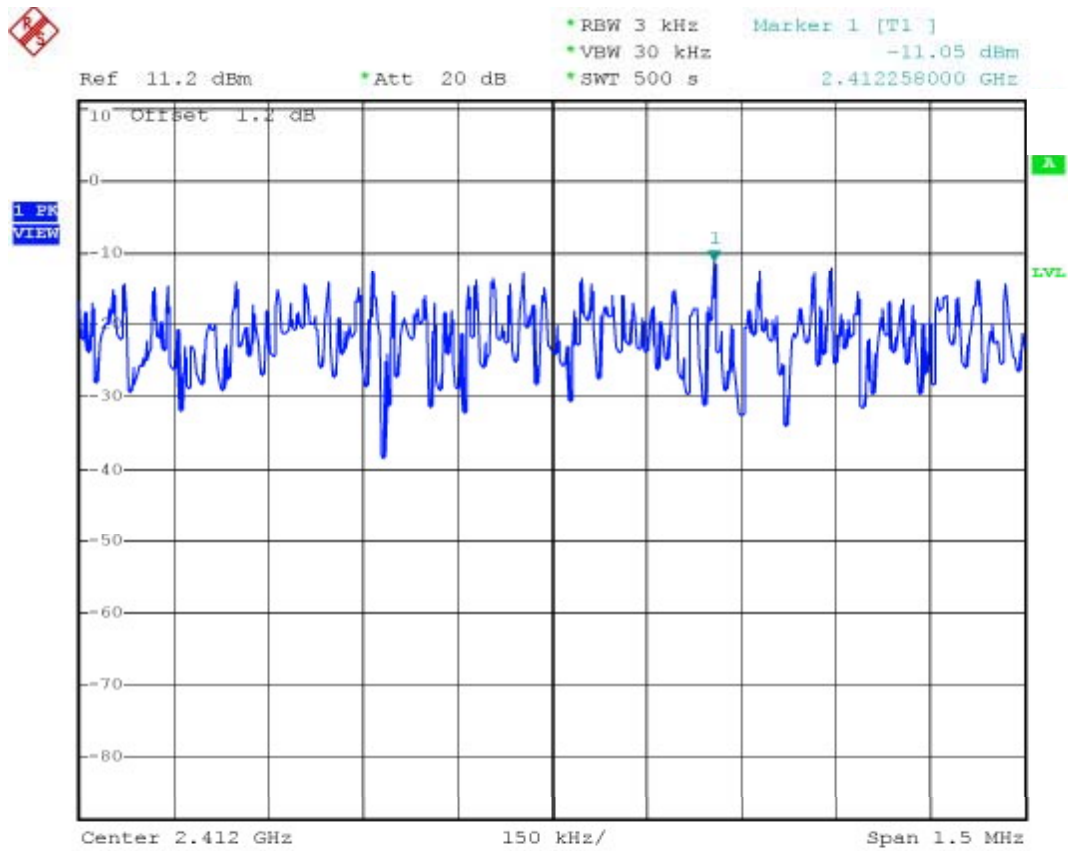




Mode 2

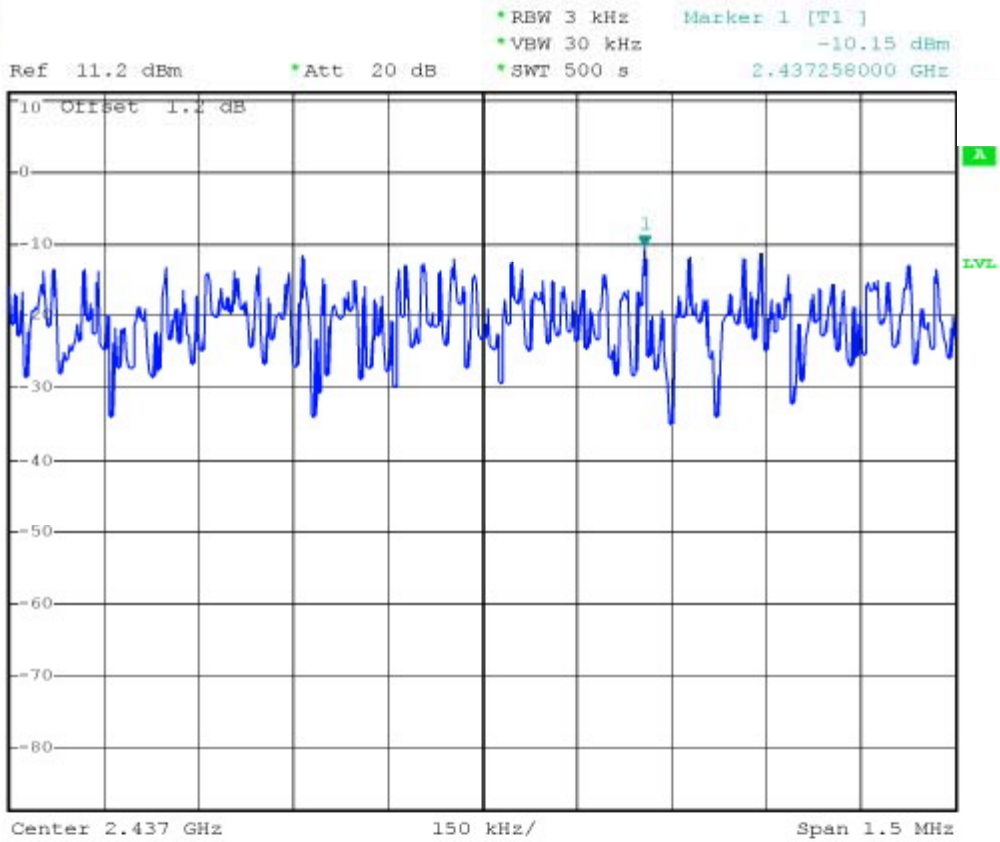



Mode 3

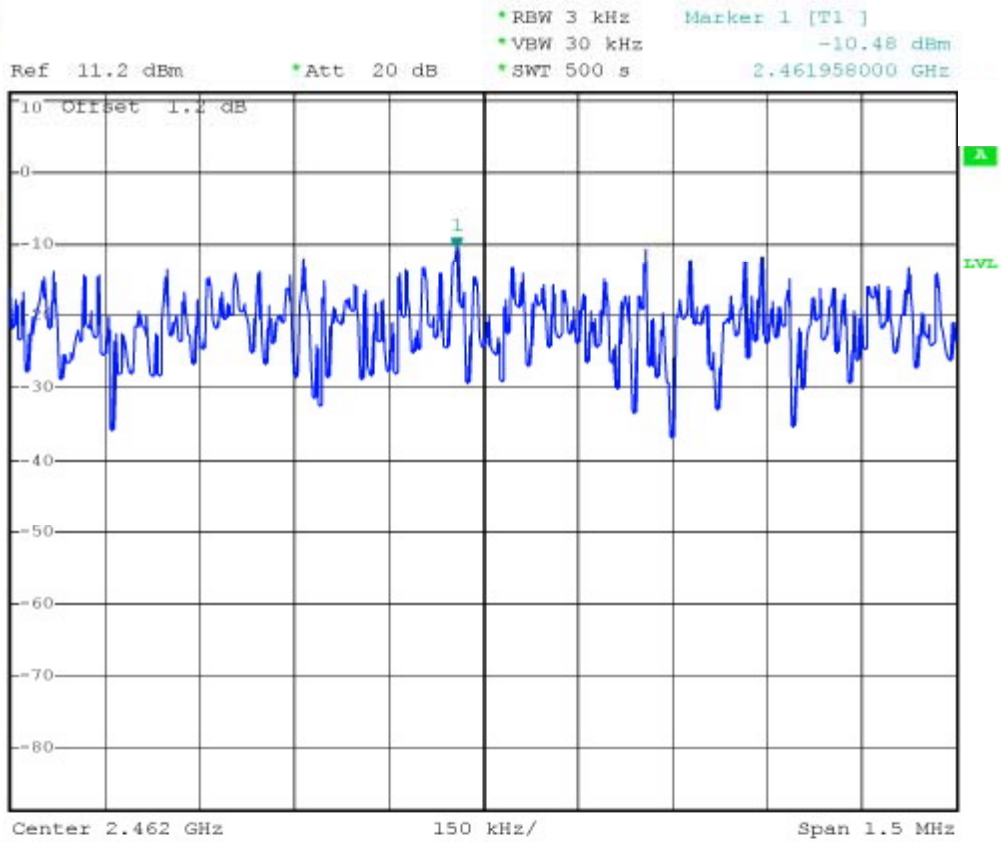



5.4 Band Edges Measurement

5.4.1 Measuring Instruments :

As described in chapter 6 of this test report.

5.4.2 Test Procedure :

1. The transmitter output was connected to the spectrum analyzer via a low lose cable.
2. Set both RBW and VBW of spectrum analyzer to 100kHz with suitable frequency span including 100 kHz bandwidth from band edge.
3. The band edges was measured and recorded.

5.4.3 Test Result :

- Application Type : WLAN 802.11b and BT
- Temperature : 24°C,
- Relative Humidity : 47%
- Test Enginner : Jay

- Test Result in WLAN lower band (Channel 1) : PASS
- Test Result in WLAN higher band (Channel 11) : PASS
- Test Result in BT lower band (Channel 00) : PASS
- Test Result in BT higher band (Channel 78) : PASS

5.4.4 Note on Band Edge Emission :

➤WLAN 802.11b

CH01 (Horizontal)

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Preamp Factor (dB)	Cable Loss (dB)	Detect Mode
2390.00	55.12	-18.88	74.00	58.65	28.40	35.25	3.32	Peak
2390.00	35.49	-18.51	54.00	39.02	28.40	35.25	3.32	Average

CH01 (Vertical)

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Preamp Factor (dB)	Cable Loss (dB)	Detect Mode
2390.00	54.83	-19.17	74.00	58.36	28.40	35.25	3.32	Peak
2390.00	36.29	-17.71	54.00	39.82	28.40	35.25	3.32	Average



CH11 (Horizontal)

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Preamp Factor (dB)	Cable Loss (dB)	Detect Mode
2483.50	45.35	-28.65	74.00	48.74	28.48	35.26	3.38	Peak
2483.50	34.66	-19.34	54.00	38.06	28.48	35.26	3.38	Average

CH11 (Vertical)

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Preamp Factor (dB)	Cable Loss (dB)	Detect Mode
2483.50	45.53	-28.47	74.00	48.93	28.48	35.26	3.38	Peak
2483.50	34.35	-19.65	54.00	37.75	28.48	35.26	3.38	Average

➤BT

CH00 (Horizontal)

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Preamp Factor (dB)	Cable Loss (dB)	Detect Mode
2358.00	53.55	-20.45	74.00	57.14	28.36	35.24	3.29	Peak
2358.00	41.84	-12.16	54.00	45.43	28.36	35.24	3.29	Average

CH00 (Vertical)

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Preamp Factor (dB)	Cable Loss (dB)	Detect Mode
2388.00	53.62	-20.38	74.00	57.16	28.40	35.24	3.39	Peak
2388.00	41.95	-12.05	54.00	45.49	28.40	35.24	3.39	Average



CH78 (Horizontal)


Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Preamp Factor (dB)	Cable Loss (dB)	Detect Mode
2483.5	71.68	-2.32	74.00	75.08	28.48	35.26	3.38	Peak
2483.5	51.31	-2.69	54.00	54.71	28.48	35.26	3.38	Average


CH78 (Vertical)


Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Preamp Factor (dB)	Cable Loss (dB)	Detect Mode
2483.5	72.73	-1.27	74.00	76.12	28.48	35.26	3.38	Peak
2483.5	51.21	-2.79	54.00	54.61	28.48	35.26	3.38	Average




5.4.5 20dB Band Edge

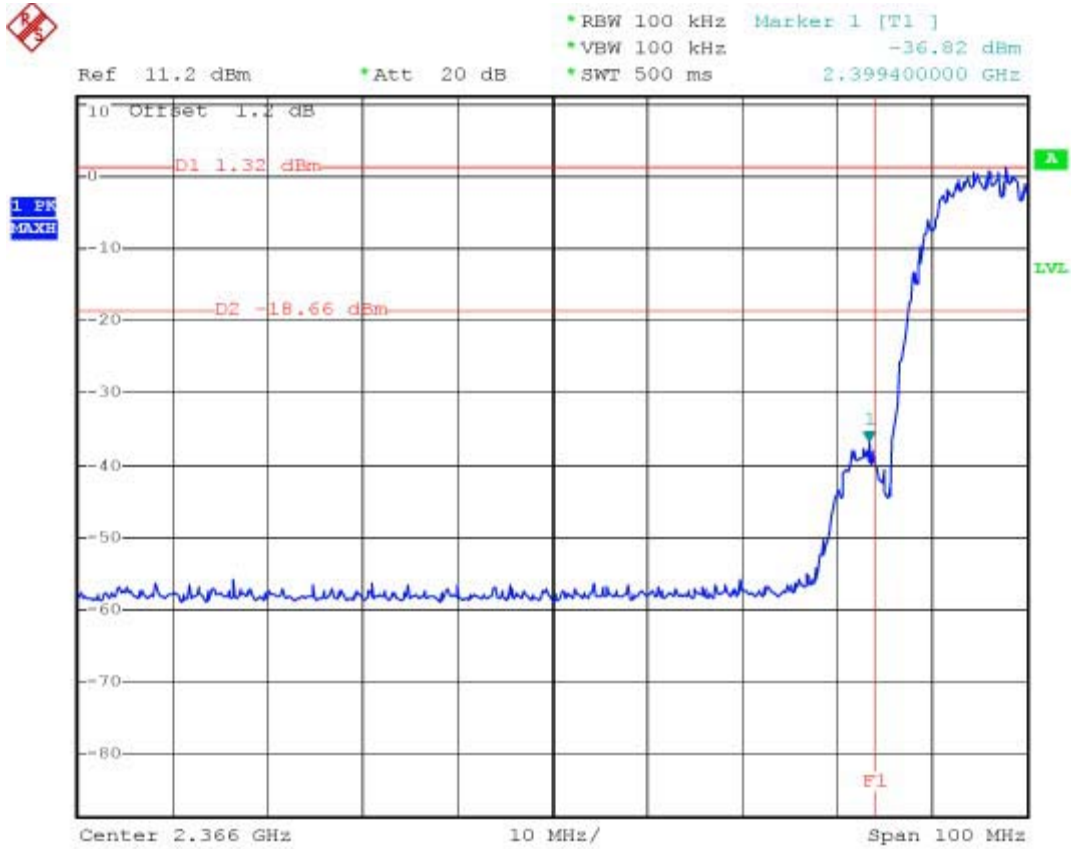

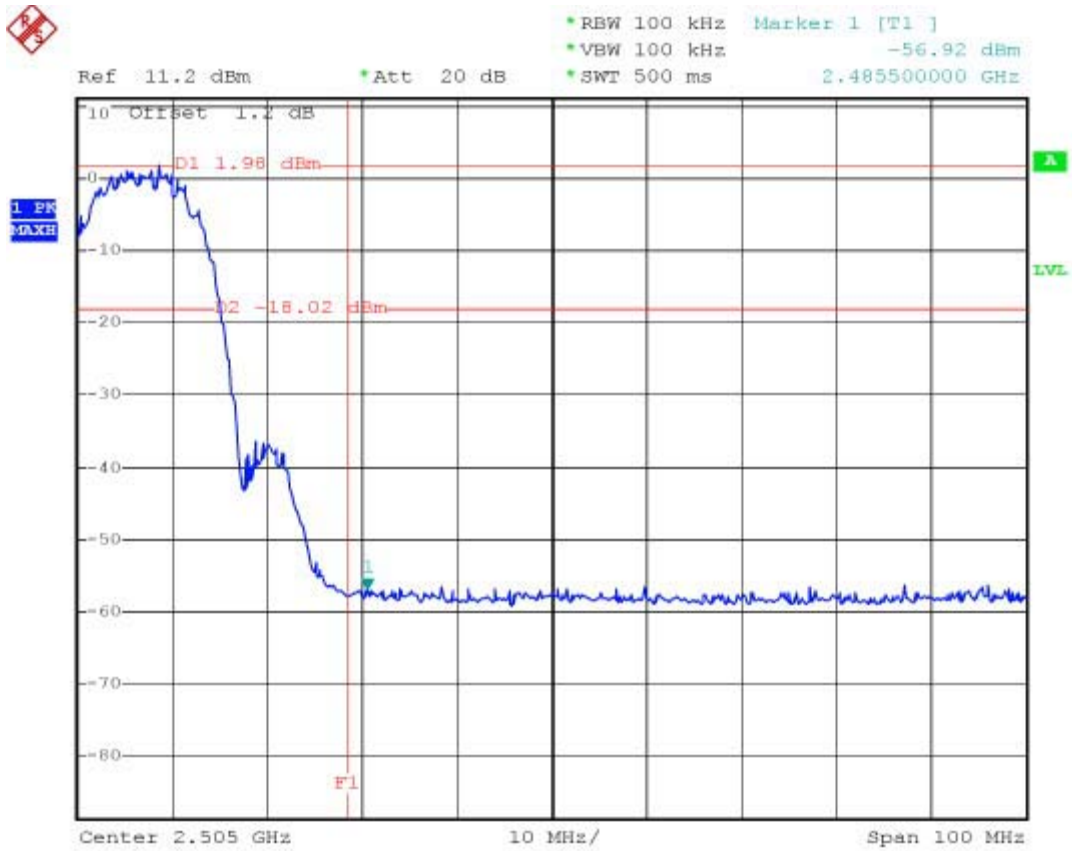

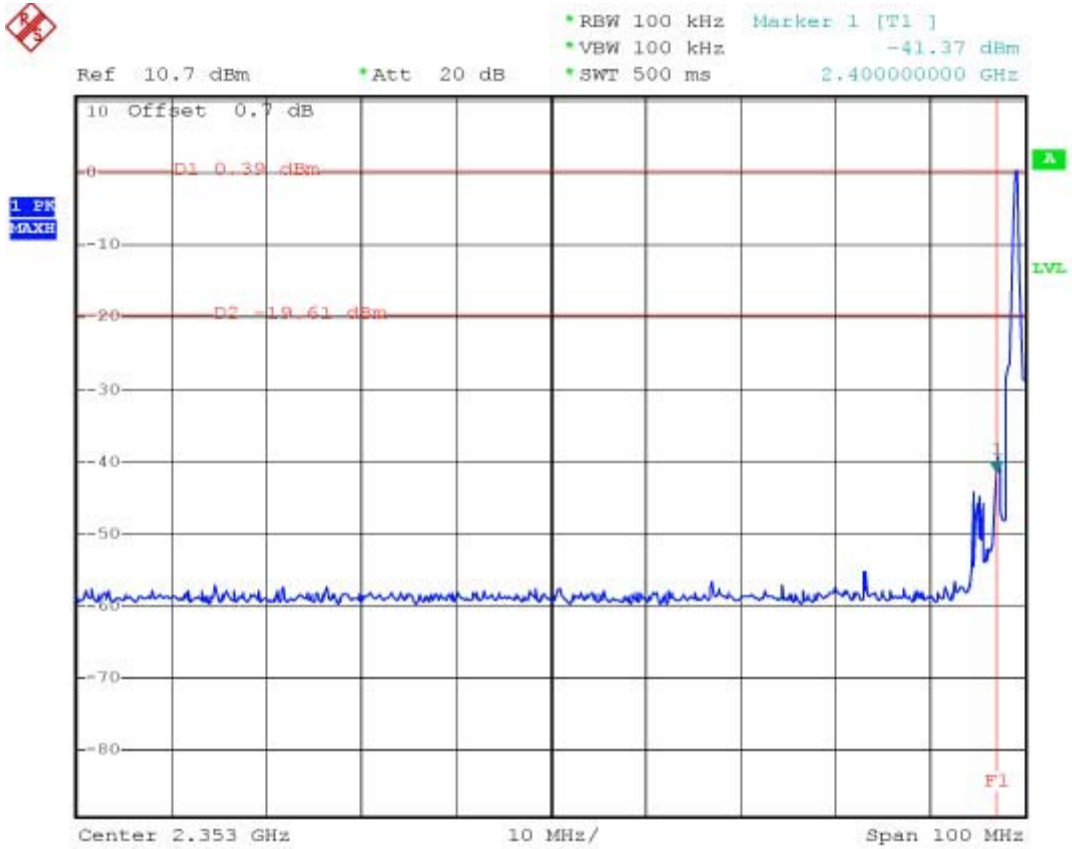

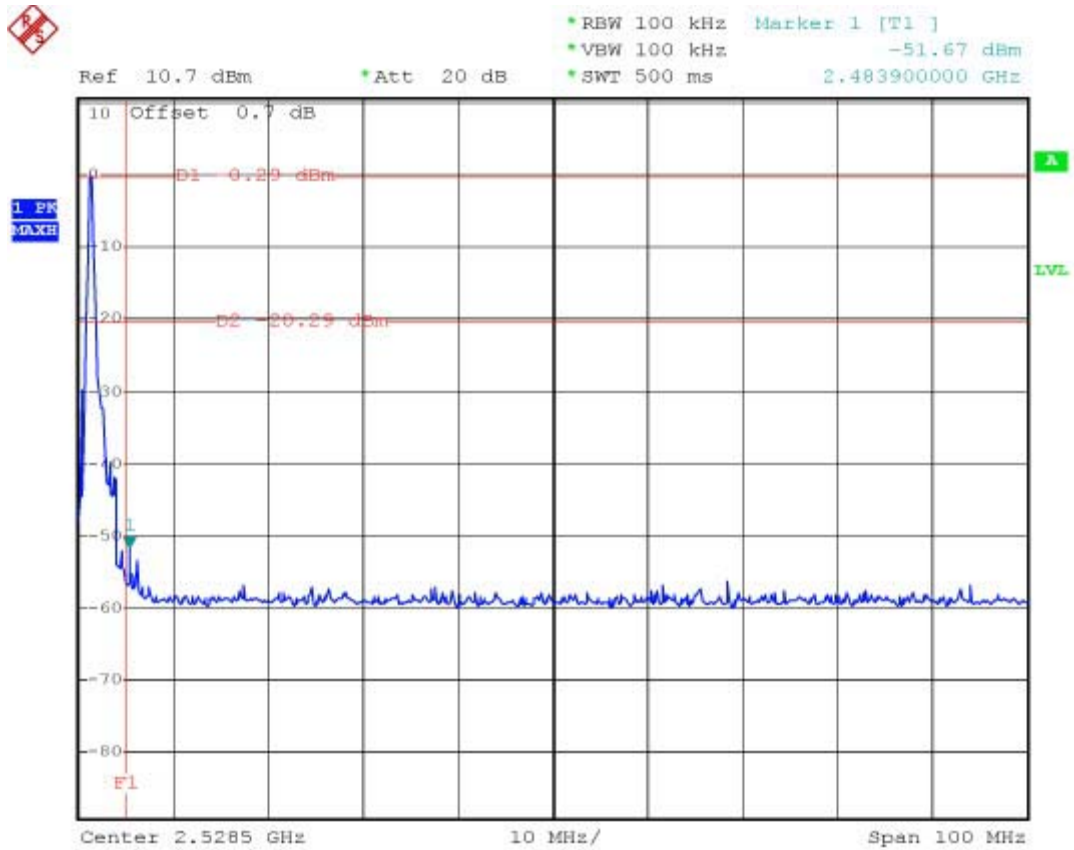

5.5 Hopping Channel Separation


5.5.1 Measuring Instruments :

As described in chapter 9 of this test report.

5.5.2 Test Procedure :

1. The output of EUT was connected to the spectrum analyzer by a low loss cable..
2. Set RBW of spectrum analyzer to 100KHz and VBW to 100KHz.
3. The Hopping Channel Separation is defined as the channel is separated with the next channel.

5.5.3 Test Setup Layout :

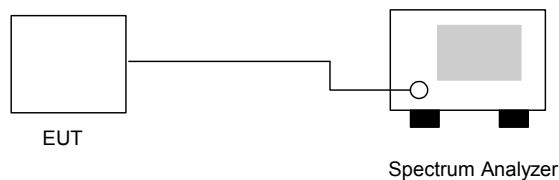

5.5.4 Test Result : The spectrum analyzer plots are attached as below

- Application Type : BT
- Temperature : 24°C,
- Relative Humidity : 47%
- Test Enginner : Jay


Channel	Carrier Frequency		Limits (KHz)	Plot Ref. No.
	Frequency (MHz)	Separation (KHz)		
00	2402	1000	728KHz	Mode 1
39	2441	1000	732KHz	Mode 2
78	2480	1000	728KHz	Mode 3

Note: Limits =25KHz or the 20dB bandwidth of the hopping channel, which ever is greater




5.5.5 Hopping Channel Separation

Mode 1

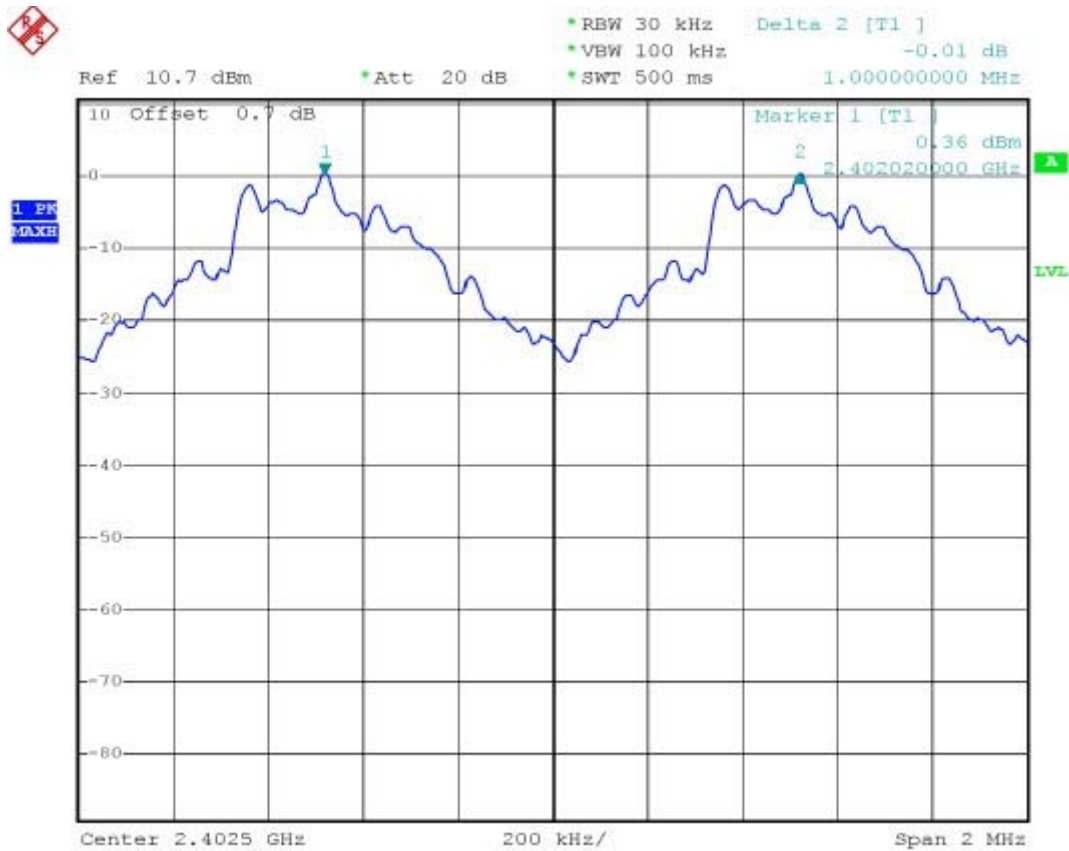




Mode 2

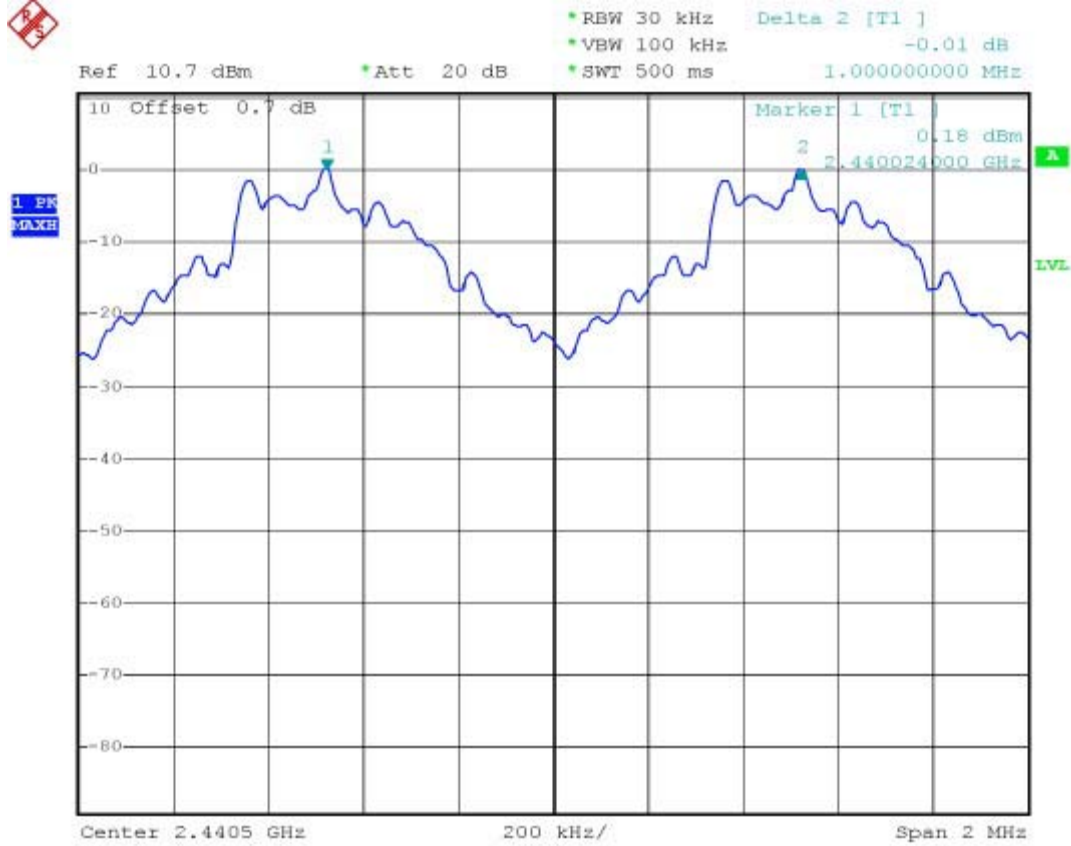



Mode 3

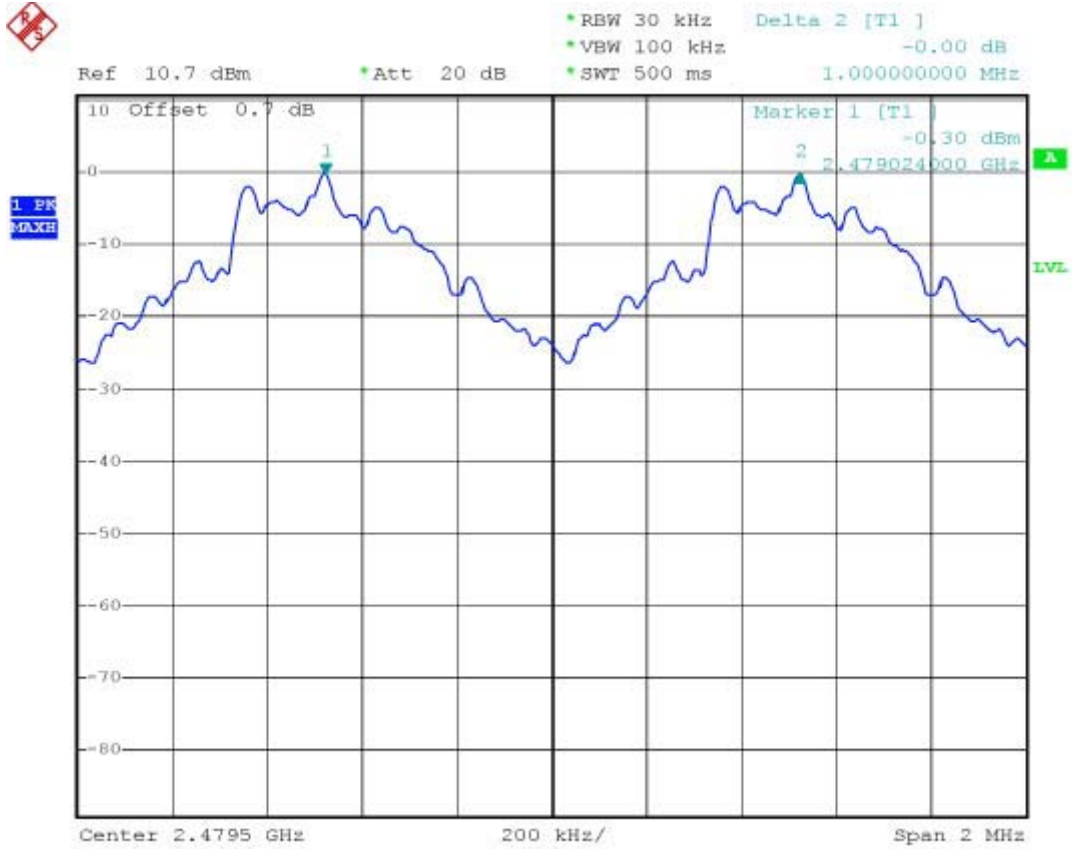

5.6 Number of Hopping Frequency


5.6.1 Measuring Instruments :

As described in chapter 9 of this test report.

5.6.2 Test Procedure :

1. The output of EUT was connected to the spectrum analyzer by a low loss cable.
2. Set RBW of spectrum analyzer to 100KHz and VBW to 100KHz.
3. The number of hopping frequency used is defined as the device has the numbers of total channel.

5.6.3 Test Setup Layout :

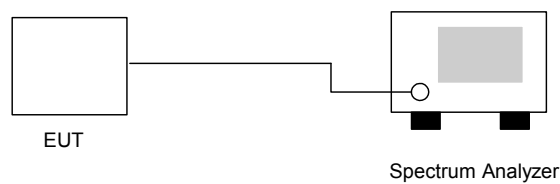


5.6.4 Test Result : See spectrum analyzer plots below

- Application Type : BT
 - Temperature : 24°C,
 - Relative Humidity : 47%
- Test Enginner : Jay

Number of Hopping Frequency (Channel)	Limits (Channel)
79	75



5.6.5 Number of Hopping Frequency

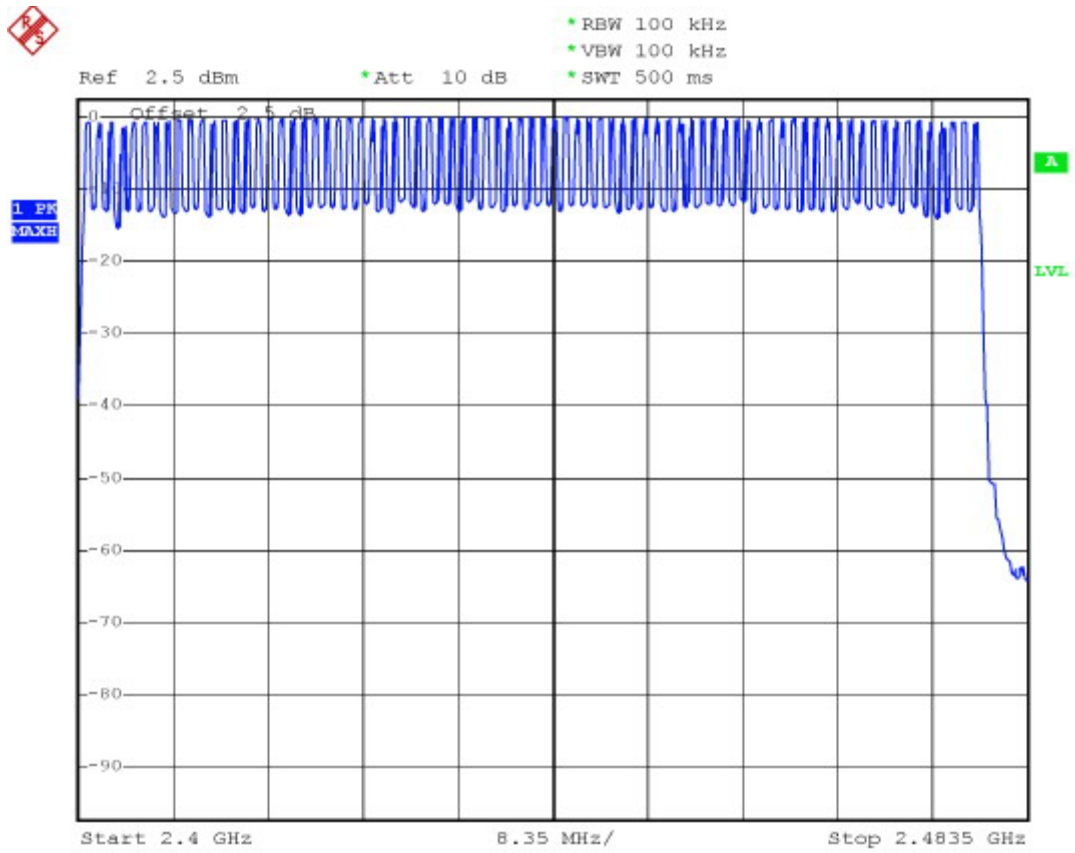

5.7 Hopping Channel Bandwidth


5.7.1 Measuring Instruments :

As described in chapter 9 of this test report.

5.7.2 Test Procedure :

1. The transmitter output was connected to the spectrum analyzer by a low loss cable.
2. Set RBW of spectrum analyzer to 30KHz and VBW to 300KHz.
3. The Hopping Channel bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20 dB.

5.7.3 Test Setup Layout :

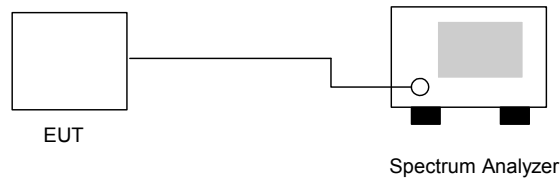

5.7.4 Test Result : See spectrum analyzer plots below


- Application Type : BT
- Temperature : 26°C,
- Relative Humidity : 53%
- Test Enginner : Jay

Channel	Frequency (MHz)	Hopping Channel Bandwidth (MHz)	Limits (MHz)	Plot Ref. No.
00	2402	0.7280	1.0	Mode 1
39	2441	0.7320	1.0	Mode 2
78	2480	0.7280	1.0	Mode 3



5.7.5 Hopping Channel Bandwidth

Mode 1

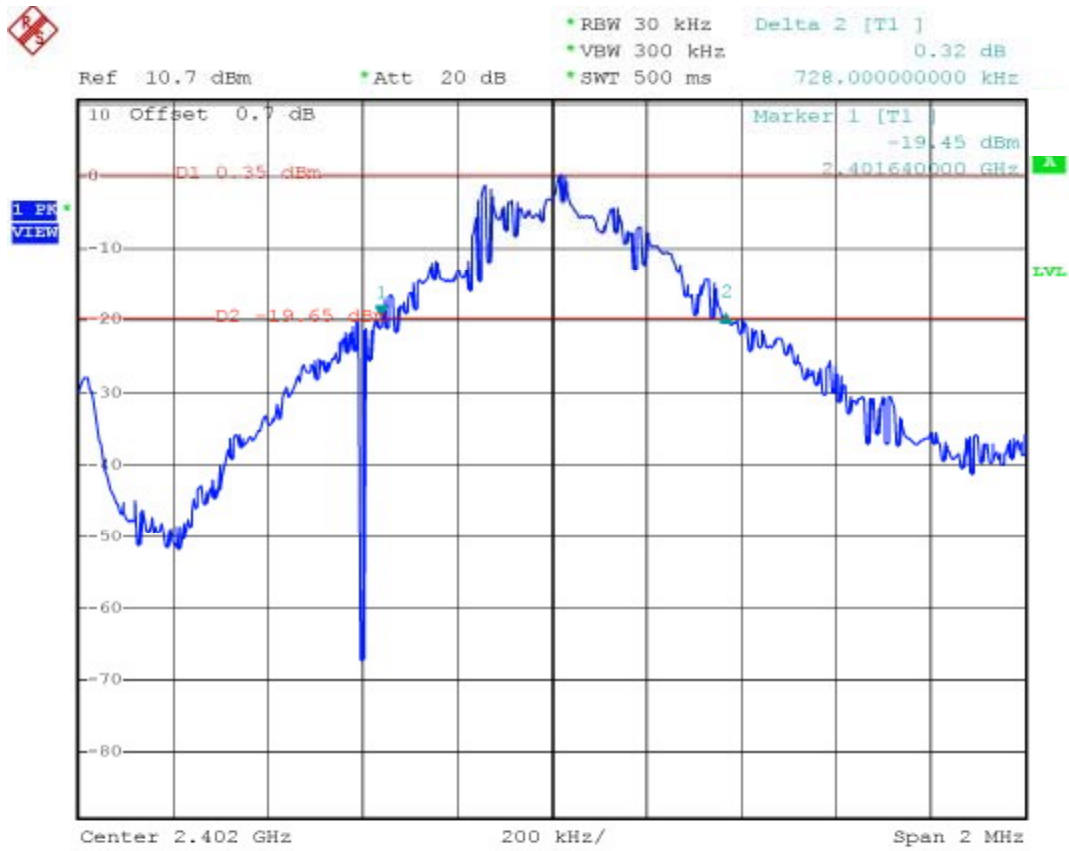




Mode 2




Ref 10.7 dBm *Att 20 dB *RBW 30 kHz Delta 2 [T1]
*VBW 300 kHz -0.44 dB
*SWT 500 ms 732.000000000 kHz

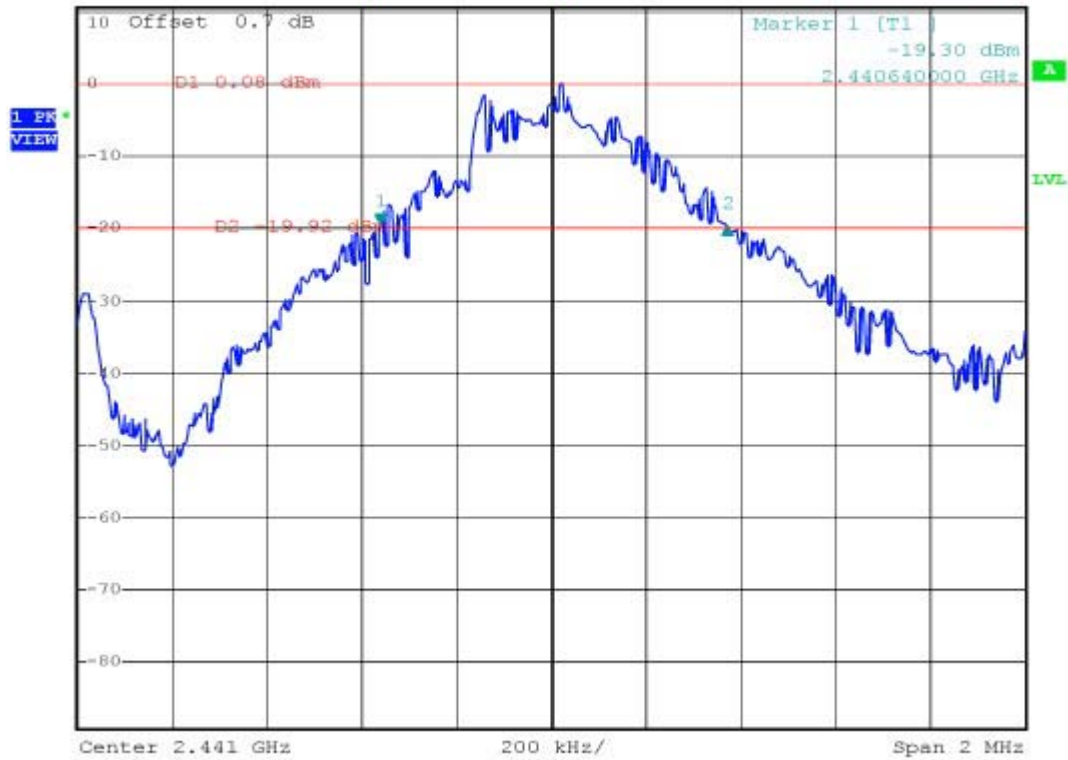



Mode 3

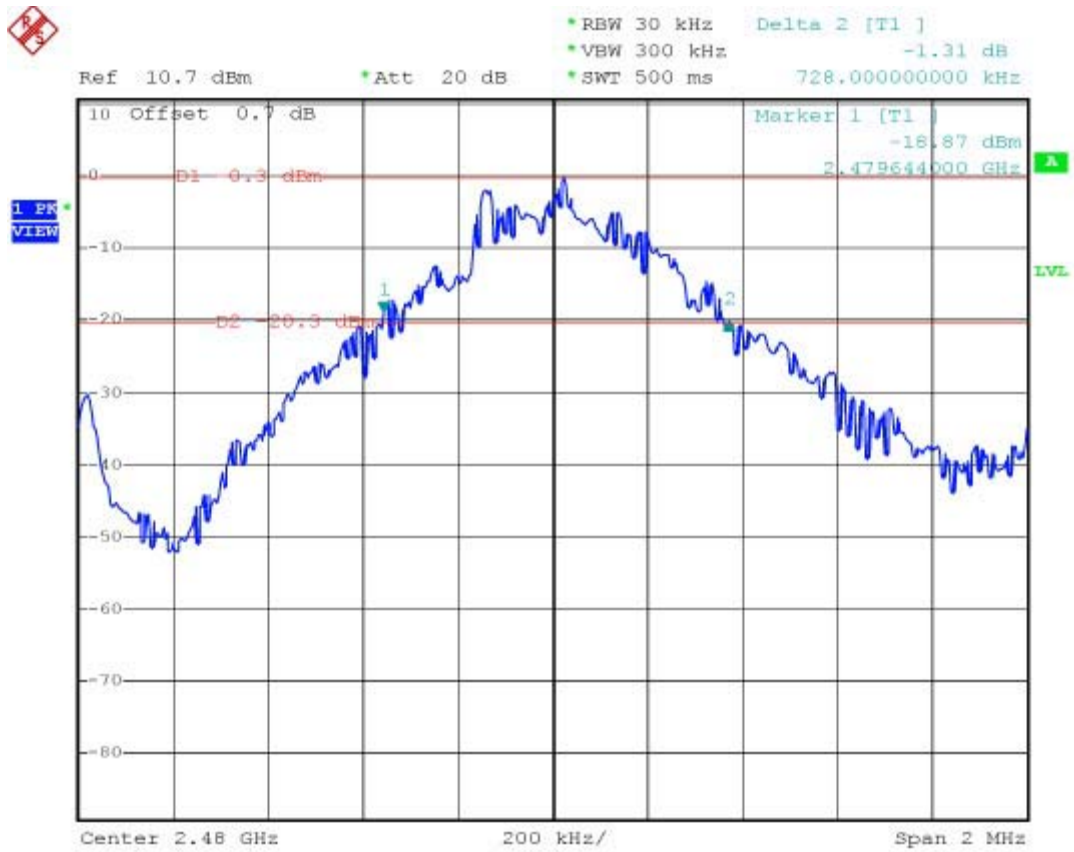

5.8 Dwell Time of Each Frequency within a 30 Seconds Period


5.8.1 Measuring Instruments :

As described in chapter 9 of this test report.

5.8.2 Test Procedure :

1. The transmitter output was connected to the spectrum analyzer by a low loss cable.
2. Set RBW of spectrum analyzer to 1MHz and VBW to 1MHz.
3. Set the center frequency on any frequency would be measure and set the frequency span to zero span.
4. The calculate $= 0.4 * 79 * (1600/79) * t$ (t = the time duration of one single pulse)

5.8.3 Test Setup Layout :

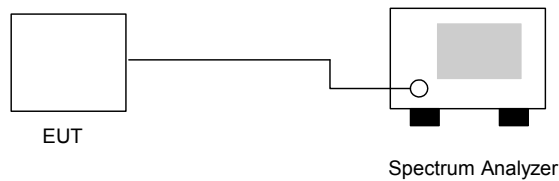


5.8.4 Test Result : See spectrum analyzer plots below


- Application Type : BT
- Temperature : 24°C,
- Relative Humidity : 47%
- Test Enginner : Jay

Channel	Package Mode	Dwell Time (s)	Limits (s)	Plot Ref. No.
00	DH1	0.140	0.4	Mode 1
00	DH3	0.267	0.4	Mode 2
00	DH5	0.318	0.4	Mode 3




5.8.5 Dell Time
Mode 1

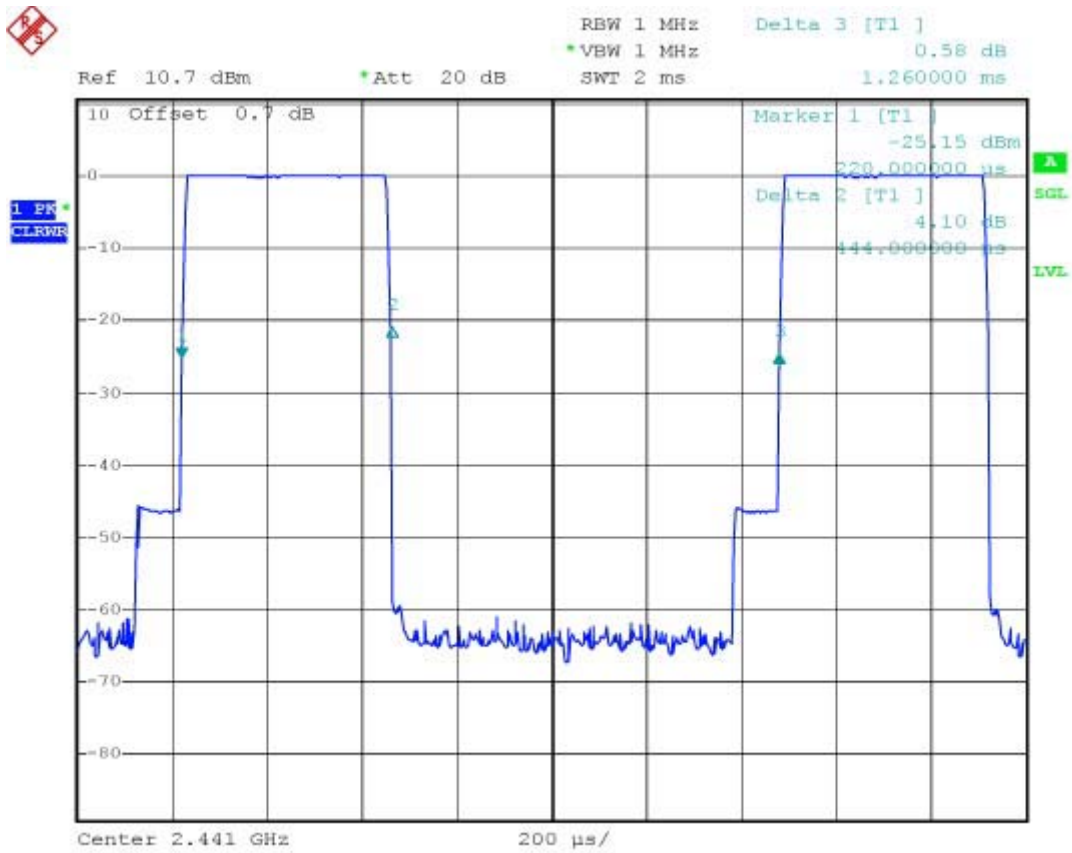

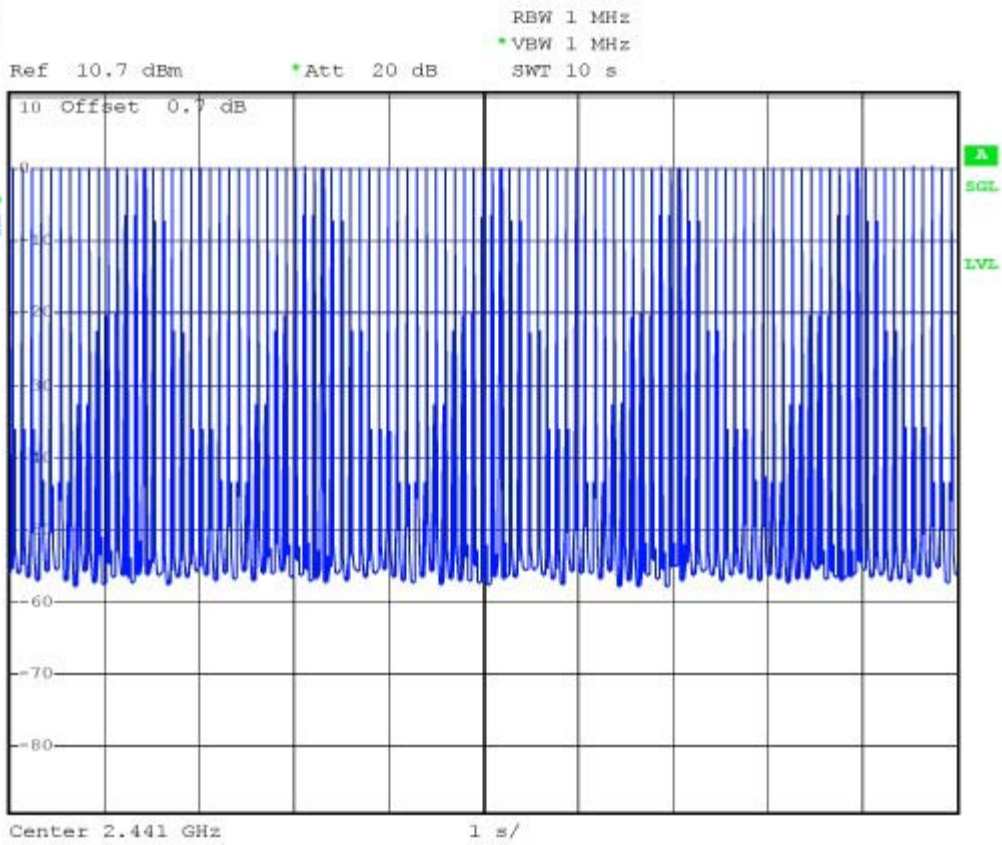




Mode 2

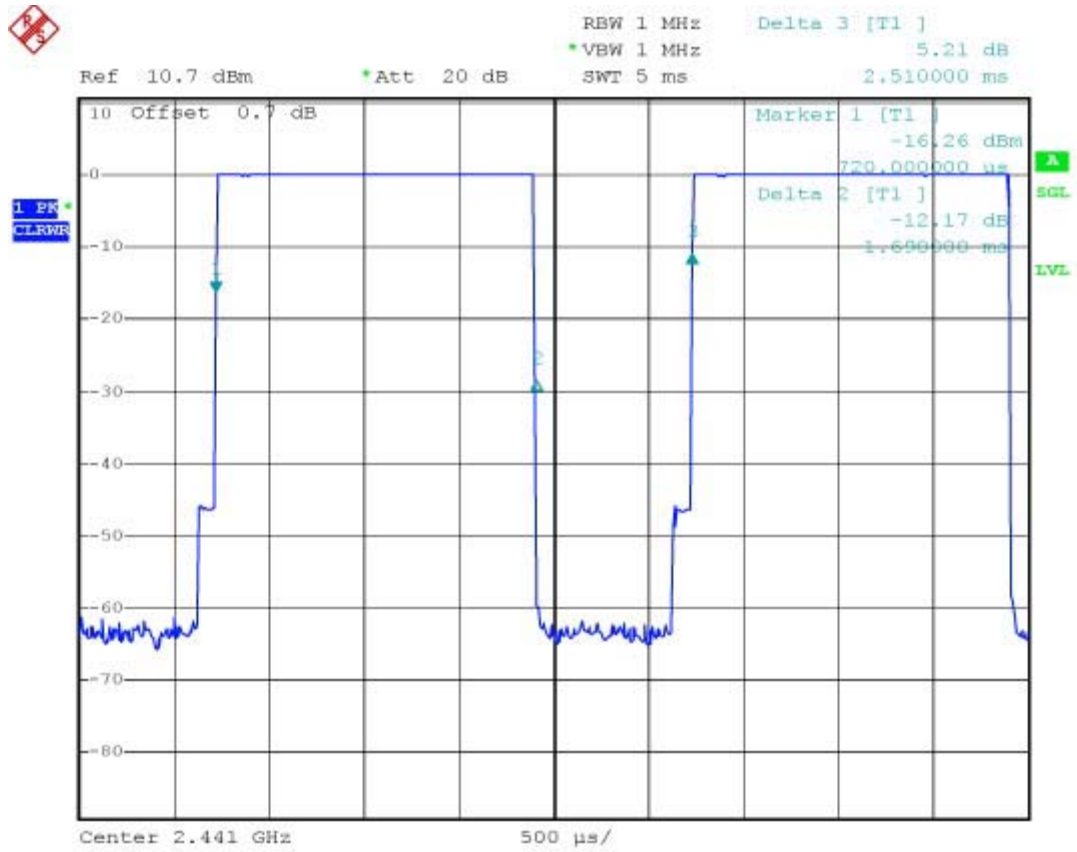



Ref 10.7 dBm *Att 20 dB RBW 1 MHz
*VBW 1 MHz SWT 10 s

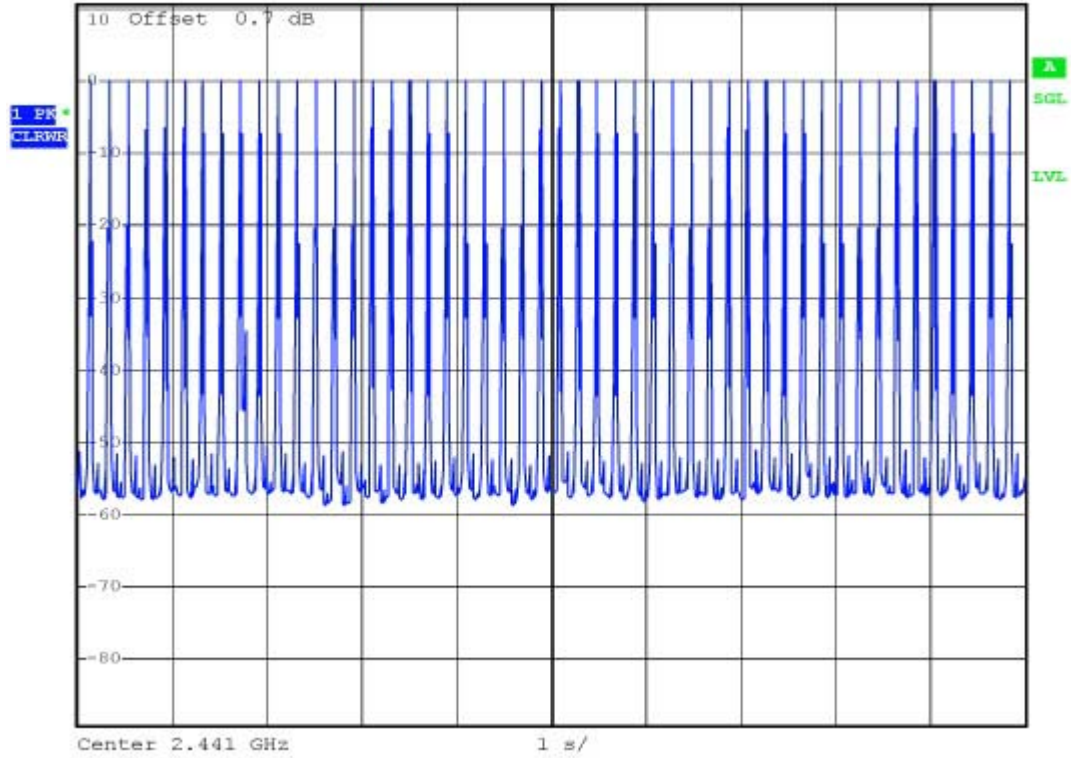





Mode 3



RBW 1 MHz Delta 3 [T1]
*VBW 1 MHz -4.16 dB
*Att 20 dB SWT 10 ms 3.760000 ms
Ref :10.7 dBm Offset 0.7 dB

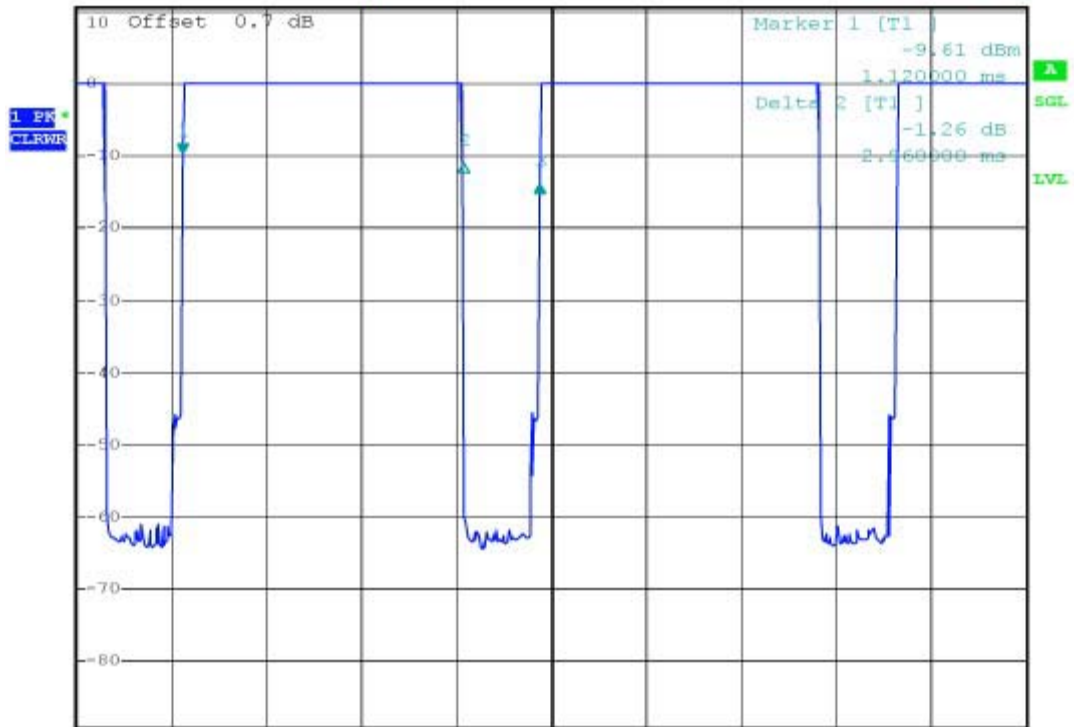

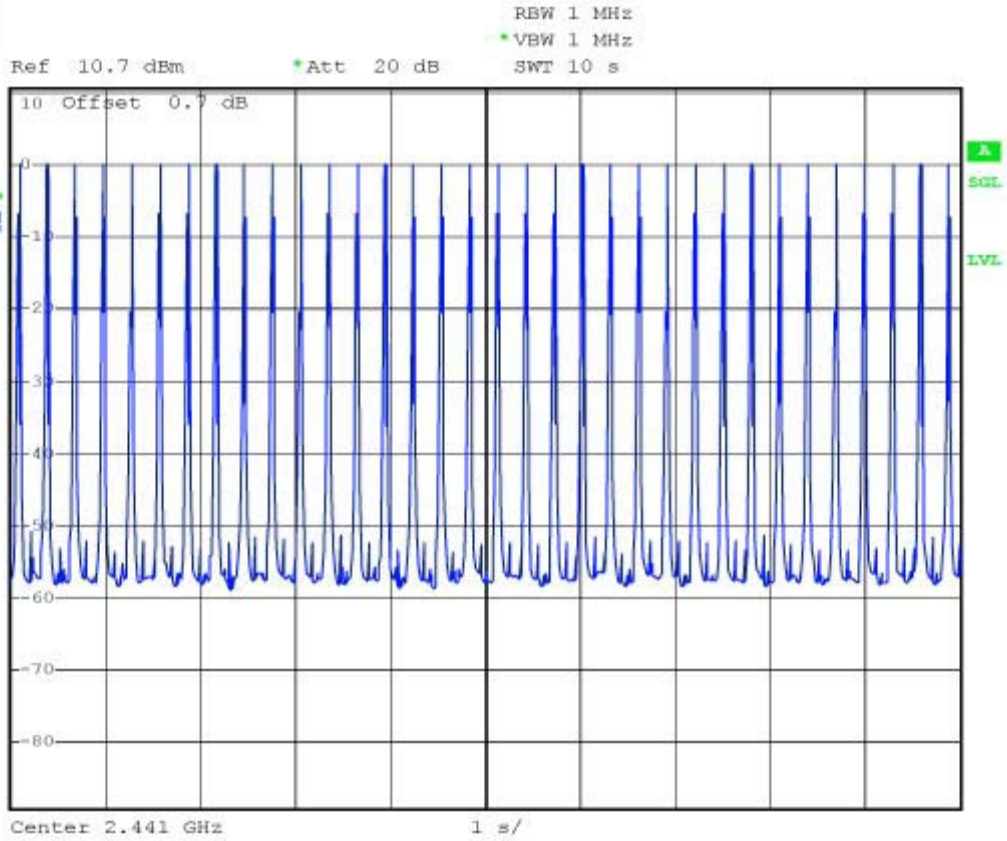

5.9 Peak Output Power Measurement


5.9.1 Measuring Instruments :

As described in chapter 6 of this test report.

5.9.2 Test Procedure :

The antenna port (RF output) of the EUT was connected to the input (RF input) of a power meter.
The power is equal to the reading level on power meter plus cable loss at the EUT antenna terminal.

5.9.3 Test Setup Layout :

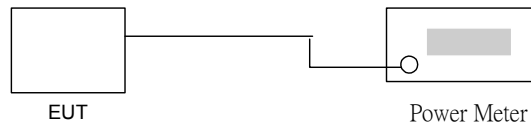

5.9.4 Test Result :

- Application Type : WLAN 802.11b and BT
- Temperature : 24°C
- Relative Humidity : 47 %
- Test Enginner : Jay

WLAN 802.11b

Channel	Frequency (MHz)	Measured Output Power (dBm)	Limits (Watt/dBm)
01	2412	15.71	1W/30 dBm
06	2437	15.67	1W/30 dBm
11	2462	16.1	1W/30 dBm

BT

Channel	Frequency (MHz)	Measured Output Power (dBm)	Limits (Watt/dBm)
00	2402	0.59	1W/30 dBm
39	2441	0.3	1W/30 dBm
78	2480	-0.16	1W/30 dBm



5.10 Conducted Emission Measurement

5.10.1 Measuring Instruments

As described in chapter 6 of this test Report.

5.10.2 Test Procedures


- a. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- b. Connect EUT to the power port of the line impedance stabilization network (LISN).
- c. All the support units are connect to the other LISN.
- d. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- e. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
- f. Both sides of AC line were checked for maximum conducted interference.
- g. The frequency range from 150 kHz to 30 MHz was searched.
- h. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.



5.10.3 Test Data


- Temperature : 24 °C
- Relating Humidity : 47 %
- Test Enginner : Jay
- Test Mode : Mode 1

■ The test that passed at minimum margin was marked by the frame in the following table.

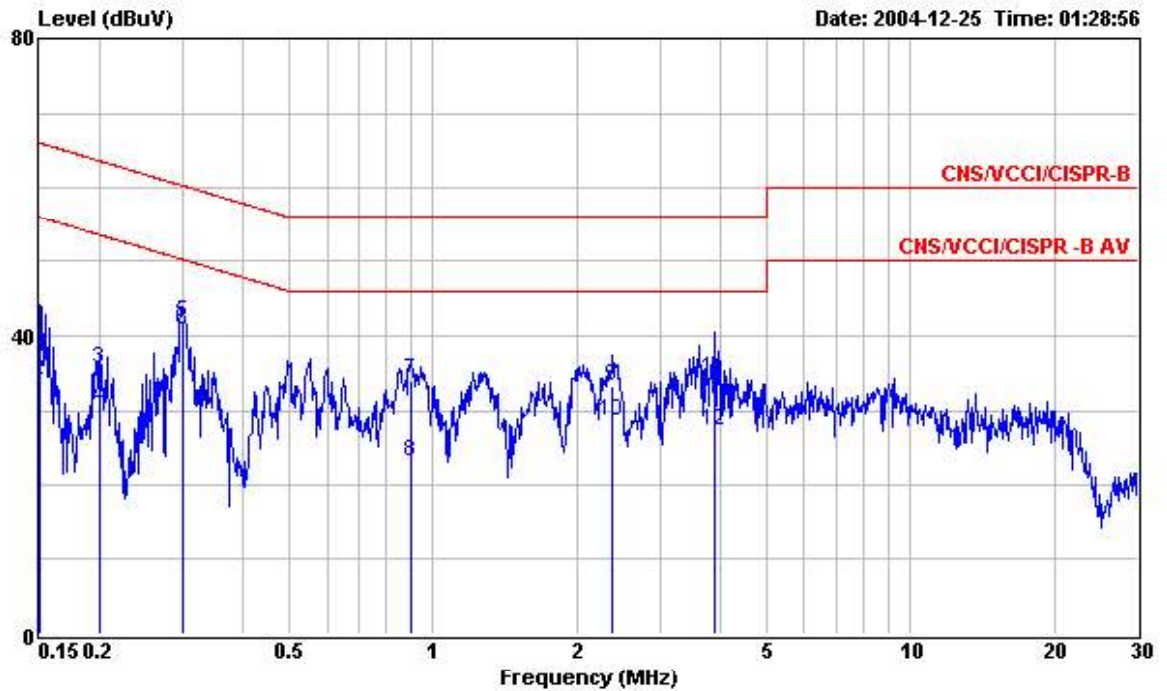

Site : CO01-HY
 Condition : CNS/VCCI/CISPR-B 2003 2001/008 LINE
 EUT :
 Power : 120Vac/60Hz
 Model :
 Memo : PCS1900 Idle+WLAN Mode

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.150	42.09	-23.91	66.00	41.98	0.10	0.01	QP
2	0.150	33.97	-22.03	56.00	33.86	0.10	0.01	Average
3	0.200	35.53	-28.08	63.61	35.41	0.10	0.02	QP
4	0.200	30.51	-23.10	53.61	30.39	0.10	0.02	Average
5	0.299	41.79	-18.48	60.27	41.67	0.10	0.02	QP
6	0.299	40.83	-9.44	50.27	40.71	0.10	0.02	Average
7	0.899	33.95	-22.05	56.00	33.81	0.10	0.04	QP
8	0.899	23.24	-22.76	46.00	23.10	0.10	0.04	Average
9	2.380	33.31	-22.69	56.00	33.13	0.10	0.08	QP
10	2.380	28.51	-17.49	46.00	28.33	0.10	0.08	Average
11	3.880	34.34	-21.66	56.00	34.12	0.10	0.12	QP
12	3.880	27.36	-18.64	46.00	27.14	0.10	0.12	Average

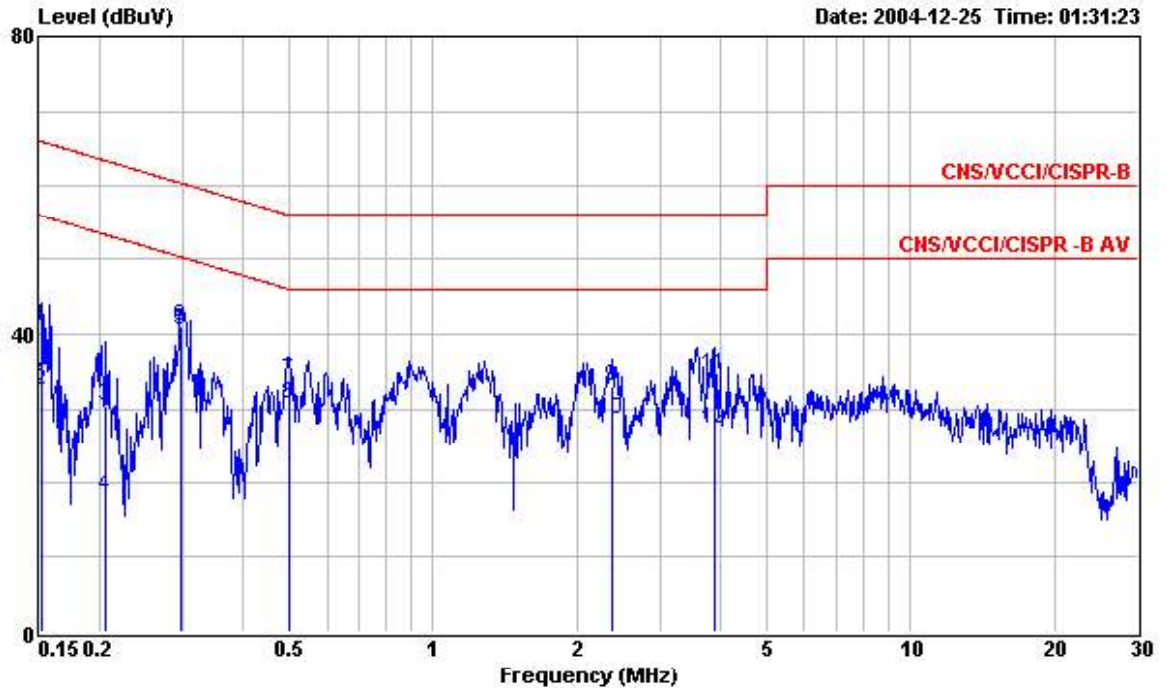


Site : CO01-HY
 Condition : CNS/VCCI/CISPR-B 2003 2001/008 NEUTRAL
 EUT :
 Power : 120Vac/60Hz
 Model :
 Memo : PCS1900 Idle+WLAN Mode

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.152	40.96	-24.93	65.89	40.85	0.10	0.01	QP
2	0.152	32.53	-23.36	55.89	32.42	0.10	0.01	Average
3	0.206	30.44	-32.93	63.37	30.32	0.10	0.02	QP
4	0.206	18.25	-35.12	53.37	18.13	0.10	0.02	Average
5	0.297	40.53	-19.80	60.33	40.41	0.10	0.02	QP
6	0.297	41.08	-9.25	50.33	40.96	0.10	0.02	Average
7	0.499	33.87	-22.15	56.02	33.75	0.10	0.02	QP
8	0.499	30.56	-15.46	46.02	30.44	0.10	0.02	Average
9	2.380	32.94	-23.06	56.00	32.73	0.13	0.08	QP
10	2.380	28.53	-17.47	46.00	28.32	0.13	0.08	Average
11	3.900	34.54	-21.46	56.00	34.22	0.20	0.12	QP
12	3.900	27.26	-18.74	46.00	26.94	0.20	0.12	Average




- Temperature : 24 °C
- Relating Humidity : 47 %
- Test Enginner : Jay
- Test Mode : Mode 2

■ The test that passed at minimum margin was marked by the frame in the following table.

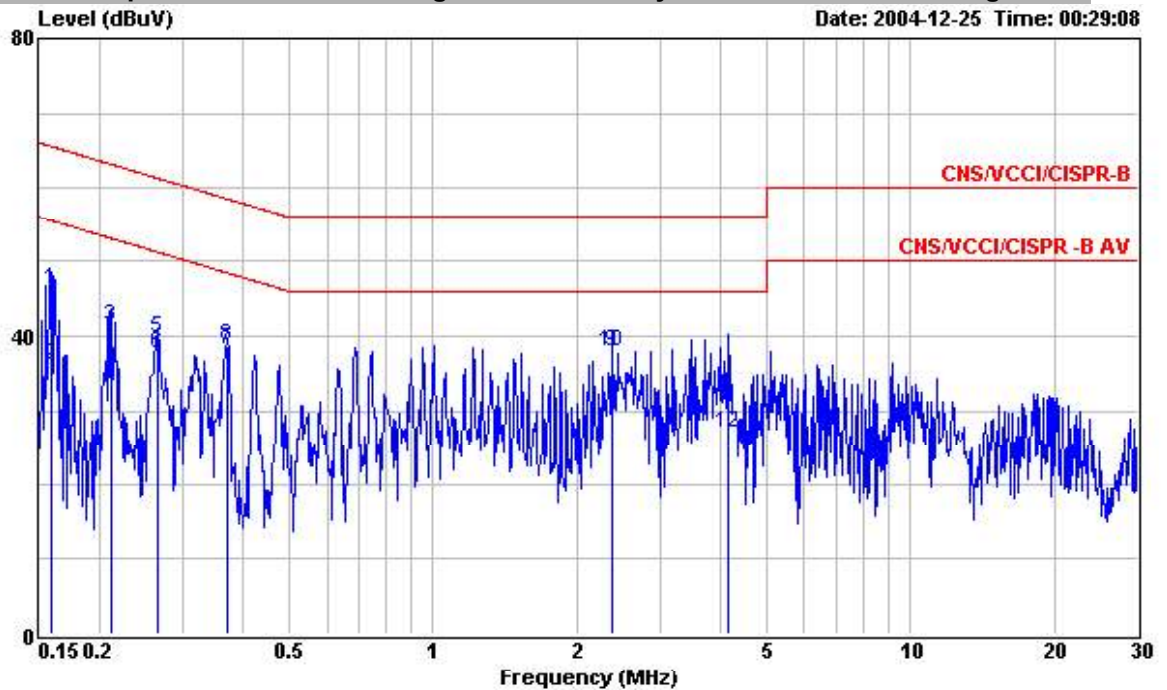

Site : CO01-HY
 Condition : CNS/VCCI/CISPR-B 2003 2001/008 LINE
 EUT :
 Power : 120Vac/50Hz
 Model :
 Memo : PSC1900 Idle+Bluetooth ON Mode

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.159	46.36	-19.16	65.52	46.25	0.10	0.01	QP
2	0.159	36.23	-19.29	55.52	36.12	0.10	0.01	Average
3	0.212	41.41	-21.72	63.13	41.29	0.10	0.02	QP
4	0.212	33.77	-19.36	53.13	33.65	0.10	0.02	Average
5	0.264	39.65	-21.65	61.30	39.53	0.10	0.02	QP
6	0.264	37.75	-13.55	51.30	37.63	0.10	0.02	Average
7	0.369	38.26	-20.26	58.52	38.14	0.10	0.02	QP
8	0.369	38.64	-9.88	48.52	38.52	0.10	0.02	Average
9	2.380	38.01	-17.99	56.00	37.83	0.10	0.08	QP
10	2.380	38.04	-7.96	46.00	37.86	0.10	0.08	Average
11	4.140	30.63	-25.37	56.00	30.41	0.10	0.12	QP
12	4.140	26.91	-19.09	46.00	26.69	0.10	0.12	Average

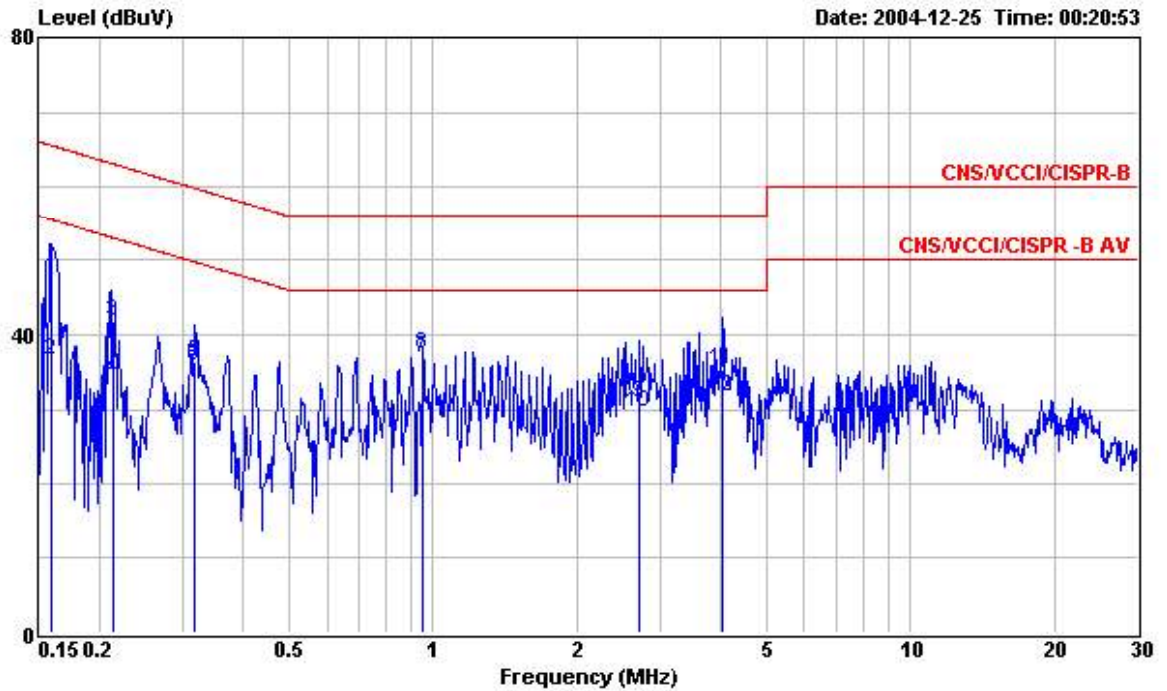

Site : CO01-HY
 Condition : CNS/VCCI/CISPR-B 2003 2001/008 NEUTRAL
 EUT :
 Power : 120Vac/60Hz
 Model :
 Memo : PSC1900 Idle+Bluetooth ON Mode

	Freq	Level	Over	Limit	Read	Probe	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.159	47.47	-18.05	65.52	47.36	0.10	0.01	QP
2	0.159	36.71	-18.81	55.52	36.60	0.10	0.01	Average
3	0.213	41.71	-21.38	63.09	41.59	0.10	0.02	QP
4	0.213	33.90	-19.19	53.09	33.78	0.10	0.02	Average
5	0.317	36.39	-23.40	59.79	36.27	0.10	0.02	QP
6	0.317	35.73	-14.06	49.79	35.61	0.10	0.02	Average
7	0.953	36.81	-19.19	56.00	36.67	0.10	0.04	QP
8	0.953	37.34	-8.66	46.00	37.20	0.10	0.04	Average
9	2.710	30.99	-25.01	56.00	30.80	0.10	0.09	QP
10	2.710	29.61	-16.39	46.00	29.42	0.10	0.09	Average
11	4.030	35.30	-20.70	56.00	35.08	0.10	0.12	QP
12	4.030	31.67	-14.33	46.00	31.45	0.10	0.12	Average

5.11 Radiated Emission Measurement


5.11.1 Measuring Instruments

As described in chapter 6 of this Report.

5.11.2 Test Procedures

1. The EUT was placed on a rotatable table top 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
7. For testing below 1GHz, If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the quasi-peak method and reported.
8. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

5.11.3 Typical Test Setup Layout of Radiated Emission

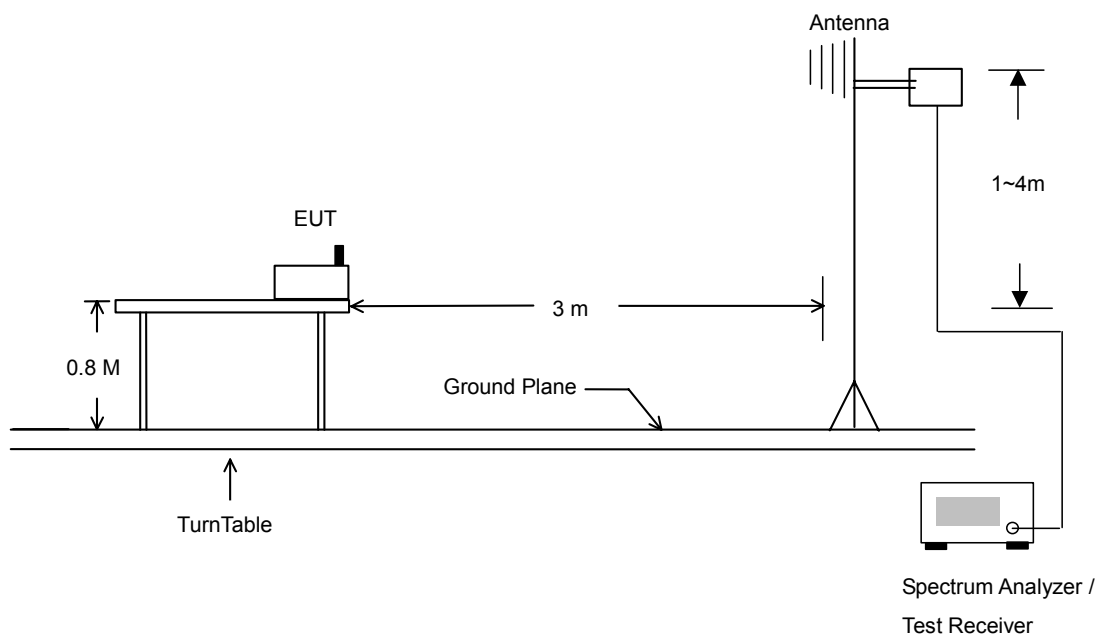



5.11.4 Test Data

- Temperature : 24 °C
- Relating Humidity : 50 %
- Test Enginner : Jay
- Test Mode : Mode 1
- Polarization : Horizontal

■ The test that passed at minimum margin was marked by the frame in the following table.

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Preamp Factor	Cable Loss	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB		cm	deg
1 @	193.68	31.72	-11.78	43.50	51.01	11.39	32.21	1.54 Peak	---	---
2 @	264.09	37.28	-8.72	46.00	54.08	12.90	31.91	2.20 Peak	---	---
3 @	298.38	38.63	-7.37	46.00	55.23	12.94	31.92	2.38 Peak	---	---

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Preamp Factor	Cable Loss	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB		cm	deg
1 @	311.90	32.82	-13.18	46.00	49.32	13.31	32.16	2.35 Peak	---	---
2 @	399.40	30.89	-15.11	46.00	43.70	15.87	31.50	2.82 Peak	---	---
3 @	497.40	32.85	-13.15	46.00	44.05	17.10	31.43	3.14 Peak	---	---

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Preamp Factor	Cable Loss	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB		cm	deg
1 @	2390.00	55.12	-18.88	74.00	58.65	28.40	35.25	3.32 Peak	---	---
2 @	2390.00	35.49	-18.51	54.00	39.02	28.40	35.25	3.32 Average	---	---
3 @	2414.00	95.52			99.03	28.41	35.25	3.32 Peak	---	---
4 @	2414.00	84.12			87.63	28.41	35.25	3.32 Average	192	110
5 @	2488.00	45.83	-28.17	74.00	49.21	28.50	35.26	3.38 Peak	---	---
6 @	2488.00	34.23	-19.77	54.00	37.61	28.50	35.26	3.38 Average	---	---



• Polarization : Vertical

■ The test that passed at minimum margin was marked by the frame in the following table.

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Preamp Factor	Cable Loss	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB		cm	deg
1 @	31.89	29.03	-10.97	40.00	42.40	18.07	32.13	0.70 QP	100	260
2 @	39.99	33.19	-6.81	40.00	49.82	14.83	32.16	0.70 Peak	---	---
3 @	264.09	36.91	-9.09	46.00	53.72	12.90	31.91	2.20 Peak	---	---

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Preamp Factor	Cable Loss	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB		cm	deg
1 @	497.40	39.20	-6.80	46.00	50.39	17.10	31.43	3.14 Peak	---	---
2 @	596.80	34.91	-11.09	46.00	44.62	18.00	31.26	3.55 Peak	---	---
3 @	808.90	33.70	-12.30	46.00	39.14	21.73	31.64	4.47 Peak	---	---

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Preamp Factor	Cable Loss	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB		cm	deg
1 @	2390.00	54.83	-19.17	74.00	58.36	28.40	35.25	3.32 Peak	---	---
2 @	2390.00	36.29	-17.71	54.00	39.82	28.40	35.25	3.32 Average	---	---
3 @	2414.00	96.64			100.15	28.41	35.25	3.32 Peak	---	---
4 @	2414.00	85.11			88.62	28.41	35.25	3.32 Average	132	245
5 @	2488.00	46.36	-27.64	74.00	49.74	28.50	35.26	3.38 Peak	---	---
6 @	2488.00	34.64	-19.36	54.00	38.02	28.50	35.26	3.38 Average	---	---



- Test Mode : Mode 2
- Polarization : Horizontal

■ The test that passed at minimum margin was marked by the frame in the following table.

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 @	251.67	30.04	-15.96	46.00	47.89	11.96	31.83	2.02	Peak	---	---
2 @	264.09	37.51	-8.49	46.00	54.32	12.90	31.91	2.20	Peak	---	---
3 @	298.38	38.76	-7.24	46.00	55.37	12.94	31.92	2.38	Peak	---	---

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 @	311.90	33.33	-12.67	46.00	49.83	13.31	32.16	2.35	Peak	---	---
2 @	399.40	31.37	-14.63	46.00	44.18	15.87	31.50	2.82	Peak	---	---
3 @	497.40	32.88	-13.12	46.00	44.08	17.10	31.43	3.14	Peak	---	---

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 @	2318.00	46.30	-27.70	74.00	49.94	28.33	35.24	3.27	Peak	---	---
2 @	2318.00	34.38	-19.62	54.00	38.02	28.33	35.24	3.27	Average	---	---
3 @	2438.00	94.03			97.49	28.45	35.25	3.34	Peak	---	---
4 @	2438.00	80.68			84.14	28.45	35.25	3.34	Average	162	189
5 @	2488.00	46.26	-27.74	74.00	49.64	28.50	35.26	3.38	Peak	---	---
6 @	2488.00	34.90	-19.10	54.00	38.28	28.50	35.26	3.38	Average	---	---



• Polarization : Vertical

■ The test that passed at minimum margin was marked by the frame in the following table.

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Preamp Factor	Cable Loss	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB		cm	deg
1 @	31.89	32.92	-7.08	40.00	46.29	18.07	32.13	0.70 OP	140	61
2 @	39.99	34.00	-6.00	40.00	50.63	14.83	32.16	0.70 Peak	---	---
3 @	264.09	37.11	-8.89	46.00	53.91	12.90	31.91	2.20 Peak	---	---

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Preamp Factor	Cable Loss	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB		cm	deg
1 @	497.40	39.49	-6.51	46.00	50.69	17.10	31.43	3.14 Peak	---	---
2 @	596.80	33.50	-12.50	46.00	43.21	18.00	31.26	3.55 Peak	---	---
3 @	827.80	33.56	-12.44	46.00	39.92	21.37	31.85	4.13 Peak	---	---

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Preamp Factor	Cable Loss	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB		cm	deg
1 @	2338.00	47.03	-26.97	74.00	50.65	28.34	35.24	3.27 Peak	---	---
2 @	2338.00	34.68	-19.32	54.00	38.30	28.34	35.24	3.27 Average	---	---
3 @	2434.00	90.80			94.28	28.43	35.25	3.34 Peak	---	---
4 @	2434.00	80.15			83.63	28.43	35.25	3.34 Average	170	204
5 @	2488.00	46.35	-27.65	74.00	49.73	28.50	35.26	3.38 Peak	---	---
6 @	2488.00	34.80	-19.20	54.00	38.18	28.50	35.26	3.38 Average	---	---



Test Mode : Mode 3

- Polarization : Horizontal

The test that passed at minimum margin was marked by the frame in the following table.

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Preamp Factor	Cable Loss	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB		cm	deg
1 @	139.89	29.44	-14.06	43.50	49.17	11.00	32.29	1.56 Peak	---	---
2 @	264.09	38.19	-7.81	46.00	54.99	12.90	31.91	2.20 Peak	---	---
3 @	298.38	38.82	-7.18	46.00	55.43	12.94	31.92	2.38 Peak	---	---

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Preamp Factor	Cable Loss	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB		cm	deg
1 @	311.90	32.86	-13.14	46.00	49.36	13.31	32.16	2.35 Peak	---	---
2 @	399.40	30.85	-15.15	46.00	43.66	15.87	31.50	2.82 Peak	---	---
3 @	497.40	32.62	-13.38	46.00	43.82	17.10	31.43	3.14 Peak	---	---

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Preamp Factor	Cable Loss	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB		cm	deg
1 @	2338.00	45.96	-28.04	74.00	49.58	28.34	35.24	3.27 Peak	---	---
2 @	2338.00	34.71	-19.29	54.00	38.33	28.34	35.24	3.27 Average	---	---
3 @	2458.00	92.31			95.74	28.47	35.25	3.36 Peak	---	---
4 @	2458.00	80.16			83.59	28.47	35.25	3.36 Average	191	145
5 @	2483.50	45.35	-28.65	74.00	48.74	28.48	35.26	3.38 Peak	---	---
6 @	2483.50	34.66	-19.34	54.00	38.06	28.48	35.26	3.38 Average	---	---



- Polarization : Vertical

■ The test that passed at minimum margin was marked by the frame in the following table.

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Preamp Factor	Cable Loss	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB		cm	deg
1 @	31.89	29.34	-10.66	40.00	42.71	18.07	32.13	0.70 QP	100	233
2 @	38.64	35.02	-4.98	40.00	51.21	15.28	32.16	0.68 Peak	---	---
3 @	136.38	36.59	-6.91	43.50	56.11	11.19	32.26	1.55 Peak	---	---

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Preamp Factor	Cable Loss	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB		cm	deg
1 @	497.40	39.10	-6.90	46.00	50.30	17.10	31.43	3.14 Peak	---	---
2 @	596.80	34.28	-11.72	46.00	43.99	18.00	31.26	3.55 Peak	---	---
3 @	696.90	33.21	-12.79	46.00	41.67	19.01	31.44	3.98 Peak	---	---

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Preamp Factor	Cable Loss	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB		cm	deg
1 @	2388.00	46.56	-27.44	74.00	50.10	28.40	35.24	3.31 Peak	---	---
2 @	2388.00	34.30	-19.70	54.00	37.84	28.40	35.24	3.31 Average	---	---
3 @	2464.00	86.07			89.50	28.47	35.25	3.36 Peak	---	---
4 @	2464.00	77.21			80.64	28.47	35.25	3.36 Average	192	244
5 @	2483.50	45.53	-28.47	74.00	48.93	28.48	35.26	3.38 Peak	---	---
6 @	2483.50	34.35	-19.65	54.00	37.75	28.48	35.26	3.38 Average	---	---



Test Mode : Mode 4

- Polarization : Horizontal

■ The test that passed at minimum margin was marked by the frame in the following table.

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Preamp Factor	Cable Loss	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB		cm	deg
1	181.74	26.50	-17.00	43.50	47.52	9.14	31.85	1.69 Peak	---	---
2 @	264.09	33.92	-12.08	46.00	50.73	12.90	31.91	2.20 Peak	---	---
3	298.38	28.31	-17.69	46.00	44.92	12.94	31.92	2.38 Peak	---	---
	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Preamp Factor	Cable Loss	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB		cm	deg
1	397.30	26.91	-19.09	46.00	39.82	15.81	31.49	2.77 Peak	---	---
2	497.40	28.35	-17.65	46.00	39.54	17.10	31.43	3.14 Peak	---	---
3	696.90	28.53	-17.47	46.00	36.98	19.01	31.44	3.98 Peak	---	---
	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Preamp Factor	Cable Loss	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB		cm	deg
1	2358.00	53.55	-20.45	74.00	57.14	28.36	35.24	3.29 Peak	---	---
2	2358.00	41.84	-12.16	54.00	45.43	28.36	35.24	3.29 Average	---	---
3 @	2398.00	93.03			96.56	28.40	35.25	3.32 Peak	---	---
4 @	2398.00	80.52			84.05	28.40	35.25	3.32 Average	1	42
5	2484.00	53.25	-20.75	74.00	56.65	28.48	35.26	3.38 Peak	---	---
6 @	2484.00	41.94	-12.06	54.00	45.34	28.48	35.26	3.38 Average	---	---
	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Preamp Factor	Cable Loss	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB		cm	deg
1	4798.00	48.02	-25.98	74.00	46.42	32.13	35.28	4.75 Peak	---	---



- Polarization : Vertical

■ The test that passed at minimum margin was marked by the frame in the following table.

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 @	31.08	34.12	-5.88	40.00	47.15	18.40	32.13	0.70	QP	100	294
2 @	35.94	31.31	-8.69	40.00	46.14	16.62	32.15	0.69	QP	---	---
3 @	264.09	38.17	-7.83	46.00	54.97	12.90	31.91	2.20	Peak	---	---

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	397.30	32.03	-13.97	46.00	44.94	15.81	31.49	2.77	Peak	---	---
2 @	497.40	38.40	-7.60	46.00	49.60	17.10	31.43	3.14	Peak	---	---
3	854.40	32.46	-13.54	46.00	38.75	20.83	31.66	4.53	Peak	---	---

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	2388.00	53.62	-20.38	74.00	57.16	28.40	35.24	3.31	Peak	---	---
2 @	2388.00	41.95	-12.05	54.00	45.49	28.40	35.24	3.31	Average	---	---
3 @	2404.00	94.67			98.18	28.41	35.25	3.32	Peak	---	---
4 @	2404.00	81.69			85.20	28.41	35.25	3.32	Average	1	174
5	2494.00	53.83	-20.17	74.00	57.20	28.50	35.26	3.39	Peak	---	---
6 @	2494.00	42.15	-11.85	54.00	45.51	28.50	35.26	3.39	Average	---	---

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4798.00	49.56	-24.44	74.00	47.96	32.13	35.28	4.75	Peak	---	---



Test Mode : Mode 5

- Polarization : Horizontal

■ The test that passed at minimum margin was marked by the frame in the following table.

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Preamp Factor	Cable Loss	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB		cm	deg
1	250.59	27.65	-18.35	46.00	45.74	11.73	31.83	2.01 Peak	---	---
2 @	264.09	34.08	-11.92	46.00	50.88	12.90	31.91	2.20 Peak	---	---
3	298.38	28.11	-17.89	46.00	44.72	12.94	31.92	2.38 Peak	---	---

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Preamp Factor	Cable Loss	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB		cm	deg
1	397.30	27.99	-18.01	46.00	40.90	15.81	31.49	2.77 Peak	---	---
2	497.40	27.34	-18.66	46.00	38.54	17.10	31.43	3.14 Peak	---	---
3	696.90	28.79	-17.21	46.00	37.24	19.01	31.44	3.98 Peak	---	---

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Preamp Factor	Cable Loss	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB		cm	deg
1	2348.00	53.72	-20.28	74.00	57.32	28.34	35.24	3.29 Peak	---	---
2	2348.00	41.84	-32.16	74.00	45.45	28.34	35.24	3.29 Average	---	---
3 @	2438.00	92.00			95.46	28.45	35.25	3.34 Peak	---	---
4 @	2438.00	80.60			84.06	28.45	35.25	3.34 Average	1	170
5	2488.00	53.18	-20.82	74.00	56.56	28.50	35.26	3.38 Peak	---	---
6	2488.00	42.05	-31.95	74.00	45.43	28.50	35.26	3.38 Average	---	---



• Polarization : Vertical

■ The test that passed at minimum margin was marked by the frame in the following table.

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Preamp Factor	Cable Loss	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB		cm	deg
1 @	31.08	36.18	-3.82	40.00	49.21	18.40	32.13	0.70 QP	100	342
2 @	35.94	31.36	-8.64	40.00	46.19	16.62	32.15	0.69 QP	---	---
3 @	264.09	37.26	-8.74	46.00	54.06	12.90	31.91	2.20 Peak	---	---

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Preamp Factor	Cable Loss	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB		cm	deg
1	397.30	31.46	-14.54	46.00	44.37	15.81	31.49	2.77 Peak	---	---
2 @	497.40	38.64	-7.36	46.00	49.84	17.10	31.43	3.14 Peak	---	---
3	798.40	31.06	-14.94	46.00	36.35	21.84	31.46	4.32 Peak	---	---

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Preamp Factor	Cable Loss	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB		cm	deg
1	1194.00	52.90	-21.10	74.00	62.31	24.57	36.27	2.30 Peak	---	---
2	1194.00	37.21	-16.79	54.00	46.61	24.57	36.27	2.30 Average	---	---
3	2344.00	53.57	-20.43	74.00	57.18	28.34	35.24	3.29 Peak	---	---
4 @	2344.00	42.96	-11.04	54.00	46.57	28.34	35.24	3.29 Average	---	---
5 @	2438.00	93.11			96.57	28.45	35.25	3.34 Peak	---	---
6 @	2438.00	75.58			79.04	28.45	35.25	3.34 Average	1	74
7	2498.00	53.40	-20.60	74.00	56.76	28.50	35.26	3.39 Peak	---	---
8 @	2498.00	43.06	-10.94	54.00	46.42	28.50	35.26	3.39 Average	---	---

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Preamp Factor	Cable Loss	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB		cm	deg
1	4784.00	47.73	-26.27	74.00	46.16	32.13	35.29	4.73 Peak	---	---



Test Mode : Mode 6

- Polarization : Horizontal

■ The test that passed at minimum margin was marked by the frame in the following table.

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 @	249.78	28.49	-17.51	46.00	46.59	11.73	31.83	1.99	Peak	---	---
2 @	264.09	34.24	-11.76	46.00	51.04	12.90	31.91	2.20	Peak	---	---
3 @	298.38	29.33	-16.67	46.00	45.94	12.94	31.92	2.38	Peak	---	---

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 @	311.90	26.70	-19.30	46.00	43.20	13.31	32.16	2.35	Peak	---	---
2 @	497.40	27.49	-18.51	46.00	38.68	17.10	31.43	3.14	Peak	---	---
3 @	696.90	27.77	-18.23	46.00	36.22	19.01	31.44	3.98	Peak	---	---

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 @	2384.00	53.90	-20.10	74.00	57.45	28.38	35.24	3.31	Peak	---	---
2 @	2384.00	41.49	-12.51	54.00	45.05	28.38	35.24	3.31	Average	---	---
3 @	2478.00	93.99			97.39	28.48	35.26	3.38	Peak	---	---
4 @	2478.00	79.84			83.24	28.48	35.26	3.38	Average	1	173
5 @	2483.50	51.31	-2.69	54.00	54.71	28.48	35.26	3.38	Average	---	---
6 @	2483.50	71.68	-2.32	74.00	75.08	28.48	35.26	3.38	Peak	---	---

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 @	4958.00	51.20	-22.80	74.00	48.28	33.27	35.22	4.87	Peak	---	---



- Polarization : Vertical

■ The test that passed at minimum margin was marked by the frame in the following table.

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 @	31.89	32.78	-7.22	40.00	46.15	18.07	32.13	0.70	QP	---	---
2 @	35.94	33.37	-6.63	40.00	48.20	16.62	32.15	0.69	QP	100	222
3 @	264.09	37.54	-8.46	46.00	54.34	12.90	31.91	2.20	Peak	---	---

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 @	397.30	31.93	-14.07	46.00	44.84	15.81	31.49	2.77	Peak	---	---
2 @	497.40	39.04	-6.96	46.00	50.23	17.10	31.43	3.14	Peak	---	---
3 @	819.40	32.51	-13.49	46.00	38.74	21.52	31.87	4.12	Peak	---	---

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 @	2388.00	53.42	-20.58	74.00	56.96	28.40	35.24	3.31	Peak	---	---
2 @	2388.00	41.03	-12.97	54.00	44.57	28.40	35.24	3.31	Average	---	---
3 @	2478.00	92.82			96.21	28.48	35.26	3.38	Peak	---	---
4 @	2478.00	79.66			83.06	28.48	35.26	3.38	Average	1	352
5 @	2483.50	72.73	-1.27	74.00	76.12	28.48	35.26	3.38	Peak	---	---
6 @	2483.50	51.21	-2.79	54.00	54.61	28.48	35.26	3.38	Average	---	---

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 @	4958.00	51.37	-22.63	74.00	48.45	33.27	35.22	4.87	Peak	---	---



5.12 Antenna Requirements

5.12.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no other antenna except assembled by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi.

5.12.2 Antenna Connected Construction

The antenna used in this product is a PIFA with Hirose W-FL-R-SMT(10) connector and it is considered to meet antenna requirement of FCC.



6. List of Measuring Equipments Used

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Due Date	Remark
EMC Receiver	R&S	ESCS 30	100132	9 KHz – 2.75 GHz	Jun. 23, 2004	Jun. 23, 2005	Conduction (CO01-HY)
LISN	MessTec	NNB-2/16Z	2001/008	9 KHz – 30 MHz	May 03, 2004	May 03, 2005	Conduction (CO01-HY)
LISN (Support Unit)	MessTec	NNB-2/16Z	2001/009	9 KHz – 30 MHz	Apr. 19, 2004	Apr. 19, 2005	Conduction (CO01-HY)
EMI Filter	LINDGREN	LRE-2060	1004	< 450 Hz	N/A	N/A	Conduction (CO01-HY)
EMI Filter	LINDGREN	N6006	201052	0 ~ 60 Hz	N/A	N/A	Conduction (CO01-HY)
RF Cable-CON	Suhner Switzerland	RG223/U	CB029	9KHz~30MHz	Dec. 24, 2003	Dec. 24, 2004	Conduction (CO01-HY)
Spectrum analyzer	Agilent	E4408B	MY44211030	9KHz-26.5GHz	Jul. 27, 2004	Jul. 26, 2005	Radiation (03CH06-HY)
Receiver	R&S	ESCS30	100356	9KHz-2.75GHz	Jul,09,2004	Jul,010,2005	Radiation (03CH06-HY)
Controller	CT	SC100	N/A	N/A	N/A	N/A	Radiation (03CH06-HY)
Bilog Antenna	SCHAFFNER	CBL6112B	2885	30MHz -2GHz	Dec. 18, 2003	Dec. 18, 2004	Radiation (03CH06-HY)
Horn Antenna	Com-Power	AH118	071025	1G-18G	Feb. 11, 2004	Feb. 11, 2005	Radiation (03CH06-HY)
SHF-EHF Horn	SCHWARZBECK	BBHA 9170	9170-249	14G - 40G	Jun. 22, 2004	Jun. 22, 2005	Radiation (03CH06-HY)
PreAmplifier	Com-Power	PA-103	161055	1MHz - 1000MHz	Apr. 26, 2004	Apr. 26, 2005	Radiation (03CH06-HY)
HF Amplifier	MITEQ	AFS44	973248	0.1G - 26.5G	May. 20, 2004	May. 20, 2005	Radiation (03CH06-HY)
Amplifier	MITEQ	AMF-6F	997165	26G - 40G	Jun. 24, 2004	Jun. 24, 2005	Radiation (03CH06-HY)
Turn Table	HD	DS 420	420/650/00	0 ~ 360 degree	N/A	N/A	Radiation (03CH06-HY)
Antenna Mast	HD	MA 240	240/560/00	1 m - 4 m	N/A	N/A	Radiation (03CH06-HY)
Wireless Communications Test Set	Agilent	8960/E5515C	9343460754	Qual-band	Jan,12,2004	Jan,11,2005	Radiation (03CH06-HY)
Wireless Communications Test Set	R&S	CMU 200	103937	Qual-band	Oct,20,2003	Oct,19,2005	Radiation (03CH06-HY)



7. Uncertainty Evaluation

Uncertainty of Conducted Emission Evaluation (150kHz ~ 30MHz)

Contribution	Uncertainty of x_i		$u(x_i)$
	dB	Probability Distribution	
Receiver reading	0.10	Normal(k=2)	0.05
Cable loss	0.10	Normal(k=2)	0.05
AMN insertion loss	2.50	Rectangular	0.63
Receiver Spec	1.50	Rectangular	0.43
Site imperfection	1.39	Rectangular	0.80
Mismatch Receiver VSWR Γ_1 = LISN VSWR Γ_2 = Uncertainty= $20\log(1-\Gamma_1*\Gamma_2)$	+0.34/-0.35	U-shape	0.24
combined standard uncertainty Uc(y)	1.13		
Measuring uncertainty for a level of confidence of 95% U=2Uc(y)	2.26		

Uncertainty of Radiated Emission Evaluation (30MHz ~ 1000MHz)

Contribution	Uncertainty of x_i		$u(x_i)$
	dB	Probability Distribution	
Receiver reading	0.41	Normal(k=2)	0.21
Antenna factor calibration	0.83	Normal(k=2)	0.42
Cable loss calibration	0.25	Normal(k=2)	0.13
Pre Amplifier Gain calibration	0.27	Normal(k=2)	0.14
Rcv/SPA specification	2.50	Rectangular	0.72
Antenna Factor Interpolation for Frequency	1.00	Rectangular	0.29
Site imperfection	1.43	Rectangular	0.83
Mismatch Receiver VSWR Γ_1 = 0.20 Antenna VSWR Γ_2 = 0.23 Uncertainty= $20\log(1-\Gamma_1*\Gamma_2)$	+0.39/-0.41	U-shaped	0.28
combined standard uncertainty Uc(y)	1.27		
Measuring uncertainty for a level of confidence of 95% U=2Uc(y)	2.54		



Contribution	Uncertainty of x_i		$u(x_i)$	C_i	$C_i * u(x_i)$
	dB	Probability Distribution			
Receiver reading	±0.10	Normal(k=1)	0.10	1	0.10
Antenna factor calibration	±1.70	Normal(k=2)	0.85	1	0.85
Cable loss calibration	±0.50	Normal(k=2)	0.25	1	0.25
Receiver Correction	±2.00	Rectangular	1.15	1	1.15
Antenna Factor Directional	±1.50	Rectangular	0.87	1	0.87
Site imperfection	±2.80	Triangular	1.14	1	1.14
Mismatch Receiver VSWR $\Gamma_1 = 0.197$ Antenna VSWR $\Gamma_2 = 0.194$ Uncertainty = $20 \log(1 - \Gamma_1 \Gamma_2 \Gamma_3)$	+0.34/-0.35	U-shaped	0.244	1	0.244
Combined standard uncertainty $U_c(y)$	2.36				
Measuring uncertainty for a level of confidence of 95% $U = 2U_c(y)$	4.72				

$$U = \sqrt{\{(0.3/2)^2 + (2^2 + 1.5^2 + 0.2^2)/3 + (0.2)^2/2\}} = 1.66$$