

Test Laboratory: Compliance Certification Services Inc.

D835V2-SN 4d015-Head

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d015

Communication System: CW 835; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 835$ MHz; $\sigma = 0.894$ mho/m; $\epsilon_r = 41.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.1 deg C; Liquid Temperature: 23.1 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(10.57, 10.57, 10.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

d=10mm, Pin=250mW/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 2.91 mW/g

d=10mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 52.5 V/m; Power Drift = -0.018 dB



Peak SAR (extrapolated) = 3.81 W/kg

SAR(1 g) = 2.29 mW/g; SAR(10 g) = 1.38 mW/g

Maximum value of SAR (measured) = 3.08 mW/g

d=10mm, Pin=250mW/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of SAR (measured) = 2.00 mW/g

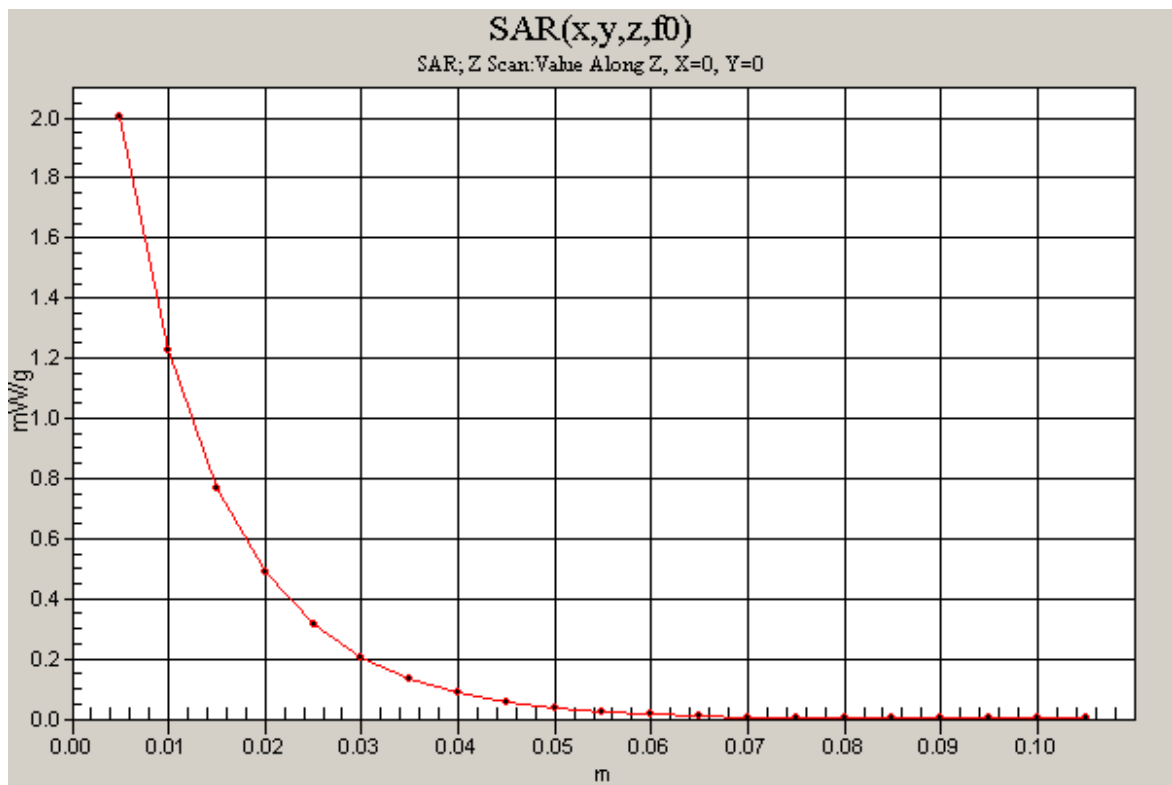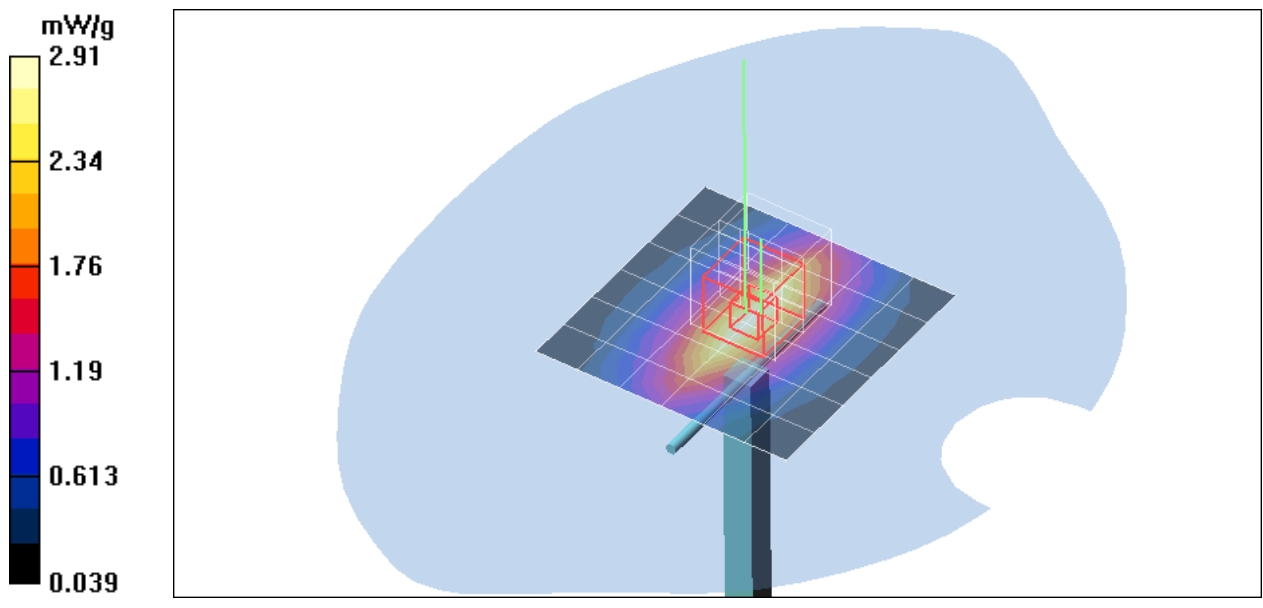

Test Laboratory: Compliance Certification Services Inc.

D835V2-SN 4d015-Body

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d015

Communication System: CW 835; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 835$ MHz; $\sigma = 0.931$ mho/m; $\epsilon_r = 55.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.3 deg C; Liquid Temperature: 23.3 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(10.96, 10.96, 10.96);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection) Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

d=10mm, Pin=250mW/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 3.05 mW/g

d=10mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid:

dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 54.1 V/m; Power Drift = -0.006 dB



Peak SAR (extrapolated) = 3.89 W/kg

SAR(1 g) = 2.54 mW/g; SAR(10 g) = 1.64 mW/g

Maximum value of SAR (measured) = 3.12 mW/g

d=10mm, Pin=250mW/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of SAR (measured) = 2.13 mW/g

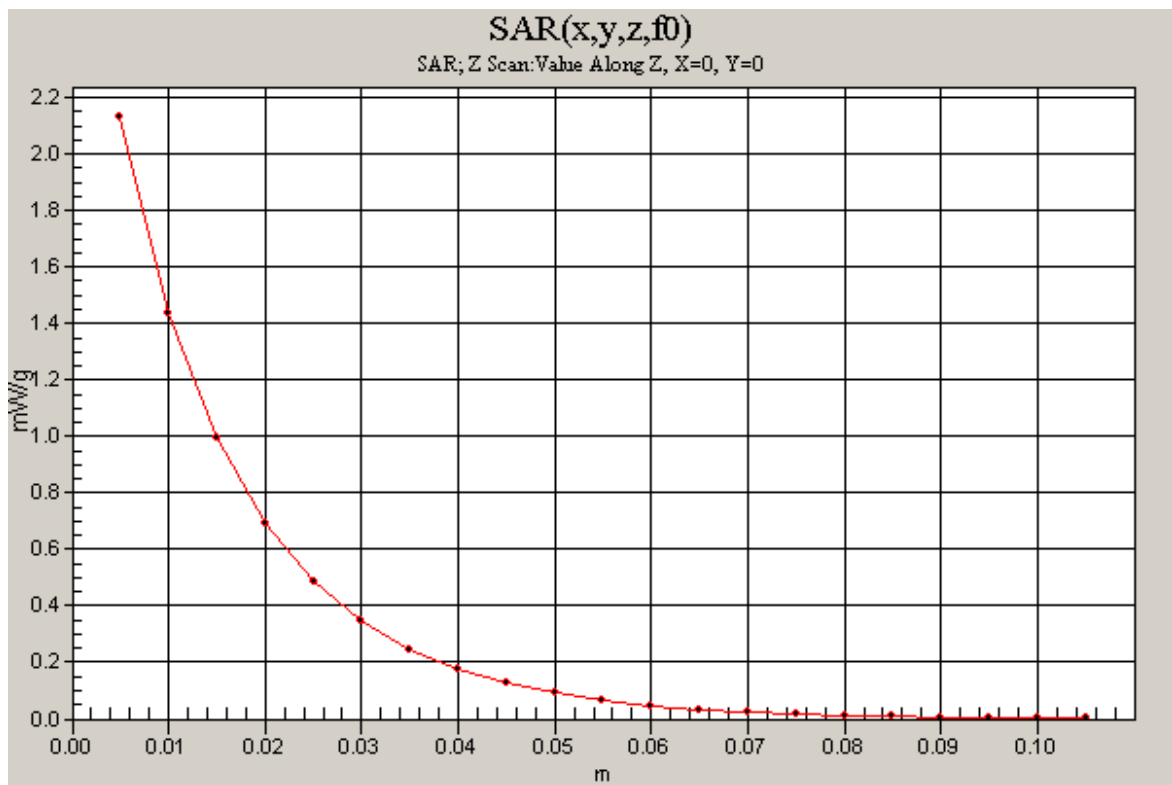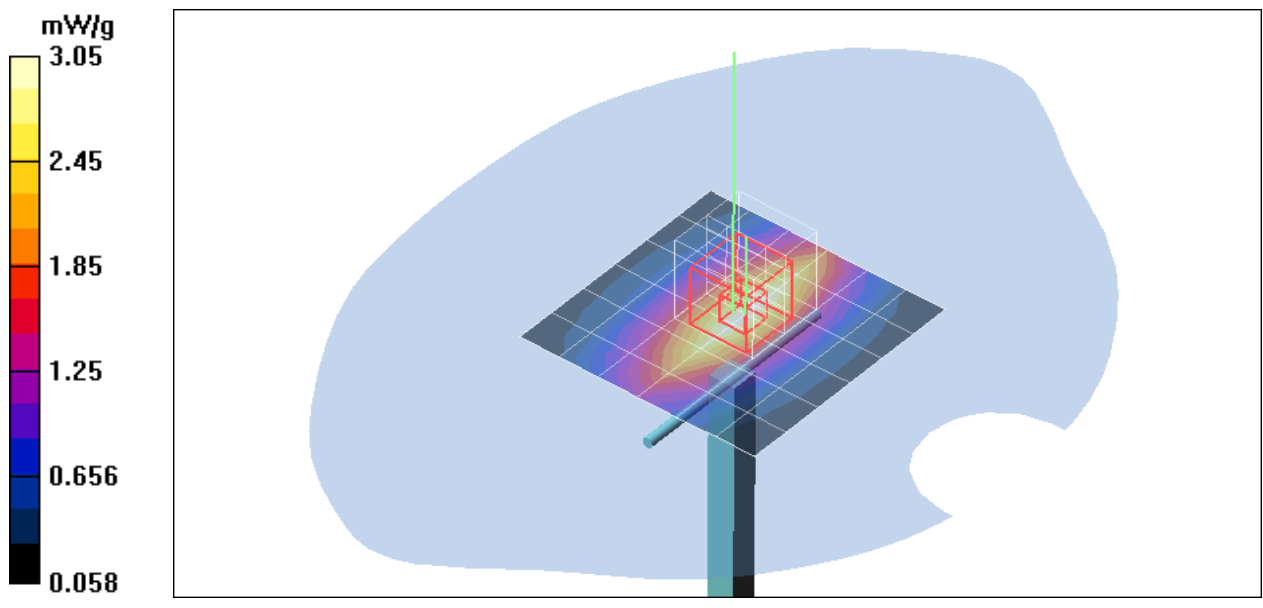

Test Laboratory: Compliance Certification Services Inc.

D1900V2 SN-5d056 Head

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d056

Communication System: CW1900; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1900$ MHz; $\sigma = 1.46$ mho/m; $\epsilon_r = 38.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.0 deg C; Liquid Temperature: 23.0 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(8.52, 8.52, 8.52);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Pin=250mW,d=10mm/Area Scan (6x6x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 9.55 mW/g

Pin=250mW,d=10mm/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 86.9 V/m; Power Drift = -0.023 dB



Peak SAR (extrapolated) = 17.6 W/kg

SAR(1 g) = 9.41 mW/g; SAR(10 g) = 5.32 mW/g

Maximum value of SAR (measured) = 11.3 mW/g

Pin=250mW,d=10mm/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of SAR (measured) = 13.4 mW/g

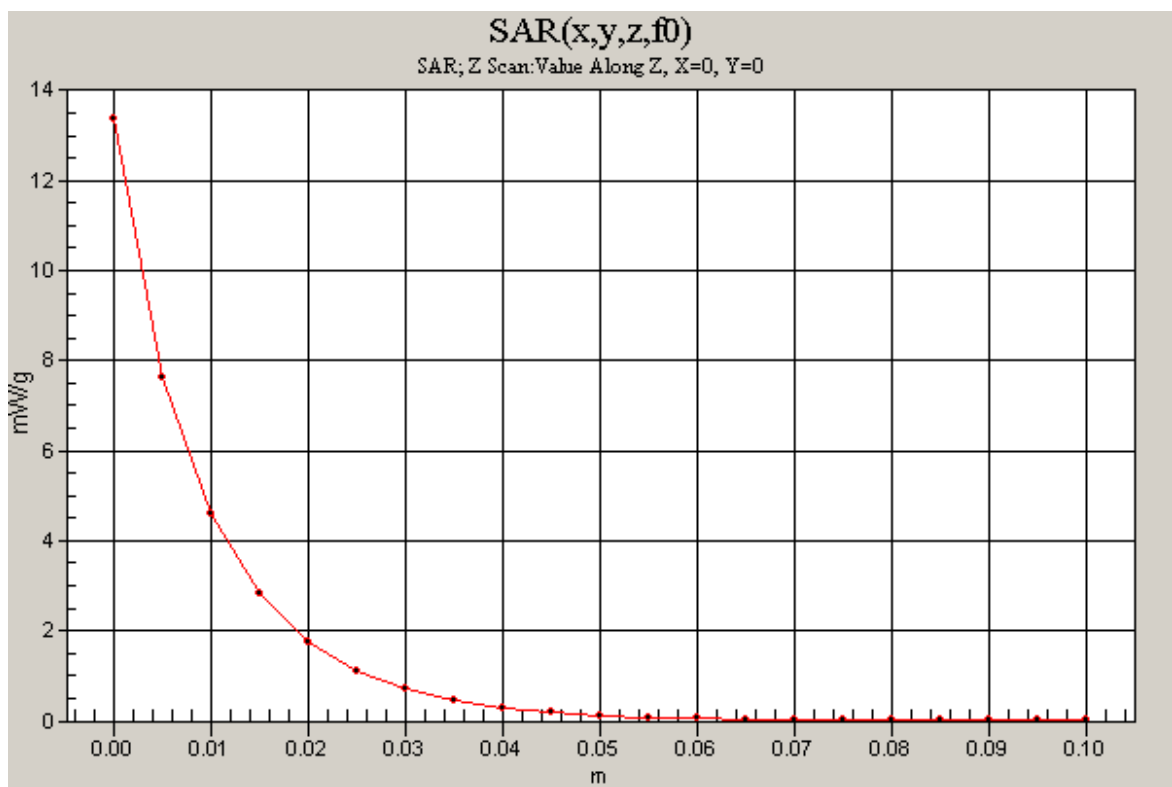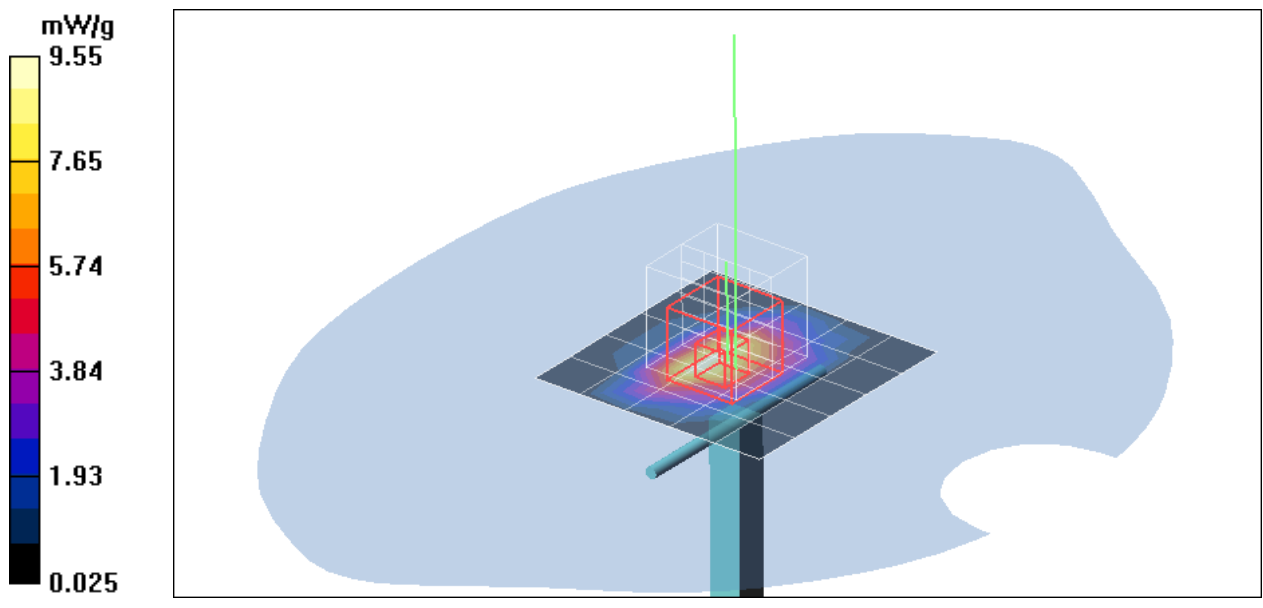

Test Laboratory: Compliance Certification Services Inc.

D1900V2 SN-5d056 Body

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d056

Communication System: CW1900; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 51.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.3 deg C; Liquid Temperature: 23.2 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(8.43, 8.43, 8.43);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Pin=250mW,d=10mm/Area Scan (6x6x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 8.29 mW/g

Pin=250mW,d=10mm/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 94.7 V/m; Power Drift = -0.035 dB



Peak SAR (extrapolated) = 16.2 W/kg

SAR(1 g) = 9.34 mW/g; SAR(10 g) = 4.81 mW/g

Maximum value of SAR (measured) = 12.6 mW/g

Pin=250mW,d=10mm/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of SAR (measured) = 13.6 mW/g

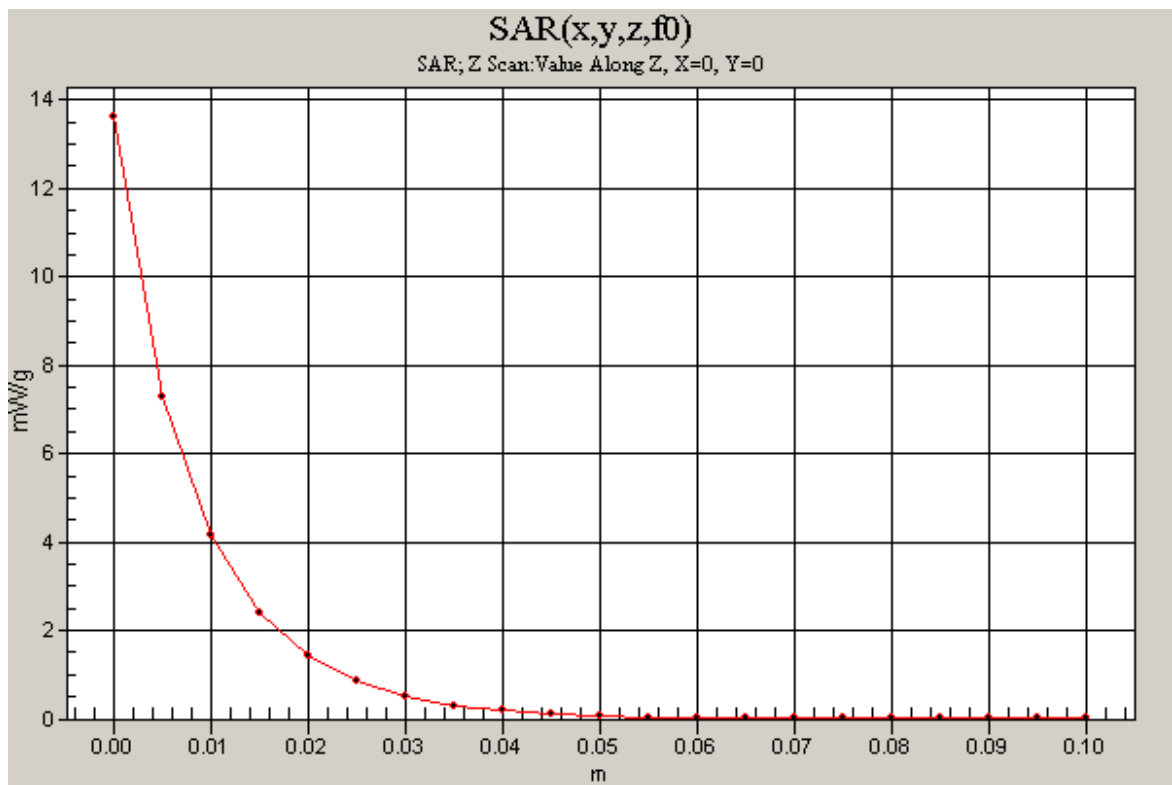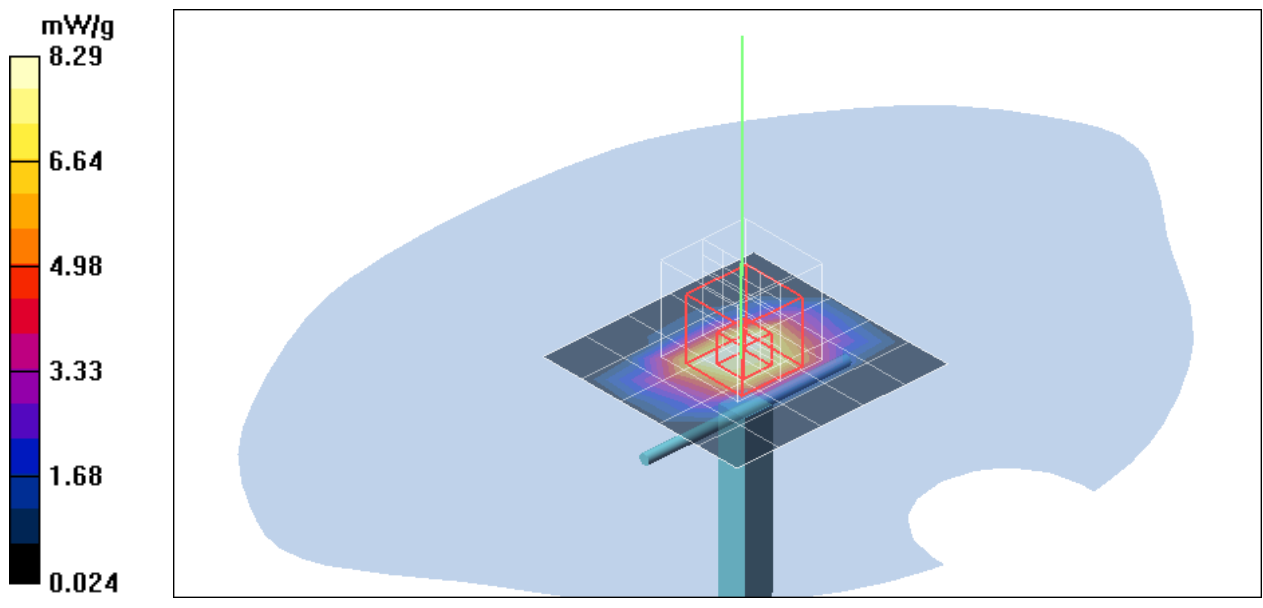

Test Laboratory: Compliance Certification Services Inc.

GSM 835-Left Head DA05I

DUT: DA05I; Type: Handheld Computer; Serial: N/A

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.884$ mho/m; $\epsilon_r = 41.3$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Air Temperature: 24.1 deg C; Liquid Temperature: 23.1 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(10.57, 10.57, 10.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Left Cheek Low CH128/Area Scan (10x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.366 mW/g


Left Cheek Low CH128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 12.3 V/m; Power Drift = -0.002 dB

Peak SAR (extrapolated) = 0.467 W/kg

SAR(1 g) = 0.283 mW/g; SAR(10 g) = 0.166 mW/g

Maximum value of SAR (measured) = 0.364 mW/g

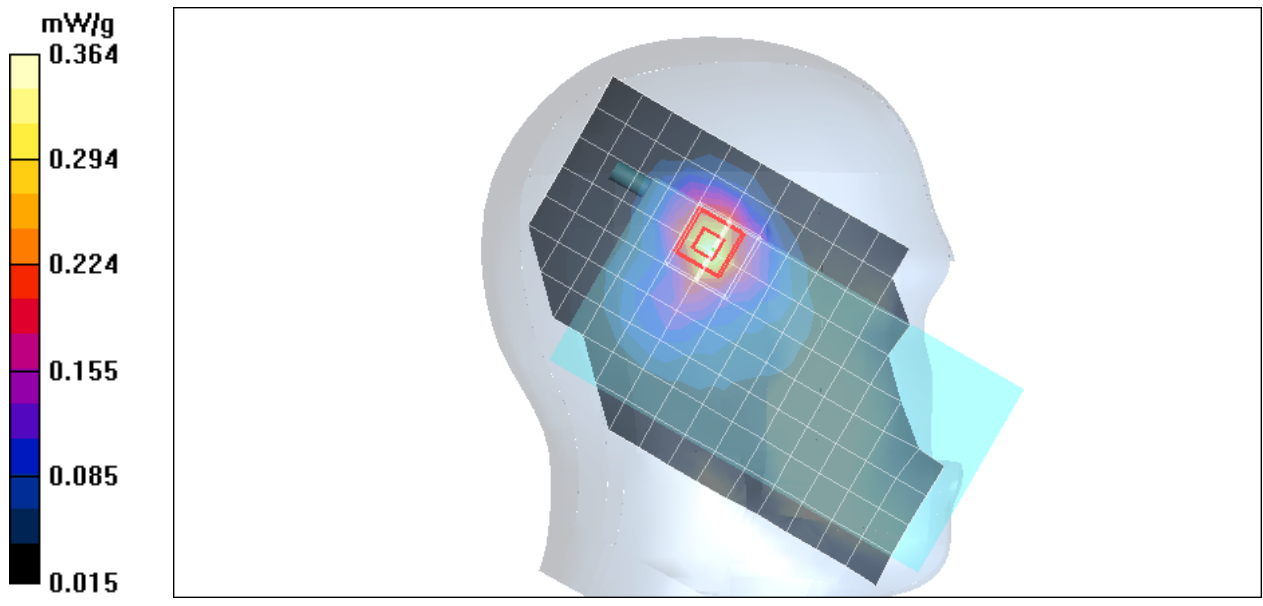

Test Laboratory: Compliance Certification Services Inc.

GSM 835-Left Head DA05I

DUT: DA05I; Type: Handheld Computer; Serial: N/A

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.895$ mho/m; $\epsilon_r = 41.2$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Air Temperature: 24.1 deg C; Liquid Temperature: 23.1 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(10.57, 10.57, 10.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Left Cheek Middle CH190/Area Scan (9x14x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.287 mW/g

Left Cheek Middle CH190/Zoom Scan (5x5x7)/Cube 0: Measurement


grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 10.8 V/m; Power Drift = -0.015 dB

Peak SAR (extrapolated) = 0.417 W/kg

SAR(1 g) = 0.257 mW/g; SAR(10 g) = 0.151 mW/g

Maximum value of SAR (measured) = 0.331 mW/g

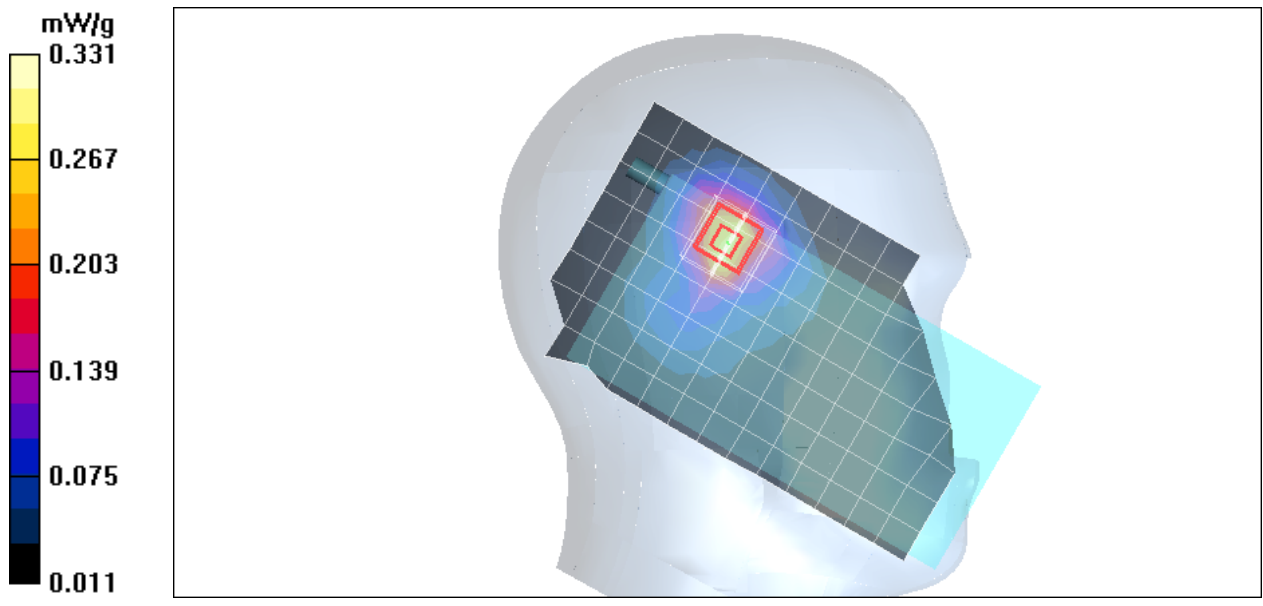

Test Laboratory: Compliance Certification Services Inc.

GSM 835-Left Head DA05I

DUT: DA05I; Type: Handheld Computer; Serial: N/A

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.906$ mho/m; $\epsilon_r = 41$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Air Temperature: 24.1 deg C; Liquid Temperature: 23.1 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(10.57, 10.57, 10.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Left Cheek High CH251/Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.245 mW/g


Left Cheek High CH251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 10.1 V/m; Power Drift = -0.017 dB

Peak SAR (extrapolated) = 0.409 W/kg

SAR(1 g) = 0.249 mW/g; SAR(10 g) = 0.145 mW/g

Maximum value of SAR (measured) = 0.316 mW/g

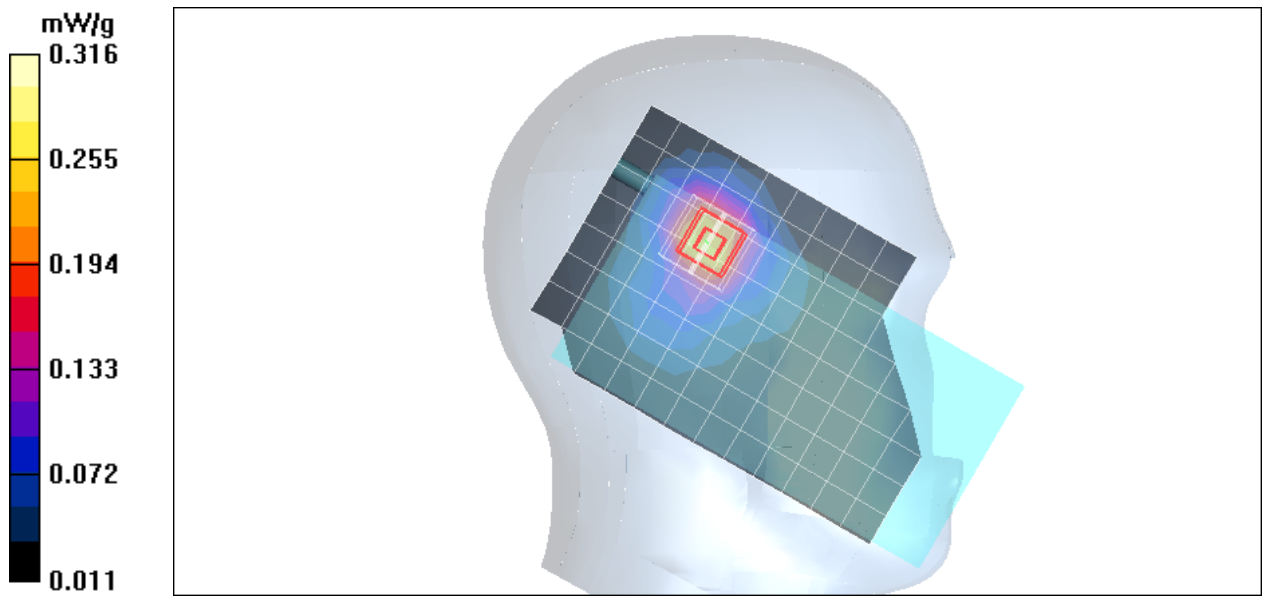

Test Laboratory: Compliance Certification Services Inc.

GSM 835-Left Head DA05I

DUT: DA05I; Type: Handheld Computer; Serial: N/A

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.884$ mho/m; $\epsilon_r = 41.3$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Air Temperature: 24.1 deg C; Liquid Temperature: 23.1 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(10.57, 10.57, 10.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Left Tilted Low CH128/Area Scan (9x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.470 mW/g

Left Tilted Low CH128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 15.6 V/m; Power Drift = -0.016 dB



Peak SAR (extrapolated) = 0.709 W/kg

SAR(1 g) = 0.427 mW/g; SAR(10 g) = 0.249 mW/g

Maximum value of SAR (measured) = 0.543 mW/g

Left Tilted Low CH128/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of SAR (measured) = 0.164 mW/g

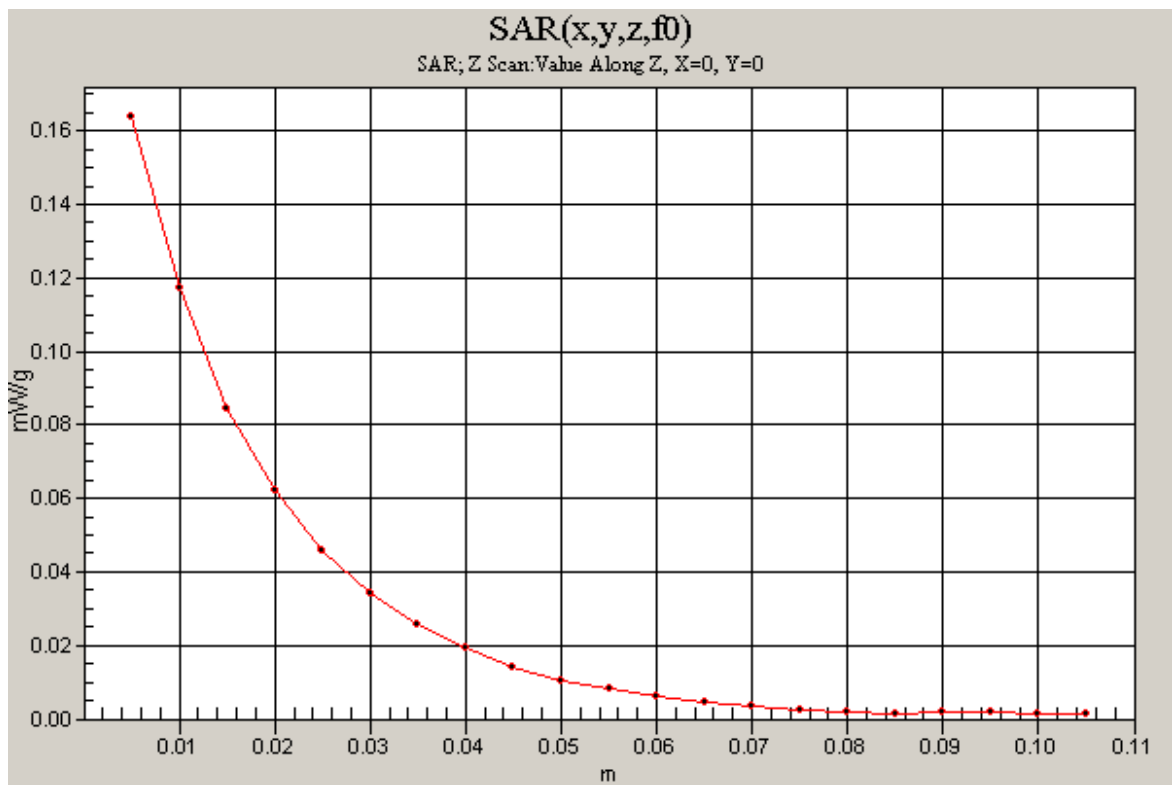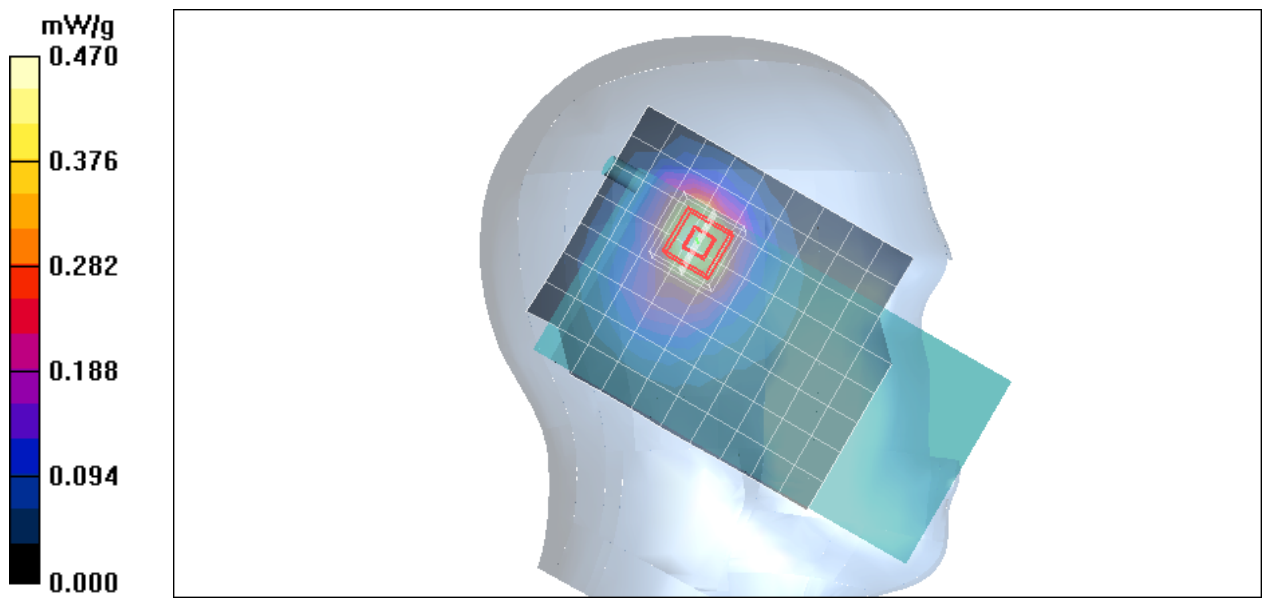

Test Laboratory: Compliance Certification Services Inc.

GSM 835-Left Head DA05I

DUT: DA05I; Type: Handheld Computer; Serial: N/A

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.895$ mho/m; $\epsilon_r = 41.2$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Air Temperature: 24.1 deg C; Liquid Temperature: 23.1 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(10.57, 10.57, 10.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Left Tilted Middle CH190/Area Scan (9x11x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.403 mW/g

Left Tilted Middle CH190/Zoom Scan (5x5x7)/Cube 0: Measurement


grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 13.5 V/m; Power Drift = -0.027 dB

Peak SAR (extrapolated) = 0.584 W/kg

SAR(1 g) = 0.342 mW/g; SAR(10 g) = 0.199 mW/g

Maximum value of SAR (measured) = 0.451 mW/g

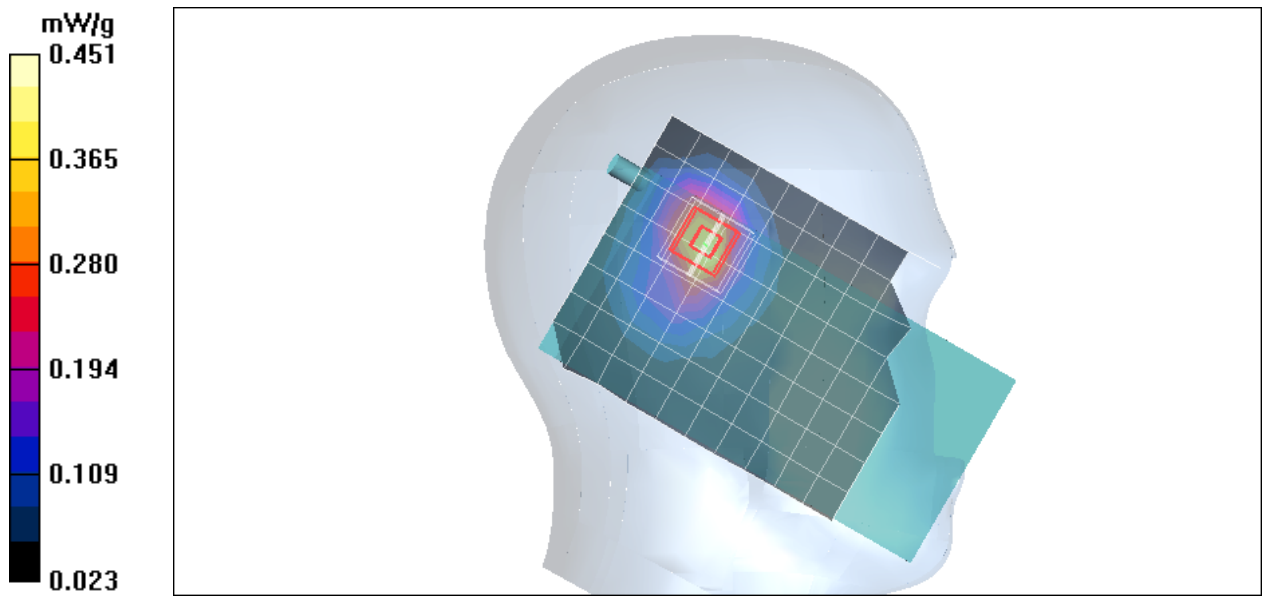

Test Laboratory: Compliance Certification Services Inc.

GSM 835-Left Head DA05I

DUT: DA05I; Type: Handheld Computer; Serial: N/A

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.906$ mho/m; $\epsilon_r = 41$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Air Temperature: 24.1 deg C; Liquid Temperature: 23.1 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(10.57, 10.57, 10.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Left Tilted High CH251/Area Scan (9x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.388 mW/g


Left Tilted High CH251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 13.5 V/m; Power Drift = -0.029 dB

Peak SAR (extrapolated) = 0.570 W/kg

SAR(1 g) = 0.340 mW/g; SAR(10 g) = 0.197 mW/g

Maximum value of SAR (measured) = 0.442 mW/g

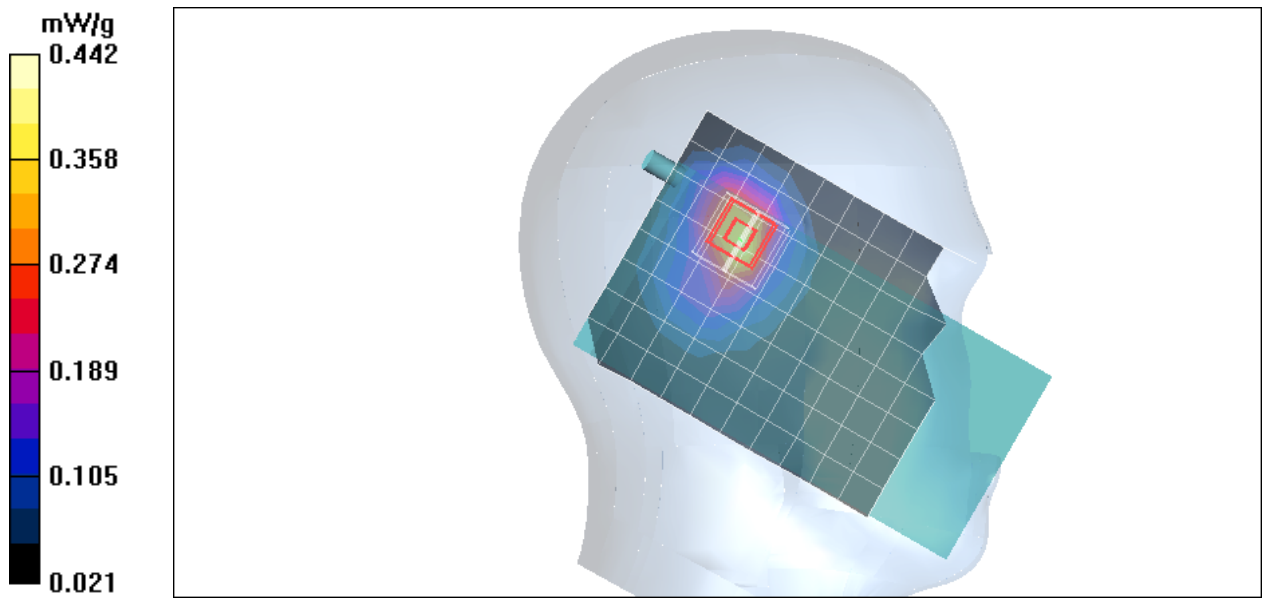

Test Laboratory: Compliance Certification Services Inc.

GSM 835-Right Head DA05I

DUT: DA05I; Type: Handheld Computer; Serial: N/A

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.884$ mho/m; $\epsilon_r = 41.3$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Air Temperature: 24.1 deg C; Liquid Temperature: 23.1 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(10.57, 10.57, 10.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Right Cheek Low CH128/Area Scan (9x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.135 mW/g

Right Cheek Low CH128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 12.4 V/m; Power Drift = -0.026 dB

Peak SAR (extrapolated) = 0.181 W/kg

SAR(1 g) = 0.119 mW/g; SAR(10 g) = 0.076 mW/g

Maximum value of SAR (measured) = 0.143 mW/g


Right Cheek Low CH128/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 12.4 V/m; Power Drift = -0.026 dB

Peak SAR (extrapolated) = 0.158 W/kg

SAR(1 g) = 0.109 mW/g; SAR(10 g) = 0.074 mW/g

Maximum value of SAR (measured) = 0.129 mW/g

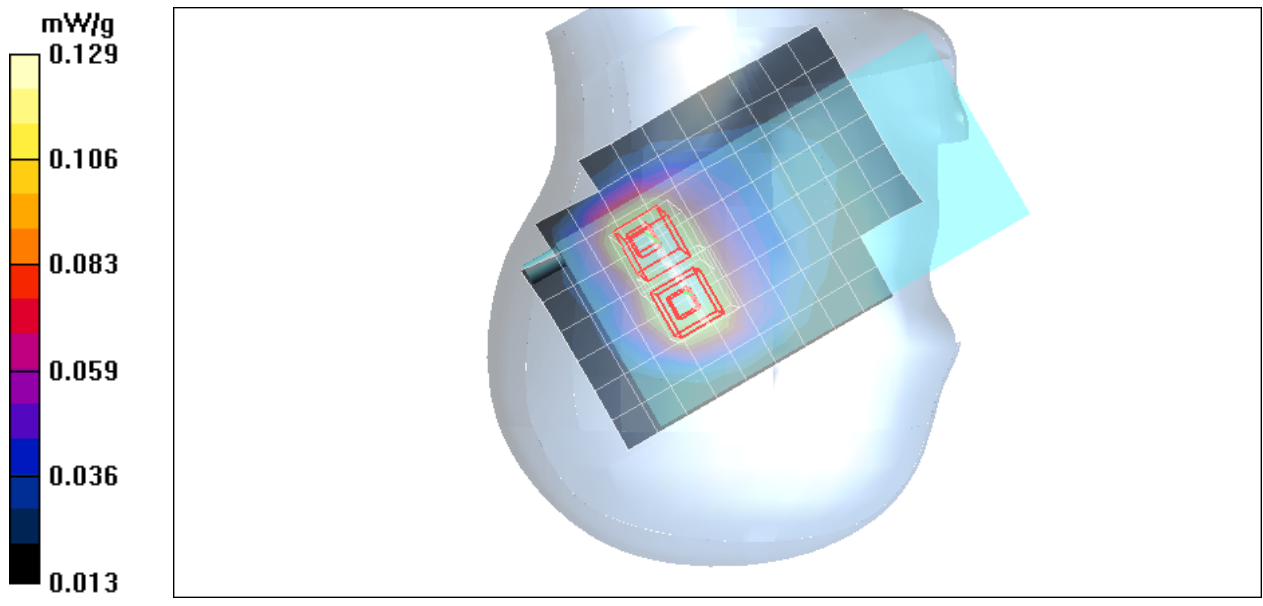

Test Laboratory: Compliance Certification Services Inc.

GSM 835-Right Head DA05I

DUT: DA05I; Type: Handheld Computer; Serial: N/A

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.895$ mho/m; $\epsilon_r = 41.2$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Air Temperature: 24.1 deg C; Liquid Temperature: 23.1 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(10.57, 10.57, 10.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Right Cheek Middle CH190/Area Scan (8x12x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.100 mW/g

Right Cheek Middle CH190/Zoom Scan (5x5x7)/Cube 0: Measurement

grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 9.38 V/m; Power Drift = -0.063 dB

Peak SAR (extrapolated) = 0.148 W/kg

SAR(1 g) = 0.097 mW/g; SAR(10 g) = 0.061 mW/g

Maximum value of SAR (measured) = 0.119 mW/g

Right Cheek Middle CH190/Zoom Scan (5x5x7)/Cube 1: Measurement


grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 9.38 V/m; Power Drift = -0.063 dB

Peak SAR (extrapolated) = 0.122 W/kg

SAR(1 g) = 0.081 mW/g; SAR(10 g) = 0.055 mW/g

Maximum value of SAR (measured) = 0.099 mW/g

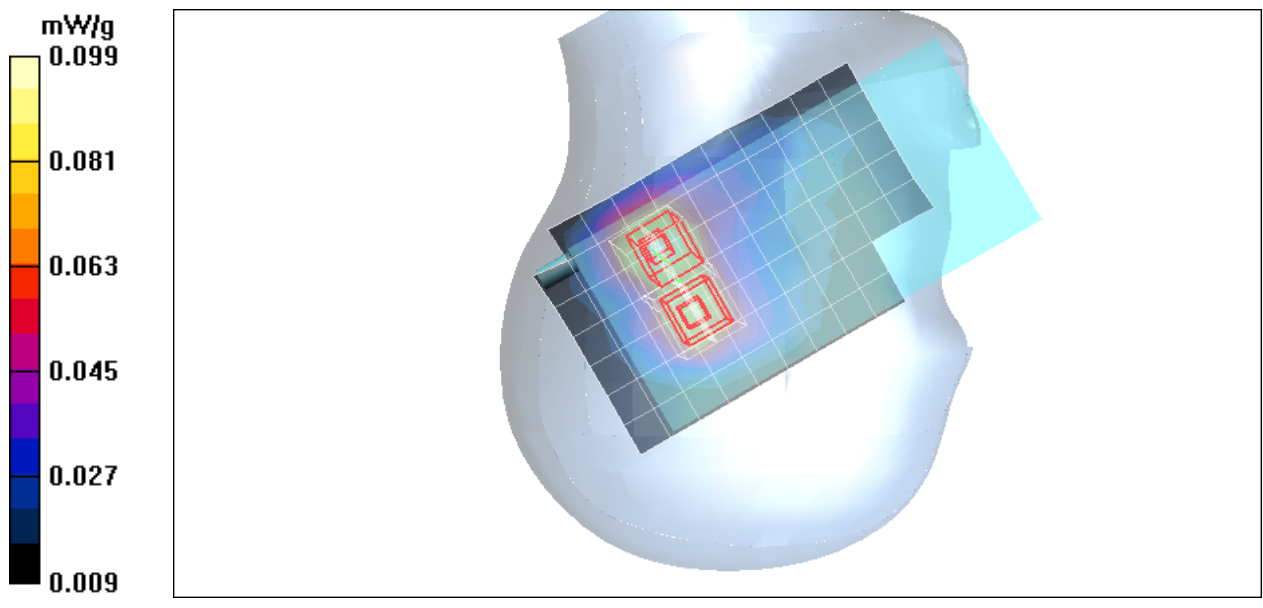

Test Laboratory: Compliance Certification Services Inc.

GSM 835-Right Head DA05I

DUT: DA05I; Type: Handheld Computer; Serial: N/A

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.906$ mho/m; $\epsilon_r = 41$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Air Temperature: 24.1 deg C; Liquid Temperature: 23.1 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(10.57, 10.57, 10.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Right Cheek High CH251/Area Scan (8x12x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.102 mW/g

Right Cheek High CH251/Zoom Scan (5x5x7)/Cube 0: Measurement

grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 9.16 V/m; Power Drift = -0.051 dB

Peak SAR (extrapolated) = 0.137 W/kg

SAR(1 g) = 0.090 mW/g; SAR(10 g) = 0.056 mW/g

Maximum value of SAR (measured) = 0.112 mW/g

Right Cheek High CH251/Zoom Scan (5x5x7)/Cube 1: Measurement


grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 9.16 V/m; Power Drift = -0.051 dB

Peak SAR (extrapolated) = 0.109 W/kg

SAR(1 g) = 0.071 mW/g; SAR(10 g) = 0.048 mW/g

Maximum value of SAR (measured) = 0.088 mW/g

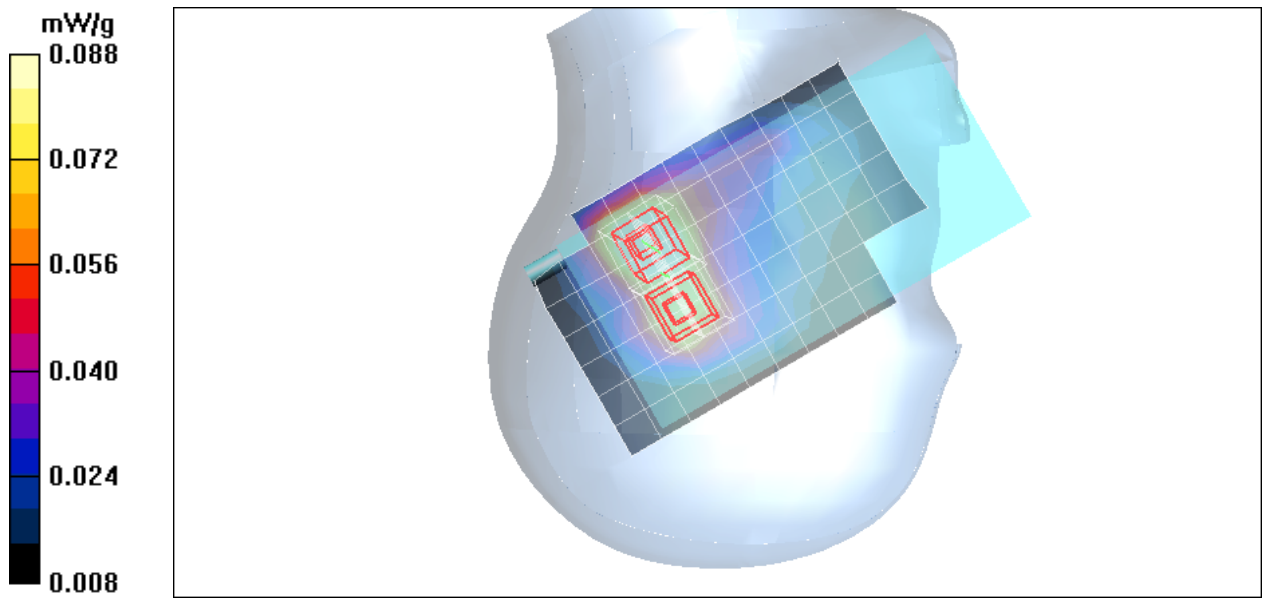

Test Laboratory: Compliance Certification Services Inc.

GSM 835-Right Head DA05I

DUT: DA05I; Type: Handheld Computer; Serial: N/A

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.884$ mho/m; $\epsilon_r = 41.3$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Air Temperature: 24.1 deg C; Liquid Temperature: 23.1 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(10.57, 10.57, 10.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Right Tilted Low CH128/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.192 mW/g


Right Tilted Low CH128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 14.5 V/m; Power Drift = -0.048 dB

Peak SAR (extrapolated) = 0.265 W/kg

SAR(1 g) = 0.181 mW/g; SAR(10 g) = 0.122 mW/g

Maximum value of SAR (measured) = 0.220 mW/g

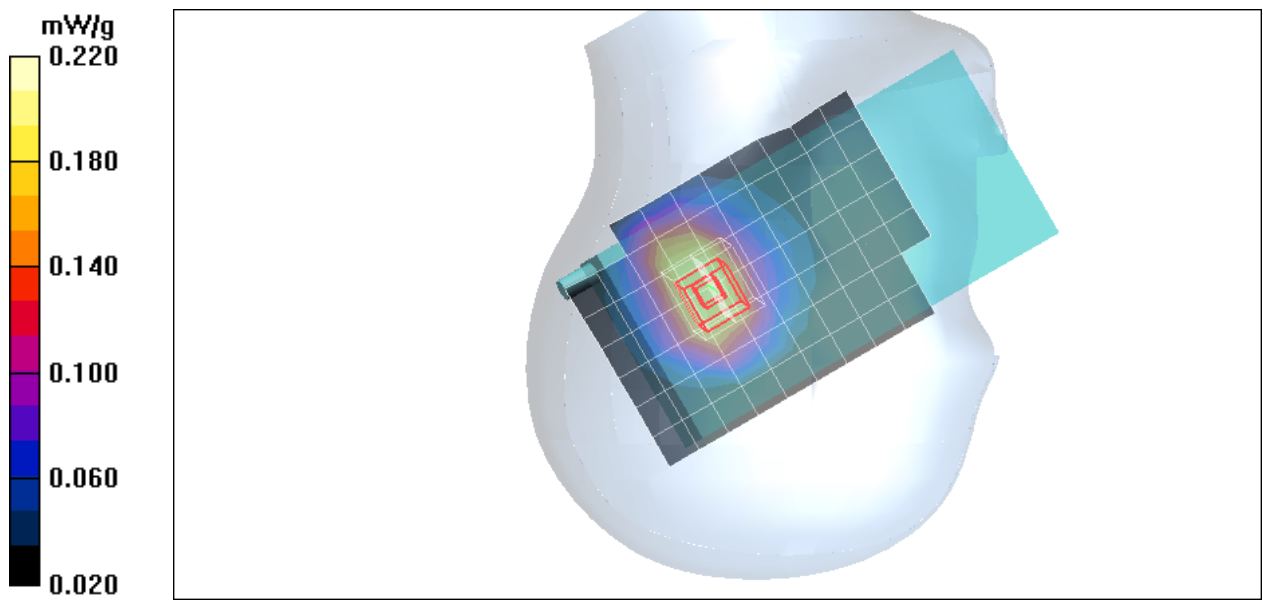

Test Laboratory: Compliance Certification Services Inc.

GSM 835-Right Head DA05I

DUT: DA05I; Type: Handheld Computer; Serial: N/A

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.895$ mho/m; $\epsilon_r = 41.2$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Air Temperature: 24.1 deg C; Liquid Temperature: 23.1 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(10.57, 10.57, 10.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Right Tilted Middle CH190/Area Scan (8x11x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.154 mW/g

Right Tilted Middle CH190/Zoom Scan (5x5x7)/Cube 0: Measurement


grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 12.9 V/m; Power Drift = -0.037 dB

Peak SAR (extrapolated) = 0.206 W/kg

SAR(1 g) = 0.140 mW/g; SAR(10 g) = 0.093 mW/g

Maximum value of SAR (measured) = 0.168 mW/g

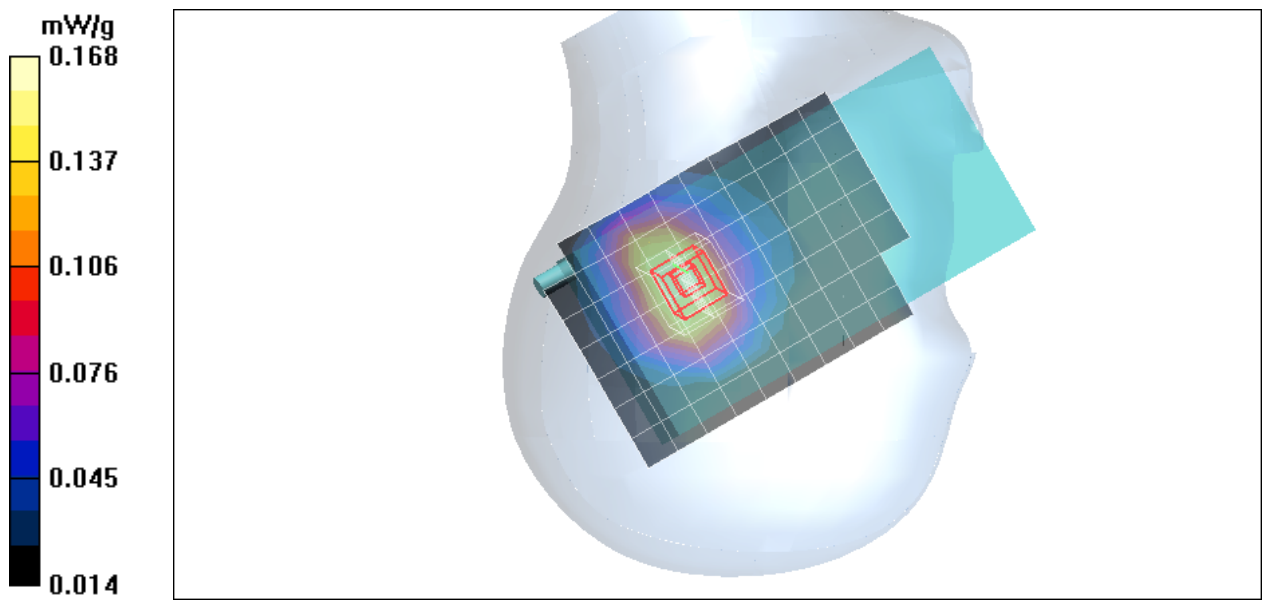

Test Laboratory: Compliance Certification Services Inc.

GSM 835-Right Head DA05I

DUT: DA05I; Type: Handheld Computer; Serial: N/A

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.906$ mho/m; $\epsilon_r = 41$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Air Temperature: 24.1 deg C; Liquid Temperature: 23.1 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(10.57, 10.57, 10.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Right Tilted High CH251/Area Scan (8x11x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.154 mW/g

Right Tilted High CH251/Zoom Scan (5x5x7)/Cube 0: Measurement


grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 12.6 V/m; Power Drift = -0.030 dB

Peak SAR (extrapolated) = 0.181 W/kg

SAR(1 g) = 0.121 mW/g; SAR(10 g) = 0.079 mW/g

Maximum value of SAR (measured) = 0.147 mW/g

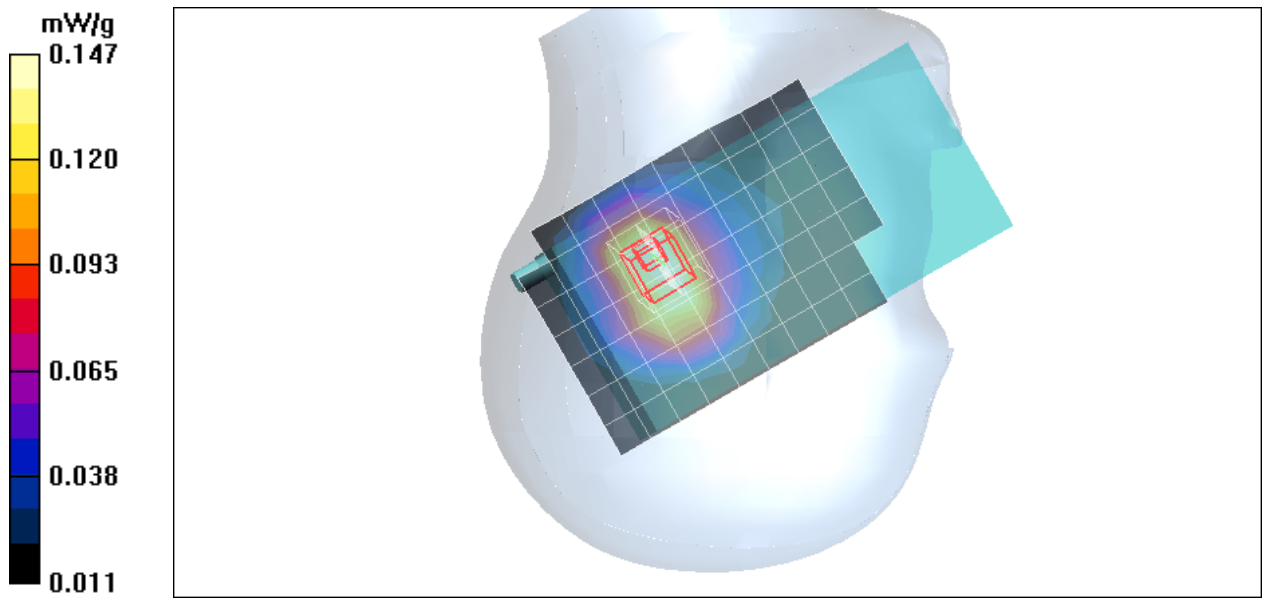

Test Laboratory: Compliance Certification Services Inc.

GSM 1900-Left Head DA05I

DUT: DA05I; Type: Handheld Computer; Serial: N/A

Communication System: GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 38.4$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Air Temperature: 24.0 deg C; Liquid Temperature: 23.0 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(8.52, 8.52, 8.52);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Left Cheek Low CH512/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.408 mW/g


Left Cheek Low CH512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 6.64 V/m; Power Drift = -0.051 dB

Peak SAR (extrapolated) = 0.765 W/kg

SAR(1 g) = 0.433 mW/g; SAR(10 g) = 0.231 mW/g

Maximum value of SAR (measured) = 0.578 mW/g

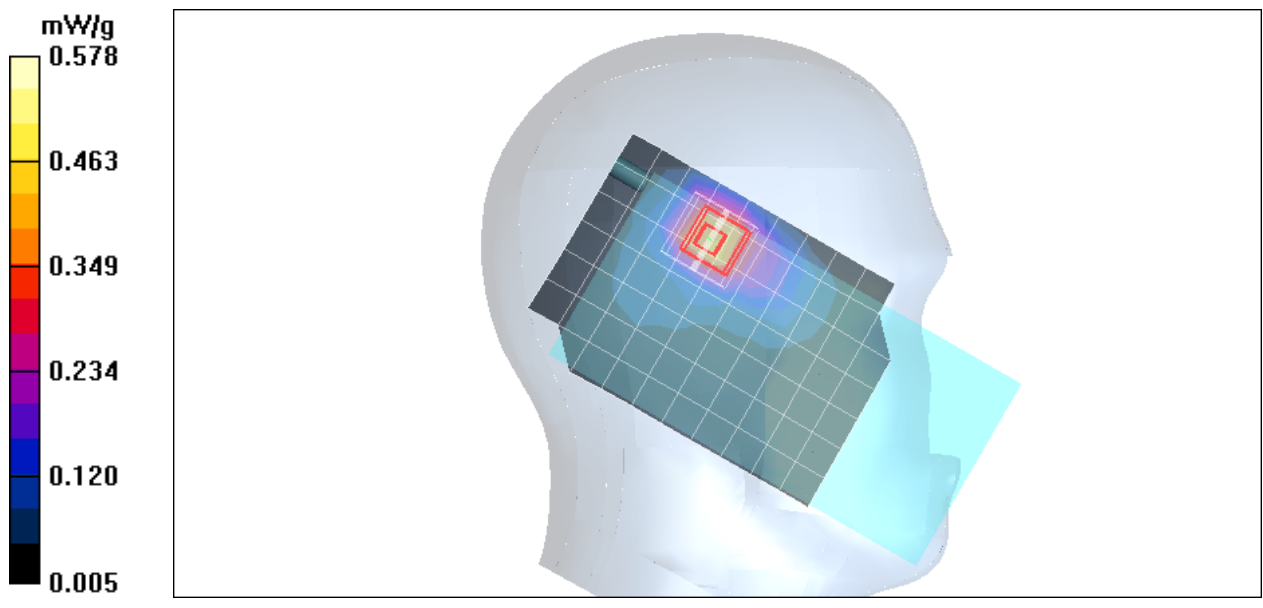

Test Laboratory: Compliance Certification Services Inc.

GSM 1900-Left Head DA05I

DUT: DA05I; Type: Handheld Computer; Serial: N/A

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 38.2$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Air Temperature: 24.0 deg C; Liquid Temperature: 23.0 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(8.52, 8.52, 8.52);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Left Cheek Middle CH661/Area Scan (8x11x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.264 mW/g

Left Cheek Middle CH661/Zoom Scan (5x5x7)/Cube 0: Measurement


grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 5.11 V/m; Power Drift = -0.037 dB

Peak SAR (extrapolated) = 0.522 W/kg

SAR(1 g) = 0.285 mW/g; SAR(10 g) = 0.148 mW/g

Maximum value of SAR (measured) = 0.382 mW/g

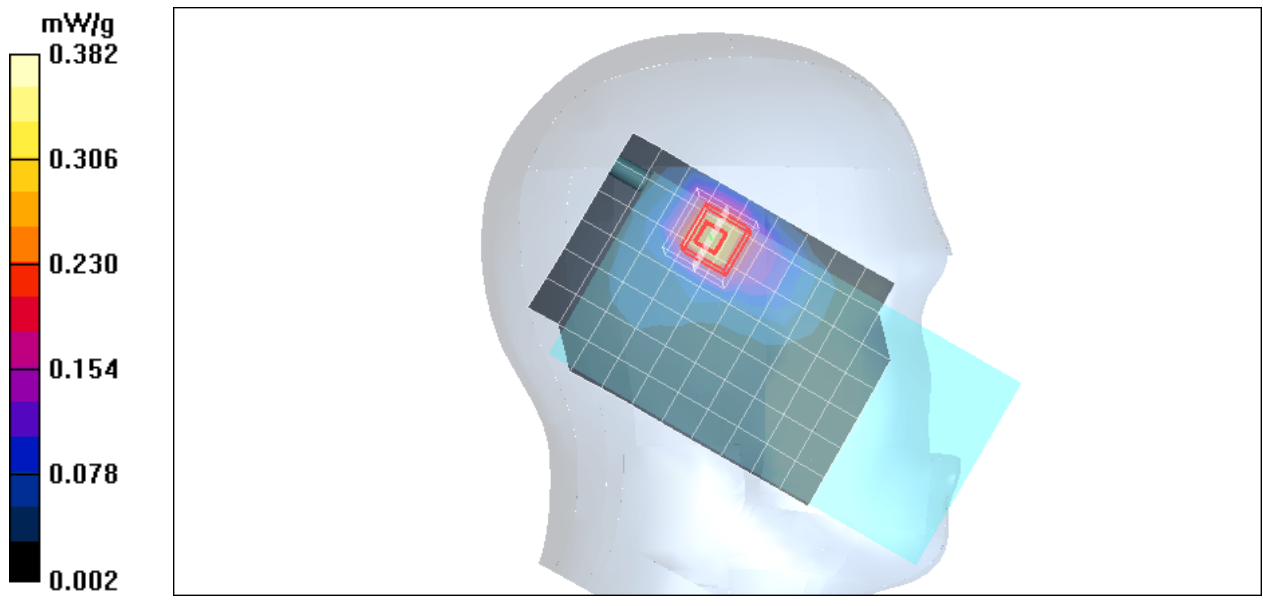

Test Laboratory: Compliance Certification Services Inc.

GSM 1900-Left Head DA05I

DUT: DA05I; Type: Handheld Computer; Serial: N/A

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 38.1$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Air Temperature: 24.0 deg C; Liquid Temperature: 23.0 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(8.52, 8.52, 8.52);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Left Cheek High CH810/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.296 mW/g


Left Cheek High CH810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 5.20 V/m; Power Drift = -0.081 dB

Peak SAR (extrapolated) = 0.578 W/kg

SAR(1 g) = 0.318 mW/g; SAR(10 g) = 0.166 mW/g

Maximum value of SAR (measured) = 0.421 mW/g

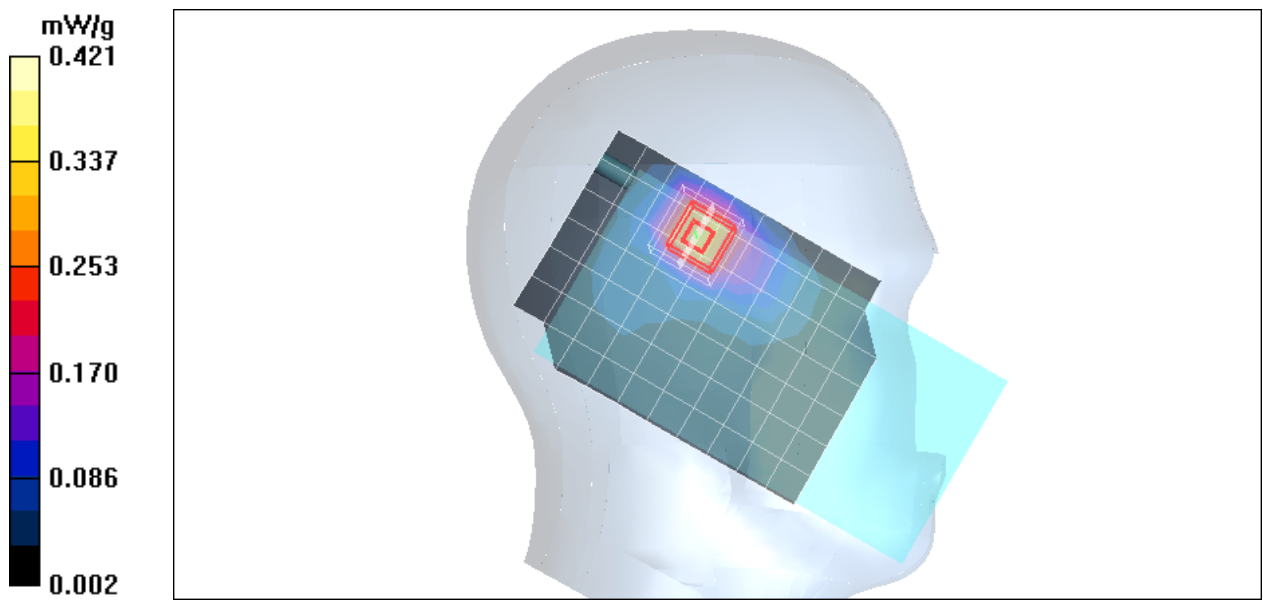

Test Laboratory: Compliance Certification Services Inc.

GSM 1900-Left Head DA05I

DUT: DA05I; Type: Handheld Computer; Serial: N/A

Communication System: GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 38.4$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Air Temperature: 24.0 deg C; Liquid Temperature: 23.0 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(8.52, 8.52, 8.52);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Left Tilted Low CH512/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.635 mW/g

Left Tilted Low CH512/Zoom Scan (5x5x7)/Cube 0: Measurement grid:

dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 9.38 V/m; Power Drift = -0.044 dB



Peak SAR (extrapolated) = 1.10 W/kg

SAR(1 g) = 0.590 mW/g; SAR(10 g) = 0.299 mW/g

Maximum value of SAR (measured) = 0.798 mW/g

Left Tilted Low CH512/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of SAR (measured) = 0.099 mW/g

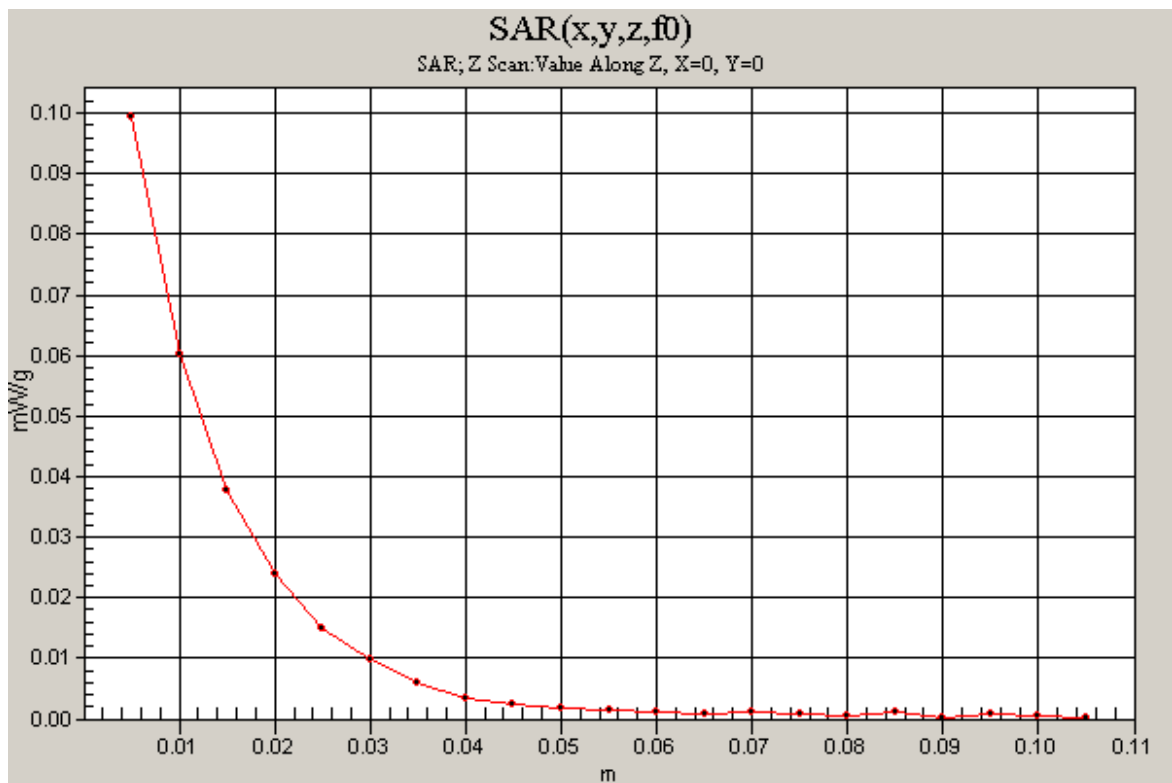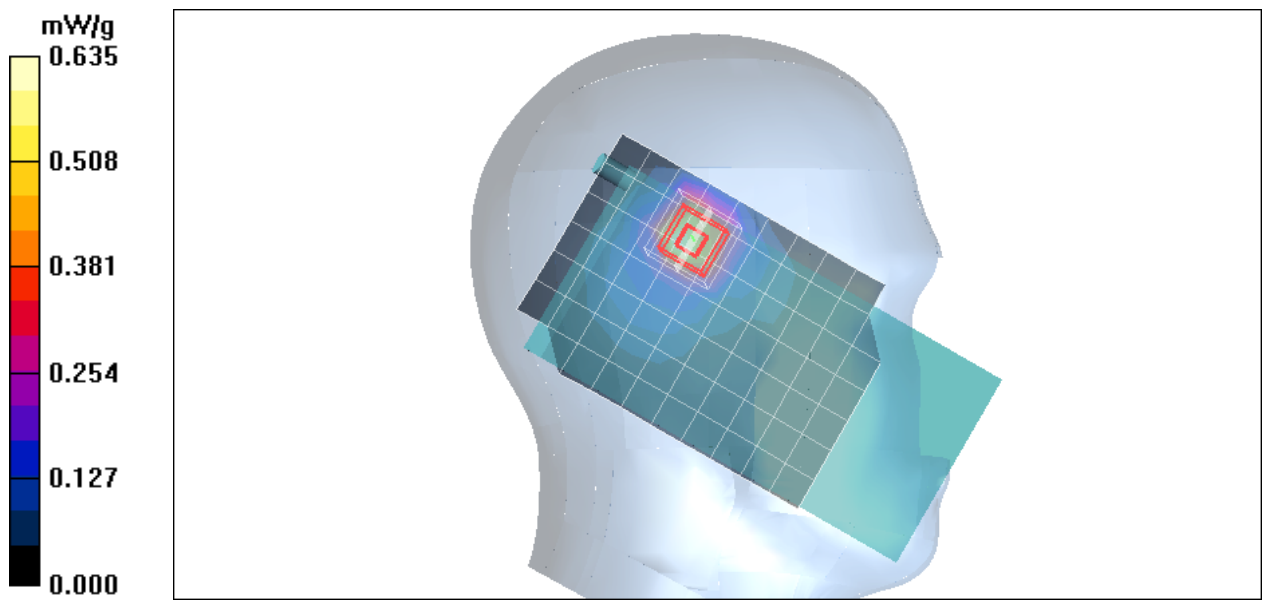

Test Laboratory: Compliance Certification Services Inc.

GSM 1900-Left Head DA05I

DUT: DA05I; Type: Handheld Computer; Serial: N/A

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 38.2$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Air Temperature: 24.0 deg C; Liquid Temperature: 23.0 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(8.52, 8.52, 8.52);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Left Tilted Middle CH661/Area Scan (8x11x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.400 mW/g

Left Tilted Middle CH661/Zoom Scan (5x5x7)/Cube 0: Measurement


grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 7.24 V/m; Power Drift = -0.081 dB

Peak SAR (extrapolated) = 0.701 W/kg

SAR(1 g) = 0.377 mW/g; SAR(10 g) = 0.189 mW/g

Maximum value of SAR (measured) = 0.505 mW/g

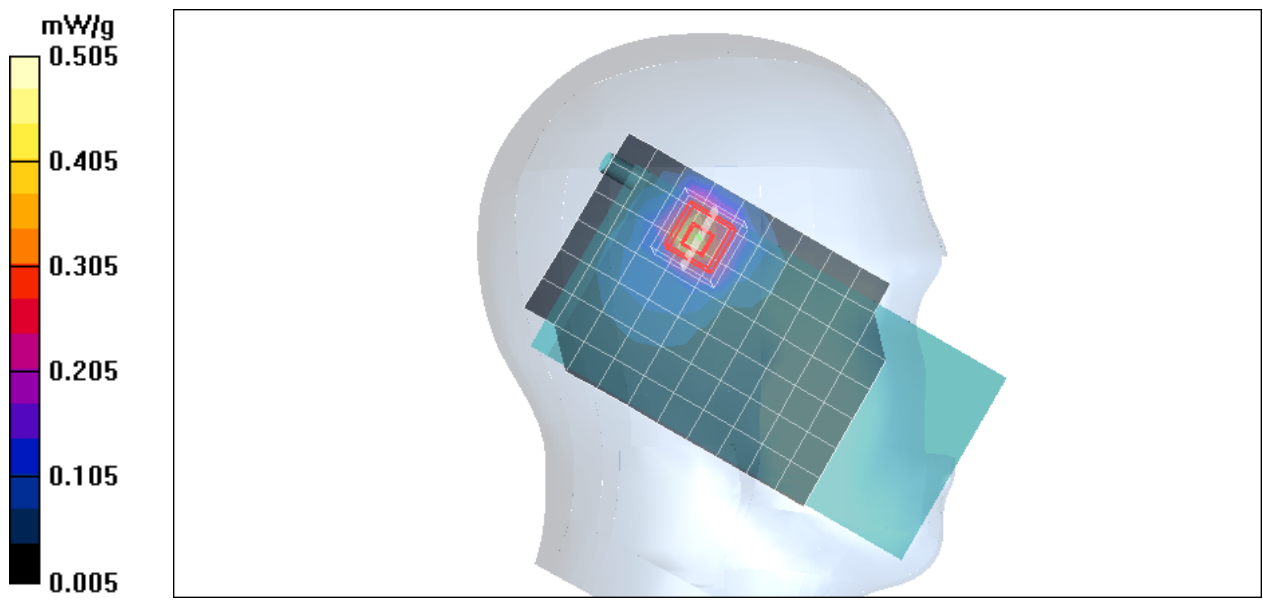

Test Laboratory: Compliance Certification Services Inc.

GSM 1900-Left Head DA05I

DUT: DA05I; Type: Handheld Computer; Serial: N/A

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 38.1$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Air Temperature: 24.0 deg C; Liquid Temperature: 23.0 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(8.52, 8.52, 8.52);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Left Tilted High CH810/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.431 mW/g


Left Tilted High CH810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 7.43 V/m; Power Drift = -0.009 dB

Peak SAR (extrapolated) = 0.759 W/kg

SAR(1 g) = 0.412 mW/g; SAR(10 g) = 0.206 mW/g

Maximum value of SAR (measured) = 0.555 mW/g

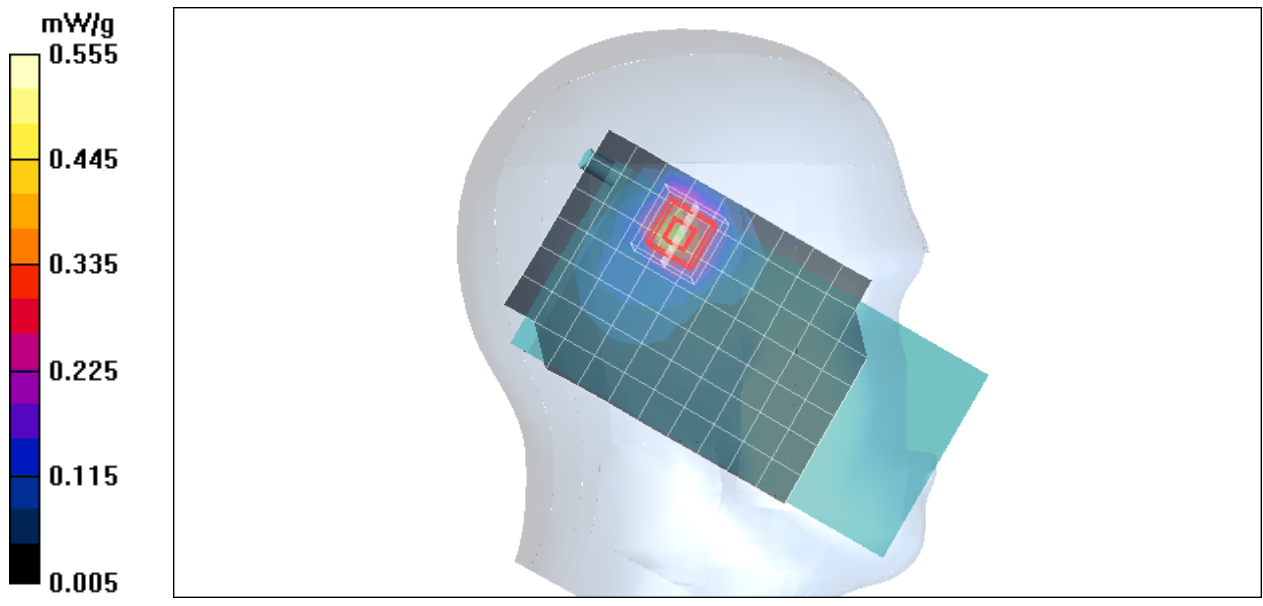

Test Laboratory: Compliance Certification Services Inc.

GSM 1900-Right Head DA05I

DUT: DA05I; Type: Handheld Computer; Serial: N/A

Communication System: GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 38.4$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Air Temperature: 24.0 deg C; Liquid Temperature: 23.0 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(8.52, 8.52, 8.52);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Right Cheek Low CH512/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.172 mW/g

Right Cheek Low CH512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 8.12 V/m; Power Drift = -0.098 dB

Peak SAR (extrapolated) = 0.230 W/kg

SAR(1 g) = 0.136 mW/g; SAR(10 g) = 0.077 mW/g

Maximum value of SAR (measured) = 0.171 mW/g


Right Cheek Low CH512/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 8.12 V/m; Power Drift = -0.098 dB

Peak SAR (extrapolated) = 0.200 W/kg

SAR(1 g) = 0.113 mW/g; SAR(10 g) = 0.063 mW/g

Maximum value of SAR (measured) = 0.144 mW/g

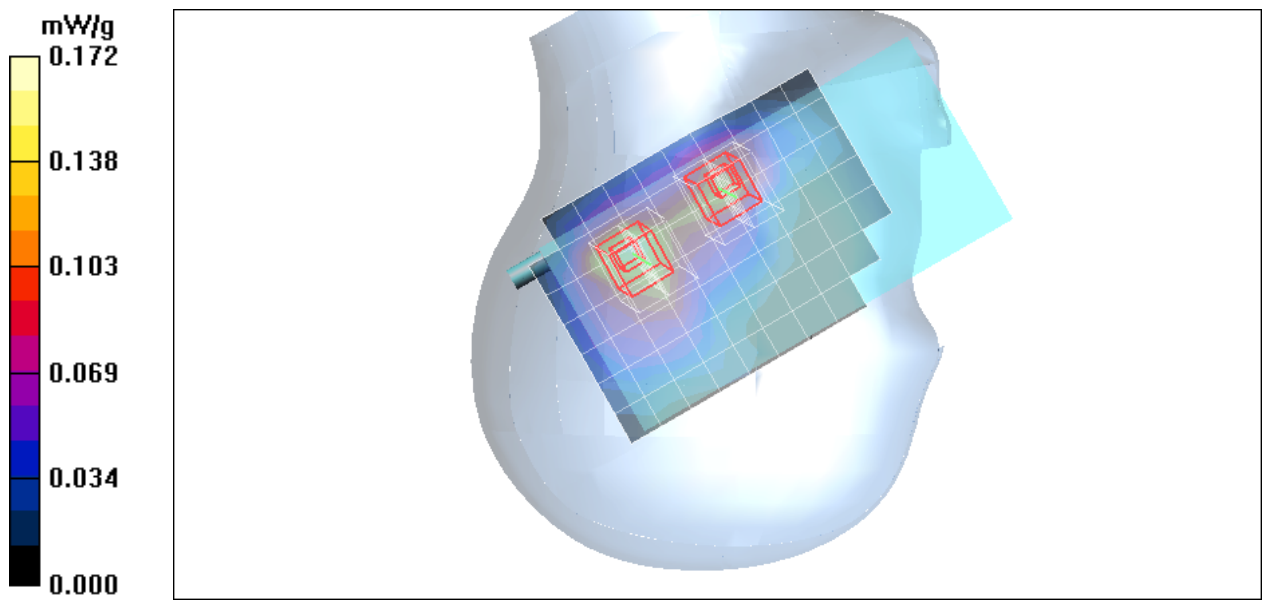

Test Laboratory: Compliance Certification Services Inc.

GSM 1900-Right Head DA05I

DUT: DA05I; Type: Handheld Computer; Serial: N/A

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 38.2$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Air Temperature: 24.0 deg C; Liquid Temperature: 23.0 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(8.52, 8.52, 8.52);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Right Cheek Middle CH661/Area Scan (8x11x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.108 mW/g

Right Cheek Middle CH661/Zoom Scan (5x5x7)/Cube 0: Measurement

grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 6.06 V/m; Power Drift = -0.044 dB

Peak SAR (extrapolated) = 0.150 W/kg

SAR(1 g) = 0.087 mW/g; SAR(10 g) = 0.049 mW/g

Maximum value of SAR (measured) = 0.114 mW/g

Right Cheek Middle CH661/Zoom Scan (5x5x7)/Cube 1: Measurement


grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 6.06 V/m; Power Drift = -0.044 dB

Peak SAR (extrapolated) = 0.124 W/kg

SAR(1 g) = 0.069 mW/g; SAR(10 g) = 0.038 mW/g

Maximum value of SAR (measured) = 0.087 mW/g

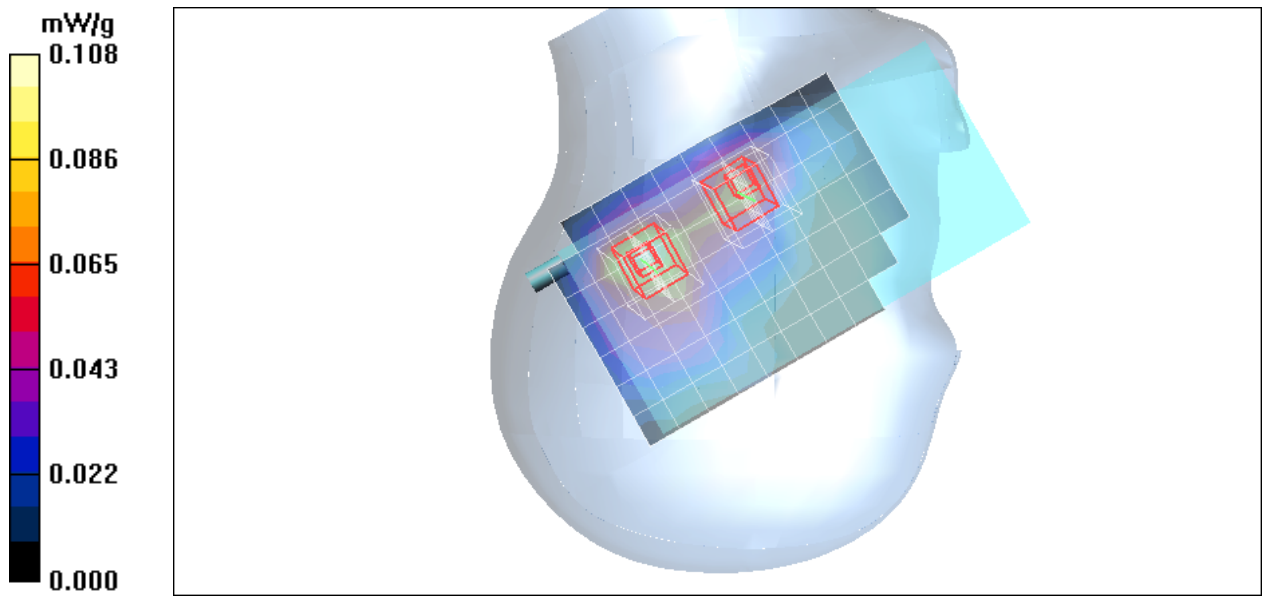

Test Laboratory: Compliance Certification Services Inc.

GSM 1900-Right Head DA05I

DUT: DA05I; Type: Handheld Computer; Serial: N/A

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 38.1$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Air Temperature: 24.0 deg C; Liquid Temperature: 23.0 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(8.52, 8.52, 8.52);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Right Cheek High CH810/Area Scan (8x11x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.117 mW/g

Right Cheek High CH810/Zoom Scan (5x5x7)/Cube 0: Measurement

grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 6.15 V/m; Power Drift = -0.019 dB

Peak SAR (extrapolated) = 0.165 W/kg

SAR(1 g) = 0.095 mW/g; SAR(10 g) = 0.052 mW/g

Maximum value of SAR (measured) = 0.125 mW/g

Right Cheek High CH810/Zoom Scan (5x5x7)/Cube 1: Measurement


grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 6.15 V/m; Power Drift = -0.019 dB

Peak SAR (extrapolated) = 0.137 W/kg

SAR(1 g) = 0.075 mW/g; SAR(10 g) = 0.042 mW/g

Maximum value of SAR (measured) = 0.095 mW/g

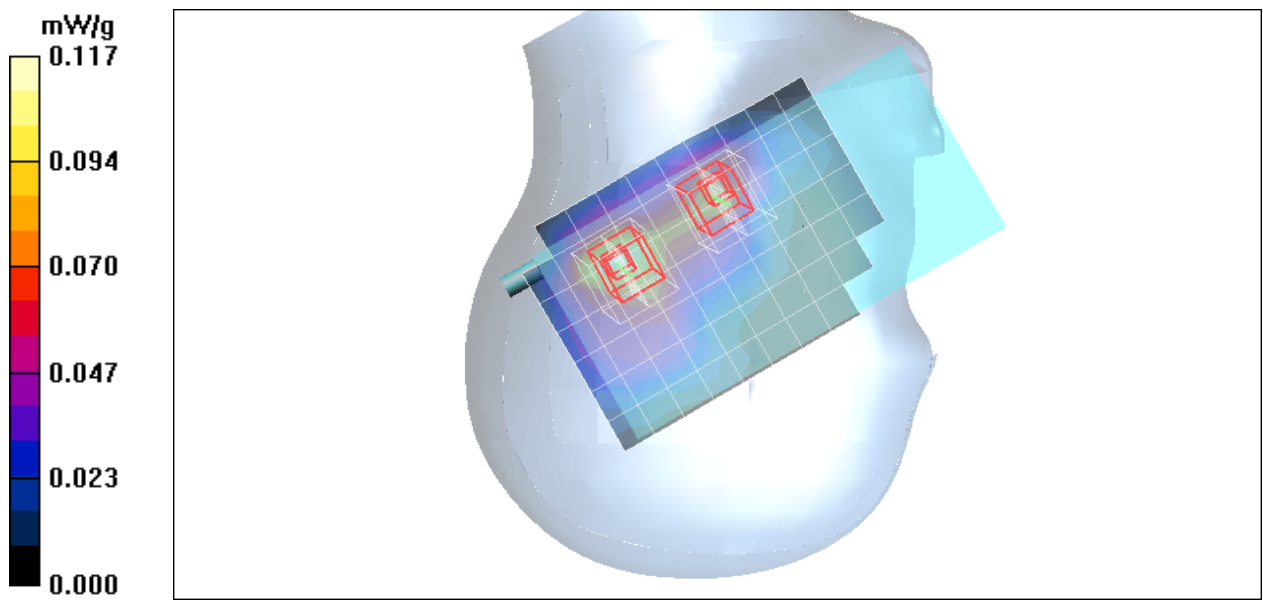

Test Laboratory: Compliance Certification Services Inc.

GSM 1900-Right Head DA05I

DUT: DA05I; Type: Handheld Computer; Serial: N/A

Communication System: GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 38.4$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Air Temperature: 24.0 deg C; Liquid Temperature: 23.0 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(8.52, 8.52, 8.52);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Right Tilted Low CH512/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.232 mW/g


Right Tilted Low CH512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 8.34 V/m; Power Drift = -0.066 dB

Peak SAR (extrapolated) = 0.336 W/kg

SAR(1 g) = 0.199 mW/g; SAR(10 g) = 0.109 mW/g

Maximum value of SAR (measured) = 0.260 mW/g

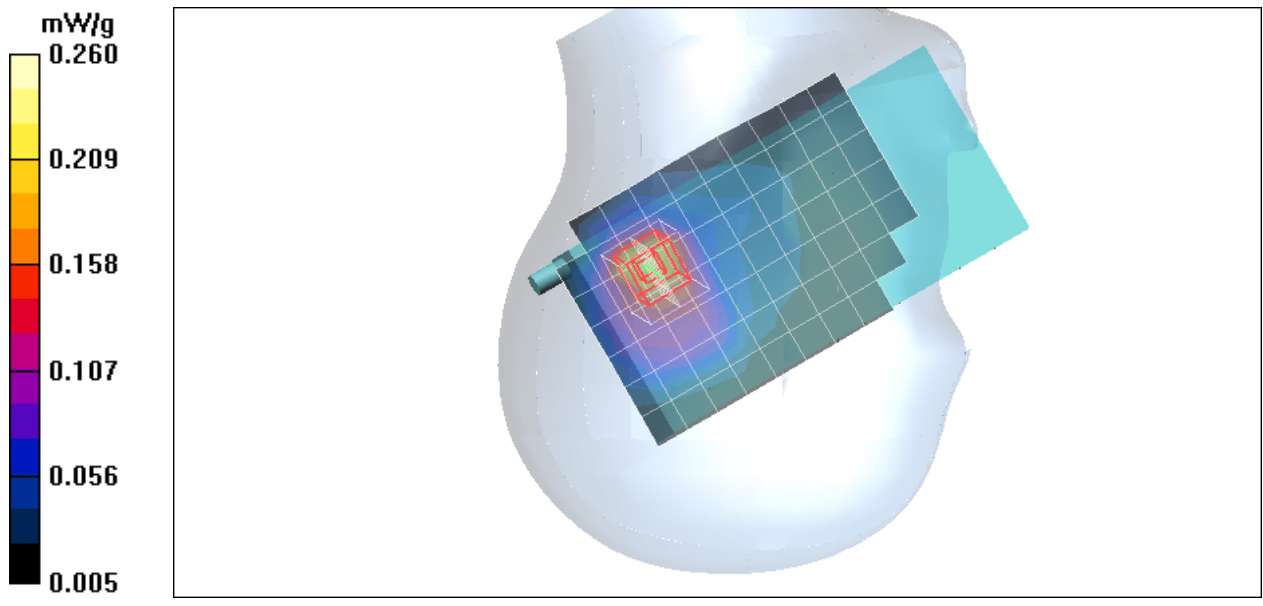

Test Laboratory: Compliance Certification Services Inc.

GSM 1900-Right Head DA05I

DUT: DA05I; Type: Handheld Computer; Serial: N/A

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 38.2$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Air Temperature: 24.0 deg C; Liquid Temperature: 23.0 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(8.52, 8.52, 8.52);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Right Tilted Middle CH661/Area Scan (8x11x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.152 mW/g

Right Tilted Middle CH661/Zoom Scan (5x5x7)/Cube 0: Measurement


grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 6.45 V/m; Power Drift = -0.053 dB

Peak SAR (extrapolated) = 0.217 W/kg

SAR(1 g) = 0.127 mW/g; SAR(10 g) = 0.069 mW/g

Maximum value of SAR (measured) = 0.165 mW/g

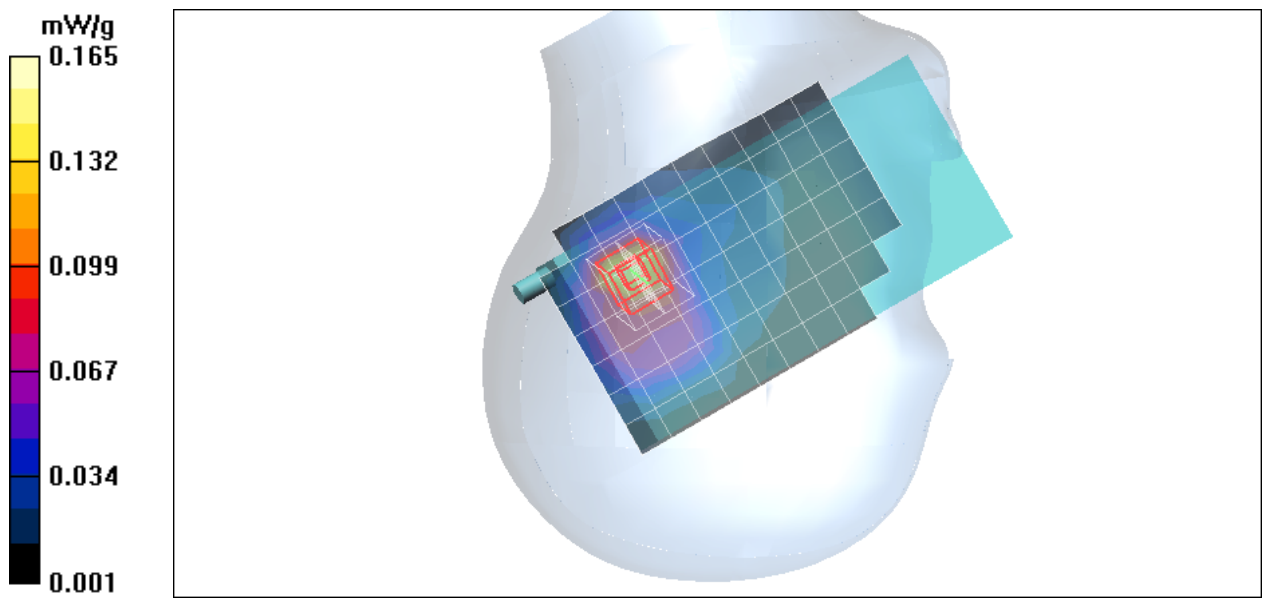

Test Laboratory: Compliance Certification Services Inc.

GSM 1900-Right Head DA05I

DUT: DA05I; Type: Handheld Computer; Serial: N/A

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 38.1$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Air Temperature: 24.0 deg C; Liquid Temperature: 23.0 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(8.52, 8.52, 8.52);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Right Tilted High CH810/Area Scan (8x11x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.164 mW/g

Right Tilted High CH810/Zoom Scan (5x5x7)/Cube 0: Measurement


grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 6.48 V/m; Power Drift = -0.010 dB

Peak SAR (extrapolated) = 0.244 W/kg

SAR(1 g) = 0.137 mW/g; SAR(10 g) = 0.073 mW/g

Maximum value of SAR (measured) = 0.182 mW/g

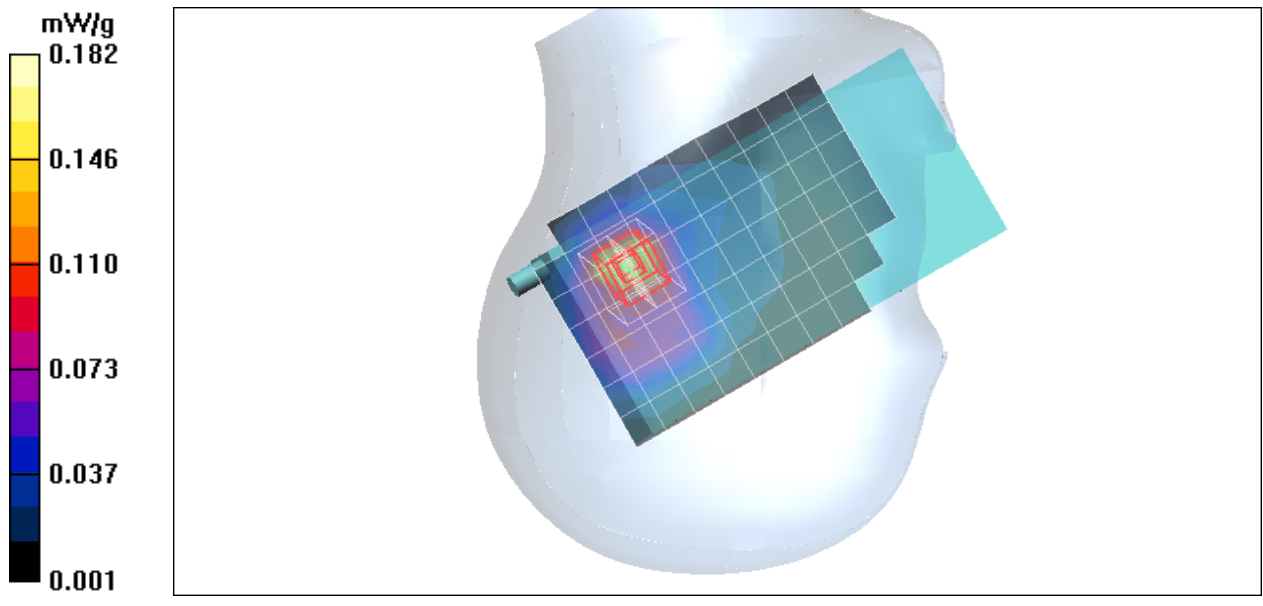

Test Laboratory: Compliance Certification Services Inc.

GSM 850-Body DA05I

DUT: DA05I; Type: Handheld Computer; Serial: N/A

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.921$ mho/m; $\epsilon_r = 55.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.3 deg C; Liquid Temperature: 23.3 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(10.96, 10.96, 10.96);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

GSM Body Front Low CH128/Area Scan (9x15x1): Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.089 mW/g

GSM Body Front Low CH128/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 9.51 V/m; Power Drift = -0.031 dB

Peak SAR (extrapolated) = 0.179 W/kg



SAR(1 g) = 0.083 mW/g; SAR(10 g) = 0.053 mW/g

Maximum value of SAR (measured) = 0.092 mW/g

GSM Body Front Low CH128/Z Scan (1x1x21): Measurement grid:

dx=20mm, dy=20mm, dz=5mm

Maximum value of SAR (measured) = 0.057 mW/g

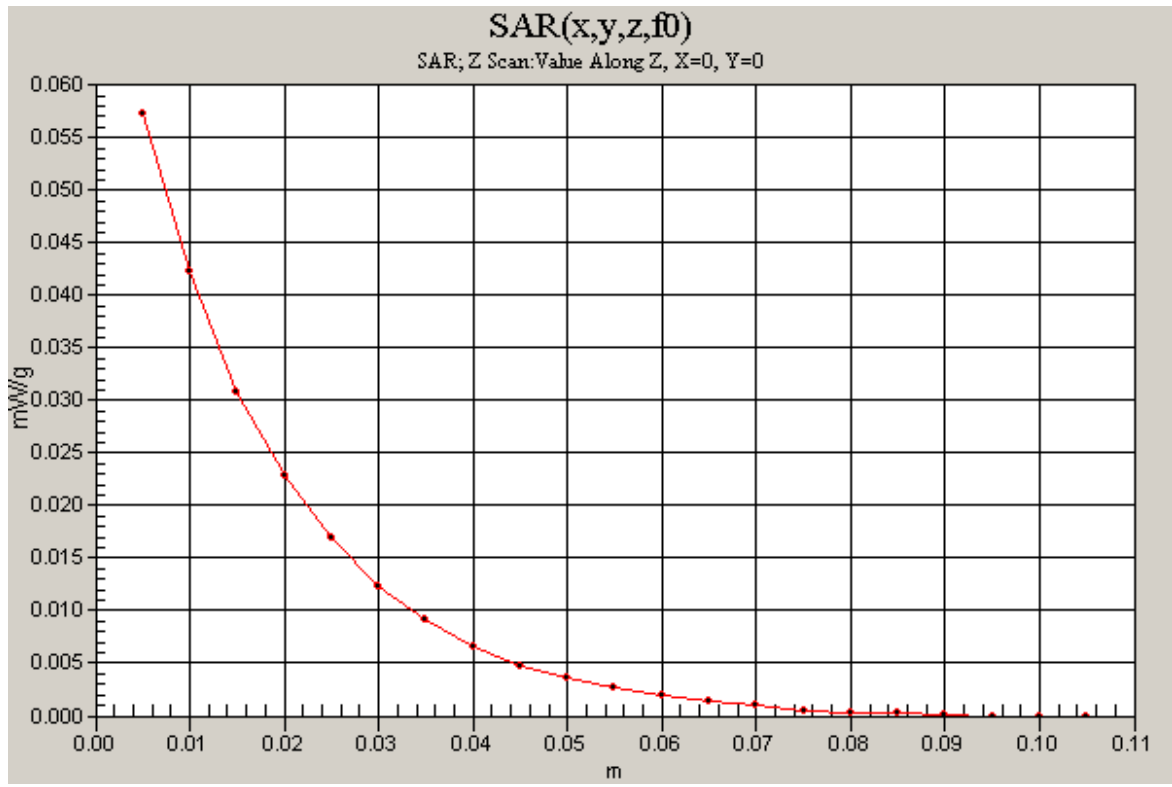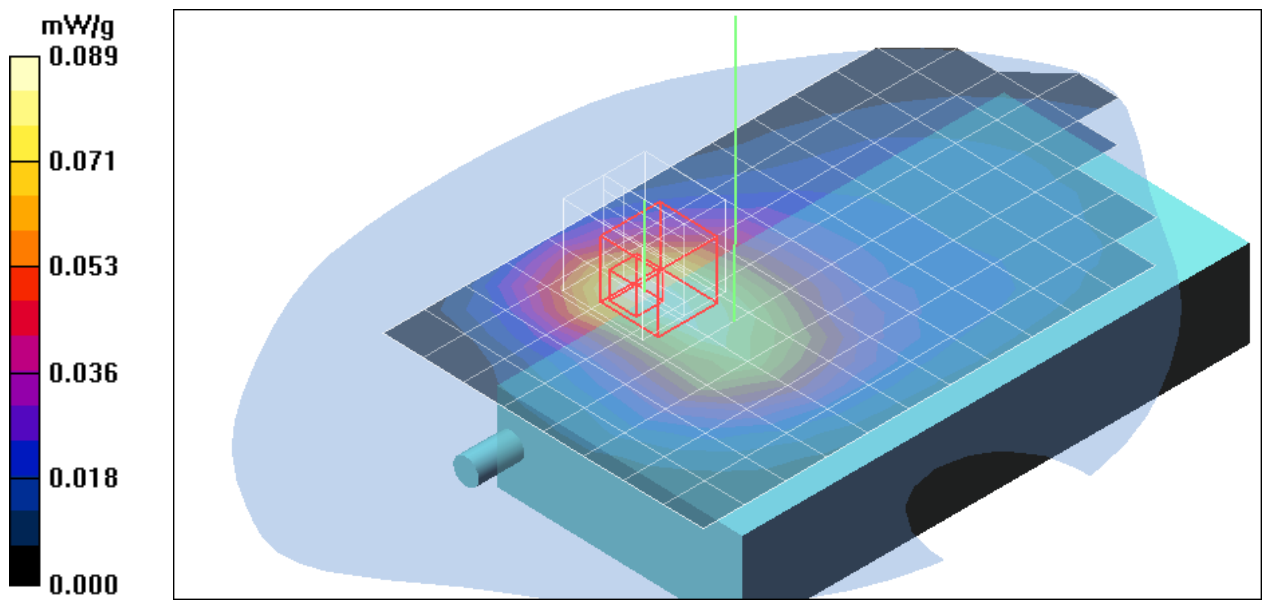

Test Laboratory: Compliance Certification Services Inc.

GSM 850-Body DA05I

DUT: DA05I; Type: Handheld Computer; Serial: N/A

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.932$ mho/m; $\epsilon_r = 55.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.3 deg C; Liquid Temperature: 23.3 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(10.96, 10.96, 10.96);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 8/23/2006
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

GSM Body Front Middle CH190/Area Scan (9x13x1): Measurement

grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.071 mW/g

GSM Body Front Middle CH190/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 8.28 V/m; Power Drift = -0.008 dB

Peak SAR (extrapolated) = 0.088 W/kg

SAR(1 g) = 0.062 mW/g; SAR(10 g) = 0.041 mW/g

Maximum value of SAR (measured) = 0.073 mW/g

