



FCC TEST REPORT (15.247)

REPORT NO.: RF130918C09-1
MODEL NO.: RF10
FCC ID: IR5RF10
RECEIVED: Sep. 18, 2013
TESTED: Oct. 03, 2013 ~ Oct. 23, 2013
ISSUED: Nov. 14, 2013

APPLICANT: MilDef Crete Inc.

ADDRESS: 7F, No. 250, Sec.3, Peishen Rd., Shenkeng District,
New Taipei City, Taiwan

ISSUED BY: Bureau Veritas Consumer Products Services
(H.K.) Ltd., Taoyuan Branch

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Vil., Lin Kou Dist.,
New Taipei City, Taiwan (R.O.C)

TEST LOCATION: No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei
Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

This report should not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.



TABLE OF CONTENTS

RELEASE CONTROL RECORD	5
1. CERTIFICATION.....	6
2. SUMMARY OF TEST RESULTS.....	7
2.1 MEASUREMENT UNCERTAINTY	7
3. GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES.....	9
3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL.....	10
3.3 DESCRIPTION OF SUPPORT UNITS	14
3.3.1 CONFIGURATION OF SYSTEM UNDER TEST	14
3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS.....	15
4. TEST TYPES AND RESULTS (FOR 2.4GHz BAND)	16
4.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT	16
4.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT	16
4.1.2 TEST INSTRUMENTS	17
4.1.3 TEST PROCEDURES.....	18
4.1.4 DEVIATION FROM TEST STANDARD	18
4.1.5 TEST SETUP	19
4.1.6 EUT OPERATING CONDITIONS.....	19
4.1.7 TEST RESULTS.....	20
4.2 CONDUCTED EMISSION MEASUREMENT	33
4.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT	33
4.2.2 TEST INSTRUMENTS	33
4.2.3 TEST PROCEDURES.....	34
4.2.4 DEVIATION FROM TEST STANDARD	34
4.2.5 TEST SETUP	35
4.2.6 EUT OPERATING CONDITIONS.....	35
4.2.7 TEST RESULTS.....	36
4.3 6dB BANDWIDTH MEASUREMENT.....	38
4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT	38
4.3.2 TEST SETUP	38
4.3.3 TEST INSTRUMENTS	38
4.3.4 TEST PROCEDURE	38
4.3.5 DEVIATION FROM TEST STANDARD	38
4.3.6 EUT OPERATING CONDITIONS.....	38
4.3.7 TEST RESULTS.....	39
4.4 CONDUCTED OUTPUT POWER	40
4.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT	40



4.4.2	TEST SETUP	40
4.4.3	TEST INSTRUMENTS	40
4.4.4	TEST PROCEDURES.....	40
4.4.5	DEVIATION FROM TEST STANDARD	40
4.4.6	EUT OPERATING CONDITIONS	40
4.4.7	TEST RESULTS.....	41
4.5	POWER SPECTRAL DENSITY MEASUREMENT	43
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	43
4.5.2	TEST SETUP	43
4.5.3	TEST INSTRUMENTS	43
4.5.4	TEST PROCEDURE	43
4.5.5	DEVIATION FROM TEST STANDARD	43
4.5.6	EUT OPERATING CONDITION	43
4.5.7	TEST RESULTS.....	44
4.6	CONDUCTED OUT OF BAND EMISSION MEASUREMENT	45
4.6.1	LIMITS OF CONDUCTED OUT OF BAND EMISSION MEASUREMENT	45
4.6.2	TEST SETUP	45
4.6.3	TEST INSTRUMENTS	45
4.6.4	TEST PROCEDURE	45
4.6.5	DEVIATION FROM TEST STANDARD	46
4.6.6	EUT OPERATING CONDITION	46
4.6.7	TEST RESULTS.....	46
5.	TEST TYPES AND RESULTS (FOR 5.0GHz BAND)	53
5.1	RADIATED EMISSION AND BANDEDGE MEASUREMENT	53
5.1.1	LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT	53
5.1.2	TEST INSTRUMENTS	54
5.1.3	TEST PROCEDURES.....	54
5.1.4	DEVIATION FROM TEST STANDARD	54
5.1.5	TEST SETUP	54
5.1.6	EUT OPERATING CONDITIONS	54
5.1.7	TEST RESULTS.....	55
5.2	CONDUCTED EMISSION MEASUREMENT	59
5.2.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	59
5.2.2	TEST INSTRUMENTS	59
5.2.3	TEST PROCEDURES.....	59
5.2.4	DEVIATION FROM TEST STANDARD	59
5.2.5	TEST SETUP	59
5.2.6	EUT OPERATING CONDITIONS	59
5.2.7	TEST RESULTS.....	60
5.3	6dB BANDWIDTH MEASUREMENT.....	62



A D T

5.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	62
5.3.2	TEST SETUP	62
5.3.3	TEST INSTRUMENTS	62
5.3.4	TEST PROCEDURE	62
5.3.5	DEVIATION FROM TEST STANDARD	62
5.3.6	EUT OPERATING CONDITIONS	62
5.3.7	TEST RESULTS.....	63
5.4	MAXIMUM OUTPUT POWER.....	64
5.4.1	LIMITS OF MAXIMUM OUTPUT POWER MEASUREMENT	64
5.4.2	TEST SETUP	64
5.4.3	INSTRUMENTS	64
5.4.4	TEST PROCEDURES.....	64
5.4.5	DEVIATION FROM TEST STANDARD	64
5.4.6	EUT OPERATING CONDITIONS	64
5.4.7	TEST RESULTS.....	65
5.5	POWER SPECTRAL DENSITY MEASUREMENT	66
5.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	66
5.5.2	TEST SETUP	66
5.5.3	TEST INSTRUMENTS	66
5.5.4	TEST PROCEDURE	66
5.5.5	DEVIATION FROM TEST STANDARD	66
5.5.6	EUT OPERATING CONDITION	66
5.5.7	TEST RESULTS.....	66
5.6	CONDUCTED OUT OF BAND EMISSION MEASUREMENT	67
5.6.1	LIMITS OF OUT OF BAND EMISSION MEASUREMENT	67
5.6.2	TEST SETUP	67
5.6.3	TEST INSTRUMENTS	67
5.6.4	TEST PROCEDURE	67
5.6.5	DEVIATION FROM TEST STANDARD	67
5.6.6	EUT OPERATING CONDITION	67
5.6.7	TEST RESULTS.....	67
6.	PHOTOGRAPHS OF THE TEST CONFIGURATION	69
7.	INFORMATION ON THE TESTING LABORATORIES	70
8.	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....	71



A D T

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF130918C09-1	Original release	Nov. 14, 2013



A D T

1. CERTIFICATION

PRODUCT: Notebook computer
MODEL NO.: RF10
BRAND: MilDef Crete Inc.
APPLICANT: MilDef Crete Inc.
TESTED: Oct. 03, 2013 ~ Oct. 23, 2013
TEST SAMPLE: Production Unit
STANDARDS: **FCC Part 15, Subpart C (Section 15.247)**
ANSI C63.10-2009

The above equipment (model: RF10) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Vera Huang , **DATE** : Nov. 14, 2013
Vera Huang / Specialist

APPROVED BY : Sam chen , **DATE** : Nov. 14, 2013
Sam Chen / Assistant Manager



2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)			
STANDARD SECTION	TEST TYPE	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -12.67dB at 0.53281MHz.
15.247(d) 15.209	Radiated Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -1.01dB at 4874MHz.
15.247(d)	Band Edge Measurement	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	No antenna connector is used.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	2.93 dB
	200MHz ~1000MHz	2.95 dB
	1GHz ~ 18GHz	2.26 dB
	18GHz ~ 40GHz	1.94 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

EUT	Notebook computer
MODEL NO.	RF10
POWER SUPPLY	19Vdc (adapter or host equipment)
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: 11.0/ 5.5/ 2.0/ 1.0Mbps 802.11g: 54.0/ 48.0/ 36.0/ 24.0/ 18.0/ 12.0/ 9.0/ 6.0Mbps 802.11a: 54.0/ 48.0/ 36.0/ 24.0/ 18.0/ 12.0/ 9.0/ 6.0Mbps 802.11n: up to MCS7
OPERATING FREQUENCY	2.4GHz: 2412 ~ 2462MHz 5.0GHz: 5745 ~ 5805MHz
NUMBER OF CHANNEL	2.4GHz: 11 for 802.11b, 802.11g, 802.11n (20MHz) 7 for 802.11n (40MHz) 5.0GHz: 4 for 802.11a
OUTPUT POWER	208.930mW for 2412 ~ 2462MHz 128.529mW for 5745 ~ 5805MHz
ANTENNA TYPE	2.4GHz: PIFA antenna with -1.12dBi gain 5.0GHz: PIFA antenna with 4.46dBi gain
ANTENNA CONNECTOR	NA
DATA CABLE	Refer to Note as below
I/O PORTS	Refer to user's manual
ACCESSORY DEVICES	Refer to Note as below

NOTE:

1. The EUT has following accessories.

ITEM	BRAND	MODEL	DESCRIPTION
AC Adapter	ADAPTER TECH.	STD-19047	I/P: 100-240Vac, 47-63Hz, 1.2A O/P: 19Vdc, 4.74A

2. The above EUT information is declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

FOR 2.4GHz:

11 channels are provided for 802.11b, 802.11g and 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

7 channels are provided for 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		

FOR 5.0GHz (5745 ~ 5805MHz):

4 channels are provided for 802.11a

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
149	5745MHz	157	5785MHz
153	5765MHz	161	5805MHz



3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

FOR 2.4GHz:

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE \geq 1G	RE $<$ 1G	PLC	APCM	
-	√	√	√	√	-

Where **RE \geq 1G**: Radiated Emission above 1GHz **RE $<$ 1G**: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission **APCM**: Antenna Port Conducted Measurement

RADIATED EMISSION TEST (ABOVE 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	MCS0
802.11n (40MHz)	3 to 9	3, 6, 9	OFDM	BPSK	MCS0

RADIATED EMISSION TEST (BELOW 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11g	1 to 11	6	OFDM	BPSK	6.0

POWER LINE CONDUCTED EMISSION TEST:

The EUT was tested with the following mode.

TEST CONDITION
BT Link + WLAN (2.4G) Link + Adapter + Mouse



BANDEDGE MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 11	DSSS	DBPSK	1.0
802.11g	1 to 11	1, 11	OFDM	BPSK	6.0
802.11n (20MHz)	1 to 11	1, 11	OFDM	BPSK	MCS0
802.11n (40MHz)	3 to 9	3, 9	OFDM	BPSK	MCS0

ANTENNA PORT CONDUCTED MEASUREMENT:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	MCS0
802.11n (40MHz)	3 to 9	3, 6, 9	OFDM	BPSK	MCS0

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE≥1G	25deg. C, 65%RH	120Vac, 60Hz	David Huang
RE<1G	25deg. C, 65%RH	120Vac, 60Hz	David Huang
PLC	25deg. C, 65%RH	120Vac, 60Hz	Johnson Liao
APCM	25deg. C, 65%RH	120Vac, 60Hz	Howard Kao



A D T

FOR 5.0GHz (5745 ~ 5805MHz):

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE≥1G	RE<1G	PLC	APCM	
-	√	√	√	√	-

Where RE≥1G: Radiated Emission above 1GHz RE<1G: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission APCM: Antenna Port Conducted Measurement

RADIATED EMISSION TEST (ABOVE 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11a	149 to 161	149, 157, 161	OFDM	BPSK	6.0

RADIATED EMISSION TEST (BELOW 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11a	149 to 161	149	OFDM	BPSK	6.0

POWER LINE CONDUCTED EMISSION TEST:

The EUT was tested with the following mode.

TEST CONDITION
BT Link + WLAN (5G) Link + Adapter + Mouse



BANDEDGE MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11a	149 to 161	149, 161	OFDM	BPSK	6.0

ANTENNA PORT CONDUCTED MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11a	149 to 161	149, 157, 161	OFDM	BPSK	6.0

TEST CONDITION:


APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE≥1G	25deg. C, 65%RH	120Vac, 60Hz	David Huang
RE<1G	25deg. C, 65%RH	120Vac, 60Hz	David Huang
PLC	25deg. C, 65%RH	120Vac, 60Hz	Johnson Liao
APCM	25deg. C, 65%RH	120Vac, 60Hz	Howard Kao

3.3 DESCRIPTION OF SUPPORT UNITS


The EUT has been tested as an independent unit together with other necessary accessories or support units.

3.3.1 CONFIGURATION OF SYSTEM UNDER TEST

Radiated Emission Test

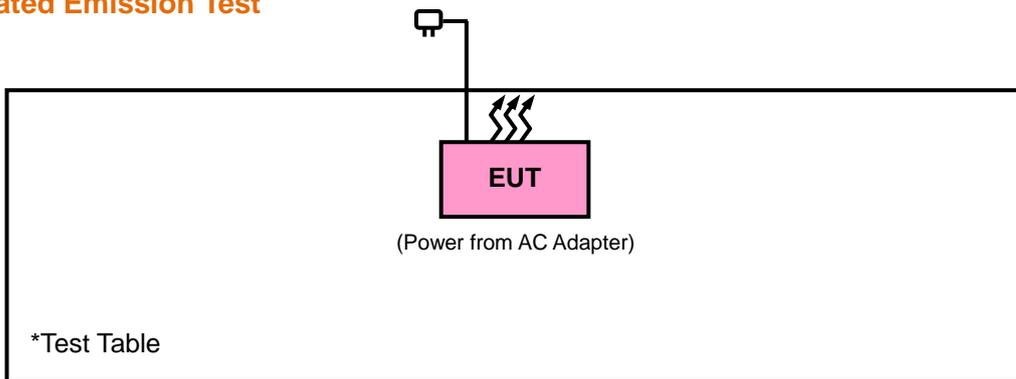

Conducted Emission Test

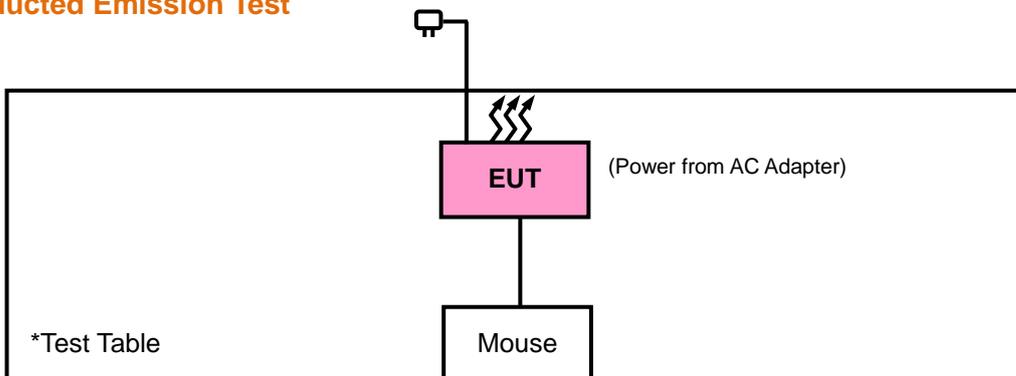

3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)

558074 D01 DTS Meas Guidance v03r01

662911 D01 Multiple Transmitter Output v02

ANSI C63.10-2009

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

4. TEST TYPES AND RESULTS (FOR 2.4GHz BAND)

4.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT

4.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



A D T

4.1.2 TEST INSTRUMENTS

Test Date: Oct. 03, 2013 ~ Oct. 04, 2013

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESCI	100744	Apr. 15, 2013	Apr. 14, 2014
Spectrum Analyzer ROHDE & SCHWARZ	FSU43	101261	Dec. 17, 2012	Dec. 16, 2013
BILOG Antenna SCHWARZBECK	VULB9168	9168-472	Mar. 25, 2013	Mar. 24, 2014
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-969	Jan. 07, 2013	Jan. 06, 2014
HORN Antenna SCHWARZBECK	BBHA 9170	9170-480	Dec. 25, 2012	Dec. 24, 2013
Loop Antenna	HFH2-Z2	100070	Jan. 31, 2012	Jan. 30, 2014
Preamplifier EMCI	EMC 012645	980115	Dec. 28, 2012	Dec. 27, 2013
Preamplifier EMCI	EMC 184045	980116	Dec. 28, 2012	Dec. 27, 2013
Preamplifier EMCI	EMC 330H	980112	Dec. 28, 2012	Dec. 27, 2013
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	309219/4	Oct. 19, 2012	Oct. 18, 2013
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	250130/4	Oct. 19, 2012	Oct. 18, 2013
RF signal cable Worken	RG-213	NA	Dec. 29, 2012	Dec. 28, 2013
Software BV ADT	E3 6.120103	NA	NA	NA
Antenna Tower MF	MFA-440H	NA	NA	NA
Turn Table MF	MFT-201SS	NA	NA	NA
Antenna Tower & Turn Table Controller MF	MF-7802	NA	NA	NA
Power Meter	ML2495A	1012010	Jul. 31, 2013	Jul. 30, 2014
Power Sensor	MA2411B	1315050	Jul. 31, 2013	Jul. 30, 2014

- NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The calibration interval of the loop antenna is 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
3. The test was performed in HwaYa Chamber 10.
4. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
5. The FCC Site Registration No. is 690701.
6. The IC Site Registration No. is IC 7450F-10.

4.1.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Height of receiving antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation.

4.1.5 TEST SETUP

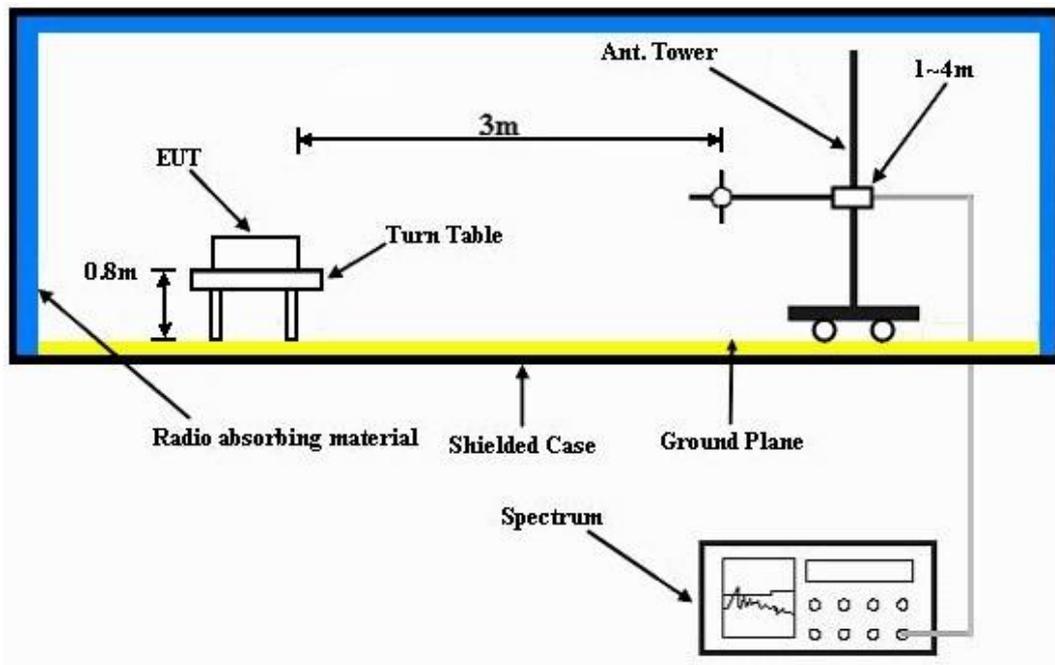

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT OPERATING CONDITIONS

- a. Placed the EUT on a testing table.
- b. Use the software to control the EUT under transmission condition continuously at specific channel frequency.



A D T

4.1.7 TEST RESULTS

ABOVE 1GHz WORST-CASE DATA

802.11b

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1GHz ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	David Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2382	33.33	40.45	54	-20.67	26.86	3.52	37.5	119	72	Average
2382	53.7	60.82	74	-20.3	26.86	3.52	37.5	119	72	Peak
2412	97.15	104.17			26.96	3.54	37.52	119	72	Average
2412	101.73	108.75			26.96	3.54	37.52	119	72	Peak
2490	33.69	40.19	54	-20.31	27.2	3.62	37.32	119	72	Average
2490	50.16	56.66	74	-23.84	27.2	3.62	37.32	119	72	Peak
4824	52.67	68.99	54	-1.33	30.99	5.77	53.08	106	10	Average
4824	54.62	70.94	74	-19.38	30.99	5.77	53.08	106	10	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2336	32.86	40.08	54	-21.14	26.77	3.48	37.47	145	106	Average
2336	50.7	57.92	74	-23.3	26.77	3.48	37.47	145	106	Peak
2412	91.63	98.65			26.96	3.54	37.52	145	106	Average
2412	96.44	103.46			26.96	3.54	37.52	145	106	Peak
2500	33.49	39.92	54	-20.51	27.2	3.62	37.25	145	106	Average
2500	51.4	57.83	74	-22.6	27.2	3.62	37.25	145	106	Peak
4824	52.8	69.12	54	-1.2	30.99	5.77	53.08	112	334	Average
4824	54.12	70.44	74	-19.88	30.99	5.77	53.08	112	334	Peak

REMARKS:

- Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor
Margin Value = Emission Level - Limit Value
- 2412MHz: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1GHz ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	David Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2388	33.84	40.89	54	-20.16	26.91	3.54	37.5	118	72	Average
2388	54.59	61.64	74	-19.41	26.91	3.54	37.5	118	72	Peak
2437	100.94	107.78			27.06	3.56	37.46	118	72	Average
2437	105.04	111.88			27.06	3.56	37.46	118	72	Peak
2490	34.23	40.73	54	-19.77	27.2	3.62	37.32	118	72	Average
2490	52	58.5	74	-22	27.2	3.62	37.32	118	72	Peak
4874	52.99	69.18	54	-1.01	31.06	5.8	53.05	100	71	Average
4874	54.34	70.53	74	-19.66	31.06	5.8	53.05	100	71	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2382	33.13	40.25	54	-20.87	26.86	3.52	37.5	142	107	Average
2382	51.17	58.29	74	-22.83	26.86	3.52	37.5	142	107	Peak
2437	97.01	103.85			27.06	3.56	37.46	142	107	Average
2437	101.48	108.32			27.06	3.56	37.46	142	107	Peak
2484	33.7	40.27	54	-20.3	27.15	3.6	37.32	142	107	Average
2484	50.81	57.38	74	-23.19	27.15	3.6	37.32	142	107	Peak
4874	52.95	69.14	54	-1.05	31.06	5.8	53.05	100	23	Average
4874	56.08	72.27	74	-17.92	31.06	5.8	53.05	100	23	Peak

REMARKS:

- Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor
Margin Value = Emission Level - Limit Value
- 2437MHz: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1GHz ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	David Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	33.89	40.96	54	-20.11	26.91	3.54	37.52	118	68	Average
2390	50.48	57.55	74	-23.52	26.91	3.54	37.52	118	68	Peak
2462	99.56	106.27			27.1	3.58	37.39	118	68	Average
2462	104.5	111.21			27.1	3.58	37.39	118	68	Peak
2484	38.76	45.33	54	-15.24	27.15	3.6	37.32	118	68	Average
2484	56.27	62.84	74	-17.73	27.15	3.6	37.32	118	68	Peak
4924	49.22	65.3	54	-4.78	31.12	5.83	53.03	102	58	Average
4924	51.32	67.4	74	-22.68	31.12	5.83	53.03	102	58	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2358	33.05	40.23	54	-20.95	26.81	3.5	37.49	142	106	Average
2358	50.38	57.56	74	-23.62	26.81	3.5	37.49	142	106	Peak
2462	95.21	101.92			27.1	3.58	37.39	142	106	Average
2462	100.13	106.84			27.1	3.58	37.39	142	106	Peak
2484	36.39	42.96	54	-17.61	27.15	3.6	37.32	142	106	Average
2484	53.24	59.81	74	-20.76	27.15	3.6	37.32	142	106	Peak
4924	46.9	62.98	54	-7.1	31.12	5.83	53.03	108	331	Average
4924	49.75	65.83	74	-24.25	31.12	5.83	53.03	108	331	Peak

REMARKS:

- Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor
Margin Value = Emission Level - Limit Value
- 2462MHz: Fundamental frequency.



A D T

802.11g

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1GHz ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	David Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	52.75	59.82	54	-1.25	26.91	3.54	37.52	120	73	Average
2390	67.99	75.06	74	-6.01	26.91	3.54	37.52	120	73	Peak
2412	99.32	106.34			26.96	3.54	37.52	120	73	Average
2412	108.72	115.74			26.96	3.54	37.52	120	73	Peak
4824	42.11	58.43	54	-11.89	30.99	5.77	53.08	100	10	Average
4824	52.83	69.15	74	-21.17	30.99	5.77	53.08	100	10	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	45.59	52.66	54	-8.41	26.91	3.54	37.52	165	106	Average
2390	64.14	71.21	74	-9.86	26.91	3.54	37.52	165	106	Peak
2412	93.98	101			26.96	3.54	37.52	165	106	Average
2412	103.04	110.06			26.96	3.54	37.52	165	106	Peak
2484	34.27	40.84	54	-19.73	27.15	3.6	37.32	165	106	Average
2484	48.56	55.13	74	-25.44	27.15	3.6	37.32	165	106	Peak
4824	41.67	57.99	54	-12.33	30.99	5.77	53.08	100	329	Average
4824	53.35	69.67	74	-20.65	30.99	5.77	53.08	100	329	Peak

REMARKS:

- Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor
Margin Value = Emission Level - Limit Value
- 2412MHz: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1GHz ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	David Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2374	35	42.12	54	-19	26.86	3.52	37.5	117	72	Average
2374	52.75	59.87	74	-21.25	26.86	3.52	37.5	117	72	Peak
2437	98.44	105.28			27.06	3.56	37.46	117	72	Average
2437	107.96	114.8			27.06	3.56	37.46	117	72	Peak
2488	35.64	42.14	54	-18.36	27.2	3.62	37.32	117	72	Average
2488	51.17	57.67	74	-22.83	27.2	3.62	37.32	117	72	Peak
4874	40.58	56.77	54	-13.42	31.06	5.8	53.05	103	70	Average
4874	51.69	67.88	74	-22.31	31.06	5.8	53.05	103	70	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2384	34.08	41.2	54	-19.92	26.86	3.52	37.5	145	104	Average
2384	52.02	59.14	74	-21.98	26.86	3.52	37.5	145	104	Peak
2437	94.13	100.97			27.06	3.56	37.46	145	104	Average
2437	103.2	110.04			27.06	3.56	37.46	145	104	Peak
2494	34.64	41.07	54	-19.36	27.2	3.62	37.25	145	104	Average
2494	50.36	56.79	74	-23.64	27.2	3.62	37.25	145	104	Peak
4874	42.51	58.7	54	-11.49	31.06	5.8	53.05	100	216	Average
4874	52.77	68.96	74	-21.23	31.06	5.8	53.05	100	216	Peak

REMARKS:

- Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor
Margin Value = Emission Level - Limit Value
- 2437MHz: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1GHz ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	David Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	34.97	42.04	54	-19.03	26.91	3.54	37.52	117	70	Average
2390	48.64	55.71	74	-25.36	26.91	3.54	37.52	117	70	Peak
2462	96.82	103.53			27.1	3.58	37.39	117	70	Average
2462	106.44	113.15			27.1	3.58	37.39	117	70	Peak
2484	52.15	58.72	54	-1.85	27.15	3.6	37.32	117	70	Average
2484	66.22	72.79	74	-7.78	27.15	3.6	37.32	117	70	Peak
4924	37.22	53.3	54	-16.78	31.12	5.83	53.03	103	58	Average
4924	48.91	64.99	74	-25.09	31.12	5.83	53.03	103	58	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	34.03	41.1	54	-19.97	26.91	3.54	37.52	139	273	Average
2390	48.8	55.87	74	-25.2	26.91	3.54	37.52	139	273	Peak
2462	90.6	97.31			27.1	3.58	37.39	139	273	Average
2462	100.31	107.02			27.1	3.58	37.39	139	273	Peak
2484	44.32	50.89	54	-9.68	27.15	3.6	37.32	139	273	Average
2484	59.82	66.39	74	-14.18	27.15	3.6	37.32	139	273	Peak
4924	34.33	50.41	54	-19.67	31.12	5.83	53.03	101	72	Average
4924	46.2	62.28	74	-27.8	31.12	5.83	53.03	101	72	Peak

REMARKS:

- Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor
Margin Value = Emission Level - Limit Value
- 2462MHz: Fundamental frequency.



A D T

802.11n (20MHz)

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1GHz ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	David Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	52.16	59.23	54	-1.84	26.91	3.54	37.52	100	62	Average
2390	68.72	75.79	74	-5.28	26.91	3.54	37.52	100	62	Peak
2412	96.95	103.97			26.96	3.54	37.52	100	62	Average
2412	107.85	114.87			26.96	3.54	37.52	100	62	Peak
2484	34.37	40.94	54	-19.63	27.15	3.6	37.32	100	62	Average
2484	50.05	56.62	74	-23.95	27.15	3.6	37.32	100	62	Peak
4824	42.97	59.29	54	-11.03	30.99	5.77	53.08	106	9	Average
4824	54.91	71.23	74	-19.09	30.99	5.77	53.08	106	9	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	50.87	57.94	54	-3.13	26.91	3.54	37.52	146	86	Average
2390	68.07	75.14	74	-5.93	26.91	3.54	37.52	146	86	Peak
2412	95.13	102.15			26.96	3.54	37.52	146	86	Average
2412	105.65	112.67			26.96	3.54	37.52	146	86	Peak
2484	34.49	41.06	54	-19.51	27.15	3.6	37.32	146	86	Average
2484	49.87	56.44	74	-24.13	27.15	3.6	37.32	146	86	Peak
4824	38.37	54.69	54	-15.63	30.99	5.77	53.08	103	25	Average
4824	50	66.32	74	-24	30.99	5.77	53.08	103	25	Peak

REMARKS:

- Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor
Margin Value = Emission Level - Limit Value
- 2412MHz: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1GHz ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	David Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2382	35.17	42.29	54	-18.83	26.86	3.52	37.5	117	63	Average
2382	53.41	60.53	74	-20.59	26.86	3.52	37.5	117	63	Peak
2437	98.47	105.31			27.06	3.56	37.46	117	63	Average
2437	109.6	116.44			27.06	3.56	37.46	117	63	Peak
2484	35.53	42.1	54	-18.47	27.15	3.6	37.32	117	63	Average
2484	52.19	58.76	74	-21.81	27.15	3.6	37.32	117	63	Peak
4874	38.67	54.86	54	-15.33	31.06	5.8	53.05	102	71	Average
4874	50.74	66.93	74	-23.26	31.06	5.8	53.05	102	71	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	35.17	42.24	54	-18.83	26.91	3.54	37.52	102	88	Average
2390	49.84	56.91	74	-24.16	26.91	3.54	37.52	102	88	Peak
2437	96.72	103.56			27.06	3.56	37.46	102	88	Average
2437	106.56	113.4			27.06	3.56	37.46	102	88	Peak
2492	36.15	42.58	54	-17.85	27.2	3.62	37.25	102	88	Average
2492	51.42	57.85	74	-22.58	27.2	3.62	37.25	102	88	Peak
4874	39.87	56.06	54	-14.13	31.06	5.8	53.05	100	216	Average
4874	51.48	67.67	74	-22.52	31.06	5.8	53.05	100	216	Peak

REMARKS:

- Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor
Margin Value = Emission Level - Limit Value
- 2437MHz: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1GHz ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	David Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	33.77	40.84	54	-20.23	26.91	3.54	37.52	115	68	Average
2390	49.36	56.43	74	-24.64	26.91	3.54	37.52	115	68	Peak
2462	96.64	103.35			27.1	3.58	37.39	115	68	Average
2462	106.72	113.43			27.1	3.58	37.39	115	68	Peak
2484	51.69	58.26	54	-2.31	27.15	3.6	37.32	115	68	Average
2484	65.99	72.56	74	-8.01	27.15	3.6	37.32	115	68	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	34.07	41.14	54	-19.93	26.91	3.54	37.52	141	94	Average
2390	48.93	56	74	-25.07	26.91	3.54	37.52	141	94	Peak
2462	94.37	101.08			27.1	3.58	37.39	141	94	Average
2462	105.07	111.78			27.1	3.58	37.39	141	94	Peak
2484	49.7	56.27	54	-4.3	27.15	3.6	37.32	141	94	Average
2484	65.1	71.67	74	-8.9	27.15	3.6	37.32	141	94	Peak

REMARKS:

- Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor
Margin Value = Emission Level - Limit Value
- 2462MHz: Fundamental frequency.



A D T

802.11n (40MHz)

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 3	FREQUENCY RANGE	1GHz ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Kay Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2388	52.38	59.43	54	-1.62	26.91	3.54	37.5	117	64	Average
2388	70.75	77.8	74	-3.25	26.91	3.54	37.5	117	64	Peak
2422	90.94	97.83			27.01	3.56	37.46	117	64	Average
2422	102.29	109.18			27.01	3.56	37.46	117	64	Peak
2484	34.98	41.55	54	-19.02	27.15	3.6	37.32	117	64	Average
2484	50.21	56.78	74	-23.79	27.15	3.6	37.32	117	64	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	49.99	57.06	54	-4.01	26.91	3.54	37.52	146	97	Average
2390	71.21	78.28	74	-2.79	26.91	3.54	37.52	146	97	Peak
2422	88.61	95.5			27.01	3.56	37.46	146	97	Average
2422	100.22	107.11			27.01	3.56	37.46	146	97	Peak
2484	34.43	41	54	-19.57	27.15	3.6	37.32	146	97	Average
2484	49.68	56.25	74	-24.32	27.15	3.6	37.32	146	97	Peak

REMARKS:

- Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor
Margin Value = Emission Level - Limit Value
- 2422MHz: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1GHz ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Kay Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2384	40.64	47.76	54	-13.36	26.86	3.52	37.5	100	68	Average
2384	56.81	63.93	74	-17.19	26.86	3.52	37.5	100	68	Peak
2437	92.31	99.15			27.06	3.56	37.46	100	68	Average
2437	103.2	110.04			27.06	3.56	37.46	100	68	Peak
2484	40.42	46.99	54	-13.58	27.15	3.6	37.32	100	68	Average
2484	54.29	60.86	74	-19.71	27.15	3.6	37.32	100	68	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	39.12	46.19	54	-14.88	26.91	3.54	37.52	101	92	Average
2390	53.25	60.32	74	-20.75	26.91	3.54	37.52	101	92	Peak
2437	89.25	96.09			27.06	3.56	37.46	101	92	Average
2437	100.13	106.97			27.06	3.56	37.46	101	92	Peak
2484	41.94	48.51	54	-12.06	27.15	3.6	37.32	101	92	Average
2484	55.61	62.18	74	-18.39	27.15	3.6	37.32	101	92	Peak

REMARKS:

- Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor
Margin Value = Emission Level - Limit Value
- 2437MHz: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 9	FREQUENCY RANGE	1GHz ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Kay Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	34.07	41.14	54	-19.93	26.91	3.54	37.52	117	62	Average
2390	48.7	55.77	74	-25.3	26.91	3.54	37.52	117	62	Peak
2452	90.41	97.16			27.06	3.58	37.39	117	62	Average
2452	101.5	108.25			27.06	3.58	37.39	117	62	Peak
2484	52.61	59.18	54	-1.39	27.15	3.6	37.32	117	62	Average
2484	66.56	73.13	74	-7.44	27.15	3.6	37.32	117	62	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	34.14	41.21	54	-19.86	26.91	3.54	37.52	164	91	Average
2390	49.48	56.55	74	-24.52	26.91	3.54	37.52	164	91	Peak
2452	89.09	95.84			27.06	3.58	37.39	164	91	Average
2452	100.32	107.07			27.06	3.58	37.39	164	91	Peak
2484	49.86	56.43	54	-4.14	27.15	3.6	37.32	164	91	Average
2484	69.86	76.43	74	-4.14	27.15	3.6	37.32	164	91	Peak

REMARKS:

- Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor
Margin Value = Emission Level - Limit Value
- 2452MHz: Fundamental frequency.



A D T

BELOW 1GHz WORST-CASE DATA: 802.11g

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	30MHz ~ 1GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	David Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
45.12	33.63	50.55	40	-6.37	13.5	0.74	31.16	100	190	Peak
145.56	28.73	46.49	43.5	-14.77	12.54	1.32	31.62	100	177	Peak
265.71	34.23	52.36	46	-11.77	11.94	1.89	31.96	100	236	Peak
419.7	29.54	43.36	46	-16.46	15.73	2.5	32.05	100	154	Peak
671.7	35.18	43.19	46	-10.82	20.48	3.33	31.82	100	131	Peak
961.5	29.74	33.71	54	-24.26	23.85	4.1	31.92	100	194	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
45.66	33.92	50.84	40	-6.08	13.5	0.74	31.16	100	278	Peak
132.87	30.29	48.96	43.5	-13.21	11.88	1.26	31.81	100	110	Peak
240.06	20.9	39.83	46	-25.1	11.07	1.79	31.79	100	109	Peak
335.7	25.8	41.64	46	-20.2	13.8	2.18	31.82	100	126	Peak
635.3	29.48	38.36	46	-16.52	20.03	3.2	32.11	100	203	Peak
926.5	35.95	40.26	46	-10.05	23.66	4.02	31.99	100	166	Peak

REMARKS:

- Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor
Margin Value = Emission Level - Limit Value

4.2 CONDUCTED EMISSION MEASUREMENT

4.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:** 1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESCS30	100288	Nov. 09, 2012	Nov. 08, 2013
RF signal cable Woken	5D-FB	Cable-HYCO2-01	Dec. 28, 2012	Dec. 27, 2013
LISN ROHDE & SCHWARZ (EUT)	ESH2-Z5	100100	Dec. 21, 2012	Dec. 20, 2013
LISN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100312	Jul. 02, 2013	Jul. 01, 2014
Software ADT	BV ADT_Cond_ V7.3.7.3	NA	NA	NA

- NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Shielded Room 2.
 3. The VCCI Site Registration No. is C-2047.

4.2.3 TEST PROCEDURES


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: All modes of operation were investigated and the worst-case emissions are reported.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation.

4.2.5 TEST SETUP

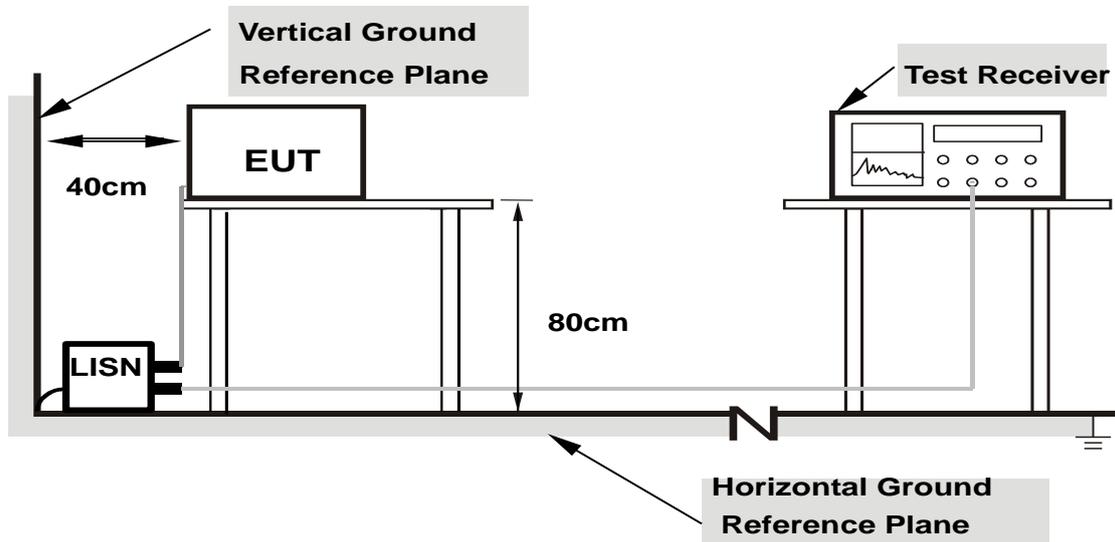

- Note:**
- 1.Support units were connected to second LISN.
 - 2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6.

4.2.7 TEST RESULTS


CONDUCTED WORST-CASE DATA :

PHASE	Line 1	6dB BANDWIDTH	9kHz
-------	--------	---------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.20469	0.17	28.99	20.45	29.16	20.62	63.42
2	0.52891	0.22	34.10	32.28	34.32	32.50	56.00	46.00	-21.68	-13.50
3	0.83750	0.25	29.16	23.85	29.41	24.10	56.00	46.00	-26.59	-21.90
4	2.18359	0.29	21.47	13.95	21.76	14.24	56.00	46.00	-34.24	-31.76
5	11.28125	0.46	34.68	26.27	35.14	26.73	60.00	50.00	-24.86	-23.27
6	18.80469	0.61	36.54	28.89	37.15	29.50	60.00	50.00	-22.85	-20.50

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

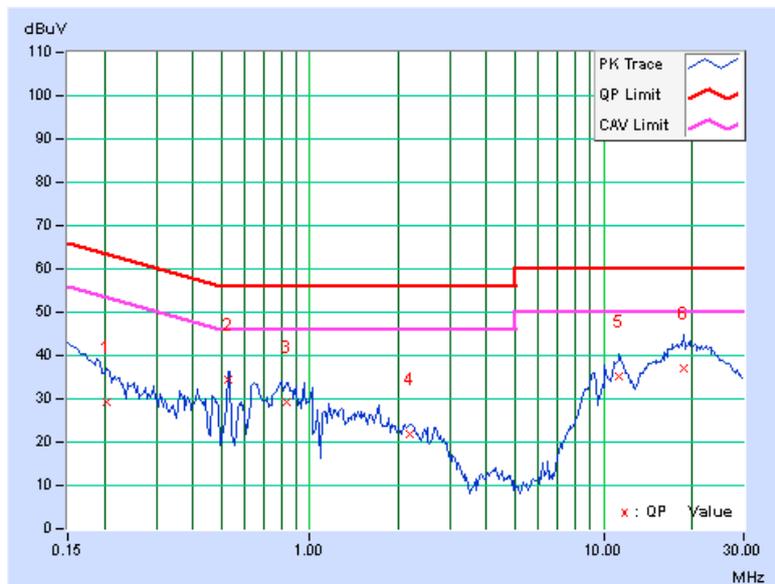


PHASE	Line 2	6dB BANDWIDTH	9kHz
-------	--------	---------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.24375	0.20	26.78	21.69	26.98	21.89	61.97
2	0.52891	0.25	31.22	29.61	31.47	29.86	56.00	46.00	-24.53	-16.14
3	0.84922	0.24	24.04	18.04	24.28	18.28	56.00	46.00	-31.72	-27.72
4	5.30078	0.41	17.25	8.55	17.66	8.96	60.00	50.00	-42.34	-41.04
5	11.12891	0.51	34.15	28.01	34.66	28.52	60.00	50.00	-25.34	-21.48
6	20.16797	0.73	35.67	28.54	36.40	29.27	60.00	50.00	-23.60	-20.73

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

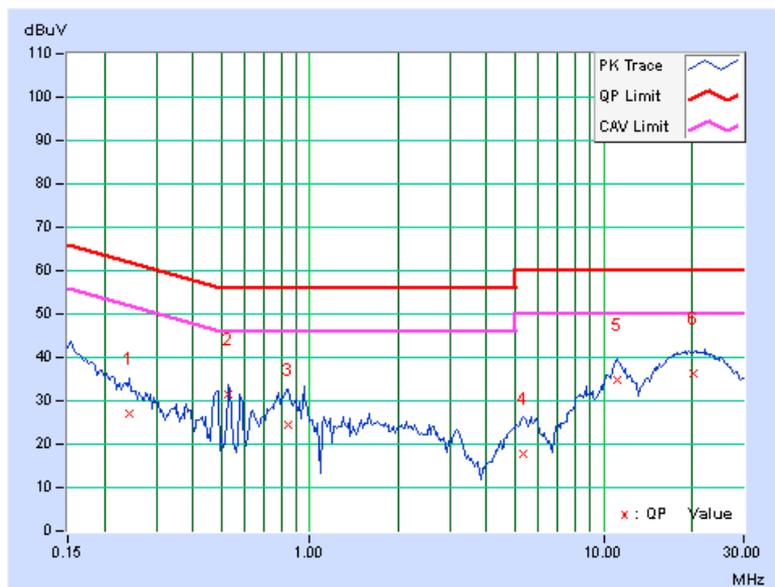


4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST SETUP

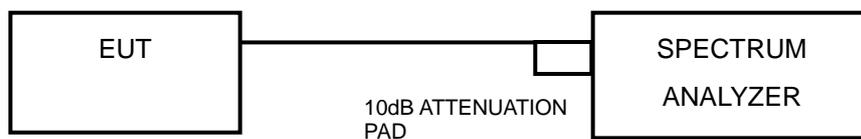

4.3.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

4.3.4 TEST PROCEDURE

- a. Set resolution bandwidth (RBW) = approximately 1% of the emission bandwidth
- b. Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- c. Trace mode = max hold.
- d. Sweep = auto couple.
- e. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.5 DEVIATION FROM TEST STANDARD

No deviation.

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



4.3.7 TEST RESULTS

802.11b

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	10.11	0.5	PASS
6	2437	10.14	0.5	PASS
11	2462	10.15	0.5	PASS

802.11g

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	15.10	0.5	PASS
6	2437	15.10	0.5	PASS
11	2462	12.71	0.5	PASS

802.11n (20MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
1	2412	15.09	15.11	0.5	PASS
6	2437	15.15	15.12	0.5	PASS
11	2462	15.16	15.13	0.5	PASS

802.11n (40MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
3	2422	36.02	35.29	0.5	PASS
6	2437	36.08	35.68	0.5	PASS
9	2452	35.70	36.05	0.5	PASS

4.4 CONDUCTED OUTPUT POWER

4.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

4.4.2 TEST SETUP



4.4.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

4.4.4 TEST PROCEDURES

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the peak power level.

4.4.5 DEVIATION FROM TEST STANDARD

No deviation.

4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6.

4.4.7 TEST RESULTS

FOR PEAK POWER

802.11b

CHANNEL	FREQUENCY (MHz)	PEAK POWER (mW)	PEAK POWER (dBm)	LIMIT (dBm)	PASS/FAIL
1	2412	24.155	13.83	30	PASS
6	2437	68.865	18.38	30	PASS
11	2462	74.817	18.74	30	PASS

802.11g

CHANNEL	FREQUENCY (MHz)	PEAK POWER (mW)	PEAK POWER (dBm)	LIMIT (dBm)	PASS/FAIL
1	2412	143.549	21.57	30	PASS
6	2437	149.968	21.76	30	PASS
11	2462	135.519	21.32	30	PASS

802.11n (20MHz)

CHAN.	CHAN. FREQ. (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
1	2412	20.47	19.89	208.930	23.20	30	PASS
6	2437	20.28	19.94	205.116	23.12	30	PASS
11	2462	19.88	19.69	190.546	22.80	30	PASS

802.11n (40MHz)

CHAN.	CHAN. FREQ. (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
3	2422	19.37	18.86	163.305	22.13	30	PASS
6	2437	19.25	18.91	161.808	22.09	30	PASS
9	2452	18.47	18.71	144.544	21.60	30	PASS

**FOR AVERAGE POWER****802.11b**

CHANNEL	FREQUENCY (MHz)	AVG. POWER (mW)	AVG. POWER (dBm)
1	2412	11.482	10.60
6	2437	35.563	15.51
11	2462	37.931	15.79

802.11g

CHANNEL	FREQUENCY (MHz)	AVG. POWER (mW)	AVG. POWER (dBm)
1	2412	25.293	14.03
6	2437	24.547	13.90
11	2462	20.137	13.04

802.11n (20MHz)

CHAN.	CHAN. FREQ. (MHz)	AVG. POWER (mW)		TOTAL POWER (mW)	TOTAL POWER (dBm)
		CHAIN 0	CHAIN 1		
1	2412	12.58	12.74	36.898	15.67
6	2437	12.41	12.21	34.041	15.32
11	2462	11.13	10.82	25.061	13.99

802.11n (40MHz)


CHAN.	CHAN. FREQ. (MHz)	AVG. POWER (mW)		TOTAL POWER (mW)	TOTAL POWER (dBm)
		CHAIN 0	CHAIN 1		
3	2422	11.39	10.94	26.182	14.18
6	2437	11.15	10.95	25.468	14.06
9	2452	9.46	9.51	17.783	12.50

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST SETUP

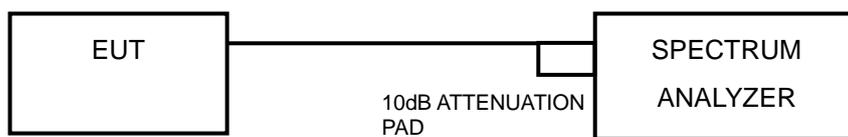

4.5.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

4.5.4 TEST PROCEDURE

- Set the RBW = 3 kHz, VBW = 10 kHz, Detector = peak.
- Sweep time = auto couple, Trace mode = max hold, allow trace to fully stabilize.
- Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

4.5.5 DEVIATION FROM TEST STANDARD

No deviation.

4.5.6 EUT OPERATING CONDITION

Same as Item 4.3.6

4.5.7 TEST RESULTS

802.11b

Channel	FREQ. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
1	2412	-13.35	8	PASS
6	2437	-8.22	8	PASS
11	2462	-7.69	8	PASS

802.11g

Channel	FREQ. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
1	2412	-11.76	8	PASS
6	2437	-11.51	8	PASS
11	2462	-13.02	8	PASS

802.11n (20MHz)

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	1	2412	-13.01	3.01	-10.00	8	PASS
	6	2437	-13.94	3.01	-10.93	8	PASS
	11	2462	-13.43	3.01	-10.42	8	PASS
1	1	2412	-12.25	3.01	-9.24	8	PASS
	6	2437	-13.27	3.01	-10.26	8	PASS
	11	2462	-15.41	3.01	-12.40	8	PASS

NOTE: Directional gain = $-1.12\text{dBi} + 10\log(2) = 1.89\text{dBi} < 6\text{dBi}$, so the limit no need to reduced.

802.11n (40MHz)

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	3	2422	-17.53	3.01	-14.52	8	PASS
	6	2437	-16.43	3.01	-13.42	8	PASS
	9	2452	-18.37	3.01	-15.36	8	PASS
1	3	2422	-17.41	3.01	-14.40	8	PASS
	6	2437	-17.07	3.01	-14.06	8	PASS
	9	2452	-17.64	3.01	-14.63	8	PASS


NOTE: Directional gain = $-1.12\text{dBi} + 10\log(2) = 1.89\text{dBi} < 6\text{dBi}$, so the limit no need to reduced.

4.6 CONDUCTED OUT OF BAND EMISSION MEASUREMENT

4.6.1 LIMITS OF CONDUCTED OUT OF BAND EMISSION MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST SETUP

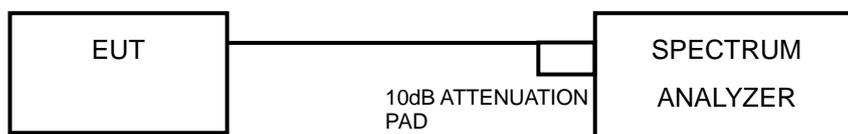

4.6.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

4.6.4 TEST PROCEDURE

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Set span to encompass the spectrum to be examined.
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.

4.6.5 DEVIATION FROM TEST STANDARD

No deviation.

4.6.6 EUT OPERATING CONDITION

Same as Item 4.3.6

4.6.7 TEST RESULTS


The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.




A D T

802.11b


CH 1

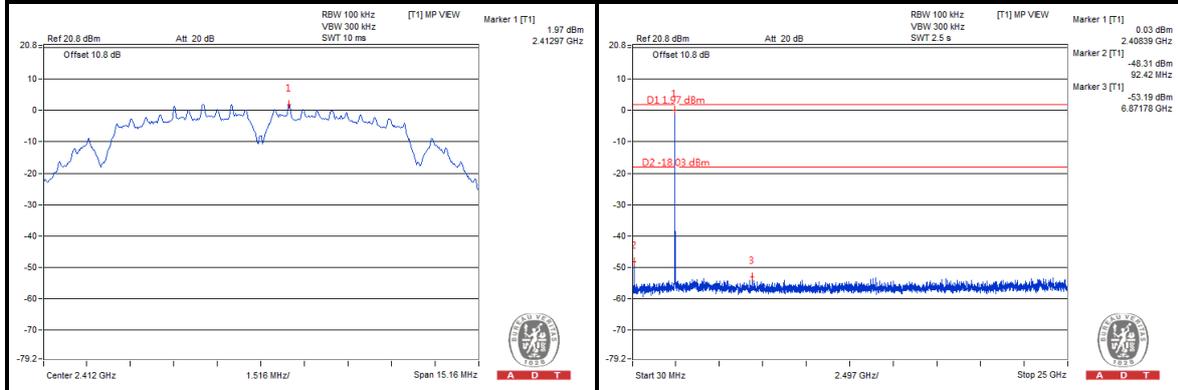

CH 6

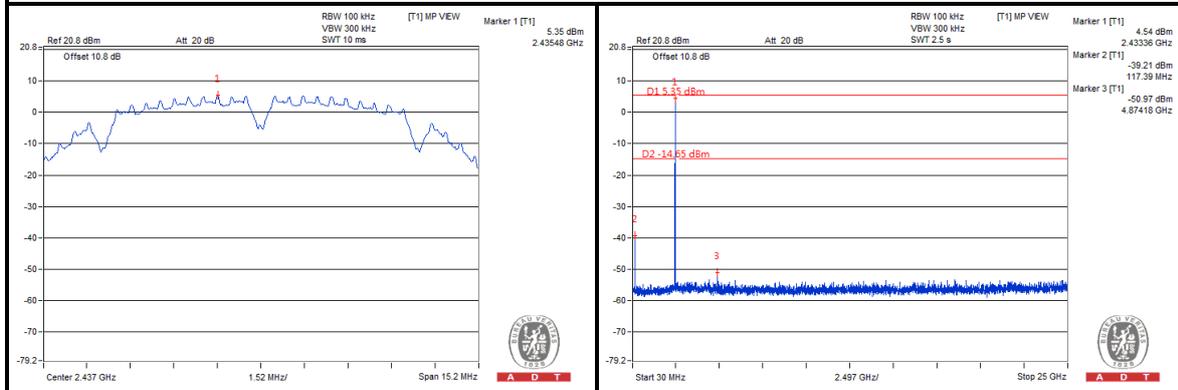

CH 11

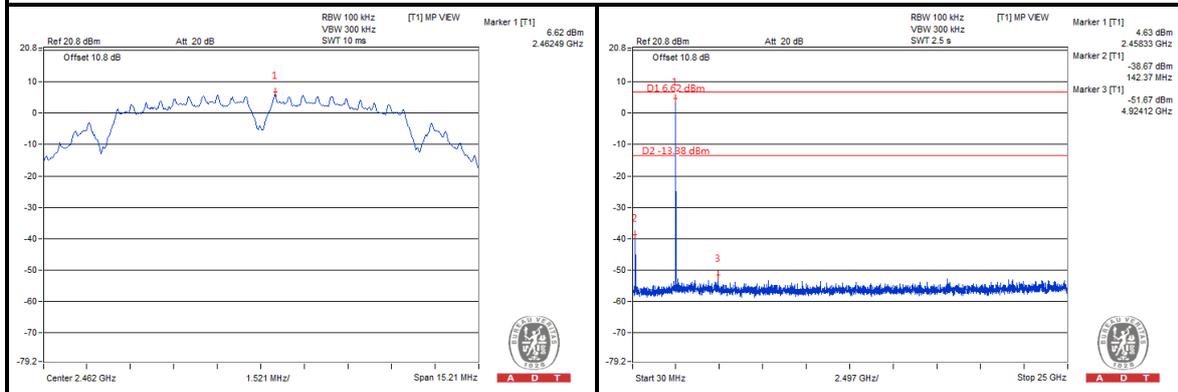





A D T

802.11g


CH 1

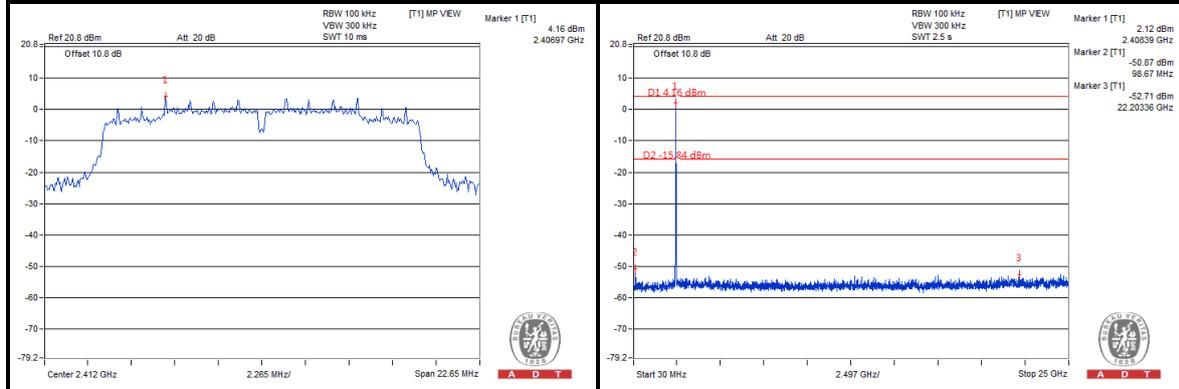

CH 6

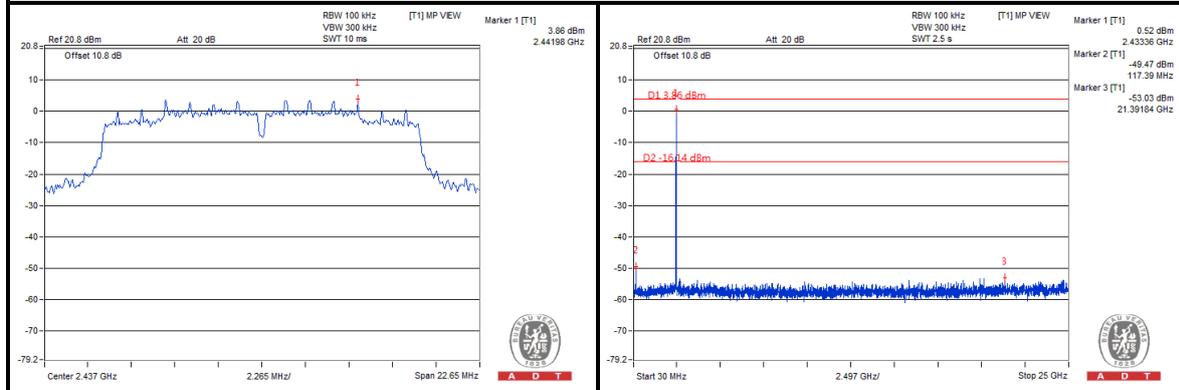

CH 11


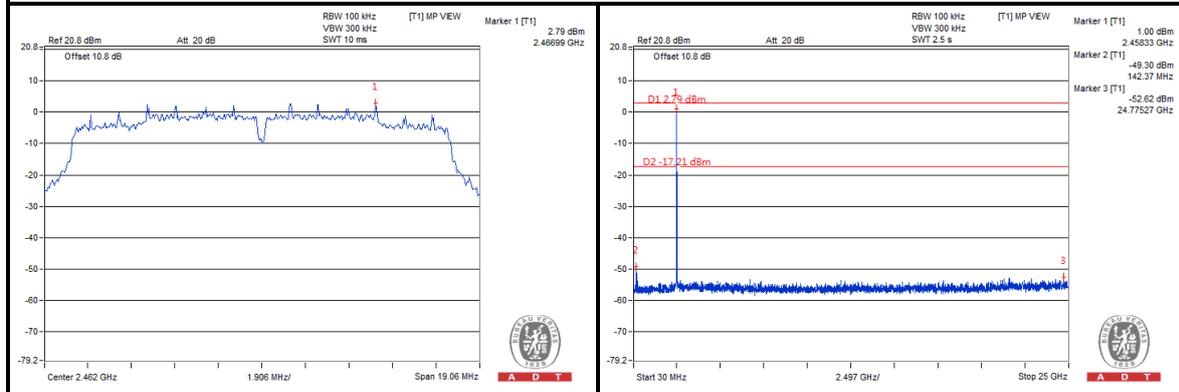






A D T

802.11n (20MHz) CHAIN 0



CH 1

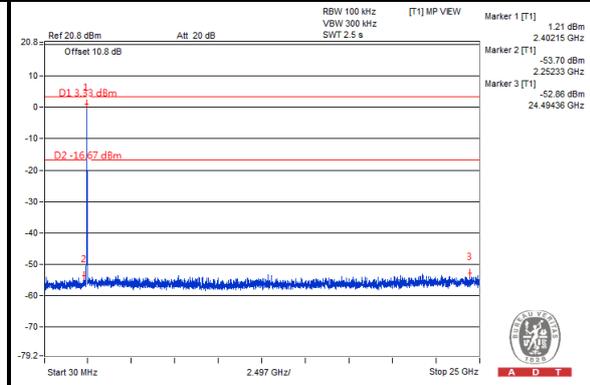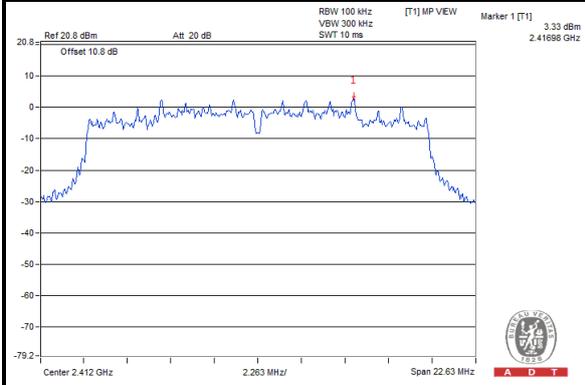

CH 6

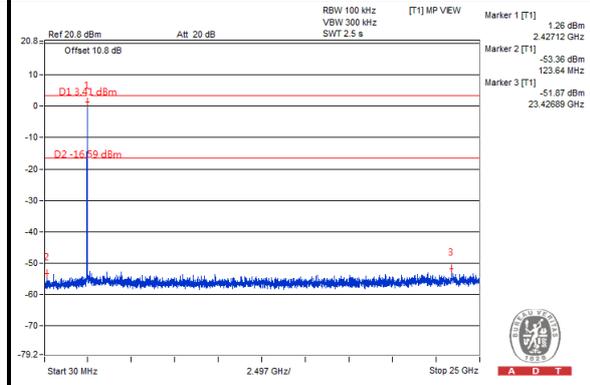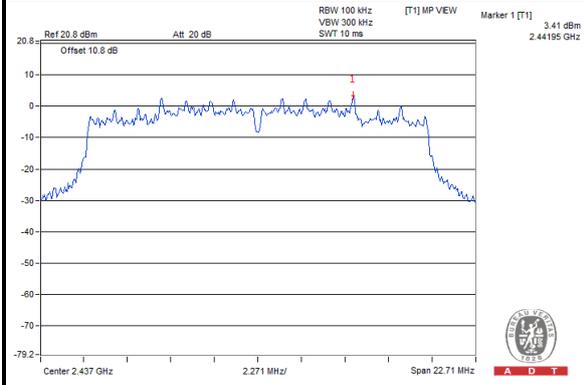

CH 11

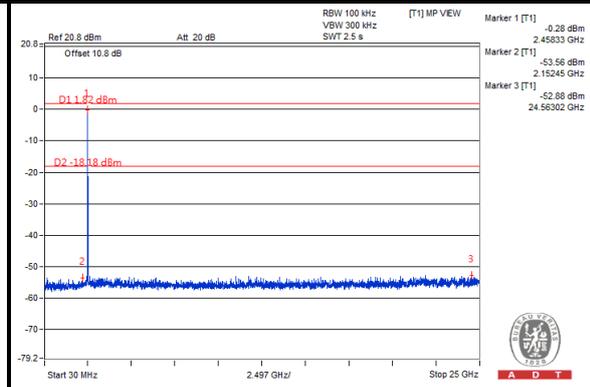
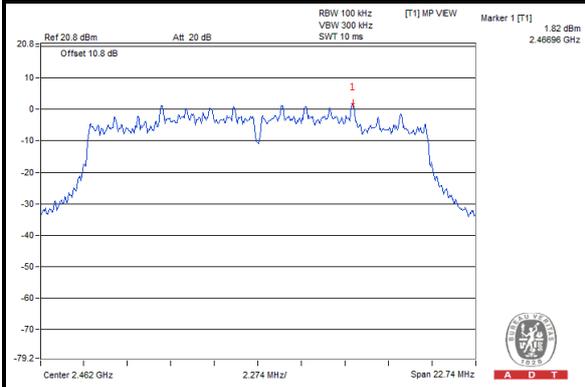






A D T

802.11n (20MHz) CHAIN 1



CH 1

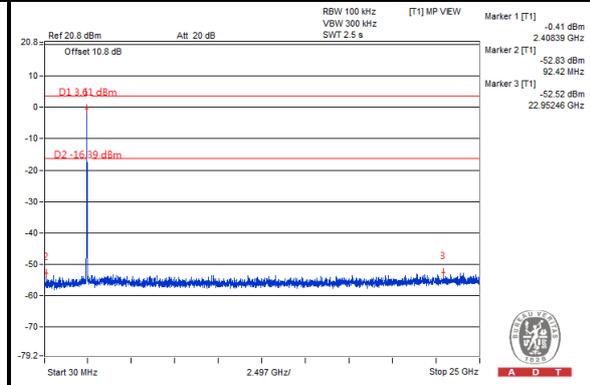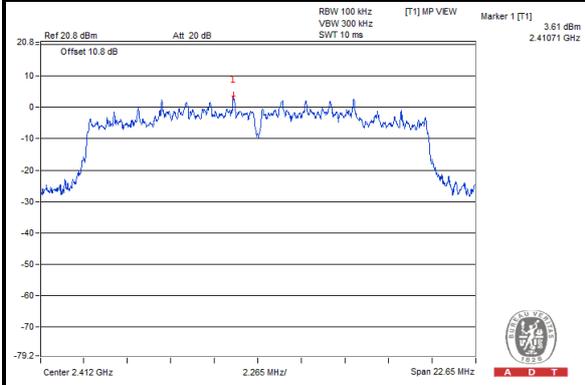

CH 6

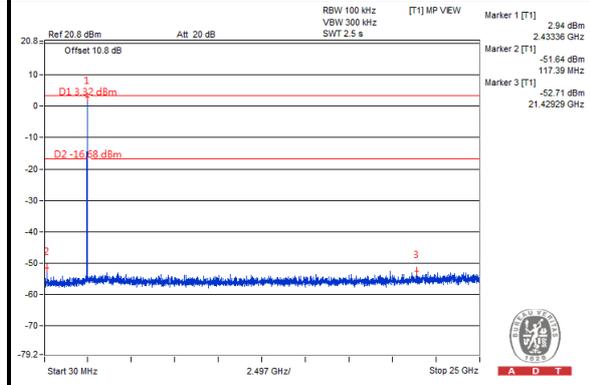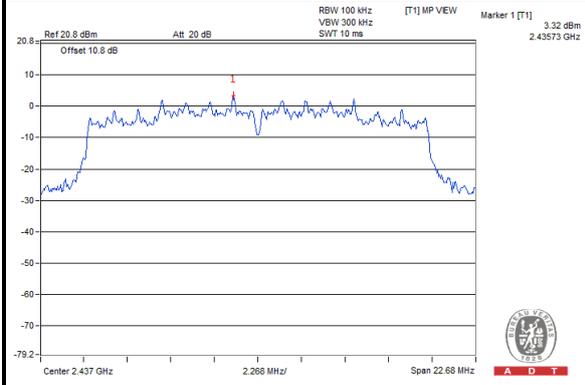

CH 11

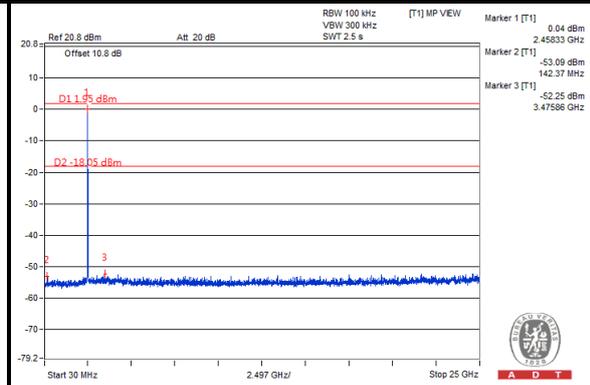
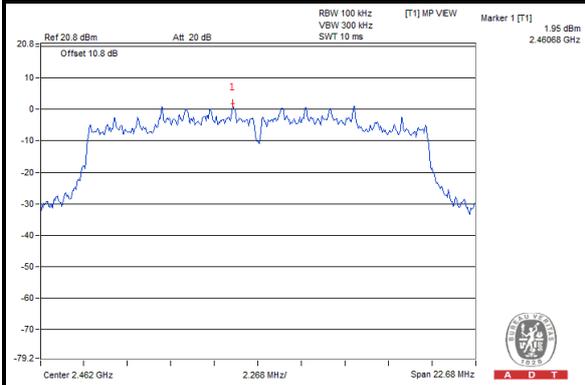






A D T

802.11n (40MHz) CHAIN 0



CH 3

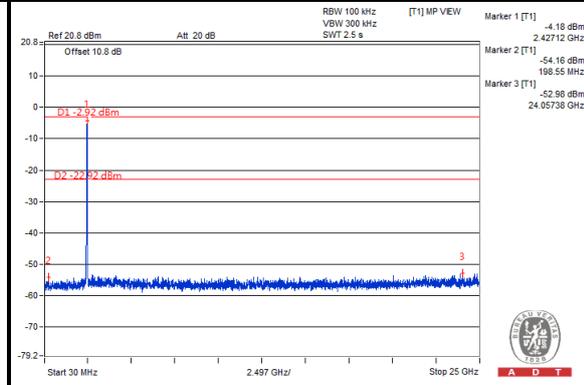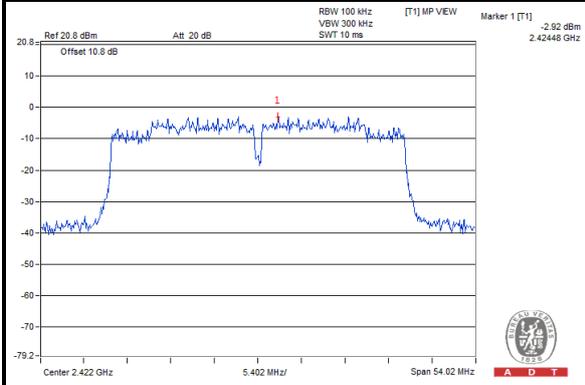

CH 6

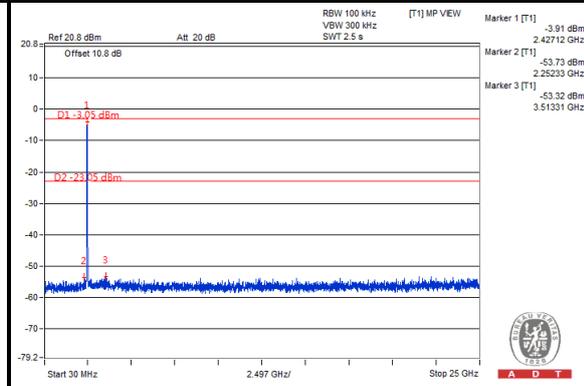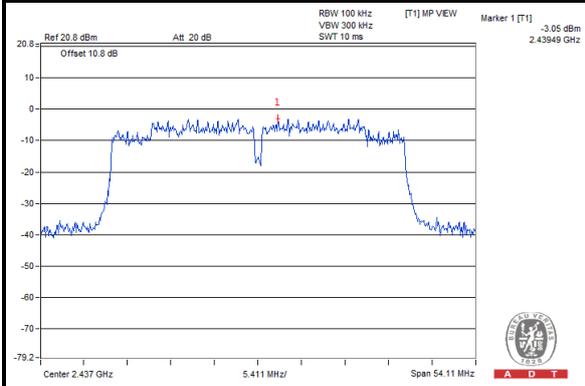

CH 9

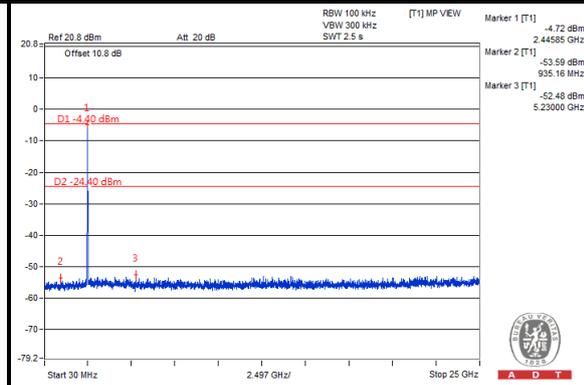
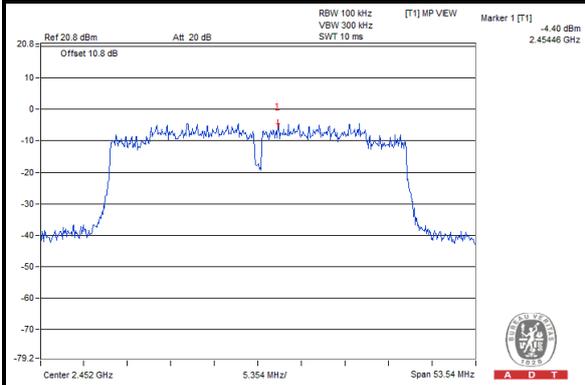






A D T

802.11n (40MHz) CHAIN 1



CH 3

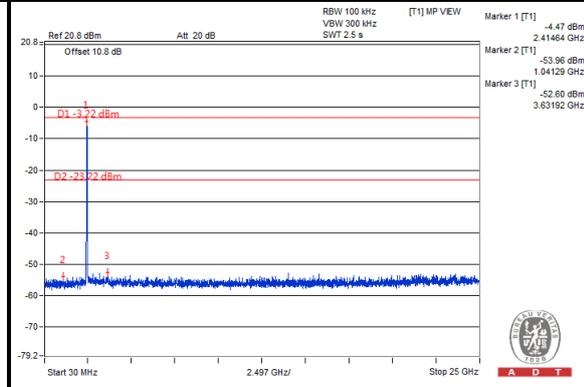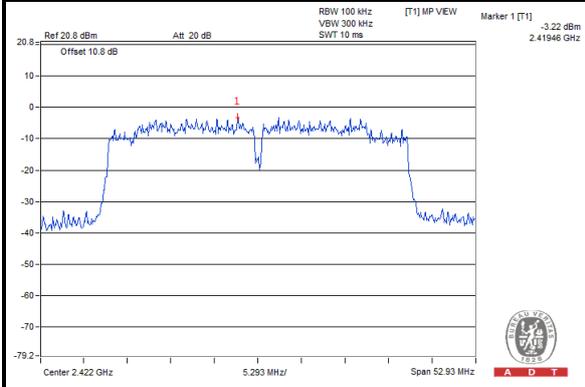

CH 6

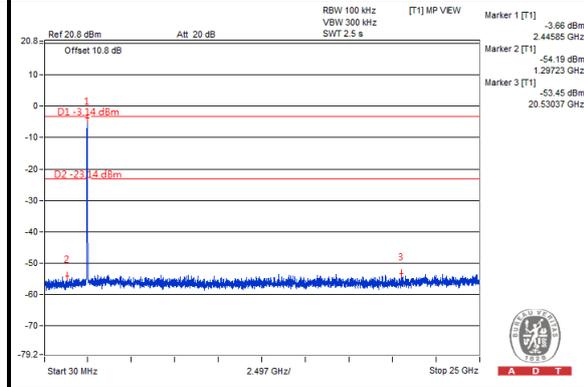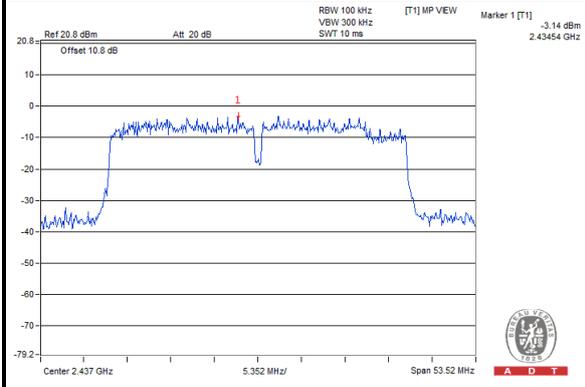

CH 9

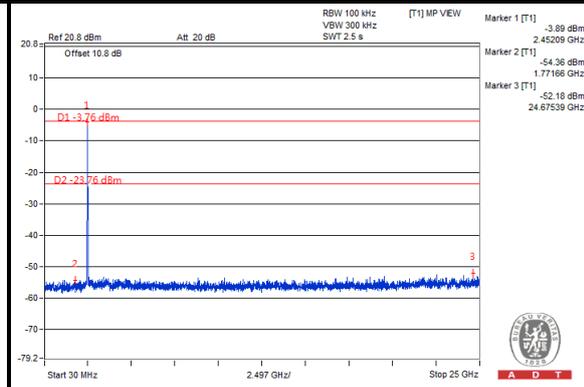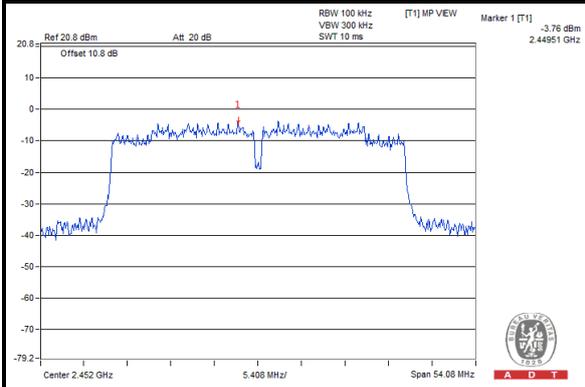

5. TEST TYPES AND RESULTS (FOR 5.0GHz BAND)

5.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT

5.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



A D T

5.1.2 TEST INSTRUMENTS

Same as item 4.1.2.

5.1.3 TEST PROCEDURES

Same as item 4.1.3.

5.1.4 DEVIATION FROM TEST STANDARD

No deviation.

5.1.5 TEST SETUP

Same as item 4.1.5.

5.1.6 EUT OPERATING CONDITIONS

Same as 4.1.6.



A D T

5.1.7 TEST RESULTS

ABOVE 1GHz WORST-CASE DATA : 802.11a

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 149	FREQUENCY RANGE	1GHz ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	David Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5725	58.51	58.39	70.44	-11.93	31.96	5.59	37.43	114	68	Average
5725	70.96	70.84	79.69	-8.73	31.96	5.59	37.43	114	68	Peak
5745	90.44	90.32			31.99	5.6	37.47	114	68	Average
5745	99.69	99.57			31.99	5.6	37.47	114	68	Peak
5825	38.1	37.87	70.44	-32.34	32.12	5.64	37.53	114	68	Average
5825	53.8	53.57	79.69	-25.89	32.12	5.64	37.53	114	68	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5725	57.06	56.94	69.39	-12.33	31.96	5.59	37.43	130	97	Average
5725	72.94	72.82	79.46	-6.52	31.96	5.59	37.43	130	97	Peak
5745	89.39	89.27			31.99	5.6	37.47	130	97	Average
5745	99.46	99.34			31.99	5.6	37.47	130	97	Peak
5825	38.15	37.92	69.39	-31.24	32.12	5.64	37.53	130	97	Average
5825	53.58	53.35	79.46	-25.88	32.12	5.64	37.53	130	97	Peak

REMARKS:

1. Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor
Margin Value = Emission Level - Limit Value
2. 5745MHz: Fundamental frequency.
3. 5725MHz & 5825MHz: Out of restricted band



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 157	FREQUENCY RANGE	1GHz ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	David Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5725	37.95	37.83	68.81	-30.86	31.96	5.59	37.43	135	70	Average
5725	53.26	53.14	78.61	-25.35	31.96	5.59	37.43	135	70	Peak
5785	88.81	88.69			32.04	5.62	37.54	135	70	Average
5785	98.61	98.49			32.04	5.62	37.54	135	70	Peak
5825	39.43	39.2	68.81	-29.38	32.12	5.64	37.53	135	70	Average
5825	56.73	56.5	78.61	-21.88	32.12	5.64	37.53	135	70	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5725	38.02	37.9	67.24	-29.22	31.96	5.59	37.43	154	87	Average
5725	53.36	53.24	76.93	-23.57	31.96	5.59	37.43	154	87	Peak
5785	87.24	87.12			32.04	5.62	37.54	154	87	Average
5785	96.93	96.81			32.04	5.62	37.54	154	87	Peak
5825	39.62	39.39	67.24	-27.62	32.12	5.64	37.53	154	87	Average
5825	56.37	56.14	76.93	-20.56	32.12	5.64	37.53	154	87	Peak

REMARKS:

- Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor
Margin Value = Emission Level - Limit Value
- 5785MHz: Fundamental frequency.
- 5725MHz & 5825MHz: Out of restricted band



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 161	FREQUENCY RANGE	1GHz ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	David Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5725	37.85	37.73	68.91	-31.06	31.96	5.59	37.43	100	68	Average
5725	52.22	52.1	77.91	-25.69	31.96	5.59	37.43	100	68	Peak
5805	88.91	88.72			32.1	5.63	37.54	100	68	Average
5805	97.91	97.72			32.1	5.63	37.54	100	68	Peak
5825	60.83	60.6	68.91	-8.08	32.12	5.64	37.53	100	68	Average
5825	75.29	75.06	77.91	-2.62	32.12	5.64	37.53	100	68	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5725	38.06	37.94	67.95	-29.89	31.96	5.59	37.43	126	94	Average
5725	51.78	51.66	77.14	-25.36	31.96	5.59	37.43	126	94	Peak
5805	87.95	87.76			32.1	5.63	37.54	126	94	Average
5805	97.14	96.95			32.1	5.63	37.54	126	94	Peak
5825	59.33	59.1	67.95	-8.62	32.12	5.64	37.53	126	94	Average
5825	75.44	75.21	77.14	-1.7	32.12	5.64	37.53	126	94	Peak

REMARKS:

1. Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor
Margin Value = Emission Level - Limit Value
2. 5805MHz: Fundamental frequency.
3. 5725MHz & 5825MHz: Out of restricted band



A D T

BELOW 1GHz WORST-CASE DATA : 802.11a

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 149	FREQUENCY RANGE	30MHz ~ 1GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	David Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
55.92	33.86	52.05	40	-6.14	12.35	0.8	31.34	100	184	Peak
166.08	27.23	45.45	43.5	-16.27	12.15	1.42	31.79	100	112	Peak
258.69	29.06	47.32	46	-16.94	11.74	1.86	31.86	100	294	Peak
420.4	28.99	42.81	46	-17.01	15.73	2.5	32.05	100	156	Peak
671.7	35.34	43.35	46	-10.66	20.48	3.33	31.82	100	206	Peak
943.3	29.4	33.48	46	-16.6	23.75	4.06	31.89	100	184	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
68.34	21.34	41.33	40	-18.66	10.89	0.89	31.77	100	105	Peak
143.94	33.17	51.02	43.5	-10.33	12.47	1.31	31.63	100	225	Peak
240.06	21.53	40.46	46	-24.47	11.07	1.79	31.79	100	301	Peak
419.7	31.1	44.92	46	-14.9	15.73	2.5	32.05	100	122	Peak
624.1	27.04	36.15	46	-18.96	19.89	3.16	32.16	100	286	Peak
898.5	34.62	39.18	46	-11.38	23.49	3.96	32.01	100	152	Peak

REMARKS:

- Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor
Margin Value = Emission Level - Limit Value

5.2 CONDUCTED EMISSION MEASUREMENT

5.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

5.2.2 TEST INSTRUMENTS

Same as item 4.2.2.

5.2.3 TEST PROCEDURES

Same as item 4.2.3.

5.2.4 DEVIATION FROM TEST STANDARD

No deviation.

5.2.5 TEST SETUP

Same as item 4.2.5.

5.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6

5.2.7 TEST RESULTS


CONDUCTED WORST-CASE DATA :

PHASE	Line 1	6dB BANDWIDTH	9kHz
--------------	--------	----------------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.29063	0.19	27.96	23.85	28.15	24.04	60.51	50.51	-32.36	-26.47
2	0.53281	0.22	34.50	33.11	34.72	33.33	56.00	46.00	-21.28	-12.67
3	1.58203	0.28	21.98	13.57	22.26	13.85	56.00	46.00	-33.74	-32.15
4	4.07031	0.37	7.78	0.56	8.15	0.93	56.00	46.00	-47.85	-45.07
5	11.10156	0.45	34.72	28.24	35.17	28.69	60.00	50.00	-24.83	-21.31
6	18.92188	0.62	36.77	28.96	37.39	29.58	60.00	50.00	-22.61	-20.42

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

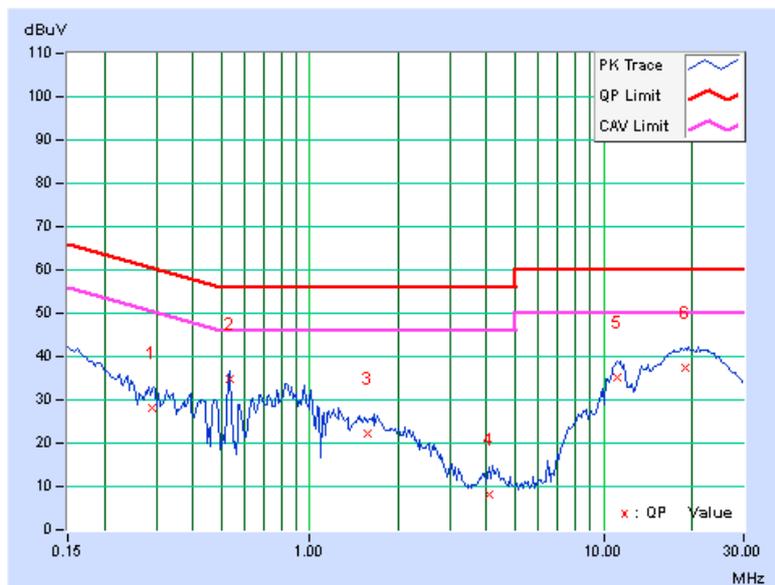


PHASE	Line 2	6dB BANDWIDTH	9kHz
-------	--------	---------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.21641	0.19	28.15	15.36	28.34	15.55	62.96
2	0.52500	0.25	30.72	23.77	30.97	24.02	56.00	46.00	-25.03	-21.98
3	0.95469	0.23	29.21	23.51	29.44	23.74	56.00	46.00	-26.56	-22.26
4	5.41797	0.41	17.63	7.20	18.04	7.61	60.00	50.00	-41.96	-42.39
5	11.09766	0.51	35.07	28.91	35.58	29.42	60.00	50.00	-24.42	-20.58
6	20.59375	0.73	36.04	28.05	36.77	28.78	60.00	50.00	-23.23	-21.22

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

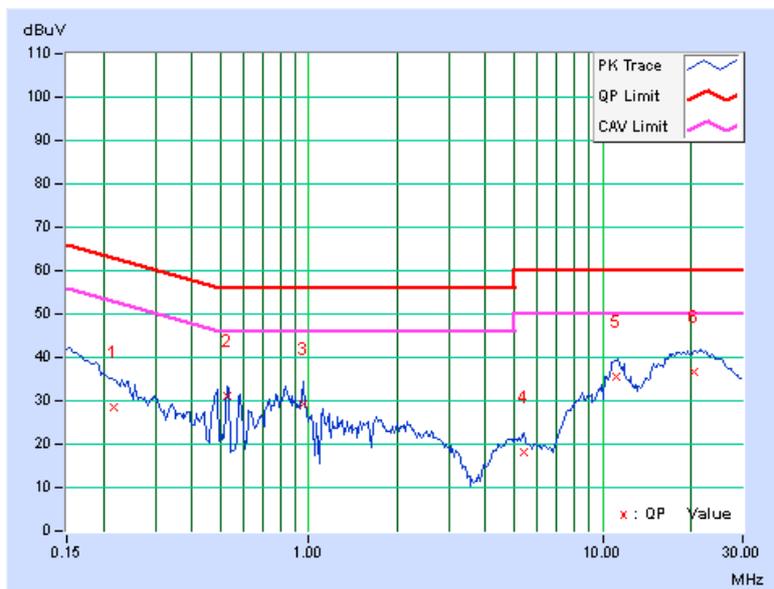



A D T

5.3 6dB BANDWIDTH MEASUREMENT

5.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5MHz.

5.3.2 TEST SETUP

Same as item 4.3.2.

5.3.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

5.3.4 TEST PROCEDURE

Same as item 4.3.4.

5.3.5 DEVIATION FROM TEST STANDARD

No deviation.

5.3.6 EUT OPERATING CONDITIONS

Same as item 4.3.6.



5.3.7 TEST RESULTS

802.11a

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
149	5745	16.32	0.5	PASS
157	5785	16.34	0.5	PASS
161	5805	16.32	0.5	PASS



A D T

5.4 MAXIMUM OUTPUT POWER

5.4.1 LIMITS OF MAXIMUM OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 5725–5850 MHz bands: 1 Watt (30dBm)

5.4.2 TEST SETUP

Same as Item 4.4.2.

5.4.3 INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

5.4.4 TEST PROCEDURES

Same as Item 4.4.4.

5.4.5 DEVIATION FROM TEST STANDARD

No deviation.

5.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6.



A D T

5.4.7 TEST RESULTS

FOR PEAK POWER

802.11a

CHANNEL	FREQUENCY (MHz)	PEAK POWER (mW)	PEAK POWER (dBm)	LIMIT (dBm)	PASS/FAIL
149	5745	128.529	21.09	30	PASS
157	5785	109.901	20.41	30	PASS
161	5805	105.196	20.22	30	PASS

FOR AVERAGE POWER

802.11a

CHANNEL	FREQUENCY (MHz)	AVERAGE POWER (mW)	AVERAGE POWER (dBm)
149	5745	42.855	16.32
157	5785	42.364	16.27
161	5805	41.591	16.19



A D T

5.5 POWER SPECTRAL DENSITY MEASUREMENT

5.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

5.5.2 TEST SETUP

Same as item 4.5.2.

5.5.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

5.5.4 TEST PROCEDURE.

Same as item 4.5.4.

5.5.5 DEVIATION FROM TEST STANDARD

No deviation.

5.5.6 EUT OPERATING CONDITION

Same as item 4.3.6.

5.5.7 TEST RESULTS

802.11a

Channel	FREQ. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
149	5745	-11.72	8	PASS
157	5785	-12.07	8	PASS
161	5805	-12.48	8	PASS

5.6 CONDUCTED OUT OF BAND EMISSION MEASUREMENT

5.6.1 LIMITS OF OUT OF BAND EMISSION MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

5.6.2 TEST SETUP

Same as Item 4.6.2

5.6.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

5.6.4 TEST PROCEDURE

Same as Item 4.6.4

5.6.5 DEVIATION FROM TEST STANDARD

No deviation.

5.6.6 EUT OPERATING CONDITION

Same as Item 4.3.6

5.6.7 TEST RESULTS


The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.




A D T

802.11a


CH 149

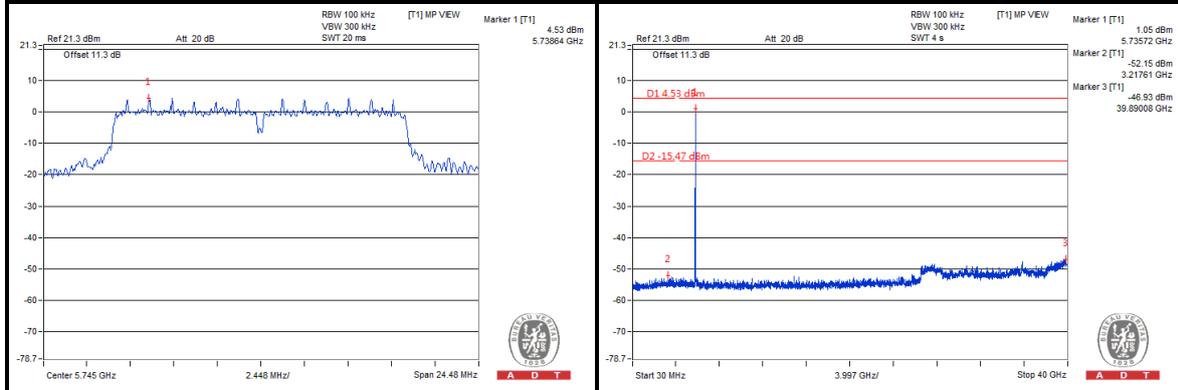

CH 157

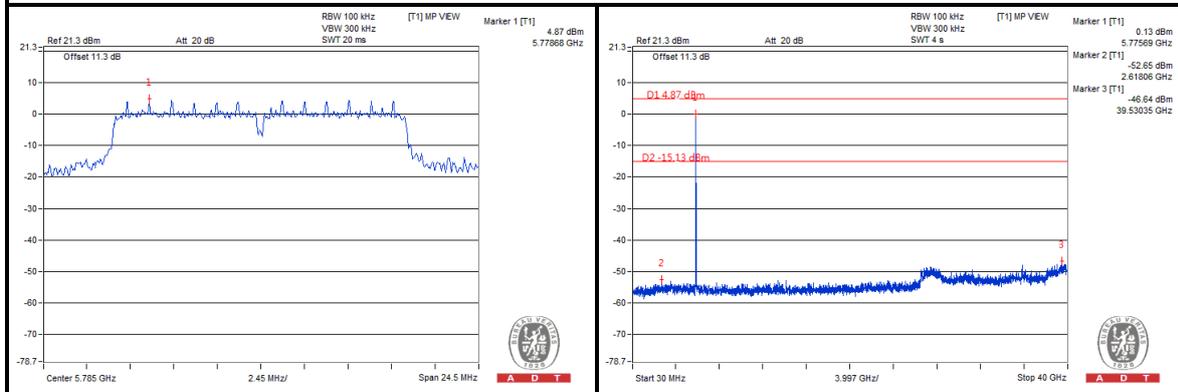

CH 161

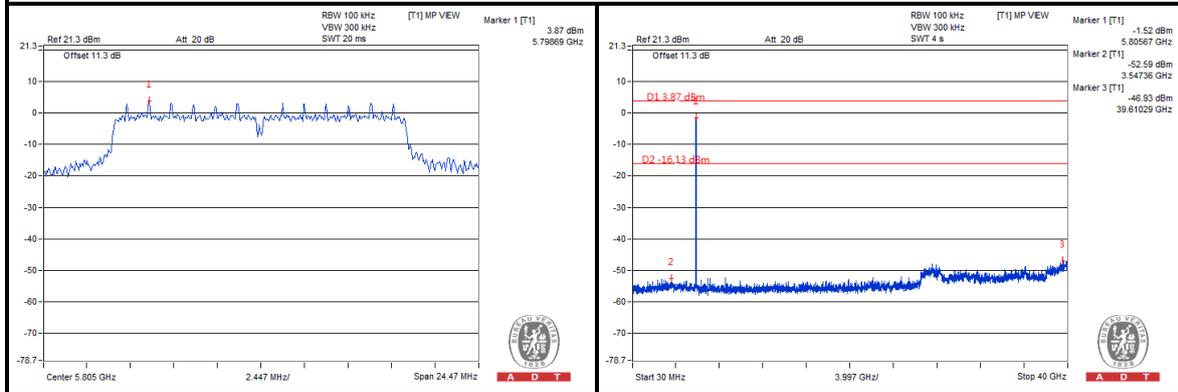



A D T

6. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



7. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.



A D T

8. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---