



**FCC 47 CFR PART 15 SUBPART C**

**TEST REPORT**

**For**

**CRETE SYSTEMS INC.**

**Notebook Computer**

**Model: RK786**

**Trade Name: CReTE**

*Prepared for*

**CRETE SYSTEMS INC.**

**7F, No.250, Sec.3, Pei Shen Rd., Shen Keng Hsiang,  
Taipei County, Taiwan.**

*Prepared by*

**Compliance Certification Services Inc.**

**No. 81-1, Lane 210, Bade Rd. 2, Luchu Hsiang,  
Taoyuan Hsien, (338) Taiwan, R.O.C.**

**TEL: 886-3-324-0332**

**FAX: 886-3-324-5235**



---

*Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.*



**TABLE OF CONTENTS**

1. TEST RESULT CERTIFICATION.....3

2. EUT DESCRIPTION.....4

3. TEST METHODOLOGY .....5

    3.1 EUT CONFIGURATION .....5

    3.2 EUT EXERCISE.....5

    3.3 GENERAL TEST PROCEDURES.....5

    3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS.....6

    3.5 DESCRIPTION OF TEST MODES .....6

4. INSTRUMENT CALIBRATION.....7

5. FACILITIES AND ACCREDITATIONS.....8

    5.1 FACILITIES ..... 8

    5.2 EQUIPMENT.....8

    5.3 LABORATORY ACCREDITATIONS AND LISTING.....8

    5.4 TABLE OF ACCREDITATIONS AND LISTINGS.....9

6. SETUP OF EQUIPMENT UNDER TEST .....10

    6.1 SETUP CONFIGURATION OF EUT.....10

    6.2 SUPPORT EQUIPMENT .....10

7. FCC PART 15.247 REQUIREMENTS.....11

    7.1 6DB BANDWIDTH .....11

    7.2 PEAK POWER.....16

    7.3 BAND EDGES MEASUREMENT .....21

    7.4 PEAK POWER SPECTRAL DENSITY .....22

    7.5 RADIO FREQUENCY EXPOSURE .....32

    7.6 SPURIOUS EMISSIONS .....38

    7.7 POWERLINE CONDUCTED EMISSIONS.....60

APPENDIX 1 PHOTOGRPHS OF TEST SETUP.....63



# 1. TEST RESULT CERTIFICATION

**Applicant:** CRETE SYSTEMS INC.  
 7F, No.250, Sec.3, Pei Shen Rd., Shen Keng Hsiang,  
 Taipei County, Taiwan.

**Equipment Under Test:** Notebook Computer

**Trade Name:** CReTE

**Model:** RK786

**Date of Test:** October 15 ~ 23, 2004

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC Part 15 Subpart C	No non-compliance noted

### We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:

Reviewed by:

\_\_\_\_\_  
 Harris W. Lai  
 Executive Vice President  
 Compliance Certification Services Inc.

\_\_\_\_\_  
 Devin Chang  
 Section Manager  
 Compliance Certification Services Inc.



## 2. EUT DESCRIPTION

<b>Product</b>	Notebook Computer
<b>Trade Name</b>	CReTE
<b>Model Number</b>	RK786
<b>Model Discrepancy</b>	N/A
<b>Power Supply</b>	(E.P.S.) INC. Model: F10903-A I/P: 100-240V, 1.2A, 50-60Hz O/P: 19V, 4.75A Battery: 9 x 18650 cells Lithium Ion 11.1V 6000mAH
<b>Frequency Range</b>	2412 ~ 2462 MHz
<b>Transmit Power</b>	IEEE802.11b mode: 19.39 dBm IEEE802.11g mode: 14.30 dBm
<b>Modulation Technique</b>	IEEE802.11b: DSSS (CCK; DQPSK; DBPSK) IEEE802.11g: OFDM
<b>Transmit Data Rate</b>	IEEE802.11b: 1Mbps IEEE802.11g: 6Mbps
<b>Number of Channels</b>	11 Channels
<b>Antenna Specification</b>	Patch Antenna Gain: -1.86 dBi

*Note: This submittal(s) (test report) is intended for FCC ID: IR5RK786EX filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.*



### **3. TEST METHODOLOGY**

The tests documented in this report were performed in accordance with ANSI C63.4 and FCC CFR 47 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057, 15.207, 15.209 and 15.247.

#### **3.1 EUT CONFIGURATION**

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

#### **3.2 EUT EXERCISE**

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

#### **3.3 GENERAL TEST PROCEDURES**

##### **Conducted Emissions**

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

##### **Radiated Emissions**

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4.



### 3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41	322 - 335.4		

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup> Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

### 3.5 DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition.

Software used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

IEEE802.11b: Channel 1(2412MHz), Channel 6(2437MHz) and Channel 11(2462MHz) with 1Mbps highest data rate (the worst case) are chosen for the final testing.

IEEE802.11g: Channel 1(2412MHz), Channel 6(2437MHz) and Channel 11(2462MHz) with 6Mbps data rate (the worst case) are chosen for the final testing.



#### **4. INSTRUMENT CALIBRATION**

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.



## 5. FACILITIES AND ACCREDITATIONS

### 5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

No. 81-1, Lane 210, Bade Rd. 2, Luchu Hsiang, Taoyuan Hsien, Taiwan, R.O.C.

No. 199, Chungsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

### 5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.








All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

### 5.3 LABORATORY ACCREDITATIONS AND LISTING

The test facilities used to perform radiated and conducted emissions tests are accredited by National Voluntary Laboratory Accreditation Program for the specific scope of accreditation under Lab Code: 200600-0 to perform Electromagnetic Interference tests according to FCC PART 15 AND CISPR 22 requirements. No part of this report may be used to claim or imply product endorsement by NVLAP or any agency of the US Government. In addition, the test facilities are listed with Federal Communications Commission (Registration no: 93105 and 90471).



### 5.4 TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	NVLAP*	EN 55011, EN 55014-1, AS/NZS 1044, CNS 13783-1, EN 55022, CNS 13438, EN 61000-3-2, EN 61000-3-3, ANSI C63.4, FCC OST/MP-5, AS/NZS CISPR 22, IEC 61000-4-2, IEC 61000-4-3, IEC 61000-4-4, IEC 61000-4-5, IEC 61000-4-6, IEC 61000-4-8, IEC 61000-4-11	 200600-0
USA	FCC	3/10 meter Open Area Test Sites to perform FCC Part 15/18 measurements	 93105, 90471
Japan	VCCI	4 3/10 meter Open Area Test Sites to perform conducted/radiated measurements	 R-393/1066/725/879 C-402/747/912
Norway	NEMKO	EN 50081-1/2, EN 50082-1/2, IEC 61000-6-1/2, EN 50091-2, EN 50130-4, EN 55011, EN 55013, EN 55014-1/2, EN 55015, EN 55022, EN 55024, EN 61000-3-2/3, EN 61326-1, IEC 61000-4-2/3/4/5/6/8/11, EN 60601-1-2, EN 300 328-2, EN 300 422-2, EN 301 419-1, EN 301 489-01/03/07/08/09/17, EN 301 419-2/3, EN 300 454-2, EN 301 357-2	 ELA 124a ELA 124b ELA 124c
Taiwan	CNLA	EN 300 328-1/2, EN 300 220-1/2/3, EN 300 440-1/2, EN 61000-3-2, EN 61000-3-3, 47 CFR FCC Part 15 Subpart C/D/E, EN 55013, CNS 13439, EN 55014-1, CNS 13783-1, EN 55022, CNS 13438, CISPR 22, AS/NZS 3548, EN 61000-4-2/3/4/5/6/8/11, ENV 50204, IEEE Std 1528, FCC OET Bulletin, 65+Supplement C, EN50360, EN50361, EN50371, RSS102	 0 3 6 3 ILAC MRA
Taiwan	BSMI	CNS 13438, CNS 13783-1, CNS 13439, CNS 14115	 SL2-IS-E-0014 SL2-IN-E-0014 SL2-A1-E-0014 SL2-R1-E-0014 SL2-R2-E-0014 SL2-L1-E-0014
Canada	Industry Canada	RSS212, Issue 1	 IC 3991-3 IC 3991-4

\* No part of this report may be used to claim or imply product endorsement by NVLAP or any agency of the US Government.



## 6. SETUP OF EQUIPMENT UNDER TEST

### 6.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

### 6.2 SUPPORT EQUIPMENT

Device Type	Brand	Model	Series No.	FCC ID	Data Cable	Power Cord
LCD Monitor	LEMEL	L2-17	2.59124E+11	FCC DoC	Shielded, 1.8m with two cores	Unshielded, 1.8m
Printer	EPSON	STYLUS C60	DR3K039425	FCC DoC	Shielded, 1.8m	Unshielded, 1.8m
USB Keyboard	Compaq	KU-9978	B463AOAGALT097	FCC DoC	Shielded, 1.8m	N/A
PS/2 Mouse	Logitech	M-S34	HCA25200400	DZL211029	Shielded, 1.8m	N/A
Modem	ACEEX	DM-1414	304012264	IFAXDM1414	Unshielded, 1.8m	Unshielded, 1.8m
Modem	ACEEX	DM-1414	304012267	IFAXDM1414	Unshielded, 1.8m	Unshielded, 1.8m
USB 2.0 External HDD	TeraSyS	F12-U	A0100214-43b0011	FCC DoC	Shielded, 1.8m	N/A
USB 2.0 External HDD	TeraSyS	F12-U	A0100214-39t0003	FCC DoC	Shielded, 1.8m	N/A
USB 2.0 External HDD	TeraSyS	F12-U	A0100214-39t0001	FCC DoC	Shielded, 1.8m	N/A
V8	SONY	DCR-TRV310	N/A	FCC DoC	1394 Cable Unshielded, 1.8m x 2	N/A
Walkman	Panasonic	RQ-L11	CD008482	FCC DoC	Unshielded, 1.5m	N/A
Telephone Switch Board (Remote)	Uniword	UK-106	N/A	FCC DoC	Line Cable: Unshielded, 10m	Unshielded, 1.8m

#### Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.



## 7. FCC PART 15.247 REQUIREMENTS

### 7.1 6dB BANDWIDTH

#### LIMIT


For the direct sequence systems, the minimum 6dB bandwidth shall be at least 500kHz.

#### MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY43360131	01/10/2005

*Remark: Each piece of equipment is scheduled for calibration once a year.*

#### Test Configuration



#### TEST PROCEDURE

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = 100kHz, VBW = RBW, Span = 20MHz, Sweep = auto.
4. Mark the peak frequency and -6dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.



**TEST RESULTS**

*No non-compliance noted*

**Test Data**

**Test mode: IEEE 802.11b**

Channel	Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Margin (kHz)
Low	2412	9030	>500	PASS
Mid	2437	9070		PASS
High	2462	9500		PASS

**Test mode: IEEE 802.11g**

Channel	Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Margin (kHz)
Low	2412	16430	>500	PASS
Mid	2437	16400		PASS
High	2462	16430		PASS




Test Plot

IEEE 802.11b mode

6dB Bandwidth (CH Low)


Agilent 09:27:18 Oct 20, 2004

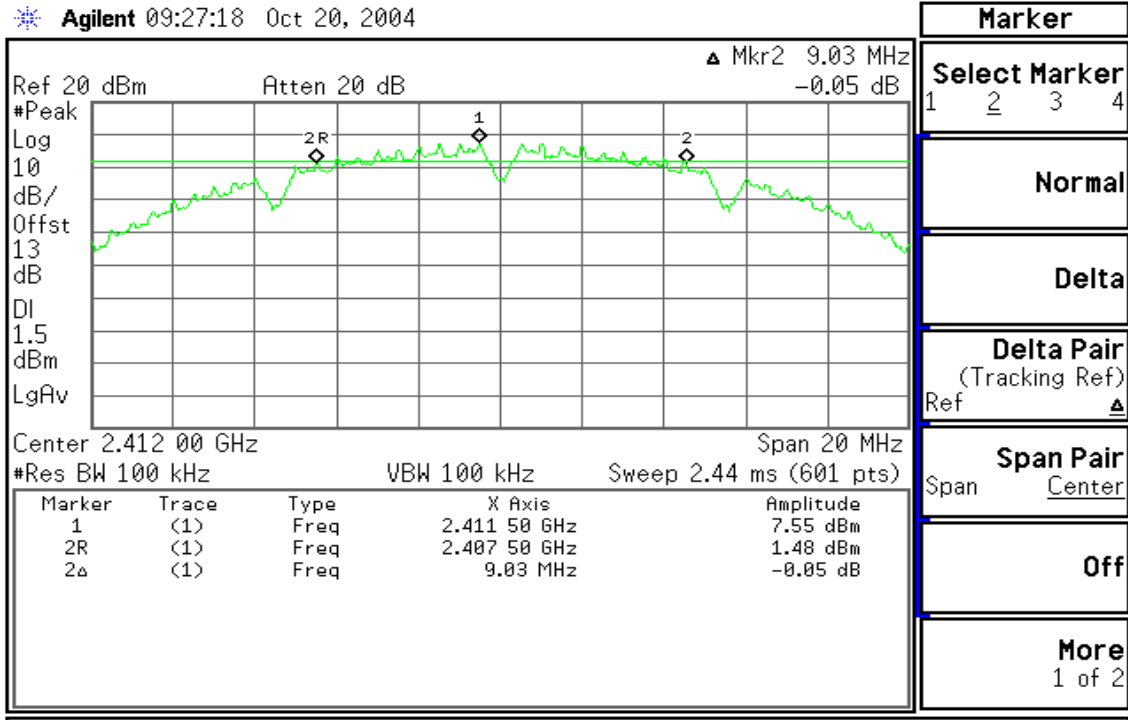

Copyright 2000-2002 Agilent Technologies

6dB Bandwidth (CH Mid)

Agilent 09:25:48 Oct 20, 2004

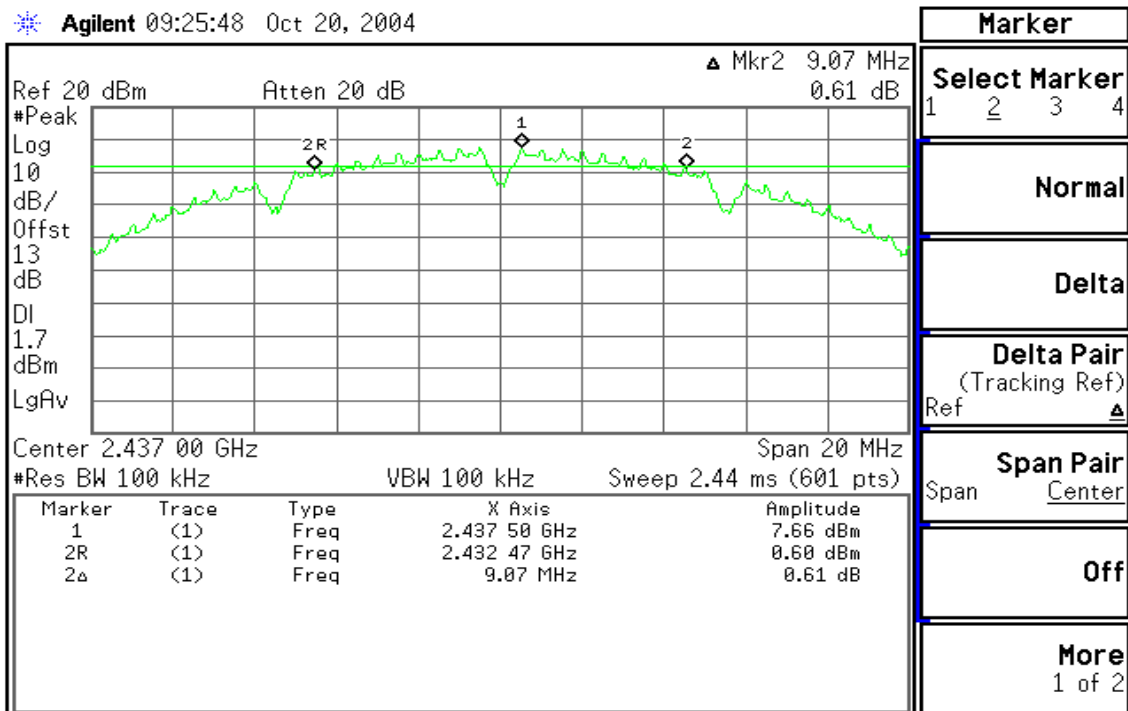


Copyright 2000-2002 Agilent Technologies



### 6dB Bandwidth (CH High)


Agilent 09:28:38 Oct 20, 2004

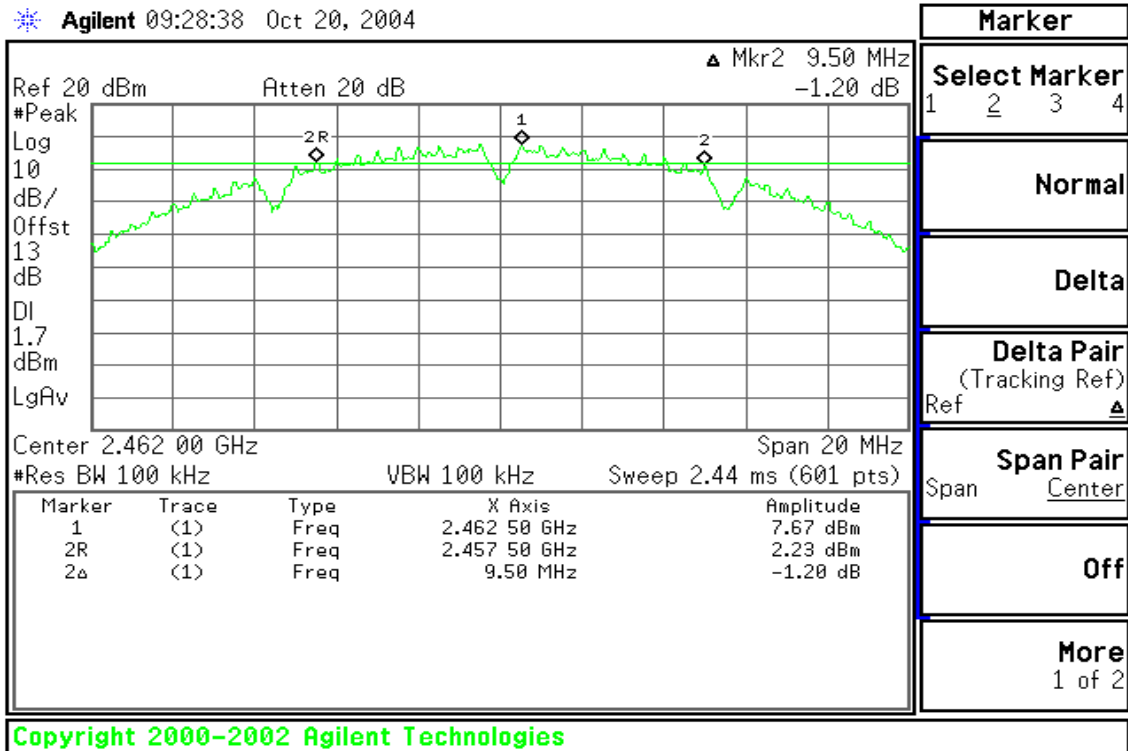

### IEEE 802.11g mode

### 6dB Bandwidth (CH Low)


Agilent 10:54:02 Oct 20, 2004

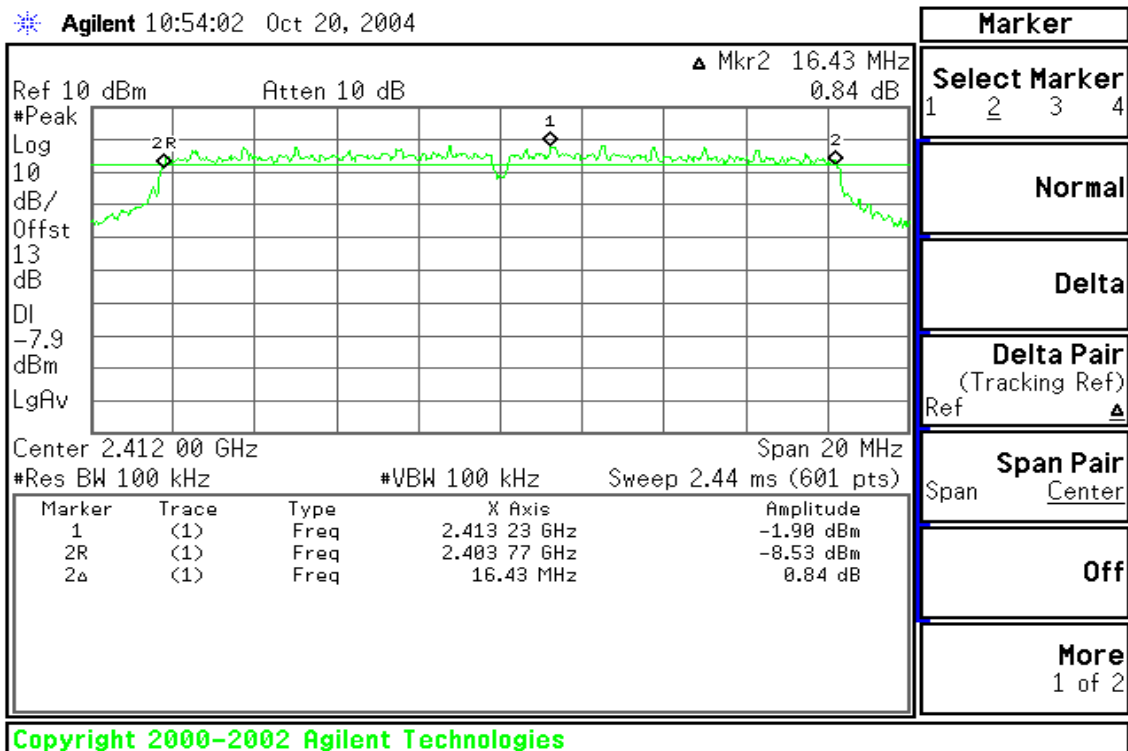




### 6dB Bandwidth (CH Mid)

Agilent 10:52:46 Oct 20, 2004

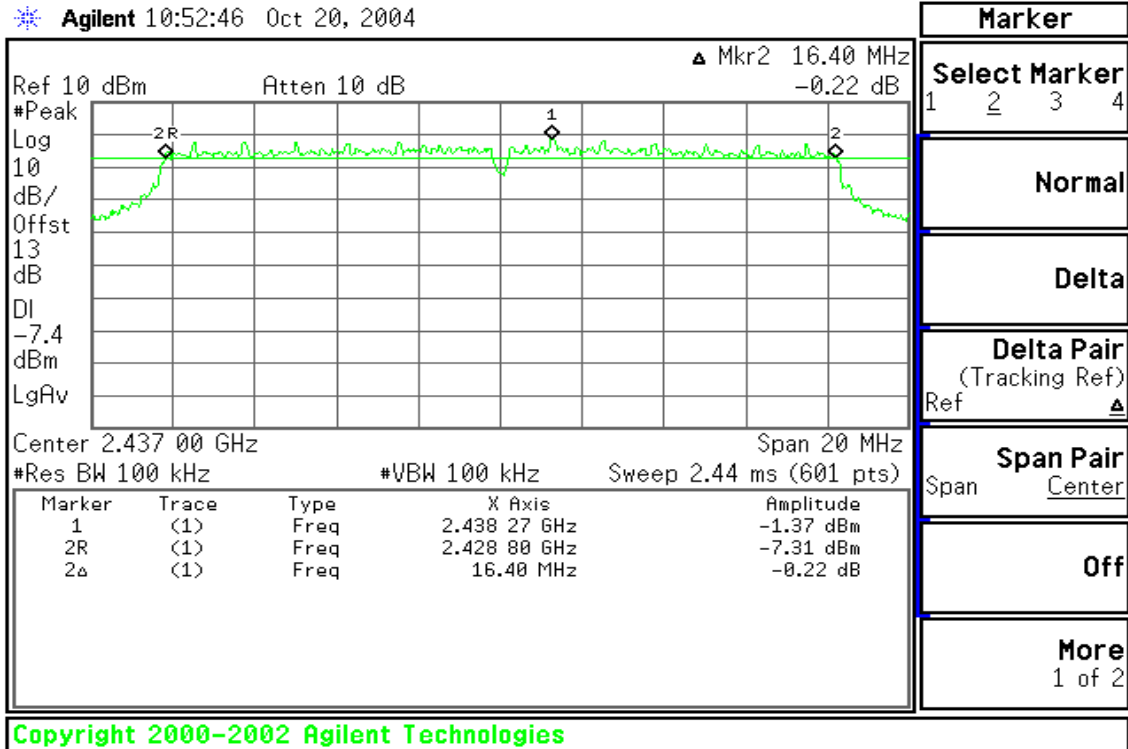

### 6dB Bandwidth (CH High)

Agilent 10:51:27 Oct 20, 2004

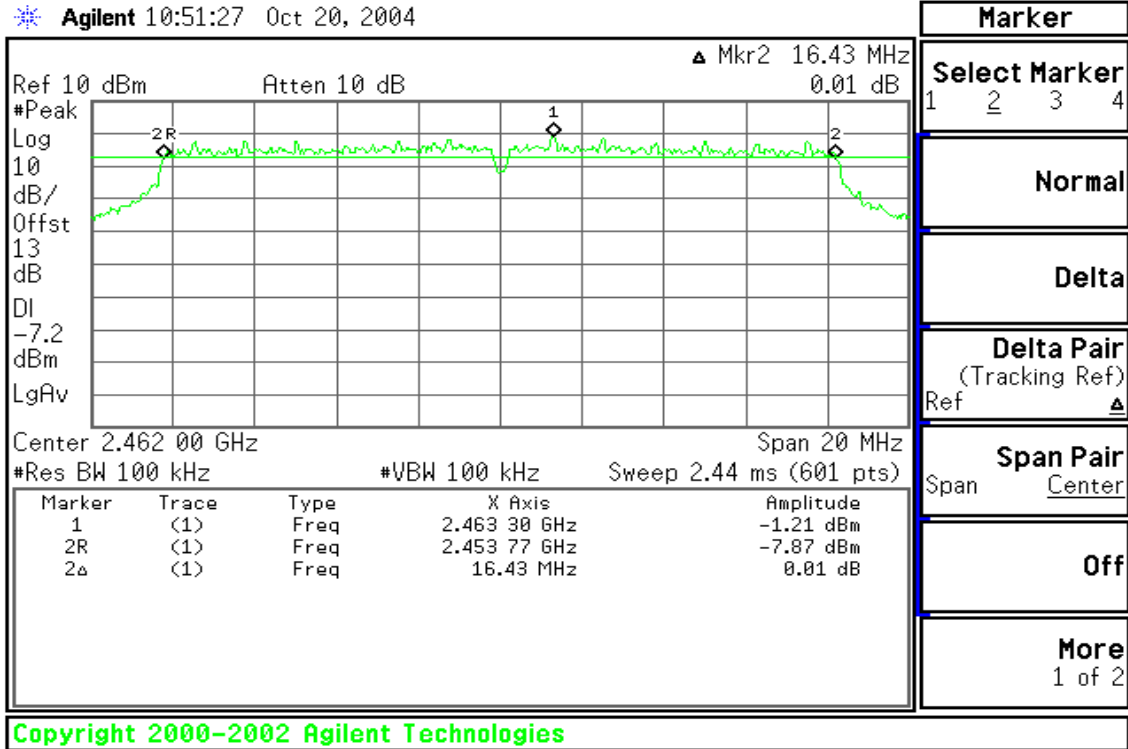



## 7.2 PEAK POWER

### LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:


1. For systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 watt.
2. Except as shown in paragraphs (b)(3) (i), (ii) and (iii) of this section, if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY43360131	01/10/2005

*Remark: Each piece of equipment is scheduled for calibration once a year.*

### Test Configuration



### TEST PROCEDURE

The transmitter output is connected to the Spectrum analyzer. The Spectrum analyzer is set to the peak power detection.





**TEST RESULTS**

*No non-compliance noted*

**Test Data**

**Test mode: IEEE 802.11b**

Channel	Frequency (MHz)	Output Power (dBm)	Factor (dB)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	6.24	13.0	19.24	0.08395	1	PASS
Mid	2437	6.05	13.0	19.05	0.08035		PASS
High	2462	6.39	13.0	19.39	0.08690		PASS

**Test mode: IEEE 802.11g**

Channel	Frequency (MHz)	Output Power (dBm)	Factor (dB)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	1.05	13.0	14.05	0.02541	1	PASS
Mid	2437	1.14	13.0	14.14	0.02594		PASS
High	2462	1.30	13.0	14.30	0.02692		PASS




Test Plot

IEEE 802.11b mode

Peak power (CH Low)

Agilent 09:20:14 Oct 20, 2004

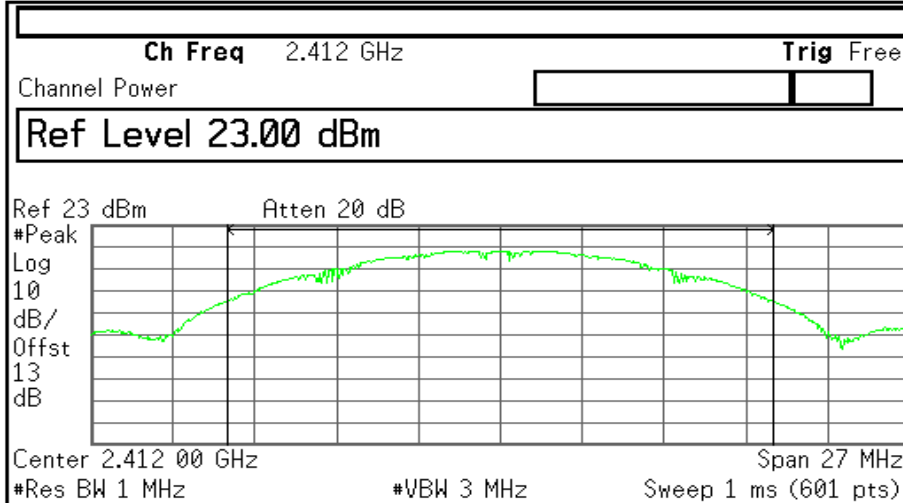


<b>Channel Power</b>	<b>Power Spectral Density</b>
19.24 dBm /18.0000 MHz	-53.32 dBm/Hz

<b>Amplitude</b>
Ref Level 23.00 dBm
Attenuation 20.00 dB Auto Man
Scale/Div 10.00 dB
Scale Type Log Lin
Presel Center
Presel Adjust 0.00000000 Hz
More 1 of 3

Copyright 2000-2002 Agilent Technologies

Peak power (CH Mid)

Agilent 09:21:46 Oct 20, 2004

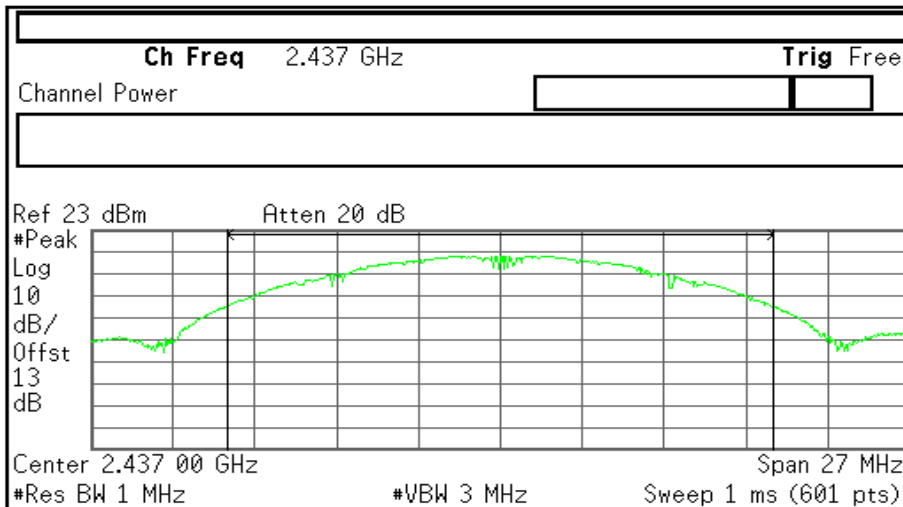

<b>Channel Power</b>	<b>Power Spectral Density</b>
19.05 dBm /18.0000 MHz	-53.51 dBm/Hz

<b>Freq/Channel</b>
Center Freq 2.43700000 GHz
Start Freq 2.42350000 GHz
Stop Freq 2.45050000 GHz
CF Step 2.70000000 MHz Auto Man
Freq Offset 0.00000000 Hz
Signal Track On Off

Copyright 2000-2002 Agilent Technologies



### Peak power (CH High)

Agilent 09:22:40 Oct 20, 2004

Ch Freq 2.462 GHz		Trig Free	
Channel Power			
Sweep Time 1.000 ms			
Ref 23 dBm		Atten 20 dB	
#Peak			
Log			
10			
dB/			
Offst			
13			
dB			
Center 2.462 00 GHz		Span 27 MHz	
*Res BW 1 MHz	*VBW 3 MHz	Sweep 1 ms (601 pts)	
<b>Channel Power</b>	<b>Power Spectral Density</b>		
19.39 dBm /18.0000 MHz	-53.16 dBm/Hz		
File Operation Status, A:\SCREN949.GIF file saved			

Sweep	
Sweep Time	1.000 ms
Auto	Man
Sweep	
Single	Cont
Auto Sweep Time	
Norm	Accy
Points	
601	

### IEEE 802.11g mode

#### Peak power (CH Low)

Agilent 10:15:27 Oct 20, 2004

Ch Freq 2.412 GHz		Trig Free	
Channel Power			
Ref Level 20.00 dBm			
Ref 20 dBm		Atten 20 dB	
#Peak			
Log			
10			
dB/			
Offst			
13			
dB			
Center 2.412 00 GHz		Span 30 MHz	
*Res BW 1 MHz	*VBW 3 MHz	Sweep 1 ms (601 pts)	
<b>Channel Power</b>	<b>Power Spectral Density</b>		
14.05 dBm /20.0000 MHz	-58.96 dBm/Hz		
File Operation Status, A:\SCREN968.GIF file saved			

Amplitude	
Ref Level	20.00 dBm
Attenuation	
20.00 dB	
Auto	Man
Scale/Div	
10.00 dB	
Scale Type	
Log	Lin
Presel Center	
Presel Adjust	
0.00000000 Hz	
More	
1 of 3	



### Peak power (CH Mid)

Agilent 10:15:56 Oct 20, 2004

Ch Freq 2.437 GHz		Trig Free	
Channel Power			
Sweep Time 1.000 ms			
Ref 20 dBm		Atten 20 dB	
#Peak			
Log			
10			
dB/			
Offst			
13			
dB			
Center 2.437 00 GHz		Span 30 MHz	
#Res BW 1 MHz	#VBW 3 MHz	Sweep 1 ms (601 pts)	
<b>Channel Power</b>	<b>Power Spectral Density</b>		
14.14 dBm /20.0000 MHz	-58.87 dBm/Hz		
File Operation Status, A:\SCREN969.GIF file saved			

<b>Sweep</b>	
Sweep Time	1.000 ms
Auto	Man
<b>Sweep</b>	
Single	Cont
<b>Auto Sweep Time</b>	
Norm	Accy
<b>Points</b>	
601	

### Peak power (CH High)

Agilent 10:16:51 Oct 20, 2004

Ch Freq 2.462 GHz		Trig Free	
Channel Power			
Sweep Time 1.000 ms			
Ref 20 dBm		Atten 20 dB	
#Peak			
Log			
10			
dB/			
Offst			
13			
dB			
Center 2.462 00 GHz		Span 30 MHz	
#Res BW 1 MHz	#VBW 3 MHz	Sweep 1 ms (601 pts)	
<b>Channel Power</b>	<b>Power Spectral Density</b>		
14.30 dBm /20.0000 MHz	-58.71 dBm/Hz		
File Operation Status, A:\SCREN970.GIF file saved			

<b>Sweep</b>	
Sweep Time	1.000 ms
Auto	Man
<b>Sweep</b>	
Single	Cont
<b>Auto Sweep Time</b>	
Norm	Accy
<b>Points</b>	
601	

### 7.3 BAND EDGES MEASUREMENT

#### LIMIT


According to §15.247(c), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

#### MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	R&S	FSP30	100112	08/03/2005

*Remark: Each piece of equipment is scheduled for calibration once a year.*

#### Test Configuration

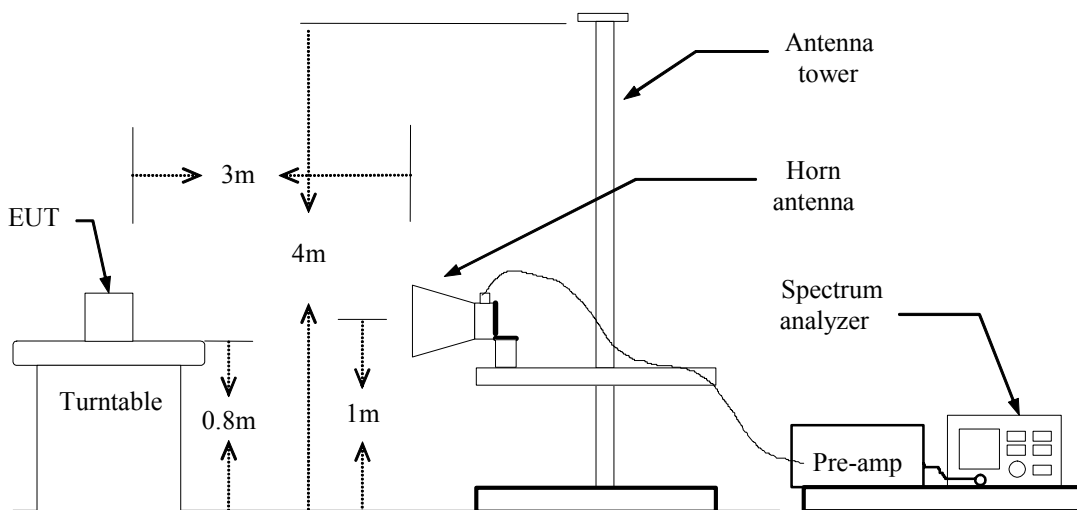

#### TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
  - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
  - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

#### TEST RESULTS


Refer to attach spectrum analyzer data chart.



### Band Edges (IEEE 802.11b / CH Low)

Detector mode: Peak


Polarity: Vertical

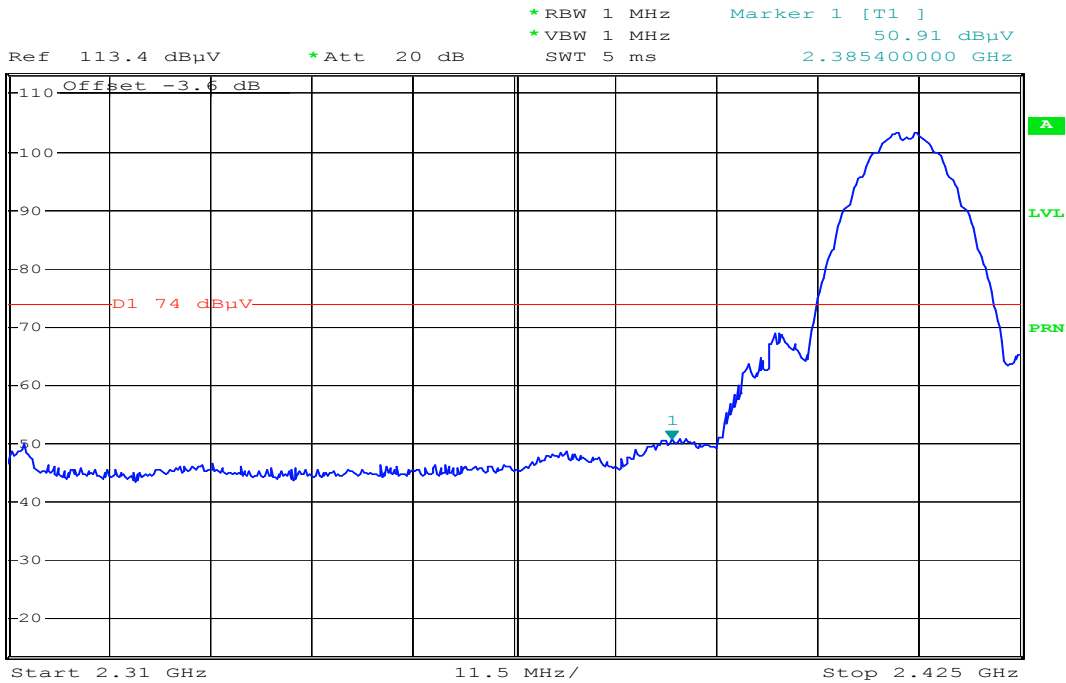

Date: 19.OCT.2004 09:25:24

Detector mode: Average

Polarity: Vertical

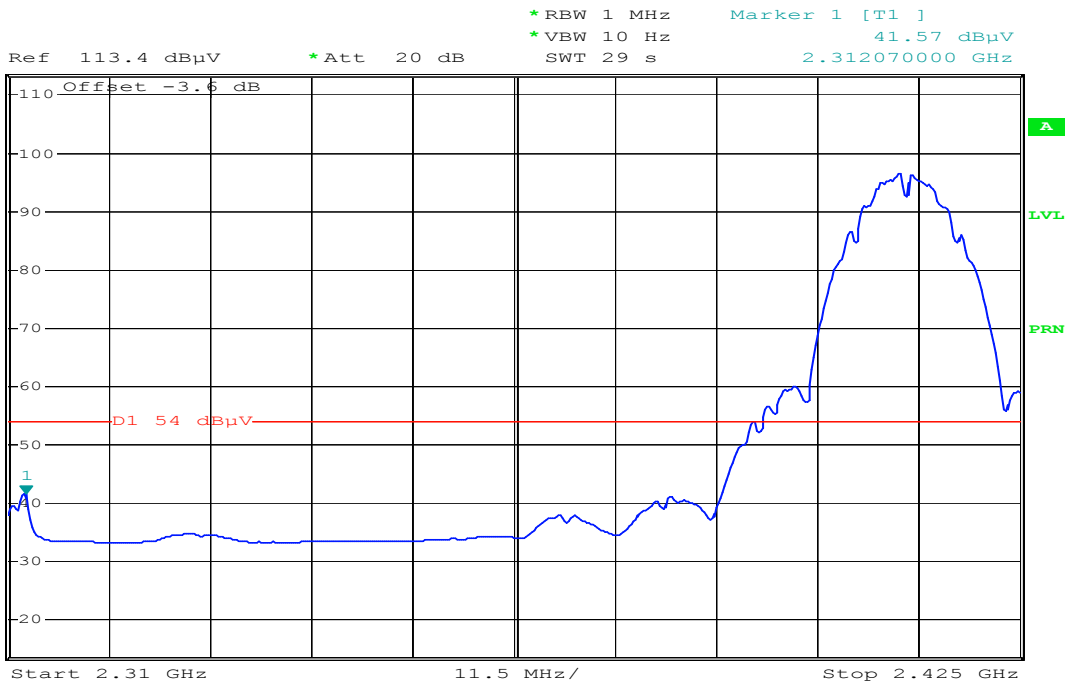

Date: 19.OCT.2004 09:26:52




Detector mode: Peak

Polarity: Horizontal



Ref 113.4 dB $\mu$ V      \*Att 20 dB  
\*RBW 1 MHz      Marker 1 [T1]      53.12 dB $\mu$ V  
\*VBW 1 MHz           2.385440000 GHz  
SWT 5 ms

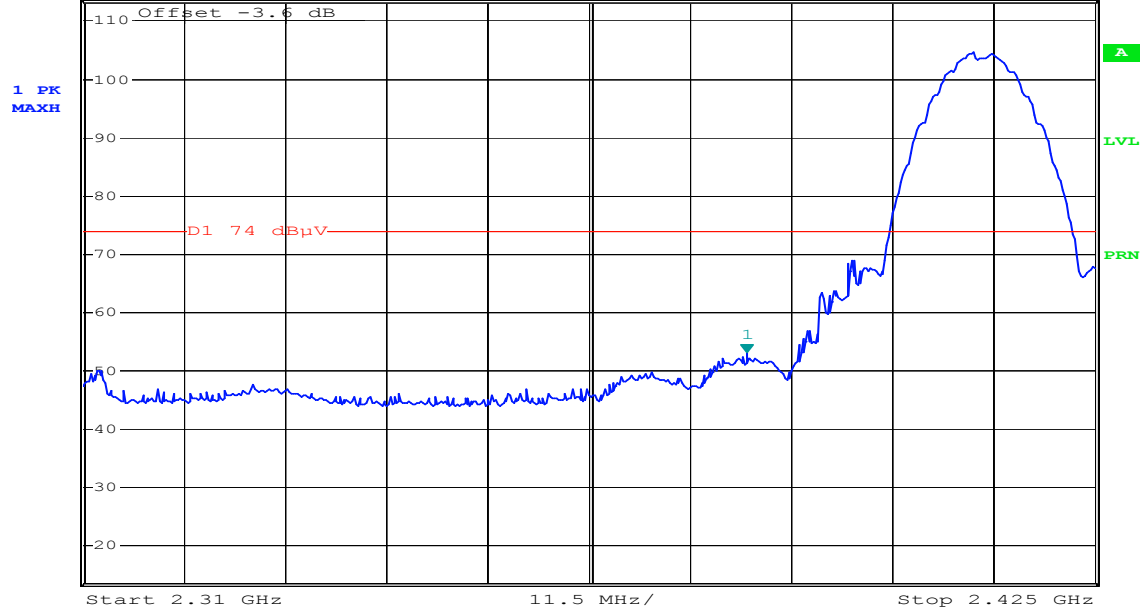


Date: 19.OCT.2004 10:31:06

Detector mode: Average

Polarity: Horizontal



Ref 113.4 dB $\mu$ V      \*Att 20 dB  
\*RBW 1 MHz      Marker 1 [T1]      43.46 dB $\mu$ V  
\*VBW 10 Hz           2.385210000 GHz  
SWT 29 s

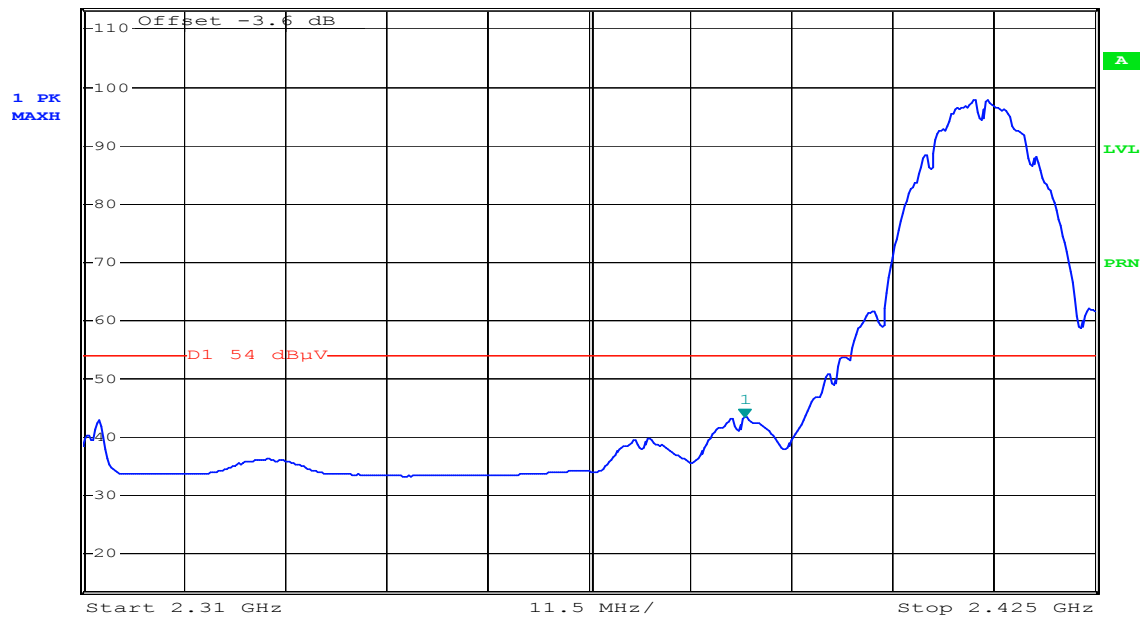


Date: 19.OCT.2004 10:30:26



### Band Edges (IEEE 802.11b / CH High)

Detector mode: Peak


Polarity: Vertical

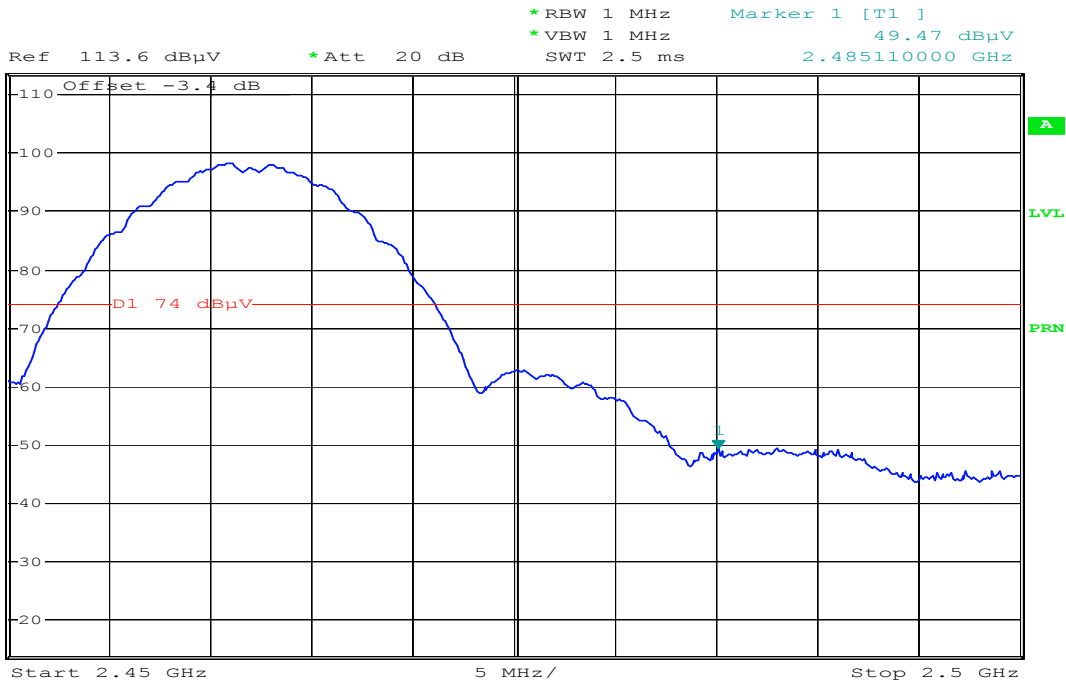

Date: 19.OCT.2004 09:32:04

Detector mode: Average

Polarity: Vertical

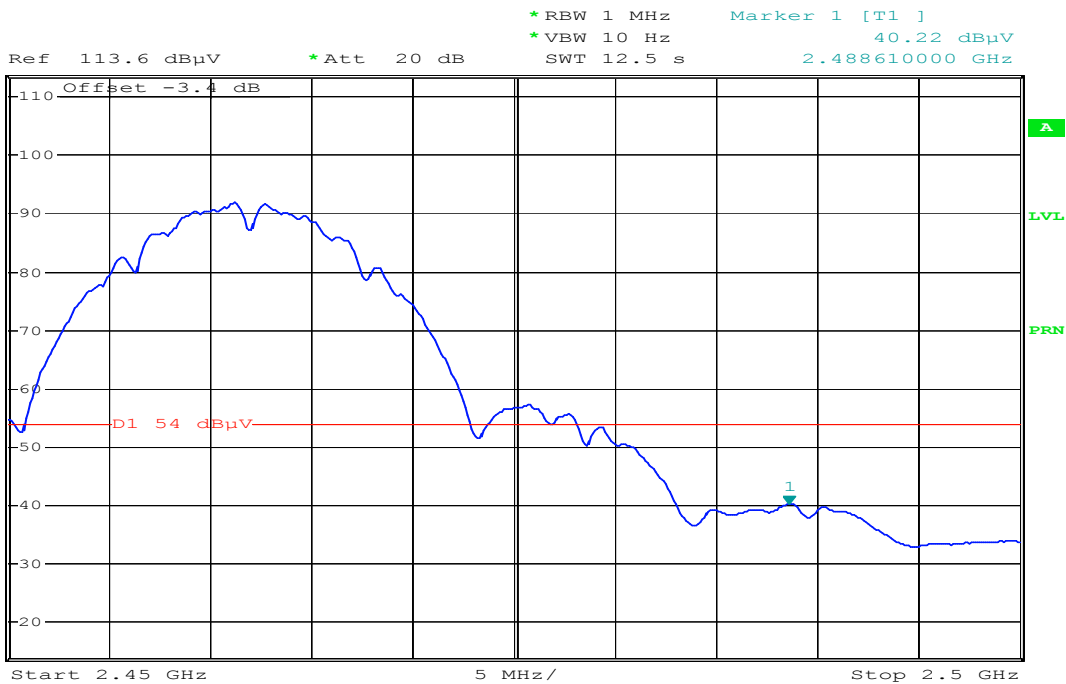

Date: 19.OCT.2004 09:32:52






**Detector mode: Peak**

**Polarity: Horizontal**



Ref 113.6 dBμV      \*Att 20 dB  
\*RBW 1 MHz      Marker 1 [T1]      54.63 dBμV  
\*VBW 1 MHz  
SWT 2.5 ms      2.488200000 GHz

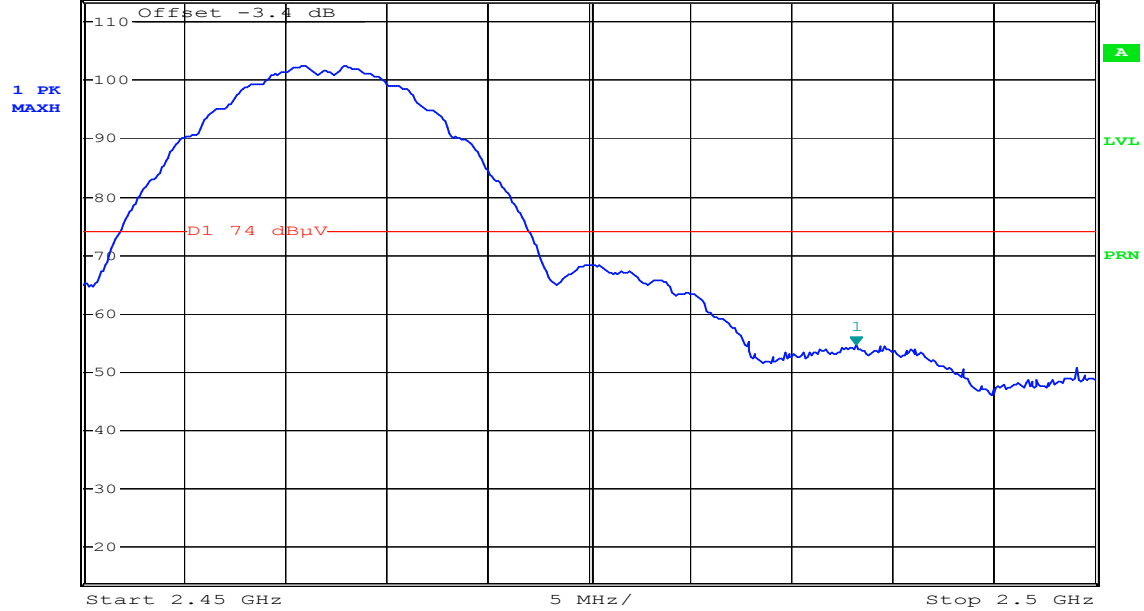


Date: 19.OCT.2004 10:07:48

**Detector mode: Average**

**Polarity: Horizontal**



Ref 113.6 dBμV      \*Att 20 dB  
\*RBW 1 MHz      Marker 1 [T1]      46.96 dBμV  
\*VBW 10 Hz  
SWT 12.5 s      2.488800000 GHz

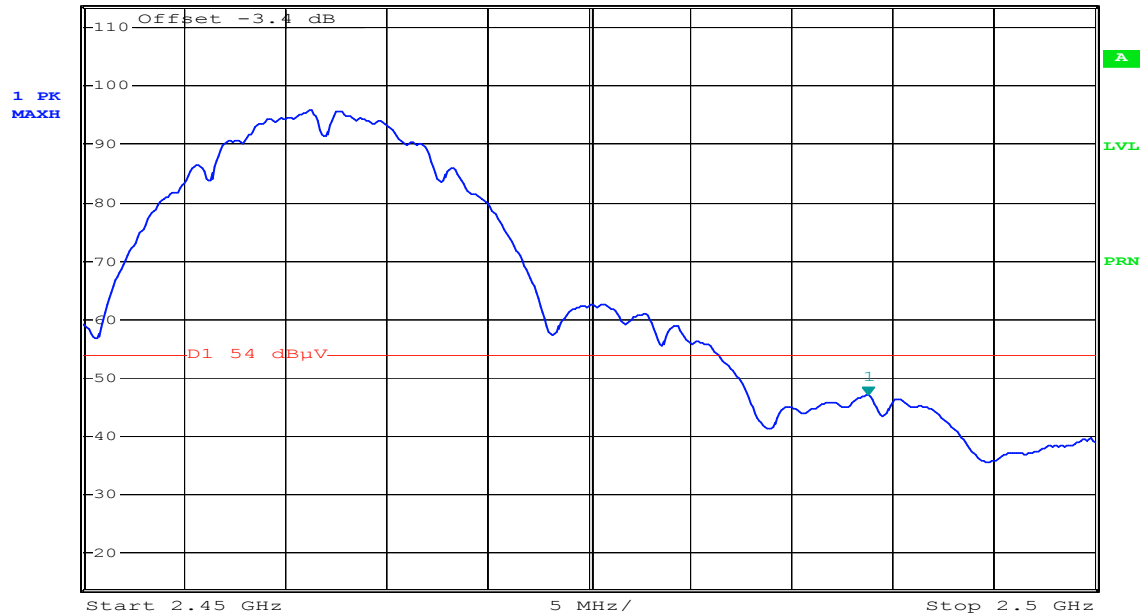


Date: 19.OCT.2004 10:08:39



### Band Edges (IEEE 802.11g / CH Low)

Detector mode: Peak


Polarity: Vertical

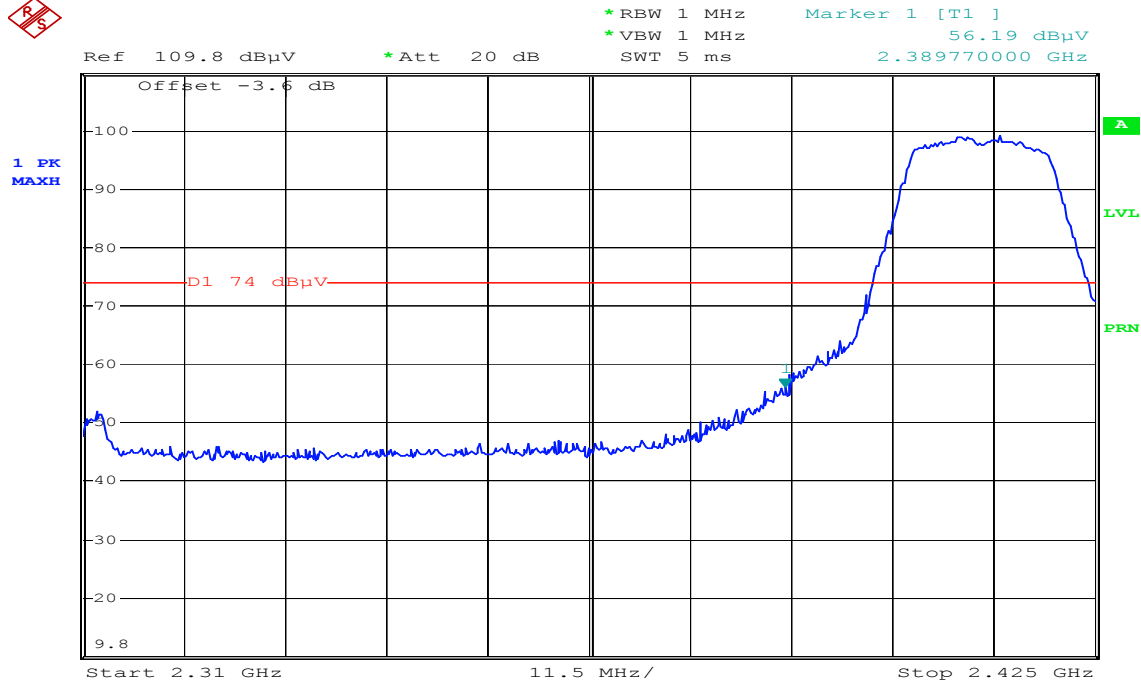

Date: 19.OCT.2004 09:48:49

Detector mode: Average

Polarity: Vertical

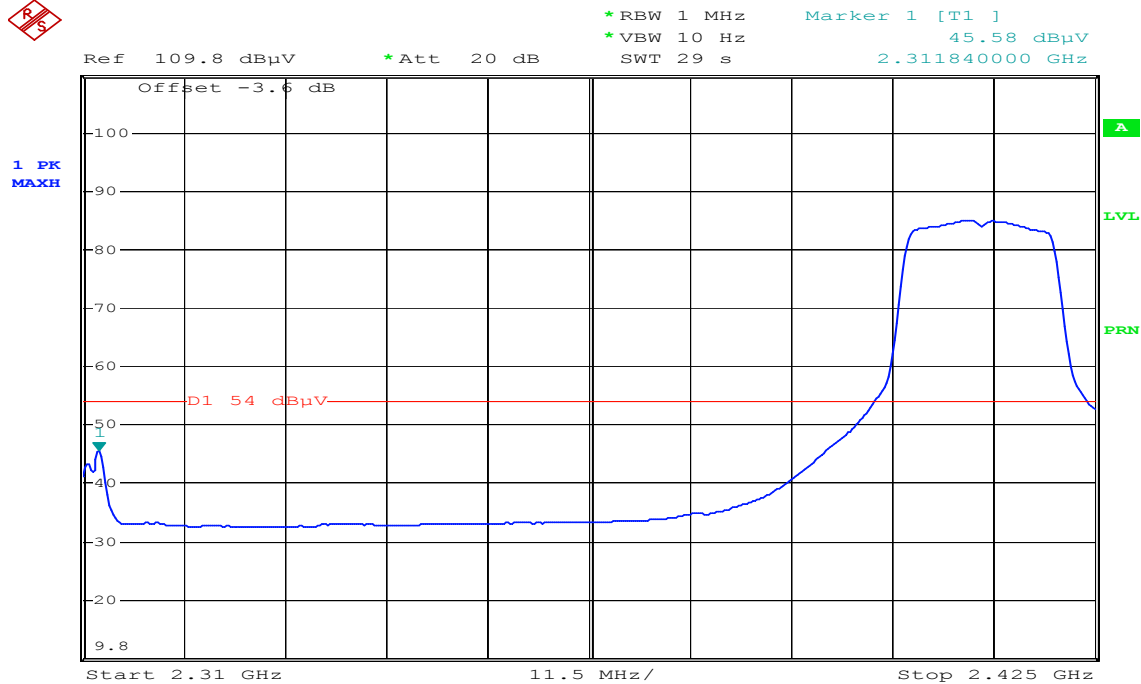

Date: 19.OCT.2004 09:47:50




Detector mode: Peak

Polarity: Horizontal



Ref 109.8 dBµV      \*Att 20 dB      \*RBW 1 MHz      Marker 1 [T1]      62.21 dBµV  
 \*VBW 1 MHz      2.389770000 GHz  
 SWT 5 ms

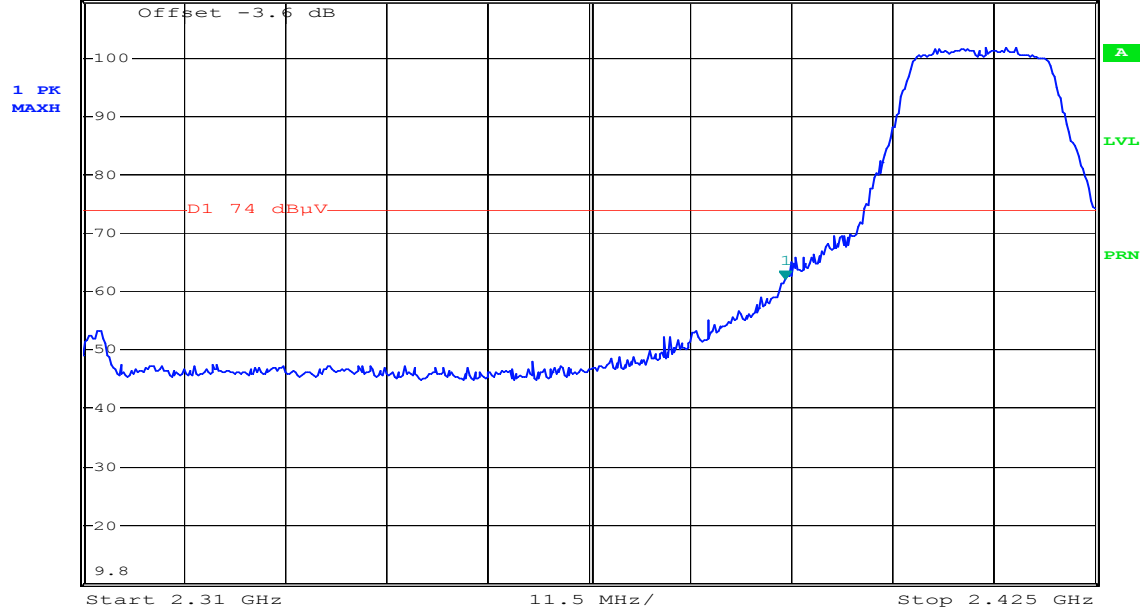


Date: 19.OCT.2004 09:57:55

Detector mode: Average

Polarity: Horizontal



Ref 109.8 dBµV      \*Att 20 dB      \*RBW 1 MHz      Marker 1 [T1]      48.20 dBµV  
 \*VBW 10 Hz      2.311800000 GHz  
 SWT 29 s

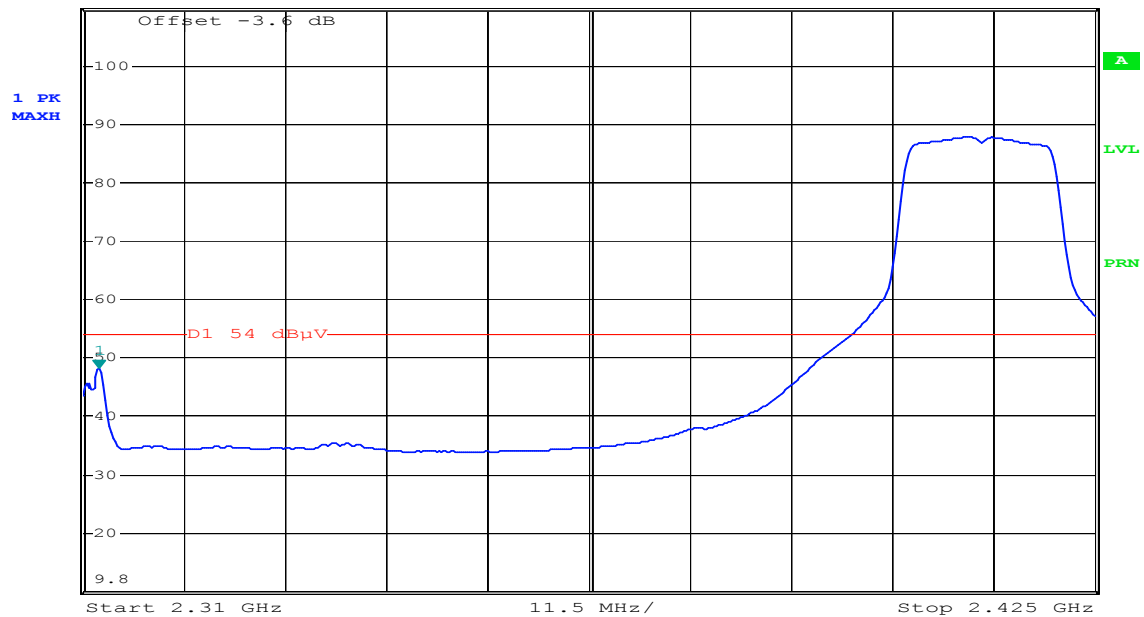


Date: 19.OCT.2004 09:59:24



### Band Edges (IEEE 802.11g / CH High)

Detector mode: Peak


Polarity: Vertical

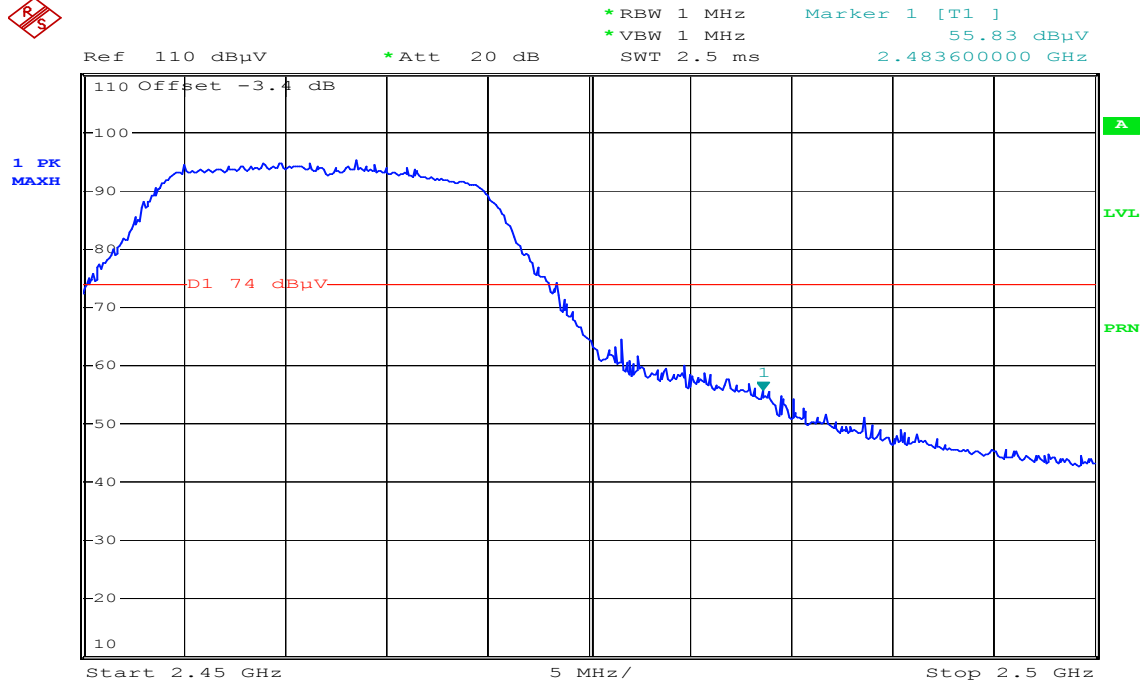

Date: 19.OCT.2004 09:42:40

Detector mode: Average

Polarity: Vertical

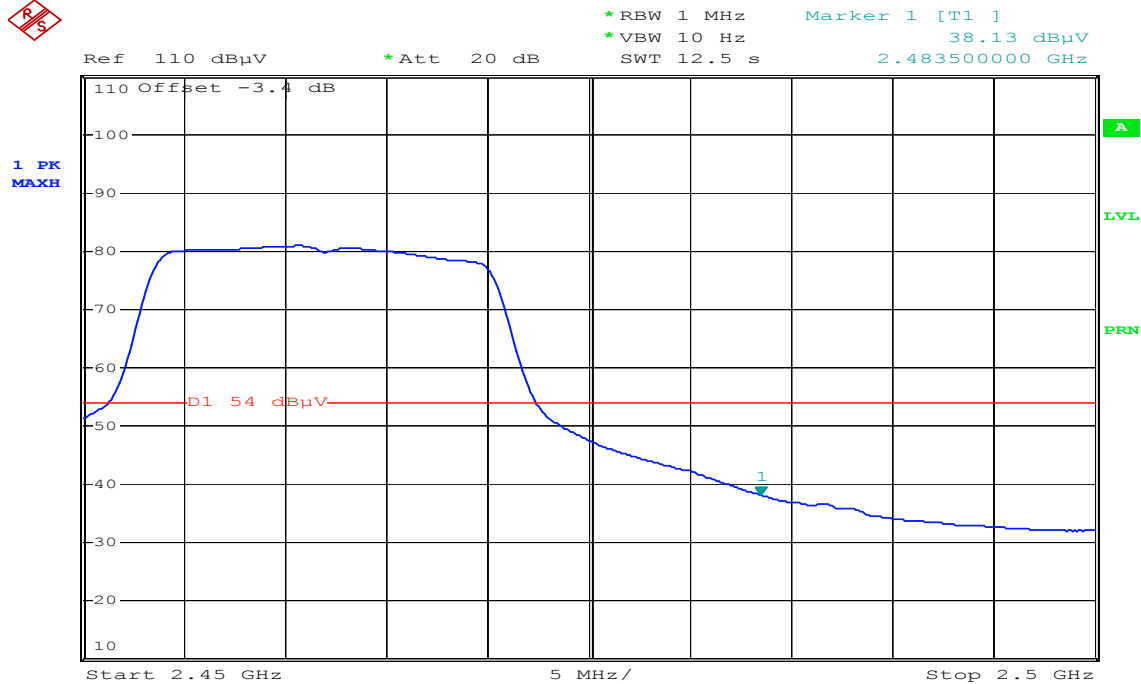


Date: 19.OCT.2004 09:43:52



Detector mode: Peak


Polarity: Horizontal

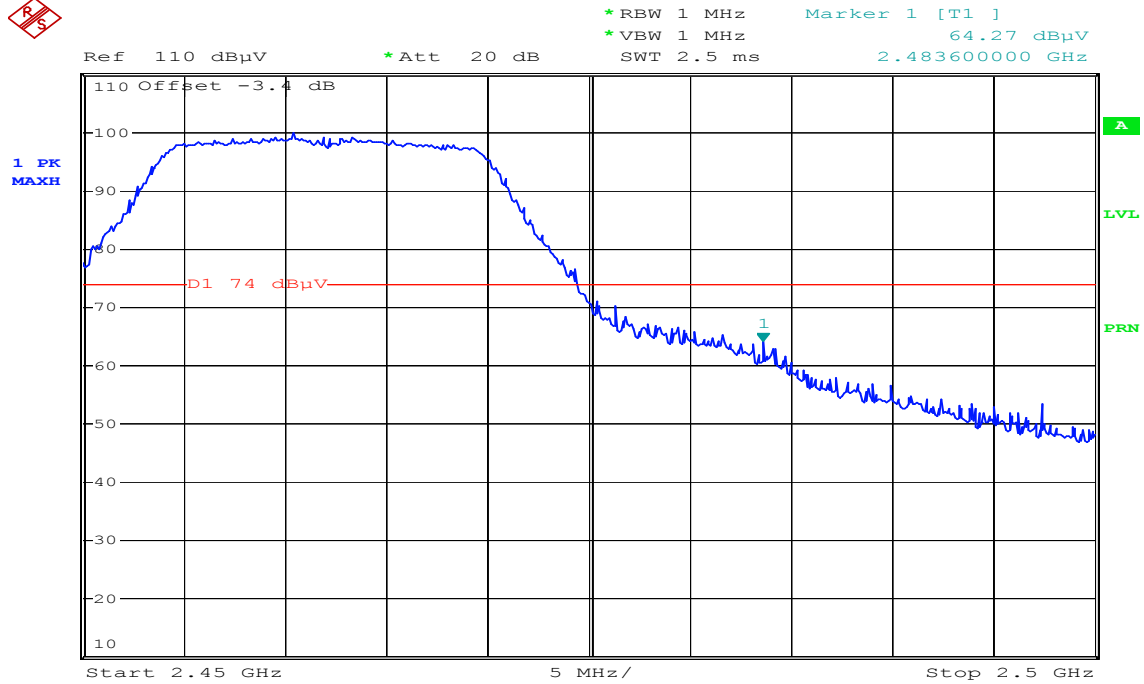

Date: 19.OCT.2004 10:03:58

Detector mode: Average

Polarity: Horizontal

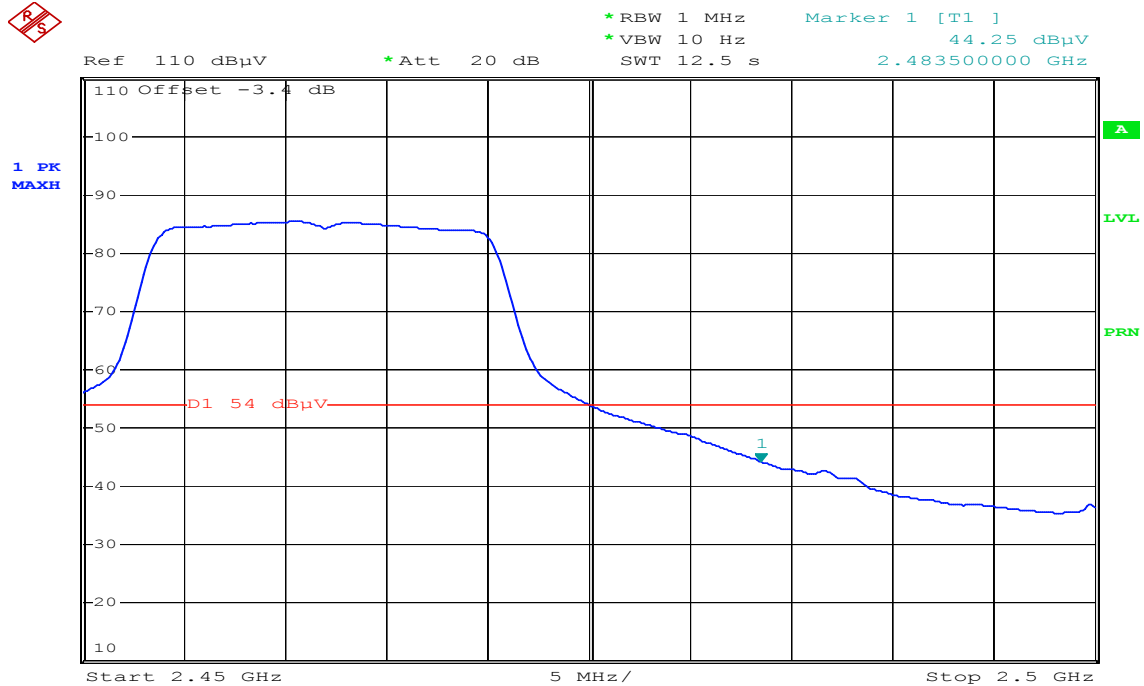

Date: 19.OCT.2004 10:03:19

## 7.4 PEAK POWER SPECTRAL DENSITY

### LIMIT


1. For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.
2. The direct sequence operating of the hybrid system, with the frequency hopping operation turned off, shall comply with the power density requirements of paragraph (d) of this section.

### MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY43360131	01/10/2005

*Remark: Each piece of equipment is scheduled for calibration once a year.*

### Test Configuration



### TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.  
Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as RBW = 3kHz, VBW = 10kHz, Span = 300kHz, Sweep=100s
3. Record the max. reading.
4. Repeat the above procedure until the measurements for all frequencies are completed.



**TEST RESULTS**

*No non-compliance noted*

**Test Data**

**Test mode: IEEE 802.11b**

Channel	Frequency	Reading (dBm)	Factor (dB)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-21.38	13.0	-8.38	8.00	PASS
Mid	2437	-20.98	13.0	-7.98		PASS
High	2462	-19.54	13.0	-6.54		PASS

**Test mode: IEEE 802.11g**

Channel	Frequency	Reading (dBm)	Factor (dB)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-23.19	10.0	-13.19	8.00	PASS
Mid	2437	-23.64	10.0	-13.64		PASS
High	2462	-24.20	10.0	-14.20		PASS




**Test Plot**

**IEEE 802.11b mode**


**PPSD (CH Low)**

Agilent 10:02:51 Oct 20, 2004

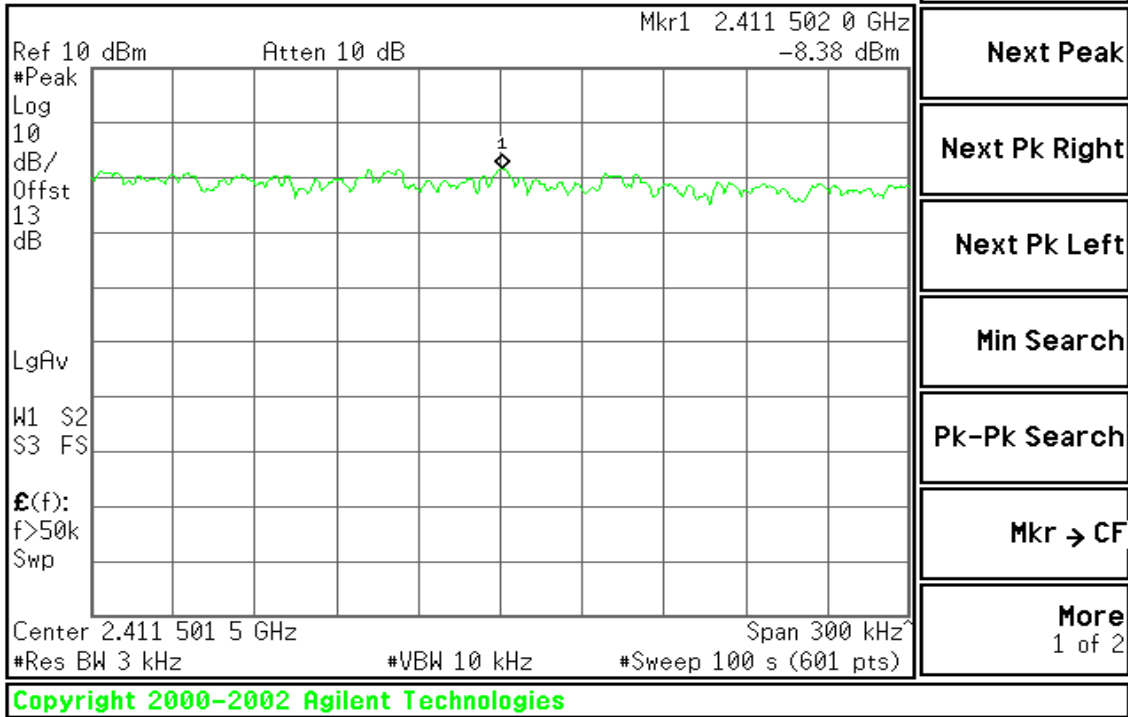

**PPSD (CH Mid)**

Agilent 09:59:52 Oct 20, 2004

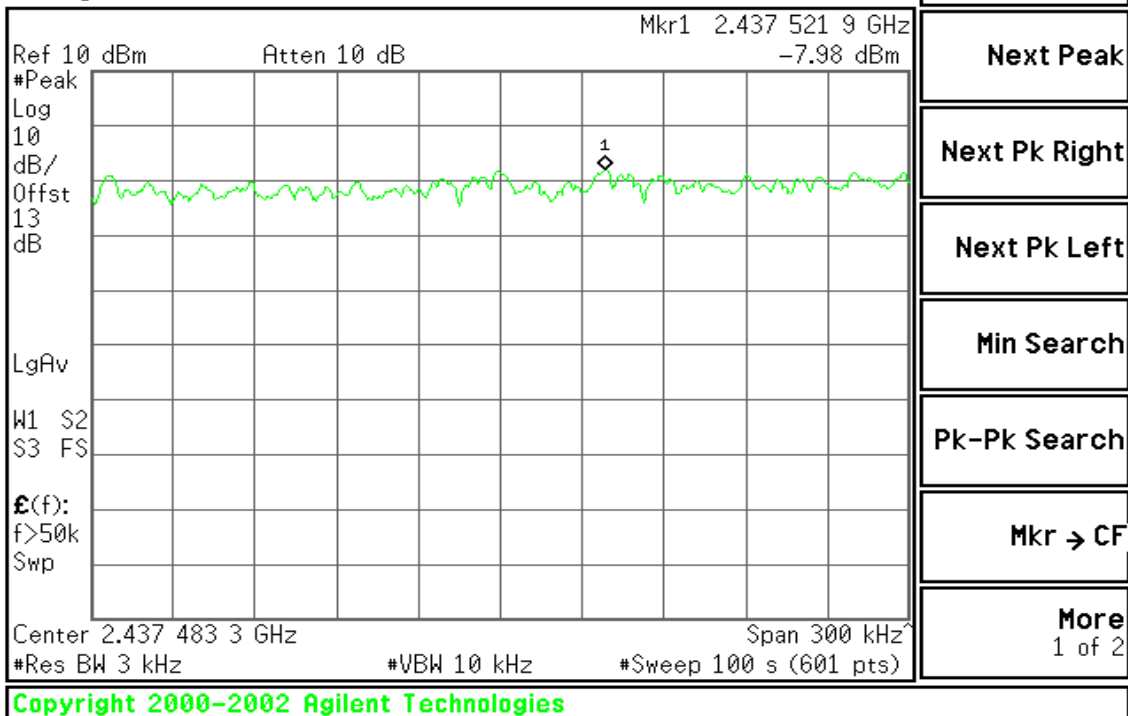






### PPSD (CH High)

Agilent 09:56:49 Oct 20, 2004

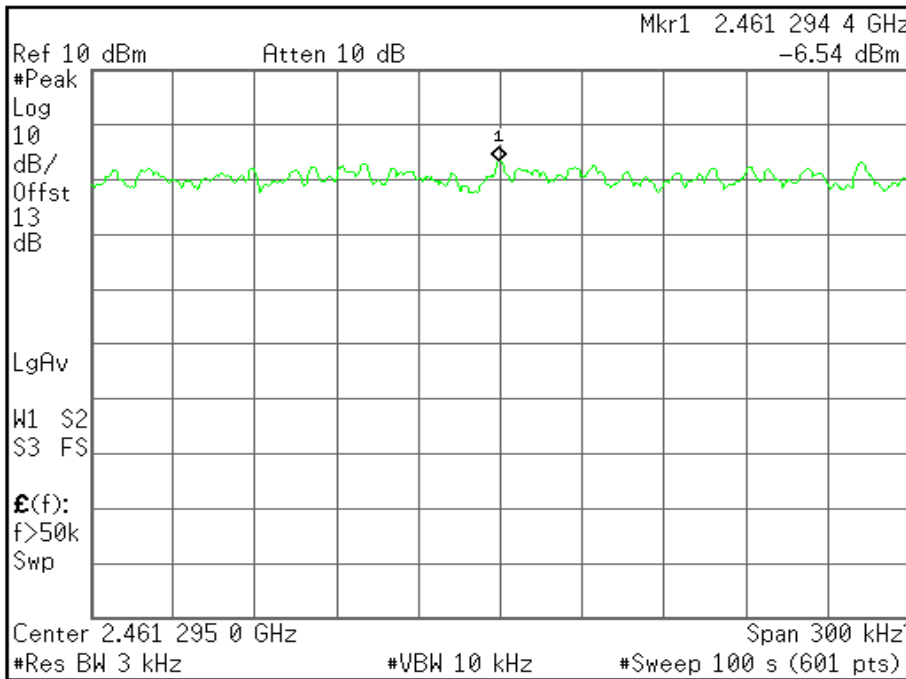


Freq/Channel	
Center Freq	2.46129495 GHz
Start Freq	2.46114495 GHz
Stop Freq	2.46144495 GHz
CF Step	30.0000000 kHz Auto Man
Freq Offset	0.00000000 Hz
Signal Track	On Off

Copyright 2000-2002 Agilent Technologies

### IEEE 802.11g mode

### PPSD (CH Low)

Agilent 10:34:15 Oct 20, 2004

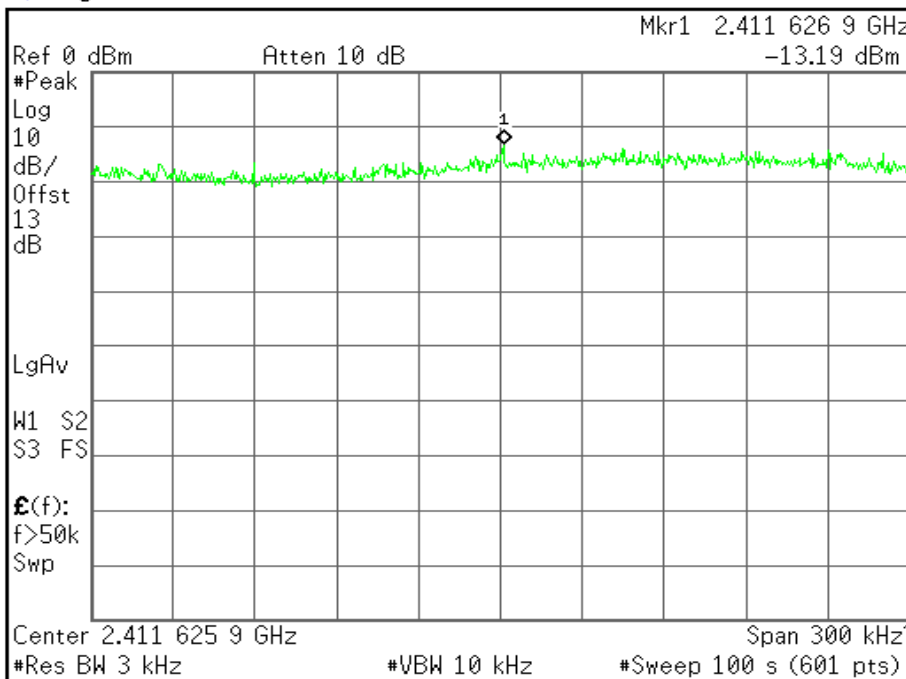


Peak Search	
Next Peak	
Next Pk Right	
Next Pk Left	
Min Search	
Pk-Pk Search	
Mkr → CF	
More	1 of 2

Copyright 2000-2002 Agilent Technologies



### PPSD (CH Mid)

Agilent 10:41:07 Oct 20, 2004

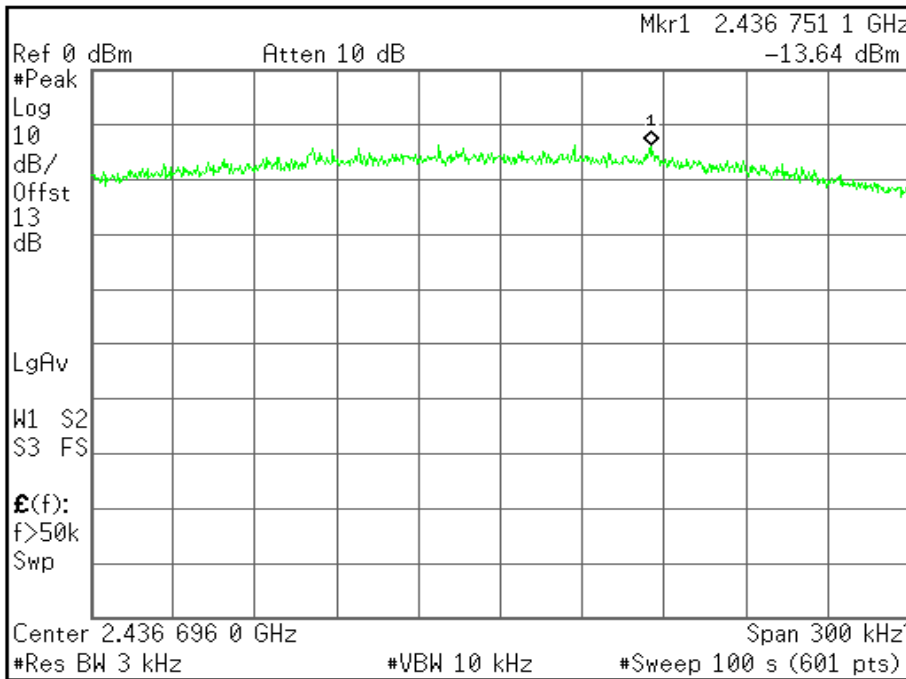


<b>Peak Search</b>
Next Peak
Next Pk Right
Next Pk Left
Min Search
Pk-Pk Search
Mkr → CF
<b>More</b> 1 of 2

Copyright 2000-2002 Agilent Technologies

### PPSD (CH High)

Agilent 10:50:16 Oct 20, 2004

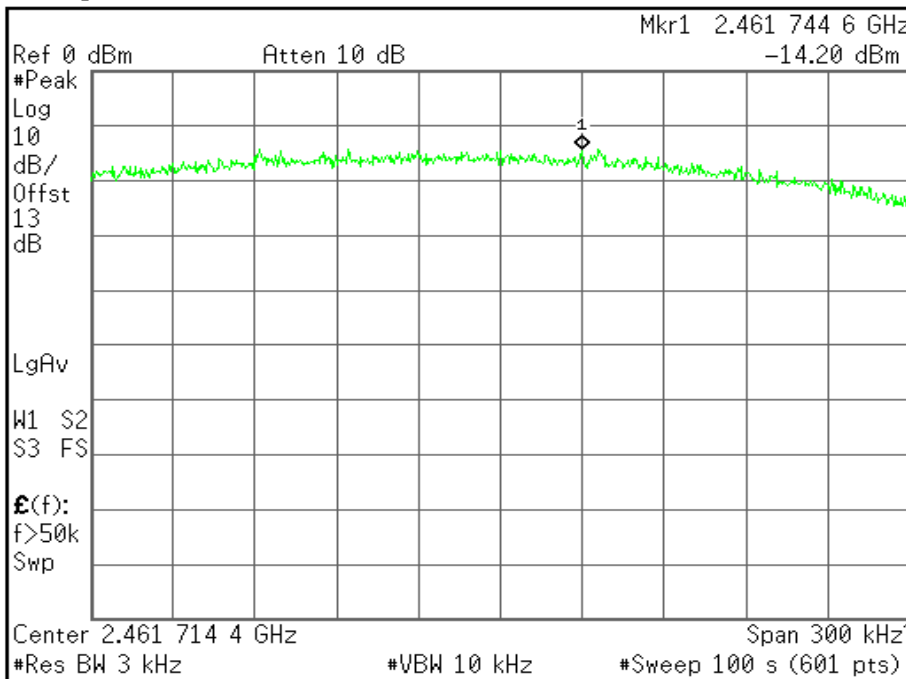

<b>Peak Search</b>
Next Peak
Next Pk Right
Next Pk Left
Min Search
Pk-Pk Search
Mkr → CF
<b>More</b> 1 of 2

Copyright 2000-2002 Agilent Technologies



## 7.5 RADIO FREQUENCY EXPOSURE

### LIMIT

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines. See §15.247(b)(4) and §1.1307(b)(1) of this chapter.

### EUT Specification

<b>EUT</b>	Notebook Computer
<b>Frequency band (Operating)</b>	<input checked="" type="checkbox"/> WLAN: 2.412GHz ~ 2.462GHz <input type="checkbox"/> WLAN: 5.18GHz ~ 5.32GHz / 5.50GHz ~ 5.70GHz <input type="checkbox"/> WLAN: 5.745GHz ~ 5825GHz <input type="checkbox"/> Others
<b>Device category</b>	<input type="checkbox"/> Portable (<20cm separation) <input checked="" type="checkbox"/> Mobile (>20cm separation) <input type="checkbox"/> Others
<b>Exposure classification</b>	<input type="checkbox"/> Occupational/Controlled exposure (S = 5mW/cm <sup>2</sup> ) <input checked="" type="checkbox"/> General Population/Uncontrolled exposure (S=1mW/cm <sup>2</sup> )
<b>Antenna diversity</b>	<input type="checkbox"/> Single antenna <input checked="" type="checkbox"/> Multiple antennas <input type="checkbox"/> Tx diversity <input type="checkbox"/> Rx diversity <input checked="" type="checkbox"/> Tx/Rx diversity
<b>Max. output power</b>	IEEE 802.11b: 19.39 dBm (86.90mW) IEEE 802.11g: 14.30 dBm (26.92mW)
<b>Antenna gain (Max)</b>	-1.86 dBi (Numeric gain: 0.65)
<b>Evaluation applied</b>	<input checked="" type="checkbox"/> MPE Evaluation* <input type="checkbox"/> SAR Evaluation <input type="checkbox"/> N/A

**Note:**

1. The maximum output power is 19.39dBm (86.90mW) at 2462MHz (with 0.65 numeric antenna gain.)
2. DTS device is not subject to routine RF evaluation; MPE estimate is used to justify the compliance.
3. For mobile or fixed location transmitters, no SAR consideration applied. The minimum separation generally be used is at least 20 cm, even if the calculations indicate that the MPE distance would be lesser.

### TEST RESULTS

No non-compliance noted.



**Calculation**

Given  $E = \sqrt{\frac{30 \times P \times G}{d}}$  &  $S = \frac{E^2}{3770}$

Where  $E$  = Field Strength in Volts / meter  
 $P$  = Power in Watts  
 $G$  = Numeric antenna gain  
 $d$  = Distance in meters  
 $S$  = Power Density in milliwatts / square centimeter

Combining equations and re-arranging the terms to express the distance as a function of the remaining variables yields:

$$d = \sqrt{\frac{30 \times P \times G}{3770 \times S}}$$

Changing to units of mW and cm, using:

$$P (mW) = P (W) / 1000 \text{ and}$$

$$d (cm) = 100 * d (m)$$

Yields

$$d = 100 \times \sqrt{\frac{30 \times (P / 1000) \times G}{3770 \times S}} = 0.282 \times \sqrt{\frac{P \times G}{S}}$$

Where  $d$  = distance in cm  
 $P$  = Power in mW  
 $G$  = Numeric antenna gain  
 $S$  = Power Density in mW / cm<sup>2</sup>

Substituting the logarithmic form of power and gain using:

$$P (mW) = 10 ^ (P (dBm) / 10) \text{ and}$$

$$G (\text{numeric}) = 10 ^ (G (dBi) / 10)$$

Yields

$$d = 0.282 \times \frac{10^{(P+G)/20}}{\sqrt{20}}$$

**Equation 1**

Where  $d$  = MPE safe distance in cm  
 $P$  = Power in dBm  
 $G$  = Antenna Gain in dBi  
 $S$  = Power Density Limit in mW / cm<sup>2</sup>



**Maximum Permissible Exposure (Bluetooth Module)**

EUT output power = 86.90 mW

Antenna Gain = 0.65

S = 1.0 mW / cm<sup>2</sup> from 1.1310 Table 1

Substituting these parameters into the above Equation 1:

→ MPE Safe Distance = 2.12 cm

*(For mobile or fixed location transmitters, the minimum separation distance is 20 cm, even if calculations indicate that the MPE distance would be less.)*



## 7.6 SPURIOUS EMISSIONS

### 7.6.1 Conducted Measurement

#### LIMIT


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

#### MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY43360131	01/10/2005

*Remark: Each piece of equipment is scheduled for calibration once a year.*

#### Test Configuration

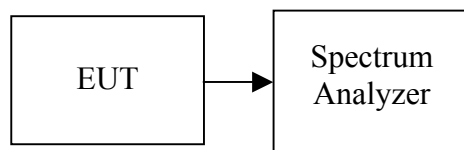

#### TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 KHz. The video bandwidth is set to 100 KHz.

Measurements are made over the 30MHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels.

#### TEST RESULTS

*No non-compliance noted*




Test Plot

IEEE 802.11b / CH Low


30MHz ~ 2.9GHz

Agilent 09:32:39 Oct 20, 2004

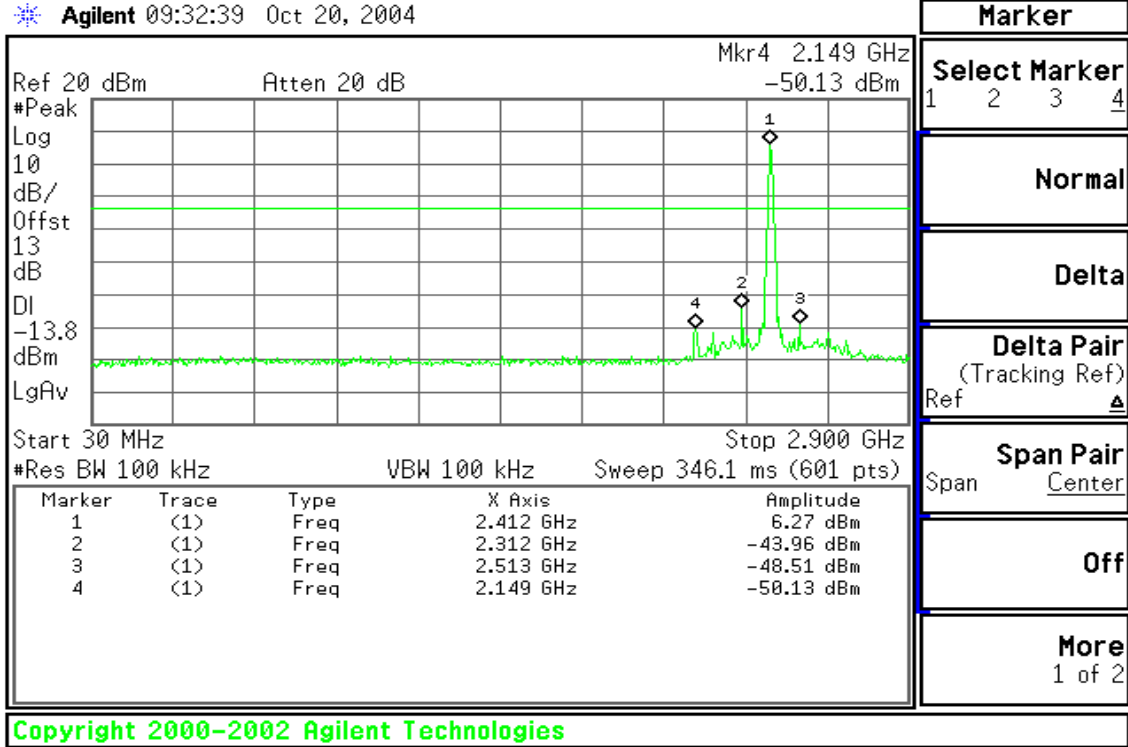

2.9GHz ~ 26.5GHz

Agilent 09:33:43 Oct 20, 2004

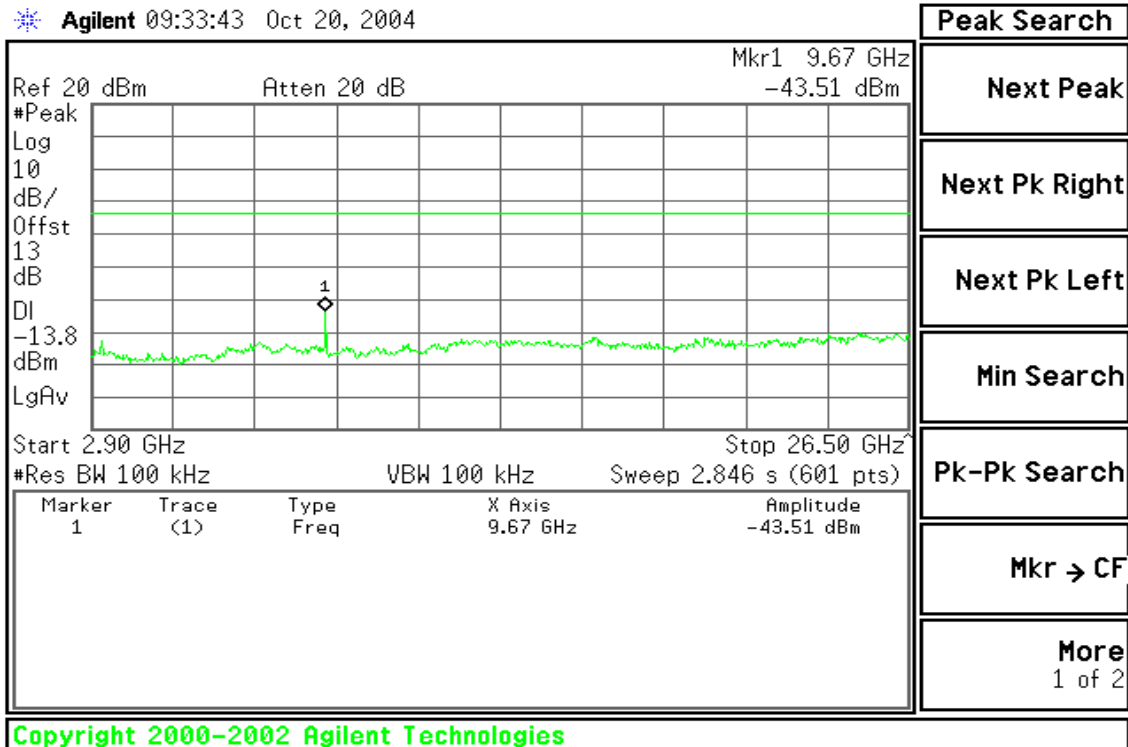




IEEE 802.11b / CH Mid

30MHz ~ 2.9GHz

Agilent 09:34:57 Oct 20, 2004

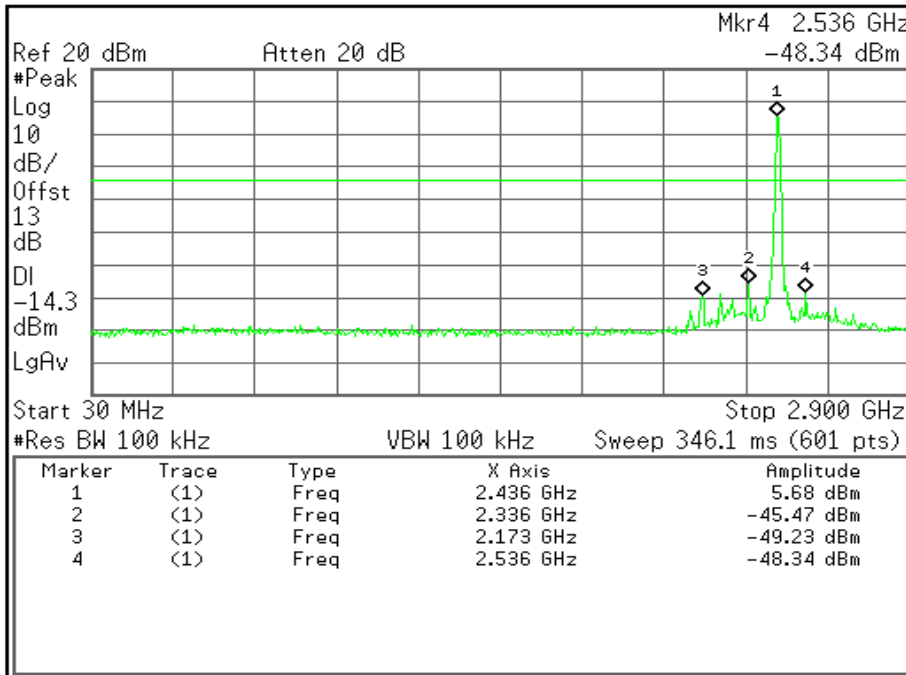

**Marker**

Select Marker  
1 2 3 4

Normal

Delta

Delta Pair  
(Tracking Ref)  
Ref ▲

Span Pair  
Span Center


Off

More  
1 of 2

Copyright 2000-2002 Agilent Technologies

2.9GHz ~ 26.5GHz

Agilent 09:35:41 Oct 20, 2004

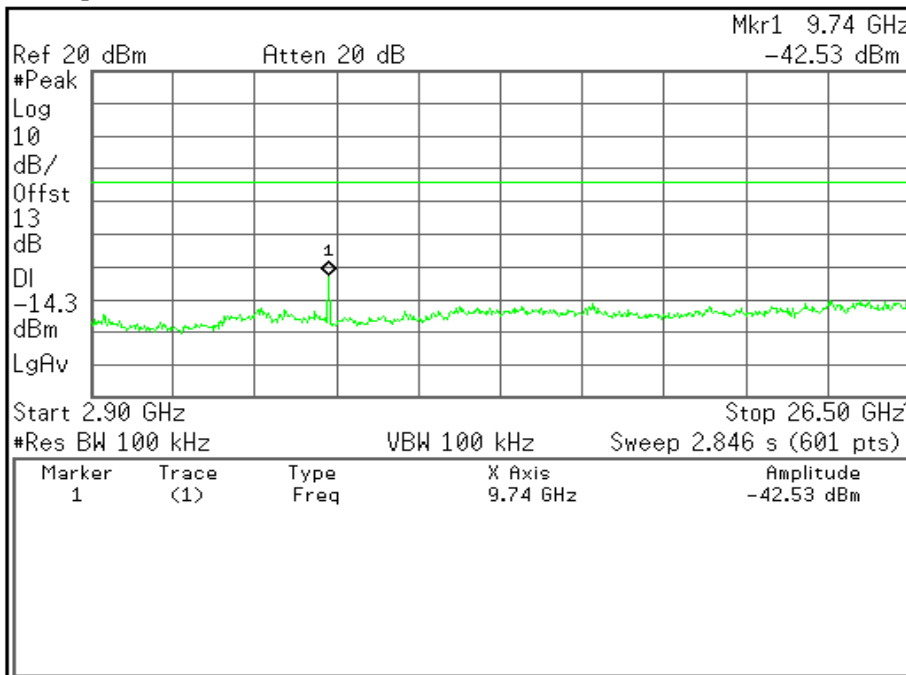

**Peak Search**

Next Peak

Next Pk Right

Next Pk Left

Min Search

Pk-Pk Search

Mkr → CF

More  
1 of 2

Copyright 2000-2002 Agilent Technologies






IEEE 802.11b / CH High

30MHz ~ 2.9GHz

Agilent 09:37:45 Oct 20, 2004

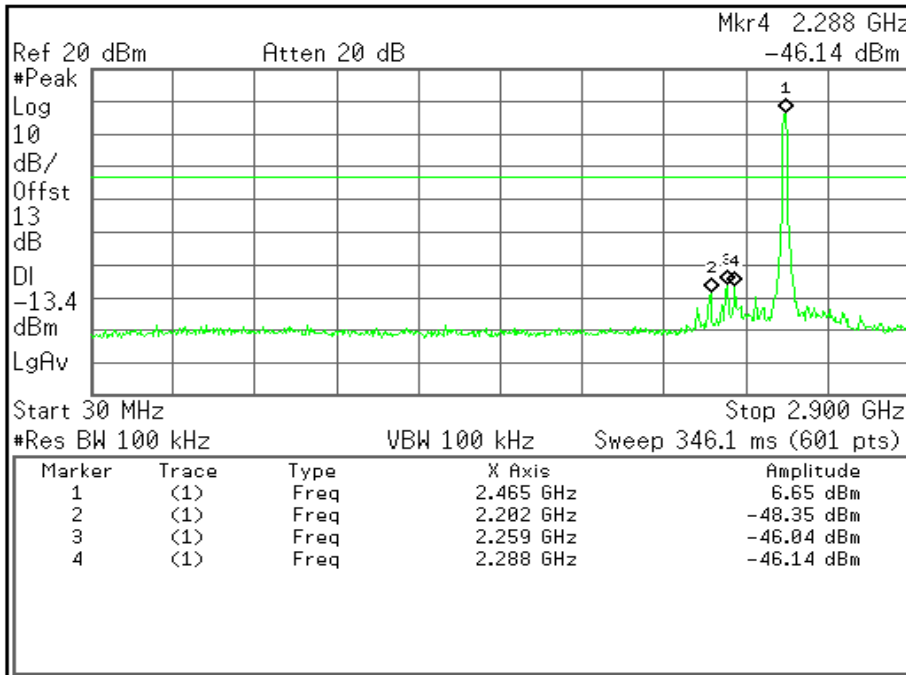

**Marker**

Select Marker  
1 2 3 4

Normal

Delta

Delta Pair  
(Tracking Ref)  
Ref ▲

Span Pair  
Span Center


Off

More  
1 of 2

Copyright 2000-2002 Agilent Technologies

2.9GHz ~ 26.5GHz

Agilent 09:38:32 Oct 20, 2004

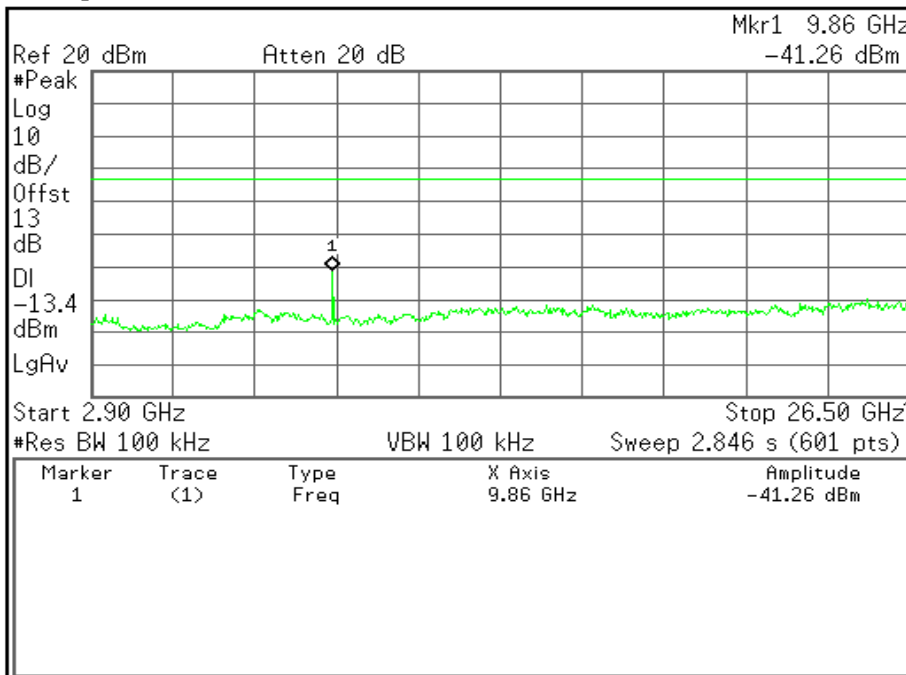

**Peak Search**

Next Peak

Next Pk Right

Next Pk Left

Min Search

Pk-Pk Search

Mkr → CF

More  
1 of 2


Copyright 2000-2002 Agilent Technologies



IEEE 802.11g / CH Low

30MHz ~ 2.9GHz

Agilent 10:55:02 Oct 20, 2004

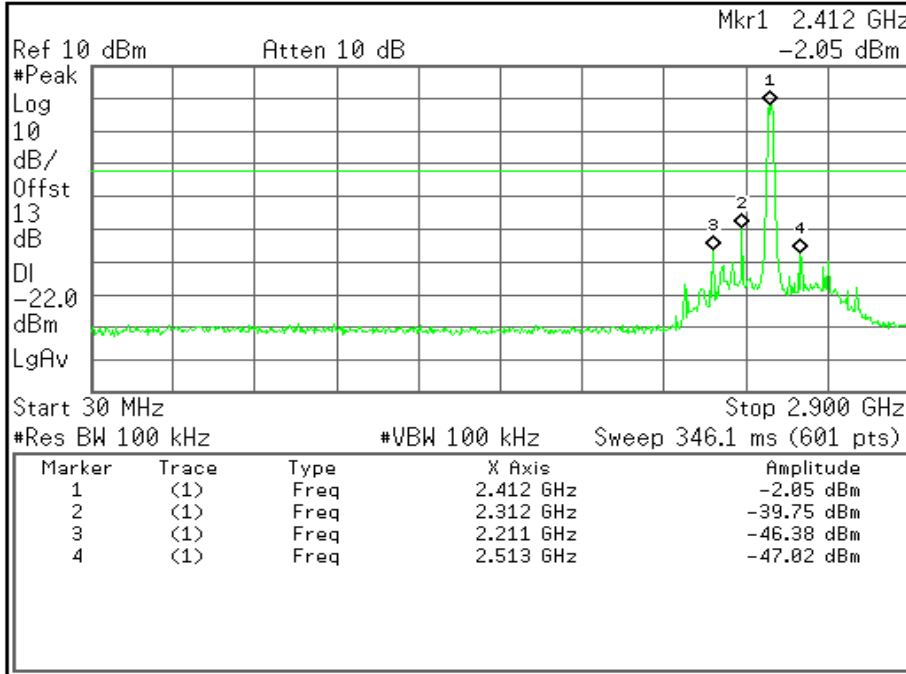

**Display**

Full Screen

Display Line  
-22.05 dBm  
On Off

Limits>

Active Fctn  
Position>  
Center


Title>

Preferences>

Copyright 2000-2002 Agilent Technologies

2.9GHz ~ 26.5GHz

Agilent 10:55:50 Oct 20, 2004

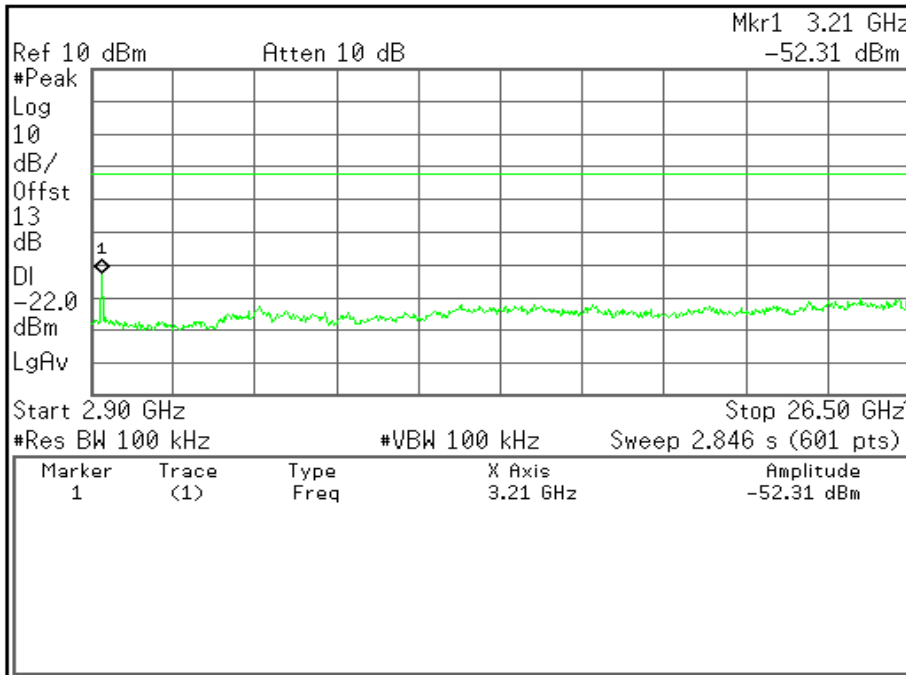

**Peak Search**

Next Peak

Next Pk Right

Next Pk Left

Min Search

Pk-Pk Search

Mkr → CF

More  
1 of 2


Copyright 2000-2002 Agilent Technologies



IEEE 802.11g / CH Mid

30MHz ~ 2.9GHz

Agilent 10:56:59 Oct 20, 2004

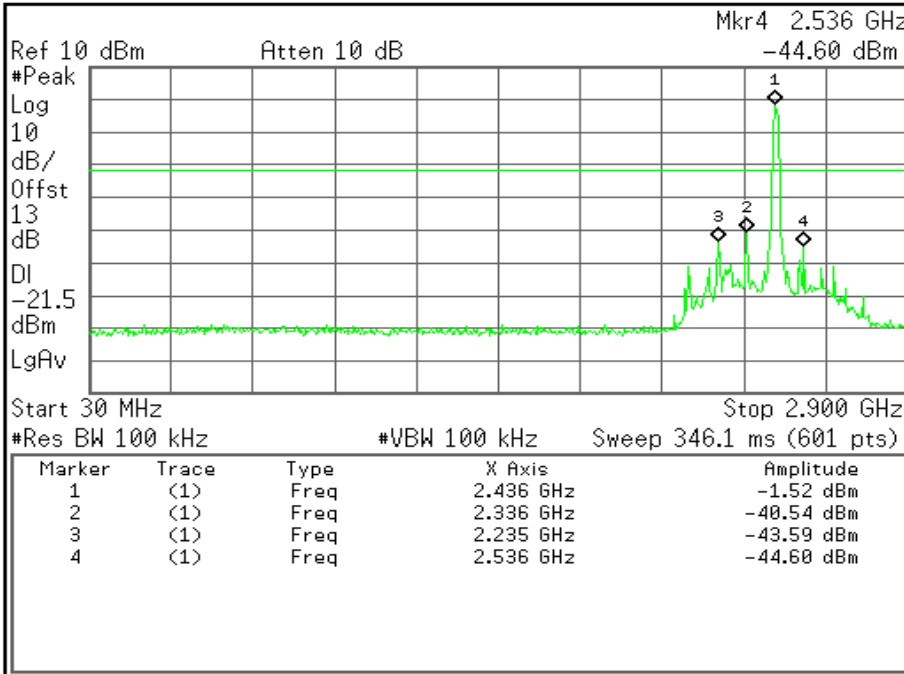

**Marker**

Select Marker  
1 2 3 4

Normal

Delta

Delta Pair  
(Tracking Ref)  
Ref ▲

Span Pair  
Span Center


Off

More  
1 of 2

Copyright 2000-2002 Agilent Technologies

2.9GHz ~ 26.5GHz

Agilent 10:57:50 Oct 20, 2004

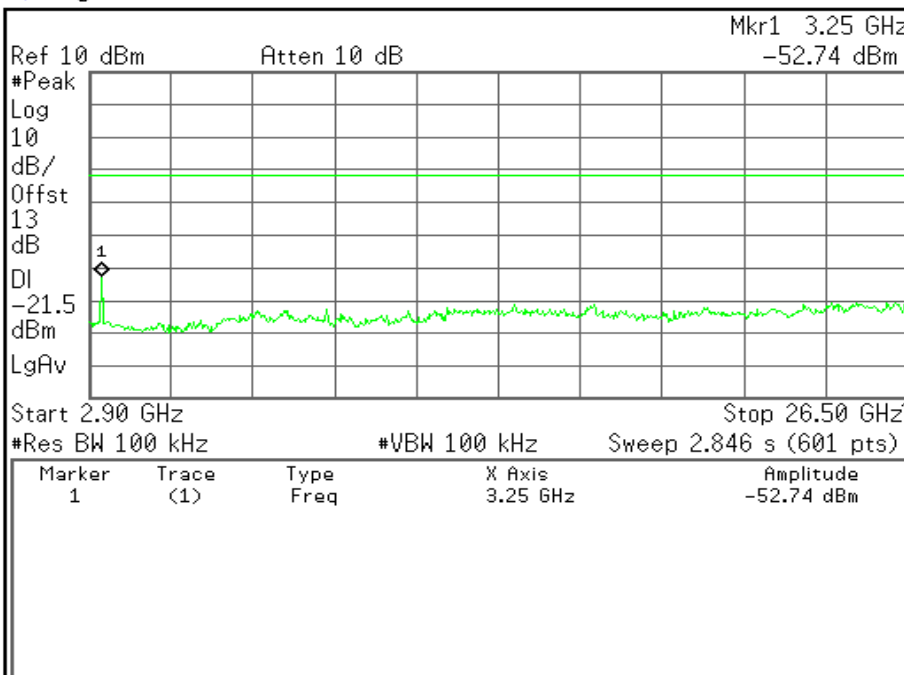

**Peak Search**

Next Peak

Next Pk Right

Next Pk Left

Min Search

Pk-Pk Search

Mkr → CF

More  
1 of 2


Copyright 2000-2002 Agilent Technologies



### IEEE 802.11g / CH High

### 30MHz ~ 2.9GHz

Agilent 10:59:04 Oct 20, 2004

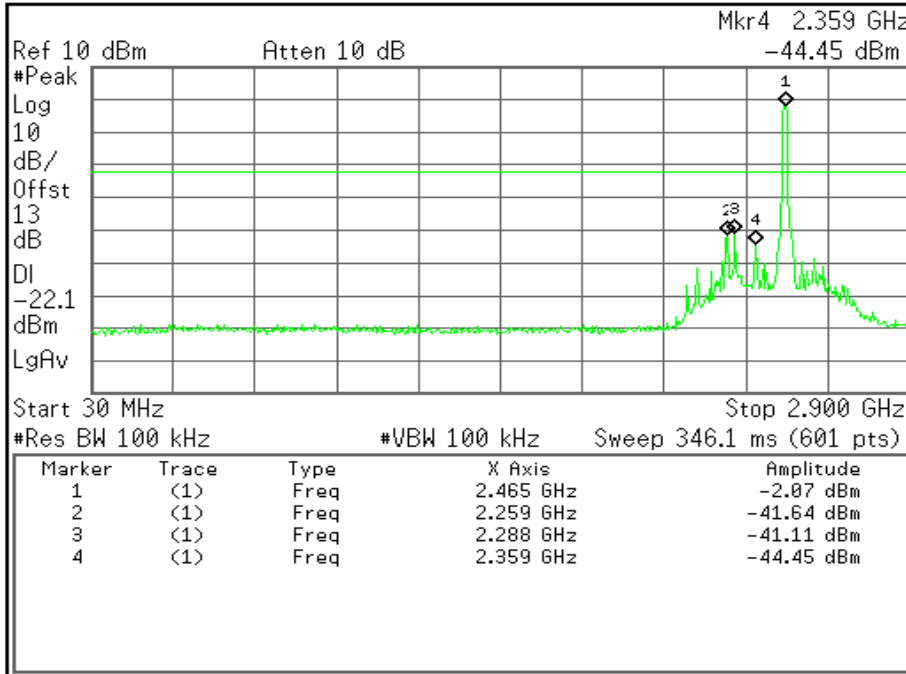

**Marker**

Select Marker  
1 2 3 4

Normal

Delta

Delta Pair  
(Tracking Ref)  
Ref ▲

Span Pair  
Span Center


Off

More  
1 of 2

Copyright 2000-2002 Agilent Technologies

### 2.9GHz ~ 26.5GHz

Agilent 10:59:40 Oct 20, 2004

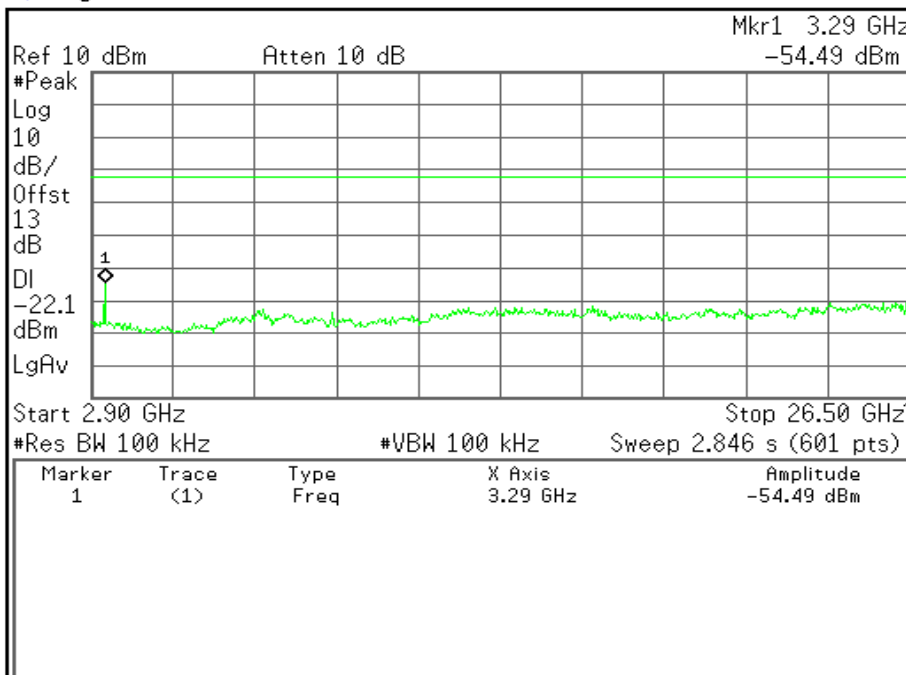

**Peak Search**

Next Peak

Next Pk Right

Next Pk Left

Min Search

Pk-Pk Search

Mkr → CF

More  
1 of 2

Copyright 2000-2002 Agilent Technologies



### 7.6.2 Radiated Emissions

#### LIMIT

1. Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (mV/m)	Measurement Distance (m)
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3

*Note: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.*

2. In the above emission table, the tighter limit applies at the band edges.

Frequency (Hz)	Field Strength ( $\mu$ V/m at 3-meter)	Field Strength (dB $\mu$ V/m at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54


**MEASUREMENT EQUIPMENT USED**

Open Area Test Site # 3				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	ADVANTEST	R3261A	N/A	03/18/2005
EMI Test Receiver	R&S	ESVS20	838804/004	01/04/2005
Pre-Amplifier	HP	8447D	2944A09173	03/03/2005
Bi-log Antenna	SCHWAZBECK	VULB9163	145	07/05/2005
Turn Table	EMCO	2081-1.21	9709-1885	N.C.R
Antenna Tower	EMCO	2075-2	9707-2060	N.C.R
Controller	EMCO	2090	9709-1256	N.C.R
RF Switch	ANRITSU	MP59B	M53867	N.C.R
Site NSA	C&C	N/A	N/A	09/06/2005
Horn antenna	Schwarzbeck	BBHA 9120	D210	02/23/2005
Loop Antenna	EMCO	6502	2356	07/10/2005
Pre-Amplifier	HP	8449B	3008B00965	10/02/2005


*Remark: Each piece of equipment is scheduled for calibration once a year.*

**Test Configuration**

**Below 1 GHz**

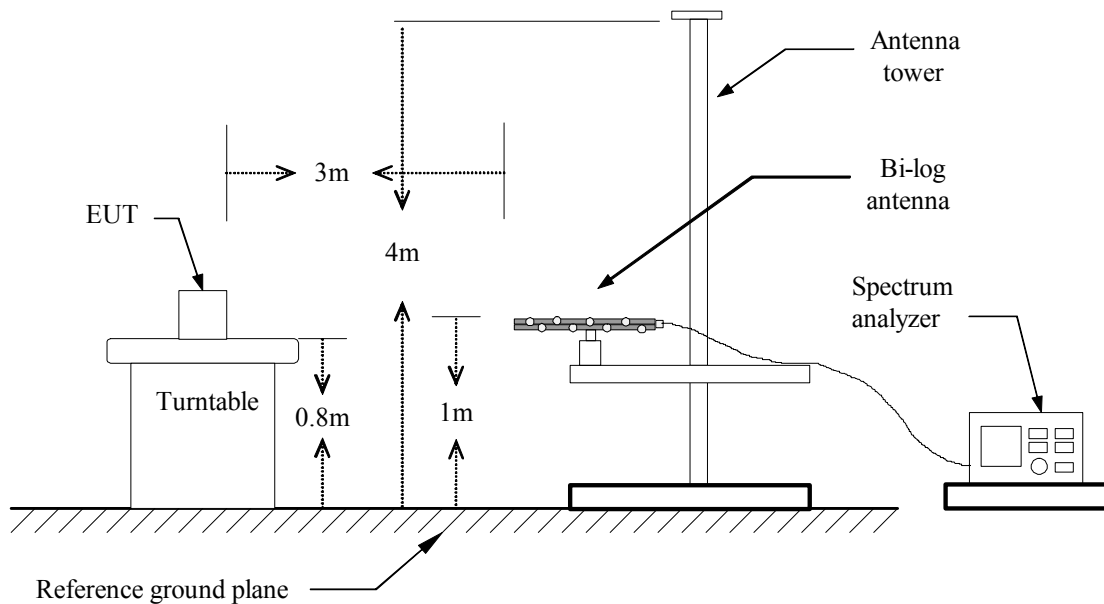

## Above 1 GHz

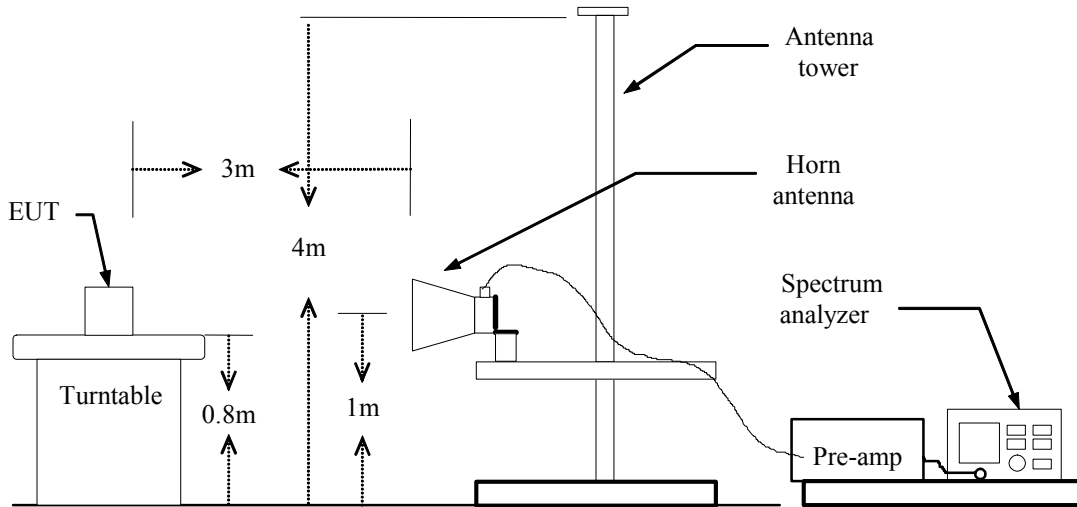

## TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:

Below 1GHz:

RBW=100kHz / VBW=300kHz / Sweep=AUTO

Above 1GHz:

(a) PEAK: RBW=VBW=1MHz / Sweep=AUTO

(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO

7. Repeat above procedures until the measurements for all frequencies are complete.



### TEST RESULTS

#### Below 1 GHz

**Operation Mode:** TX / IEEE 802.11b / CH Low

**Test Date:** October 23, 2004

**Temperature:** 28°C

**Tested by:** Roy Cheng

**Humidity:** 60 % RH

**Polarity:** Ver. / Hor.

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limit 3m (dBuV/m)	Safe Margin (dB)
100.20	V	Peak	18.53	14.10	32.63	43.50	-10.87
165.90	V	Peak	15.49	11.84	27.33	43.50	-16.17
211.80	V	Peak	11.77	15.11	26.88	43.50	-16.62
228.45	V	Peak	15.40	15.46	30.86	46.00	-15.14
456.33	V	Peak	9.27	20.47	29.74	46.00	-16.26
619.67	V	Peak	4.44	25.18	29.62	46.00	-16.38
165.90	H	Peak	12.49	11.84	24.33	43.50	-19.17
228.45	H	Peak	11.40	15.46	26.86	46.00	-19.14
554.33	H	Peak	2.82	24.37	27.19	46.00	-18.81
618.50	H	Peak	3.09	25.19	28.28	46.00	-17.72
683.83	H	Peak	2.37	25.48	27.85	46.00	-18.15
749.17	H	Peak	2.72	25.88	28.60	46.00	-17.40

**Notes:**

1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. The IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.





Operation Mode: TX / IEEE 802.11b / CH Mid

Test Date: October 23, 2004

Temperature: 28°C

Tested by: Roy Cheng

Humidity: 60 % RH

Polarity: Ver. / Hor.

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit 3m (dBUV/m)	Safe Margin (dB)
99.75	V	Peak	18.19	14.08	32.27	43.50	-11.23
165.90	V	Peak	15.33	11.84	27.17	43.50	-16.33
228.00	V	Peak	15.59	15.44	31.03	46.00	-14.97
456.33	V	Peak	10.93	20.47	31.40	46.00	-14.60
521.67	V	Peak	5.51	23.28	28.79	46.00	-17.21
618.50	V	Peak	4.09	25.19	29.28	46.00	-16.72
165.90	H	Peak	12.99	11.84	24.83	43.50	-18.67
195.60	H	Peak	11.25	15.44	26.69	43.50	-16.81
554.33	H	Peak	2.15	24.37	26.52	46.00	-19.48
618.50	H	Peak	2.42	25.19	27.61	46.00	-18.39
683.83	H	Peak	1.87	25.48	27.35	46.00	-18.65
749.17	H	Peak	2.55	25.88	28.43	46.00	-17.57

Notes:

1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. The IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.



Operation Mode: TX / IEEE 802.11b / CH High

Test Date: October 23, 2004

Temperature: 28°C

Tested by: Roy Cheng

Humidity: 60 % RH

Polarity: Ver. / Hor.

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit 3m (dBUV/m)	Safe Margin (dB)
100.20	V	Peak	18.53	14.10	32.63	43.50	-10.87
165.90	V	Peak	15.33	11.84	27.17	43.50	-16.33
456.33	V	Peak	8.93	20.47	29.40	46.00	-16.60
521.67	V	Peak	5.17	23.28	28.45	46.00	-17.55
54.33	V	Peak	3.98	24.37	28.35	40.00	-11.65
618.50	V	Peak	4.76	25.19	29.95	46.00	-16.05
165.90	H	Peak	12.33	11.84	24.17	43.50	-19.33
228.00	H	Peak	11.25	15.44	26.69	46.00	-19.31
456.33	H	Peak	8.93	20.47	29.40	46.00	-16.60
521.67	H	Peak	5.17	23.28	28.45	46.00	-17.55
554.33	H	Peak	3.98	24.37	28.35	46.00	-17.65
618.50	H	Peak	4.76	25.19	29.95	46.00	-16.05

Notes:

1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. The IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.



Operation Mode: TX / IEEE 802.11g / CH Low

Test Date: October 23, 2004

Temperature: 28°C

Tested by: Roy Cheng

Humidity: 60 % RH

Polarity: Ver. / Hor.

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit 3m (dBUV/m)	Safe Margin (dB)
100.20	V	Peak	18.69	14.10	32.79	43.50	-10.71
165.90	V	Peak	15.33	11.84	27.17	43.50	-16.33
228.00	V	Peak	15.92	15.44	31.36	46.00	-14.64
456.33	V	Peak	8.77	20.47	29.24	46.00	-16.76
521.67	V	Peak	5.51	23.28	28.79	46.00	-17.21
619.67	V	Peak	4.11	25.18	29.29	46.00	-16.71
165.90	H	Peak	11.99	11.84	23.83	43.50	-19.67
228.45	H	Peak	11.23	15.46	26.69	46.00	-19.31
618.50	H	Peak	2.59	25.19	27.78	46.00	-18.22
683.83	H	Peak	2.70	25.48	28.18	46.00	-17.82
749.17	H	Peak	2.72	25.88	28.60	46.00	-17.40
822.67	H	Peak	1.62	26.66	28.28	46.00	-17.72

Notes:

1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. The IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.



Operation Mode: TX / IEEE 802.11g / CH Mid

Test Date: October 23, 2004

Temperature: 28°C

Tested by: Roy Cheng

Humidity: 60 % RH

Polarity: Ver. / Hor.

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit 3m (dBUV/m)	Safe Margin (dB)
100.20	V	Peak	18.36	14.10	32.46	43.50	-11.04
165.90	V	Peak	14.49	11.84	26.33	43.50	-17.17
228.45	V	Peak	15.23	15.46	30.69	46.00	-15.31
456.33	V	Peak	9.27	20.47	29.74	46.00	-16.26
521.67	V	Peak	5.84	23.28	29.12	46.00	-16.88
619.67	V	Peak	4.78	25.18	29.96	46.00	-16.04
165.90	H	Peak	12.66	11.84	24.50	43.50	-19.00
228.45	H	Peak	11.57	15.46	27.03	46.00	-18.97
554.33	H	Peak	1.65	24.37	26.02	46.00	-19.98
619.67	H	Peak	2.11	25.18	27.29	46.00	-18.71
685.00	H	Peak	1.53	25.50	27.03	46.00	-18.97
749.17	H	Peak	2.05	25.88	27.93	46.00	-18.07

Notes:

1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. The IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.



Operation Mode: TX / IEEE 802.11g / CH High

Test Date: October 23, 2004

Temperature: 28°C

Tested by: Roy Cheng

Humidity: 60 % RH

Polarity: Ver. / Hor.

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit 3m (dBUV/m)	Safe Margin (dB)
99.30	V	Peak	18.42	13.99	32.41	43.50	-11.09
165.90	V	Peak	15.16	11.84	27.00	43.50	-16.50
228.00	V	Peak	15.75	15.44	31.19	46.00	-14.81
456.33	V	Peak	10.43	20.47	30.90	46.00	-15.10
521.67	V	Peak	6.01	23.28	29.29	46.00	-16.71
619.67	V	Peak	4.61	25.18	29.79	46.00	-16.21
86.25	H	Peak	10.32	11.12	21.44	40.00	-18.56
165.90	H	Peak	11.99	11.84	23.83	43.50	-19.67
228.00	H	Peak	11.42	15.44	26.86	46.00	-19.14
619.67	H	Peak	1.78	25.18	26.96	46.00	-19.04
685.00	H	Peak	1.53	25.50	27.03	46.00	-18.97
750.33	H	Peak	2.72	25.88	28.60	46.00	-17.40

Notes:

1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. The IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.



**Above 1 GHz**

**Operation Mode:** TX / IEEE 802.11b / CH Low

**Test Date:** October 23, 2004

**Temperature:** 28°C

**Tested by:** Roy Cheng

**Humidity:** 60 % RH

**Polarity:** Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
2306.67	V	48.50	---	-3.35	45.15	---	74.00	54.00	-8.85	Peak
N/A	---	---	---	---	---	---	---	---	---	---
2310.00	H	49.84	---	-3.34	46.50	---	74.00	54.00	-7.50	Peak
N/A	---	---	---	---	---	---	---	---	---	---

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
  - a. Peak Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 1MHz, Sweep time = Auto.
  - b. AV Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 10Hz, Sweep time = Auto.









Operation Mode: TX / IEEE 802.11g / CH Low

Test Date: October 23, 2004

Temperature: 28°C

Tested by: Roy Cheng

Humidity: 60 % RH

Polarity: Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
2310.00	V	49.50	---	-3.34	46.16	---	74.00	54.00	-7.84	Peak
N/A	---	---	---	---	---	---	---	---	---	---
2310.00	H	51.84	---	-3.34	48.50	---	74.00	54.00	-5.50	Peak
N/A	---	---	---	---	---	---	---	---	---	---

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
  - a. Peak Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 1MHz, Sweep time = Auto.
  - b. AV Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 10Hz, Sweep time = Auto



Operation Mode: TX / IEEE 802.11g / CH Mid

Test Date: October 23, 2004

Temperature: 28°C

Tested by: Roy Cheng

Humidity: 60 % RH

Polarity: Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
2333.333	V	49.34	---	-3.27	46.07	---	74.00	54.00	-7.93	Peak
N/A	---	---	---	---	---	---	---	---	---	---
2333.333	H	48.84	---	-3.27	45.57	---	74.00	54.00	-8.43	Peak
N/A	---	---	---	---	---	---	---	---	---	---

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
  - a. Peak Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 1MHz, Sweep time = Auto.
  - b. AV Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 10Hz, Sweep time = Auto



Operation Mode: TX / IEEE 802.11g / CH High

Test Date: October 23, 2004

Temperature: 28°C

Tested by: Roy Cheng

Humidity: 60 % RH

Polarity: Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
2356.67	V	49.00	---	-3.20	45.80	---	74.00	54.00	-8.20	Peak
N/A	---	---	---	---	---	---	---	---	---	---
2286.67	H	50.34	---	-3.42	46.92	---	74.00	54.00	-7.08	Peak
N/A	---	---	---	---	---	---	---	---	---	---

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
  - a. Peak Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 1MHz, Sweep time = Auto.
  - b. AV Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 10Hz, Sweep time = Auto



## 7.7 POWERLINE CONDUCTED EMISSIONS

### LIMIT

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dBµV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (*Live Line* and *Neutral Line*) and ground at the power terminals.

### MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI TEST RECEIVER 9kHz-30MHz	ROHDE & SCHWARZ	ESHS30	828144/003	09/24/2005
TWO-LINE V-NETWORK 9kHz-30MHz	SCHAFFNER	NNB41	03/10013	06/11/2005
LISN 10kHz-100MHz	EMCO	3825/2	9106-1809	02/05/2005

*Remark: Each piece of equipment is scheduled for calibration once a year.*

### Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

### TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.



### TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

#### Test Data

**Operation Mode:** TX + RX mode      **Test Date:** October 15, 2004  
**Temperature:** 24°C      **Tested by:** Arno Hsieh  
**Humidity:** 58% RH

Freq. (MHz)	Q.P.	AVG	Q.P.	AVG	Q.P.	AVG	NOTE
	Raw (dBuV)	Raw (dBuV)	Limit (dBuV)	Limit (dBuV)	Margin (dB)	Margin (dB)	
2.188	38.30	---	56.00	46.00	-17.70	---	L1
2.384	36.20	---	56.00	46.00	-19.80	---	L1
5.412	30.40	---	60.00	50.00	-29.60	---	L1
6.184	34.50	---	60.00	50.00	-25.50	---	L1
7.026	30.10	---	60.00	50.00	-29.90	---	L1
9.915	31.40	---	60.00	50.00	-28.60	---	L1
2.062	41.30	---	56.00	46.00	-14.70	---	L2
2.381	36.20	---	56.00	46.00	-19.80	---	L2
4.314	30.30	---	56.00	46.00	-25.70	---	L2
5.472	31.20	---	60.00	50.00	-28.80	---	L2
7.725	29.40	---	60.00	50.00	-30.60	---	L2
8.762	27.60	---	60.00	50.00	-32.40	---	L2


**Note:**

1. Measuring frequencies from 0.15 MHz to 30MHz.
2. The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Quasi-peak detector and average detector.
3. “---” denotes the emission level was or more than 2dB below the Average limit
4. The IF bandwidth of SPA between 0.15MHz to 30MHz was 10kHz; the IF bandwidth of Test Receiver between 0.15MHz to 30MHz was 9kHz;
5. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line)



Test Plots

*Conducted emissions (Line 1)*

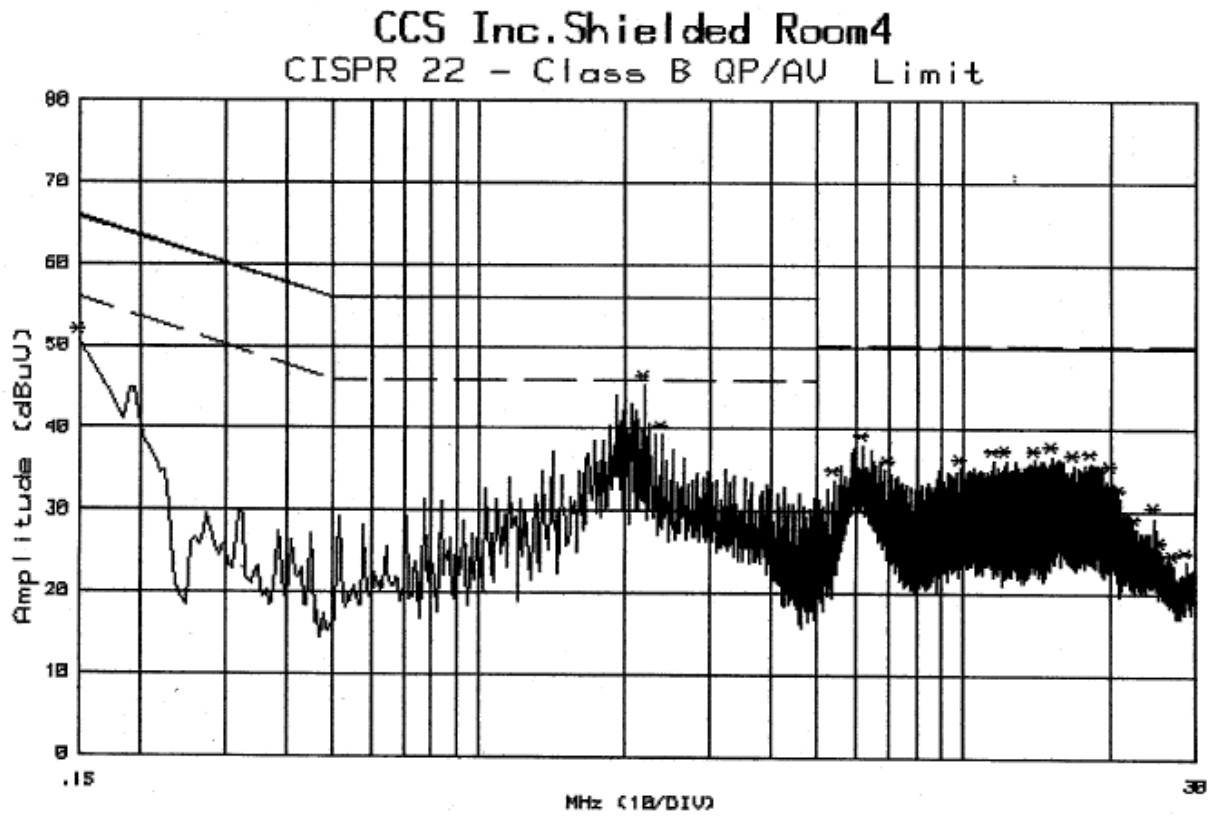

*Conducted emissions (Line 2)*

